



Test Report No.:  
**FCCSZ2025-0018-RF2**

## RF Test Report

**FCC ID** : 2AYHY-UG65CAT1  
**EUT** : LoRaWAN Gateway  
**MODEL** : See Section 2.2  
**BRAND NAME** : Milesight  
**APPLICANT** : Xiamen Milesight IoT Co., Ltd.  
**Classification of Test** : N/A

**CVC Testing Technology (Shenzhen) Co., Ltd.**



<b>Client</b>	Name: Xiamen Milesight IoT Co., Ltd.  Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China				
<b>Manufacturer</b>	Name: Xiamen Milesight IoT Co., Ltd.  Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China				
<b>Equipment Under Test</b>	Name: LoRaWAN Gateway  Model/Type: See Section 2.2  Brand: Milesight  Serial No.: N/A  Sampe No.: 2-1				
Date of Receipt.	Feb.2,2025	Date of Testing	Feb.2,2025~Apr.18,2025		
<b>Test Specification</b>		<b>Test Result</b>			
FCC Part 15, Subpart C, Section 15.247		PASS			
<b>Evaluation of Test Result</b>	The equipment under test was found to comply with the requirements of the standards applied.				
	Seal of CVC  <b>Issue Date: Apr.18,2025</b>				
Compiled by:  <u>Cai Jianyu</u>  <u>Cai Jianyu</u> Name              Signature	Reviewed by:  <u>Mo Xianbiao</u>  <u>Mo Xianbiao</u> Name              Signature	Approved by:    <u>Dong Sanbi</u> Name              Signature			
<b>Other Aspects: NONE.</b>					
Abbreviations:OK, Pass= passed		Fail = failed	N/A= not applicable		
EUT= equipment, sample(s) under tested					

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS .....	6
1.2 MEASUREMENT UNCERTAINTY .....	8
1.3 TEST LOCATION .....	9
<b>2 GENERAL INFORMATION .....</b>	<b>10</b>
2.1 GENERAL PRODUCT INFORMATION .....	10
2.2 ADDITIONAL MODEL/TYPE .....	10
2.3 OTHER INFORMATION .....	11
2.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	12
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
2.6 DESCRIPTION OF SUPPORT UNITS .....	14
<b>3 TEST TYPES AND RESULTS .....</b>	<b>15</b>
3.1 CONDUCTED EMISSION .....	15
3.1.1 LIMITS .....	15
3.1.2 TEST PROCEDURES .....	15
3.1.3 TEST SETUP .....	15
3.1.4 TEST RESULTS .....	16
3.2 RADIATED EMISSION AND BANDEdge MEASUREMENT .....	18
3.2.1 LIMIT .....	18
3.2.2 MEASUREMENT PROCEDURE .....	18
3.2.3 TEST SETUP .....	19
3.2.4 TEST RESULTS .....	21
3.3 6DB BANDWIDTH MEASUREMENT .....	26
3.3.1 LIMITS .....	26
3.3.2 MEASUREMENT PROCEDURE .....	26
3.3.3 TEST SETUP .....	26
3.3.4 TEST RESULT .....	27
3.4 CONDUCTED OUTPUT POWER .....	28
3.4.1 LIMITS .....	28
3.4.2 MEASUREMENT PROCEDURE .....	28
3.4.3 TEST SETUP .....	28
3.4.4 TEST RESULT .....	29
3.5 POWER SPECTRAL DENSITY MEASUREMENT .....	30
3.5.1 LIMITS .....	30
3.5.2 MEASUREMENT PROCEDURE .....	30
3.5.3 TEST SETUP .....	30
3.5.4 TEST RESULT .....	31
3.6 OUT OF BAND EMISSION MEASUREMENT .....	32
3.6.1 LIMITS .....	32
3.6.2 MEASUREMENT PROCEDURE .....	32
3.6.3 TEST SETUP .....	32
3.6.4 TEST RESULT .....	33
3.7 ANTENNA REQUIREMENT .....	35
3.7.1 LIMITS OFFREQUENCY STABILITY .....	35
3.7.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION .....	35
3.7.3 ANTENNA GAIN .....	35
<b>4 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>36</b>
<b>5 PHOTOGRAPHS OF THE EUT .....</b>	<b>37</b>



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2025-0018-RF2	Original release	Apr.18,2025



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Meet the requirement of limit.



## 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Antenna Port Conducted Test					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2025.5.22
#4Shielding room	MORI	443	N/A	3 year	2026.5.16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168588	1 year	2025.5.24
Analog signal Generator(100kHz ~12.75GHz)	Rohde&Schwarz	SMB 100A	181882	1 year	2025.4.27
Vector signal Generator(8kHz~6GHz)	Rohde&Schwarz	SMBV 100B	101846	1 year	2025.4.28
DC power supply	Rohde&Schwarz	HMC8041-G	101203	1 year	2025.4.29
RF control unit(2/3/4/5G)	Tonscend	JS0806-1	CS0300027	1 year	2025.4.28
Automatic filter bank(2/3/4G)	Tonscend	JS0806-F	CS0300028	1 year	2025.4.28
Automatic filter bank(5G)	Tonscend	JS0806-F-5G NR	N/A	1 year	2025.4.28
Temperature and humidity meter	UNI-T	A10T	C193561464	1 year	2025.4.27
Radio Communication Analyzer	Anritsu	MT8821C	6272374548	1 year	2026.1.07
Constant temperature humidity chamber	TEELONG	TL-HW-225B	20220518-01	1 year	2025.5.24
Radio Communication Test Station	Anritsu	MT8000A	6272354169	1 year	2026.1.07
Radiation Spurious(Above 1GHz)					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2025.4.28
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2026.1.22
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2026.3.28
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2026.3.24
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2025.4.28
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2025.4.28
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2025.4.28
#2 control room	MORI	433	CS0200059	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.27
CE Test - 3M Chamber					
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
limiter (10 dB)	Rohde&Schwarz	ESH3-Z2	102824	1 year	2025.5.15
Voltage probe	Rohde&Schwarz	CVP9222C	28	1 year	2025.4.27
Current probe	Rohde&Schwarz	EZ-17	101442	1 year	2025.4.28
ISN network	Rohde&Schwarz	ENV 81	100401	1 year	2025.4.28
ISN network	Rohde&Schwarz	ENV 81 Cat6	101896	1 year	2025.4.28
#1Shielding room	MORI	854	N/A	3 year	2026.5.16
LISN	SCHWARZBECK	NSLK 8129	5021	1 year	2025.4.27
Temperature and humidity meter	/	C193561430	C193561430	1 year	2025.4.27



# CVC Testing Technology (Shenzhen) Co., Ltd.

Test Report No.: FCCSZ2025-0018-RF2

Page 7 of 38

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
RE Test - 3M Chamber(Below 1GHz)					
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2025.5.2 4
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2025.6.3
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	1132	1 year	2026.2.2 7
Horn antenna(1GHz-18GHz)	SCHWARZBECK	BBHA9120	02793	1 year	2026.1.2 0
Horn antenna(18GHz-40GHz)	SCHWARZBECK	BBHA 9170	1003	1 year	2026.3.1 4
3m anechoic chamber	MORI	966	N/A	1 year	2026.5.1 8
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100298	1 year	2025.4.2 8
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2025.4.2 8
Attenuator	/	ATT-6-2	221230015	1 year	2026.1.1 2
#1 control room	MORI	433	/	1 year	2026.5.1 6
Temperature and humidity meter	/	C193561473	C193561473	1 year	2025.4.2 7

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:


No.	Item	Measurement Uncertainty
1	Conducted emission test	+/-2.7 dB
2	Radiated emission 9kHz-30MHz	+/-5.6 dB
3	Radiated emission 30MHz-1GHz	+/-4.6 dB
4	Radiated emission 1GHz-18GHz	+/-4.4 dB
5	Radiated emission 18GHz-40GHz	+/-5.1 dB
6	RF power	+/-0.9 dB
7	Power Spectral Density	+/-0.8 dB
8	Conducted spurious emissions	+/-2.7 dB
9	Transmission Time	+/-0.27%
10	Occupied Bandwidth	+/-1.86%

**Remark: 95% Confidence Levels, k=2.**

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed.

The measurement uncertainty is mentioned in this test report, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong.

measured value, measurement uncertainty, verdict

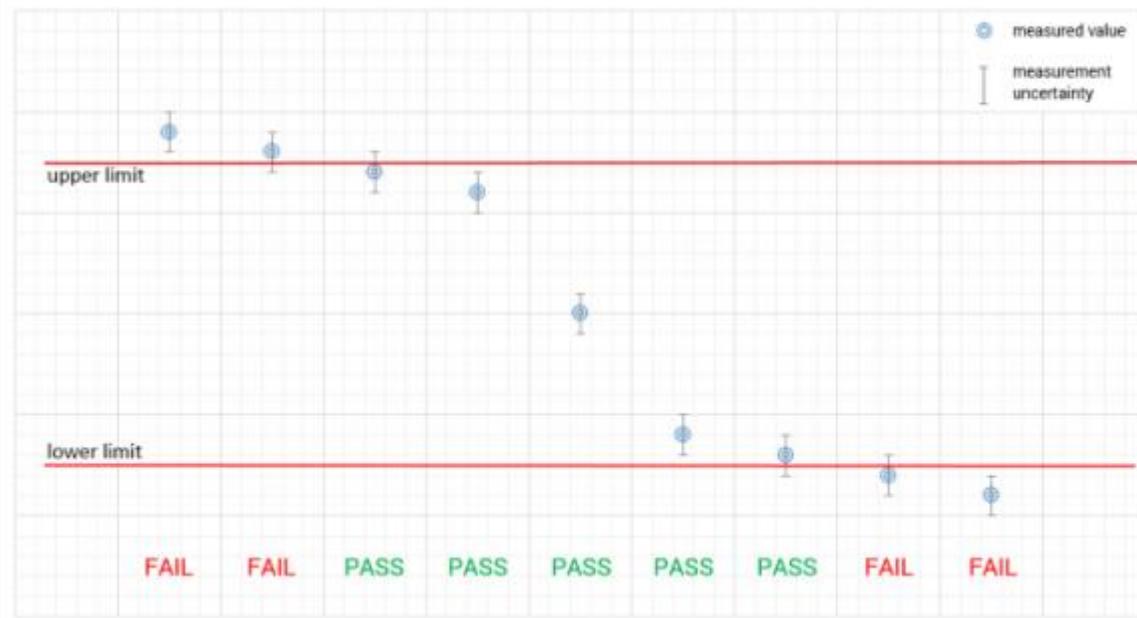



## 1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

CABID:CN0137

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



## 2 GENERAL INFORMATION

### 2.1 GENERAL PRODUCT INFORMATION

PRODUCT	LoRaWAN Gateway
BRAND	Milesight
MODEL	UG65-L09NA-915M-EA(ECA)
ADDITIONAL MODEL	ND65-L09NA-915M-EA(ECA), UG65, ND65, UG65-L09NA-915M-EA, ND65-L09NA-915M-EA, UG65-915M-EA, ND65-915M-EA
POWER SUPPLY	1、PoE 2、DC 9~24V
MODULATION TYPE	Chirp Spread Spectrum
OPERATING FREQUENCY	DTS 500kHz, 903MHz~927.5MHz
NUMBER OF CHANNEL	16
PEAK OUTPUT POWER	19.16dBm (Maximum)
ANTENNA TYPE (Remark 3)	External Antenna, 2.14dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Remark:

- For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- Please refer to the antenna report.
- EUT photo refer to the report (Report NO.: FCCSZ2025-0018-EUT).
- The EUT have SISO function, provides 1 completed transmitter and 1 receiver.

### 2.2 ADDITIONAL MODEL/TYPE

Main Model No.	Serial Model No.	Difference
UG65-L09NA-915M-EA(ECA)	ND65-L09NA-915M-EA(ECA), UG65, ND65	Differences between main model and serial models are the model no and appearance silkprint.
UG65-L09NA-915M-EA(ECA)	UG65-L09NA-915M-EA, ND65-L09NA-915M-EA, UG65-915M-EA, ND65-915M-EA	1. Differences between main model and serial model are the model no and appearance silkprint. 2. Differences between main model and serial models are that the main model is equipped with an external antenna for LTE while the serial models are equipped with an internal PIFA antenna for LTE.



## 2.3 OTHER INFORMATION

Operating frequency of each channel

LORA DR8					
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
<b>0</b>	<b>903</b>	6	912.6	12	925.7
1	904.6	<b>7</b>	<b>914.2</b>	13	926.3
2	906.2	8	923.3	14	926.9
3	907.8	9	923.9	<b>15</b>	<b>927.5</b>
4	909.4	10	924.5	--	--
5	911.0	11	925.1	--	--

**Note:** The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefor only the data of the test channels were recorded in this report.



## 2.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	LORA link

Where **RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**RE≥1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0	FHSS	DR8

For the test results, only the worst case was shown in test report.

### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0,7,15	FHSS	DR8

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0,7,15	FHSS	DR8

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	24.5deg. C, 54%RH	DC 12V From Adapter	Wang Zhiming
RE≥1G	24.5deg. C, 54%RH	DC 12V From Adapter	Wang Zhiming
PLC	25.2deg. C, 55%RH	DC 12V From Adapter	Zhou Ye
APCM	25.2deg. C, 55%RH	DC 12V From Adapter	Cai Jianyu



## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

**FCC PART 15, Subpart C. Section 15.247**  
**KDB 558074 D01 15.247 Meas Guidance v05r02**  
**ANSI C63.10-2020**

All test items have been performed and recorded as per the above standards

## 2.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
1	N/A	N/A	N/A	N/A	N/A
Support Cable					
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)
1	N/A	N/A	N/A	N/A	N/A

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION

##### 3.1.1 Limits


Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


##### 3.1.2 Test Procedures

- a. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- b. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- c. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

##### 3.1.3 Test setup

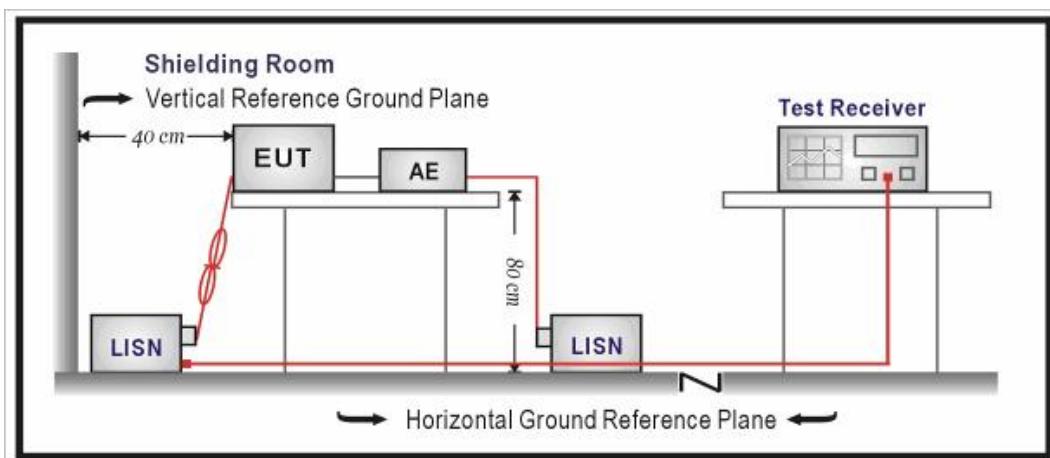


### 3.1.4 Test Results

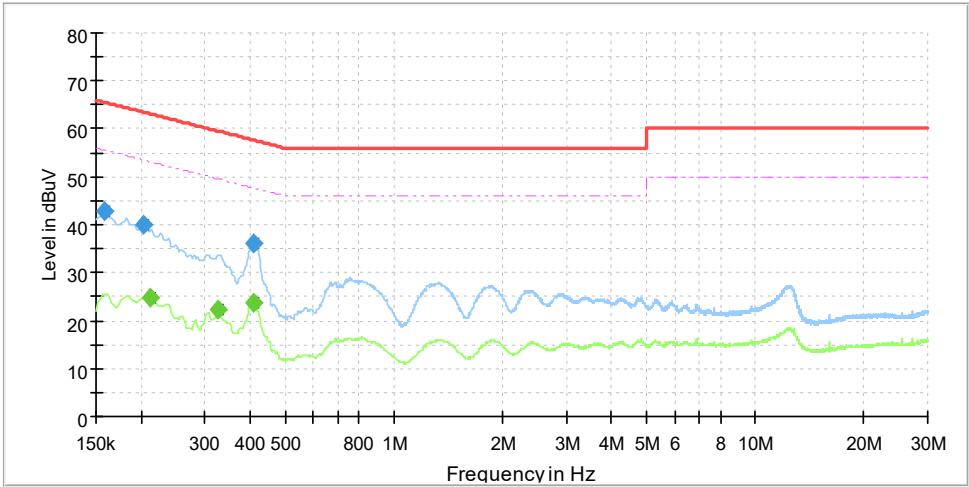Test Mode	LoRa	Frequency Range	150KHz ~ 30MHz																																																								
Test Voltage	AC 120V/60Hz	PHASE	Line (L)																																																								
Environmental Conditions	25.2deg. C, 55%RH	Tested By	Zhou Ye																																																								
																																																											
<table border="1"><thead><tr><th>NO</th><th>Frequency (MHz)</th><th>QuasiPeak (dBuV)</th><th>Average (dBuV)</th><th>Limit (dBuV)</th><th>Margin (dB)</th><th>Line</th><th>Corr.Factor (dB)</th></tr></thead><tbody><tr><td>1</td><td>0.159</td><td>42.9</td><td>---</td><td>65.5</td><td>22.7</td><td>L1</td><td>20.2</td></tr><tr><td>2</td><td>0.204</td><td>40.1</td><td>---</td><td>63.4</td><td>23.4</td><td>L1</td><td>20.2</td></tr><tr><td>3</td><td>0.213</td><td>---</td><td>24.6</td><td>53.1</td><td>28.5</td><td>L1</td><td>20.2</td></tr><tr><td>4</td><td>0.328</td><td>---</td><td>22.2</td><td>49.5</td><td>27.3</td><td>L1</td><td>20.2</td></tr><tr><td>5</td><td>0.411</td><td>36.0</td><td>---</td><td>57.6</td><td>21.6</td><td>L1</td><td>20.2</td></tr><tr><td>6</td><td>0.411</td><td>---</td><td>23.8</td><td>47.6</td><td>23.8</td><td>L1</td><td>20.2</td></tr></tbody></table>				NO	Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr.Factor (dB)	1	0.159	42.9	---	65.5	22.7	L1	20.2	2	0.204	40.1	---	63.4	23.4	L1	20.2	3	0.213	---	24.6	53.1	28.5	L1	20.2	4	0.328	---	22.2	49.5	27.3	L1	20.2	5	0.411	36.0	---	57.6	21.6	L1	20.2	6	0.411	---	23.8	47.6	23.8	L1	20.2
NO	Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr.Factor (dB)																																																				
1	0.159	42.9	---	65.5	22.7	L1	20.2																																																				
2	0.204	40.1	---	63.4	23.4	L1	20.2																																																				
3	0.213	---	24.6	53.1	28.5	L1	20.2																																																				
4	0.328	---	22.2	49.5	27.3	L1	20.2																																																				
5	0.411	36.0	---	57.6	21.6	L1	20.2																																																				
6	0.411	---	23.8	47.6	23.8	L1	20.2																																																				

Remark: The emission levels of other frequencies were very low against the limit.



<b>Test Mode</b>	LoRa	<b>Frequency Range</b>	150KHz ~ 30MHz
<b>Test Voltage</b>	AC 120V/60Hz	<b>PHASE</b>	Line (N)
<b>Environmental Conditions</b>	25.2deg. C, 55%RH	<b>Tested By</b>	Zhou Ye

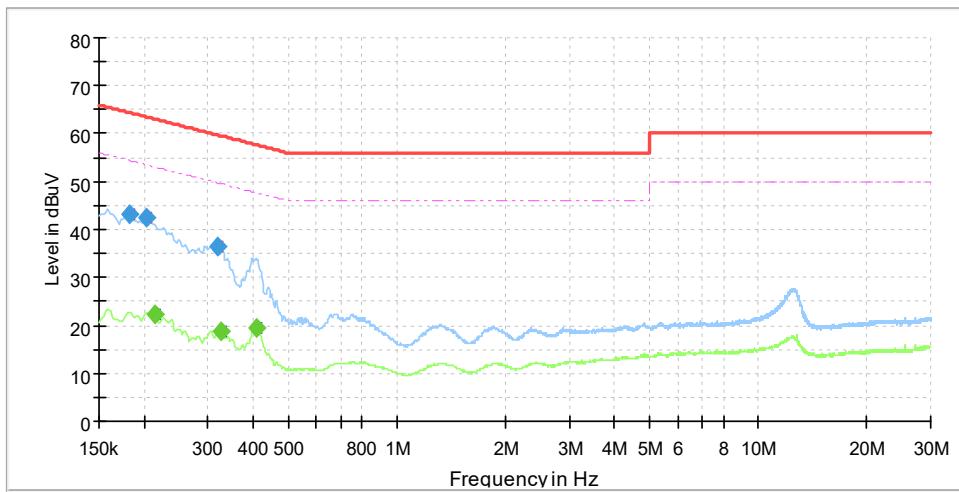

NO	Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr.Factor (dB)
1	0.182	43.3	---	64.4	21.1	N	20.2
2	0.204	42.4	---	63.4	21.1	N	20.2
3	0.215	---	22.3	53.0	30.7	N	20.2
4	0.319	36.4	---	59.7	23.4	N	20.2
5	0.328	---	18.9	49.5	30.6	N	20.2
6	0.411	---	19.5	47.6	28.2	N	20.2

Remark: The emission levels of other frequencies were very low against the limit.



## 3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 3.2.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. Emission level (dB<sub>uV/m</sub>) = 20 log Emission level (uV/m).  
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 3.2.2 Measurement procedure


- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

### 3.2.3 Test setup


Below 30MHz Test Setup:

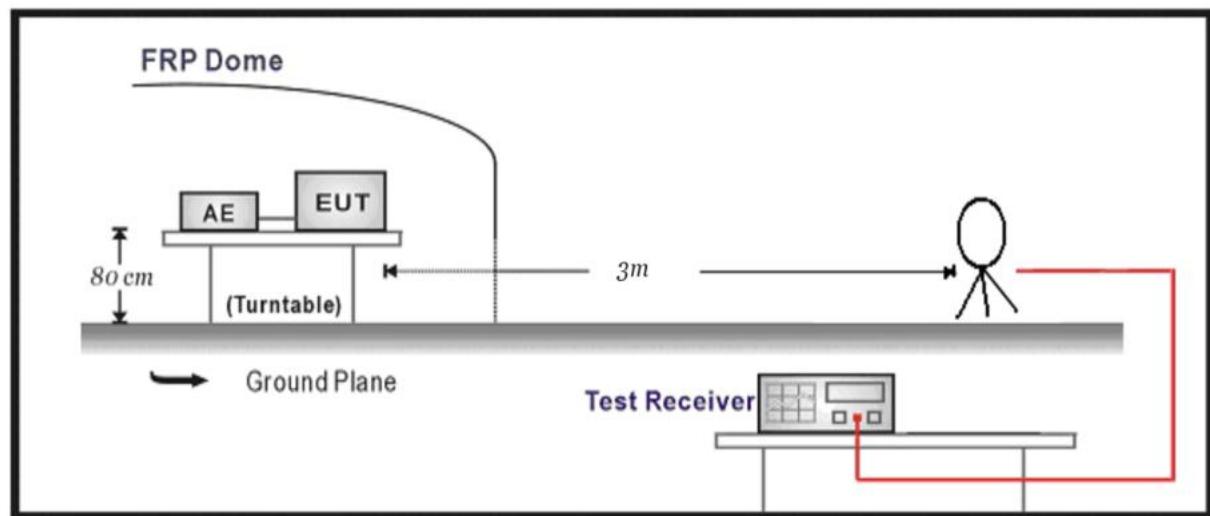

Below 1GHz Test Setup:

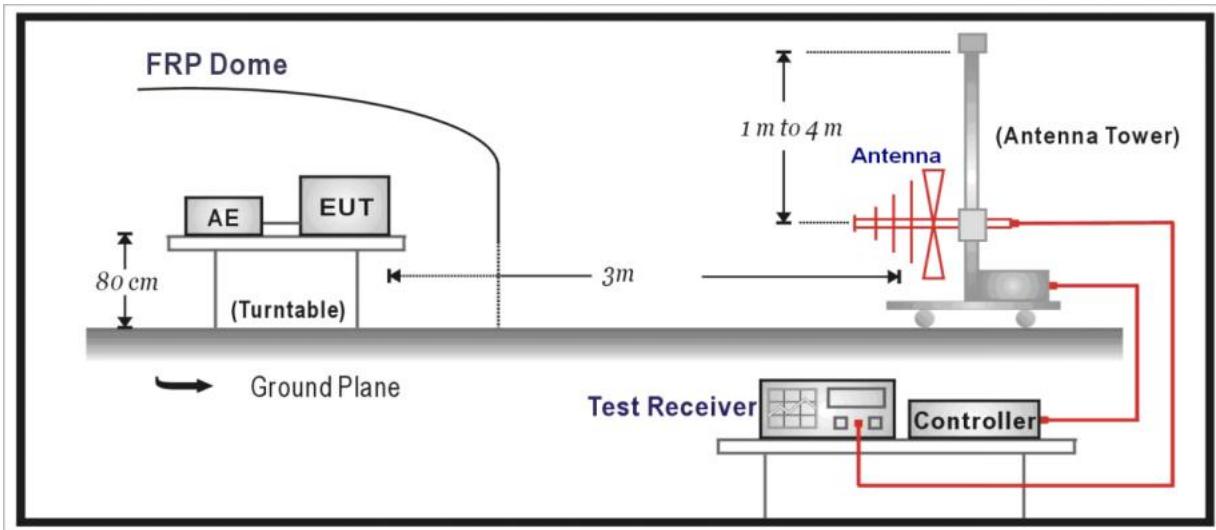

Above 1GHz Test Setup:

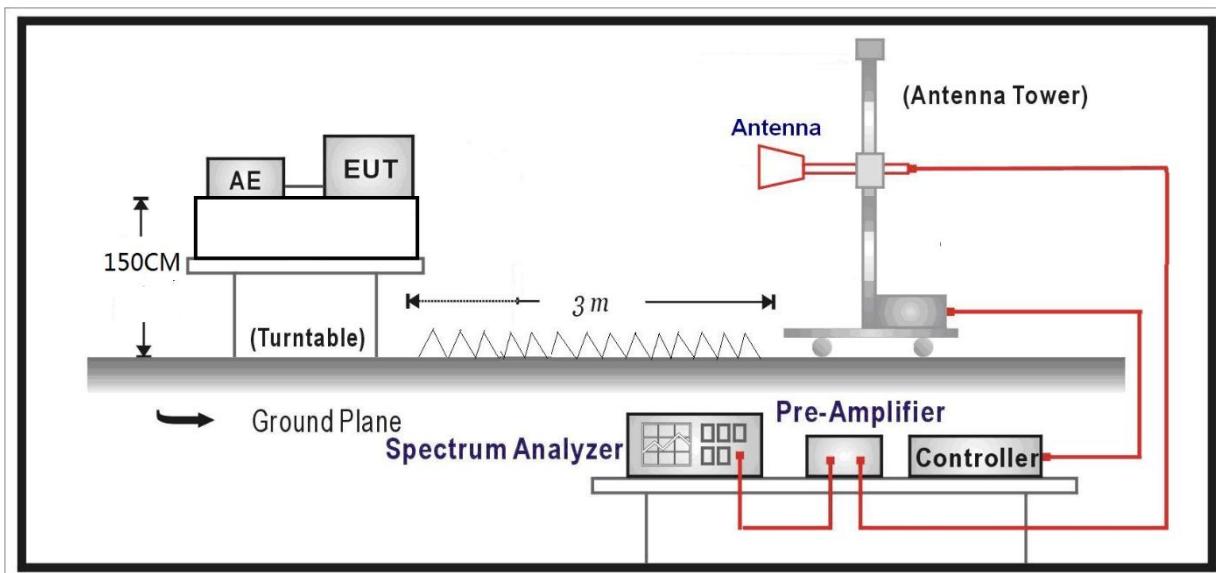


### 3.2.4 Test results

Test Mode:		<b>Lora CH0</b>		Frequency Range		9kHz-1000MHz														
Detector Function		Quasi-Peak(QP)																		
<b>Horizontal</b>																				
<p>Level[dBuV/m]</p> <p>Frequency[Hz]</p> <p>QP Limit</p> <p>Horizontal PK</p> <p>◆ QP Detector</p>																				
NO.	Freq. [MHz]	Reading [dB $\mu$ V]	Factor [dB/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]												
1	58.133	7.10	19.59	26.69	40.00	13.31	100	39												
2	152.038	11.85	21.29	33.14	43.50	10.36	200	172												
3	250.018	24.12	19.12	43.24	46.00	2.76	100	70												
4	287.949	17.02	20.14	37.16	46.00	8.84	100	65												
5	319.962	20.81	20.98	41.79	46.00	4.21	100	269												
6	750.006	6.82	28.88	35.70	46.00	10.30	100	320												
<b>Final Data List</b>																				
NO	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity												
1	58.133	19.59	24.10	40.00	15.90	100	39	Horizontal												
2	152.03	21.29	30.91	43.50	12.59	200	172	Horizontal												
3	250.01	19.12	41.01	46.00	4.99	100	70	Horizontal												
4	287.94	20.14	34.76	46.00	11.24	100	65	Horizontal												
5	319.96	20.98	39.39	46.00	6.61	100	269	Horizontal												
6	750.00	28.88	33.66	46.00	12.34	100	320	Horizontal												
Remark: 1. The emission levels of 9k - 30MHz were greater than 20dB margin. 2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]																				



Test Mode:	Lora CH 0	Frequency Range	9kHz-1000MHz
Detector Function	Quasi-Peak(QP)		

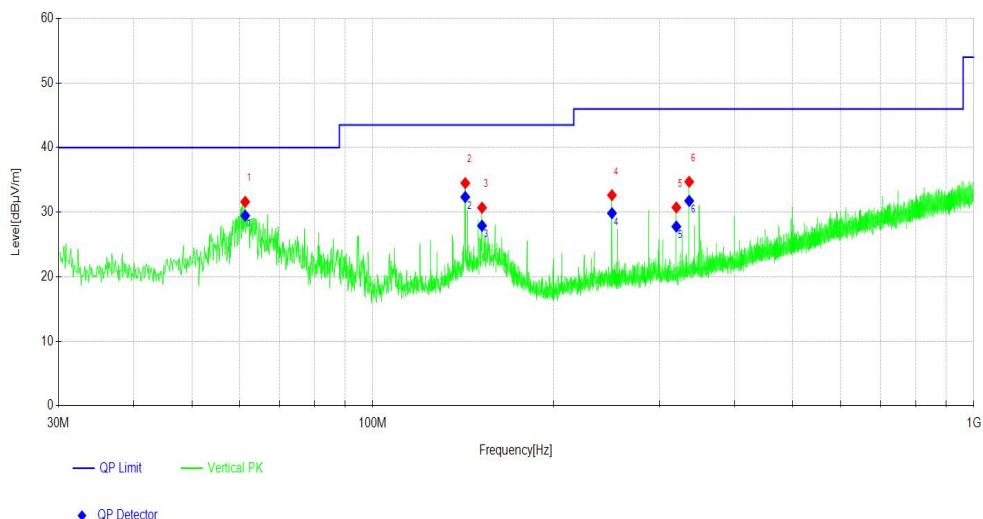**Vertical**

NO.	Freq. [MHz]	Reading [dB $\mu$ V]	Factor [dB/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]
1	61.334	12.43	19.18	31.61	40.00	8.39	100	65
2	142.531	13.77	20.73	34.50	43.50	9.00	100	86
3	151.941	9.40	21.29	30.69	43.50	12.81	100	200
4	250.018	13.51	19.12	32.63	46.00	13.37	100	6
5	319.962	9.75	20.98	30.73	46.00	15.27	100	317
6	336.066	13.36	21.35	34.71	46.00	11.29	100	147

**Final Data List**

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.334	19.18	29.46	40.00	10.54	100	65	Vertical
2	142.531	20.73	32.35	43.50	11.15	100	86	Vertical
3	151.941	21.29	27.90	43.50	15.60	100	200	Vertical
4	250.018	19.12	29.84	46.00	16.16	100	6	Vertical
5	319.962	20.98	27.77	46.00	18.23	100	317	Vertical
6	336.066	21.35	31.75	46.00	14.25	100	147	Vertical

Remark: 1.The emission levels of 9k - 30MHz were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

**ABOVE 1GHz DATA**

<b>Channel</b>	CH 0		<b>Frequency</b>		903MHz		
<b>Frequency Range</b>	1GHz~9.3G		<b>Detector Function</b>		PK/AV		
<b>Horizontal</b>							
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
1	1806.00	47.30	-2.51	44.79	74.00	29.21	PK
2	1806.00	44.13	-2.51	41.62	54.00	12.38	RMS
3	2709.00	43.13	2.69	45.82	74.00	28.18	PK
4	2709.00	35.07	2.69	37.76	54.00	16.24	RMS
5	3612.00	42.11	6.60	48.71	74.00	25.29	PK
6	3612.00	34.09	6.60	40.69	54.00	13.31	RMS
<b>Vertical</b>							
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
1	1806.00	56.99	-2.51	54.48	74.00	19.52	PK
2	1806.00	55.61	-2.51	53.10	54.00	0.90	RMS
3	2709.00	45.82	2.69	48.51	74.00	25.49	PK
4	2709.00	39.40	2.69	42.09	54.00	11.91	RMS
5	3612.00	42.67	6.60	49.27	74.00	24.73	PK
6	3612.00	33.67	6.60	40.27	54.00	13.73	RMS

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



<b>Channel</b>	CH 7		<b>Frequency</b>		914.2MHz		
<b>Frequency Range</b>	1GHz~9.3G		<b>Detector Function</b>		PK/AV		
<b>Horizontal</b>							
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
1	1828.40	48.34	-2.54	45.80	74.00	28.20	PK
2	1828.40	44.34	-2.54	41.80	54.00	12.20	RMS
3	2742.60	43.65	3.02	46.67	74.00	27.33	PK
4	2742.60	35.49	3.02	38.51	54.00	15.49	RMS
5	3656.80	42.71	6.32	49.03	74.00	24.97	PK
6	3656.80	34.18	6.32	40.50	54.00	13.50	RMS
<b>Vertical</b>							
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
1	1828.40	54.90	-2.54	52.36	74.00	21.64	PK
2	1828.40	53.53	-2.54	50.99	54.00	3.01	RMS
3	2742.60	44.38	3.02	47.40	74.00	26.60	PK
4	2742.60	36.85	3.02	39.87	54.00	14.13	RMS
5	3656.80	41.76	6.32	48.08	74.00	25.92	PK
6	3656.80	33.80	6.32	40.12	54.00	13.88	RMS
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]							



Channel	CH 15		Frequency	927.5MHz			
Frequency Range	1GHz~9.3G		Detector Function	PK/AV			
<b>Horizontal</b>							
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
1	1855.00	47.87	-2.21	45.66	74.00	28.34	PK
2	1855.00	44.67	-2.21	42.46	54.00	11.54	RMS
3	2782.50	43.10	2.98	46.08	74.00	27.92	PK
4	2782.50	35.11	2.98	38.09	54.00	15.91	RMS
5	3710.00	42.36	6.89	49.25	74.00	24.75	PK
6	3710.00	33.68	6.89	40.57	54.00	13.43	RMS
<b>Vertical</b>							
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
1	1855.00	54.10	-2.21	51.89	74.00	22.11	PK
2	1855.00	52.52	-2.21	50.31	54.00	3.69	RMS
3	2782.50	43.82	2.98	46.80	74.00	27.20	PK
4	2782.50	35.84	2.98	38.82	54.00	15.18	RMS
5	3710.00	41.56	6.89	48.45	74.00	25.55	PK
6	3710.00	33.63	6.89	40.52	54.00	13.48	RMS
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]							



## 3.3 6dB BANDWIDTH MEASUREMENT

### 3.3.1 Limits

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 3.3.2 Measurement procedure

- a. Set resolution bandwidth (RBW) = 100KHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 3.3.3 Test setup





## 3.3.4 Test result

Mode	Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
DR8	0	903.0	637	≥500
	7	914.2	636	≥500
	15	927.5	634	≥500

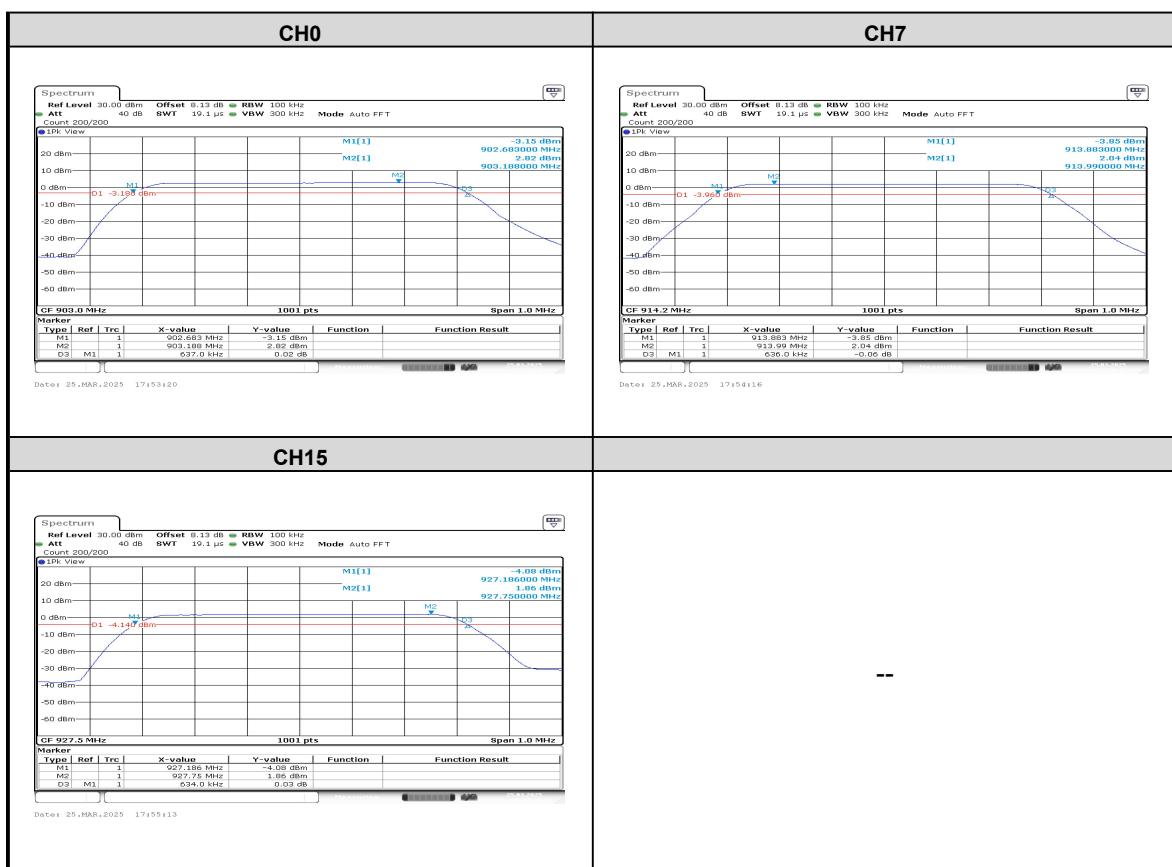



## 3.4 CONDUCTED OUTPUT POWER


### 3.4.1 Limits

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

### 3.4.2 Measurement procedure

- a. A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- b. An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

### 3.4.3 Test setup

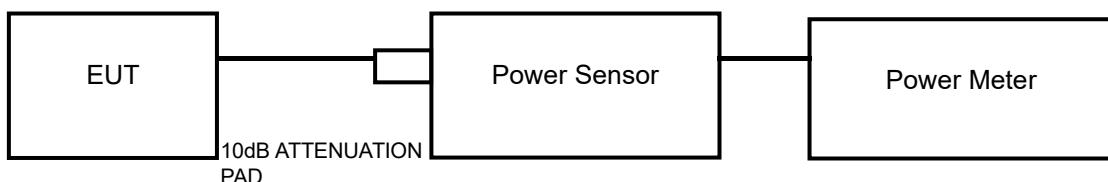



### 3.4.4 Test result

#### PEAK OUTPUT POWER

##### GFSK

CHANNEL	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (mW)	Verdict
0	903.0	19.16	82.41	1000	PASS
7	914.2	18.38	68.87	1000	PASS
15	927.5	18.15	65.31	1000	PASS

#### AVERAGE OUTPUT POWER (For reference)

CHANNEL	Channel Frequency (MHz)	Result (dBm)	Duty Cycle (%)	Average Power (dBm)	Average Power (mW)	Average Power Limit (mW)	Verdict
0	903.0	2.34	83	14.96	31.33	1000	PASS
7	914.2	1.64	83	14.84	30.47	1000	PASS
15	927.5	1.37	83	15.03	31.84	1000	PASS



## 3.5 POWER SPECTRAL DENSITY MEASUREMENT


### 3.5.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 3.5.2 Measurement procedure

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set RBW to: 3KHz
- d. Set VBW  $\geq 3 \times$  RBW.
- e. Detector = peak
- f. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- g. Sweep time = auto couple.
- h. Use the peak marker function to determine the maximum amplitude level.


### 3.5.3 Test setup

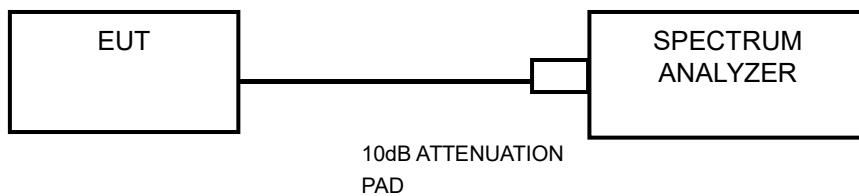

### 3.5.4 Test result

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD(dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
0	903.0	-0.59	8	PASS
7	914.2	-1.95	8	PASS
15	927.5	-1.93	8	PASS

**Test Plot:**

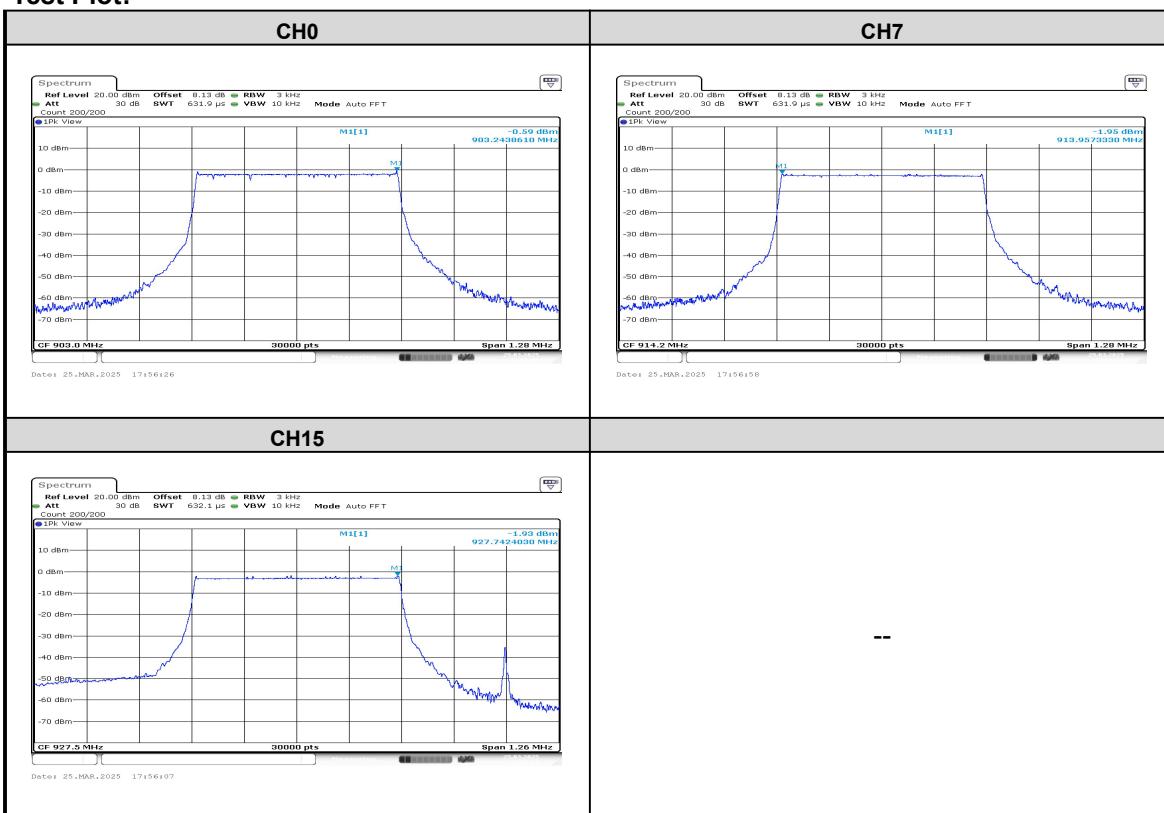



## 3.6 OUT OF BAND EMISSION MEASUREMENT

### 3.6.1 Limits

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 3.6.2 Measurement procedure

#### Measurement Procedure -Reference Level

- a. Set the RBW = 100 kHz.
- b. Set the VBW  $\geq$  300 kHz.
- c. Detector = peak.
- d. Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHzband segment within the fundamental EBW.

#### Measurement Procedure –Unwanted Emission Level


- a. Set RBW = 100 kHz.
- b. Set VBW  $\geq$  300 kHz.
- c. Set span to encompass the spectrum to be examined
- d. Detector = peak.
- e. Trace Mode = max hold.
- f. Sweep = auto couple.


### 3.6.3 Test setup



### 3.6.4 Test result

The spectrum plots are attached on the following images.

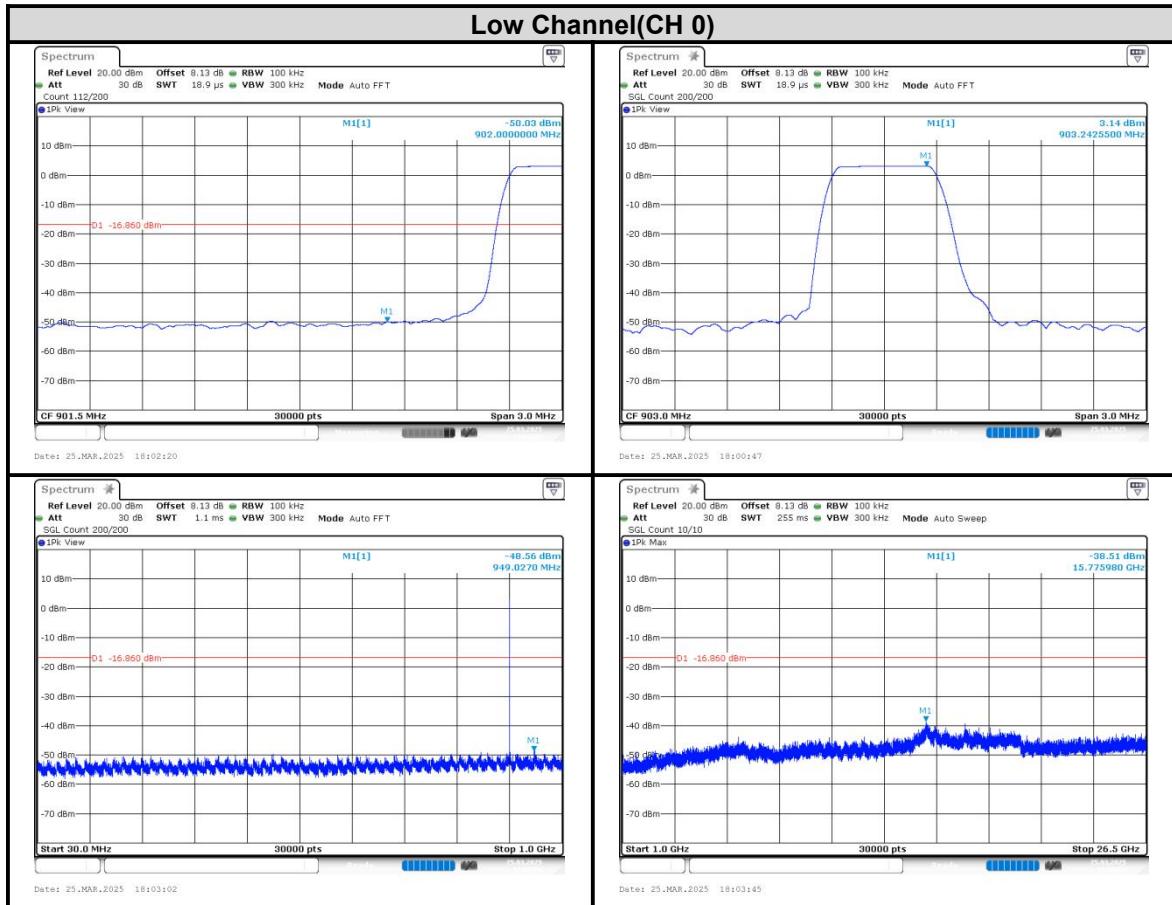

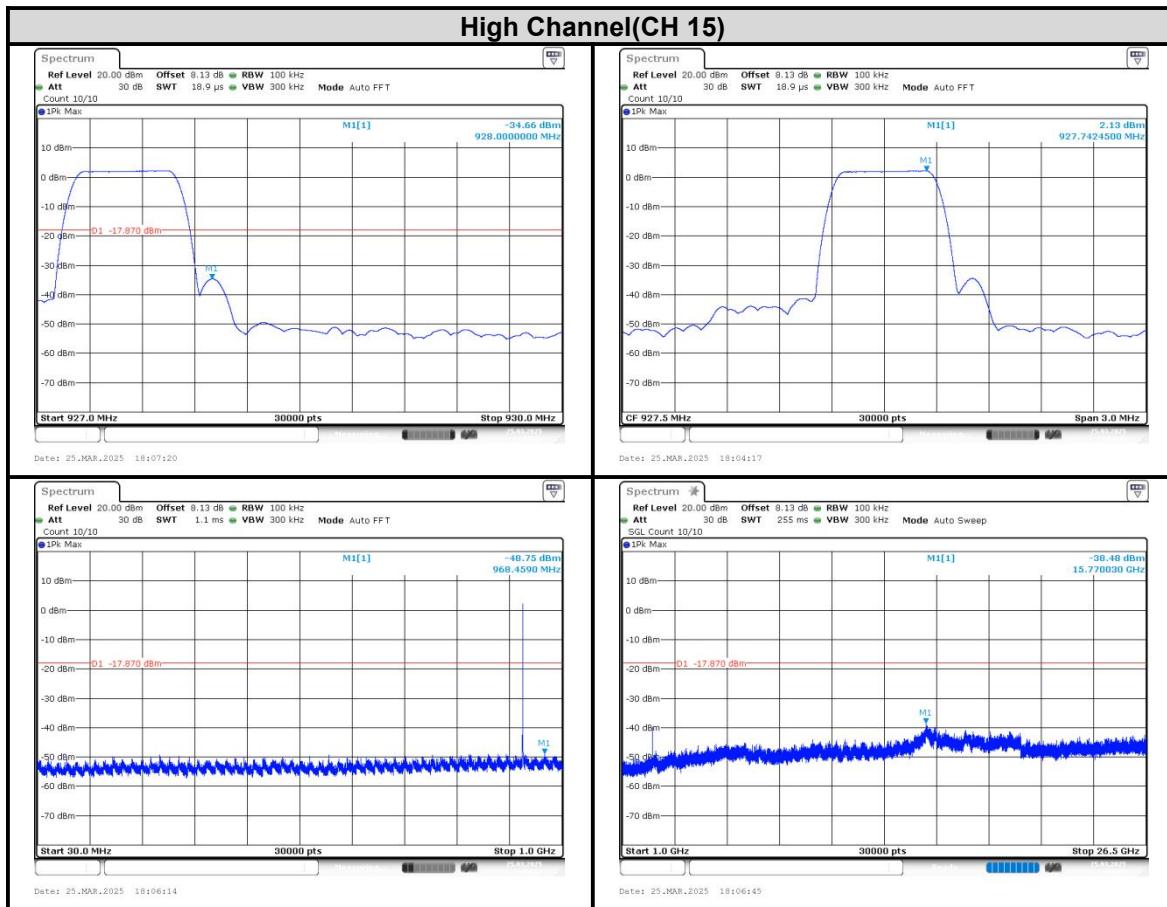



## 3.7 ANTENNA REQUIREMENT

### 3.7.1 LIMITS OFFREQUENCY STABILITY

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b) , if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.7.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is External antenna and that no antenna other than that furnished by the responsible party shall be used with the device

### 3.7.3 ANTENNA GAIN

The maximum peak gain of the transmit antenna is 2.14 dBi.



## 4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



## 5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



## Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>