



CERTIFICATION TEST REPORT

Report Number. : 4789746865-E7V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-A525F/DS, SM-A525F

FCC ID : A3LSMA525F

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

January 28, 2021

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/28/21	Initial issue	Sungeun Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION.....	8
4.2. SAMPLE CALCULATION.....	8
4.3. MEASUREMENT UNCERTAINTY	8
4.4. DECISION RULE	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT.....	9
5.2. MAXIMUM E-FIELD STRENGTH.....	9
5.3. WORST-CASE CONFIGURATION AND MODE	9
5.4. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	11
7. 20dB BANDWIDTH	12
8. RADIATED EMISSION TEST RESULTS.....	13
8.1. LIMITS AND PROCEDURE	13
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	15
8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz.....	17
8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	19
8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]	20
8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode].....	22
8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]	24
9. AC MAINS LINE CONDUCTED EMISSIONS.....	25
10. FREQUENCY STABILITY	28

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

MODEL NUMBER: SM-A525F/DS, SM-A525F

SERIAL NUMBER: R38NB02RCPB (RADIATED, Original);
R38NC03HCYN (RADIATED, Spot check);

DATE TESTED: NOV 30, 2020 – JAN 05, 2021(Original);
JAN 22, 2021(Spot check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Sungeun Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMA525M NFC(FCC CFR 47 Part 15C).
And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMA525F shares the same enclosure and circuit board as FCC ID: A3LSMA525M. The NFC antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA525M remains representative of FCC ID: A3LSMA525F. The test data of FCC ID: A3LSMA525M being submitted for this application to cover NFC features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated spurious and band edge emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-A525M/DS Results	SM-A525F/DS Results		
					FCC ID : A3LSMA525M	FCC ID : A3LSMA525F		
NFC	Fund.	13.56 MHz	13.560 MHz	84 dBuV/m	16.79 dBuV/m	13.86 dBuV/m	-2.93 dB	Card tag, Face On
	RSE	13.56 MHz	2.629 MHz	29.5 dBuV/m	10.21 dBuV/m	9.50 dBuV/m	-0.71 dB	Face Off

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
PCE	A3LSMA525M	Original Grant	4789746830-E2	Test Report	4789746865-E2	All
DTS	A3LSMA525M	Original Grant	4789746830-E3 (802.11b,g,n)	Test Report	4789746865-E3 (802.11b,g,n)	All
			4789746830-E4 (Bluetooth LE)	Test Report	4789746865-E4 (Bluetooth LE)	All
DSS	A3LSMA525M	Original Grant	4789746830-E5 (Bluetooth)	Test Report	4789746865-E5 (Bluetooth)	All
NII	A3LSMA525M	Original Grant	4789746830-E6 (802.11a,n,ac)	Test Report	4789746865-E6 (802.11a,n,ac)	All
DXX	A3LSMA525M	Original Grant	4789746830-E7 (NFC)	Test Report	4789746865-E7 (NFC)	All

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. 414788 D01 Radiated Test Site v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) +
Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.72 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.
This test report addresses the DXX (NFC) operational mode.

This report covers the Samsung models SM-A525F/DS and SM-A525F.
These models are identical in hardware except SM-A525F has single SIM tray.
With some pre-scan, model SM-A525F/DS was set for final test.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 16.79 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Y orientation was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Y orientation while generating continuous emissions.

The fundamental level of the EUT was investigated each type and bitrate.
All test was performed worst case condition(type A and bit rate 106 kbps).

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37N6KYPMH2SE3	N/A
Data Cable	SAMSUNG	EP-DR140AWE	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

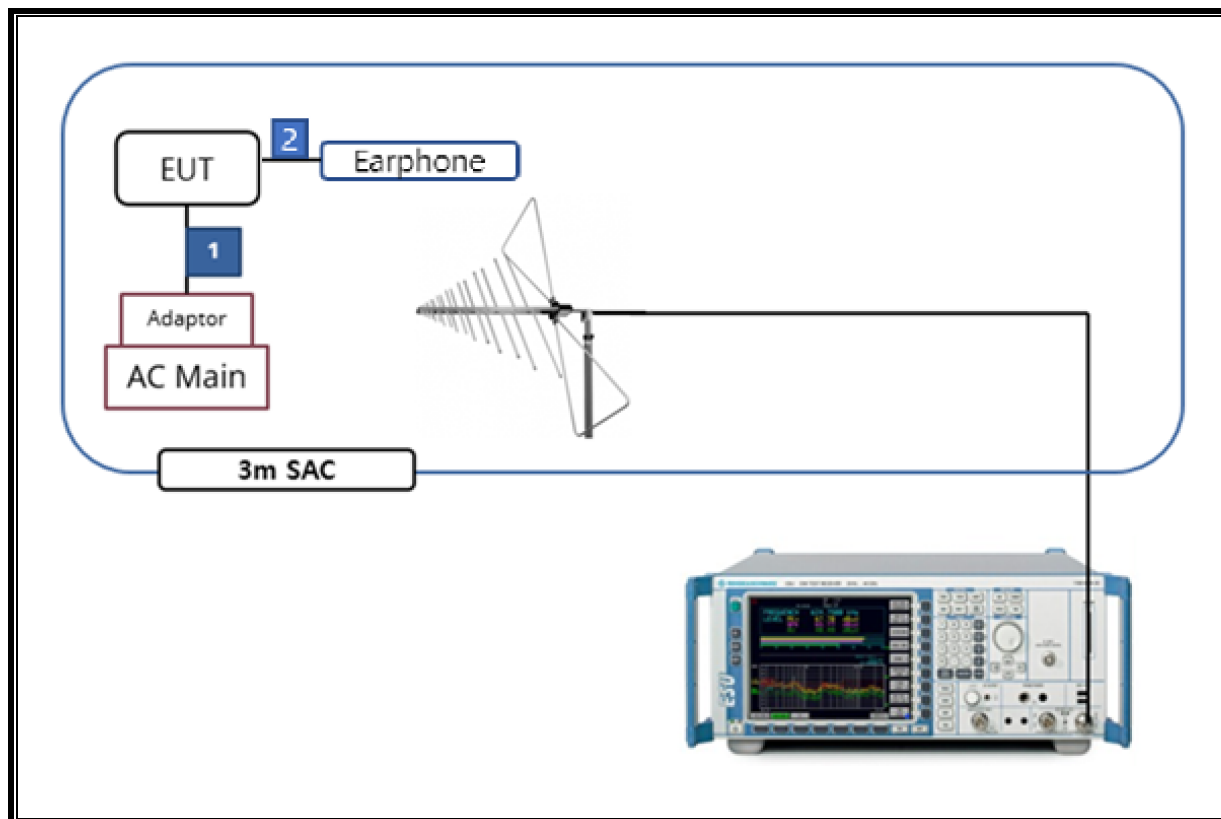

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-13-22
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-03-21
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	08-05-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-03-21
DC Power Supply	Agilent / HP	E3640A	MY54226395	08-05-21
Temperature Chamber	ESPEC	SH-642	93001109	08-04-21
LISN	R&S	ENV216	101837	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz

TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10kHz. The VBW is set to 3 times the RBW. Sweep time is coupled.

RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	426.80

20dB Bandwidth Plot



8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the field strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE


ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)

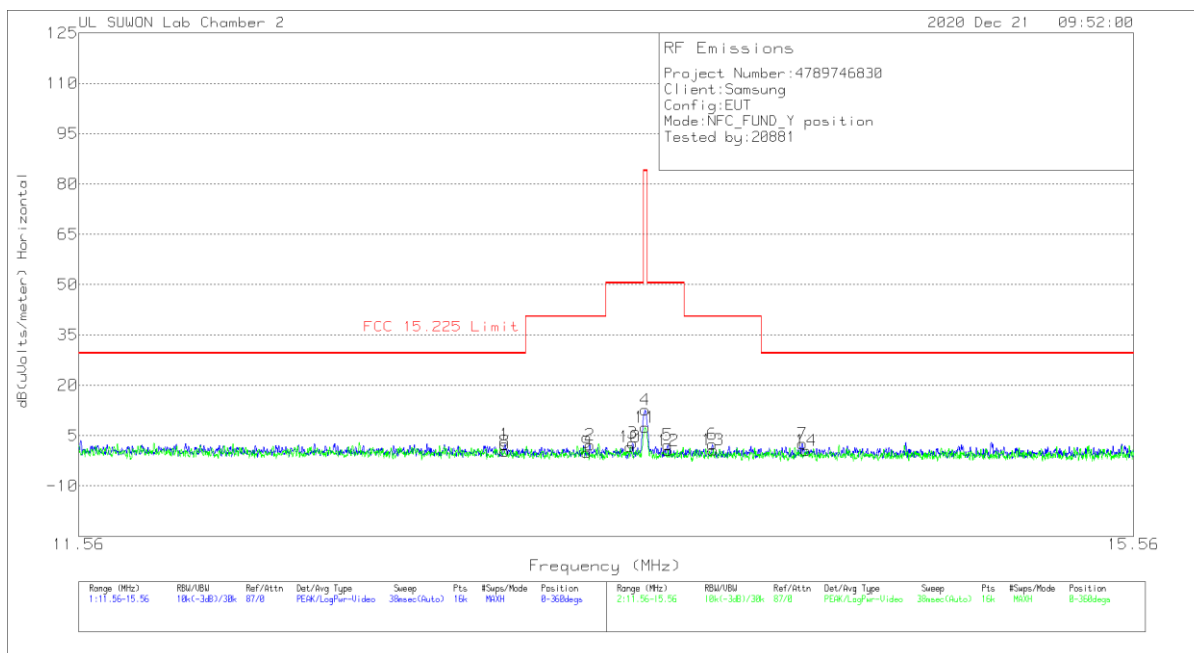

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	13.03538	21.85	Pk	20	-40	.5	2.35	29.54	-27.19	0-360
2	13.35013	21.72	Pk	20	-40	.5	2.22	40.51	-38.29	0-360
3	13.51238	22.33	Pk	20	-40	.5	2.83	50.5	-47.67	0-360
**4	13.56025	32.21	Pk	20	-40	.5	12.71	84	-71.29	0-360
5	13.64688	21.56	Pk	20	-40	.6	2.16	50.5	-48.34	0-360
6	13.81913	21.78	Pk	20	-40	.6	2.38	40.51	-38.13	0-360
7	14.17363	21.97	Pk	20	-40	.6	2.57	29.54	-26.97	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	13.03375	19.94	Pk	20	-40	.5	.44	29.54	-29.1	0-360
9	13.34038	19.49	Pk	20	-40	.5	-.01	40.51	-40.52	0-360
10	13.50313	21.16	Pk	20	-40	.5	1.66	50.5	-48.84	0-360
**11	13.56	26.95	Pk	20	-40	.5	7.45	84	-76.55	0-360
12	13.64813	19.89	Pk	20	-40	.6	.49	50.5	-50.01	0-360
13	13.82263	20.16	Pk	20	-40	.6	.76	40.51	-39.75	0-360
14	14.19075	19.97	Pk	20	-40	.6	.57	29.54	-28.97	0-360


Pk - Peak detector

**Fundamental

Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz

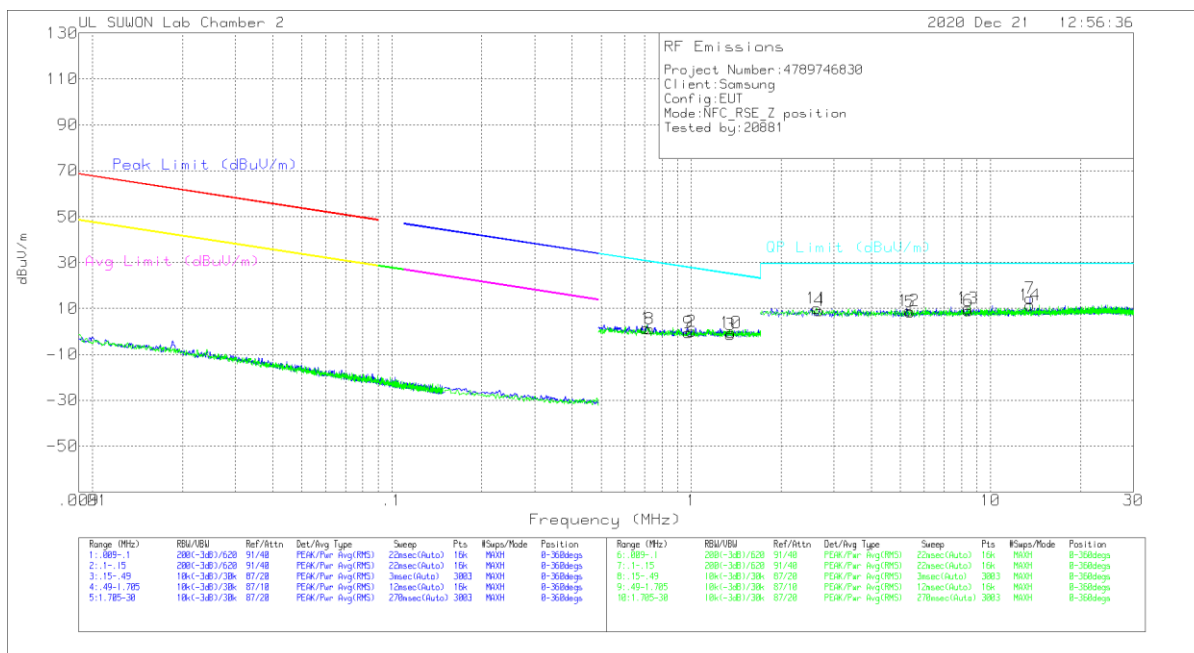

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.7066	21.52	Pk	19.7	.1	-40	1.32	30.63	-29.31	0-360
2	1.00414	20.11	Pk	19.8	.2	-40	.11	27.59	-27.48	0-360
3	1.35116	18.72	Pk	19.8	.2	-40	-1.28	25.01	-26.29	0-360
4	2.67578	28.87	Pk	19.9	.3	-40	9.07	29.5	-20.43	0-360
5	5.39018	28.24	Pk	19.8	.4	-40	8.44	29.5	-21.06	0-360
6	8.44388	28.64	Pk	19.9	.4	-40	8.94	29.5	-20.56	0-360
**7	13.56165	33.99	Pk	20	.5	-40	14.49	29.5	-15.01	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.72503	21.23	Pk	19.7	.1	-40	1.03	30.41	-29.38	0-360
9	.97993	19.4	Pk	19.8	.2	-40	-.6	27.8	-28.4	0-360
10	1.35993	19.51	Pk	19.8	.2	-40	-.49	24.96	-25.45	0-360
11	2.62865	30.01	Pk	19.9	.3	-40	10.21	29.5	-19.29	0-360
12	5.35248	28.85	Pk	19.8	.4	-40	9.05	29.5	-20.45	0-360
13	8.39675	29.68	Pk	19.9	.4	-40	9.98	29.5	-19.52	0-360
**14	13.56165	30.9	Pk	20	.5	-40	11.4	29.5	-18.1	0-360

Pk - Peak detector


** Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.
Please refer to section 8.1.1 about the fundamental level.
Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

HORIZONTAL

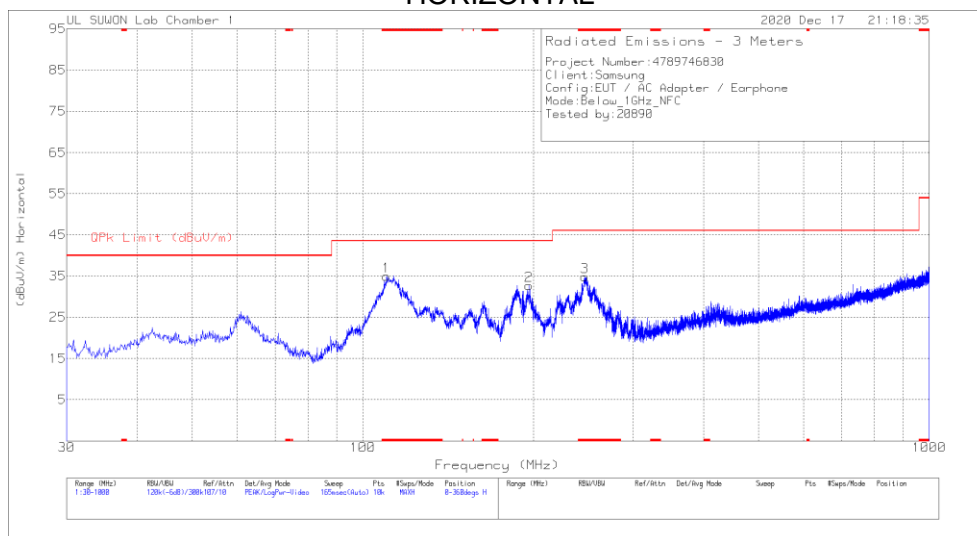

VERTICAL

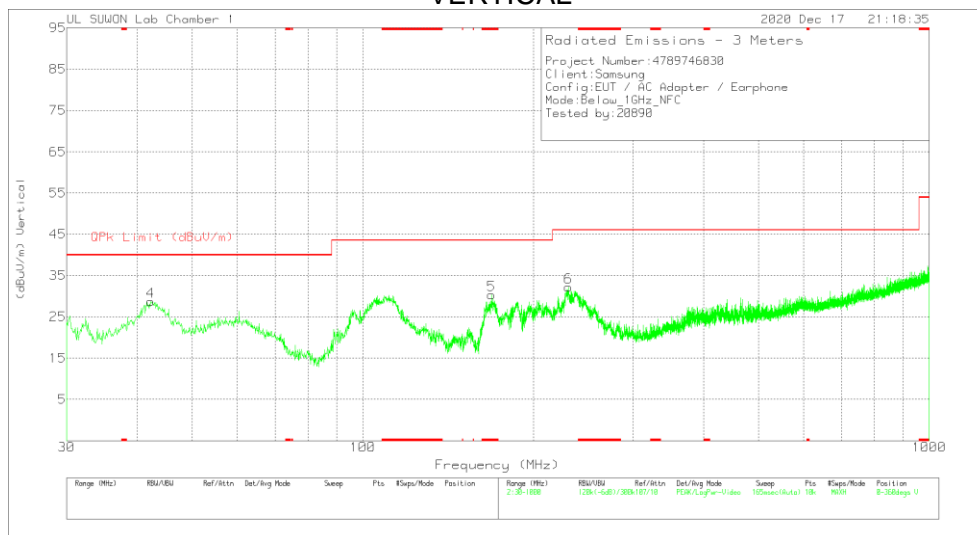


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 110.122	47.4	Pk	17.2	-29.6	35	43.52	-8.52	0-360	300	H
2	196.549	43.68	Pk	17.5	-28.5	32.68	43.52	-10.84	0-360	100	H
3	* 246.407	44.49	Pk	18.4	-28.1	34.79	46.02	-11.23	0-360	100	H
4	42.222	40.09	Pk	19.1	-30.5	28.69	40	-11.31	0-360	100	V
5	* 168.613	44.46	Pk	14.6	-28.7	30.36	43.52	-13.16	0-360	100	V
6	230.402	42.81	Pk	17.6	-28.2	32.21	46.02	-13.81	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]

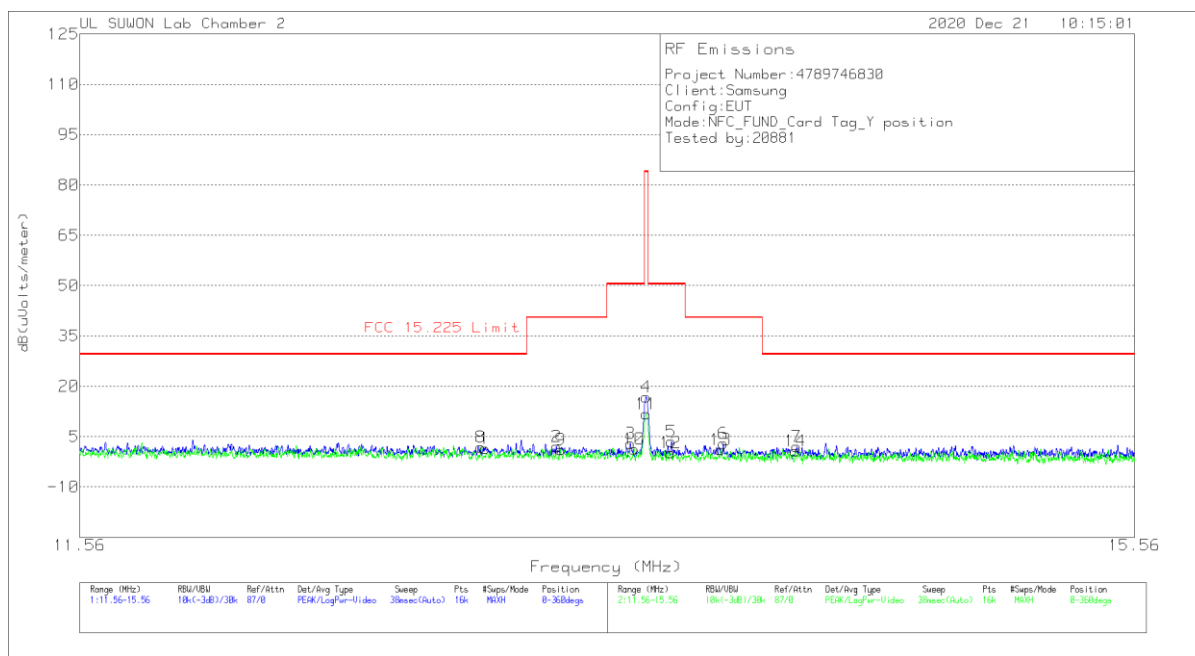

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	12.9585	20.99	Pk	20	-40	.5	1.49	29.54	-28.05	0-360
2	13.22188	21.47	Pk	20	-40	.5	1.97	40.51	-38.54	0-360
3	13.49963	22.51	Pk	20	-40	.5	3.01	50.5	-47.49	0-360
**4	13.55925	36.29	Pk	20	-40	.5	16.79	84	-67.21	0-360
5	13.65688	22.98	Pk	20	-40	.6	3.58	50.5	-46.92	0-360
6	13.85838	22.3	Pk	20	-40	.6	2.9	40.51	-37.61	0-360
7	14.14725	21.48	Pk	20	-40	.6	2.08	29.54	-27.46	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	12.94338	21.31	Pk	20	-40	.5	1.81	29.54	-27.73	0-360
9	13.23763	20.66	Pk	20	-40	.5	1.16	40.51	-39.35	0-360
10	13.51413	20.76	Pk	20	-40	.5	1.26	50.5	-49.24	0-360
**11	13.55938	31.2	Pk	20	-40	.5	11.7	84	-72.3	0-360
12	13.6535	19.63	Pk	20	-40	.6	.23	50.5	-50.27	0-360
13	13.84938	20.58	Pk	20	-40	.6	1.18	40.51	-39.33	0-360
14	14.14188	20.16	Pk	20	-40	.6	.76	29.54	-28.78	0-360


Pk - Peak detector

**Fundamental

Note 1: Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode]

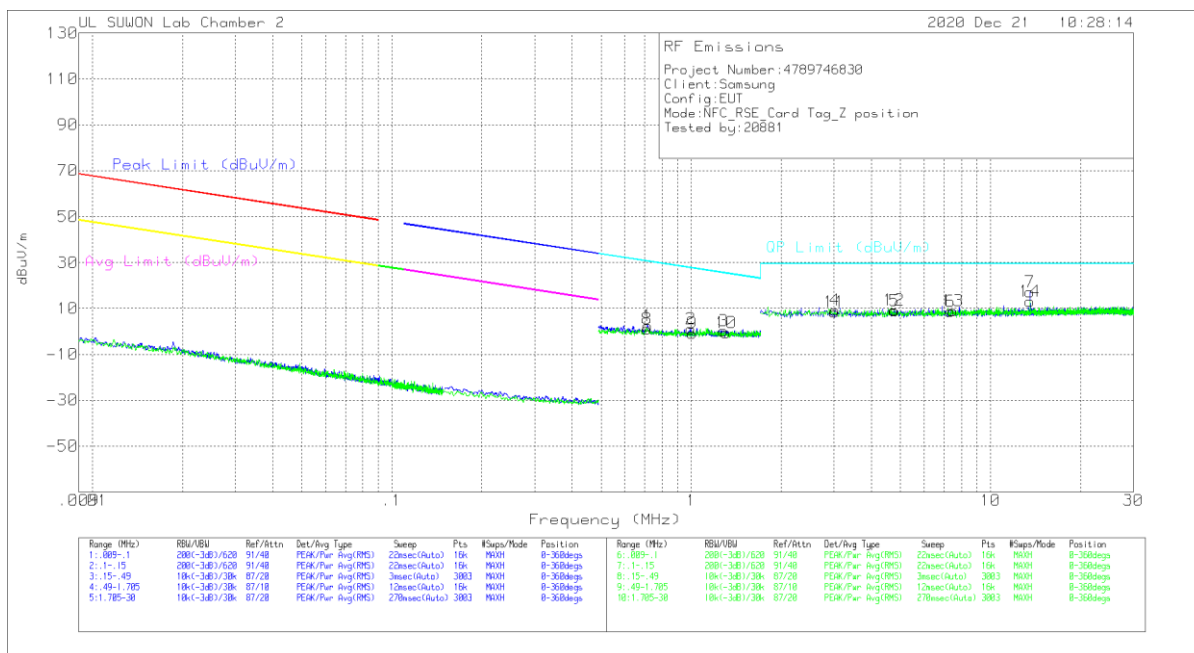

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.71678	22.71	Pk	19.7	.1	-40	2.51	30.51	-28	0-360
2	.99848	21.08	Pk	19.8	.2	-40	1.08	27.63	-26.55	0-360
3	1.28352	20.19	Pk	19.8	.2	-40	.19	25.46	-25.27	0-360
4	3.0245	29.02	Pk	19.9	.3	-40	9.22	29.5	-20.28	0-360
5	4.77755	29	Pk	19.8	.3	-40	9.1	29.5	-20.4	0-360
6	7.33173	28.39	Pk	19.9	.4	-40	8.69	29.5	-20.81	0-360
**7	13.56165	36.69	Pk	20	.5	-40	17.19	29.5	-12.31	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.71279	21.33	Pk	19.7	.1	-40	1.13	30.55	-29.42	0-360
9	1.00562	19.21	Pk	19.8	.2	-40	-.79	27.57	-28.36	0-360
10	1.30506	19.34	Pk	19.8	.2	-40	-.66	25.32	-25.98	0-360
11	3.01508	28.26	Pk	19.9	.3	-40	8.46	29.5	-21.04	0-360
12	4.74928	29.16	Pk	19.8	.3	-40	9.26	29.5	-20.24	0-360
13	7.48253	28.78	Pk	19.9	.4	-40	9.08	29.5	-20.42	0-360
**14	13.56165	32.57	Pk	20	.5	-40	13.07	29.5	-16.43	0-360

Pk - Peak detector


** Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.
Please refer to section 8.1.4 about the fundamental level.
Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]

HORIZONTAL

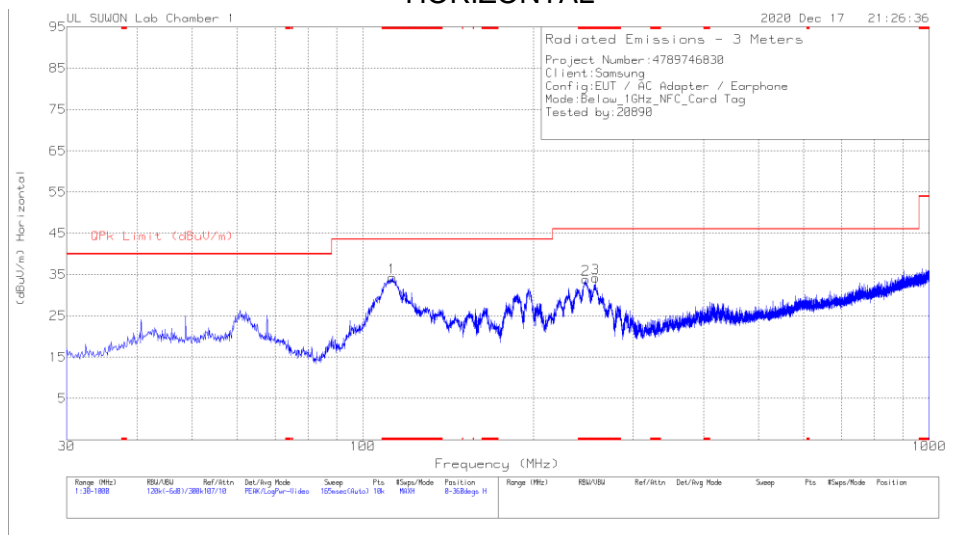

VERTICAL

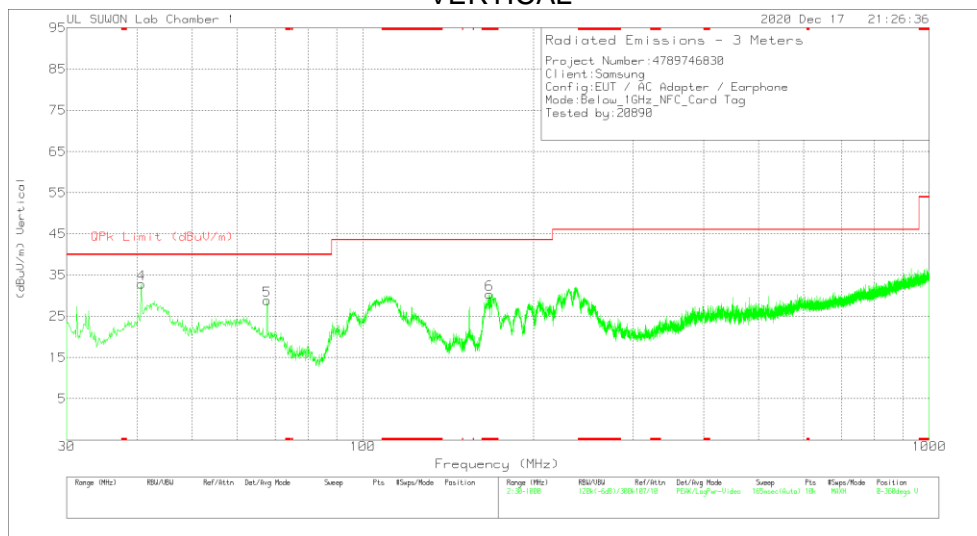

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 112.741	47.41	Pk	16.4	-29.5	34.31	43.52	-9.21	0-360	200	H
2	* 247.377	43.5	Pk	18.4	-28	33.9	46.02	-12.12	0-360	100	H
3	* 257.659	43.69	Pk	18.5	-28	34.19	46.02	-11.83	0-360	100	H
4	40.67	44.65	Pk	18.8	-30.6	32.85	40	-7.15	0-360	100	V
5	67.733	42.6	Pk	16.3	-30.1	28.8	40	-11.2	0-360	100	V
6	167.449	44.71	Pk	14.5	-28.9	30.31	43.52	-13.21	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS

LINE 1 PLOT

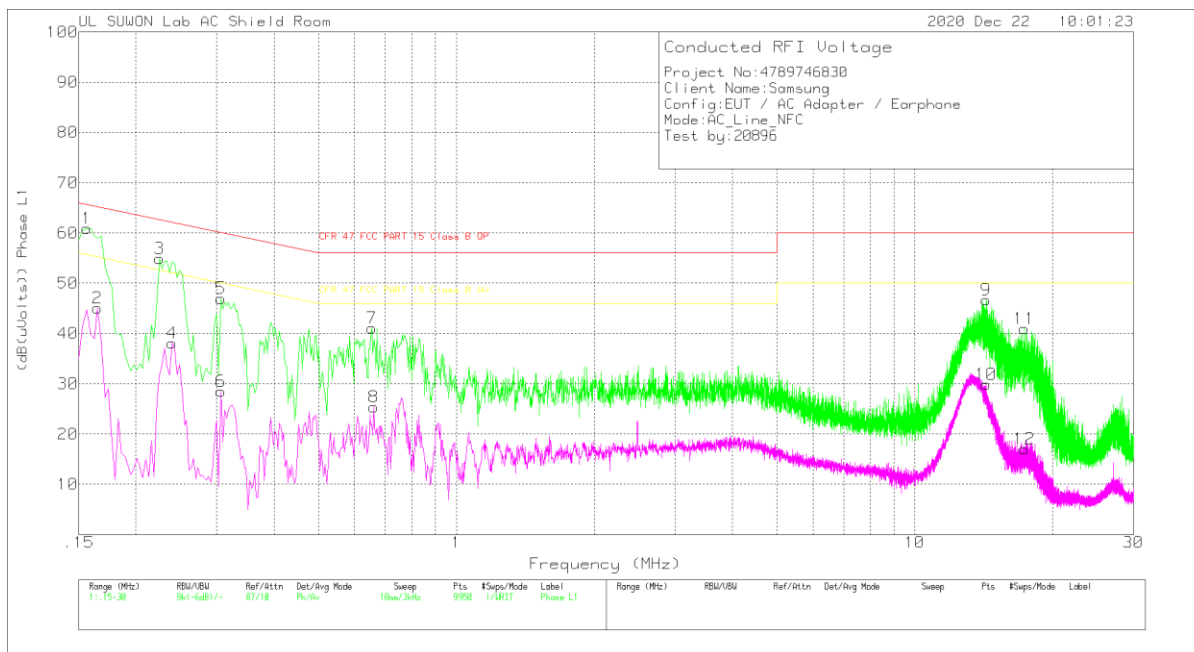

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.156	50.95	Pk	9.9	.1	60.95	65.67	-4.72	-	-
2	.165	35	Av	10	.1	45.1	-	-	55.21	-10.11
3	.225	44.92	Pk	9.8	.2	54.92	62.63	-7.71	-	-
4	.24	28.24	Av	9.7	.2	38.14	-	-	52.1	-13.96
5	.306	37	Pk	9.8	.2	47	60.08	-13.08	-	-
6	.306	18.55	Av	9.8	.2	28.55	-	-	50.08	-21.53
7	.654	30.96	Pk	9.9	.2	41.06	56	-14.94	-	-
8	.66	15.29	Av	9.9	.2	25.39	-	-	46	-20.61
9	14.31	36.29	Pk	10	.4	46.69	60	-13.31	-	-
10	14.31	19.48	Av	10	.4	29.88	-	-	50	-20.12
11	17.358	30.5	Pk	10.1	.4	41	60	-19	-	-
12	17.358	6.57	Av	10.1	.4	17.07	-	-	50	-32.93

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15525	42.46	Qp	9.8	.1	52.36	65.71	-13.35	-	-
.22575	34.99	Qp	9.8	.2	44.99	62.6	-17.61	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

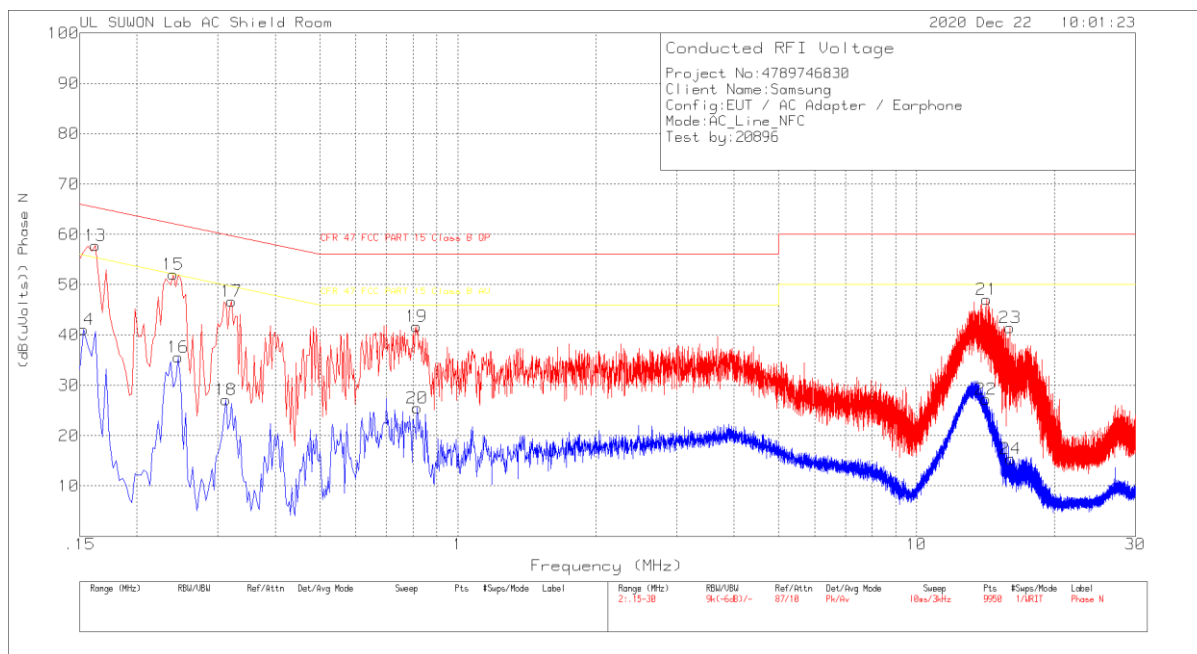

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.162	47.68	Pk	10	.1	57.78	65.36	-7.58	-	-
14	.153	31.21	Av	9.8	.1	41.11	-	-	55.84	-14.73
15	.24	42.13	Pk	9.7	.2	52.03	62.1	-10.07	-	-
16	.246	25.69	Av	9.7	.2	35.59	-	-	51.89	-16.3
17	.321	36.68	Pk	9.8	.2	46.68	59.68	-13	-	-
18	.312	17.18	Av	9.8	.2	27.18	-	-	49.92	-22.74
19	.813	31.72	Pk	9.8	.2	41.72	56	-14.28	-	-
20	.816	15.56	Av	9.8	.2	25.56	-	-	46	-20.44
21	14.208	36.55	Pk	10.1	.4	47.05	60	-12.95	-	-
22	14.181	16.7	Av	10.1	.4	27.2	-	-	50	-22.8
23	16.005	30.87	Pk	10.2	.4	41.47	60	-18.53	-	-
24	16.053	4.85	Av	10.2	.4	15.45	-	-	50	-34.55

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.16125	40.52	Qp	9.9	.1	50.52	65.4	-14.88	-	-

Qp - Quasi-Peak detector

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.85	50	13.559989354	2.416	13.559988023	2.514	13.559985814	2.677	13.559984153	2.800	100
3.85	40	13.560003354	1.384	13.560008130	1.031	13.559999072	1.699	13.559997451	1.819	100
3.85	30	13.560024348	-0.165	13.560020411	0.126	13.560007222	1.098	13.560006793	1.130	100
3.85	20	13.560022115	0	13.560023615	-0.111	13.560024597	-0.183	13.560025225	-0.229	100
3.85	10	13.560010527	0.855	13.560018920	0.236	13.560028813	-0.494	13.560037385	-1.126	100
3.85	0	13.560049827	-2.044	13.560058014	-2.647	13.560061424	-2.899	13.560063867	-3.079	100
3.85	-10	13.560068517	-3.422	13.560068358	-3.410	13.560067381	-3.338	13.560067054	-3.314	100
3.85	-20	13.560061810	-2.927	13.560059535	-2.760	13.560055617	-2.471	13.560052317	-2.227	100
3.85	-30	13.560030688	-0.632	13.560024481	-0.174	13.560012941	0.677	13.560007780	1.057	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.85	20	13.560022115	0	13.560023615	-0.111	13.560024597	-0.183	13.560025225	-0.229	100
4.40	20	13.560024570	-0.181	13.560024611	-0.184	13.560024771	-0.196	13.560024687	-0.190	100
3.65	20	13.560024312	-0.162	13.560023912	-0.133	13.560023414	-0.096	13.560023115	-0.074	100

No non-compliance noted.

END OF TEST REPORT