


D

С

→

В

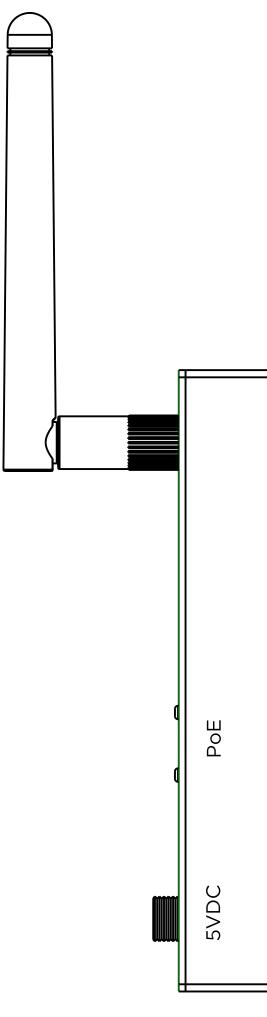

6

6

| | | 5 | ₩ | | 4 | | 3 |
|----------|----------|------------|-----------|-----------|---|-------|---|
| | | | | | | | |
| | | | | | | | |
| <u> </u> | | O Power | 0 Pair | O Test | MADE IN X M/N: HST-DIRECTOR-00 REV: XX S/N: XXXXXXXX UID NUM NUM NUM UID: XXXXXXXXXXXXXXX III NUM NUM NUM NUM FCC ID: ASU-DIRECTOR IC: 10052A-DIRECTOR IC: 10052A-DIRECTOR Contains FCC ID: VPYLB1ZM IC: 772C-LB1ZM | FC | |
| | | SAVA | NTPĊV | VER | | RS485 | |
| | | Reset O | Pair O | Test O | | | |
| | \frown | | | | | | |

| TOLERANCE DA UNLESS OTHERWISE | | | | | | | |
|----------------------------------|--------|--|--|--|--|--|--|
| | MM | | | | | | |
| Х | . 3 | | | | | | |
| Х.Х | . 3 | | | | | | |
| Χ.ΧΧ | . | | | | | | |
| X . X X X | AS NOT | | | | | | |
| ANGLE | Ŧ | | | | | | |
| TORQUE | - | | | | | | |

| 2 | | | | | | | | | |
|---|-------|---------|-----------|---------|------------------|--|--|--|--|
| | R E V | CREATOR | ECO # | DATE | DESCRIPTION | | | | |
| | 00 | SCH | X X X X X | 27JUL22 | INITIAL CREATION | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

D

С

E

| TA TABLE SPECIFIED. | FINISH: | SAVANT SYSTEMS LLC PROPRIETARY & CONFIDENTIAL | S | AV | AN | T | | RSEVERANCE W | |
|----------------------------|-------------|--|--------------|-------------|-------|-----------|-------|--------------|-----------|
| AS NOTED ±.030 ±.015 | N / A | THIS DOCUMENT CONTAINS COMPANY PROPRIETARYINFORMATION AND IS NOT TO BE REPRODUCED OR DISTRIBUTED WITHOUT PRIOR AUTHORIZATION | TITLE | HST - DI | RECTO | DR-00 PRO |)UC T | LABEL LOCA | TION |
| ⊺ED ± .005 ∣ DEG. | | | S I Z E D | units MM | | DWG NO | 089-X | X X X - 00 | rev 00 |
| ± 10% | BLACK MYLAR | | SCALE | | | | SHEET | I OF I | |
| | | | | | | | | | |

2