


5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit : mm)

Solder Land Pattern:


The solder land pattern (gray marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

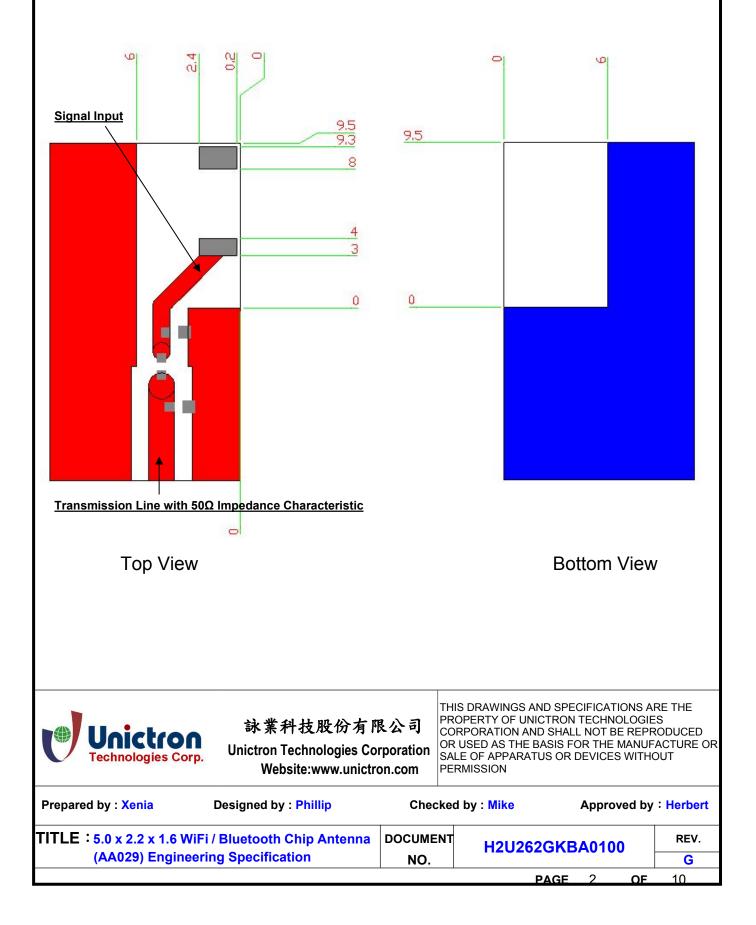



5-2. Electrical Specifications (Evaluation Board Dimensions: 100 x 50 mm²) 5-2-1. Electrical Table

Characte	ristics	Specifications	Unit				
Outline Dimensions		5.0 x 2.2 x 1.6	mm				
Working Frequency		2400 ~ 2484	MHz				
Bandwidth		140 (typical)	MHz				
VSWR		2 Max. (typical)					
Characteristic Impedance		50	Ω				
Polarization		Linear Polarization					
Peak Gain	(@2442 MU-)	3.8(typical)	dBi				
Efficiency	(@2442 MHz)	65 (typical)	%				

5-2. Return Loss & Smith Chart

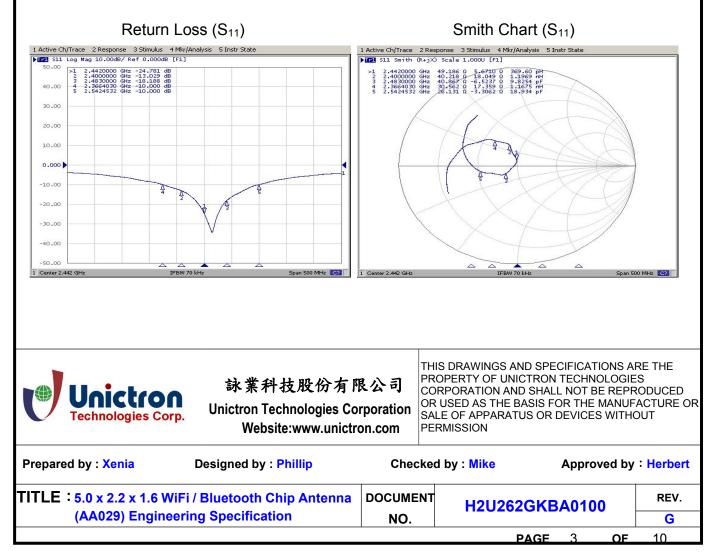


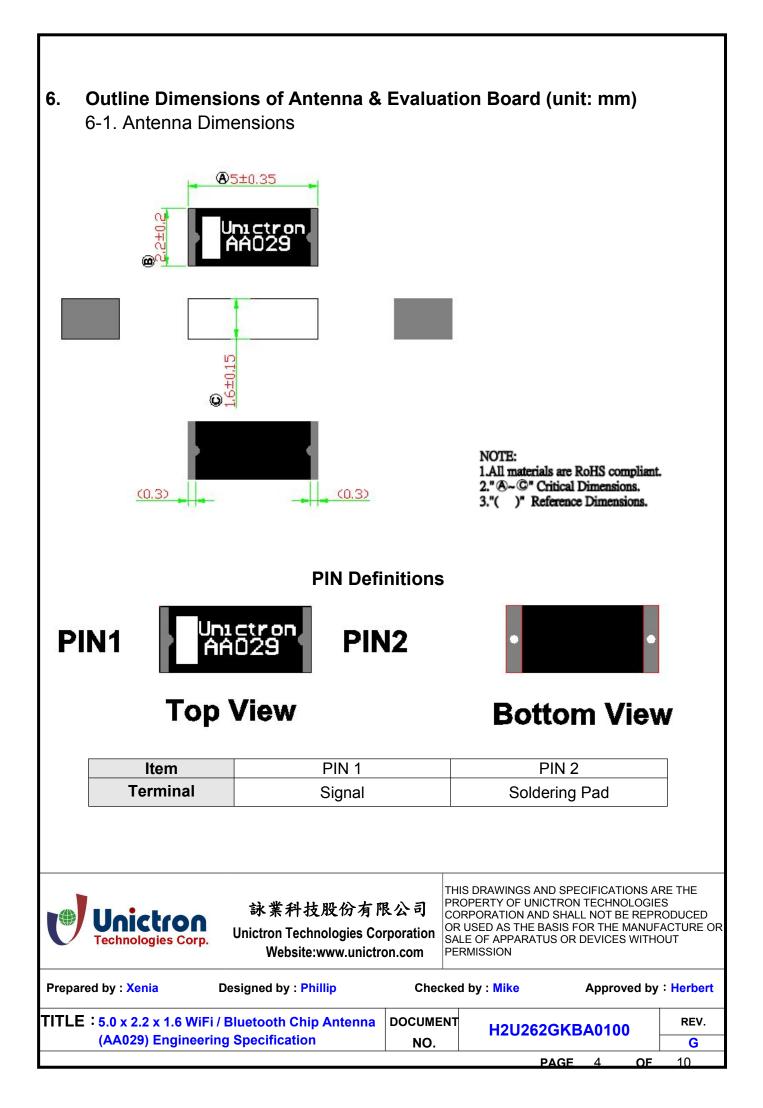

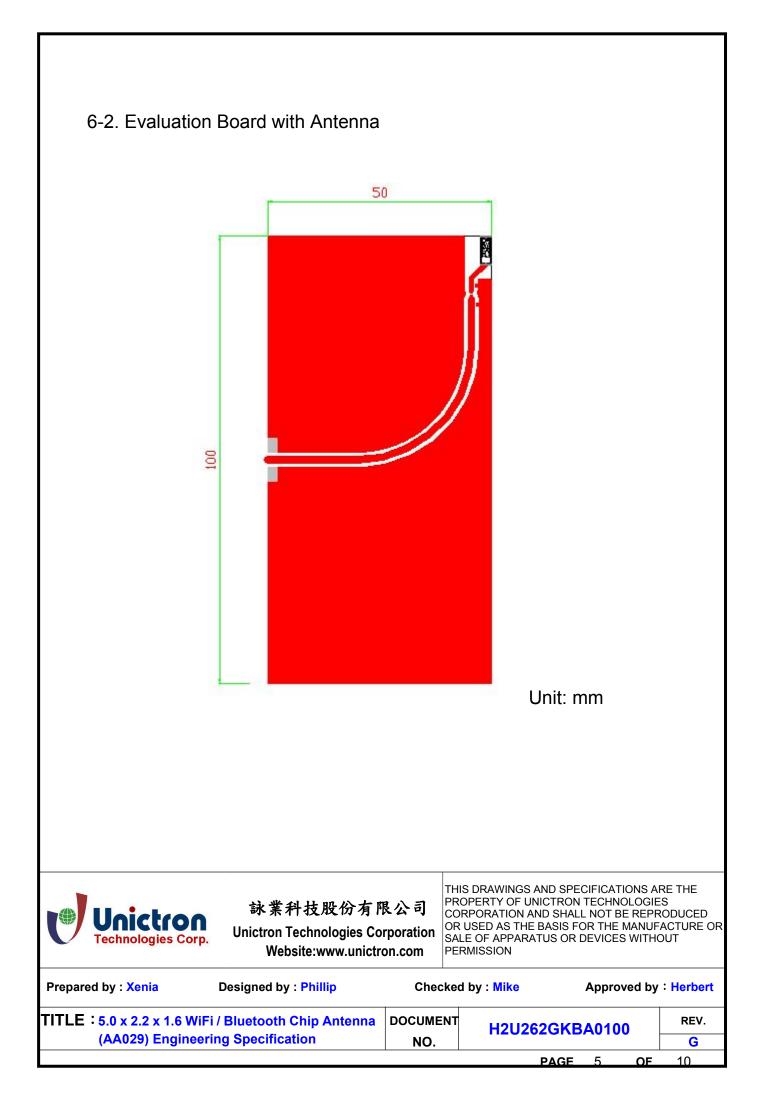

7. Radiation Pattern (with 100 x 50 mm² Evaluation Board)

7-1. 3D Gain Pattern @ 2442 MHz (unit: dBi)

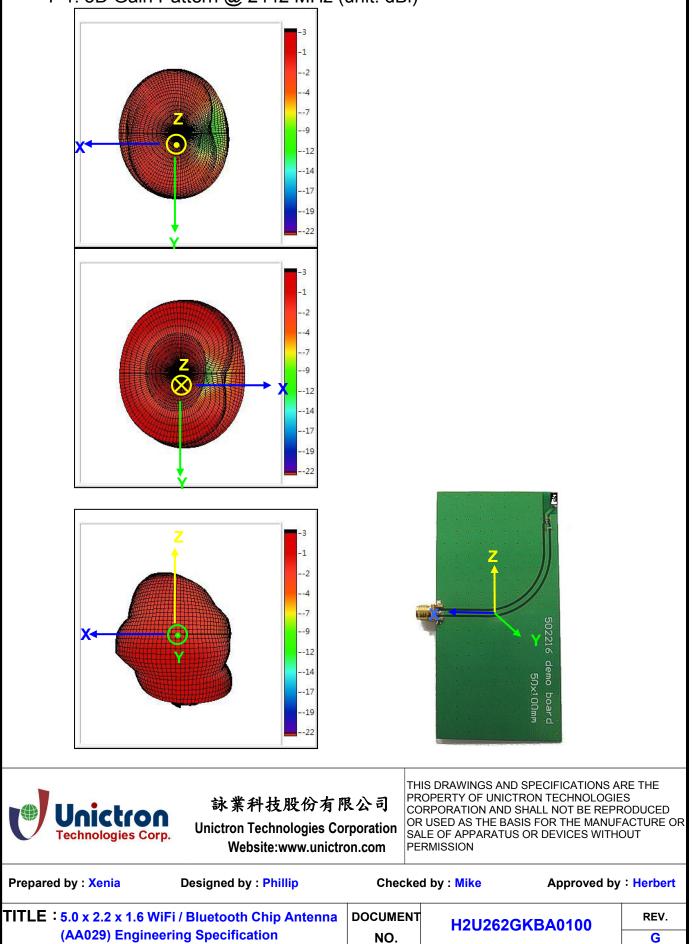

10


OF

PAGE

6


7-2. 3D	Effic	cienc	у Та	ble											
Frequency(MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484
Efficiency(dB)	-2.3	-2.0	-2.0	-2.0	-1.9	-1.9	-1.9	-1.8	-2.0	-2.0	-2.0	-1.8	-1.9	-2.0	-2.3
Efficiency (%)	59.3	62.4	63.4	63.8	64.4	65.3	65.2	65.5	63.5	63.1	63.7	65.5	65.0	63.1	59.0
Peak Gain (dBi)	2.8	3.1	3.3	3.4	3.5	3.5	3.5	3.5	3.4	3.3	3.5	3.8	3.8	3.7	3.5
· · · · ·															<u> </u>



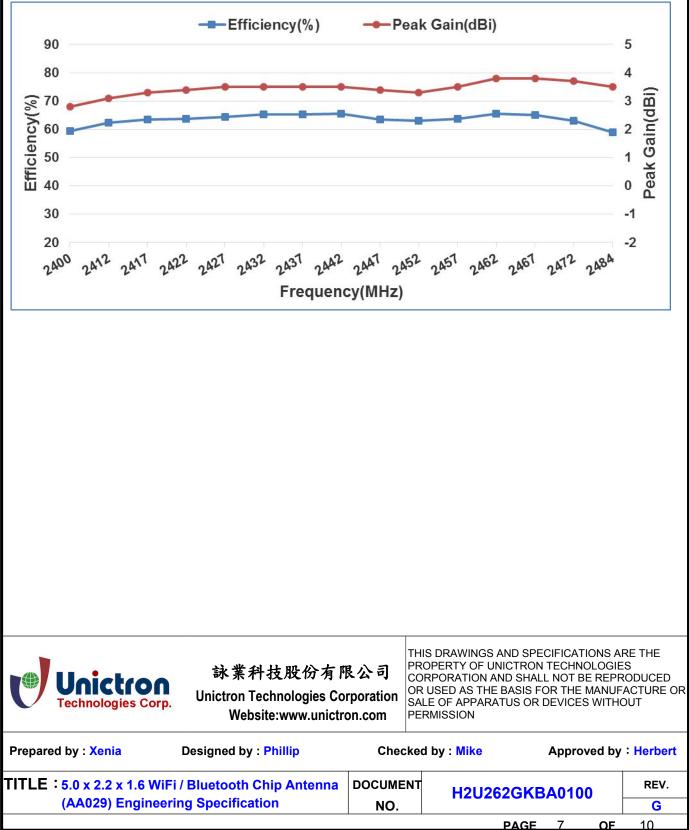

8. **Frequency tuning and Matching circuit** 8-1. Chip antenna tuning scenario : Signal Input 1 2 3 Matching circuit 8-2. Matching circuit : With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 100 x 50 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.


Antenna										
\sim			System Matching Circuit Component							
Ý		Locat	ion	Description	Vendor	Tolerance				
		1		N/A*	-	-				
2		2	2 2.2nH, (0402)		DARFON	±0.1nH				
		3		1pF, (0402)	DARFON	±0.1pF				
÷ Unictron	 詠業科技服	史份有 周	艮公司	PROPERTY OF UNI CORPORATION AN	ND SPECIFICATIONS CTRON TECHNOLOG O SHALL NOT BE RE	GIES PRODUCED				
Technologies Corp.	Unictron Techno Website:wv	-	-	OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION						
Prepared by : Xenia	Designed by : Philli	p	Cheo	cked by : Mike	Approved	by:Herbert				
	TITLE :5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Ant (AA029) Engineering Specification		DOCUMENT NO.		GKBA0100	REV.				
					PAGE 8 O	F 10				

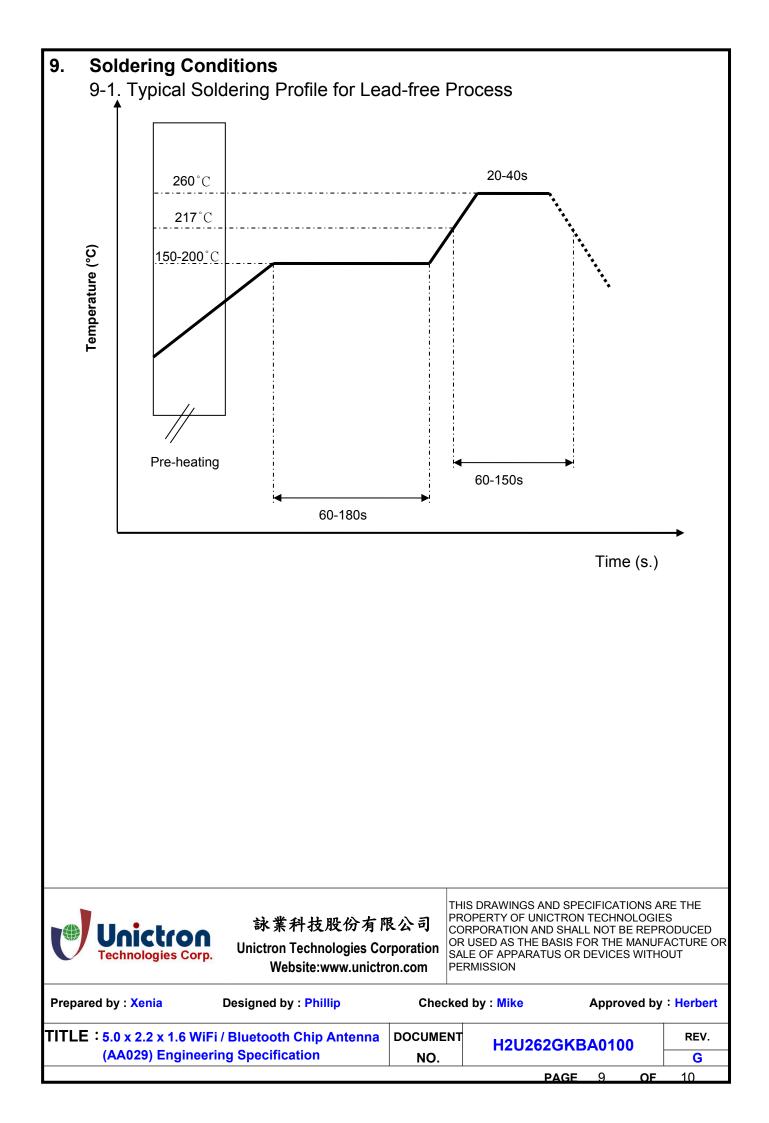

10. Packing

- (1) Quantity/Reel: 3000pcs/Reel
- (2) Plastic tape:
 - a. Tape Drawing



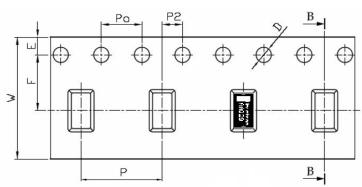

Feature Specifications Tolerances W 12.00 ±0.30 Ρ 8.00 ±0.10 Е 1.75 ±0.10 F 5.50 ±0.10 P2 2.00 ±0.10 +0.10D 1.50 -0.00 Po 4.00 ±0.10 10Po 40.00 ±0.20

11. Operating & Storage Conditions

- 11-1. Operating
 - (1) Maximum Input Power: 2 W
 - (2) Operating Temperature: -40 $^\circ\!\mathrm{C}$ to 85 $^\circ\!\mathrm{C}$

11-2. Storage

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

Prepared by : Xenia	Designed by : Phillip	Check	ed by : Mike	Approved by	: Herbert		
Unictron Technologies Corp.	詠業科技股份有阝 Unictron Technologies Co Website:www.unictr	<mark>限公司</mark> C C	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION				