

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 1 of 58

Applicant : SKYTECH USA LLC.
Address of Applicant : INCORP SERVICES, INC. 3458 LAKESHORE DRIVE
TALLAHASSEE, FL 32312 US

Product Name : Desktop Computer
Brand Name : STGAubron & STGsivir
Model Name : ABR1924
Sample Acquisition Method : Sent by Client
Sample No. : E24110067-01#03
E24110067-01#04

FCC ID : 2BGCAABR1924

Standards : FCC CFR47 Part 15.247, Subpart C

Date of Receipt : 2024-11-21
Date of Test : 2024-11-21~ 2025-02-18
Date of Issue : 2025-02-19

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:




(Erik Yang)

Reviewed by:



(Jennifer Zhou)

Approved by:



(Authorized signatory: Echo Mu)

TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 2 of 58

Contents

- 1 GENERAL INFORMATION 3**
 - 1.1 TESTING LABORATORY 3
 - 1.2 DETAILS OF APPLICATION 3
 - 1.3 DETAILS OF EUT 3
 - 1.4 TEST METHODOLOGY 4
 - 1.5 TEST SUMMARY 5
- 2 TEST CONDITION 6**
 - 2.1 ENVIRONMENTAL CONDITIONS 6
 - 2.2 EQUIPMENT LIST 6
 - 2.3 MEASUREMENT UNCERTAINTY 7
- 3 TEST SET-UP AND OPERATION MODES 8**
 - 3.1 DETAILS OF TEST MODE 8
 - 3.2 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 8
 - 3.3 SUPPORT SOFTWARE 8
 - 3.4 TEST SETUP DIAGRAM 9
- 4 TEST RESULTS 11**
 - 4.1 TRANSMITTER REQUIREMENT & TEST SUITES 11
 - 4.1.1 *Antenna Requirement* 11
 - 4.1.2 *Maximum peak conducted output power* 12
 - 4.1.3 *6dB Bandwidth and 99% Bandwidth* 16
 - 4.1.4 *Maximum conducted output power spectral density* 23
 - 4.1.5 *Conducted Spurious Emission & Authorized-band band-edge* 27
 - 4.1.6 *Radiated Emission* 39
 - 4.1.7 *Band Edge (Restricted-band band-edge)* 40
 - 4.2 MAINS EMISSIONS 41
 - 4.2.1 *Conducted Emission on AC Mains* 41
- 5 APPENDIXES 44**
 - 5.1 PHOTOGRAPHS OF THE SAMPLE 44
 - 5.2 SET-UP FOR CONDUCTED EMISSIONS 57
 - 5.3 SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT 57
 - 5.4 SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ 58
 - 5.5 SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ 58

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 3 of 58

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	SKYTECH USA LLC.
Address	INCORP SERVICES, INC. 3458 LAKESHORE DRIVE TALLAHASSEE, FL 32312 US
Contact Person	Hu yan
Telephone	001-647-8892-868
Email	yan.hu@astsys.com
Manufacturer Company Name	SKYTECH USA LLC.
Address	INCORP SERVICES, INC. 3458 LAKESHORE DRIVE TALLAHASSEE, FL 32312 US
Factory Company Name	SKYTECH USA LLC.
Address	INCORP SERVICES, INC. 3458 LAKESHORE DRIVE TALLAHASSEE, FL 32312 US

1.3 Details of EUT

Product Name	Desktop Computer
Brand Name	STGAubron & STGsivir
Test Model Name	ABR1924
FCC ID	2BGCAABR1924
Mode of Operation	Bluetooth LE
Operating Frequency Range	2402MHz ~ 2480MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	BLE ☒ GFSK 1Mbps ☒ GFSK 2Mbps
Max RF Output Power	4.75dBm
Antenna Type	Internal Antenna
Antenna Gain	1.51dBi
Extreme Temperature Range	0°C~ +70°C
Test Voltage	AC 100-240V 50/60Hz
Hardware Version	H311M-K PLUS
Software Version	5.12

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 4 of 58

RF power setting in TEST SW

Bluetooth RF Test Tool (RtlBluetooth MP.dll Version: 5.3.1.89 RTLBTAPP Version: 5.2.3.16) Power level setting Default

Note:

1. The above information was declared by the manufacture.
2. For more details, please refer to the User's manual of the EUT.

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2.402GHz	14	2.430GHz	28	2.458GHz
1	2.404GHz	15	2.432GHz	29	2.460GHz
2	2.406GHz	16	2.434GHz	30	2.462GHz
3	2.408GHz	17	2.436GHz	31	2.464GHz
4	2.410GHz	18	2.438GHz	32	2.466GHz
5	2.412GHz	19	2.440GHz	33	2.468GHz
6	2.414GHz	20	2.442GHz	34	2.470GHz
7	2.416GHz	21	2.444GHz	35	2.472GHz
8	2.418GHz	22	2.446GHz	36	2.474GHz
9	2.420GHz	23	2.448GHz	37	2.476GHz
10	2.422GHz	24	2.450GHz	38	2.478GHz
11	2.424GHz	25	2.452GHz	39	2.480GHz
12	2.426GHz	26	2.454GHz		
13	2.428GHz	27	2.456GHz		

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 5 of 58

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	PASS
Maximum peak conducted output power	FCC Part 15.247(b)(3)	PASS
6dB Bandwidth and 99% Bandwidth	FCC Part 15.247(a)(2)	PASS
Maximum conducted output power spectral density	FCC Part 15.247(e)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 6 of 58

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	15-35
Humidity (%RH)	30-60
Barometric Pressure (mbar)	860-1060

Note: Actual values will be recorded during the test.

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020B	MY59260184	2024-06-26	2025-06-25
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2024-06-04	2025-06-03
Signal Generator	Rohde & Schwarz	SMR27	100184	2024-06-26	2025-06-25
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2024-06-05	2025-06-04
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2024-06-04	2025-06-03
V-network	SCHWARZBECK	NSLK 8127	8127-902	2024-06-05	2025-06-04
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2024-06-05	2025-06-04
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2023-03-22	2025-03-21
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2023-06-13	2025-06-12
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2023-06-09	2025-06-08
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2023-06-18	2025-06-17
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2024-06-04	2025-06-03
EMC chamber 9*6*6(L*W*H)	CHANGNING	966	N/A	2023-06-09	2025-06-08
Shielded Enclosure 8*5*4(L*W*H)	CHANGNING	854	N/A	2023-06-09	2025-06-08
Test Software	BL	BL410_E	Version:2.1.1.436	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 7 of 58

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter		Uncertainty
Antenna Port Conducted Emission		$\pm 1.04\text{dB}$
Radiated Emission	< 1GHz	$\pm 5.00\text{dB}$
	> 1GHz	$\pm 5.46\text{dB}$
Conducted Emission on AC Mains	150KHz-30MHz	$\pm 3.36\text{dB}$
Occupied Channel Bandwidth		$\pm 39.26\text{KHz}$
Maximum Conducted Output Power		$\pm 1.06\text{dB}$
Maximum Conducted Output Power Spectral Density		$\pm 1.12\text{dB}$

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 8 of 58

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software to control EUT work in continuous transmit mode. Select test channel as below:

Channel	Frequency
The lowest channel(CH00)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
 - 1. BLE mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model Name	Serial No.
Display	Dell	YMLK003	YMLK003
Mouse	Dell	MS116t1	CN-065K5F-LO300-248-0VP2
Keyboard	Dell	KB216P	CN-0M4W71-73826-6C801SQ-A02
HDMI Cable	N/A	N/A	1m Unshielded


3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	Bluetooth RF Test Tool (RtlBluetooth MP.dll Version: 5.3.1.89 RTLBTAPP Version: 5.2.3.16)

TEST REPORT


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

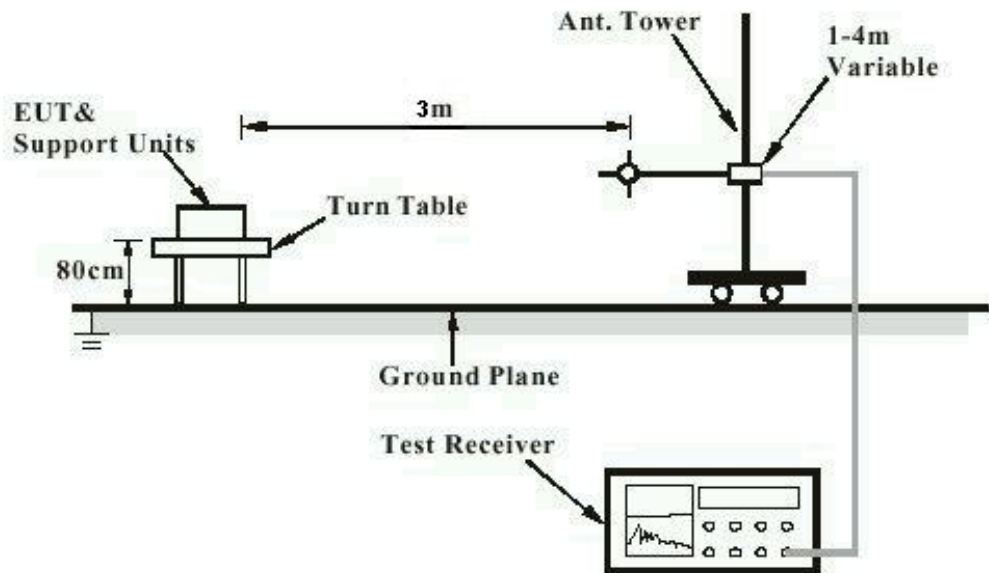

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Conduction Measurement

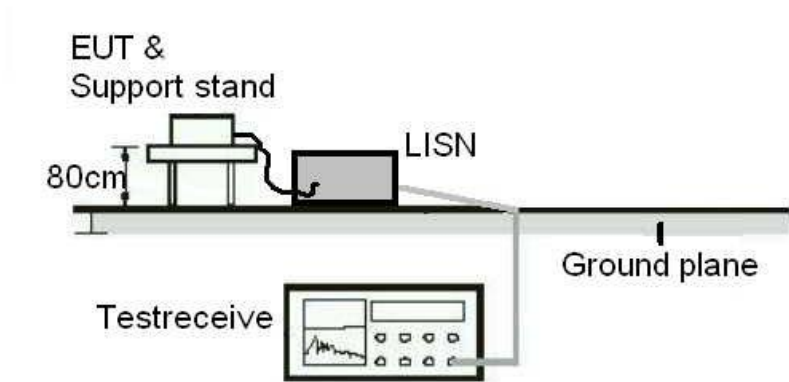


TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 10 of 58

Diagram of Measurement Equipment Configuration for Transmitter Test

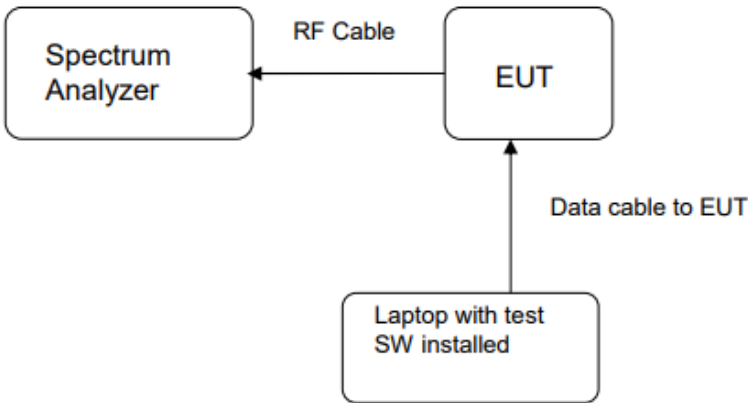

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 11 of 58

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	:	FCC Part 15.247(b)(4), Part 15.203
Requirement	:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. In addition, If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 1.51dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 12 of 58

4.1.2 Maximum peak conducted output power

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)

Requirement : ANSI C63.10-2013 clause 11.9.1.1,
KDB 558074 D01 v05r02, Clause 8.3.1

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 21.6°C

Relative humidity : 36%

Table 1: Maximum peak conducted output power

Test Mode	Test Channel (MHz)	Maximum peak conducted output power		Limit (W)
		(dBm)	(mW)	
BLE-1Mbps	2402	4.75	2.99	< 1
	2440	4.12	2.58	
	2480	4.55	2.85	
BLE-2Mbps	2402	4.70	2.95	
	2440	4.15	2.60	
	2480	4.53	2.84	

TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 13 of 58

Figure 1: Peak Output Power, 2402MHz, BLE-1Mbps



Figure 2: Peak Output Power, 2440MHz, BLE-1Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 14 of 58

Figure 3: Peak Output Power, 2480MHz, BLE-1Mbps



Figure 4: Peak Output Power, 2402MHz, BLE-2Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 15 of 58

Figure 5: Peak Output Power, 2440MHz, BLE-2Mbps



Figure 6: Peak Output Power, 2480MHz, BLE-2Mbps



TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 16 of 58

4.1.3 6dB Bandwidth and 99% Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)

Requirement : ANSI C63.10-2013 clause 11.8.1,
KDB 558074 D01 v05r02, Clause 8.2

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 21.6°C

Relative humidity : 36%

Table 2: 6dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Bandwidth Limit
BLE-1Mbps	2402	0.6592	1.0470	≥0.5 MHz
	2440	0.6131	1.0430	
	2480	0.6343	1.0341	
BLE-2Mbps	2402	0.8571	2.0671	
	2440	1.0830	2.0456	
	2480	1.1000	2.0635	

TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 17 of 58

Figure 7: 6dB Bandwidth, 2402MHz, BLE-1Mbps



99% Bandwidth, 2402MHz, BLE-1Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 18 of 58

Figure 8: 6dB Bandwidth, 2440MHz, BLE-1Mbps



99% Bandwidth, 2440MHz, BLE-1Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 19 of 58

Figure 9: 6dB Bandwidth, 2480MHz, BLE-1Mbps



99% Bandwidth, 2480MHz, BLE-1Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 20 of 58

Figure 10: 6dB Bandwidth, 2402MHz, BLE-2Mbps



99% Bandwidth, 2402MHz, BLE-2Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 21 of 58

Figure 11: 6dB Bandwidth, 2440MHz, BLE-2Mbps



99% Bandwidth, 2440MHz, BLE-2Mbps



TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 22 of 58

Figure 12: 6dB Bandwidth, 2480MHz, BLE-2Mbps



99% Bandwidth, 2480MHz, BLE-2Mbps



TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 23 of 58

4.1.4 Maximum conducted output power spectral density

RESULT:

PASS

Test standard : FCC Part 15.247(e))

Requirement : ANSI C63.10-2013 clause 11.10.2,
KDB 558074 D01 v05r02, Clause 8.4

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 21.6°C

Relative humidity : 36%

Table 3: Maximum conducted output power spectral density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
BLE-1Mbps	2402	-9.94	8
	2440	-8.91	
	2480	-11.54	
BLE-2Mbps	2402	-14.43	
	2440	-13.07	
	2480	-12.40	

TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 24 of 58

Figure 13: Power Spectral Density, 2402MHz, BLE-1Mbps

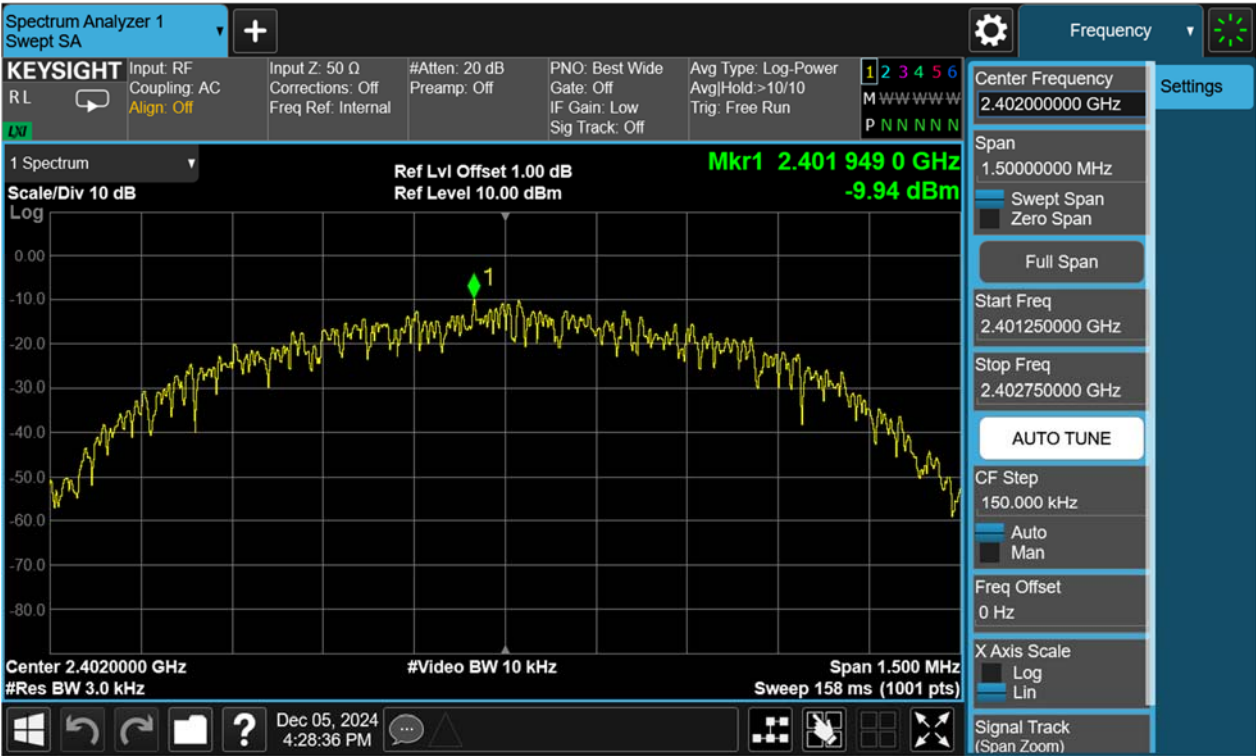


Figure 14: Power Spectral Density, 2440MHz, BLE-1Mbps



TEST REPORT

Report No.: SHE24110067-02DE

Date: 2025-02-19

Page 25 of 58

Figure 15: Power Spectral Density, 2480MHz, BLE-1Mbps


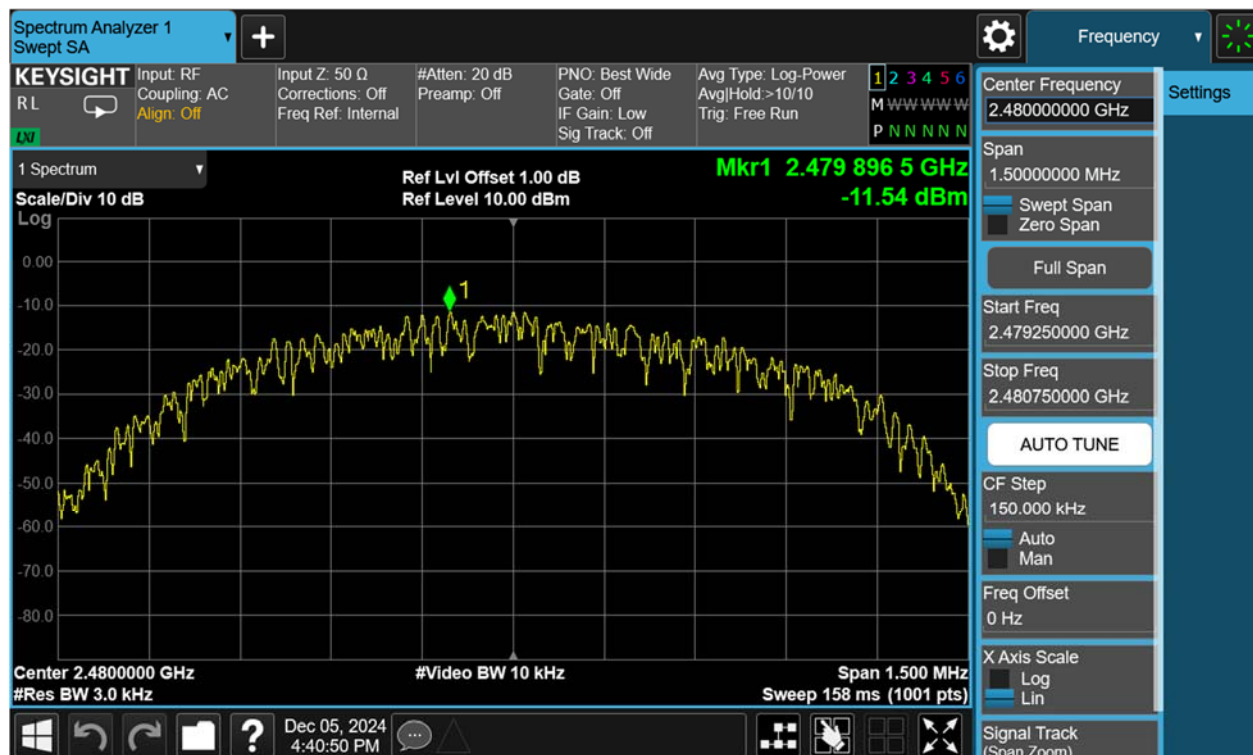


Figure 16: Power Spectral Density, 2402MHz, BLE-2Mbps

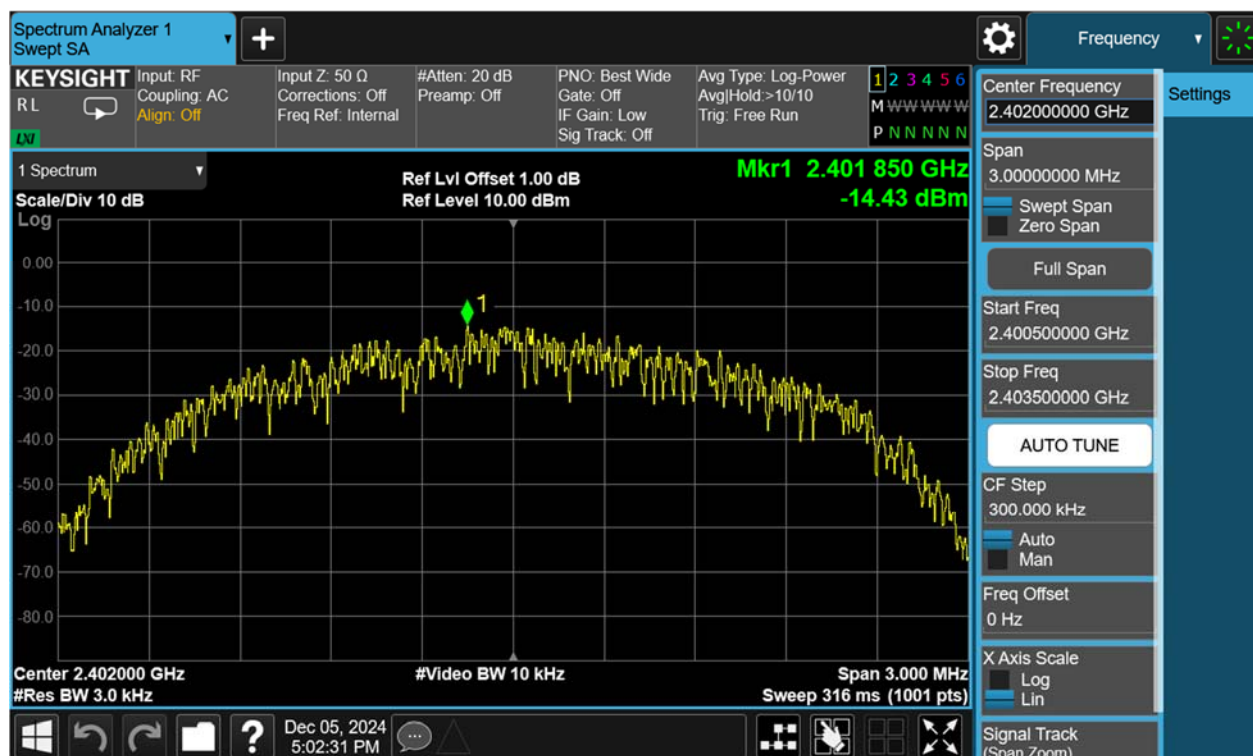

TEST REPORT

Report No.: SHE24110067-02DE Date: 2025-02-19 Page 26 of 58

Figure 17: Power Spectral Density, 2440MHz, BLE-2Mbps

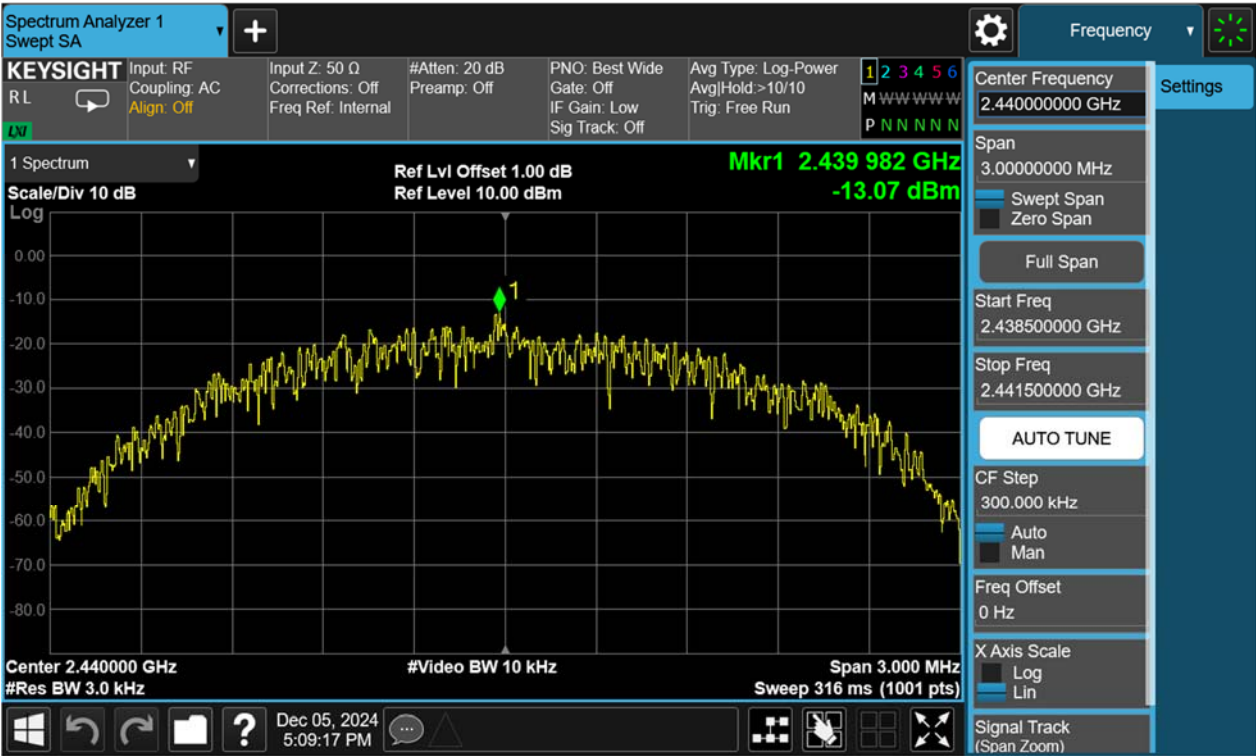


Figure 18: Power Spectral Density, 2480MHz, BLE-2Mbps

