

FCC TEST REPORT

(PART 27)



Applicant:	Beijing InHand Networks Technology Co., Ltd.
Address:	Room 501, floor 5, building 3, yard 18, ziyue road, chaoyang district, Beijing China

Manufacturer or Supplier:	Beijing InHand Networks Technology Co., Ltd.
Address:	Room 501, floor 5, building 3, yard 18, ziyue road, chaoyang district, Beijing China
Product:	CPE02
Brand Name:	inhand
Model Name:	CPE02
FCC ID:	2AANY-CPE02
Date of tests:	Feb. 11, 2025 ~ Feb. 28, 2025

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC Part 27** ☒ **ANSI/TIA/EIA-603-D**
☒ **FCC Part 2** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Feb. 28, 2025	 Date: Feb. 28, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Test Report No.: PSU-NQN2502170213RF04

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	7
1.2 TEST SITE AND INSTRUMENTS	8
2 GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 CONFIGURATION OF SYSTEM UNDER TEST	13
2.3 DESCRIPTION OF SUPPORT UNITS	14
2.4 TEST ITEM AND TEST CONFIGURATION	14
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3 TEST TYPES AND RESULTS	19
3.1 OUTPUT POWER MEASUREMENT	19
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	19
3.1.2 TEST PROCEDURES	19
3.1.3 TEST SETUP	20
3.1.4 TEST RESULTS	21
3.2 FREQUENCY STABILITY MEASUREMENT	86
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	86
3.2.2 TEST PROCEDURE	86
3.2.3 TEST SETUP	86
3.2.4 TEST RESULTS	86
3.3 OCCUPIED BANDWIDTH MEASUREMENT	87
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	87
3.3.2 TEST SETUP	87
3.3.3 TEST PROCEDURES	87
3.3.4 TEST RESULTS	87
3.4 BAND EDGE MEASUREMENT	88
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	88
3.4.2 TEST SETUP	89
3.4.3 TEST PROCEDURES	90
3.4.4 TEST RESULTS	90
3.5 CONDUCTED SPURIOUS EMISSIONS	91
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	91
3.5.2 TEST PROCEDURE	91
3.5.3 TEST SETUP	91
TEST RESULTS	91
3.6 RADIATED EMISSION MEASUREMENT	92
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	92
3.6.2 TEST PROCEDURES	92
3.6.3 DEVIATION FROM TEST STANDARD	92
3.6.4 TEST SETUP	93
3.6.5 TEST RESULTS	95
3.7 PEAK TO AVERAGE RATIO	98
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	98
3.7.2 TEST SETUP	98
3.7.3 TEST PROCEDURES	98
3.7.4 TEST RESULTS	98
4 INFORMATION ON THE TESTING LABORATORIES	99
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB... 99	



Test Report No.: PSU-NQN2502170213RF04

6 APPENDIX	99
------------------	----



Test Report No.: PSU-NQN2502170213RF04

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2502170213RF04	Original release	Feb. 28, 2025

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(d)(4) §27.50(h)(2) §27.50(k)(3)	Equivalent Isotropically Radiated Power (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(h) §27.53(m)(4)(6) §27.53(n)(2)	Conducted Band Edge Measurements (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§2.1051 §27.53(h) §27.53(m)(4)(6) §27.53(n)(2)	Conducted Spurious Emissions (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§2.1053 §27.53(h) §27.53(m)(4)(6) §27.53(n)(2)	Radiated Spurious Emissions (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§27.50(k)(4)	Peak to average ratio	Compliance	A



Test Report No.: PSU-NQN2502170213RF04

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Accredited Test Lab Cert 6613.01


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

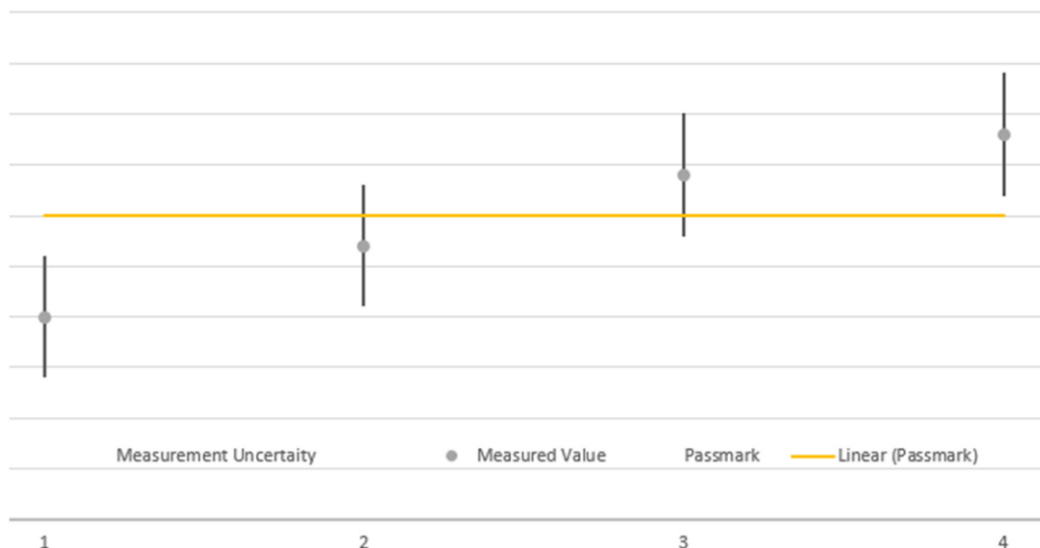

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Vector Signal Generator	R&S	SMBV100B	102176	Mar.29,24	Mar.28,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Mar.28,24	Mar.27,26
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Dec.26,23	Dec.25,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,23	Aug.21,25
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,23	Aug.21,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,23	Feb.22,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,25	Feb.21,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
Hygrothermograph	DELI	20210528	SZ014	Sep.06,23	Sep.05,25
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,24	Apr.26,25
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26



Test Report No.: PSU-NQN2502170213RF04

- NOTE:**
1. The calibration interval of the above test instruments is 12 / 24/ 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	CPE02	
BRAND NAME*	inhand	
MODEL NAME*	CPE02	
NOMINAL VOLTAGE*	12.0Vdc(adapter or host equipment)	
MODULATION TECHNOLOGY*	LTE	QPSK, 16QAM, 64QAM,256 QAM
FREQUENCY RANGE	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1754.3MHz
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.5MHz
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~ 1752.5MHz
	LTE Band 4 Channel Bandwidth: 10MHz	1715MHz ~ 1750MHz
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5 MHz
	LTE Band 4 Channel Bandwidth: 20MHz	1720MHz ~ 1745MHz
	LTE Band 38 Channel Bandwidth: 5MHz	2572.5MHz ~ 2617.5MHz
	LTE Band 38 Channel Bandwidth: 10MHz	2575MHz ~ 2615MHz
	LTE Band 38 Channel Bandwidth: 15MHz	2577.5MHz ~ 2612.5MHz
	LTE Band 38 Channel Bandwidth: 20MHz	2580MHz ~ 2610MHz
	LTE Band 41 Channel Bandwidth: 5MHz	2498.5MHz ~ 2687.5MHz
	LTE Band 41 Channel Bandwidth: 10MHz	2501MHz ~ 2685MHz
	LTE Band 41 Channel Bandwidth: 15MHz	2503.5MHz ~ 2682.5MHz
	LTE Band 41 Channel Bandwidth: 20MHz	2506MHz ~ 2680MHz
	LTE Band 66 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1779.3MHz
	LTE Band 66 Channel Bandwidth: 3MHz	1711.5MHz ~ 1778.5MHz
	LTE Band 66 Channel Bandwidth: 5MHz	1712.5MHz ~ 1777.5MHz
	LTE Band 66 Channel Bandwidth: 10MHz	1715MHz ~ 1775MHz



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502170213RF04

FREQUENCY RANGE	LTE Band 66 Channel Bandwidth: 15MHz	1717.5MHz ~ 1772.5MHz
	LTE Band 66 Channel Bandwidth: 20MHz	1720MHz ~ 1770MHz
	LTE Band CA_66B Channel Bandwidth: 5MHz+5MHz	1712.5MHz ~ 1777.5MHz
	LTE Band CA_66B Channel Bandwidth: 5MHz+10MHz	1712.8MHz ~ 1775.0MHz
	LTE Band CA_66B Channel Bandwidth: 10MHz+5MHz	1715MHz ~ 1777.2MHz
	LTE Band CA_66B Channel Bandwidth: 15MHz+5MHz	1717.5MHz ~ 1777.0MHz
	LTE Band CA_66B Channel Bandwidth: 5MHz+15MHz	1713MHz ~ 1772.5MHz
	LTE Band CA_66B Channel Bandwidth: 10MHz+10MHz	1715MHz ~ 1775MHz
	LTE Band CA_66C Channel Bandwidth: 10MHz+15MHz	1715.3MHz ~ 1772.5MHz
	LTE Band CA_66C Channel Bandwidth: 10MHz+20MHz	1715.5MHz ~ 1770MHz
	LTE Band CA_66C Channel Bandwidth: 15MHz+15MHz	1713.3MHz ~ 1770MHz
	LTE Band CA_66C Channel Bandwidth: 15MHz+20MHz	1717.8MHz ~ 1770MHz
	LTE Band CA_66C Channel Bandwidth: 20MHz+5MHz	1720MHz ~ 1776.7MHz
	LTE Band CA_66C Channel Bandwidth: 20MHz+20MHz	1720MHz ~ 1770MHz
MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 5MHz	208.9mW
	LTE Band 38 Channel Bandwidth: 5MHz	437.5mW
	LTE Band 41 Channel Bandwidth: 5MHz	437.5mW
	LTE Band 66 Channel Bandwidth: 5MHz	437.5mW



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502170213RF04

MAX. EIRP POWER	LTE Band CA_66B Channel Bandwidth: 10MHz+10MHz	231.7mW
	LTE Band CA_66C Channel Bandwidth: 10MHz+20MHz	221.8mW
ANTENNA TYPE*	Built-in cellular Antenna with 3.17dBi gain for LTE B4 Built-in cellular Antenna with 2.64dBi gain for LTE B38/ LTE B41 Built-in cellular Antenna with 3.17dBi gain for LTE B66/LTE CA_66B/LTE CA_66C	
HW VERSION*	V1.6	
SW VERSION*	V2.0	
I/O PORTS*	Refer to user's manual	
EXTREME TEMPERATURE*	0°C~40 °C	
EXTREME VOLTAGE*	9 Vdc~14Vdc	

NOTE1: This product uses the module model RM520N-NA and supports LTE frequency bands 2/4/5/7/12/13/14/17/25/26/30/38/41/48/66/71. Therefore, for this product, we referred to the test data reported by the RM520N-NA module and reevaluated the spectrum of radiated emissions and EIRP.

For module RM520N-NA: Report No.: 2303RSU050-U7

FCC ID: XMR2023RG520NNA


NOTE2:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
5. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

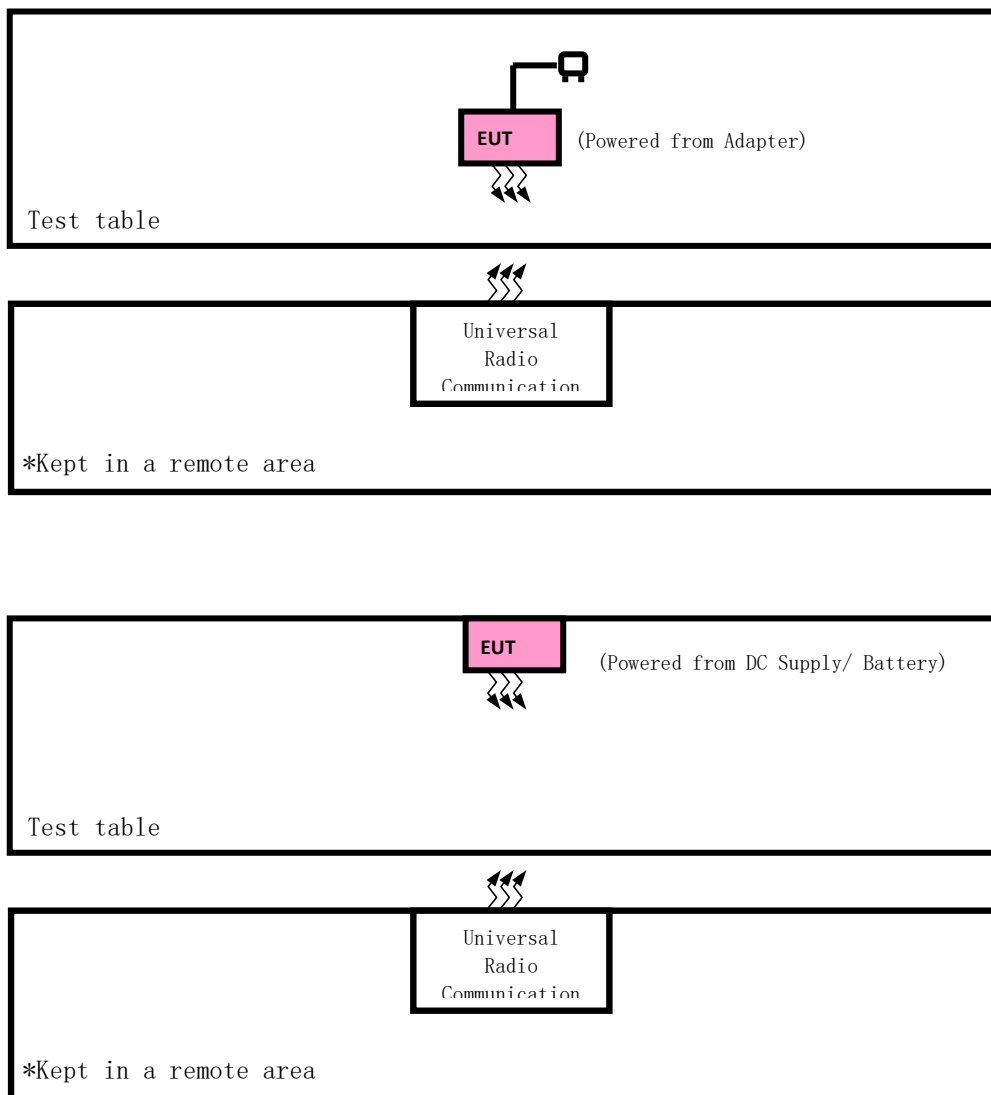

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC Source	HYELEC	HY3010B	551016	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + DC Supply with LTE link

LTE BAND 4 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 4 are covered by LTE Band 66, Because it is a subset of LTE Band 66 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 66

LTE BAND 38 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	37775 to 38225	37775, 38000, 38225	5MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0RB Offset
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 38 are covered by LTE Band 41, Because it is a subset of LTE Band 41 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 41

LTE BAND 41 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	39675 to 41565	39675, 40620, 41565	5MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	39675 to 41565	40620	5MHz	QPSK	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK	1 RB / 0RB Offset
		39725 to 41515	40620	15MHz	QPSK	1 RB / 0 RB Offset
		39750 to 41490	40620	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 66 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	131979 to 132665	131979,132322,132665	1.4MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		131987 to 132657	131987,132322,132657	3MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		131997 to 132647	131997,132322,132647	5MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		132047 to 132597	132047,132322,132597	15MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
		132072 to 132572	132072,132322,132572	20MHz	QPSK,16QAM, 64QAM,256 QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	131979 to 132665	132322	1.4MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	132322	3MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	132322	5MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132322	15MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132322	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: PSU-NQN2502170213RF04

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	DC12V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC12V By Adapter	Hanwen Xu



Test Report No.: PSU-NQN2502170213RF04

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50 (k)(3) Mobile devices are limited to 1Watt (30 dBm) EIRP, Mobile devices operating inl these bands must employ a means for limiting power to the minimum necessary for successful communications

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determing the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

LTE Band 4/66

MAX Power

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
1777.5	5	1	12	23.20	26.37	< 30.00
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
1745	20	1	99	23.11	26.28	< 30.00
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
1778.5	3	1	7	23.05	26.22	< 30.00
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
1745	20	1	49	23.01	26.18	< 30.00
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Power

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
1710.70	1.4	1	0	23.08	26.25	< 30.00
1745.00				22.99	26.16	< 30.00
1779.30				22.24	25.41	< 30.00
1710.70	1.4	1	2	22.99	26.16	< 30.00
1745.00				23.12	26.29	< 30.00
1779.30				22.16	25.33	< 30.00
1710.70	1.4	1	6	23.00	26.17	< 30.00
1745.00				23.13	26.30	< 30.00
1779.30				22.16	25.33	< 30.00
1710.70	1.4	6	0	22.58	25.75	< 30.00
1745.00				22.65	25.82	< 30.00
1779.30				21.18	24.35	< 30.00
1711.50	3	1	0	22.93	26.10	< 30.00
1745.00				22.99	26.16	< 30.00
1778.50				22.39	25.56	< 30.00
1711.50	3	1	7	22.98	26.15	< 30.00
1745.00				23.19	26.36	< 30.00
1778.50				22.28	25.45	< 30.00
1711.50	3	1	14	22.16	25.33	< 30.00
1745.00				22.92	26.09	< 30.00
1778.50				23.07	26.24	< 30.00
1711.50	3	15	0	21.18	24.35	< 30.00
1745.00				22.59	25.76	< 30.00
1778.50				22.61	25.78	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
1712.50	5	1	0	22.39	25.56	< 30.00
1745.00				22.91	26.08	< 30.00
1777.50				23.14	26.31	< 30.00
1712.50	5	1	12	22.28	25.45	< 30.00
1745.00				23.06	26.23	< 30.00
1777.50				23.20	26.37	< 30.00
1712.50	5	1	24	22.16	25.33	< 30.00
1745.00				23.03	26.20	< 30.00
1777.50				23.19	26.36	< 30.00
1712.50	5	25	0	21.29	24.46	< 30.00
1745.00				22.61	25.78	< 30.00
1777.50				22.62	25.79	< 30.00
1715.00	10	1	0	22.57	25.74	< 30.00
1745.00				22.99	26.16	< 30.00
1775.00				23.06	26.23	< 30.00
1715.00	10	1	24	22.39	25.56	< 30.00
1745.00				23.04	26.21	< 30.00
1775.00				23.18	26.35	< 30.00
1715.00	10	1	49	22.27	25.44	< 30.00
1745.00				22.92	26.09	< 30.00
1775.00				23.15	26.32	< 30.00
1715.00	10	50	0	21.39	24.56	< 30.00
1745.00				22.58	25.75	< 30.00
1775.00				22.61	25.78	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
1717.50	15	1	0	22.87	26.04	< 30.00
1745.00				23.06	26.23	< 30.00
1772.50				22.93	26.10	< 30.00
1717.50	15	1	37	22.92	26.09	< 30.00
1745.00				23.08	26.25	< 30.00
1772.50				22.42	25.59	< 30.00
1717.50	15	1	74	22.87	26.04	< 30.00
1745.00				23.04	26.21	< 30.00
1772.50				22.03	25.20	< 30.00
1717.50	15	75	0	22.50	25.67	< 30.00
1745.00				22.53	25.70	< 30.00
1772.50				21.50	24.67	< 30.00
1720.00	20	1	0	22.84	26.01	< 30.00
1745.00				22.86	26.03	< 30.00
1770.00				22.95	26.12	< 30.00
1720.00	20	1	49	22.97	26.14	< 30.00
1745.00				23.08	26.25	< 30.00
1770.00				22.43	25.60	< 30.00
1720.00	20	1	99	22.91	26.08	< 30.00
1745.00				23.11	26.28	< 30.00
1770.00				22.12	25.29	< 30.00
1720.00	20	100	0	22.46	25.63	< 30.00
1745.00				22.63	25.80	< 30.00
1770.00				22.36	25.53	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
1710.70	1.4	1	0	22.54	25.71	< 30.00
1745.00				22.56	25.73	< 30.00
1779.30				21.35	24.52	< 30.00
1710.70	1.4	1	2	22.69	25.86	< 30.00
1745.00				22.68	25.85	< 30.00
1779.30				21.29	24.46	< 30.00
1710.70	1.4	1	6	22.60	25.77	< 30.00
1745.00				22.75	25.92	< 30.00
1779.30				21.23	24.40	< 30.00
1710.70	1.4	6	0	21.45	24.62	< 30.00
1745.00				21.65	24.82	< 30.00
1779.30				20.26	23.43	< 30.00
1711.50	3	1	0	21.35	24.52	< 30.00
1745.00				22.55	25.72	< 30.00
1778.50				22.80	25.97	< 30.00
1711.50	3	1	7	21.29	24.46	< 30.00
1745.00				22.69	25.86	< 30.00
1778.50				23.05	26.22	< 30.00
1711.50	3	1	14	21.23	24.40	< 30.00
1745.00				22.47	25.64	< 30.00
1778.50				22.67	25.84	< 30.00
1711.50	3	15	0	20.26	23.43	< 30.00
1745.00				21.62	24.79	< 30.00
1778.50				21.63	24.80	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
1712.50	5	1	0	21.56	24.73	< 30.00
1745.00				22.83	26.00	< 30.00
1777.50				22.80	25.97	< 30.00
1712.50	5	1	12	21.48	24.65	< 30.00
1745.00				22.87	26.04	< 30.00
1777.50				22.98	26.15	< 30.00
1712.50	5	1	24	21.45	24.62	< 30.00
1745.00				22.67	25.84	< 30.00
1777.50				22.78	25.95	< 30.00
1712.50	5	25	0	20.31	23.48	< 30.00
1745.00				21.63	24.80	< 30.00
1777.50				21.66	24.83	< 30.00
1715.00	10	1	0	21.58	24.75	< 30.00
1745.00				22.69	25.86	< 30.00
1775.00				22.85	26.02	< 30.00
1715.00	10	1	24	21.61	24.78	< 30.00
1745.00				22.60	25.77	< 30.00
1775.00				22.78	25.95	< 30.00
1715.00	10	1	49	21.50	24.67	< 30.00
1745.00				22.79	25.96	< 30.00
1775.00				22.69	25.86	< 30.00
1715.00	10	50	0	20.41	23.58	< 30.00
1745.00				21.58	24.75	< 30.00
1775.00				21.61	24.78	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
1717.50	15	1	0	22.46	25.63	< 30.00
1745.00				22.60	25.77	< 30.00
1772.50				22.67	25.84	< 30.00
1717.50	15	1	37	22.89	26.06	< 30.00
1745.00				22.70	25.87	< 30.00
1772.50				21.64	24.81	< 30.00
1717.50	15	1	74	22.59	25.76	< 30.00
1745.00				22.78	25.95	< 30.00
1772.50				21.07	24.24	< 30.00
1717.50	15	75	0	21.52	24.69	< 30.00
1745.00				21.54	24.71	< 30.00
1772.50				20.50	23.67	< 30.00
1720.00	20	1	0	22.50	25.67	< 30.00
1745.00				22.54	25.71	< 30.00
1770.00				22.48	25.65	< 30.00
1720.00	20	1	49	22.56	25.73	< 30.00
1745.00				23.01	26.18	< 30.00
1770.00				21.57	24.74	< 30.00
1720.00	20	1	99	22.68	25.85	< 30.00
1745.00				22.84	26.01	< 30.00
1770.00				21.39	24.56	< 30.00
1720.00	20	100	0	21.47	24.64	< 30.00
1745.00				21.54	24.71	< 30.00
1770.00				20.86	24.03	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
1710.70	1.4	1	0	21.48	24.65	< 30.00
1745.00				21.58	24.75	< 30.00
1779.30				20.52	23.69	< 30.00
1710.70	1.4	1	2	21.41	24.58	< 30.00
1745.00				21.74	24.91	< 30.00
1779.30				20.23	23.40	< 30.00
1710.70	1.4	1	6	21.52	24.69	< 30.00
1745.00				21.67	24.84	< 30.00
1779.30				20.27	23.44	< 30.00
1710.70	1.4	6	0	20.50	23.67	< 30.00
1745.00				20.61	23.78	< 30.00
1779.30				19.07	22.24	< 30.00
1711.50	3	1	0	21.50	24.67	< 30.00
1745.00				21.67	24.84	< 30.00
1778.50				20.59	23.76	< 30.00
1711.50	3	1	7	21.65	24.82	< 30.00
1745.00				21.50	24.67	< 30.00
1778.50				20.42	23.59	< 30.00
1711.50	3	1	14	21.33	24.50	< 30.00
1745.00				21.65	24.82	< 30.00
1778.50				20.23	23.40	< 30.00
1711.50	3	15	0	20.47	23.64	< 30.00
1745.00				20.60	23.77	< 30.00
1778.50				19.24	22.41	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
1712.50	5	1	0	21.58	24.75	< 30.00
1745.00				21.55	24.72	< 30.00
1777.50				20.82	23.99	< 30.00
1712.50	5	1	12	21.50	24.67	< 30.00
1745.00				21.76	24.93	< 30.00
1777.50				20.56	23.73	< 30.00
1712.50	5	1	24	21.63	24.80	< 30.00
1745.00				21.80	24.97	< 30.00
1777.50				20.58	23.75	< 30.00
1712.50	5	25	0	20.55	23.72	< 30.00
1745.00				20.47	23.64	< 30.00
1777.50				19.28	22.45	< 30.00
1715.00	10	1	0	21.47	24.64	< 30.00
1745.00				21.53	24.70	< 30.00
1775.00				20.78	23.95	< 30.00
1715.00	10	1	24	21.72	24.89	< 30.00
1745.00				21.60	24.77	< 30.00
1775.00				20.70	23.87	< 30.00
1715.00	10	1	49	21.71	24.88	< 30.00
1745.00				21.69	24.86	< 30.00
1775.00				20.53	23.70	< 30.00
1715.00	10	50	0	20.48	23.65	< 30.00
1745.00				20.55	23.72	< 30.00
1775.00				19.49	22.66	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
1717.50	15	1	0	21.39	24.56	< 30.00
1745.00				21.54	24.71	< 30.00
1772.50				21.19	24.36	< 30.00
1717.50	15	1	37	21.64	24.81	< 30.00
1745.00				21.72	24.89	< 30.00
1772.50				20.38	23.55	< 30.00
1717.50	15	1	74	21.56	24.73	< 30.00
1745.00				21.76	24.93	< 30.00
1772.50				20.03	23.20	< 30.00
1717.50	15	75	0	20.30	23.47	< 30.00
1745.00				20.37	23.54	< 30.00
1772.50				19.41	22.58	< 30.00
1720.00	20	1	0	21.32	24.49	< 30.00
1745.00				21.44	24.61	< 30.00
1770.00				21.52	24.69	< 30.00
1720.00	20	1	49	21.56	24.73	< 30.00
1745.00				21.54	24.71	< 30.00
1770.00				20.45	23.62	< 30.00
1720.00	20	1	99	21.44	24.61	< 30.00
1745.00				21.67	24.84	< 30.00
1770.00				20.30	23.47	< 30.00
1720.00	20	100	0	20.36	23.53	< 30.00
1745.00				20.54	23.71	< 30.00
1770.00				20.27	23.44	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
1710.70	1.4	1	0	18.69	21.86	< 30.00
1745.00				18.75	21.92	< 30.00
1779.30				18.35	21.52	< 30.00
1710.70	1.4	1	2	18.63	21.80	< 30.00
1745.00				18.83	22.00	< 30.00
1779.30				18.28	21.45	< 30.00
1710.70	1.4	1	6	18.47	21.64	< 30.00
1745.00				18.65	21.82	< 30.00
1779.30				18.15	21.32	< 30.00
1710.70	1.4	6	0	18.48	21.65	< 30.00
1745.00				18.51	21.68	< 30.00
1779.30				18.17	21.34	< 30.00
1711.50	3	1	0	18.48	21.65	< 30.00
1745.00				18.84	22.01	< 30.00
1778.50				18.47	21.64	< 30.00
1711.50	3	1	7	18.78	21.95	< 30.00
1745.00				18.71	21.88	< 30.00
1778.50				18.45	21.62	< 30.00
1711.50	3	1	14	18.51	21.68	< 30.00
1745.00				18.51	21.68	< 30.00
1778.50				18.17	21.34	< 30.00
1711.50	3	15	0	18.48	21.65	< 30.00
1745.00				18.57	21.74	< 30.00
1778.50				18.27	21.44	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
1712.50	5	1	0	18.58	21.75	< 30.00
1745.00				18.86	22.03	< 30.00
1777.50				18.68	21.85	< 30.00
1712.50	5	1	12	18.61	21.78	< 30.00
1745.00				18.54	21.71	< 30.00
1777.50				18.52	21.69	< 30.00
1712.50	5	1	24	18.65	21.82	< 30.00
1745.00				18.63	21.80	< 30.00
1777.50				18.50	21.67	< 30.00
1712.50	5	25	0	18.49	21.66	< 30.00
1745.00				18.56	21.73	< 30.00
1777.50				18.55	21.72	< 30.00
1715.00	10	1	0	18.60	21.77	< 30.00
1745.00				18.61	21.78	< 30.00
1775.00				18.77	21.94	< 30.00
1715.00	10	1	24	18.79	21.96	< 30.00
1745.00				18.64	21.81	< 30.00
1775.00				18.70	21.87	< 30.00
1715.00	10	1	49	18.62	21.79	< 30.00
1745.00				18.76	21.93	< 30.00
1775.00				18.43	21.60	< 30.00
1715.00	10	50	0	18.44	21.61	< 30.00
1745.00				18.52	21.69	< 30.00
1775.00				18.63	21.80	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
1717.50	15	1	0	18.49	21.66	< 30.00
1745.00				18.50	21.67	< 30.00
1772.50				18.56	21.73	< 30.00
1717.50	15	1	37	18.52	21.69	< 30.00
1745.00				18.69	21.86	< 30.00
1772.50				18.56	21.73	< 30.00
1717.50	15	1	74	18.73	21.90	< 30.00
1745.00				18.75	21.92	< 30.00
1772.50				18.90	22.07	< 30.00
1717.50	15	75	0	18.40	21.57	< 30.00
1745.00				18.41	21.58	< 30.00
1772.50				18.50	21.67	< 30.00
1720.00	20	1	0	18.57	21.74	< 30.00
1745.00				18.59	21.76	< 30.00
1770.00				18.80	21.97	< 30.00
1720.00	20	1	49	18.57	21.74	< 30.00
1745.00				18.74	21.91	< 30.00
1770.00				18.54	21.71	< 30.00
1720.00	20	1	99	18.64	21.81	< 30.00
1745.00				18.67	21.84	< 30.00
1770.00				18.58	21.75	< 30.00
1720.00	20	100	0	18.47	21.64	< 30.00
1745.00				18.32	21.49	< 30.00
1770.00				18.52	21.69	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						



Test Report No.: PSU-NQN2502170213RF04

LTE Band 38/41

MAX Power

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
2680	20	1	0	23.50	26.14	< 33.01
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2687.5	5	1	12	23.71	26.35	< 33.01
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2680	20	1	0	23.52	26.16	< 33.01
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502170213RF04

Power

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
2498.50	5	1	0	22.95	25.59	< 33.01
2593.00				23.21	25.85	< 33.01
2687.50				23.42	26.06	< 33.01
2498.50	5	1	12	22.98	25.62	< 33.01
2593.00				23.28	25.92	< 33.01
2687.50				23.45	26.09	< 33.01
2498.50	5	1	24	22.91	25.55	< 33.01
2593.00				23.16	25.80	< 33.01
2687.50				23.30	25.94	< 33.01
2498.50	5	25	0	23.06	25.70	< 33.01
2593.00				23.30	25.94	< 33.01
2687.50				23.45	26.09	< 33.01
2501.00	10	1	0	22.95	25.59	< 33.01
2593.00				23.29	25.93	< 33.01
2685.00				23.12	25.76	< 33.01
2501.00	10	1	24	23.06	25.70	< 33.01
2593.00				23.27	25.91	< 33.01
2685.00				23.44	26.08	< 33.01
2501.00	10	1	49	23.30	25.94	< 33.01
2593.00				22.98	25.62	< 33.01
2685.00				23.17	25.81	< 33.01
2501.00	10	50	0	23.45	26.09	< 33.01
2593.00				23.07	25.71	< 33.01
2685.00				23.34	25.98	< 33.01

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
2503.50	15	1	0	23.12	25.76	< 33.01
2593.00				22.91	25.55	< 33.01
2682.50				23.30	25.94	< 33.01
2503.50	15	1	37	23.44	26.08	< 33.01
2593.00				22.99	25.63	< 33.01
2682.50				23.21	25.85	< 33.01
2503.50	15	1	74	23.18	25.82	< 33.01
2593.00				22.97	25.61	< 33.01
2682.50				23.11	25.75	< 33.01
2503.50	15	75	0	23.38	26.02	< 33.01
2593.00				23.03	25.67	< 33.01
2682.50				23.16	25.80	< 33.01
2506.00	20	1	0	23.09	25.73	< 33.01
2593.00				23.03	25.67	< 33.01
2680.00				23.50	26.14	< 33.01
2506.00	20	1	49	23.41	26.05	< 33.01
2593.00				23.02	25.66	< 33.01
2680.00				23.25	25.89	< 33.01
2506.00	20	1	99	23.39	26.03	< 33.01
2593.00				23.03	25.67	< 33.01
2680.00				23.14	25.78	< 33.01
2506.00	20	100	0	23.18	25.82	< 33.01
2593.00				23.03	25.67	< 33.01
2680.00				23.19	25.83	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2498.50	5	1	0	23.26	25.90	< 33.01
2593.00				23.43	26.07	< 33.01
2687.50				23.67	26.31	< 33.01
2498.50	5	1	12	23.11	25.75	< 33.01
2593.00				23.58	26.22	< 33.01
2687.50				23.71	26.35	< 33.01
2498.50	5	1	24	23.19	25.83	< 33.01
2593.00				23.42	26.06	< 33.01
2687.50				23.59	26.23	< 33.01
2498.50	5	25	0	22.04	24.68	< 33.01
2593.00				22.35	24.99	< 33.01
2687.50				22.41	25.05	< 33.01
2501.00	10	1	0	23.67	26.31	< 33.01
2593.00				23.03	25.67	< 33.01
2685.00				23.60	26.24	< 33.01
2501.00	10	1	24	23.71	26.35	< 33.01
2593.00				23.16	25.80	< 33.01
2685.00				23.35	25.99	< 33.01
2501.00	10	1	49	23.59	26.23	< 33.01
2593.00				23.04	25.68	< 33.01
2685.00				23.34	25.98	< 33.01
2501.00	10	50	0	22.41	25.05	< 33.01
2593.00				22.07	24.71	< 33.01
2685.00				22.35	24.99	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2503.50	15	1	0	23.41	26.05	< 33.01
2593.00				22.91	25.55	< 33.01
2682.50				23.58	26.22	< 33.01
2503.50	15	1	37	23.70	26.34	< 33.01
2593.00				23.06	25.70	< 33.01
2682.50				23.21	25.85	< 33.01
2503.50	15	1	74	23.37	26.01	< 33.01
2593.00				23.23	25.87	< 33.01
2682.50				23.22	25.86	< 33.01
2503.50	15	75	0	22.33	24.97	< 33.01
2593.00				21.94	24.58	< 33.01
2682.50				22.17	24.81	< 33.01
2506.00	20	1	0	23.05	25.69	< 33.01
2593.00				23.00	25.64	< 33.01
2680.00				23.52	26.16	< 33.01
2506.00	20	1	49	23.48	26.12	< 33.01
2593.00				23.01	25.65	< 33.01
2680.00				23.28	25.92	< 33.01
2506.00	20	1	99	23.45	26.09	< 33.01
2593.00				23.13	25.77	< 33.01
2680.00				23.14	25.78	< 33.01
2506.00	20	100	0	22.25	24.89	< 33.01
2593.00				22.01	24.65	< 33.01
2680.00				22.21	24.85	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
2498.50	5	1	0	22.34	24.98	< 33.01
2593.00				22.40	25.04	< 33.01
2687.50				22.47	25.11	< 33.01
2498.50	5	1	12	22.08	24.72	< 33.01
2593.00				22.43	25.07	< 33.01
2687.50				22.70	25.34	< 33.01
2498.50	5	1	24	21.98	24.62	< 33.01
2593.00				22.45	25.09	< 33.01
2687.50				22.43	25.07	< 33.01
2498.50	5	25	0	21.04	23.68	< 33.01
2593.00				21.35	23.99	< 33.01
2687.50				21.42	24.06	< 33.01
2501.00	10	1	0	21.95	24.59	< 33.01
2593.00				22.38	25.02	< 33.01
2685.00				22.10	24.74	< 33.01
2501.00	10	1	24	22.06	24.70	< 33.01
2593.00				22.50	25.14	< 33.01
2685.00				22.78	25.42	< 33.01
2501.00	10	1	49	22.22	24.86	< 33.01
2593.00				22.20	24.84	< 33.01
2685.00				22.30	24.94	< 33.01
2501.00	10	50	0	21.09	23.73	< 33.01
2593.00				21.38	24.02	< 33.01
2685.00				21.36	24.00	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
2503.50	15	1	0	21.95	24.59	< 33.01
2593.00				22.46	25.10	< 33.01
2682.50				22.12	24.76	< 33.01
2503.50	15	1	37	21.80	24.44	< 33.01
2593.00				22.16	24.80	< 33.01
2682.50				22.47	25.11	< 33.01
2503.50	15	1	74	21.84	24.48	< 33.01
2593.00				22.08	24.72	< 33.01
2682.50				22.45	25.09	< 33.01
2503.50	15	75	0	20.96	23.60	< 33.01
2593.00				21.24	23.88	< 33.01
2682.50				21.20	23.84	< 33.01
2506.00	20	1	0	21.88	24.52	< 33.01
2593.00				22.38	25.02	< 33.01
2680.00				22.01	24.65	< 33.01
2506.00	20	1	49	22.14	24.78	< 33.01
2593.00				22.14	24.78	< 33.01
2680.00				22.50	25.14	< 33.01
2506.00	20	1	99	21.89	24.53	< 33.01
2593.00				22.01	24.65	< 33.01
2680.00				22.14	24.78	< 33.01
2506.00	20	100	0	21.00	23.64	< 33.01
2593.00				21.19	23.83	< 33.01
2680.00				21.22	23.86	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
2498.50	5	1	0	19.25	21.89	< 33.01
2593.00				19.38	22.02	< 33.01
2687.50				19.46	22.10	< 33.01
2498.50	5	1	12	19.39	22.03	< 33.01
2593.00				19.55	22.19	< 33.01
2687.50				19.60	22.24	< 33.01
2498.50	5	1	24	19.03	21.67	< 33.01
2593.00				19.24	21.88	< 33.01
2687.50				19.52	22.16	< 33.01
2498.50	5	25	0	19.06	21.70	< 33.01
2593.00				19.31	21.95	< 33.01
2687.50				19.45	22.09	< 33.01
2501.00	10	1	0	19.08	21.72	< 33.01
2593.00				19.30	21.94	< 33.01
2685.00				19.30	21.94	< 33.01
2501.00	10	1	24	19.26	21.90	< 33.01
2593.00				19.52	22.16	< 33.01
2685.00				19.74	22.38	< 33.01
2501.00	10	1	49	19.00	21.64	< 33.01
2593.00				19.18	21.82	< 33.01
2685.00				19.47	22.11	< 33.01
2501.00	10	50	0	19.13	21.77	< 33.01
2593.00				19.34	21.98	< 33.01
2685.00				19.36	22.00	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
2503.50	15	1	0	19.11	21.75	< 33.01
2593.00				19.32	21.96	< 33.01
2682.50				18.98	21.62	< 33.01
2503.50	15	1	37	19.01	21.65	< 33.01
2593.00				19.22	21.86	< 33.01
2682.50				19.56	22.20	< 33.01
2503.50	15	1	74	19.08	21.72	< 33.01
2593.00				19.17	21.81	< 33.01
2682.50				19.33	21.97	< 33.01
2503.50	15	75	0	18.97	21.61	< 33.01
2593.00				19.18	21.82	< 33.01
2682.50				19.20	21.84	< 33.01
2506.00	20	1	0	19.13	21.77	< 33.01
2593.00				19.36	22.00	< 33.01
2680.00				19.00	21.64	< 33.01
2506.00	20	1	49	19.08	21.72	< 33.01
2593.00				19.22	21.86	< 33.01
2680.00				19.47	22.11	< 33.01
2506.00	20	1	99	19.12	21.76	< 33.01
2593.00				19.23	21.87	< 33.01
2680.00				19.33	21.97	< 33.01
2506.00	20	100	0	18.97	21.61	< 33.01
2593.00				19.18	21.82	< 33.01
2680.00				19.31	21.95	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						



Test Report No.: PSU-NQN2502170213RF04

LTE Band 38/41_HPUE

MAX Power

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
2687.5	5	1	12	26.41	29.05	< 33.01
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2593	20	1	49	26.33	28.97	< 33.01
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2680	20	1	49	25.67	28.31	< 33.01
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502170213RF04

Power

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
2498.50	5	1	0	25.44	28.08	< 33.01
2593.00				26.34	28.98	< 33.01
2687.50				26.23	28.87	< 33.01
2498.50	5	1	12	25.58	28.22	< 33.01
2593.00				26.37	29.01	< 33.01
2687.50				26.41	29.05	< 33.01
2498.50	5	1	24	25.58	28.22	< 33.01
2593.00				26.28	28.92	< 33.01
2687.50				26.28	28.92	< 33.01
2498.50	5	25	0	24.61	27.25	< 33.01
2593.00				25.35	27.99	< 33.01
2687.50				25.31	27.95	< 33.01
2501.00	10	1	0	25.28	27.92	< 33.01
2593.00				26.28	28.92	< 33.01
2685.00				25.89	28.53	< 33.01
2501.00	10	1	24	25.76	28.40	< 33.01
2593.00				26.27	28.91	< 33.01
2685.00				26.26	28.90	< 33.01
2501.00	10	1	49	25.98	28.62	< 33.01
2593.00				26.21	28.85	< 33.01
2685.00				25.95	28.59	< 33.01
2501.00	10	50	0	24.95	27.59	< 33.01
2593.00				25.37	28.01	< 33.01
2685.00				25.22	27.86	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
2503.50	15	1	0	25.16	27.80	< 33.01
2593.00				26.13	28.77	< 33.01
2682.50				25.66	28.30	< 33.01
2503.50	15	1	37	25.96	28.60	< 33.01
2593.00				26.15	28.79	< 33.01
2682.50				26.16	28.80	< 33.01
2503.50	15	1	74	25.98	28.62	< 33.01
2593.00				26.08	28.72	< 33.01
2682.50				26.09	28.73	< 33.01
2503.50	15	75	0	25.09	27.73	< 33.01
2593.00				25.18	27.82	< 33.01
2682.50				25.11	27.75	< 33.01
2506.00	20	1	0	25.46	28.10	< 33.01
2593.00				26.27	28.91	< 33.01
2680.00				25.68	28.32	< 33.01
2506.00	20	1	49	26.12	28.76	< 33.01
2593.00				26.33	28.97	< 33.01
2680.00				26.23	28.87	< 33.01
2506.00	20	1	99	26.24	28.88	< 33.01
2593.00				26.18	28.82	< 33.01
2680.00				26.10	28.74	< 33.01
2506.00	20	100	0	25.15	27.79	< 33.01
2593.00				25.22	27.86	< 33.01
2680.00				25.16	27.80	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2498.50	5	1	0	24.54	27.18	< 33.01
2593.00				25.55	28.19	< 33.01
2687.50				25.44	28.08	< 33.01
2498.50	5	1	12	24.75	27.39	< 33.01
2593.00				25.55	28.19	< 33.01
2687.50				25.57	28.21	< 33.01
2498.50	5	1	24	24.77	27.41	< 33.01
2593.00				25.52	28.16	< 33.01
2687.50				25.47	28.11	< 33.01
2498.50	5	25	0	23.65	26.29	< 33.01
2593.00				24.36	27.00	< 33.01
2687.50				24.33	26.97	< 33.01
2501.00	10	1	0	24.55	27.19	< 33.01
2593.00				25.43	28.07	< 33.01
2685.00				25.19	27.83	< 33.01
2501.00	10	1	24	24.97	27.61	< 33.01
2593.00				25.21	27.85	< 33.01
2685.00				25.47	28.11	< 33.01
2501.00	10	1	49	25.18	27.82	< 33.01
2593.00				25.33	27.97	< 33.01
2685.00				25.21	27.85	< 33.01
2501.00	10	50	0	23.96	26.60	< 33.01
2593.00				24.37	27.01	< 33.01
2685.00				24.25	26.89	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
16QAM						
2503.50	15	1	0	24.40	27.04	< 33.01
2593.00				25.44	28.08	< 33.01
2682.50				25.14	27.78	< 33.01
2503.50	15	1	37	25.29	27.93	< 33.01
2593.00				25.53	28.17	< 33.01
2682.50				25.54	28.18	< 33.01
2503.50	15	1	74	25.28	27.92	< 33.01
2593.00				25.42	28.06	< 33.01
2682.50				25.49	28.13	< 33.01
2503.50	15	75	0	24.17	26.81	< 33.01
2593.00				24.22	26.86	< 33.01
2682.50				24.14	26.78	< 33.01
2506.00	20	1	0	24.64	27.28	< 33.01
2593.00				25.47	28.11	< 33.01
2680.00				24.92	27.56	< 33.01
2506.00	20	1	49	25.45	28.09	< 33.01
2593.00				25.56	28.20	< 33.01
2680.00				25.67	28.31	< 33.01
2506.00	20	1	99	25.48	28.12	< 33.01
2593.00				25.41	28.05	< 33.01
2680.00				25.20	27.84	< 33.01
2506.00	20	100	0	24.17	26.81	< 33.01
2593.00				24.22	26.86	< 33.01
2680.00				24.19	26.83	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
2498.50	5	1	0	23.47	26.11	< 33.01
2593.00				24.41	27.05	< 33.01
2687.50				24.45	27.09	< 33.01
2498.50	5	1	12	23.93	26.57	< 33.01
2593.00				24.24	26.88	< 33.01
2687.50				24.21	26.85	< 33.01
2498.50	5	1	24	23.94	26.58	< 33.01
2593.00				24.49	27.13	< 33.01
2687.50				24.52	27.16	< 33.01
2498.50	5	25	0	22.68	25.32	< 33.01
2593.00				23.33	25.97	< 33.01
2687.50				23.34	25.98	< 33.01
2501.00	10	1	0	23.79	26.43	< 33.01
2593.00				24.38	27.02	< 33.01
2685.00				24.29	26.93	< 33.01
2501.00	10	1	24	23.95	26.59	< 33.01
2593.00				24.37	27.01	< 33.01
2685.00				24.20	26.84	< 33.01
2501.00	10	1	49	24.44	27.08	< 33.01
2593.00				24.16	26.80	< 33.01
2685.00				24.15	26.79	< 33.01
2501.00	10	50	0	22.98	25.62	< 33.01
2593.00				23.35	25.99	< 33.01
2685.00				23.24	25.88	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
2503.50	15	1	0	23.51	26.15	< 33.01
2593.00				24.34	26.98	< 33.01
2682.50				24.25	26.89	< 33.01
2503.50	15	1	37	24.19	26.83	< 33.01
2593.00				24.12	26.76	< 33.01
2682.50				24.76	27.40	< 33.01
2503.50	15	1	74	24.54	27.18	< 33.01
2593.00				24.47	27.11	< 33.01
2682.50				24.15	26.79	< 33.01
2503.50	15	75	0	23.18	25.82	< 33.01
2593.00				23.21	25.85	< 33.01
2682.50				23.15	25.79	< 33.01
2506.00	20	1	0	23.65	26.29	< 33.01
2593.00				24.27	26.91	< 33.01
2680.00				23.87	26.51	< 33.01
2506.00	20	1	49	24.27	26.91	< 33.01
2593.00				24.52	27.16	< 33.01
2680.00				24.56	27.20	< 33.01
2506.00	20	1	99	24.37	27.01	< 33.01
2593.00				24.47	27.11	< 33.01
2680.00				24.26	26.90	< 33.01
2506.00	20	100	0	23.29	25.93	< 33.01
2593.00				23.24	25.88	< 33.01
2680.00				23.16	25.80	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
2498.50	5	1	0	21.43	24.07	< 33.01
2593.00				21.46	24.10	< 33.01
2687.50				21.42	24.06	< 33.01
2498.50	5	1	12	21.54	24.18	< 33.01
2593.00				21.54	24.18	< 33.01
2687.50				21.61	24.25	< 33.01
2498.50	5	1	24	21.47	24.11	< 33.01
2593.00				21.43	24.07	< 33.01
2687.50				21.38	24.02	< 33.01
2498.50	5	25	0	21.34	23.98	< 33.01
2593.00				21.32	23.96	< 33.01
2687.50				21.26	23.90	< 33.01
2501.00	10	1	0	21.42	24.06	< 33.01
2593.00				21.32	23.96	< 33.01
2685.00				20.98	23.62	< 33.01
2501.00	10	1	24	21.48	24.12	< 33.01
2593.00				21.45	24.09	< 33.01
2685.00				21.33	23.97	< 33.01
2501.00	10	1	49	21.32	23.96	< 33.01
2593.00				21.52	24.16	< 33.01
2685.00				21.06	23.70	< 33.01
2501.00	10	50	0	21.37	24.01	< 33.01
2593.00				21.32	23.96	< 33.01
2685.00				21.22	23.86	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
256QAM						
2503.50	15	1	0	21.14	23.78	< 33.01
2593.00				21.22	23.86	< 33.01
2682.50				20.91	23.55	< 33.01
2503.50	15	1	37	21.28	23.92	< 33.01
2593.00				21.44	24.08	< 33.01
2682.50				21.38	24.02	< 33.01
2503.50	15	1	74	21.33	23.97	< 33.01
2593.00				21.32	23.96	< 33.01
2682.50				21.28	23.92	< 33.01
2503.50	15	75	0	21.22	23.86	< 33.01
2593.00				21.19	23.83	< 33.01
2682.50				21.14	23.78	< 33.01
2506.00	20	1	0	21.37	24.01	< 33.01
2593.00				21.37	24.01	< 33.01
2680.00				20.93	23.57	< 33.01
2506.00	20	1	49	21.42	24.06	< 33.01
2593.00				21.43	24.07	< 33.01
2680.00				21.42	24.06	< 33.01
2506.00	20	1	99	21.53	24.17	< 33.01
2593.00				21.34	23.98	< 33.01
2680.00				21.41	24.05	< 33.01
2506.00	20	100	0	21.27	23.91	< 33.01
2593.00				21.20	23.84	< 33.01
2680.00				21.13	23.77	< 33.01
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						



Test Report No.: PSU-NQN2502170213RF04

LTE Band CA_66B

MAX Power

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1713	1772.5	5+15	P_1@12	S_0@0	23.65	26.82	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1715	1775	10+10	P_1@49	S_0@0	23.65	26.82	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1717.5	1777	15+5	P_1@0	S_0@0	22.88	26.05	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1715	1775	10+10	P_1@0	S_0@0	22.82	25.99	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502170213RF04

Power

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1712.5	1717.3	5+5	P_1@0	S_0@0	23.07	26.24	< 30.00
1752.6	1757.4				23.48	26.65	< 30.00
1772.7	1777.5				23.12	26.29	< 30.00
1712.5	1717.3		P_1@12	S_0@0	23.41	26.58	< 30.00
1752.6	1757.4				23.57	26.74	< 30.00
1772.7	1777.5				23.21	26.38	< 30.00
1712.5	1717.3		P_1@24	S_0@0	23.22	26.39	< 30.00
1752.6	1757.4				23.48	26.65	< 30.00
1772.7	1777.5				23.15	26.32	< 30.00
1712.5	1717.3		P_25@0	S_25@0	22.08	25.25	< 30.00
1752.6	1757.4				22.36	25.53	< 30.00
1772.7	1777.5				22.32	25.49	< 30.00
1712.8	1720.0	5+10	P_1@0	S_0@0	23.40	26.57	< 30.00
1750.3	1757.5				23.28	26.45	< 30.00
1767.8	1775.0				22.92	26.09	< 30.00
1712.8	1720.0		P_1@38	S_0@0	23.52	26.69	< 30.00
1750.3	1757.5				23.45	26.62	< 30.00
1767.8	1775.0				22.91	26.08	< 30.00
1712.8	1720.0		P_1@74	S_0@0	23.10	26.27	< 30.00
1750.3	1757.5				23.37	26.54	< 30.00
1767.8	1775.0				22.98	26.15	< 30.00
1712.8	1720.0		P_25@0	S_50@0	21.88	25.05	< 30.00
1750.3	1757.5				22.22	25.39	< 30.00
1767.8	1775.0				21.13	24.30	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1715.0	1722.2	10+5	P_1@0	S_0@0	23.06	26.23	< 30.00
1752.5	1759.7				23.35	26.52	< 30.00
1770.0	1777.2				22.74	25.91	< 30.00
1715.0	1722.2		P_1@25	S_0@0	23.16	26.33	< 30.00
1752.5	1759.7				23.32	26.49	< 30.00
1770.0	1777.2				22.78	25.95	< 30.00
1715.0	1722.2		P_1@49	S_0@0	23.08	26.25	< 30.00
1752.5	1759.7				23.11	26.28	< 30.00
1770.0	1777.2				23.10	26.27	< 30.00
1715.0	1722.2		P_50@0	S_25@0	21.99	25.16	< 30.00
1752.5	1759.7				22.17	25.34	< 30.00
1770.0	1777.2				21.04	24.21	< 30.00
1713.0	1722.3	5+15	P_1@0	S_0@0	23.28	26.45	< 30.00
1748.1	1757.4				23.59	26.76	< 30.00
1763.2	1772.5				22.99	26.16	< 30.00
1713.0	1722.3		P_1@12	S_0@0	23.65	26.82	< 30.00
1748.1	1757.4				23.61	26.78	< 30.00
1763.2	1772.5				23.26	26.43	< 30.00
1713.0	1722.3		P_1@24	S_0@0	23.65	26.82	< 30.00
1748.1	1757.4				23.59	26.76	< 30.00
1763.2	1772.5				22.58	25.75	< 30.00
1713.0	1722.3		P_25@0	S_75@0	22.19	25.36	< 30.00
1748.1	1757.4				22.29	25.46	< 30.00
1763.2	1772.5				21.66	24.83	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1717.5	1726.8	15+5	P_1@0	S_0@0	23.35	26.52	< 30.00
1752.6	1761.9				23.55	26.72	< 30.00
1767.7	1777.0				22.68	25.85	< 30.00
1717.5	1726.8		P_1@38	S_0@0	23.41	26.58	< 30.00
1752.6	1761.9				23.55	26.72	< 30.00
1767.7	1777.0				22.66	25.83	< 30.00
1717.5	1726.8		P_1@74	S_0@0	23.41	26.58	< 30.00
1752.6	1761.9				22.68	25.85	< 30.00
1767.7	1777.0				23.02	26.19	< 30.00
1717.5	1726.8		P_75@0	S_100@0	22.52	25.69	< 30.00
1752.6	1761.9				22.32	25.49	< 30.00
1767.7	1777.0				21.02	24.19	< 30.00
1715.0	1724.9	10+10	P_1@0	S_0@0	23.51	26.68	< 30.00
1750.1	1760.0				23.42	26.59	< 30.00
1765.1	1775.0				22.85	26.02	< 30.00
1715.0	1724.9		P_1@24	S_0@0	23.48	26.65	< 30.00
1750.1	1760.0				23.46	26.63	< 30.00
1765.1	1775.0				22.76	25.93	< 30.00
1715.0	1724.9		P_1@49	S_0@0	23.39	26.56	< 30.00
1750.1	1760.0				23.65	26.82	< 30.00
1765.1	1775.0				22.99	26.16	< 30.00
1715.0	1724.9		P_100@	S_75@0	22.28	25.45	< 30.00
1750.1	1760.0				22.32	25.49	< 30.00
1765.1	1775.0				20.91	24.08	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1712.5	1717.3	5+5	P_1@0	S_0@0	22.39	25.56	< 30.00
1752.6	1757.4				22.59	25.76	< 30.00
1772.7	1777.5				22.32	25.49	< 30.00
1712.5	1717.3		P_1@12	S_0@0	22.66	25.83	< 30.00
1752.6	1757.4				22.98	26.15	< 30.00
1772.7	1777.5				22.38	25.55	< 30.00
1712.5	1717.3		P_1@24	S_0@0	22.62	25.79	< 30.00
1752.6	1757.4				22.61	25.78	< 30.00
1772.7	1777.5				22.22	25.39	< 30.00
1712.5	1717.3		P_25@0	S_25@0	21.12	24.29	< 30.00
1752.6	1757.4				21.38	24.55	< 30.00
1772.7	1777.5				21.37	24.54	< 30.00
1712.8	1720.0	5+10	P_1@0	S_0@0	22.37	25.54	< 30.00
1750.3	1757.5				22.77	25.94	< 30.00
1767.8	1775.0				22.07	25.24	< 30.00
1712.8	1720.0		P_1@38	S_0@0	22.51	25.68	< 30.00
1750.3	1757.5				22.73	25.90	< 30.00
1767.8	1775.0				22.31	25.48	< 30.00
1712.8	1720.0		P_1@74	S_0@0	22.49	25.66	< 30.00
1750.3	1757.5				22.58	25.75	< 30.00
1767.8	1775.0				22.11	25.28	< 30.00
1712.8	1720.0		P_25@0	S_50@0	20.96	24.13	< 30.00
1750.3	1757.5				21.24	24.41	< 30.00
1767.8	1775.0				20.12	23.29	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1715.0	1722.2	10+5	P_1@0	S_0@0	22.19	25.36	< 30.00
1752.5	1759.7				22.58	25.75	< 30.00
1770.0	1777.2				21.96	25.13	< 30.00
1715.0	1722.2		P_1@25	S_0@0	22.47	25.64	< 30.00
1752.5	1759.7				22.65	25.82	< 30.00
1770.0	1777.2				22.09	25.26	< 30.00
1715.0	1722.2		P_1@49	S_0@0	22.21	25.38	< 30.00
1752.5	1759.7				22.36	25.53	< 30.00
1770.0	1777.2				22.28	25.45	< 30.00
1715.0	1722.2		P_50@0	S_25@0	21.02	24.19	< 30.00
1752.5	1759.7				21.21	24.38	< 30.00
1770.0	1777.2				20.02	23.19	< 30.00
1713.0	1722.3	5+15	P_1@0	S_0@0	22.74	25.91	< 30.00
1748.1	1757.4				22.81	25.98	< 30.00
1763.2	1772.5				22.06	25.23	< 30.00
1713.0	1722.3		P_1@12	S_0@0	22.64	25.81	< 30.00
1748.1	1757.4				22.73	25.90	< 30.00
1763.2	1772.5				22.54	25.71	< 30.00
1713.0	1722.3		P_1@24	S_0@0	22.49	25.66	< 30.00
1748.1	1757.4				22.76	25.93	< 30.00
1763.2	1772.5				21.92	25.09	< 30.00
1713.0	1722.3		P_25@0	S_75@0	21.21	24.38	< 30.00
1748.1	1757.4				21.31	24.48	< 30.00
1763.2	1772.5				20.71	23.88	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1717.5	1726.8	15+5	P_1@0	S_0@0	22.82	25.99	< 30.00
1752.6	1761.9				22.88	26.05	< 30.00
1767.7	1777.0				22.10	25.27	< 30.00
1717.5	1726.8		P_1@38	S_0@0	22.56	25.73	< 30.00
1752.6	1761.9				22.84	26.01	< 30.00
1767.7	1777.0				22.15	25.32	< 30.00
1717.5	1726.8		P_1@74	S_0@0	22.57	25.74	< 30.00
1752.6	1761.9				21.97	25.14	< 30.00
1767.7	1777.0				22.30	25.47	< 30.00
1717.5	1726.8		P_75@0	S_100@0	21.28	24.45	< 30.00
1752.6	1761.9				21.33	24.50	< 30.00
1767.7	1777.0				19.95	23.12	< 30.00
1715.0	1724.9	10+10	P_1@0	S_0@0	22.74	25.91	< 30.00
1750.1	1760.0				22.82	25.99	< 30.00
1765.1	1775.0				22.04	25.21	< 30.00
1715.0	1724.9		P_1@24	S_0@0	22.65	25.82	< 30.00
1750.1	1760.0				22.74	25.91	< 30.00
1765.1	1775.0				22.28	25.45	< 30.00
1715.0	1724.9		P_1@49	S_0@0	22.62	25.79	< 30.00
1750.1	1760.0				22.74	25.91	< 30.00
1765.1	1775.0				22.34	25.51	< 30.00
1715.0	1724.9		P_100@	S_75@0	21.31	24.48	< 30.00
1750.1	1760.0				21.35	24.52	< 30.00
1765.1	1775.0				19.93	23.10	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1712.5	1717.3	5+5	P_1@0	S_0@0	21.45	24.62	< 30.00
1752.6	1757.4				21.62	24.79	< 30.00
1772.7	1777.5				21.52	24.69	< 30.00
1712.5	1717.3		P_1@12	S_0@0	21.67	24.84	< 30.00
1752.6	1757.4				21.92	25.09	< 30.00
1772.7	1777.5				21.82	24.99	< 30.00
1712.5	1717.3		P_1@24	S_0@0	21.49	24.66	< 30.00
1752.6	1757.4				21.76	24.93	< 30.00
1772.7	1777.5				21.39	24.56	< 30.00
1712.5	1717.3		P_25@0	S_25@0	21.11	24.28	< 30.00
1752.6	1757.4				20.81	23.98	< 30.00
1772.7	1777.5				19.39	22.56	< 30.00
1712.8	1720.0	5+10	P_1@0	S_0@0	21.36	24.53	< 30.00
1750.3	1757.5				21.67	24.84	< 30.00
1767.8	1775.0				21.24	24.41	< 30.00
1712.8	1720.0		P_1@38	S_0@0	21.46	24.63	< 30.00
1750.3	1757.5				21.76	24.93	< 30.00
1767.8	1775.0				21.26	24.43	< 30.00
1712.8	1720.0		P_1@74	S_0@0	21.43	24.60	< 30.00
1750.3	1757.5				21.65	24.82	< 30.00
1767.8	1775.0				21.36	24.53	< 30.00
1712.8	1720.0		P_25@0	S_50@0	20.94	24.11	< 30.00
1750.3	1757.5				21.18	24.35	< 30.00
1767.8	1775.0				19.06	22.23	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1715.0	1722.2	10+5	P_1@0	S_0@0	21.48	24.65	< 30.00
1752.5	1759.7				21.68	24.85	< 30.00
1770.0	1777.2				21.08	24.25	< 30.00
1715.0	1722.2		P_1@25	S_0@0	21.56	24.73	< 30.00
1752.5	1759.7				21.61	24.78	< 30.00
1770.0	1777.2				21.24	24.41	< 30.00
1715.0	1722.2		P_1@49	S_0@0	21.67	24.84	< 30.00
1752.5	1759.7				21.40	24.57	< 30.00
1770.0	1777.2				21.41	24.58	< 30.00
1715.0	1722.2		P_50@0	S_25@0	20.96	24.13	< 30.00
1752.5	1759.7				20.56	23.73	< 30.00
1770.0	1777.2				19.07	22.24	< 30.00
1713.0	1722.3	5+15	P_1@0	S_0@0	21.72	24.89	< 30.00
1748.1	1757.4				21.57	24.74	< 30.00
1763.2	1772.5				21.21	24.38	< 30.00
1713.0	1722.3		P_1@12	S_0@0	21.75	24.92	< 30.00
1748.1	1757.4				21.83	25.00	< 30.00
1763.2	1772.5				21.49	24.66	< 30.00
1713.0	1722.3		P_1@24	S_0@0	21.74	24.91	< 30.00
1748.1	1757.4				21.71	24.88	< 30.00
1763.2	1772.5				20.94	24.11	< 30.00
1713.0	1722.3		P_25@0	S_75@0	21.24	24.41	< 30.00
1748.1	1757.4				21.16	24.33	< 30.00
1763.2	1772.5				19.85	23.02	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1717.5	1726.8	15+5	P_1@0	S_0@0	21.84	25.01	< 30.00
1752.6	1761.9				21.93	25.10	< 30.00
1767.7	1777.0				20.97	24.14	< 30.00
1717.5	1726.8		P_1@38	S_0@0	21.94	25.11	< 30.00
1752.6	1761.9				21.76	24.93	< 30.00
1767.7	1777.0				21.07	24.24	< 30.00
1717.5	1726.8		P_1@74	S_0@0	21.77	24.94	< 30.00
1752.6	1761.9				21.00	24.17	< 30.00
1767.7	1777.0				21.39	24.56	< 30.00
1717.5	1726.8		P_75@0	S_100@0	20.74	23.91	< 30.00
1752.6	1761.9				20.42	23.59	< 30.00
1767.7	1777.0				18.95	22.12	< 30.00
1715.0	1724.9	10+10	P_1@0	S_0@0	21.89	25.06	< 30.00
1750.1	1760.0				21.71	24.88	< 30.00
1765.1	1775.0				21.24	24.41	< 30.00
1715.0	1724.9		P_1@24	S_0@0	21.84	25.01	< 30.00
1750.1	1760.0				21.96	25.13	< 30.00
1765.1	1775.0				20.96	24.13	< 30.00
1715.0	1724.9		P_1@49	S_0@0	21.83	25.00	< 30.00
1750.1	1760.0				21.87	25.04	< 30.00
1765.1	1775.0				21.16	24.33	< 30.00
1715.0	1724.9		P_100@	S_75@0	21.03	24.20	< 30.00
1750.1	1760.0				21.15	24.32	< 30.00
1765.1	1775.0				18.88	22.05	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1712.5	1717.3	5+5	P_1@0	S_0@0	18.37	21.54	< 30.00
1752.6	1757.4				18.62	21.79	< 30.00
1772.7	1777.5				18.46	21.63	< 30.00
1712.5	1717.3		P_1@12	S_0@0	18.73	21.90	< 30.00
1752.6	1757.4				18.96	22.13	< 30.00
1772.7	1777.5				18.63	21.80	< 30.00
1712.5	1717.3		P_1@24	S_0@0	18.57	21.74	< 30.00
1752.6	1757.4				18.68	21.85	< 30.00
1772.7	1777.5				18.42	21.59	< 30.00
1712.5	1717.3		P_25@0	S_25@0	19.10	22.27	< 30.00
1752.6	1757.4				19.33	22.50	< 30.00
1772.7	1777.5				18.39	21.56	< 30.00
1712.8	1720.0	5+10	P_1@0	S_0@0	18.36	21.53	< 30.00
1750.3	1757.5				18.64	21.81	< 30.00
1767.8	1775.0				18.21	21.38	< 30.00
1712.8	1720.0		P_1@38	S_0@0	18.38	21.55	< 30.00
1750.3	1757.5				18.83	22.00	< 30.00
1767.8	1775.0				18.42	21.59	< 30.00
1712.8	1720.0		P_1@74	S_0@0	18.41	21.58	< 30.00
1750.3	1757.5				18.63	21.80	< 30.00
1767.8	1775.0				18.11	21.28	< 30.00
1712.8	1720.0		P_25@0	S_50@0	19.02	22.19	< 30.00
1750.3	1757.5				19.22	22.39	< 30.00
1767.8	1775.0				18.14	21.31	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1715.0	1722.2	10+5	P_1@0	S_0@0	18.41	21.58	< 30.00
1752.5	1759.7				18.54	21.71	< 30.00
1770.0	1777.2				18.12	21.29	< 30.00
1715.0	1722.2		P_1@25	S_0@0	18.35	21.52	< 30.00
1752.5	1759.7				18.72	21.89	< 30.00
1770.0	1777.2				18.39	21.56	< 30.00
1715.0	1722.2		P_1@49	S_0@0	18.28	21.45	< 30.00
1752.5	1759.7				18.54	21.71	< 30.00
1770.0	1777.2				18.34	21.51	< 30.00
1715.0	1722.2		P_50@0	S_25@0	19.04	22.21	< 30.00
1752.5	1759.7				19.21	22.38	< 30.00
1770.0	1777.2				18.04	21.21	< 30.00
1713.0	1722.3	5+15	P_1@0	S_0@0	18.74	21.91	< 30.00
1748.1	1757.4				18.85	22.02	< 30.00
1763.2	1772.5				18.25	21.42	< 30.00
1713.0	1722.3		P_1@12	S_0@0	18.82	21.99	< 30.00
1748.1	1757.4				18.75	21.92	< 30.00
1763.2	1772.5				18.55	21.72	< 30.00
1713.0	1722.3		P_1@24	S_0@0	18.67	21.84	< 30.00
1748.1	1757.4				18.73	21.90	< 30.00
1763.2	1772.5				17.89	21.06	< 30.00
1713.0	1722.3		P_25@0	S_75@0	19.22	22.39	< 30.00
1748.1	1757.4				19.23	22.40	< 30.00
1763.2	1772.5				18.74	21.91	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1717.5	1726.8	15+5	P_1@0	S_0@0	18.71	21.88	< 30.00
1752.6	1761.9				18.59	21.76	< 30.00
1767.7	1777.0				18.24	21.41	< 30.00
1717.5	1726.8		P_1@38	S_0@0	18.92	22.09	< 30.00
1752.6	1761.9				18.96	22.13	< 30.00
1767.7	1777.0				18.34	21.51	< 30.00
1717.5	1726.8		P_1@74	S_0@0	18.69	21.86	< 30.00
1752.6	1761.9				18.13	21.30	< 30.00
1767.7	1777.0				18.57	21.74	< 30.00
1717.5	1726.8		P_75@0	S_100@0	19.29	22.46	< 30.00
1752.6	1761.9				19.32	22.49	< 30.00
1767.7	1777.0				17.98	21.15	< 30.00
1715.0	1724.9	10+10	P_1@0	S_0@0	18.71	21.88	< 30.00
1750.1	1760.0				18.91	22.08	< 30.00
1765.1	1775.0				18.30	21.47	< 30.00
1715.0	1724.9		P_1@24	S_0@0	18.78	21.95	< 30.00
1750.1	1760.0				18.71	21.88	< 30.00
1765.1	1775.0				18.22	21.39	< 30.00
1715.0	1724.9		P_1@49	S_0@0	18.76	21.93	< 30.00
1750.1	1760.0				18.77	21.94	< 30.00
1765.1	1775.0				18.39	21.56	< 30.00
1715.0	1724.9		P_100@	S_75@0	19.28	22.45	< 30.00
1750.1	1760.0				19.30	22.47	< 30.00
1765.1	1775.0				17.93	21.10	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							



Test Report No.: PSU-NQN2502170213RF04

LTE Band CA_66C

MAX Power

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1715.5	1770	10+20	P_1@0	S_0@0	23.46	26.63	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1720	1770	20+20	P_1@0	S_0@0	23.31	26.48	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1720	1774.5	20+10	P_1@0	S_0@0	22.68	25.85	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1720	1770	20+20	P_1@0	S_0@0	22.64	25.81	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502170213RF04

Power

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1715.3	1727.3	10+15	P_1@0	S_0@0	23.24	26.41	< 30.00
1747.9	1759.9				23.39	26.56	< 30.00
1760.5	1772.5				23.28	26.45	< 30.00
1715.3	1727.3		P_1@25	S_0@0	23.11	26.28	< 30.00
1747.9	1759.9				23.21	26.38	< 30.00
1760.5	1772.5				23.20	26.37	< 30.00
1715.3	1727.3		P_1@49	S_0@0	23.09	26.26	< 30.00
1747.9	1759.9				23.08	26.25	< 30.00
1760.5	1772.5				23.03	26.20	< 30.00
1715.3	1727.3		P_50@0	S_75@0	21.98	25.15	< 30.00
1747.9	1759.9				21.99	25.16	< 30.00
1760.5	1772.5				22.01	25.18	< 30.00
1717.5	1729.5	15+10	P_1@0	S_0@0	23.18	26.35	< 30.00
1750.1	1762.1				23.31	26.48	< 30.00
1762.7	1774.7				23.13	26.30	< 30.00
1717.5	1729.5		P_1@38	S_0@0	23.13	26.30	< 30.00
1750.1	1762.1				23.28	26.45	< 30.00
1762.7	1774.7				23.14	26.31	< 30.00
1717.5	1729.5		P_1@74	S_0@0	22.91	26.08	< 30.00
1750.1	1762.1				23.02	26.19	< 30.00
1762.7	1774.7				22.89	26.06	< 30.00
1717.5	1729.5		P_75@0	S_50@0	21.88	25.05	< 30.00
1750.1	1762.1				21.94	25.11	< 30.00
1762.7	1774.7				21.68	24.85	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1715.5	1729.9	10+20	P_1@0	S_0@0	23.28	26.45	< 30.00
1745.6	1760				23.38	26.55	< 30.00
1755.6	1770				23.46	26.63	< 30.00
1715.5	1729.9		P_1@25	S_0@0	23.21	26.38	< 30.00
1745.6	1760				23.33	26.50	< 30.00
1755.6	1770				23.25	26.42	< 30.00
1715.5	1729.9		P_1@49	S_0@0	22.99	26.16	< 30.00
1745.6	1760				23.16	26.33	< 30.00
1755.6	1770				23.18	26.35	< 30.00
1715.5	1729.9		P_50@0	S_100@0	22.02	25.19	< 30.00
1745.6	1760				22.11	25.28	< 30.00
1755.6	1770				22.13	25.30	< 30.00
1720	1734.4	20+10	P_1@0	S_0@0	23.18	26.35	< 30.00
1750.1	1764.5				23.21	26.38	< 30.00
1760.1	1774.5				23.15	26.32	< 30.00
1720	1734.4		P_1@49	S_0@0	23.08	26.25	< 30.00
1750.1	1764.5				23.07	26.24	< 30.00
1760.1	1774.5				23.08	26.25	< 30.00
1720	1734.4		P_1@99	S_0@0	23.01	26.18	< 30.00
1750.1	1764.5				23.08	26.25	< 30.00
1760.1	1774.5				22.68	25.85	< 30.00
1720	1734.4		P_100@0	S_50@0	21.92	25.09	< 30.00
1750.1	1764.5				21.89	25.06	< 30.00
1760.1	1774.5				21.86	25.03	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1717.8	1734.9	15+20	P_1@0	S_0@0	23.22	26.39	< 30.00
1745.3	1762.4				23.16	26.33	< 30.00
1752.9	1770.0				23.15	26.32	< 30.00
1717.8	1734.9		P_1@38	S_0@0	23.08	26.25	< 30.00
1745.3	1762.4				23.18	26.35	< 30.00
1752.9	1770.0				23.11	26.28	< 30.00
1717.8	1734.9		P_1@74	S_0@0	22.96	26.13	< 30.00
1745.3	1762.4				22.99	26.16	< 30.00
1752.9	1770.0				22.98	26.15	< 30.00
1717.8	1734.9		P_75@0	S_100@0	21.87	25.04	< 30.00
1745.3	1762.4				22.13	25.30	< 30.00
1752.9	1770.0				21.99	25.16	< 30.00
1720.0	1737.1	20+15	P_1@0	S_0@0	23.28	26.45	< 30.00
1747.6	1764.7				23.14	26.31	< 30.00
1755.1	1772.2				23.13	26.30	< 30.00
1720.0	1737.1		P_1@49	S_0@0	23.20	26.37	< 30.00
1747.6	1764.7				23.02	26.19	< 30.00
1755.1	1772.2				22.99	26.16	< 30.00
1720.0	1737.1		P_1@99	S_0@0	23.10	26.27	< 30.00
1747.6	1764.7				23.01	26.18	< 30.00
1755.1	1772.2				22.86	26.03	< 30.00
1720.0	1737.1		P_100@	S_75@0	21.97	25.14	< 30.00
1747.6	1764.7				21.98	25.15	< 30.00
1755.1	1772.2				21.92	25.09	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1720.0	1731.7	20+5	P_1@0	S_0@0	23.29	26.46	< 30.00
1752.5	1764.2				23.22	26.39	< 30.00
1765.0	1776.7				23.09	26.26	< 30.00
1720.0	1731.7		P_1@49	S_0@0	23.12	26.29	< 30.00
1752.5	1764.2				23.09	26.26	< 30.00
1765.0	1776.7				23.06	26.23	< 30.00
1720.0	1731.7		P_1@99	S_0@0	22.99	26.16	< 30.00
1752.5	1764.2				22.85	26.02	< 30.00
1765.0	1776.7				22.82	25.99	< 30.00
1720.0	1731.7		P_100@0	S_25@0	21.90	25.07	< 30.00
1752.5	1764.2				21.92	25.09	< 30.00
1765.0	1776.7				21.64	24.81	< 30.00
1713.3	1725.0	5+20	P_1@0	S_0@0	23.16	26.33	< 30.00
1745.8	1757.5				23.31	26.48	< 30.00
1758.3	1770.0				23.28	26.45	< 30.00
1713.3	1725.0		P_1@13	S_0@0	23.32	26.49	< 30.00
1745.8	1757.5				23.28	26.45	< 30.00
1758.3	1770.0				23.25	26.42	< 30.00
1713.3	1725.0		P_1@24	S_0@0	23.21	26.38	< 30.00
1745.8	1757.5				23.18	26.35	< 30.00
1758.3	1770.0				23.12	26.29	< 30.00
1713.3	1725.0		P_25@0	S_100@0	21.95	25.12	< 30.00
1745.8	1757.5				22.02	25.19	< 30.00
1758.3	1770.0				21.80	24.97	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
1713.3	1725.0	15+15	P_1@0	S_0@0	23.24	26.41	< 30.00
1745.8	1757.5				23.27	26.44	< 30.00
1758.3	1770.0				23.15	26.32	< 30.00
1713.3	1725.0		P_1@38	S_0@0	23.19	26.36	< 30.00
1745.8	1757.5				23.20	26.37	< 30.00
1758.3	1770.0				23.08	26.25	< 30.00
1713.3	1725.0		P_1@74	S_0@0	23.02	26.19	< 30.00
1745.8	1757.5				23.03	26.20	< 30.00
1758.3	1770.0				23.01	26.18	< 30.00
1713.3	1725.0		P_75@0	S_75@0	22.01	25.18	< 30.00
1745.8	1757.5				22.05	25.22	< 30.00
1758.3	1770.0				22.08	25.25	< 30.00
1720.0	1739.8	20+20	P_1@0	S_0@0	23.31	26.48	< 30.00
1745.1	1764.9				23.09	26.26	< 30.00
1750.2	1770.0				23.14	26.31	< 30.00
1720.0	1739.8		P_1@49	S_0@0	23.13	26.30	< 30.00
1745.1	1764.9				23.18	26.35	< 30.00
1750.2	1770.0				23.12	26.29	< 30.00
1720.0	1739.8		P_1@99	S_0@0	23.17	26.34	< 30.00
1745.1	1764.9				23.12	26.29	< 30.00
1750.2	1770.0				23.06	26.23	< 30.00
1720.0	1739.8		P_100@0	S_100@0	22.02	25.19	< 30.00
1745.1	1764.9				22.09	25.26	< 30.00
1750.2	1770.0				22.10	25.27	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1715.3	1727.3	10+15	P_1@0	S_0@0	22.39	25.56	< 30.00
1747.9	1759.9				22.52	25.69	< 30.00
1760.5	1772.5				22.44	25.61	< 30.00
1715.3	1727.3		P_1@25	S_0@0	22.46	25.63	< 30.00
1747.9	1759.9				22.43	25.60	< 30.00
1760.5	1772.5				22.48	25.65	< 30.00
1715.3	1727.3		P_1@49	S_0@0	22.25	25.42	< 30.00
1747.9	1759.9				22.38	25.55	< 30.00
1760.5	1772.5				22.25	25.42	< 30.00
1715.3	1727.3		P_50@0	S_75@0	20.99	24.16	< 30.00
1747.9	1759.9				21.04	24.21	< 30.00
1760.5	1772.5				20.77	23.94	< 30.00
1717.5	1729.5	15+10	P_1@0	S_0@0	22.48	25.65	< 30.00
1750.1	1762.1				22.56	25.73	< 30.00
1762.7	1774.7				22.42	25.59	< 30.00
1717.5	1729.5		P_1@38	S_0@0	22.22	25.39	< 30.00
1750.1	1762.1				22.55	25.72	< 30.00
1762.7	1774.7				22.45	25.62	< 30.00
1717.5	1729.5		P_1@74	S_0@0	22.07	25.24	< 30.00
1750.1	1762.1				22.39	25.56	< 30.00
1762.7	1774.7				22.26	25.43	< 30.00
1717.5	1729.5		P_75@0	S_50@0	20.89	24.06	< 30.00
1750.1	1762.1				20.99	24.16	< 30.00
1762.7	1774.7				20.89	24.06	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1715.5	1729.9	10+20	P_1@0	S_0@0	22.45	25.62	< 30.00
1745.6	1760				22.64	25.81	< 30.00
1755.6	1770				22.66	25.83	< 30.00
1715.5	1729.9		P_1@25	S_0@0	22.56	25.73	< 30.00
1745.6	1760				22.43	25.60	< 30.00
1755.6	1770				22.44	25.61	< 30.00
1715.5	1729.9		P_1@49	S_0@0	22.11	25.28	< 30.00
1745.6	1760				22.29	25.46	< 30.00
1755.6	1770				22.35	25.52	< 30.00
1715.5	1729.9		P_50@0	S_100@0	21.06	24.23	< 30.00
1745.6	1760				21.11	24.28	< 30.00
1755.6	1770				21.14	24.31	< 30.00
1720	1734.4	20+10	P_1@0	S_0@0	22.68	25.85	< 30.00
1750.1	1764.5				22.23	25.40	< 30.00
1760.1	1774.5				22.49	25.66	< 30.00
1720	1734.4		P_1@49	S_0@0	22.52	25.69	< 30.00
1750.1	1764.5				22.39	25.56	< 30.00
1760.1	1774.5				22.21	25.38	< 30.00
1720	1734.4		P_1@99	S_0@0	22.43	25.60	< 30.00
1750.1	1764.5				22.12	25.29	< 30.00
1760.1	1774.5				21.98	25.15	< 30.00
1720	1734.4		P_100@0	S_50@0	20.95	24.12	< 30.00
1750.1	1764.5				20.94	24.11	< 30.00
1760.1	1774.5				21.03	24.20	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1717.8	1734.9	15+20	P_1@0	S_0@0	22.54	25.71	< 30.00
1745.3	1762.4				22.41	25.58	< 30.00
1752.9	1770.0				22.47	25.64	< 30.00
1717.8	1734.9		P_1@38	S_0@0	22.43	25.60	< 30.00
1745.3	1762.4				22.48	25.65	< 30.00
1752.9	1770.0				22.35	25.52	< 30.00
1717.8	1734.9		P_1@74	S_0@0	22.23	25.40	< 30.00
1745.3	1762.4				22.28	25.45	< 30.00
1752.9	1770.0				22.39	25.56	< 30.00
1717.8	1734.9		P_75@0	S_100@0	20.90	24.07	< 30.00
1745.3	1762.4				21.12	24.29	< 30.00
1752.9	1770.0				20.98	24.15	< 30.00
1720.0	1737.1	20+15	P_1@0	S_0@0	22.45	25.62	< 30.00
1747.6	1764.7				22.38	25.55	< 30.00
1755.1	1772.2				22.48	25.65	< 30.00
1720.0	1737.1		P_1@49	S_0@0	22.51	25.68	< 30.00
1747.6	1764.7				22.21	25.38	< 30.00
1755.1	1772.2				22.35	25.52	< 30.00
1720.0	1737.1		P_1@99	S_0@0	22.14	25.31	< 30.00
1747.6	1764.7				22.42	25.59	< 30.00
1755.1	1772.2				22.19	25.36	< 30.00
1720.0	1737.1		P_100@	S_75@0	20.97	24.14	< 30.00
1747.6	1764.7				21.00	24.17	< 30.00
1755.1	1772.2				21.03	24.20	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1720.0	1731.7	20+5	P_1@0	S_0@0	22.24	25.41	< 30.00
1752.5	1764.2				22.34	25.51	< 30.00
1765.0	1776.7				22.57	25.74	< 30.00
1720.0	1731.7		P_1@49	S_0@0	22.41	25.58	< 30.00
1752.5	1764.2				22.25	25.42	< 30.00
1765.0	1776.7				22.39	25.56	< 30.00
1720.0	1731.7		P_1@99	S_0@0	22.34	25.51	< 30.00
1752.5	1764.2				22.08	25.25	< 30.00
1765.0	1776.7				22.06	25.23	< 30.00
1720.0	1731.7		P_100@0	S_25@0	20.82	23.99	< 30.00
1752.5	1764.2				20.96	24.13	< 30.00
1765.0	1776.7				20.62	23.79	< 30.00
1713.3	1725.0	5+20	P_1@0	S_0@0	22.49	25.66	< 30.00
1745.8	1757.5				22.33	25.50	< 30.00
1758.3	1770.0				22.44	25.61	< 30.00
1713.3	1725.0		P_1@13	S_0@0	22.38	25.55	< 30.00
1745.8	1757.5				22.54	25.71	< 30.00
1758.3	1770.0				22.56	25.73	< 30.00
1713.3	1725.0		P_1@24	S_0@0	22.28	25.45	< 30.00
1745.8	1757.5				22.44	25.61	< 30.00
1758.3	1770.0				22.47	25.64	< 30.00
1713.3	1725.0		P_25@0	S_100@0	21.02	24.19	< 30.00
1745.8	1757.5				21.06	24.23	< 30.00
1758.3	1770.0				20.89	24.06	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
1713.3	1725.0	15+15	P_1@0	S_0@0	22.52	25.69	< 30.00
1745.8	1757.5				22.56	25.73	< 30.00
1758.3	1770.0				22.44	25.61	< 30.00
1713.3	1725.0		P_1@38	S_0@0	22.36	25.53	< 30.00
1745.8	1757.5				22.44	25.61	< 30.00
1758.3	1770.0				22.27	25.44	< 30.00
1713.3	1725.0		P_1@74	S_0@0	22.32	25.49	< 30.00
1745.8	1757.5				22.27	25.44	< 30.00
1758.3	1770.0				22.29	25.46	< 30.00
1713.3	1725.0		P_75@0	S_75@0	21.02	24.19	< 30.00
1745.8	1757.5				21.06	24.23	< 30.00
1758.3	1770.0				21.12	24.29	< 30.00
1720.0	1739.8	20+20	P_1@0	S_0@0	22.64	25.81	< 30.00
1745.1	1764.9				22.51	25.68	< 30.00
1750.2	1770.0				22.24	25.41	< 30.00
1720.0	1739.8		P_1@49	S_0@0	22.63	25.80	< 30.00
1745.1	1764.9				22.46	25.63	< 30.00
1750.2	1770.0				22.17	25.34	< 30.00
1720.0	1739.8		P_1@99	S_0@0	22.33	25.50	< 30.00
1745.1	1764.9				22.21	25.38	< 30.00
1750.2	1770.0				22.35	25.52	< 30.00
1720.0	1739.8		P_100@0	S_100@0	21.04	24.21	< 30.00
1745.1	1764.9				21.08	24.25	< 30.00
1750.2	1770.0				21.11	24.28	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1715.3	1727.3	10+15	P_1@0	S_0@0	21.61	24.78	< 30.00
1747.9	1759.9				21.63	24.80	< 30.00
1760.5	1772.5				21.59	24.76	< 30.00
1715.3	1727.3		P_1@25	S_0@0	21.41	24.58	< 30.00
1747.9	1759.9				21.46	24.63	< 30.00
1760.5	1772.5				21.52	24.69	< 30.00
1715.3	1727.3		P_1@49	S_0@0	21.29	24.46	< 30.00
1747.9	1759.9				21.33	24.50	< 30.00
1760.5	1772.5				21.37	24.54	< 30.00
1715.3	1727.3		P_50@0	S_75@0	20.34	23.51	< 30.00
1747.9	1759.9				20.57	23.74	< 30.00
1760.5	1772.5				20.25	23.42	< 30.00
1717.5	1729.5	15+10	P_1@0	S_0@0	21.55	24.72	< 30.00
1750.1	1762.1				21.49	24.66	< 30.00
1762.7	1774.7				21.52	24.69	< 30.00
1717.5	1729.5		P_1@38	S_0@0	21.35	24.52	< 30.00
1750.1	1762.1				21.53	24.70	< 30.00
1762.7	1774.7				21.49	24.66	< 30.00
1717.5	1729.5		P_1@74	S_0@0	21.27	24.44	< 30.00
1750.1	1762.1				21.43	24.60	< 30.00
1762.7	1774.7				21.52	24.69	< 30.00
1717.5	1729.5		P_75@0	S_50@0	20.32	23.49	< 30.00
1750.1	1762.1				20.73	23.90	< 30.00
1762.7	1774.7				20.27	23.44	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1715.5	1729.9	10+20	P_1@0	S_0@0	21.53	24.70	< 30.00
1745.6	1760				21.58	24.75	< 30.00
1755.6	1770				21.69	24.86	< 30.00
1715.5	1729.9		P_1@25	S_0@0	21.47	24.64	< 30.00
1745.6	1760				21.55	24.72	< 30.00
1755.6	1770				21.63	24.80	< 30.00
1715.5	1729.9		P_1@49	S_0@0	21.42	24.59	< 30.00
1745.6	1760				21.34	24.51	< 30.00
1755.6	1770				21.27	24.44	< 30.00
1715.5	1729.9		P_50@0	S_100@0	20.54	23.71	< 30.00
1745.6	1760				20.49	23.66	< 30.00
1755.6	1770				20.55	23.72	< 30.00
1720	1734.4	20+10	P_1@0	S_0@0	21.56	24.73	< 30.00
1750.1	1764.5				21.45	24.62	< 30.00
1760.1	1774.5				21.51	24.68	< 30.00
1720	1734.4		P_1@49	S_0@0	21.41	24.58	< 30.00
1750.1	1764.5				21.43	24.60	< 30.00
1760.1	1774.5				21.36	24.53	< 30.00
1720	1734.4		P_1@99	S_0@0	21.34	24.51	< 30.00
1750.1	1764.5				21.36	24.53	< 30.00
1760.1	1774.5				21.15	24.32	< 30.00
1720	1734.4		P_100@0	S_50@0	20.23	23.40	< 30.00
1750.1	1764.5				20.54	23.71	< 30.00
1760.1	1774.5				20.38	23.55	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1717.8	1734.9	15+20	P_1@0	S_0@0	21.34	24.51	< 30.00
1745.3	1762.4				21.52	24.69	< 30.00
1752.9	1770.0				21.49	24.66	< 30.00
1717.8	1734.9		P_1@38	S_0@0	21.47	24.64	< 30.00
1745.3	1762.4				21.44	24.61	< 30.00
1752.9	1770.0				21.65	24.82	< 30.00
1717.8	1734.9		P_1@74	S_0@0	21.83	25.00	< 30.00
1745.3	1762.4				21.47	24.64	< 30.00
1752.9	1770.0				21.43	24.60	< 30.00
1717.8	1734.9		P_75@0	S_100@0	20.51	23.68	< 30.00
1745.3	1762.4				20.31	23.48	< 30.00
1752.9	1770.0				20.62	23.79	< 30.00
1720.0	1737.1	20+15	P_1@0	S_0@0	21.62	24.79	< 30.00
1747.6	1764.7				21.46	24.63	< 30.00
1755.1	1772.2				21.38	24.55	< 30.00
1720.0	1737.1		P_1@49	S_0@0	21.44	24.61	< 30.00
1747.6	1764.7				21.36	24.53	< 30.00
1755.1	1772.2				21.43	24.60	< 30.00
1720.0	1737.1		P_1@99	S_0@0	21.28	24.45	< 30.00
1747.6	1764.7				21.22	24.39	< 30.00
1755.1	1772.2				21.02	24.19	< 30.00
1720.0	1737.1		P_100@	S_75@0	20.10	23.27	< 30.00
1747.6	1764.7				20.24	23.41	< 30.00
1755.1	1772.2				20.28	23.45	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1720.0	1731.7	20+5	P_1@0	S_0@0	21.45	24.62	< 30.00
1752.5	1764.2				21.36	24.53	< 30.00
1765.0	1776.7				21.38	24.55	< 30.00
1720.0	1731.7		P_1@49	S_0@0	21.35	24.52	< 30.00
1752.5	1764.2				21.44	24.61	< 30.00
1765.0	1776.7				21.34	24.51	< 30.00
1720.0	1731.7		P_1@99	S_0@0	21.34	24.51	< 30.00
1752.5	1764.2				21.13	24.30	< 30.00
1765.0	1776.7				21.04	24.21	< 30.00
1720.0	1731.7		P_100@0	S_25@0	19.91	23.08	< 30.00
1752.5	1764.2				20.24	23.41	< 30.00
1765.0	1776.7				19.98	23.15	< 30.00
1713.3	1725.0	5+20	P_1@0	S_0@0	21.39	24.56	< 30.00
1745.8	1757.5				21.54	24.71	< 30.00
1758.3	1770.0				21.53	24.70	< 30.00
1713.3	1725.0		P_1@13	S_0@0	21.44	24.61	< 30.00
1745.8	1757.5				21.52	24.69	< 30.00
1758.3	1770.0				21.54	24.71	< 30.00
1713.3	1725.0		P_1@24	S_0@0	21.34	24.51	< 30.00
1745.8	1757.5				21.39	24.56	< 30.00
1758.3	1770.0				21.54	24.71	< 30.00
1713.3	1725.0		P_25@0	S_100@0	20.46	23.63	< 30.00
1745.8	1757.5				20.34	23.51	< 30.00
1758.3	1770.0				20.32	23.49	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
1713.3	1725.0	15+15	P_1@0	S_0@0	21.66	24.83	< 30.00
1745.8	1757.5				21.64	24.81	< 30.00
1758.3	1770.0				21.48	24.65	< 30.00
1713.3	1725.0		P_1@38	S_0@0	21.57	24.74	< 30.00
1745.8	1757.5				21.48	24.65	< 30.00
1758.3	1770.0				21.65	24.82	< 30.00
1713.3	1725.0		P_1@74	S_0@0	21.65	24.82	< 30.00
1745.8	1757.5				21.51	24.68	< 30.00
1758.3	1770.0				21.46	24.63	< 30.00
1713.3	1725.0		P_75@0	S_75@0	20.28	23.45	< 30.00
1745.8	1757.5				20.48	23.65	< 30.00
1758.3	1770.0				20.38	23.55	< 30.00
1720.0	1739.8	20+20	P_1@0	S_0@0	21.57	24.74	< 30.00
1745.1	1764.9				21.41	24.58	< 30.00
1750.2	1770.0				21.47	24.64	< 30.00
1720.0	1739.8		P_1@49	S_0@0	21.62	24.79	< 30.00
1745.1	1764.9				21.35	24.52	< 30.00
1750.2	1770.0				21.43	24.60	< 30.00
1720.0	1739.8		P_1@99	S_0@0	21.32	24.49	< 30.00
1745.1	1764.9				21.41	24.58	< 30.00
1750.2	1770.0				21.42	24.59	< 30.00
1720.0	1739.8		P_100@0	S_100@0	20.09	23.26	< 30.00
1745.1	1764.9				20.33	23.50	< 30.00
1750.2	1770.0				20.36	23.53	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1715.3	1727.3	10+15	P_1@0	S_0@0	18.52	21.69	< 30.00
1747.9	1759.9				18.68	21.85	< 30.00
1760.5	1772.5				18.57	21.74	< 30.00
1715.3	1727.3		P_1@25	S_0@0	18.43	21.60	< 30.00
1747.9	1759.9				18.42	21.59	< 30.00
1760.5	1772.5				18.51	21.68	< 30.00
1715.3	1727.3		P_1@49	S_0@0	18.33	21.50	< 30.00
1747.9	1759.9				18.36	21.53	< 30.00
1760.5	1772.5				18.31	21.48	< 30.00
1715.3	1727.3		P_50@0	S_75@0	18.97	22.14	< 30.00
1747.9	1759.9				19.03	22.20	< 30.00
1760.5	1772.5				18.84	22.01	< 30.00
1717.5	1729.5	15+10	P_1@0	S_0@0	18.56	21.73	< 30.00
1750.1	1762.1				18.58	21.75	< 30.00
1762.7	1774.7				18.69	21.86	< 30.00
1717.5	1729.5		P_1@38	S_0@0	18.45	21.62	< 30.00
1750.1	1762.1				18.57	21.74	< 30.00
1762.7	1774.7				18.45	21.62	< 30.00
1717.5	1729.5		P_1@74	S_0@0	18.16	21.33	< 30.00
1750.1	1762.1				18.39	21.56	< 30.00
1762.7	1774.7				18.29	21.46	< 30.00
1717.5	1729.5		P_75@0	S_50@0	18.92	22.09	< 30.00
1750.1	1762.1				18.96	22.13	< 30.00
1762.7	1774.7				18.83	22.00	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1715.5	1729.9	10+20	P_1@0	S_0@0	18.48	21.65	< 30.00
1745.6	1760				18.51	21.68	< 30.00
1755.6	1770				18.54	21.71	< 30.00
1715.5	1729.9		P_1@25	S_0@0	18.34	21.51	< 30.00
1745.6	1760				18.58	21.75	< 30.00
1755.6	1770				18.59	21.76	< 30.00
1715.5	1729.9		P_1@49	S_0@0	18.34	21.51	< 30.00
1745.6	1760				18.45	21.62	< 30.00
1755.6	1770				18.57	21.74	< 30.00
1715.5	1729.9		P_50@0	S_100@0	19.03	22.20	< 30.00
1745.6	1760				19.11	22.28	< 30.00
1755.6	1770				19.10	22.27	< 30.00
1720	1734.4	20+10	P_1@0	S_0@0	19.52	22.69	< 30.00
1750.1	1764.5				18.64	21.81	< 30.00
1760.1	1774.5				18.52	21.69	< 30.00
1720	1734.4		P_1@49	S_0@0	18.43	21.60	< 30.00
1750.1	1764.5				18.49	21.66	< 30.00
1760.1	1774.5				18.43	21.60	< 30.00
1720	1734.4		P_1@99	S_0@0	18.48	21.65	< 30.00
1750.1	1764.5				18.26	21.43	< 30.00
1760.1	1774.5				18.28	21.45	< 30.00
1720	1734.4		P_100@0	S_50@0	18.94	22.11	< 30.00
1750.1	1764.5				18.97	22.14	< 30.00
1760.1	1774.5				18.96	22.13	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1717.8	1734.9	15+20	P_1@0	S_0@0	18.46	21.63	< 30.00
1745.3	1762.4				18.37	21.54	< 30.00
1752.9	1770.0				18.43	21.60	< 30.00
1717.8	1734.9		P_1@38	S_0@0	18.42	21.59	< 30.00
1745.3	1762.4				18.58	21.75	< 30.00
1752.9	1770.0				18.57	21.74	< 30.00
1717.8	1734.9		P_1@74	S_0@0	18.82	21.99	< 30.00
1745.3	1762.4				18.47	21.64	< 30.00
1752.9	1770.0				18.48	21.65	< 30.00
1717.8	1734.9		P_75@0	S_100@0	18.91	22.08	< 30.00
1745.3	1762.4				19.16	22.33	< 30.00
1752.9	1770.0				18.99	22.16	< 30.00
1720.0	1737.1	20+15	P_1@0	S_0@0	18.53	21.70	< 30.00
1747.6	1764.7				18.62	21.79	< 30.00
1755.1	1772.2				18.67	21.84	< 30.00
1720.0	1737.1		P_1@49	S_0@0	18.35	21.52	< 30.00
1747.6	1764.7				18.39	21.56	< 30.00
1755.1	1772.2				18.55	21.72	< 30.00
1720.0	1737.1		P_1@99	S_0@0	18.28	21.45	< 30.00
1747.6	1764.7				18.41	21.58	< 30.00
1755.1	1772.2				18.15	21.32	< 30.00
1720.0	1737.1		P_100@	S_75@0	18.98	22.15	< 30.00
1747.6	1764.7				19.01	22.18	< 30.00
1755.1	1772.2				18.99	22.16	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1720.0	1731.7	20+5	P_1@0	S_0@0	18.54	21.71	< 30.00
1752.5	1764.2				18.58	21.75	< 30.00
1765.0	1776.7				18.48	21.65	< 30.00
1720.0	1731.7		P_1@49	S_0@0	18.34	21.51	< 30.00
1752.5	1764.2				18.39	21.56	< 30.00
1765.0	1776.7				18.36	21.53	< 30.00
1720.0	1731.7		P_1@99	S_0@0	18.41	21.58	< 30.00
1752.5	1764.2				18.44	21.61	< 30.00
1765.0	1776.7				18.42	21.59	< 30.00
1720.0	1731.7		P_100@0	S_25@0	18.87	22.04	< 30.00
1752.5	1764.2				18.96	22.13	< 30.00
1765.0	1776.7				18.61	21.78	< 30.00
1713.3	1725.0	5+20	P_1@0	S_0@0	18.42	21.59	< 30.00
1745.8	1757.5				18.52	21.69	< 30.00
1758.3	1770.0				18.55	21.72	< 30.00
1713.3	1725.0		P_1@13	S_0@0	18.47	21.64	< 30.00
1745.8	1757.5				18.56	21.73	< 30.00
1758.3	1770.0				18.55	21.72	< 30.00
1713.3	1725.0		P_1@24	S_0@0	18.34	21.51	< 30.00
1745.8	1757.5				18.37	21.54	< 30.00
1758.3	1770.0				18.46	21.63	< 30.00
1713.3	1725.0		P_25@0	S_100@0	19.02	22.19	< 30.00
1745.8	1757.5				19.06	22.23	< 30.00
1758.3	1770.0				18.83	22.00	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
1713.3	1725.0	15+15	P_1@0	S_0@0	18.46	21.63	< 30.00
1745.8	1757.5				18.58	21.75	< 30.00
1758.3	1770.0				18.92	22.09	< 30.00
1713.3	1725.0		P_1@38	S_0@0	18.53	21.70	< 30.00
1745.8	1757.5				18.55	21.72	< 30.00
1758.3	1770.0				18.63	21.80	< 30.00
1713.3	1725.0		P_1@74	S_0@0	18.33	21.50	< 30.00
1745.8	1757.5				18.63	21.80	< 30.00
1758.3	1770.0				18.56	21.73	< 30.00
1713.3	1725.0		P_75@0	S_75@0	19.01	22.18	< 30.00
1745.8	1757.5				19.09	22.26	< 30.00
1758.3	1770.0				19.06	22.23	< 30.00
1720.0	1739.8	20+20	P_1@0	S_0@0	18.68	21.85	< 30.00
1745.1	1764.9				18.73	21.90	< 30.00
1750.2	1770.0				18.62	21.79	< 30.00
1720.0	1739.8		P_1@49	S_0@0	18.59	21.76	< 30.00
1745.1	1764.9				18.58	21.75	< 30.00
1750.2	1770.0				18.52	21.69	< 30.00
1720.0	1739.8		P_1@99	S_0@0	18.34	21.51	< 30.00
1745.1	1764.9				18.46	21.63	< 30.00
1750.2	1770.0				18.41	21.58	< 30.00
1720.0	1739.8		P_100@0	S_100@0	19.03	22.20	< 30.00
1745.1	1764.9				19.08	22.25	< 30.00
1750.2	1770.0				19.09	22.26	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

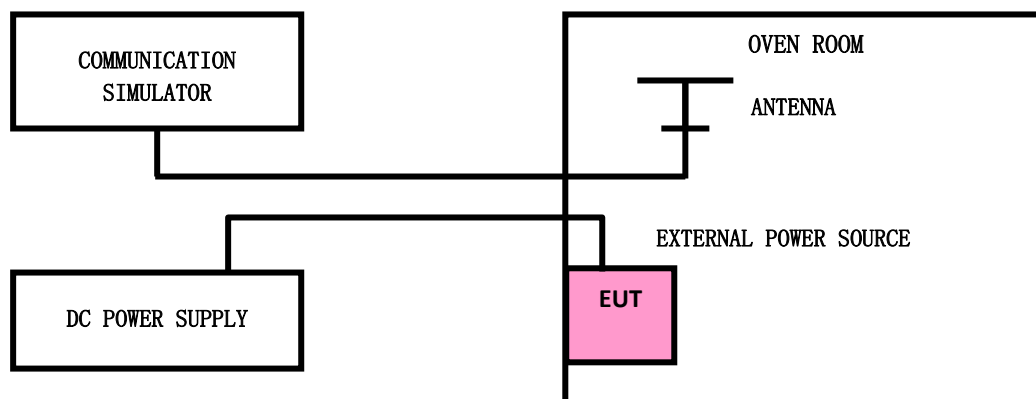

3.2.4 TEST RESULTS


Please Refer to module RM520N-NA report.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

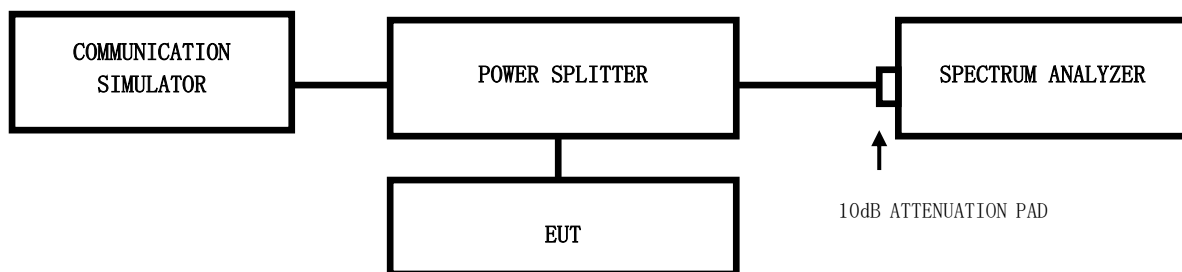

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.4 TEST RESULTS

Please Refer to module RM520N-NA report.

3.4 BAND EDGE MEASUREMENT


3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC Part 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC Part 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

According to FCC Part 27.53 (n)(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.4.2 TEST SETUP

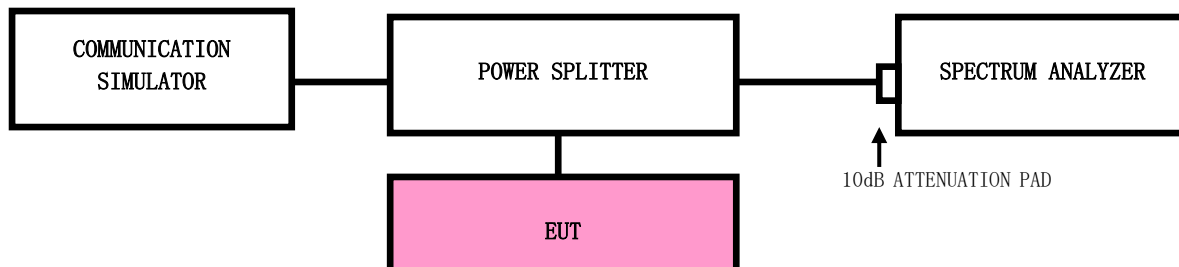

3.4.3 TEST PROCEDURES

- a) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- b) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
- c) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- e) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- f) Select the average power (RMS) display detector.
- g) Set the number of measurement points to ≥ 1001 .
- h) Use auto-coupled sweep time.
- i) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- j) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- k) Record the max trace plot into the test report.

3.4.4 TEST RESULTS

Please Refer to module RM520N-NA report.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


For: LTE Band7/Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

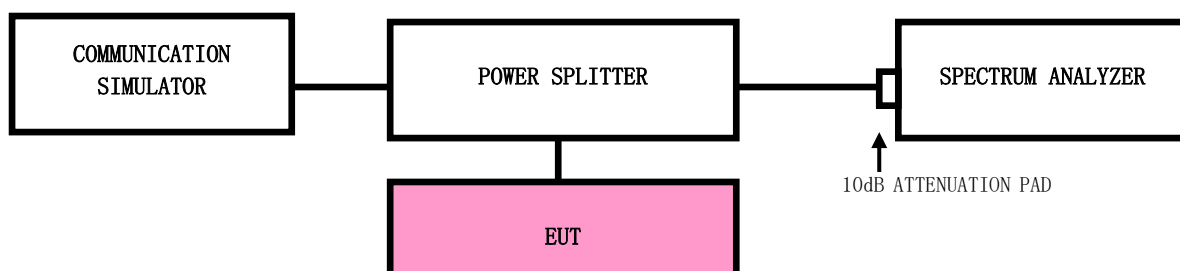

TEST RESULTS

Please Refer to module RM520N-NA report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: LTE Band7/ Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

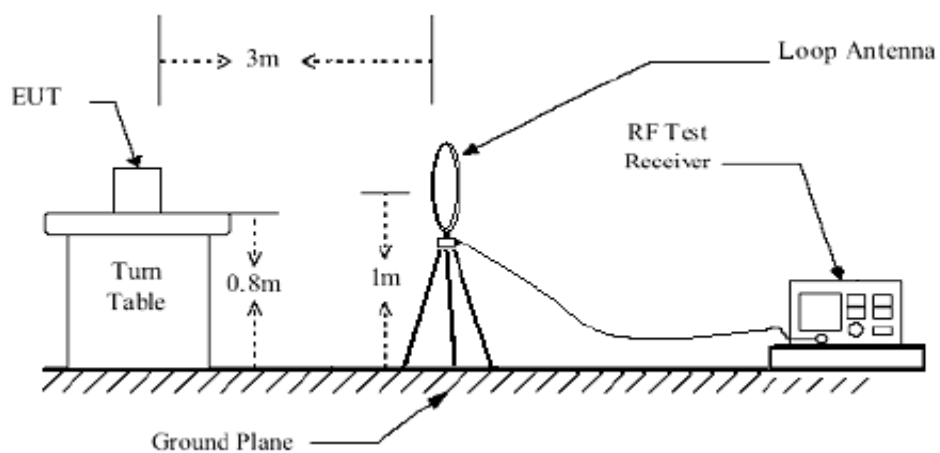

< Frequency Range 30MHz~1GHz >

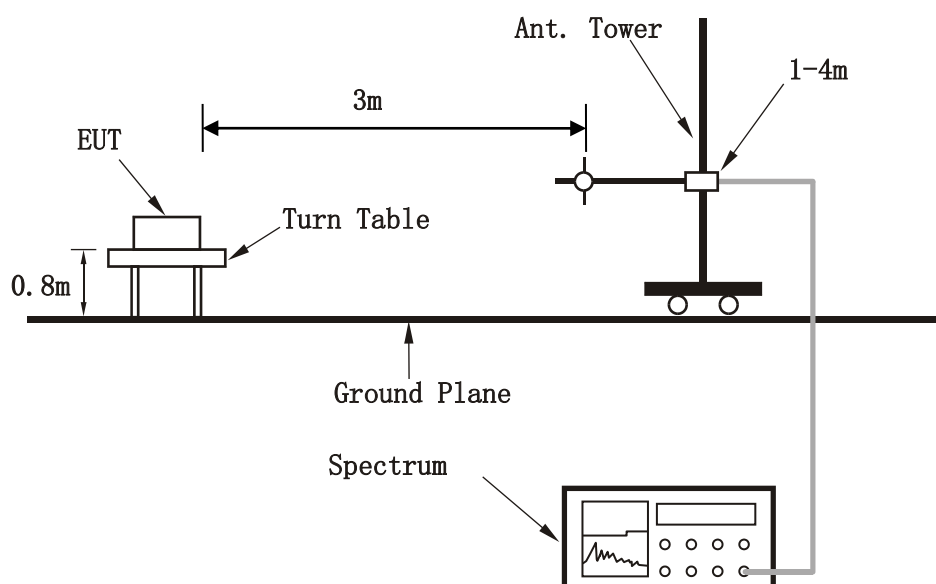

<Frequency Range above 1GHz>

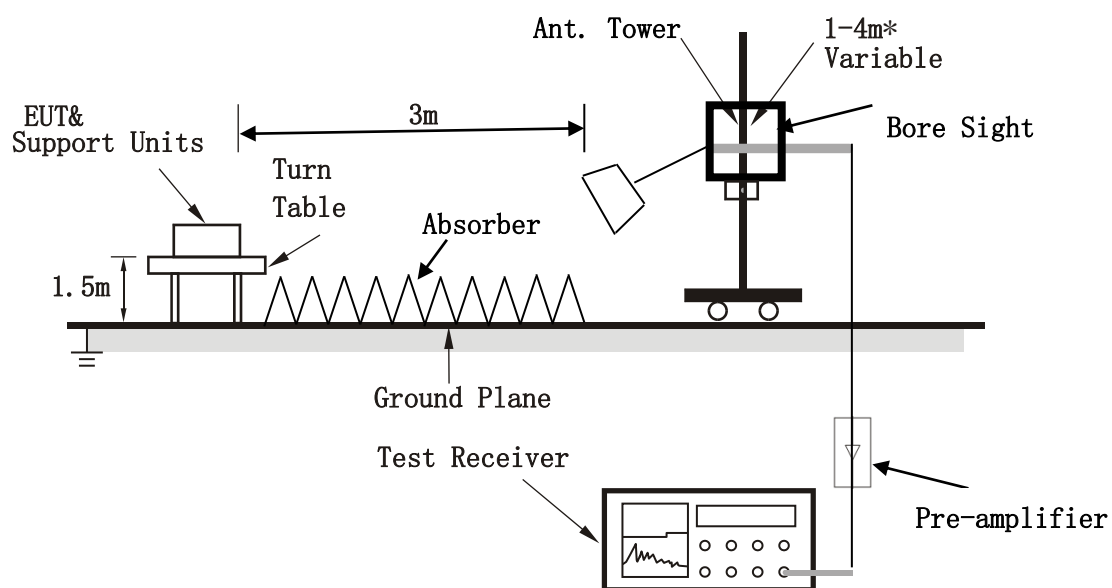

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE1 : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

NOTE2: The measurement range is 30M to the tenth harmonic of the highest fundamental frequency, For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report

LTE band 4

Test result:

ANT2 Channel: 20175

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1158.20	-79.69	-13.00	Vertical
1506.80	-75.64	-13.00	Vertical
2401.92	-71.50	-13.00	Vertical
3111.00	-81.79	-13.00	Vertical
3522.00	-79.70	-13.00	Vertical
4725.00	-87.76	-13.00	Vertical

LTE band 38

Test result:

ANT0 Channel : 38000

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1173.60	-79.60	-25	Vertical
1463.40	-76.51	-25	Vertical
1939.40	-65.25	-25	Vertical
3090.00	-81.86	-25	Vertical
3537.00	-79.99	-25	Vertical
4701.00	-87.22	-25	Vertical



BUREAU
VERITAS

Test Report No.: PSU-NQN2502170213RF04

LTE band 41

Test result:

ANT0 Channel : 40620

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1187.60	-79.82	-25	Vertical
1502.60	-75.80	-25	Vertical
2401.75	-75.36	-25	Horizontal
3144.00	-81.85	-25	Vertical
4680.00	-87.79	-25	Vertical
5172.00	-85.97	-25	Vertical

LTE band 66

Test result

ANT2 Channel : 132322

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1145.60	-79.59	-13.00	Vertical
1490.00	-75.88	-13.00	Vertical
2462.79	-75.99	-13.00	Vertical
3087.00	-82.11	-13.00	Vertical
3597.00	-79.98	-13.00	Vertical
5034.00	-86.73	-13.00	Vertical

LTE band CA_66B

Test result

ANT2 Channel : 132322

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1217.00	-79.72	-13.00	Vertical
1498.40	-75.95	-13.00	Vertical
2478.74	-77.56	-13.00	Vertical
3111.00	-81.65	-13.00	Vertical
3501.00	-79.89	-13.00	Vertical
4725.00	-87.86	-13.00	Vertical



BUREAU
VERITAS

Test Report No.: PSU-NQN2502170213RF04

LTE band CA_66C

Test result

ANT2 Channel : 132322


Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1149.80	-79.21	-13.00	Vertical
1501.20	-75.62	-13.00	Vertical
2451.60	-73.06	-13.00	Vertical
3102.00	-81.57	-13.00	Vertical
3537.00	-79.87	-13.00	Vertical
4707.00	-87.42	-13.00	Vertical

3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

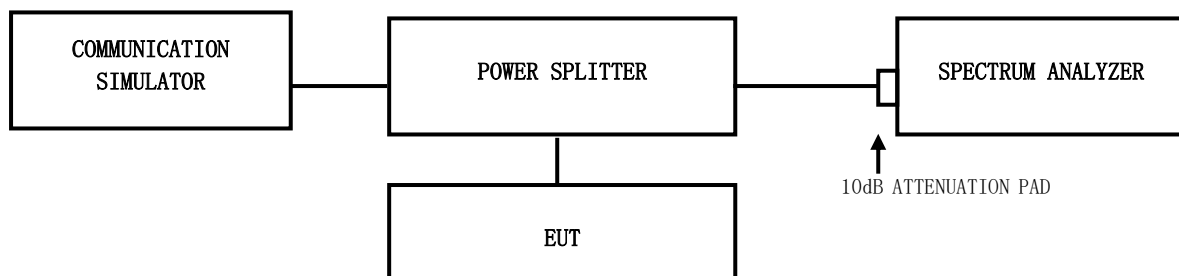

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

Please Refer to module RM520N-NA report.



Test Report No.: PSU-NQN2502170213RF04

4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Accredited Test Lab Cert 6613.01

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

6 APPENDIX

Please Refer to module RM520N-NA report.

---END---