

TEST REPORT

Applicant : SHARP CORPORATION, Consumer Electronics Company,
Communication Systems Division

Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan

Products : Smart Phone

Model No. : HR229

Serial No. : 004401115636124
004401115636173

FCC ID : APYHRO00229

Test Standard : CFR 47 FCC Rules and Regulations Part 22, Part 90

Test Results : **Passed**

Date of Test : October 27 ~ November 5, 2015



A handwritten signature in black ink, appearing to read 'K. Shibata'.

Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	5
3 Test Procedure	6
4 Test Location	6
5 Recognition of Test Laboratory	6
6 Description of Test Setup	7
7 Test Requirements	14

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT : Equipment Under Test

AE : Associated Equipment

N/A : Not Applicable

N/T : Not Tested

EMC : Electromagnetic Compatibility

EMI : Electromagnetic Interference

EMS : Electromagnetic Susceptibility

☒ - indicates that the listed condition, standard or equipment is applicable for this report.

☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : SHARP CORPORATION, Consumer Electronics Company,
Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan
2. Products : Smart Phone
3. Model No. : HR229
4. Serial No. : 004401115636124
004401115636173
5. Product Type : Pre-production
6. Date of Manufacture : September, 2015
7. Power Rating : 4.0VDC (Lithium-ion Battery 1UAF375986Z 2810mAh)
8. Grounding : None
9. Transmitting Frequency : Band 26 (814 MHz – 849 MHz)
10. Receiving Frequency : Band 26 (859 MHz – 894 MHz)
11. Emission Designations : Part 22

BW (MHz)	QPSK	16QAM
1.4	1M09G7D	1M08D7W
3	2M69G7D	2M68D7W
5	4M48G7D	4M47D7W
10	8M95G7D	8M93D7W
15	13M4G7D	13M4D7W

Part 90

BW (MHz)	QPSK	16QAM
1.4	1M09G7D	1M08D7W
3	2M68G7D	2M68D7W
5	4M48G7D	4M47D7W
10	8M93G7D	8M93D7W

12. Max. RF Output Power : Part 22

BW (MHz)	QPSK (W ERP)	16QAM (W ERP)
1.4	0.178	0.151
3	0.182	0.155
5	0.178	0.148
10	0.162	0.141
15	0.158	0.132

Part 90

BW (MHz)	QPSK (W ERP)	16QAM (W ERP)
1.4	0.162	0.132
3	0.158	0.132
5	0.158	0.132
10	0.148	0.126

13. Category : LTE FDD (Band 26)

14. EUT Authorization : Certification

15. Received Date of EUT : October 20, 2015

16. Channel Plan

The carrier spacing is 100 kHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 814.7 + 0.1 \times (n - 26697)$$

where, n : channel number ($26697 \leq n \leq 27033$)

$$\text{Receiving Frequency (in MHz)} = 859.7 + 0.1 \times (n - 8697)$$

where, n : channel number ($8697 \leq n \leq 9033$)

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 22
Subpart H – Cellular Radiotelephone Service
CFR 47 FCC Rules and Regulations Part 90
Subpart S – Regulations Governing Licensing and Use of Frequencies in
the 806-824, 851-869, 896-901, and 935-940 MHz Bands

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Assistant Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

Test Requirements : CFR 47 FCC Rules and Regulations Part 2
§2.1046, §2.1047, §2.1049, §2.1051, §2.1053, §2.1055 and §2.1057

Test Procedure : ANSI C63.4–2014, ANSI/TIA–603-D-2010
FCC KDB 971168 D01 Power Meas License Digital Systems v02r02,
released October 17, 2014

4 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2016)
VCCI Registration No. : A-0002 (Expiry date : March 30, 2016)
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Description of Test Setup

6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	HR229	004401115636124 *1) 004401115636173 *2)	APYHRO00229
B	AC Adapter	Hosiden	04	HS-SKA	N/A
C	Earphone	Softbank Mobile	ZTCAA1	--	N/A

*1) Used for Field Strength of Spurious Emission

*2) Used for Antenna Conducted Emission and Frequency Stability

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable	--	--	NO	NO	1.5
2	Earphone Cable	--	--	NO	NO	0.5

6.2 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

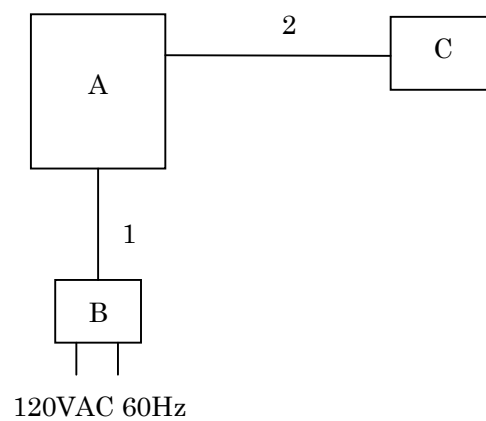

c) Earphone used

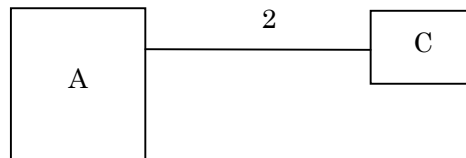

6.3 Operating Condition

Power Supply Voltage : 4.0 VDC (for Battery)
120 VAC, 60 Hz (For AC Adapter)

1. Bandwidth: 1.4 MHz/3 MHz/5 MHz/10 MHz/15 MHz
(Bandwidth 15 MHz: Part 22 only)
2. Modulation Type: QPSK/16QAM

The tests were carried under worst condition shown as follows:

Test Item	Bandwidth (MHz)	Modulation	RB Size
RF Power Output	1.4/3/5/10/15	QPSK/16QAM	1
ERP / EIRP RF Power Output	1.4/3/5/10/15	QPSK/16QAM	1
Occupied Bandwidth	1.4/3/5/10/15	QPSK/16QAM	Full
Spurious Emissions at Antenna Terminals	1.4/3/5/10/15	QPSK	1
Band-Edge Emission	1.4/3/5/10/15	QPSK/16QAM	1/Full
Field Strength of Spurious Radiation	1.4/3/5/10/15	QPSK	1

The Radiated Emission test were carried under 3 test configurations shown in clause 6.2.
In all tests, the fully charged battery is used for the EUT.

Other Clock Frequency
19.2MHz, 48MHz, 12MHz, 27.12MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.
The EUT with temporary antenna port was used in conducted measurement.

RF Output Verification

The tests were conducted at the middle channel.

Part 22

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26915	836.5	1.4	QPSK	1	0	0	23.54
				1	3	0	23.55
				1	5	0	23.45
				3	0	0	23.38
				3	2	0	23.45
				3	3	0	23.38
			16QAM	6	0	1	22.33
				1	0	1	22.53
				1	3	1	22.74
				1	5	1	22.60
				3	0	1	22.44
				3	2	1	22.44
				3	3	1	22.44
				6	0	2	21.34

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26915	836.5	3	QPSK	1	0	0	23.25
				1	8	0	23.33
				1	14	0	23.28
				8	0	1	22.32
				8	4	1	22.38
				8	7	1	22.33
				15	0	1	22.31
			16QAM	1	0	1	22.50
				1	8	1	22.83
				1	14	1	22.50
				8	0	2	21.36
				8	4	2	21.36
				8	7	2	21.33
				15	0	2	21.26

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26915	836.5	5	QPSK	1	0	0	23.42
				1	13	0	23.52
				1	24	0	23.30
				12	0	1	22.39
				12	7	1	22.42
				12	13	1	22.32
				25	0	1	22.37
			16QAM	1	0	1	22.81
				1	13	1	22.79
				1	24	1	22.78
				12	0	2	21.41
				12	7	2	21.42
				12	13	2	21.32
				25	0	2	21.37

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26915	836.5	10	QPSK	1	0	0	23.56
				1	25	0	23.57
				1	49	0	23.45
				25	0	1	22.45
				25	13	1	22.42
				25	25	1	22.34
				50	0	1	22.32
			16QAM	1	0	1	22.64
				1	25	1	22.69
				1	49	1	22.68
				25	0	2	21.40
				25	13	2	21.38
				25	25	2	21.40
				50	0	2	21.38

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26915	836.5	15	QPSK	1	0	0	23.34
				1	38	0	23.42
				1	74	0	23.35
				36	0	1	22.45
				36	20	1	22.40
				36	39	1	22.41
				75	0	1	22.33
			16QAM	1	0	1	22.56
				1	38	1	22.57
				1	74	1	22.50
				36	0	2	21.42
				36	20	2	21.36
				36	39	2	21.33
				75	0	2	21.31

Part 90

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26740	819	1.4	QPSK	1	0	0	23.46
				1	3	0	23.52
				1	5	0	23.42
				3	0	0	23.34
				3	2	0	23.44
				3	3	0	23.31
				6	0	1	22.28
			16QAM	1	0	1	22.36
				1	3	1	22.63
				1	5	1	22.44
				3	0	1	22.29
				3	2	1	22.35
				3	3	1	22.27
				6	0	2	21.20

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26740	819	3	QPSK	1	0	0	23.32
				1	8	0	23.44
				1	14	0	23.30
				8	0	1	22.33
				8	4	1	22.38
				8	7	1	22.30
				15	0	1	22.34
			16QAM	1	0	1	22.47
				1	8	1	22.82
				1	14	1	22.60
				8	0	2	21.30
				8	4	2	21.37
				8	7	2	21.30
				15	0	2	21.25

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
26740	819	5	QPSK	1	0	0	23.36
				1	13	0	23.50
				1	24	0	23.34
				12	0	1	22.36
				12	7	1	22.39
				12	13	1	22.26
				25	0	1	22.32
			16QAM	1	0	1	22.72
				1	13	1	22.73
				1	24	1	22.77
				12	0	2	21.34
				12	7	2	21.34
				12	13	2	21.25
				25	0	2	21.31

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Avrage Power (dBm)
26740	819	10	QPSK	1	0	0	23.39
				1	25	0	23.47
				1	49	0	23.28
				25	0	1	22.41
				25	13	1	22.32
				25	25	1	22.35
				50	0	1	22.37
			16QAM	1	0	1	22.54
				1	25	1	22.63
				1	49	1	22.55
				25	0	2	21.39
				25	13	2	21.28
				25	25	2	21.33
				50	0	2	21.30

7 Test Requirements

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
RF Power Output	Section 22.913(a)(2) Section 90.635	Section 7.1	Passed	-
ERP / EIRP RF Power Output	Section 22.913(a)(2) Section 90.635	Section 7.2	Passed	-
Modulation Characteristics	-	-	-	-
Occupied Bandwidth	Section 22.917 Section 90.210 and 90.691	Section 7.4	Passed	-
Spurious Emissions at Antenna Terminals	Section 22.917 Section 90.210 and 90.691	Section 7.5	Passed	-
Band-Edge Emission (Emission Mask)	Section 22.917 Section 90.210 and 90.691	Section 7.6	Passed	-
Field Strength of Spurious Radiation	Section 22.917 Section 90.210 and 90.691	Section 7.7	Passed	-
Frequency Stability	Section 22.355 Section 90.213	Section 7.8	Passed	-

7.1 RF Power Output (§2.1046)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.1.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

Transmitter Power of BW: 1.4 MHz(QPSK) is	<u>226.5</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 1.4 MHz(16QAM) is	<u>187.9</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 3 MHz(QPSK) is	<u>218.8</u>	mW	at	<u>825.500</u>	MHz
Transmitter Power of BW: 3 MHz(16QAM) is	<u>191.9</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 5 MHz(QPSK) is	<u>224.9</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 5 MHz(16QAM) is	<u>191.0</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 10 MHz(QPSK) is	<u>227.5</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 10 MHz(16QAM) is	<u>185.8</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 15 MHz(QPSK) is	<u>219.8</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 15 MHz(16QAM) is	<u>180.7</u>	mW	at	<u>836.500</u>	MHz

Part 90

Transmitter Power of BW: 1.4 MHz(QPSK) is	<u>224.9</u>	mW	at	<u>819.000</u>	MHz
Transmitter Power of BW: 1.4 MHz(16QAM) is	<u>184.9</u>	mW	at	<u>814.700</u>	MHz
Transmitter Power of BW: 3 MHz(QPSK) is	<u>223.9</u>	mW	at	<u>815.500</u>	MHz
Transmitter Power of BW: 3 MHz(16QAM) is	<u>191.4</u>	mW	at	<u>819.000</u>	MHz
Transmitter Power of BW: 5 MHz(QPSK) is	<u>223.9</u>	mW	at	<u>816.5/819.0</u>	MHz
Transmitter Power of BW: 5 MHz(16QAM) is	<u>189.2</u>	mW	at	<u>819.000</u>	MHz
Transmitter Power of BW: 10 MHz(QPSK) is	<u>222.3</u>	mW	at	<u>819.000</u>	MHz
Transmitter Power of BW: 10 MHz(16QAM) is	<u>183.2</u>	mW	at	<u>819.000</u>	MHz

Uncertainty of Measurement Results ± 0.9 dB(2σ)

Remarks : _____


7.1.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Power Meter	ML2495A	1423001 (B-16)	Anritsu	2016/07/16
Power Sensor	MA2411B	1339136 (B-18)	Anritsu	2016/07/16
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.1.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one attenuator and a short, low loss cable.



7.1.4 Test Data

1. Part 22

1-1-1) BW 1.4MHz(1RB)

Mode: QPSK

(LTE 1.4MHz)QPSK

Test Date: October 27, 2015
 Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26797	824.700	20.20	3.25	23.45	221.3
26915	836.500	20.20	3.35	23.55	226.5
27033	848.300	20.20	3.18	23.38	217.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.35	dBm
Result	=	23.55	dBm = 226.5 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 1.4MHz)16QAM

Test Date: October 27, 2015
 Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26797	824.700	20.20	2.44	22.64	183.7
26915	836.500	20.20	2.54	22.74	187.9
27033	848.300	20.20	2.37	22.57	180.7

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.54	dBm
Result	=	22.74	dBm = 187.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-1-2) BW 3MHz(1RB)

Mode: QPSK

(LTE 3MHz)QPSK

Test Date: October 27, 2015

Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26805	825.500	20.20	3.20	23.40	218.8
26915	836.500	20.20	3.13	23.33	215.3
27025	847.500	20.20	3.18	23.38	217.8

Calculated result at 825.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.20	dBm
Result	=	23.40	dBm = 218.8 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 3MHz)16QAM

Test Date: October 27, 2015

Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26805	825.500	20.20	2.52	22.72	187.1
26915	836.500	20.20	2.63	22.83	191.9
27025	847.500	20.20	2.53	22.73	187.5

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.63	dBm
Result	=	22.83	dBm = 191.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-1-3) BW 5MHz(1RB)

Mode: QPSK

(LTE 5MHz)QPSK

Test Date: October 27, 2015
Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26815	826.500	20.20	3.26	23.46	221.8
26915	836.500	20.20	3.32	23.52	224.9
27015	846.500	20.20	3.24	23.44	220.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.32	dBm
Result	=	23.52	dBm = 224.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 5MHz)16QAM

Test Date: October 27, 2015
Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26815	826.500	20.20	2.47	22.67	184.9
26915	836.500	20.20	2.61	22.81	191.0
27015	846.500	20.20	2.44	22.64	183.7

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.61	dBm
Result	=	22.81	dBm = 191.0 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-1-4) BW 10MHz(1RB)

Mode: QPSK

(LTE 10MHz)QPSK

Test Date: October 27, 2015
Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26840	829.000	20.20	3.28	23.48	222.8
26915	836.500	20.20	3.37	23.57	227.5
26990	844.000	20.20	3.30	23.50	223.9

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.37	dBm
Result	=	23.57	dBm = 227.5 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 10MHz)16QAM

Test Date: October 27, 2015
Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26840	829.000	20.20	2.46	22.66	184.5
26915	836.500	20.20	2.49	22.69	185.8
26990	844.000	20.20	2.40	22.60	182.0

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.49	dBm
Result	=	22.69	dBm = 185.8 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-1-5) BW 15MHz(1RB)

Mode: QPSK

(LTE 15MHz)QPSK

Test Date: October 27, 2015

Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26865	831.500	20.20	3.21	23.41	219.3
26915	836.500	20.20	3.22	23.42	219.8
26965	841.500	20.20	3.16	23.36	216.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.22	dBm
Result	=	23.42	dBm = 219.8 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 15MHz)16QAM

Test Date: October 27, 2015

Temp.: 26 °C, Humi: 47 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26865	831.500	20.20	2.36	22.56	180.3
26915	836.500	20.20	2.37	22.57	180.7
26965	841.500	20.20	2.30	22.50	177.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:


Correction Factor	=	20.20	dB
+) Meter Reading	=	2.37	dBm
Result	=	22.57	dBm = 180.7 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.


1-2) CCDF

Channel	Frequency (MHz)	BW (MHz)	Peak to Average Factor(CCDF 0.1%) [dB]		
			QPSK	16QAM	Limit
26915	836.50	1.4	6.11	6.78	--
26915	836.50	3	6.15	6.62	--
26915	836.50	5	6.02	6.71	--
26915	836.50	10	5.41	6.40	--
26915	836.50	15	5.50	6.59	--


BW 1.4MHz QPSK

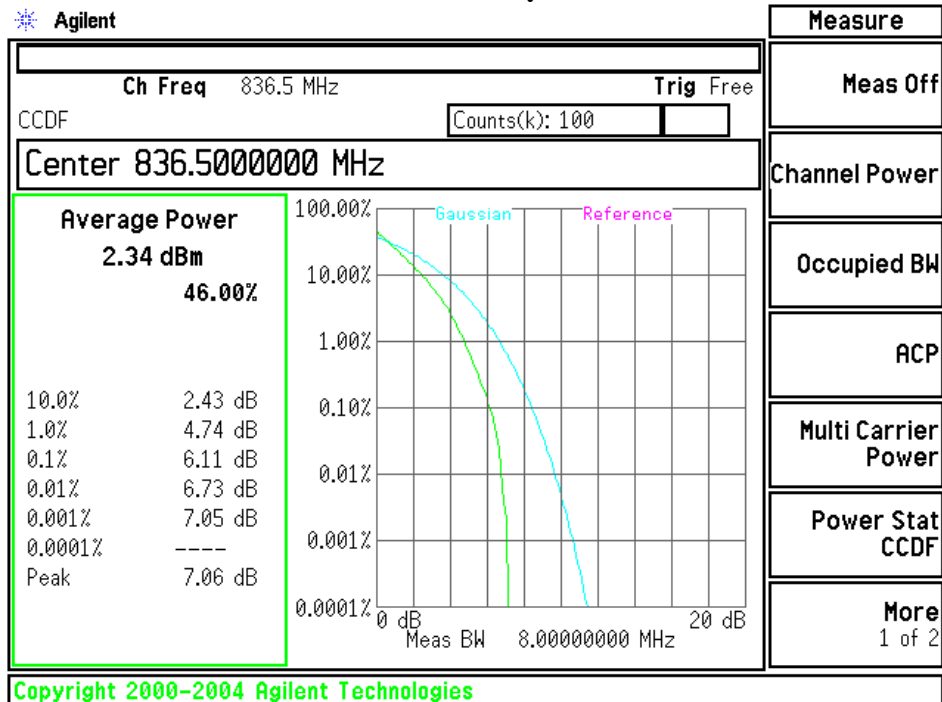


BW 1.4MHz 16QAM

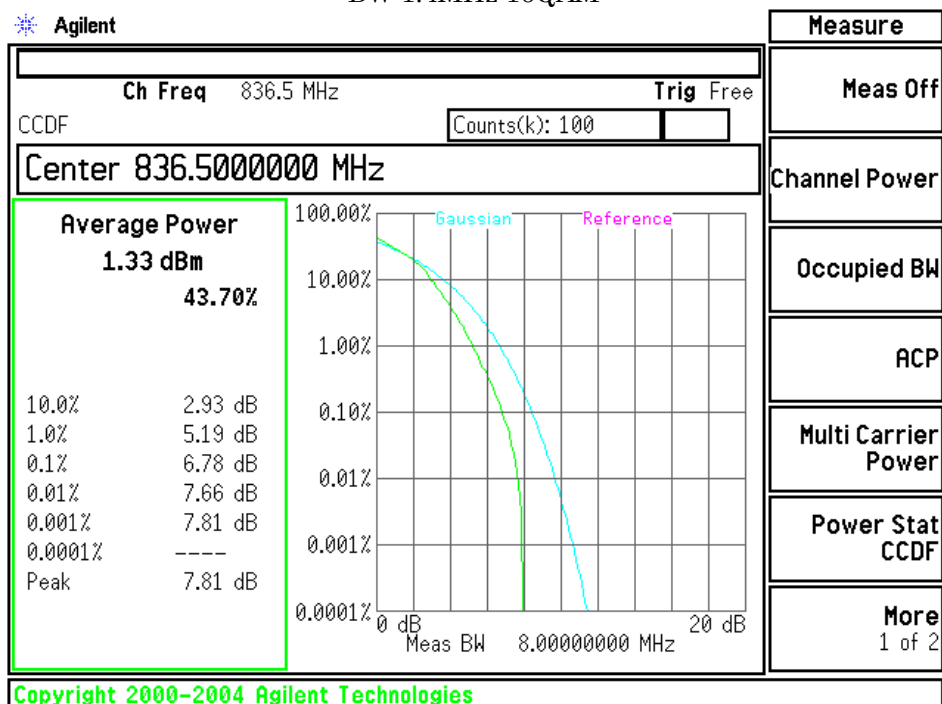


BW 3MHz QPSK

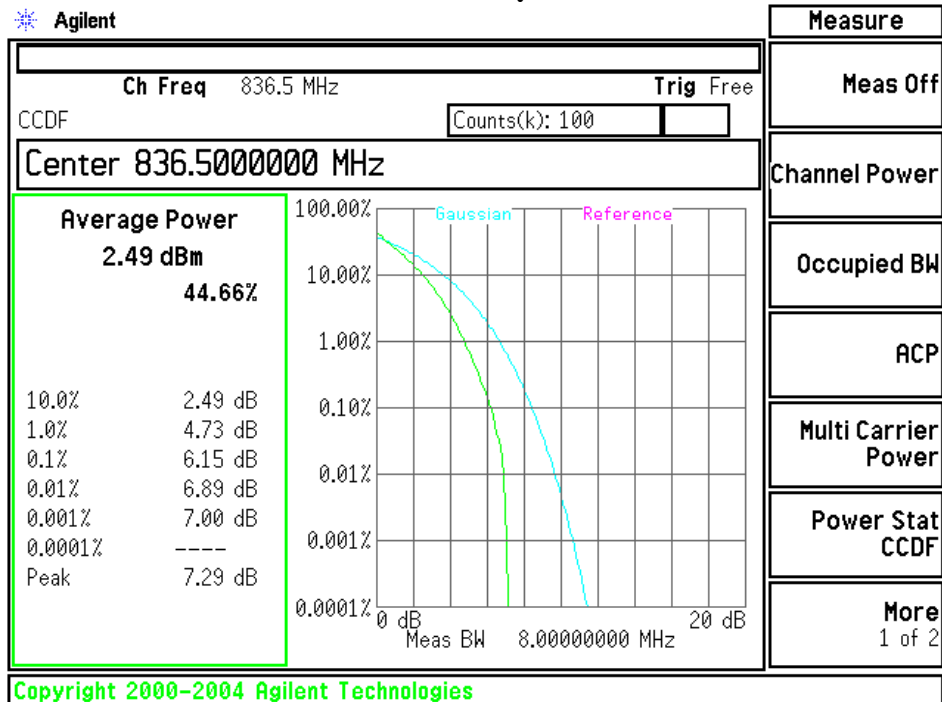


BW 3MHz 16QAM

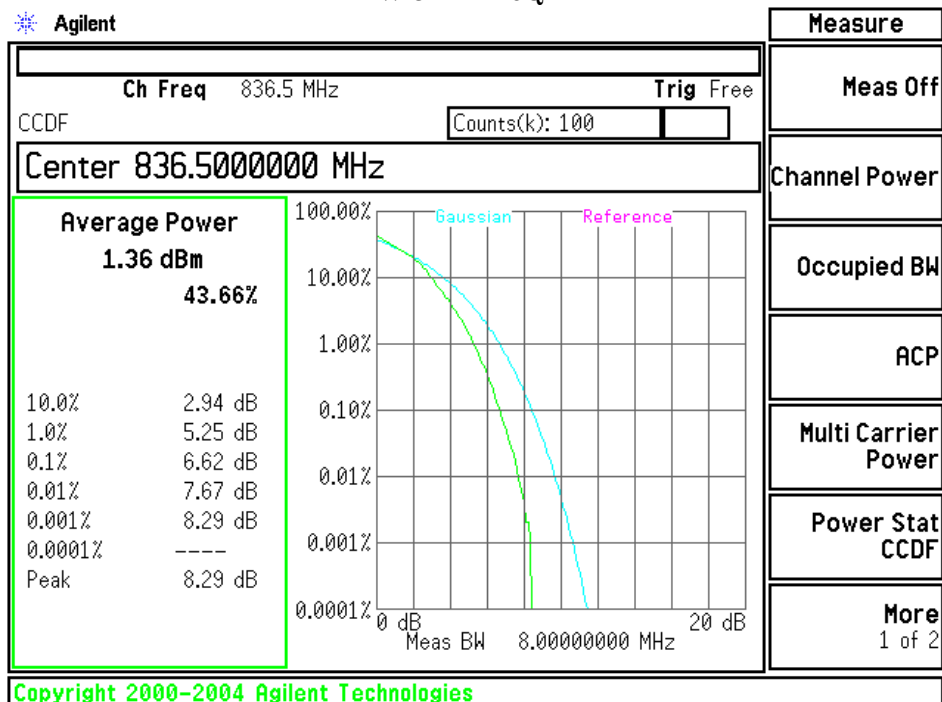


BW 5MHz QPSK

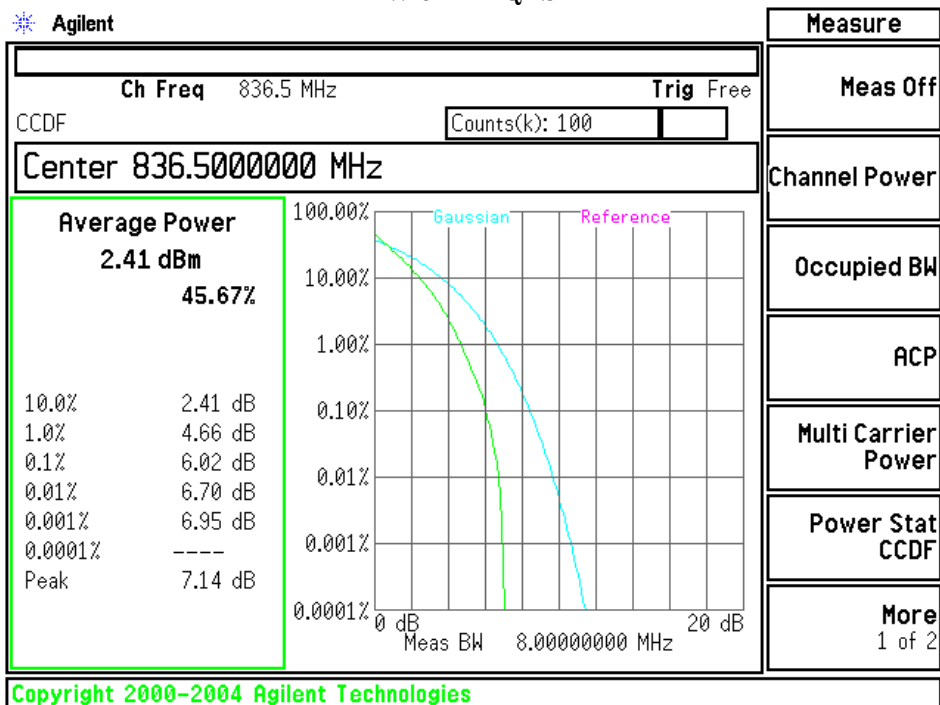


BW 5MHz 16QAM

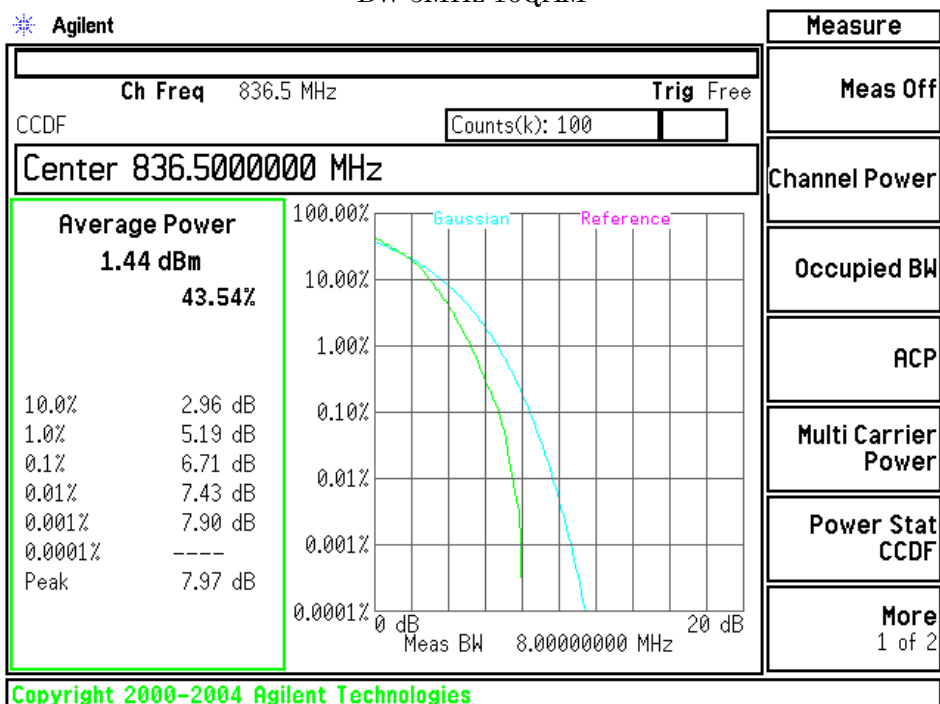


BW 10MHz QPSK

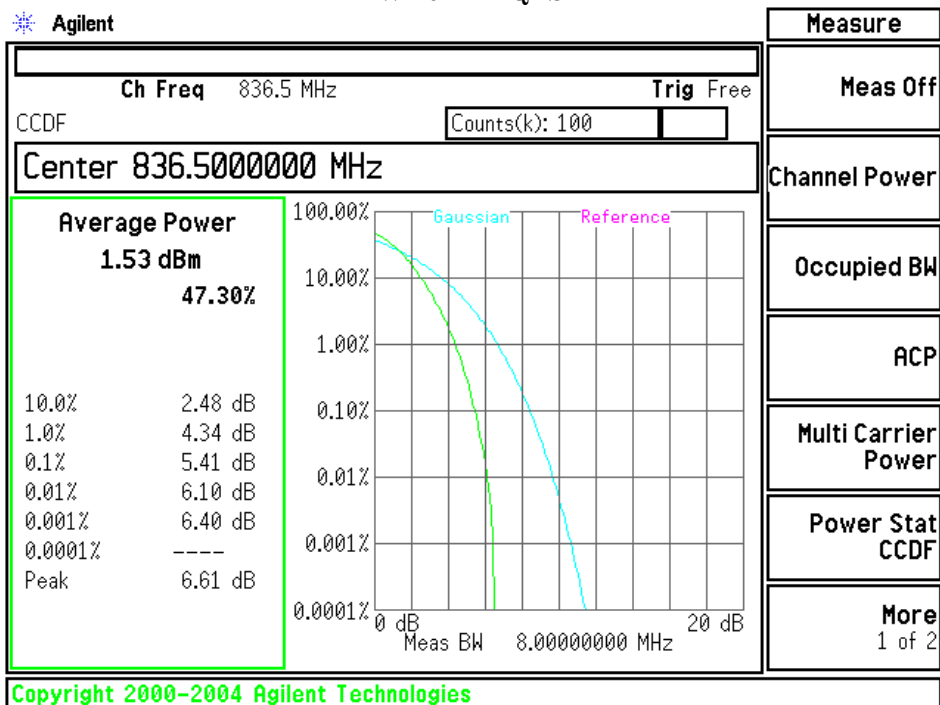


BW 10MHz 16QAM

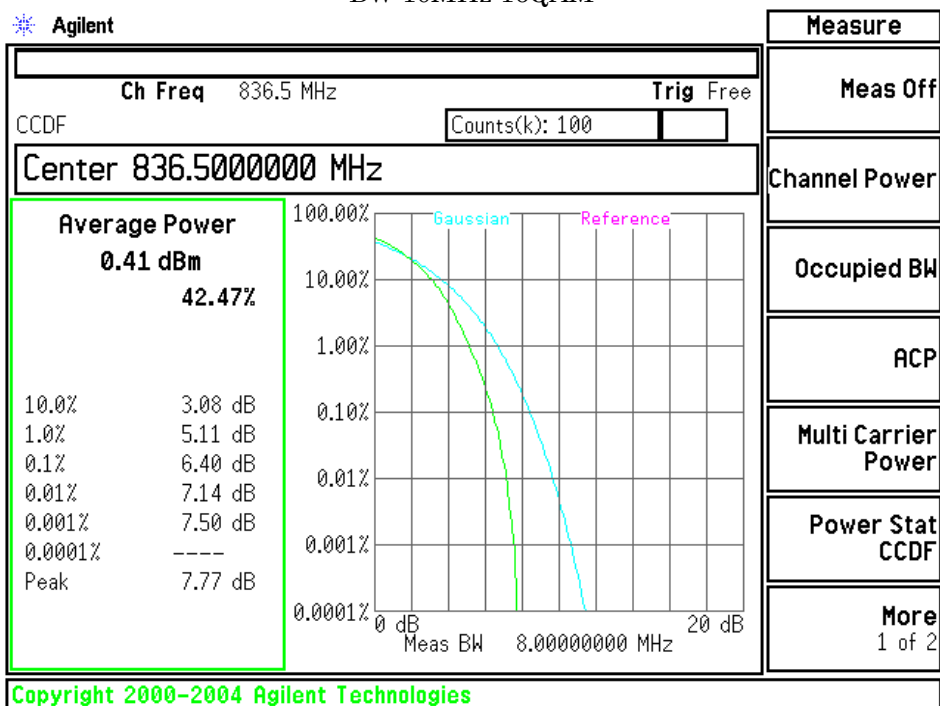

BW 15MHz QPSK

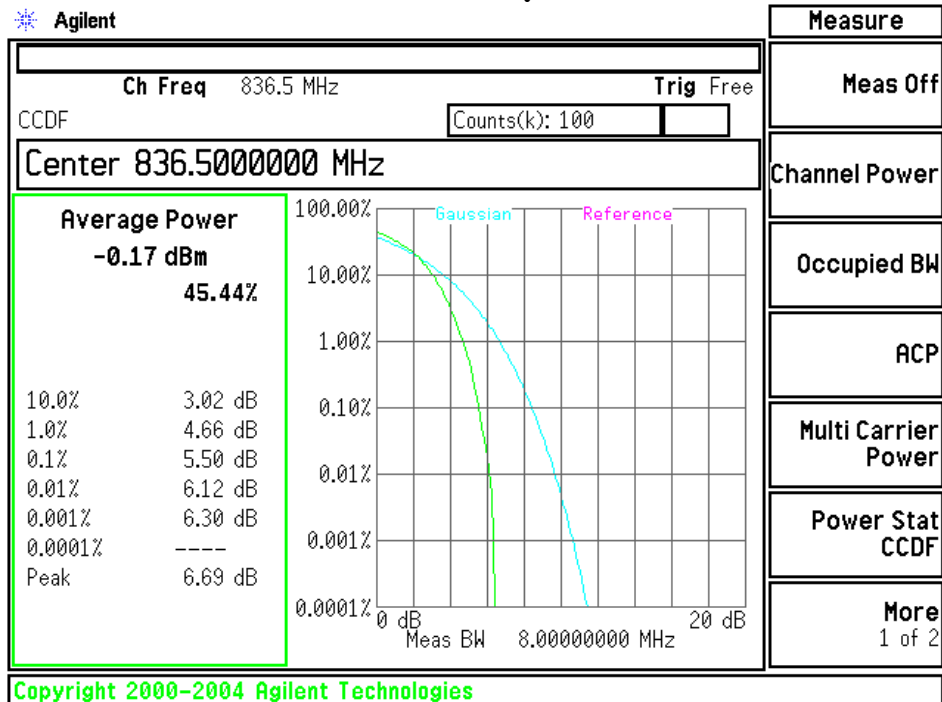

BW 15MHz 16QAM

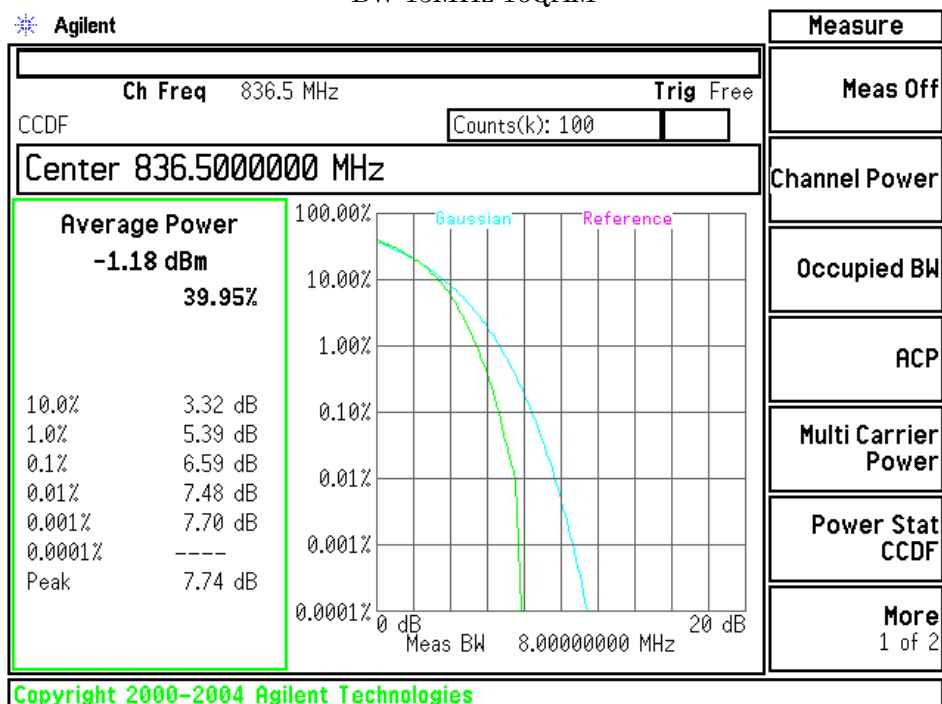

2. Part 90

2-1-1) BW 1.4MHz(1RB)

Mode: QPSK

(LTE 1.4MHz)QPSK

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26697	814.700	20.20	3.29	23.49	223.4
26740	819.000	20.20	3.32	23.52	224.9
26783	823.300	20.20	3.20	23.40	218.8

Calculated result at 819.000 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.32	dBm
Result	=	23.52	dBm = 224.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 1.4MHz)16QAM

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26697	814.700	20.20	2.47	22.67	184.9
26740	819.000	20.20	2.43	22.63	183.2
26783	823.300	20.20	2.40	22.60	182.0

Calculated result at 814.700 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.47	dBm
Result	=	22.67	dBm = 184.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2-1-2) BW 3MHz(1RB)

Mode: QPSK

(LTE 3MHz)QPSK

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26705	815.500	20.20	3.30	23.50	223.9
26740	819.000	20.20	3.24	23.44	220.8
26775	822.500	20.20	3.12	23.32	214.8

Calculated result at 815.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.30	dBm
Result	=	23.50	dBm = 223.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 3MHz)16QAM

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26705	815.500	20.20	2.50	22.70	186.2
26740	819.000	20.20	2.62	22.82	191.4
26775	822.500	20.20	2.55	22.75	188.4

Calculated result at 819.000 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.62	dBm
Result	=	22.82	dBm = 191.4 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2-1-3) BW 5MHz(1RB)

Mode: QPSK

(LTE 5MHz)QPSK

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26715	816.500	20.20	3.30	23.50	223.9
26740	819.000	20.20	3.30	23.50	223.9
26765	821.500	20.20	3.22	23.42	219.8

Calculated result at 816.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.30	dBm
Result	=	23.50	dBm = 223.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 5MHz)16QAM

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26715	816.500	20.20	2.50	22.70	186.2
26740	819.000	20.20	2.57	22.77	189.2
26765	821.500	20.20	2.50	22.70	186.2

Calculated result at 819.000 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.57	dBm
Result	=	22.77	dBm = 189.2 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2-1-4) BW 10MHz(1RB)

Mode: QPSK

(LTE 10MHz)QPSK

Test Date: October 29, 2015
Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26740	819.000	20.20	3.27	23.47	222.3

Calculated result at 819.000 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.27	dBm
Result	=	23.47	dBm = 222.3 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 10MHz)16QAM

Test Date: October 29, 2015
Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
26740	819.000	20.20	2.43	22.63	183.2

Calculated result at 819.000 MHz, as the maximum level point shown on underline:


Correction Factor	=	20.20	dB
+) Meter Reading	=	2.43	dBm
Result	=	22.63	dBm = 183.2 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.


2-2) CCDF

Channel	Frequency (MHz)	BW (MHz)	Peak to Average Factor(CCDF 0.1%) [dB]		
			QPSK	16QAM	Limit
26740	819.00	1.4	6.06	6.71	--
26740	819.00	3	6.12	6.62	--
26740	819.00	5	6.03	6.65	--
26740	819.00	10	5.33	6.40	--


BW 1.4MHz QPSK

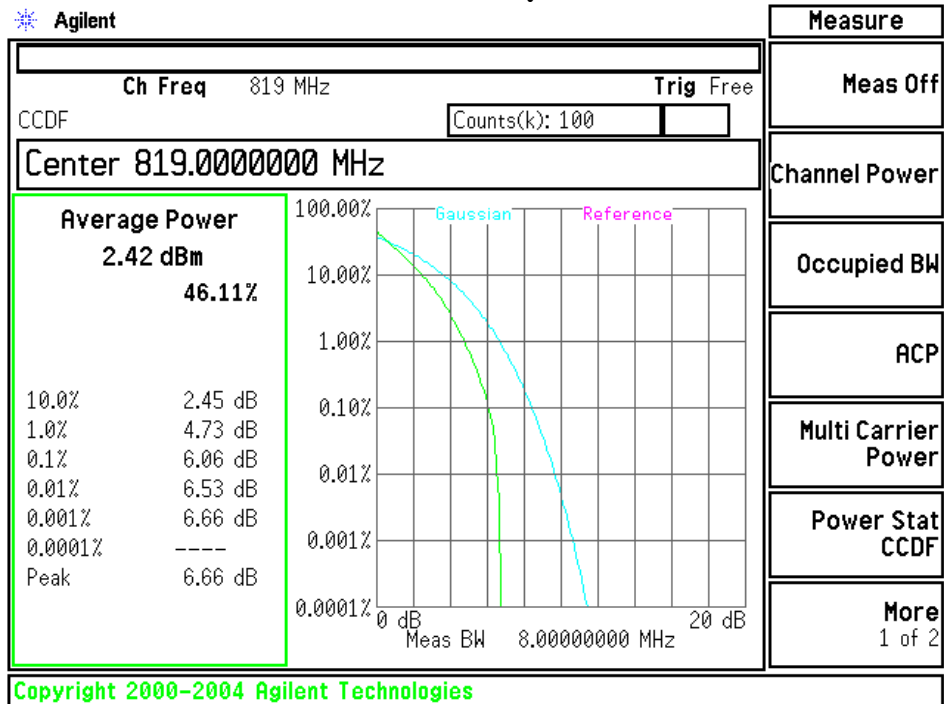


BW 1.4MHz 16QAM

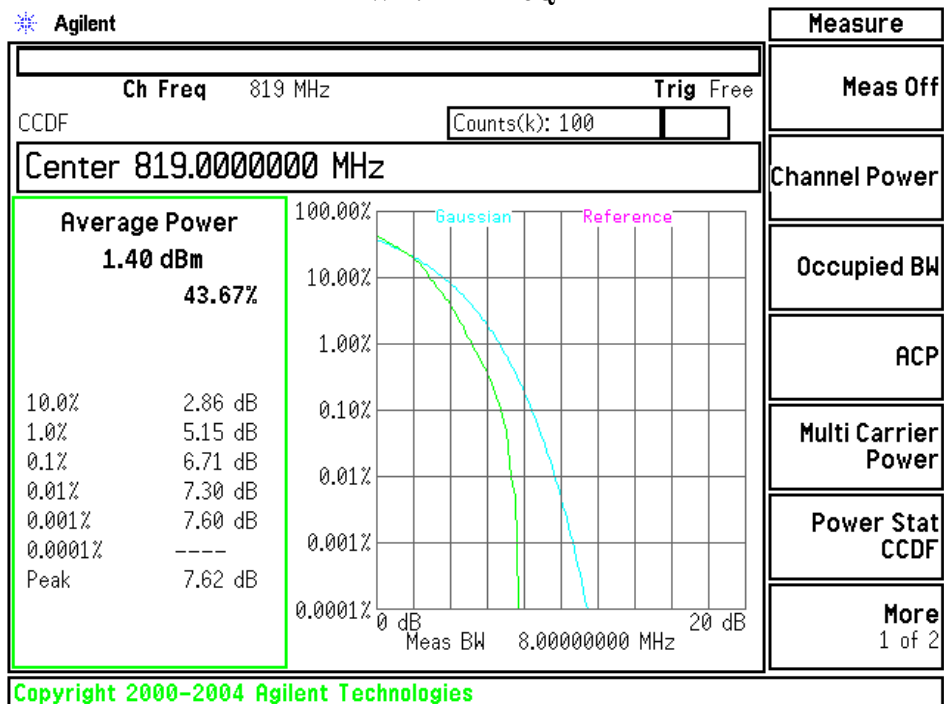


BW 3MHz QPSK

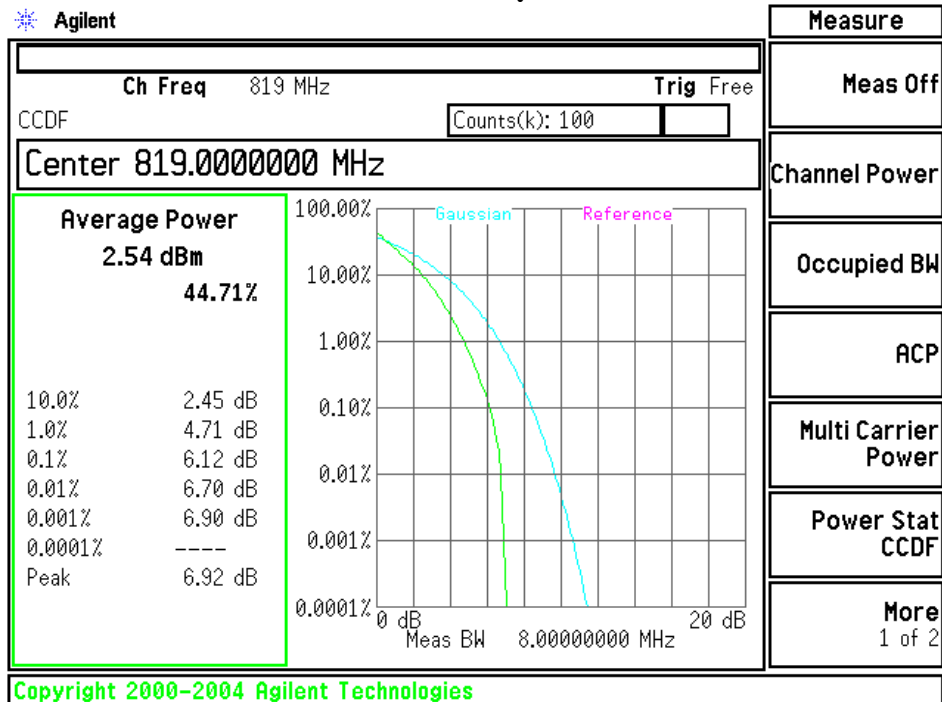


BW 3MHz 16QAM

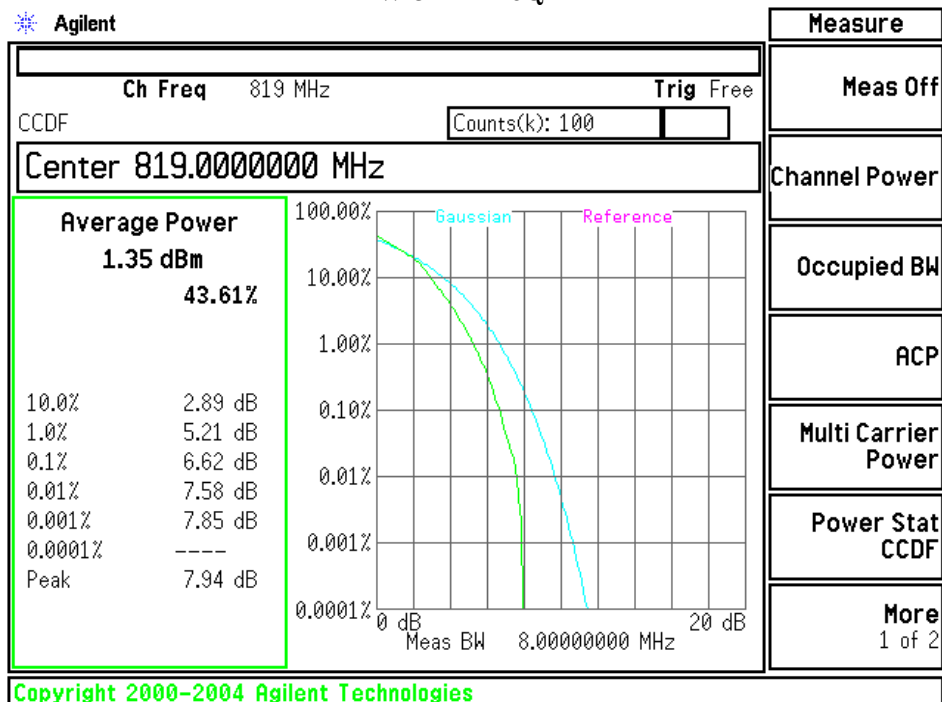


BW 5MHz QPSK

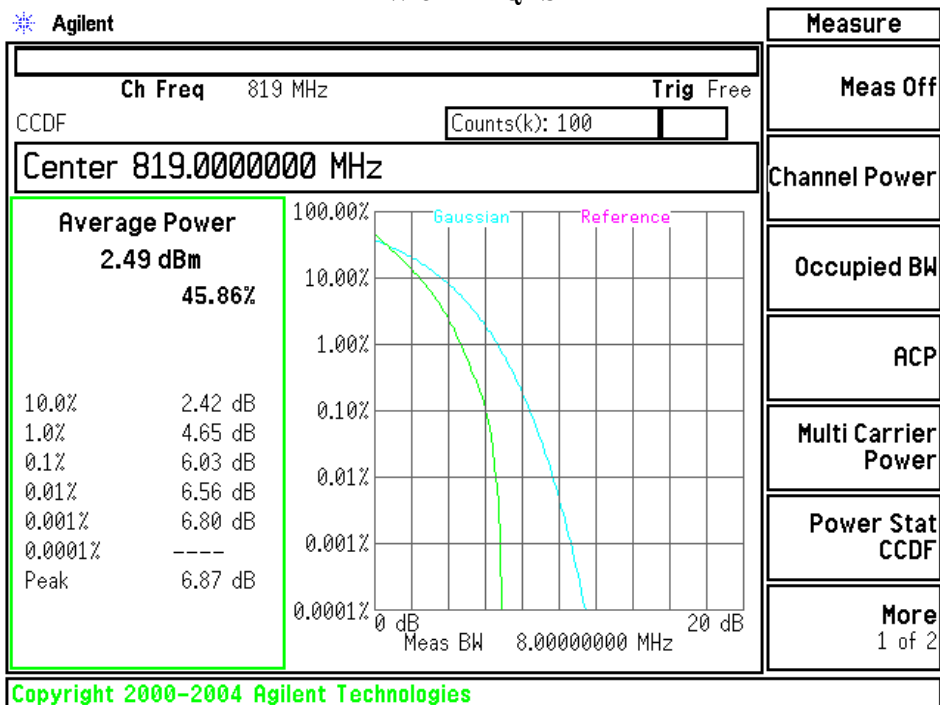


BW 5MHz 16QAM

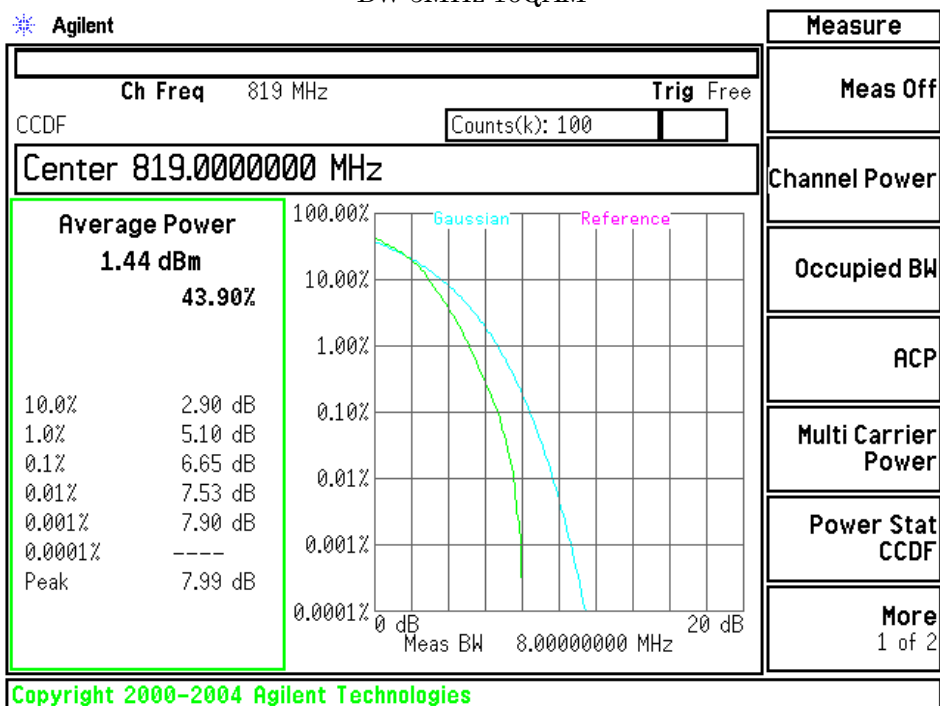

BW 10MHz QPSK

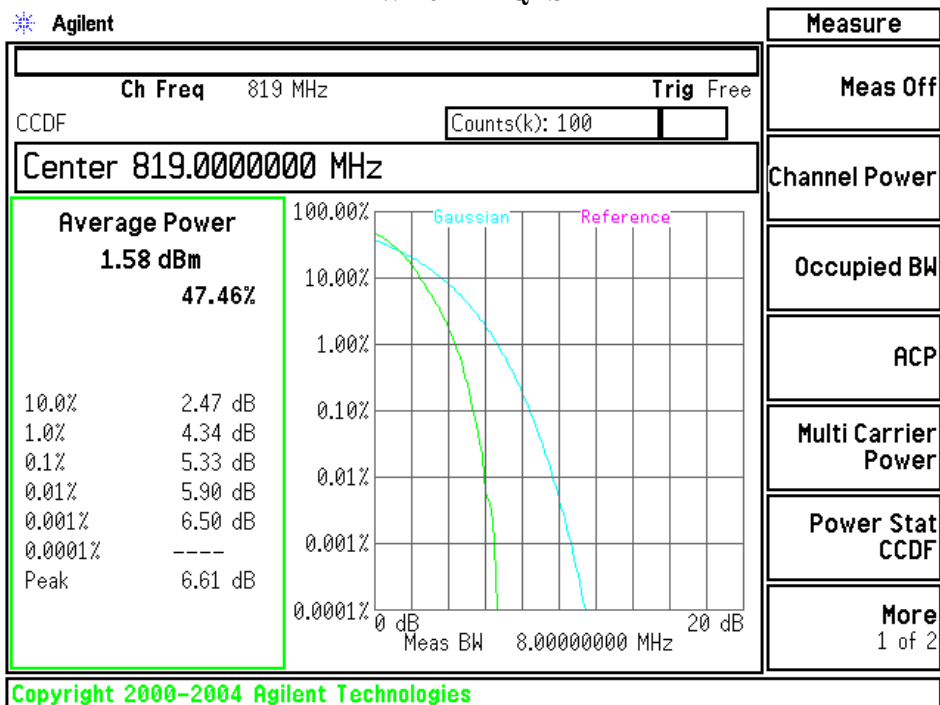

BW 10MHz 16QAM

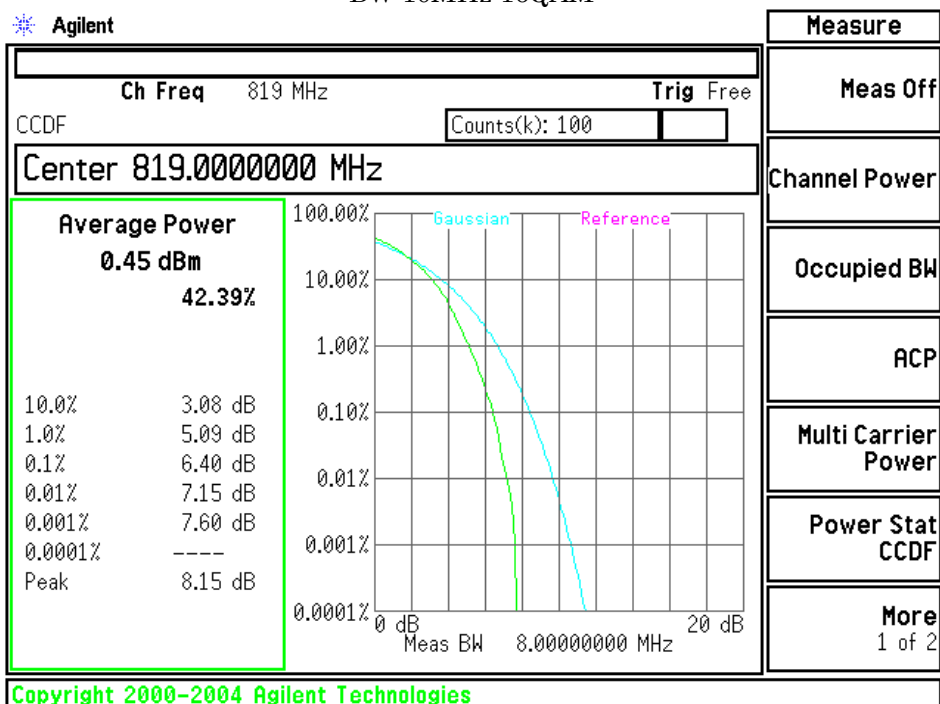

7.2 ERP / EIRP RF Power Output

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.2.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

Min. Limit Margin 15.9 dB at 847.500 MHz

Uncertainty of Measurement Results ± 1.6 dB(2 σ)

Remarks : The maximum ERP is 0.182 W at 847.500 MHz (BW 3MHz, QPSK). Z-axis position.

Part 90

Min. Limit Margin 27.9 dB at 814.700 MHz

Uncertainty of Measurement Results ± 1.6 dB(2 σ)

Remarks : The maximum ERP is 0.162 W at 814.700 MHz (BW 1.4Hz, QPSK). Z-axis position.

7.2.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
Signal Generator	E8257D	MY45140309 (B-39)	Agilent	2016/08/10
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2016/07/16
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2016/07/16
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2016/05/24
Attenuator (TX)	2-10	BA6214 (D-79)	Weinschel	2015/11/18
Dipole Antenna (TX)	KBA-611	0-248-2 (C-20)	Kyoritsu	2016/05/20

NOTE : The calibration interval of the above test instruments is 12 months.

7.2.3 Test Method and Test Setup (Diagrammatic illustration)

Step 1:

In order to obtain the maximum emission, the EUT was placed at the height 1.5 m on the non-conducted support and was varying at three orthogonal axes, at the distance 3 m from the receiving antenna and rotated around 360 degrees.

The receiving antenna height was varied from 1 m to 4 m.

The EUT on the table was placed to be maximum emission against at the receiving antenna polarized (vertical and horizontal).

Then the meter reading of the spectrum analyzer at the maximum emission was A dB(μV).

Step 2:

The EUT was replaced to substitution antenna at the same polarized under the same condition as step 1.

The RF power was fed to the transmitting antenna through the RF amplifier from the signal generator.

In order to obtain the maximum emission level, the height of the receiving antenna was varied from 1 m to 4 m.

The level of maximum emission was A dB(μV), same as the recorded level in the step 1.

Then the RF power into the substitution horn antenna was P (dBm).


The ERP/EIRP output power was calculated in the following equation.

$$\text{ERP (dBm)} = \text{P (dBm)} - \text{Balun loss of the tuned dipole antenna (dB)} + \text{Cable loss (dB)}$$


$$\text{EIRP (dBm)} = \text{P (dBm)} + \text{Gh (dBi)}$$

where, Gh (dBi) : Gain of the substitution horn antenna.

– Side View –

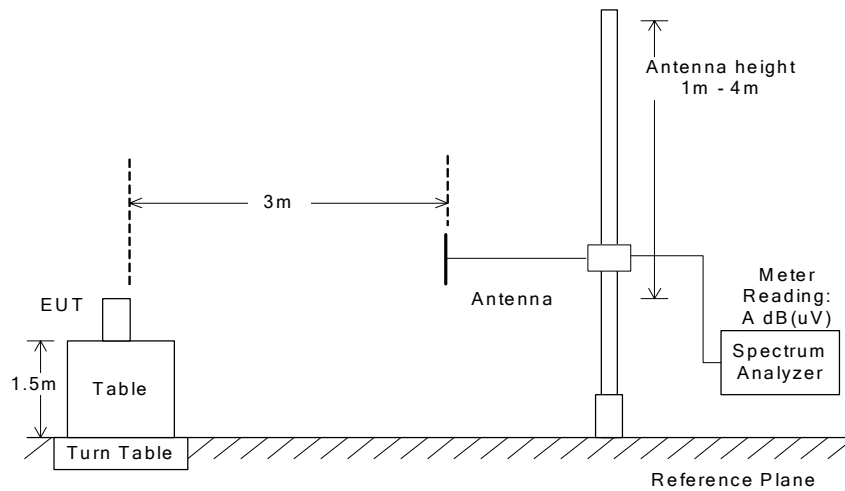

(a)EUT

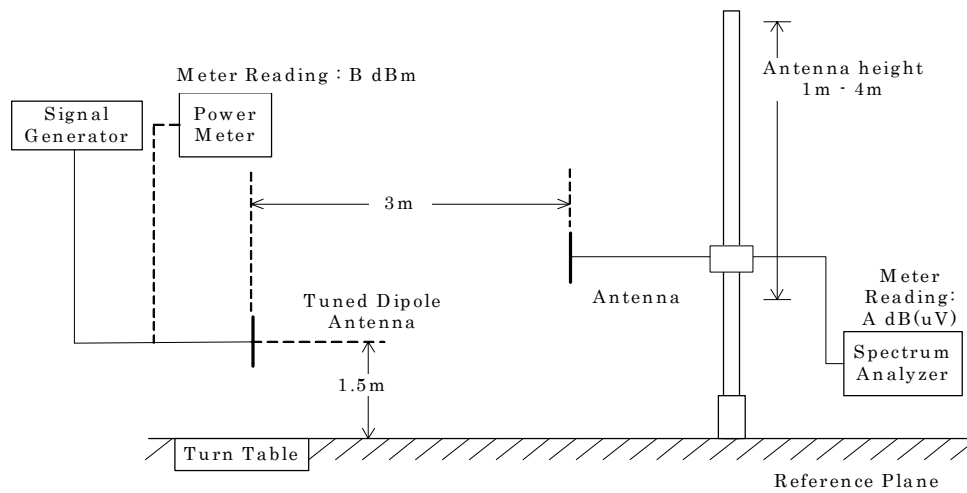

(b) Substitution Half-wave Dipole Antenna

7.2.4 Test Data

1. Part 22

1-1-1) BW 1.4MHz(1RB)

Mode: QPSK

(LTE 1.4MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26797	824.700	94.8	94.1	67.3	66.0	- 5.0	1.3
26915	836.500	94.9	94.6	66.7	65.7	- 5.0	1.4
27033	848.300	94.5	93.8	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26797	824.700	21.2	21.8	0.151	38.5	+16.7
26915	836.500	21.8	22.5	0.178	38.5	+16.0
27033	848.300	21.2	22.5	0.178	38.5	+16.0

Calculated result at 836.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	94.6 dB(uV)
Substitution Measurement (Msv)	=	-65.7 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	22.5 dBm = 0.178 W

Minimum Margin: 38.5 - 22.5 = 16.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-1-2) BW 1.4MHz(1RB)

Mode: 16QAM

(LTE 1.4MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26797	824.700	94.1	93.4	67.3	66.0	- 5.0	1.3
26915	836.500	94.0	93.8	66.7	65.7	- 5.0	1.4
27033	848.300	93.8	93.1	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26797	824.700	20.5	21.1	0.129	38.5	+17.4
26915	836.500	20.9	21.7	0.148	38.5	+16.8
27033	848.300	20.5	21.8	0.151	38.5	+16.7

Calculated result at 848.300 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.1 dB(uV)
Substitution Measurement (Msv)	=	-64.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	21.8 dBm = 0.151 W

Minimum Margin: 38.5 - 21.8 = 16.7 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-2-1) BW 3MHz(1RB)

Mode: QPSK

(LTE 3MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26805	825.500	95.1	93.9	67.4	66.0	- 5.0	1.3
26915	836.500	94.6	94.1	66.7	65.7	- 5.0	1.4
27025	847.500	94.4	93.9	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26805	825.500	21.4	21.6	0.145	38.5	+16.9
26915	836.500	21.5	22.0	0.158	38.5	+16.5
27025	847.500	21.1	22.6	0.182	38.5	+15.9

Calculated result at 847.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.9 dB(uV)
Substitution Measurement (Msv)	=	-64.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	22.6 dBm = 0.182 W

Minimum Margin: 38.5 - 22.6 = 15.9 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-2-2) BW 3MHz(1RB)

Mode: 16QAM

(LTE 3MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26805	825.500	94.4	93.2	67.4	66.0	- 5.0	1.3
26915	836.500	93.8	93.3	66.7	65.7	- 5.0	1.4
27025	847.500	93.7	93.2	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26805	825.500	20.7	20.9	0.123	38.5	+17.6
26915	836.500	20.7	21.2	0.132	38.5	+17.3
27025	847.500	20.4	21.9	0.155	38.5	+16.6

Calculated result at 847.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.2 dB(uV)
Substitution Measurement (Msv)	=	-64.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	21.9 dBm = 0.155 W

Minimum Margin: 38.5 - 21.9 = 16.6 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-3-1) BW 5MHz(1RB)

Mode: QPSK

(LTE 5MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26815	826.500	95.1	93.8	67.3	65.9	- 5.0	1.3
26915	836.500	94.7	94.1	66.7	65.7	- 5.0	1.4
27015	846.500	94.5	93.9	66.9	64.9	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26815	826.500	21.5	21.6	0.145	38.5	+16.9
26915	836.500	21.6	22.0	0.158	38.5	+16.5
27015	846.500	21.1	22.5	0.178	38.5	+16.0

Calculated result at 846.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.9 dB(uV)
Substitution Measurement (Msv)	=	-64.9 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	22.5 dBm = 0.178 W

Minimum Margin: 38.5 - 22.5 = 16.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-3-2) BW 5MHz(1RB)

Mode: 16QAM

(LTE 5MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26815	826.500	94.4	93.1	67.3	65.9	- 5.0	1.3
26915	836.500	93.8	93.2	66.7	65.7	- 5.0	1.4
27015	846.500	93.7	93.1	66.9	64.9	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26815	826.500	20.8	20.9	0.123	38.5	+17.6
26915	836.500	20.7	21.1	0.129	38.5	+17.4
27015	846.500	20.3	21.7	0.148	38.5	+16.8

Calculated result at 846.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.1 dB(uV)
Substitution Measurement (Msv)	=	-64.9 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	21.7 dBm = 0.148 W

Minimum Margin: 38.5 - 21.7 = 16.8 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-4-1) BW 10MHz(1RB)

Mode: QPSK

(LTE 10MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26840	829.000	94.9	93.6	67.2	65.9	- 5.0	1.4
26915	836.500	94.7	93.9	66.7	65.7	- 5.0	1.4
26990	844.000	94.5	93.5	66.7	65.0	- 5.0	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26840	829.000	21.3	21.3	0.135	38.5	+17.2
26915	836.500	21.6	21.8	0.151	38.5	+16.7
26990	844.000	21.4	22.1	0.162	38.5	+16.4

Calculated result at 844.000 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.5 dB(uV)
Substitution Measurement (Msv)	=	-65.0 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	22.1 dBm = 0.162 W

Minimum Margin: 38.5 - 22.1 = 16.4 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-4-2) BW 10MHz(1RB)

Mode: 16QAM

(LTE 10MHz) 16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26840	829.000	94.0	93.0	67.2	65.9	- 5.0	1.4
26915	836.500	93.7	92.9	66.7	65.7	- 5.0	1.4
26990	844.000	93.7	92.9	66.7	65.0	- 5.0	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26840	829.000	20.4	20.7	0.117	38.5	+17.8
26915	836.500	20.6	20.8	0.120	38.5	+17.7
26990	844.000	20.6	21.5	0.141	38.5	+17.0

Calculated result at 844.000 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	92.9 dB(uV)
Substitution Measurement (Msv)	=	-65.0 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	21.5 dBm = 0.141 W

Minimum Margin: 38.5 - 21.5 = 17.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-5-1) BW 15MHz(1RB)

Mode: QPSK

(LTE 15MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26865	831.500	94.8	93.6	67.1	65.9	- 5.0	1.3
26915	836.500	94.5	93.7	66.7	65.7	- 5.0	1.4
26965	841.500	94.3	93.6	66.7	65.2	- 5.0	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26865	831.500	21.4	21.4	0.138	38.5	+17.1
26915	836.500	21.4	21.6	0.145	38.5	+16.9
26965	841.500	21.2	22.0	0.158	38.5	+16.5

Calculated result at 841.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.6 dB(uV)
Substitution Measurement (Msv)	=	-65.2 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	22.0 dBm = 0.158 W

Minimum Margin: 38.5 - 22.0 = 16.5 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-5-2) BW 15MHz(1RB)

Mode: 16QAM

(LTE 15MHz) 16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26865	831.500	94.0	92.8	67.1	65.9	- 5.0	1.3
26915	836.500	93.6	92.7	66.7	65.7	- 5.0	1.4
26965	841.500	93.5	92.8	66.7	65.2	- 5.0	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26865	831.500	20.6	20.6	0.115	38.5	+17.9
26915	836.500	20.5	20.6	0.115	38.5	+17.9
26965	841.500	20.4	21.2	0.132	38.5	+17.3

Calculated result at 841.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	92.8 dB(uV)
Substitution Measurement (Msv)	=	-65.2 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	21.2 dBm = 0.132 W

Minimum Margin: 38.5 - 21.2 = 17.3 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2. Part 90

2-1-1) BW 1.4MHz(1RB)

Mode: QPSK

(LTE 1.4MHz)QPSK

Test Date: October 30, 2015

Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26697	814.700	94.9	94.1	67.5	65.8	- 5.0	1.2
26740	819.000	95.4	94.2	67.4	66.0	- 5.0	1.3
26783	823.300	95.4	94.2	67.4	66.0	- 5.0	1.3

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26697	814.700	21.2	22.1	0.162	50.0	+27.9
26740	819.000	21.7	21.9	0.155	50.0	+28.1
26783	823.300	21.7	21.9	0.155	50.0	+28.1

Calculated result at 814.700 MHz, as the worst point shown on underline:

Emission Measurment (Mv)	=	94.1 dB(uV)
Substitution Measurement (Msv)	=	-65.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.2 dB
Result (ERPv)	=	22.1 dBm = 0.162 W

Minimum Margin: 50.0 - 22.1 = 27.9 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-1-2) BW 1.4MHz(1RB)

Mode: 16QAM

(LTE 1.4MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26697	814.700	94.2	93.2	67.5	65.8	- 5.0	1.2
26740	819.000	94.6	93.4	67.4	66.0	- 5.0	1.3
26783	823.300	94.6	93.3	67.4	66.0	- 5.0	1.3

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26697	814.700	20.5	21.2	0.132	50.0	+28.8
26740	819.000	20.9	21.1	0.129	50.0	+28.9
26783	823.300	20.9	21.0	0.126	50.0	+29.0

Calculated result at 814.700 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.2 dB(uV)
Substitution Measurement (Msv)	=	-65.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.2 dB
Result (ERPv)	=	21.2 dBm = 0.132 W

Minimum Margin: 50.0 - 21.2 = 28.8 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-2-1) BW 3MHz(1RB)

Mode: QPSK

(LTE 3MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26705	815.500	95.2	94.0	67.5	65.8	- 5.0	1.2
26740	819.000	95.3	94.1	67.4	66.0	- 5.0	1.3
26775	822.500	95.4	94.1	67.4	66.0	- 5.0	1.2

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26705	815.500	21.5	22.0	0.158	50.0	+28.0
26740	819.000	21.6	21.8	0.151	50.0	+28.2
26775	822.500	21.8	21.9	0.155	50.0	+28.1

Calculated result at 815.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	94.0 dB(uV)
Substitution Measurement (Msv)	=	-65.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.2 dB
Result (ERPv)	=	22.0 dBm = 0.158 W

Minimum Margin: 50.0 - 22.0 = 28.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-2-2) BW 3MHz(1RB)

Mode: 16QAM

(LTE 3MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26705	815.500	94.5	93.1	67.5	65.8	- 5.0	1.2
26740	819.000	94.6	93.2	67.4	66.0	- 5.0	1.3
26775	822.500	94.6	93.4	67.4	66.0	- 5.0	1.2

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26705	815.500	20.8	21.1	0.129	50.0	+28.9
26740	819.000	20.9	20.9	0.123	50.0	+29.1
26775	822.500	21.0	21.2	0.132	50.0	+28.8

Calculated result at 822.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.4 dB(uV)
Substitution Measurement (Msv)	=	-66.0 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.2 dB
Result (ERPv)	=	21.2 dBm = 0.132 W

Minimum Margin: 50.0 - 21.2 = 28.8 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-3-1) BW 5MHz(1RB)

Mode: QPSK

(LTE 5MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26715	816.500	95.2	94.0	67.4	65.9	- 5.0	1.2
26740	819.000	95.4	94.1	67.4	66.0	- 5.0	1.3
26765	821.500	95.6	94.2	67.4	66.0	- 5.0	1.2

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26715	816.500	21.6	21.9	0.155	50.0	+28.1
26740	819.000	21.7	21.8	0.151	50.0	+28.2
26765	821.500	22.0	22.0	0.158	50.0	+28.0

Calculated result at 821.500 MHz, as the worst point shown on underline:

Emission Measurement (Mh)	=	95.6 dB(uV)
Substitution Measurement (Msh)	=	-67.4 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.2 dB
Result (ERPh)	=	22.0 dBm = 0.158 W

Minimum Margin: 50.0 - 22.0 = 28.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-3-2) BW 5MHz(1RB)

Mode: 16QAM

(LTE 5MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26715	816.500	94.5	93.3	67.4	65.9	- 5.0	1.2
26740	819.000	94.7	93.3	67.4	66.0	- 5.0	1.3
26765	821.500	94.8	93.4	67.4	66.0	- 5.0	1.2

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26715	816.500	20.9	21.2	0.132	50.0	+28.8
26740	819.000	21.0	21.0	0.126	50.0	+29.0
26765	821.500	21.2	21.2	0.132	50.0	+28.8

Calculated result at 816.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.3 dB(uV)
Substitution Measurement (Msv)	=	-65.9 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.2 dB
Result (ERPv)	=	21.2 dBm = 0.132 W

Minimum Margin: 50.0 - 21.2 = 28.8 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-4-1) BW 10MHz(1RB)

Mode: QPSK

(LTE 10MHz)QPSK

Test Date: October 30, 2015
 Temp.: 22 °C, Humi: 43 %

1. Measurement Results

Transmitting Frequency		Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
CH	[MHz]	Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26740	819.000	95.4	94.0	67.4	66.0	- 5.0	1.3

2. Calculation Results

Transmitting Frequency		Average ERP [dBm]		Maximum Average ERP	Limits	Margin
CH	[MHz]	Hori. (ERPh)	Vert. (ERPv)	[W]	[dBm]	[dB]
26740	819.000	21.7	21.7	0.148	50.0	+28.3

Calculated result at 819.000 MHz, as the worst point shown on underline:

Emission Measurement (Mh)	=	95.4 dB(uV)
Substitution Measurement (Msh)	=	-67.4 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.3 dB
Result (ERPh)	=	21.7 dBm = 0.148 W

Minimum Margin: 50.0 - 21.7 = 28.3 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-4-2) BW 10MHz(1RB)
 Mode: 16QAM

(LTE 10MHz) 16QAM

Test Date: October 30, 2015
 Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
26740	819.000	94.6	93.3	67.4	66.0	- 5.0	1.3

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
26740	819.000	20.9	21.0	0.126	50.0	+29.0

Calculated result at 819.000 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.3 dB(uV)
Substitution Measurement (Msv)	=	-66.0 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.3 dB
Result (ERPv)	=	21.0 dBm = 0.126 W

Minimum Margin: 50.0 - 21.0 = 29.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

7.3 Modulation Characteristics (§2.1047)

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

7.4 Occupied Bandwidth (§2.1049)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.4.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

The 99% Bandwidth of BW: 1.4 MHz(QPSK) is	<u>1.09</u>	MHz	at	<u>824.7</u>	MHz
The 99% Bandwidth of BW: 1.4 MHz(16QAM) is	<u>1.08</u>	MHz	at	<u>824.7/836.5/848.3</u>	MHz
The 99% Bandwidth of BW: 3 MHz(QPSK) is	<u>2.69</u>	MHz	at	<u>825.5/836.5/847.5</u>	MHz
The 99% Bandwidth of BW: 3 MHz(16QAM) is	<u>2.68</u>	MHz	at	<u>825.5/836.5/847.5</u>	MHz
The 99% Bandwidth of BW: 5 MHz(QPSK) is	<u>4.48</u>	MHz	at	<u>836.5</u>	MHz
The 99% Bandwidth of BW: 5 MHz(16QAM) is	<u>4.47</u>	MHz	at	<u>826.5/846.5</u>	MHz
The 99% Bandwidth of BW: 10 MHz(QPSK) is	<u>8.95</u>	MHz	at	<u>829.0</u>	MHz
The 99% Bandwidth of BW: 10 MHz(16QAM) is	<u>8.93</u>	MHz	at	<u>829.0/836.5/844.0</u>	MHz
The 99% Bandwidth of BW: 15 MHz(QPSK) is	<u>13.4</u>	MHz	at	<u>831.5/836.5/841.5</u>	MHz
The 99% Bandwidth of BW: 15 MHz(16QAM) is	<u>13.4</u>	MHz	at	<u>831.5/836.5/841.5</u>	MHz

The 26dB Bandwidth of BW: 1.4 MHz(QPSK) is	<u>1.21</u>	MHz	at	<u>824.7/836.5/848.3</u>	MHz
The 26dB Bandwidth of BW: 1.4 MHz(16QAM) is	<u>1.22</u>	MHz	at	<u>824.7/836.5/848.3</u>	MHz
The 26dB Bandwidth of BW: 3 MHz(QPSK) is	<u>2.96</u>	MHz	at	<u>825.5/836.5</u>	MHz
The 26dB Bandwidth of BW: 3 MHz(16QAM) is	<u>2.94</u>	MHz	at	<u>847.5</u>	MHz
The 26dB Bandwidth of BW: 5 MHz(QPSK) is	<u>4.88</u>	MHz	at	<u>836.5/846.5</u>	MHz
The 26dB Bandwidth of BW: 5 MHz(16QAM) is	<u>4.85</u>	MHz	at	<u>826.5/836.5/846.5</u>	MHz
The 26dB Bandwidth of BW: 10 MHz(QPSK) is	<u>9.67</u>	MHz	at	<u>836.5</u>	MHz
The 26dB Bandwidth of BW: 10 MHz(16QAM) is	<u>9.66</u>	MHz	at	<u>829.0/836.5/844.0</u>	MHz
The 26dB Bandwidth of BW: 15 MHz(QPSK) is	<u>14.4</u>	MHz	at	<u>831.5/836.5/841.5</u>	MHz
The 26dB Bandwidth of BW: 15 MHz(16QAM) is	<u>14.4</u>	MHz	at	<u>831.5/836.5/841.5</u>	MHz

Part 90

The 99% Bandwidth of BW: 1.4 MHz(QPSK) is	<u>1.09</u>	MHz	at	<u>814.7</u>	MHz
The 99% Bandwidth of BW: 1.4 MHz(16QAM) is	<u>1.08</u>	MHz	at	<u>814.7/819.0/823.3</u>	MHz
The 99% Bandwidth of BW: 3 MHz(QPSK) is	<u>2.68</u>	MHz	at	<u>815.0/819.0/822.5</u>	MHz
The 99% Bandwidth of BW: 3 MHz(16QAM) is	<u>2.68</u>	MHz	at	<u>815.0/819.0/822.5</u>	MHz
The 99% Bandwidth of BW: 5 MHz(QPSK) is	<u>4.48</u>	MHz	at	<u>819.0/821.5</u>	MHz
The 99% Bandwidth of BW: 5 MHz(16QAM) is	<u>4.47</u>	MHz	at	<u>816.5/821.5</u>	MHz
The 99% Bandwidth of BW: 10 MHz(QPSK) is	<u>8.93</u>	MHz	at	<u>819.0</u>	MHz
The 99% Bandwidth of BW: 10 MHz(16QAM) is	<u>8.93</u>	MHz	at	<u>819.0</u>	MHz

The 26dB Bandwidth of BW: 1.4 MHz(QPSK) is	<u>1.22</u>	MHz	at	<u>823.3</u>	MHz
The 26dB Bandwidth of BW: 1.4 MHz(16QAM) is	<u>1.23</u>	MHz	at	<u>814.7/823.3</u>	MHz
The 26dB Bandwidth of BW: 3 MHz(QPSK) is	<u>2.94</u>	MHz	at	<u>815.5/822.5</u>	MHz
The 26dB Bandwidth of BW: 3 MHz(16QAM) is	<u>2.94</u>	MHz	at	<u>815.5/822.5</u>	MHz
The 26dB Bandwidth of BW: 5 MHz(QPSK) is	<u>4.89</u>	MHz	at	<u>816.5</u>	MHz
The 26dB Bandwidth of BW: 5 MHz(16QAM) is	<u>4.83</u>	MHz	at	<u>816.5/819.0/821.5</u>	MHz
The 26dB Bandwidth of BW: 10 MHz(QPSK) is	<u>9.66</u>	MHz	at	<u>819.0</u>	MHz
The 26dB Bandwidth of BW: 10 MHz(16QAM) is	<u>9.67</u>	MHz	at	<u>819.0</u>	MHz

Uncertainty of Measurement Results ± 0.9 %(2σ)

Remarks : _____


7.4.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.4.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

LTE Bandwidth	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz
Res. Bandwidth	20 kHz	30 kHz	51 kHz	100 kHz	150 kHz
Video Bandwidth	62 kHz	100 kHz	160 kHz	300 kHz	470 kHz
Span	3 MHz	6 MHz	10 MHz	20 MHz	30 MHz
Sweep Time	AUTO	AUTO	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold	Maxhold	Maxhold

7.4.4 Test Data

The resolution bandwidth was set to about 1 – 5 % of emission bandwidth, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

Test Date :October 28, 2015

Temp.:26°C, Humi:36%


1. Part 22

1-1-1) BW 1.4MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26797	824.70	1.09	1.21
26915	836.50	1.08	1.21
27033	848.30	1.08	1.21


Low Channel

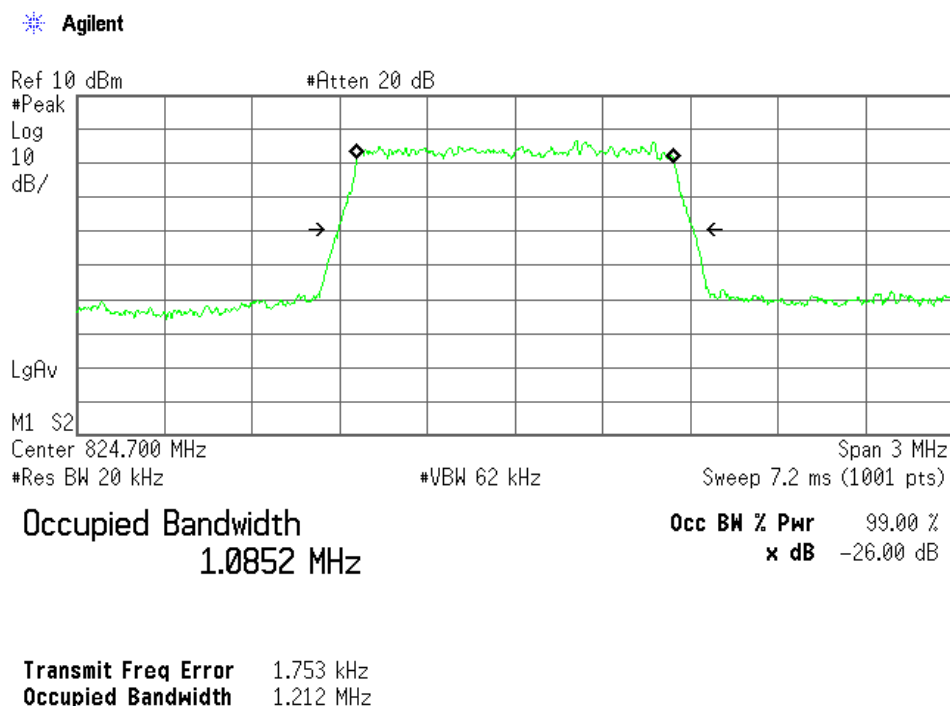

Middle Channel

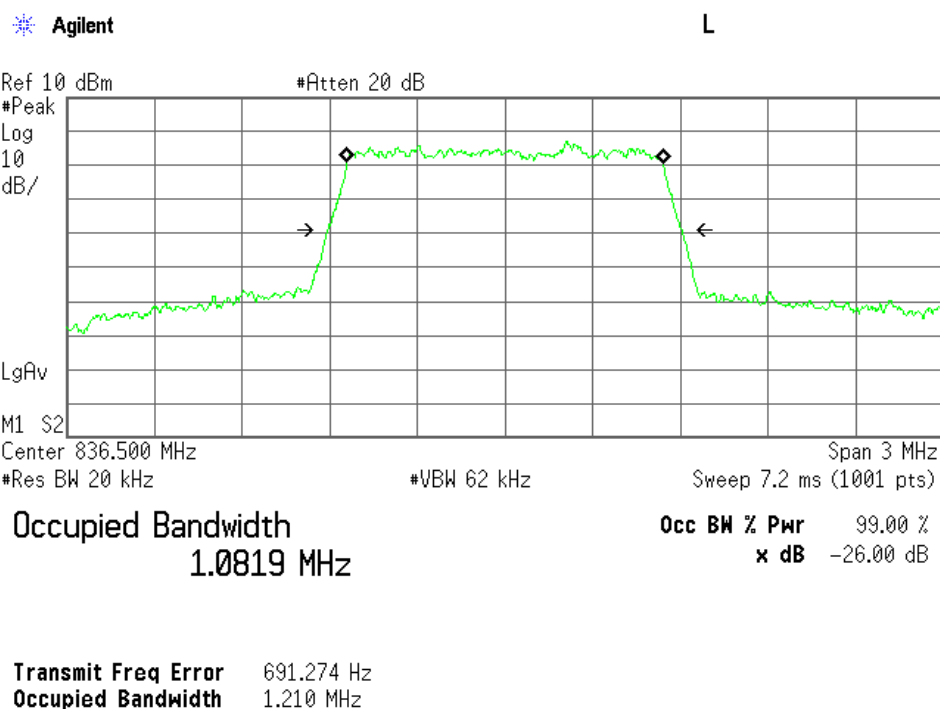


High Channel

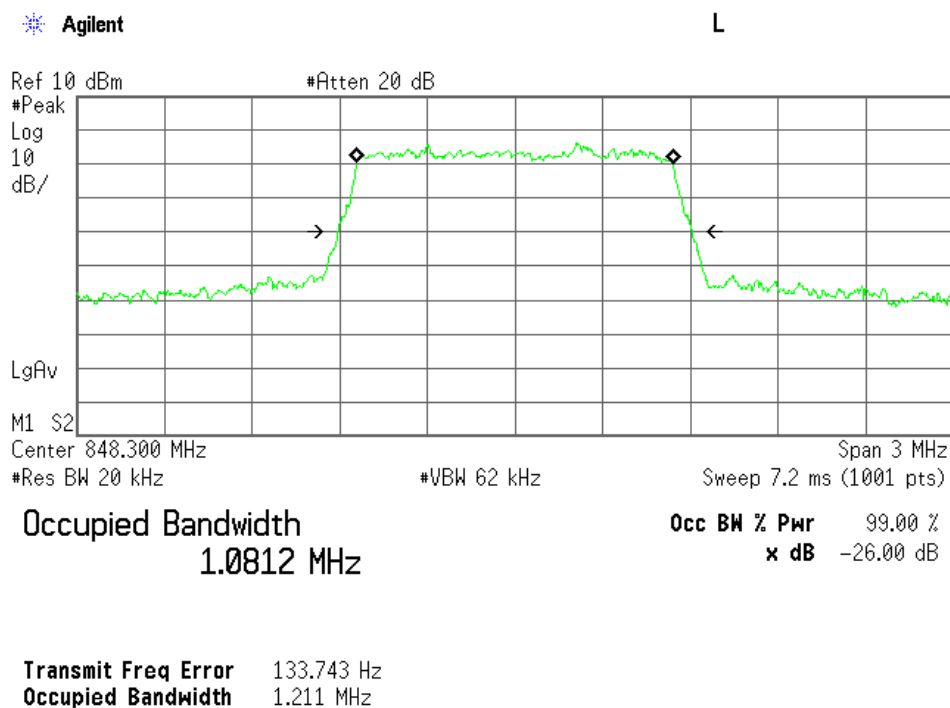


1-1-2) BW 1.4MHz(Full RB)
 Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26797	824.70	1.08	1.22
26915	836.50	1.08	1.22
27033	848.30	1.08	1.22


Low Channel

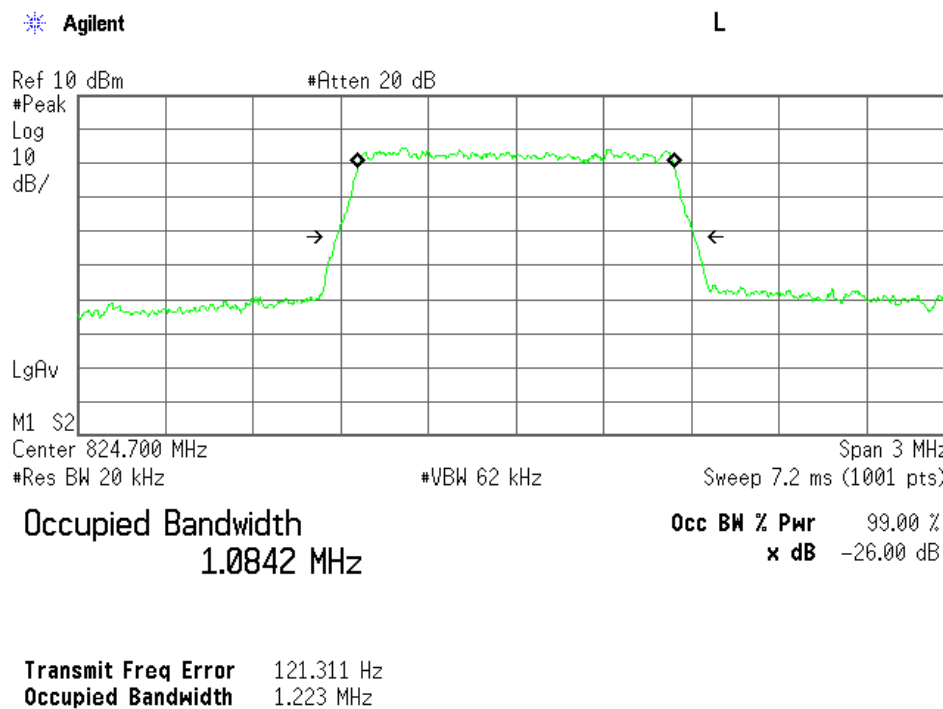

Middle Channel

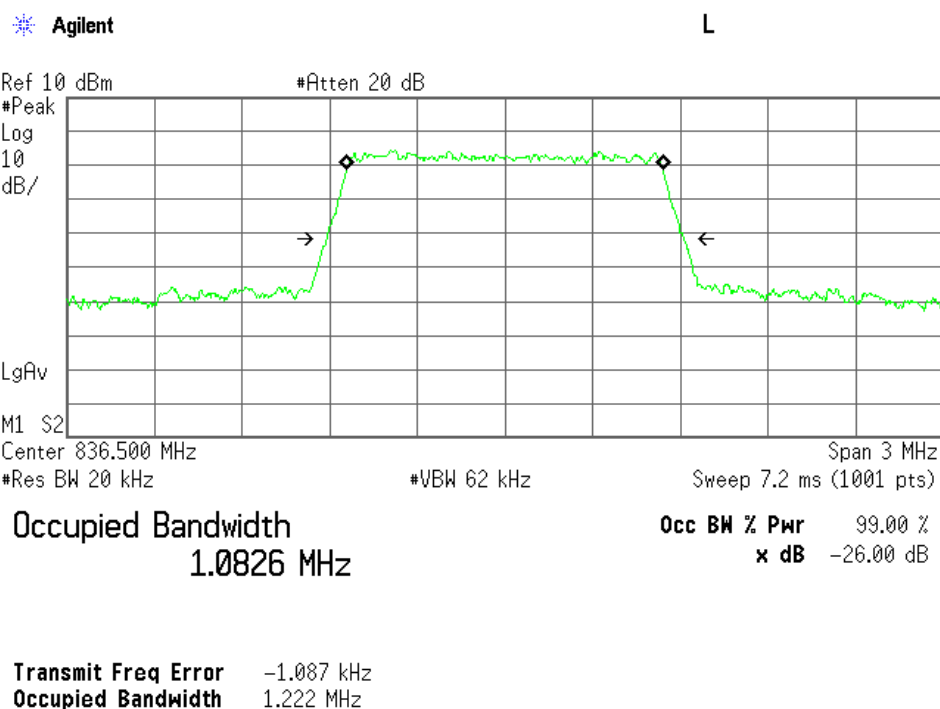

High Channel

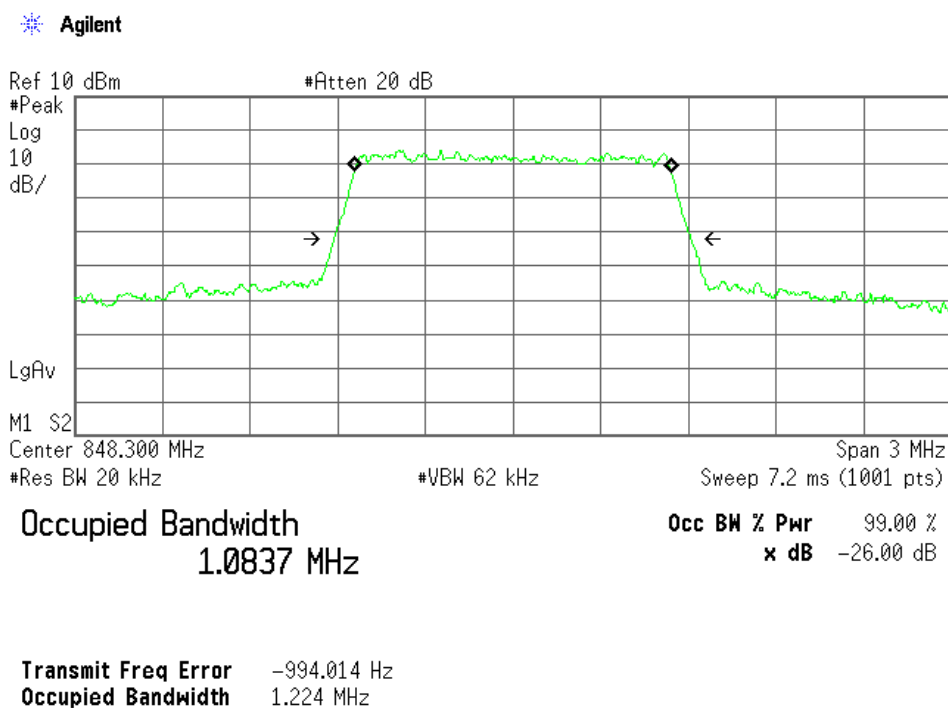


1-2-1) BW 3MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26805	825.50	2.69	2.96
26915	836.50	2.69	2.96
27025	847.50	2.69	2.95


Low Channel

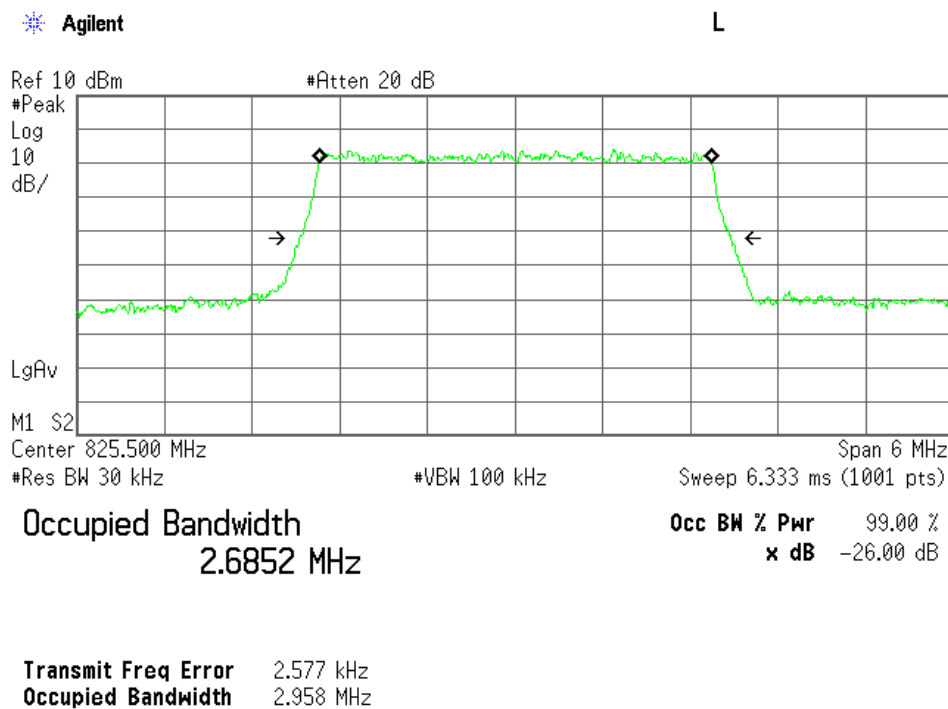

Middle Channel

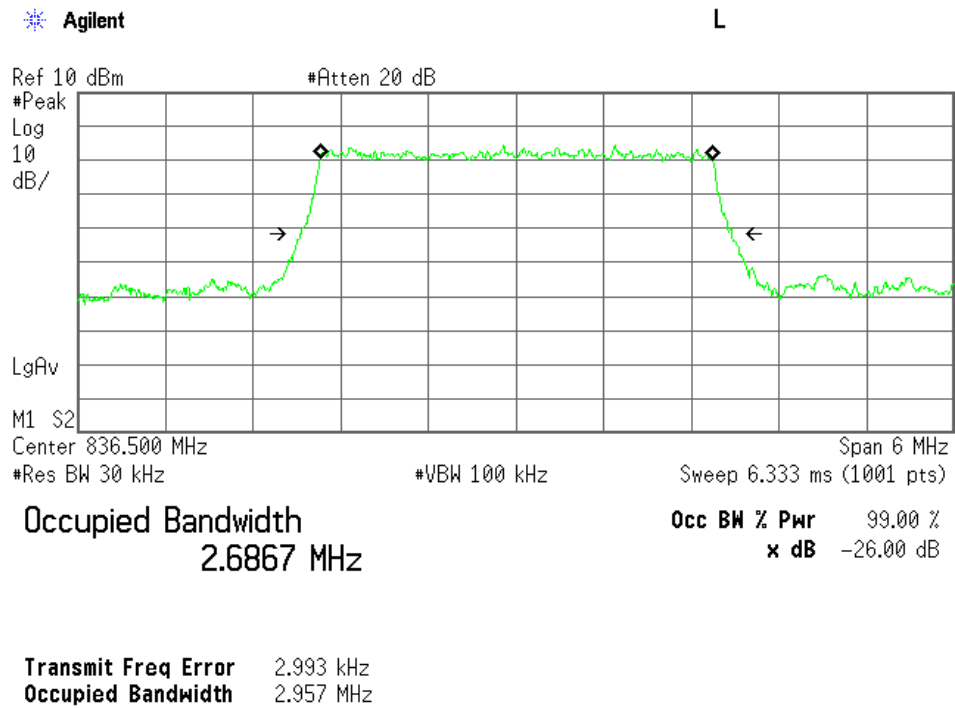

High Channel

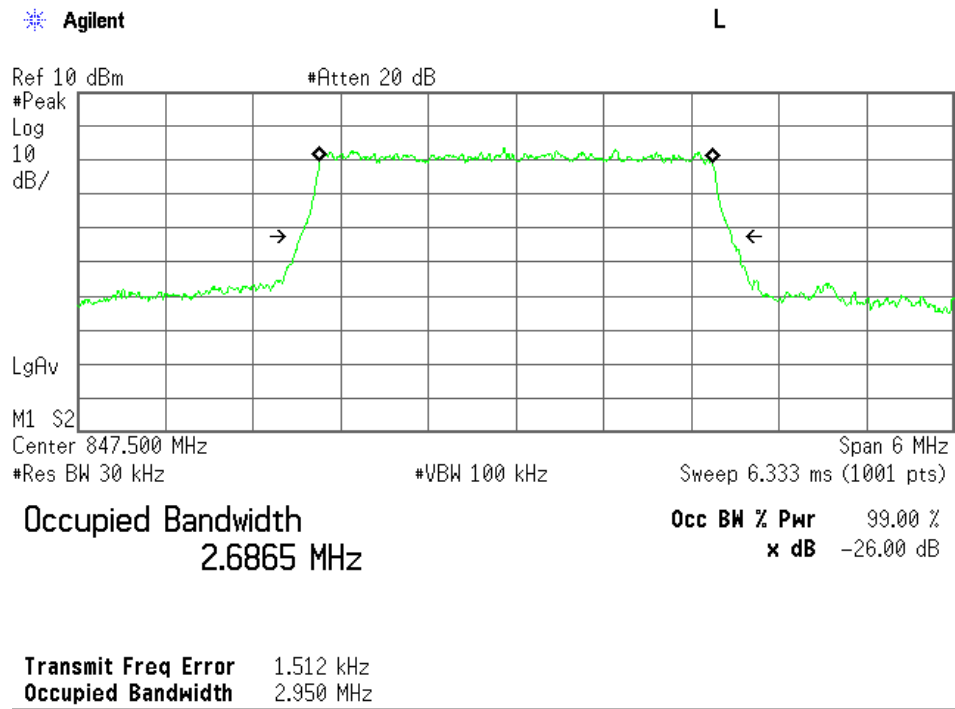


1-2-2) BW 3MHz(Full RB)


Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26805	825.50	2.68	2.93
26915	836.50	2.68	2.92
27025	847.50	2.68	2.94

Low Channel

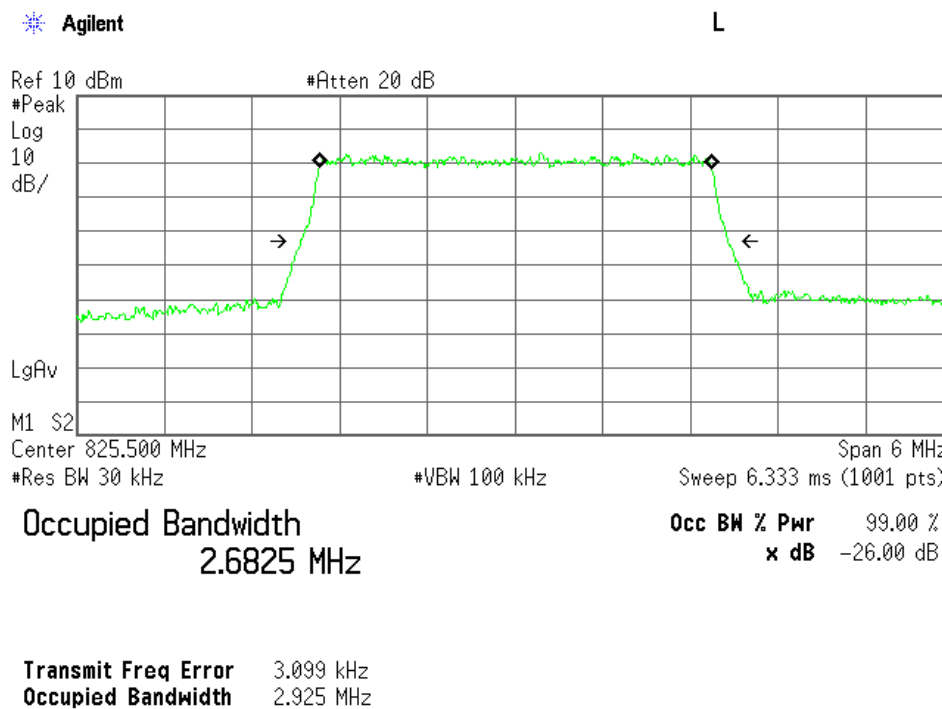


Middle Channel

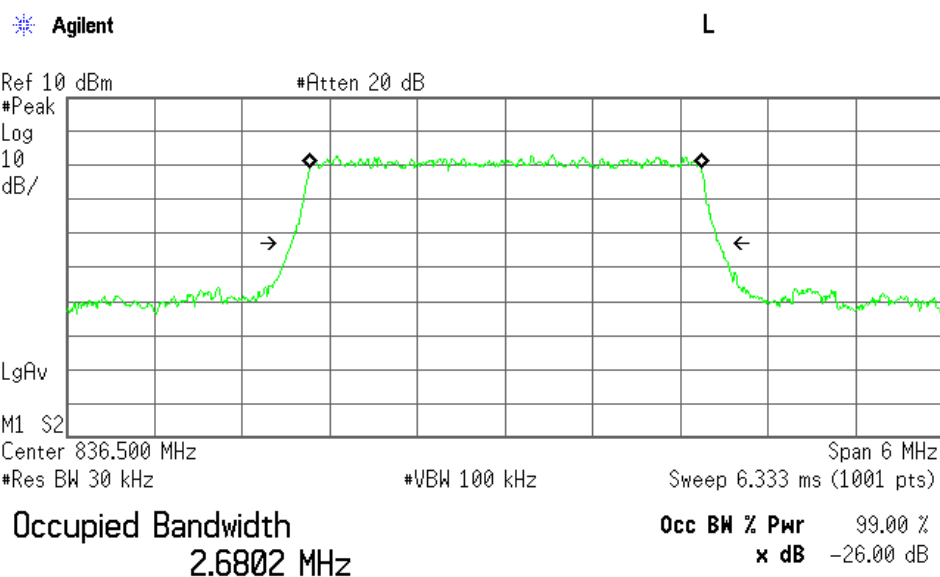

Transmit Freq Error 2.964 kHz
Occupied Bandwidth 2.924 MHz

High Channel

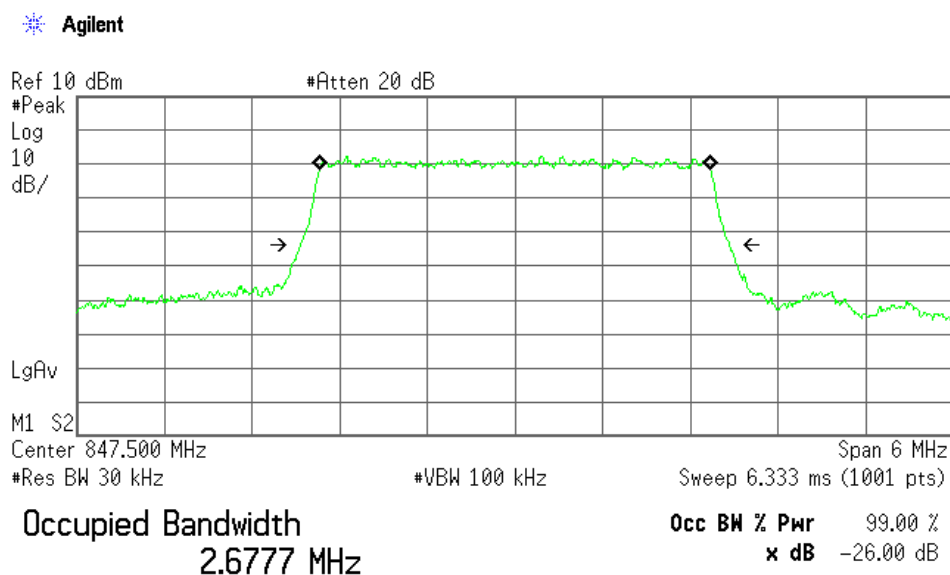


Transmit Freq Error -149.640 Hz
Occupied Bandwidth 2.939 MHz

1-3-1) BW 5MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26815	826.50	4.47	4.84
26915	836.50	4.48	4.88
27015	846.50	4.47	4.88

Low Channel

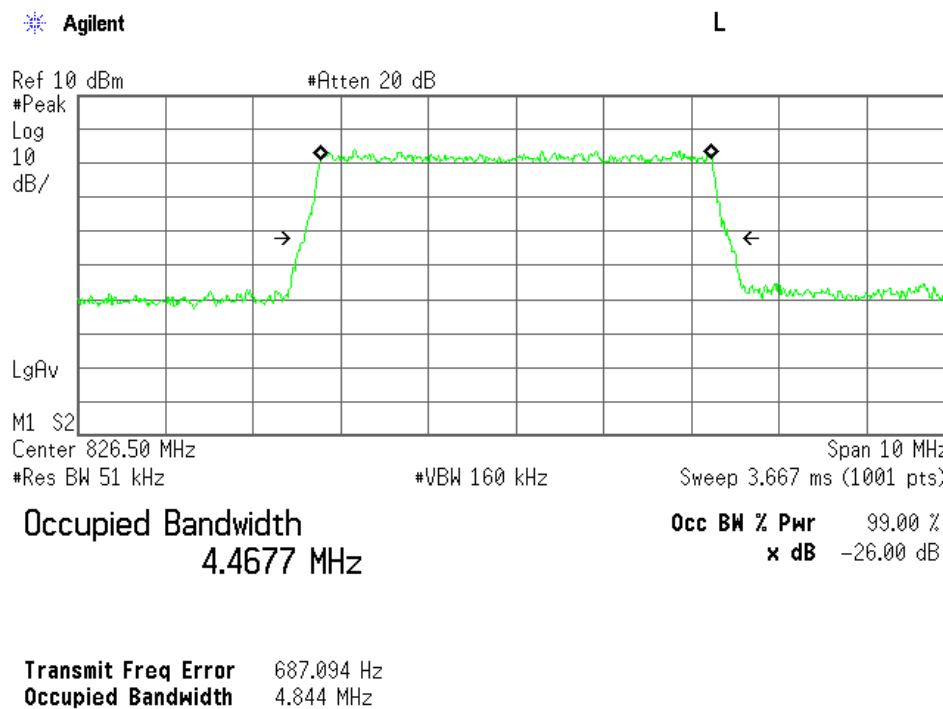


Middle Channel

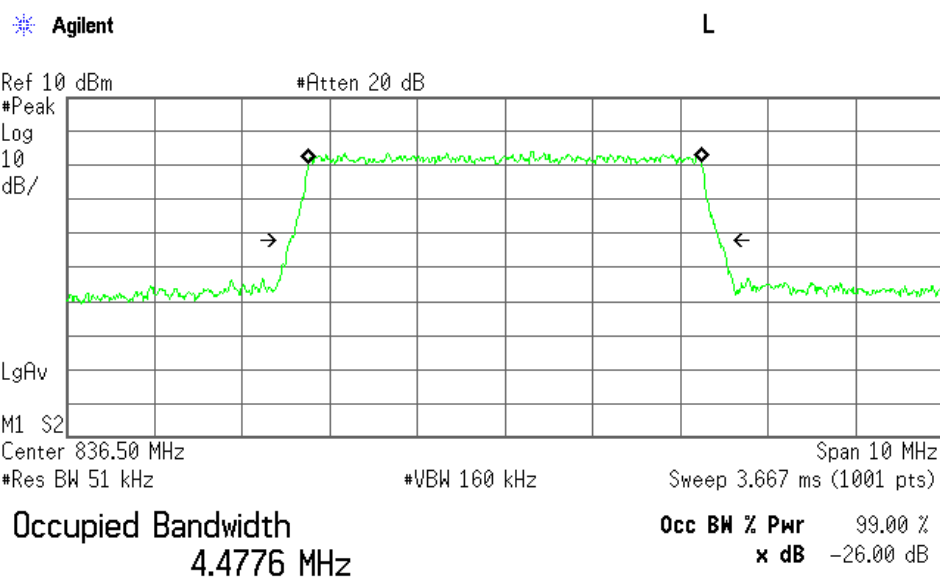

Transmit Freq Error 1.550 kHz
Occupied Bandwidth 4.883 MHz

High Channel

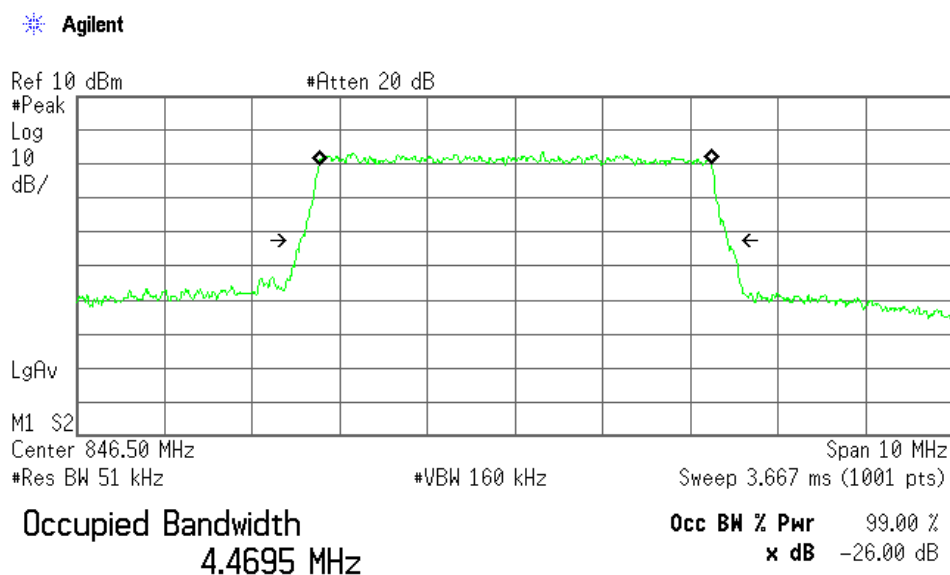


Transmit Freq Error 1.158 kHz
Occupied Bandwidth 4.883 MHz

1-3-2) BW 5MHz(Full RB)


Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26815	826.50	4.47	4.85
26915	836.50	4.46	4.85
27015	846.50	4.47	4.85


Low Channel

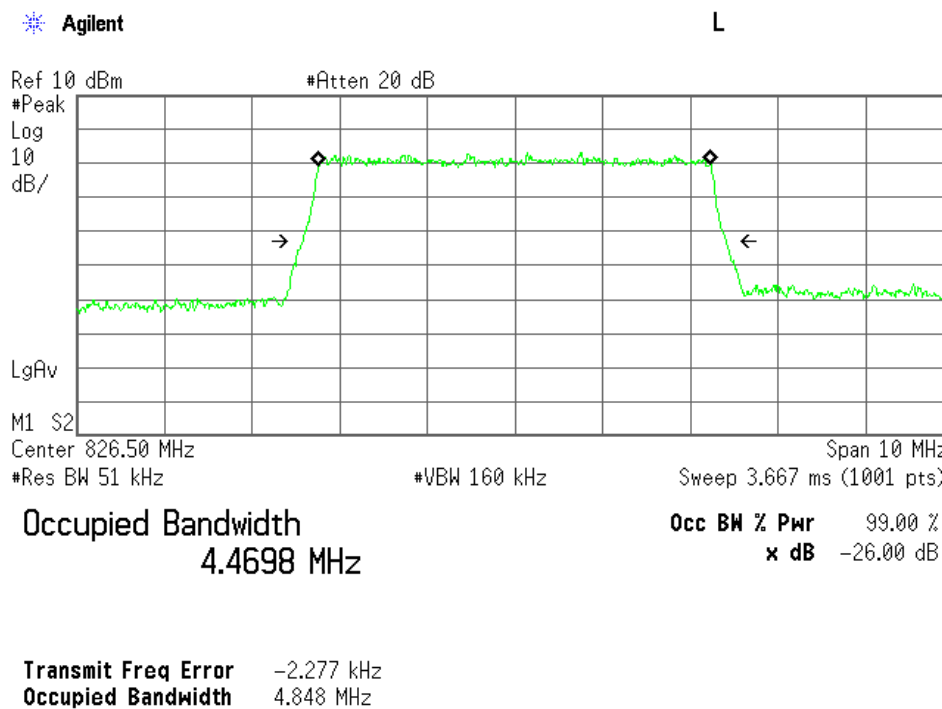

Middle Channel

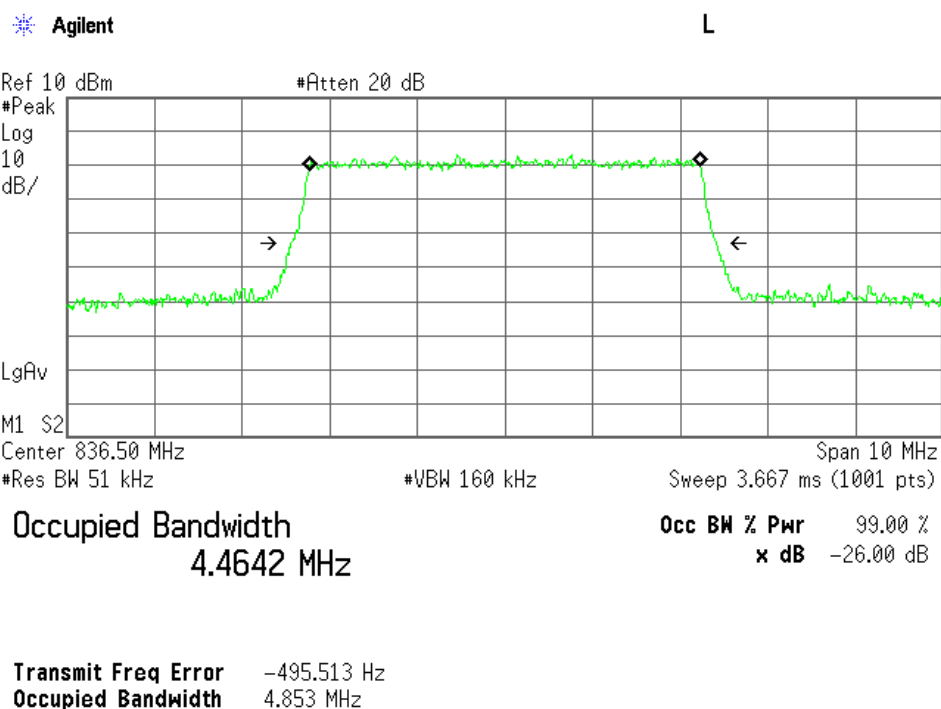

High Channel

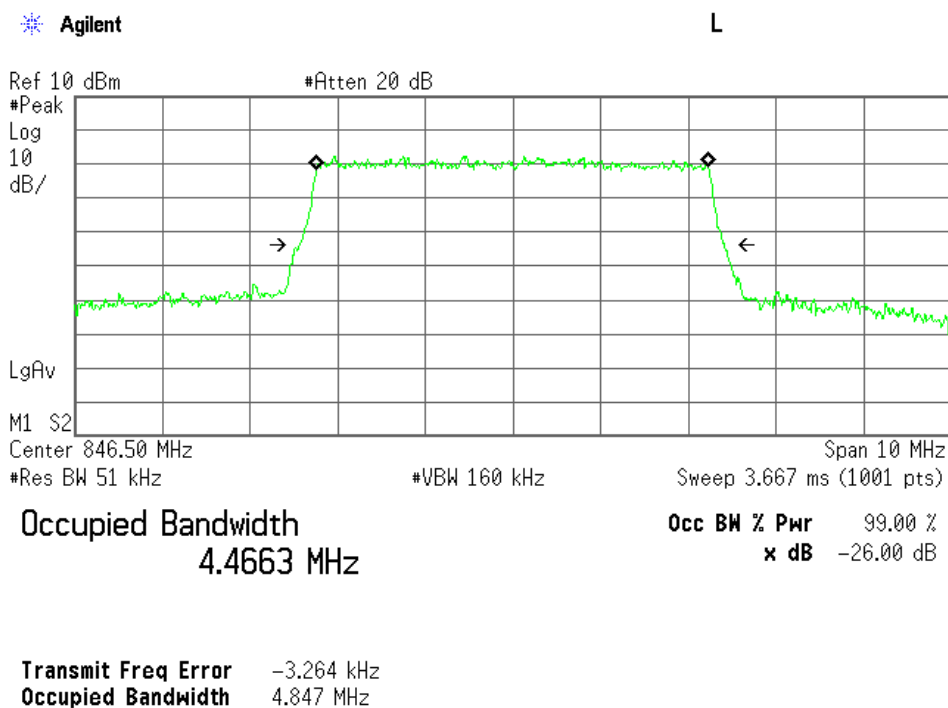


1-4-1) BW 10MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26840	829.00	8.95	9.61
26915	836.50	8.93	9.67
26990	844.00	8.93	9.66


Low Channel

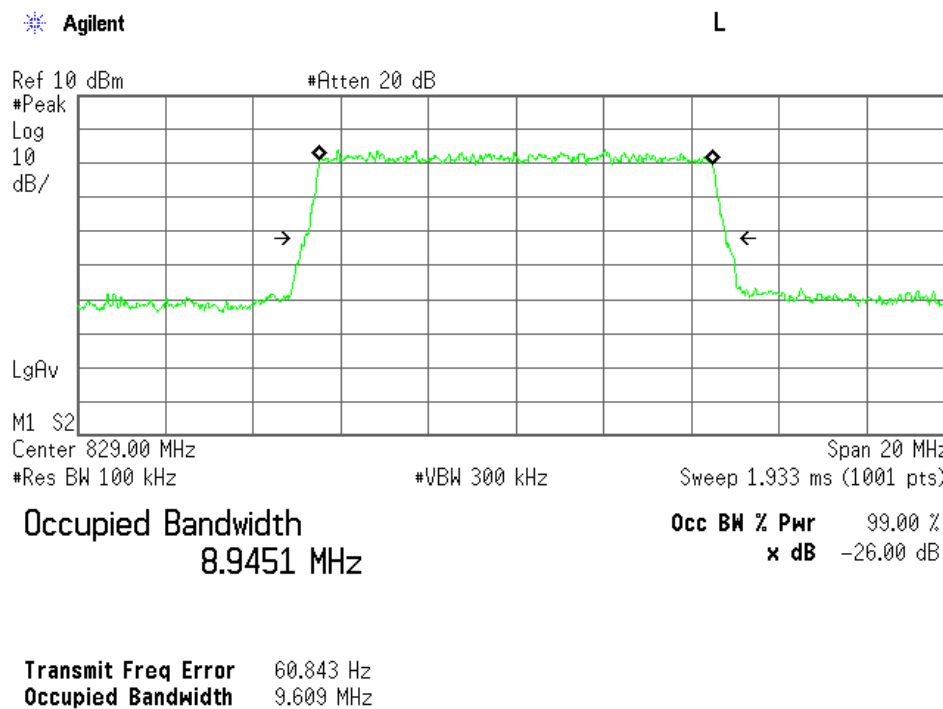

Middle Channel

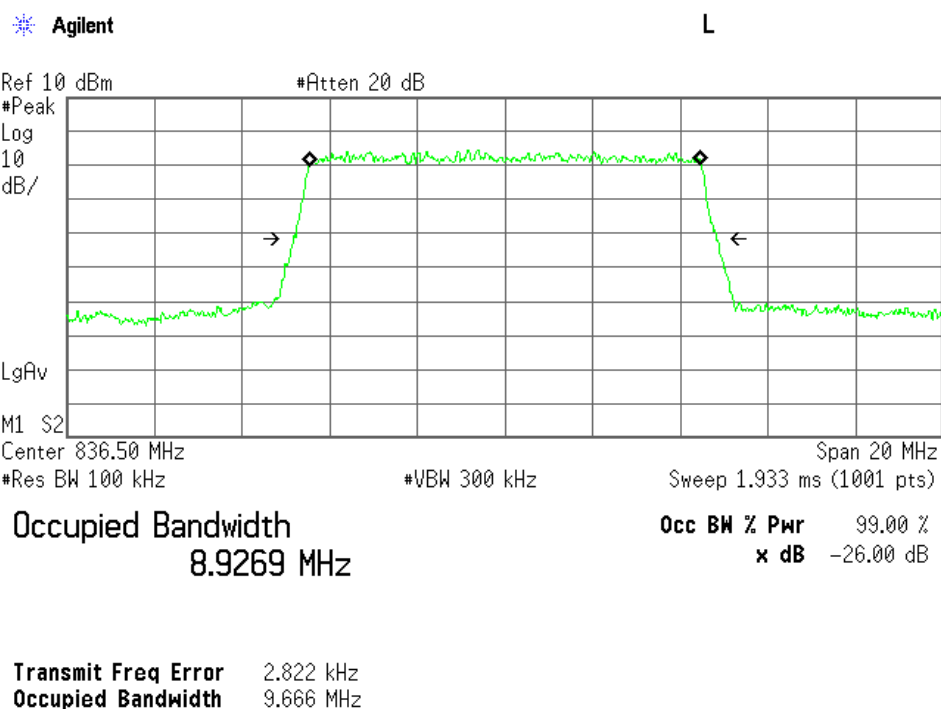

High Channel

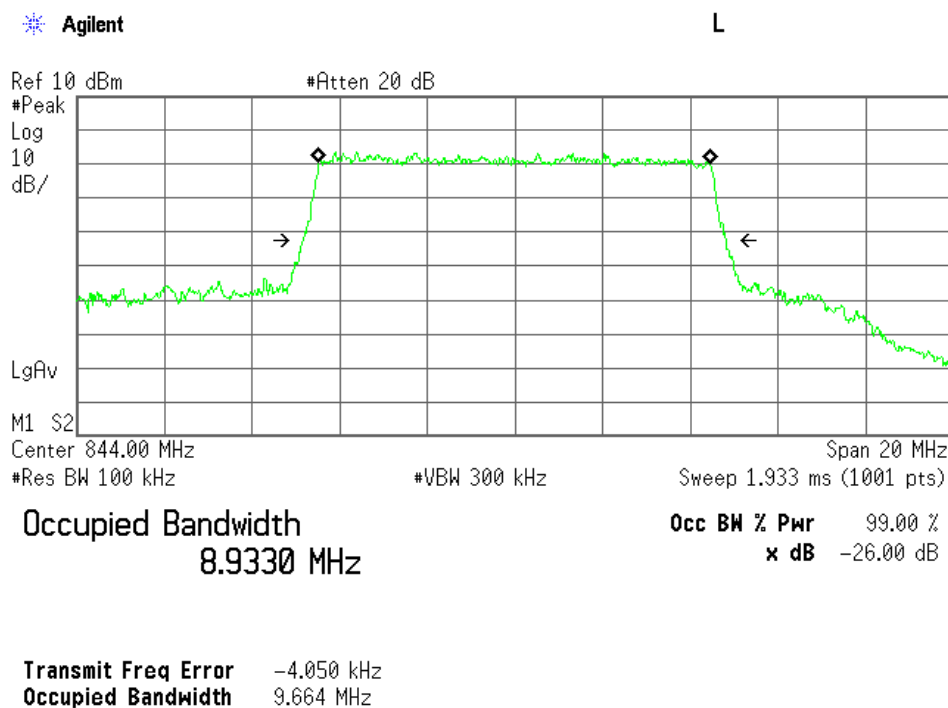


1-4-2) BW 10MHz(Full RB)


Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26840	829.00	8.93	9.66
26915	836.50	8.93	9.66
26990	844.00	8.93	9.66

Low Channel

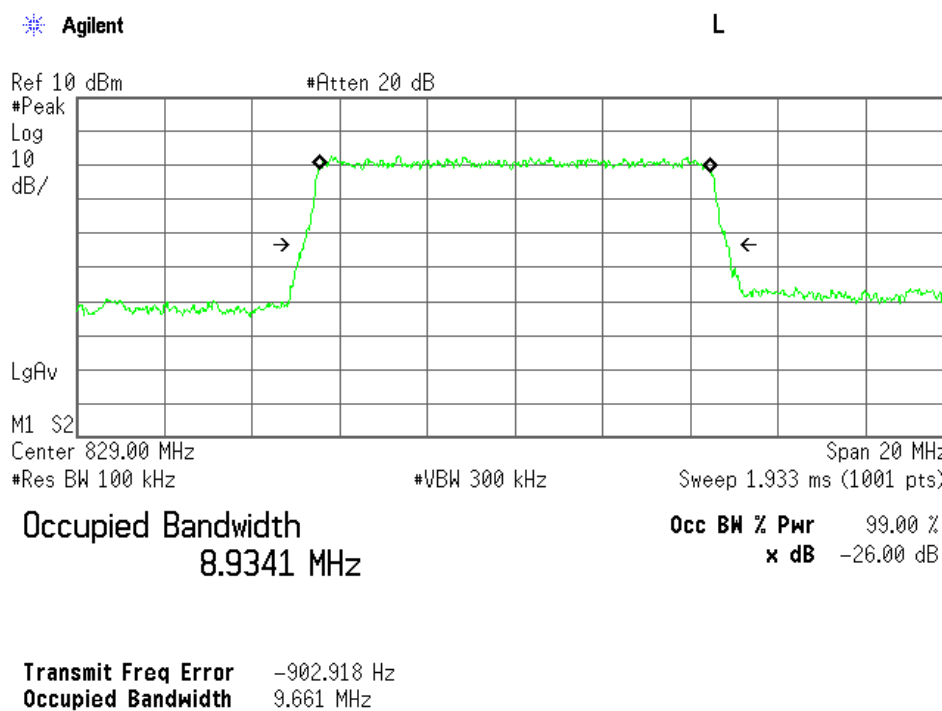


Middle Channel

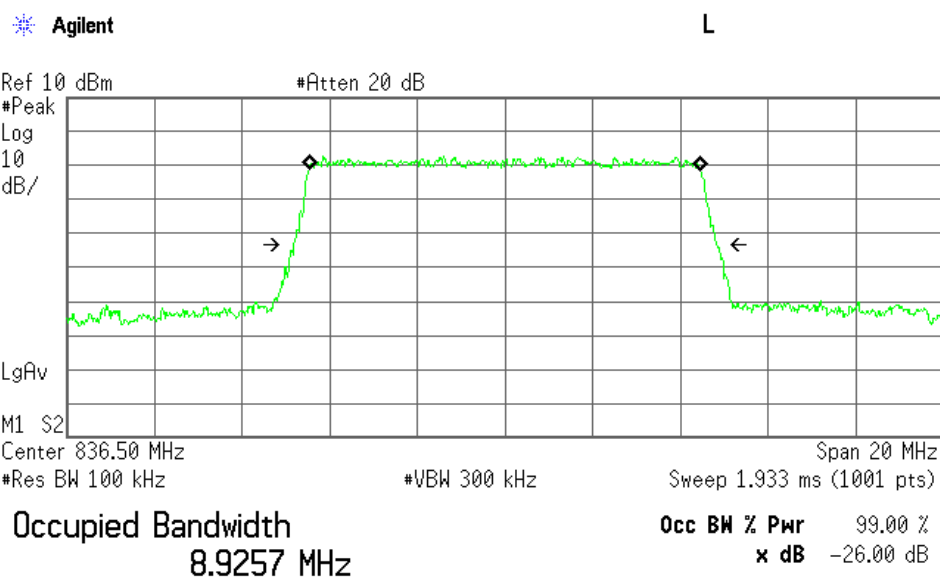

Transmit Freq Error -1.632 kHz
Occupied Bandwidth 9.659 MHz

High Channel

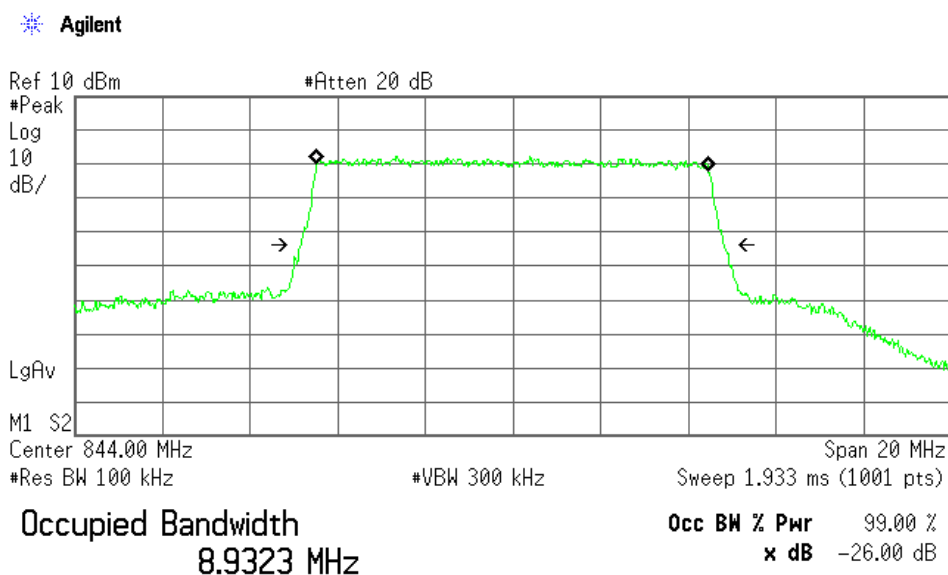


Transmit Freq Error -10.570 kHz
Occupied Bandwidth 9.661 MHz

1-5-1) BW 15MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26865	831.50	13.4	14.4
26915	836.50	13.4	14.4
26965	841.50	13.4	14.4

Low Channel

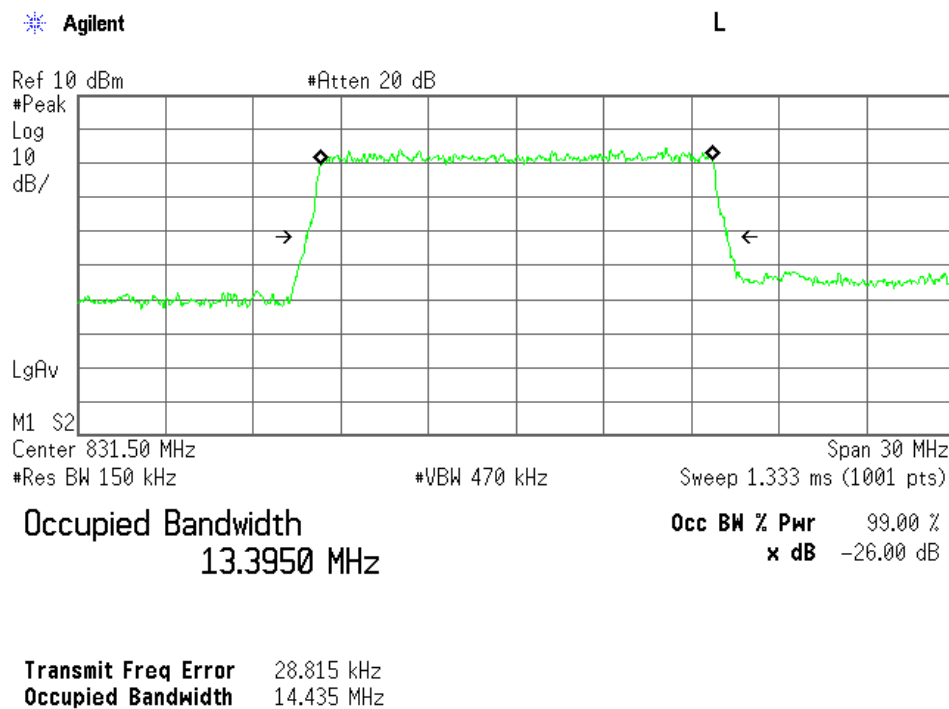


Middle Channel

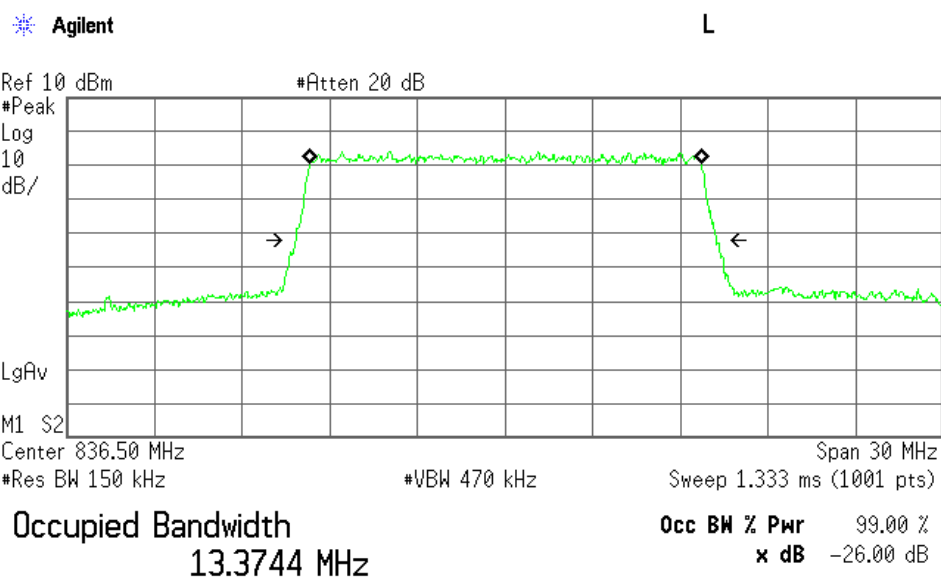

Transmit Freq Error 19.657 kHz
Occupied Bandwidth 14.378 MHz

High Channel

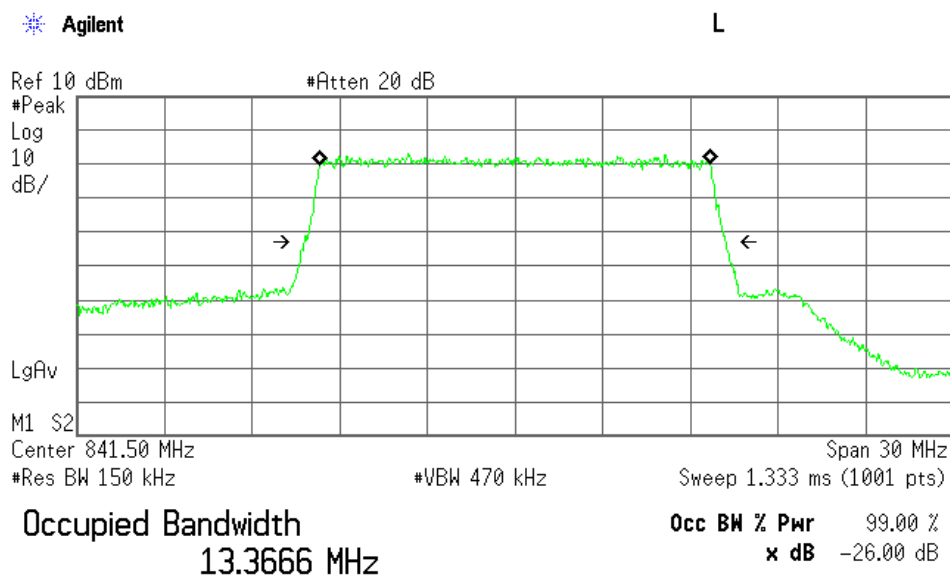


Transmit Freq Error 1.658 kHz
Occupied Bandwidth 14.440 MHz


1-5-2) BW 15MHz(Full RB)
 Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26865	831.50	13.4	14.4
26915	836.50	13.4	14.4
26965	841.50	13.4	14.4

Low Channel

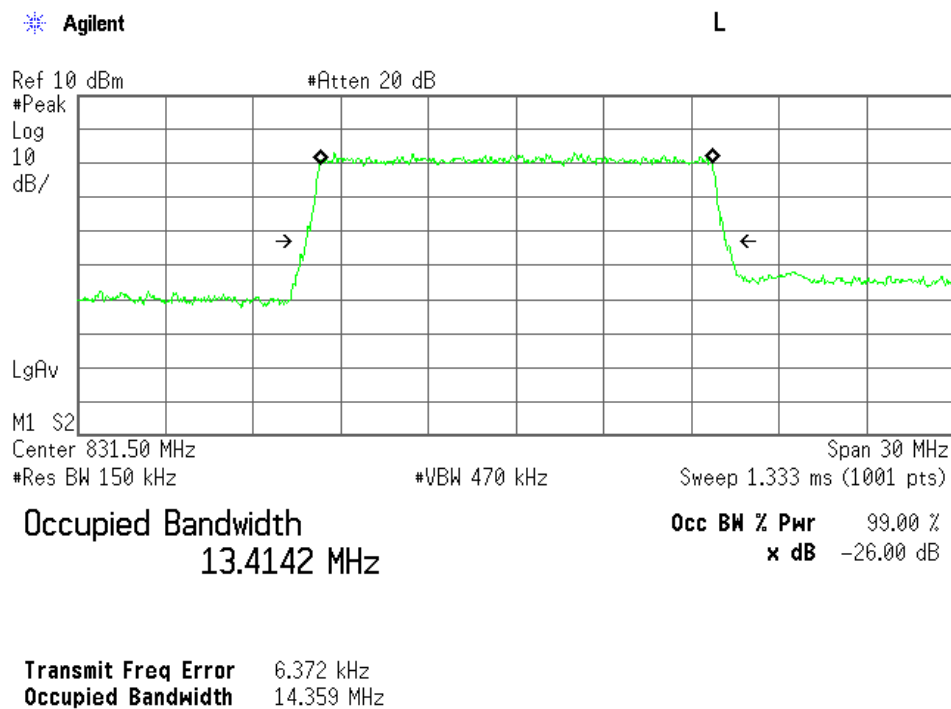


Middle Channel

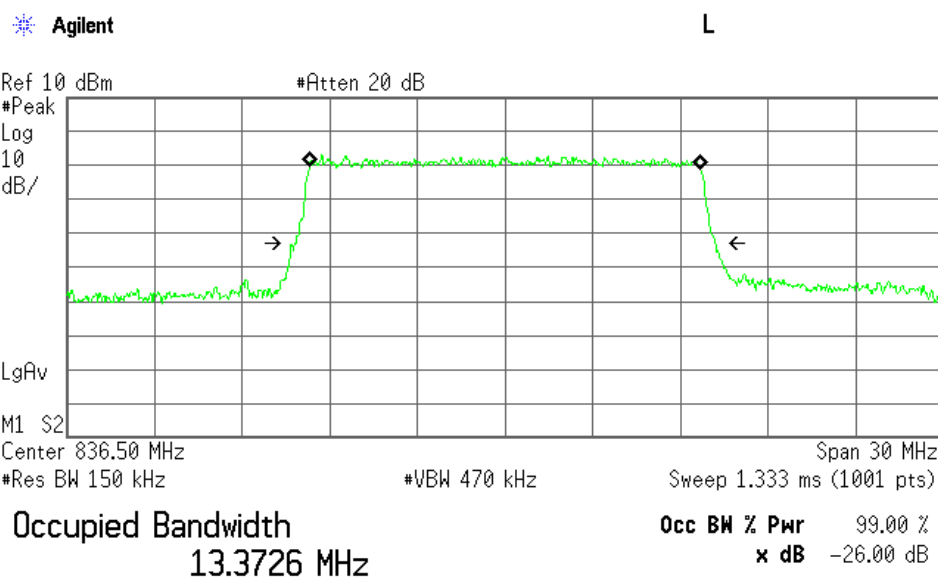

Transmit Freq Error 4.003 kHz
Occupied Bandwidth 14.413 MHz

High Channel

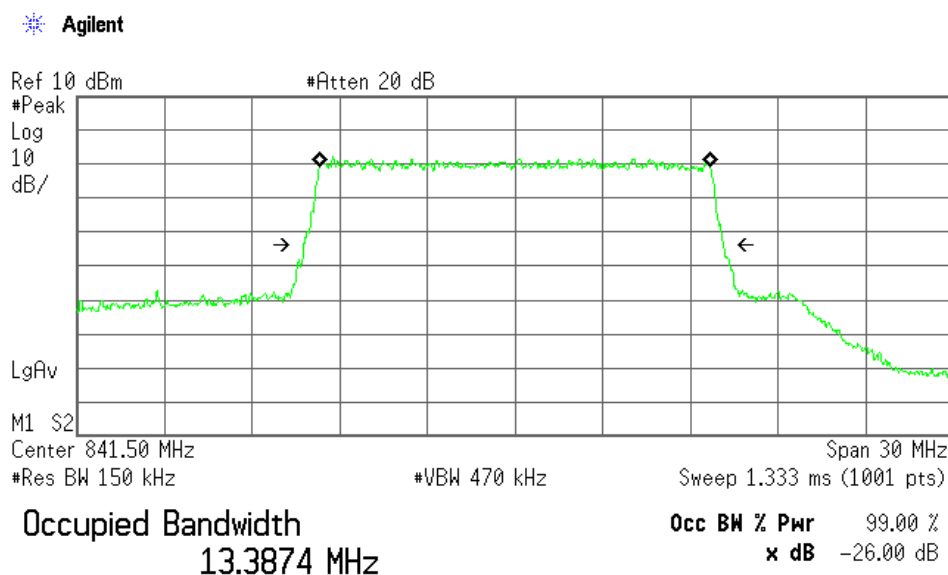

Transmit Freq Error 668.351 Hz
Occupied Bandwidth 14.371 MHz

Test Date :October 29, 2015

Temp.:25°C, Humi:34%


2. Part 90

2-1-1) BW 1.4MHz(Full RB)

Mode: QPSK


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26697	814.70	1.09	1.21
26740	819.00	1.08	1.21
26783	823.30	1.08	1.22

Low Channel

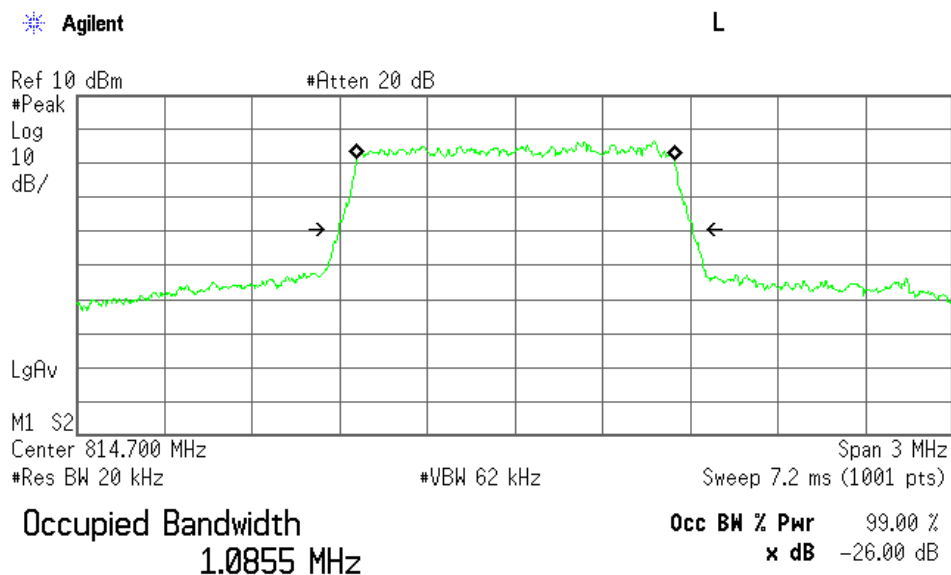


Transmit Freq Error 2.095 kHz
 Occupied Bandwidth 1.210 MHz

Middle Channel

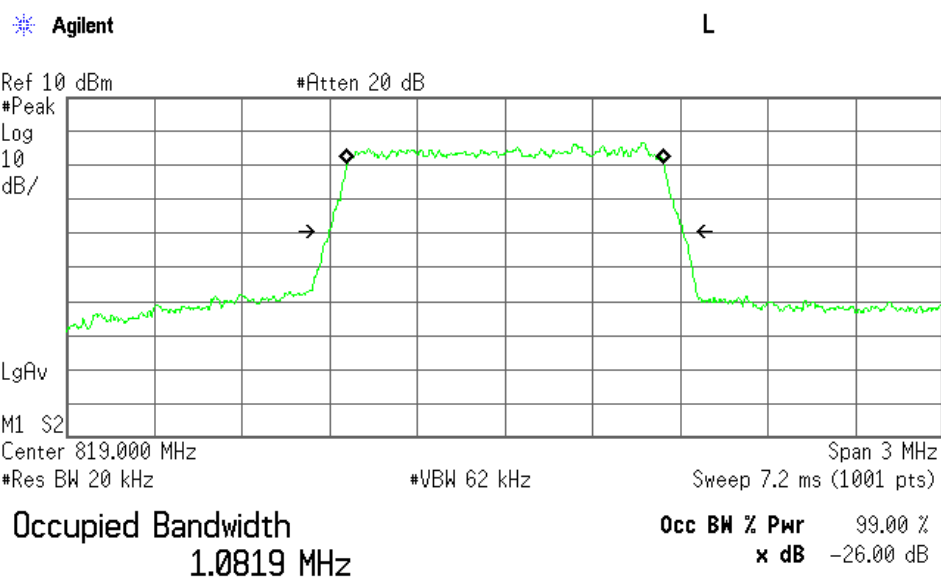

Transmit Freq Error 1.849 kHz
Occupied Bandwidth 1.209 MHz

High Channel

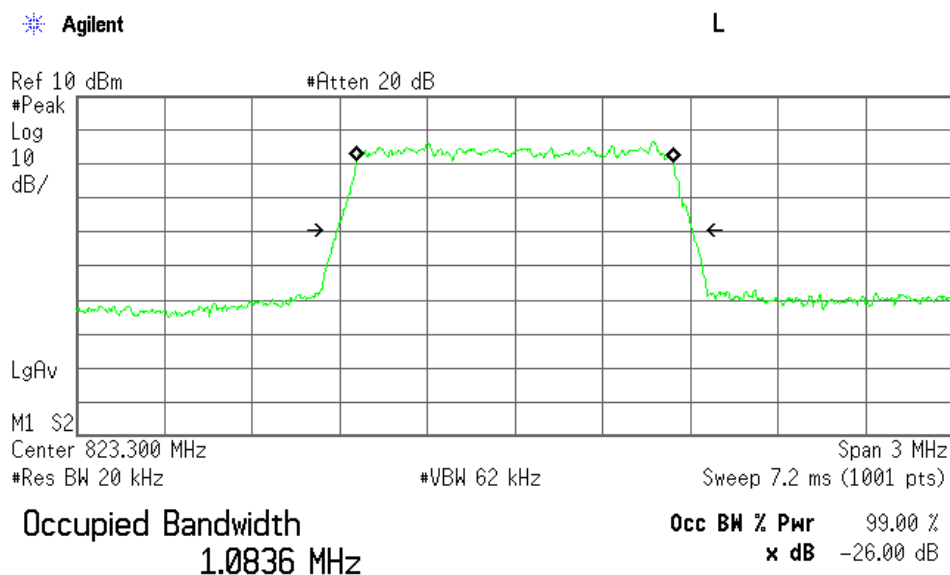

Transmit Freq Error -97.360 Hz
Occupied Bandwidth 1.216 MHz


2-1-2) BW 1.4MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26697	814.70	1.08	1.23
26740	819.00	1.08	1.22
26783	823.30	1.08	1.23

Low Channel


* Agilent

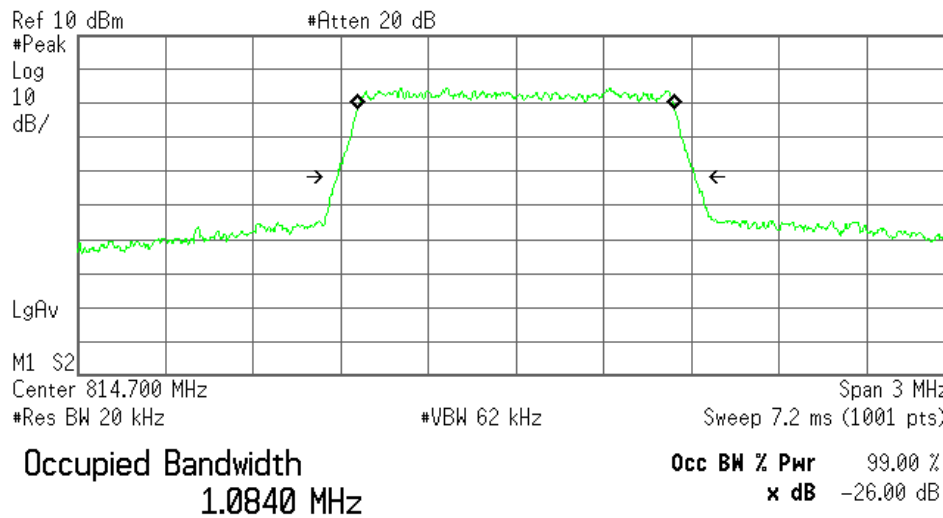

Transmit Freq Error -70.967 Hz


Occupied Bandwidth 1.225 MHz

Middle Channel

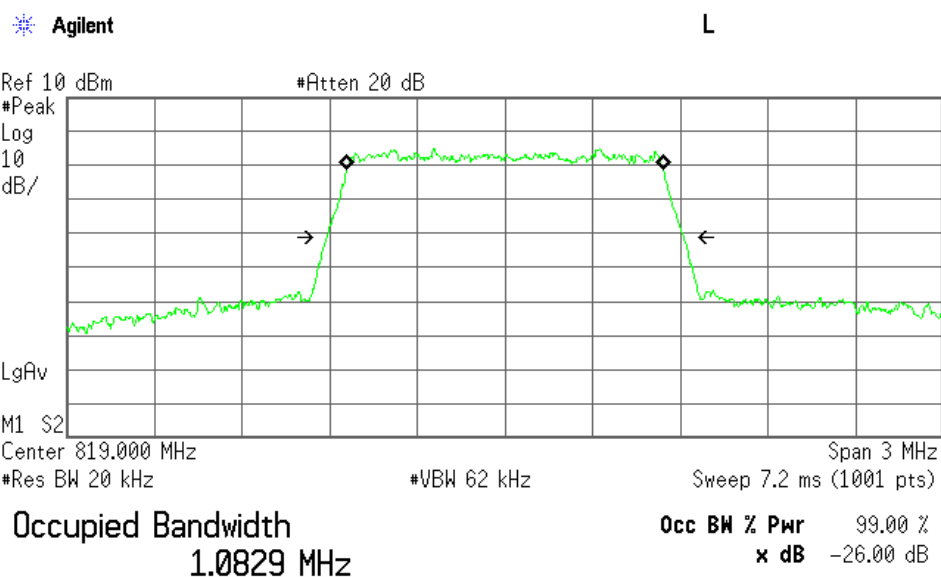

Transmit Freq Error 296.537 Hz
Occupied Bandwidth 1.224 MHz

High Channel

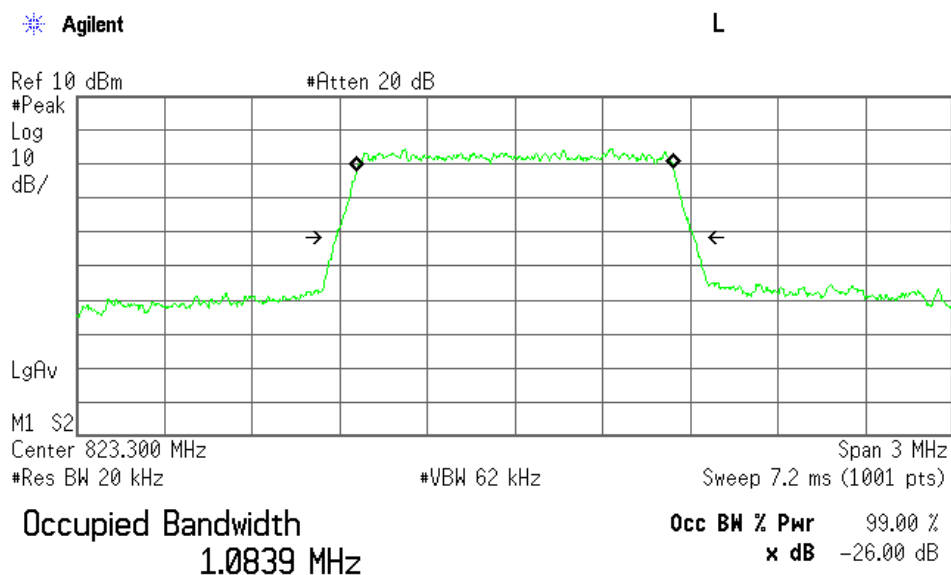


Transmit Freq Error 471.977 Hz
Occupied Bandwidth 1.225 MHz

2-2-1) BW 3MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26705	815.50	2.68	2.94
26740	819.00	2.68	2.93
26775	822.50	2.68	2.94

Low Channel

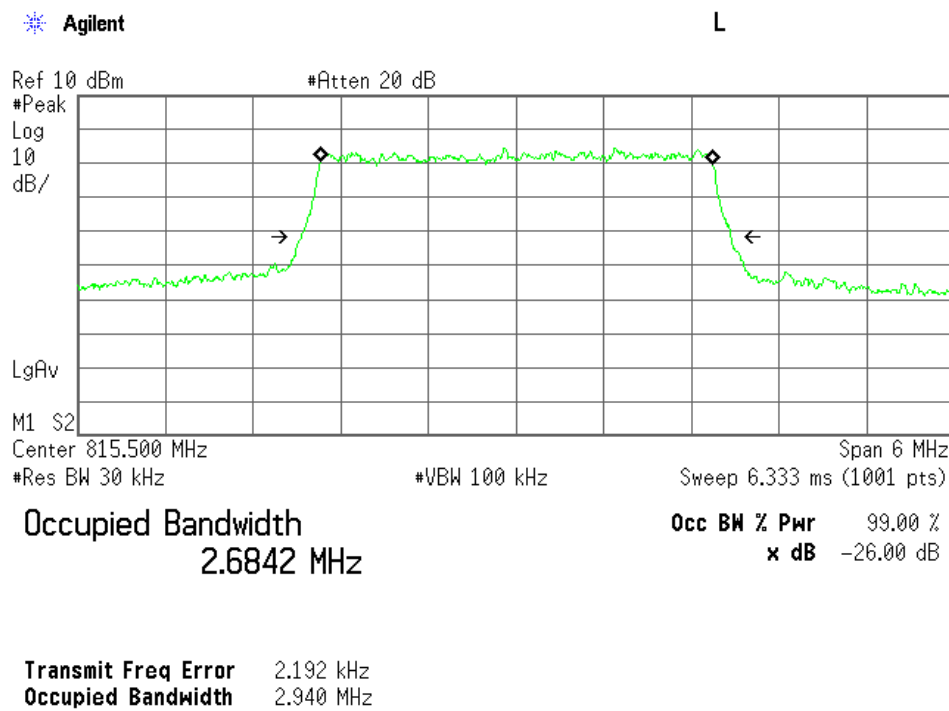


Middle Channel

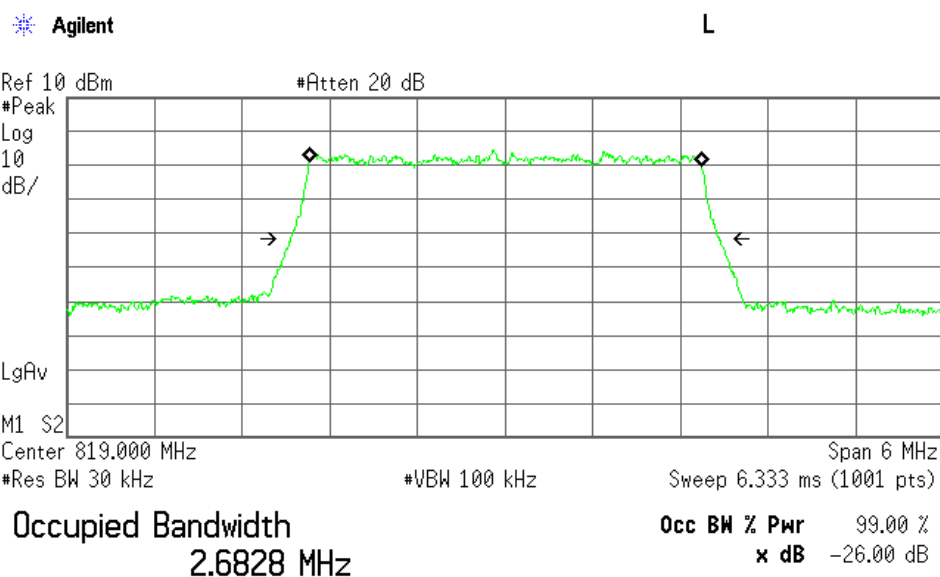

Transmit Freq Error 1.216 kHz
Occupied Bandwidth 2.933 MHz

High Channel

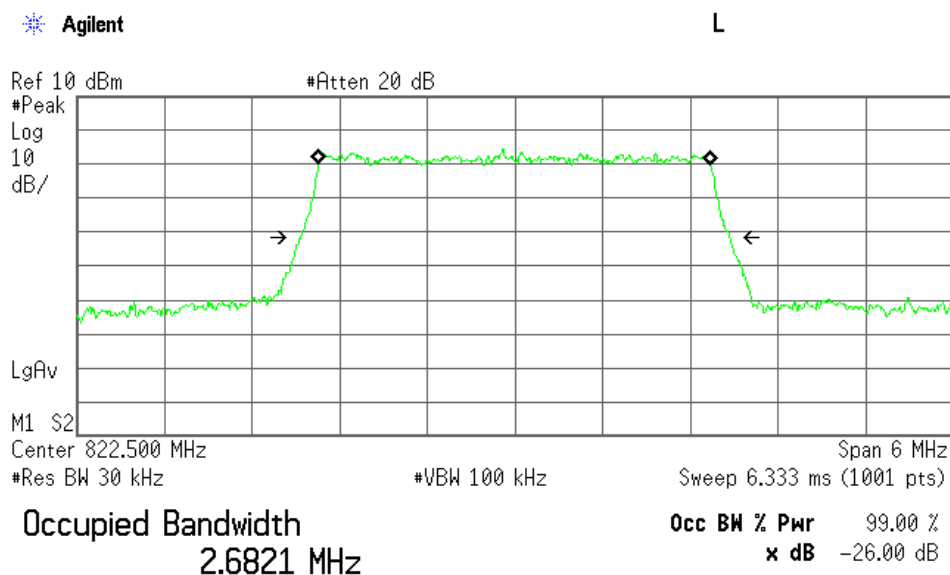

Transmit Freq Error -529.184 Hz
Occupied Bandwidth 2.936 MHz


2-2-2) BW 3MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26705	815.50	2.68	2.94
26740	819.00	2.68	2.93
26775	822.50	2.68	2.94

Low Channel


Agilent

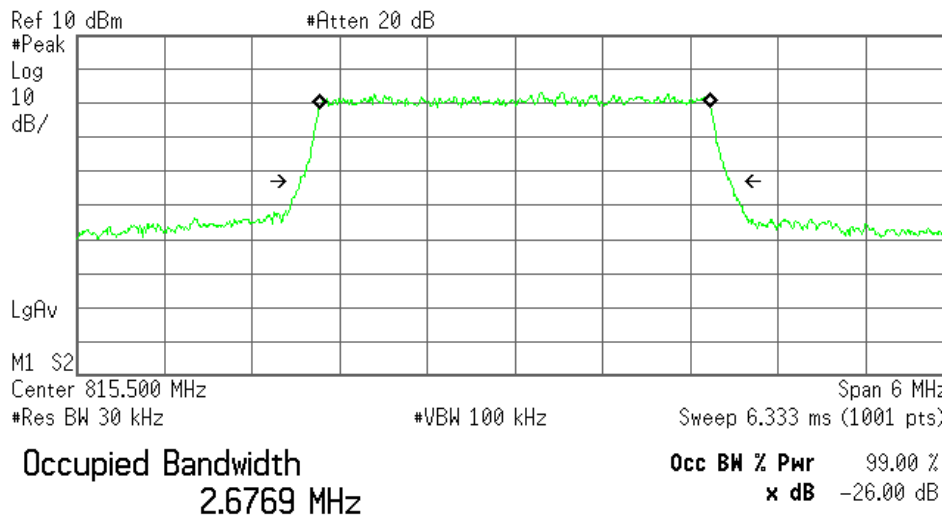

Transmit Freq Error 48.274 Hz


Occupied Bandwidth 2.941 MHz

Middle Channel

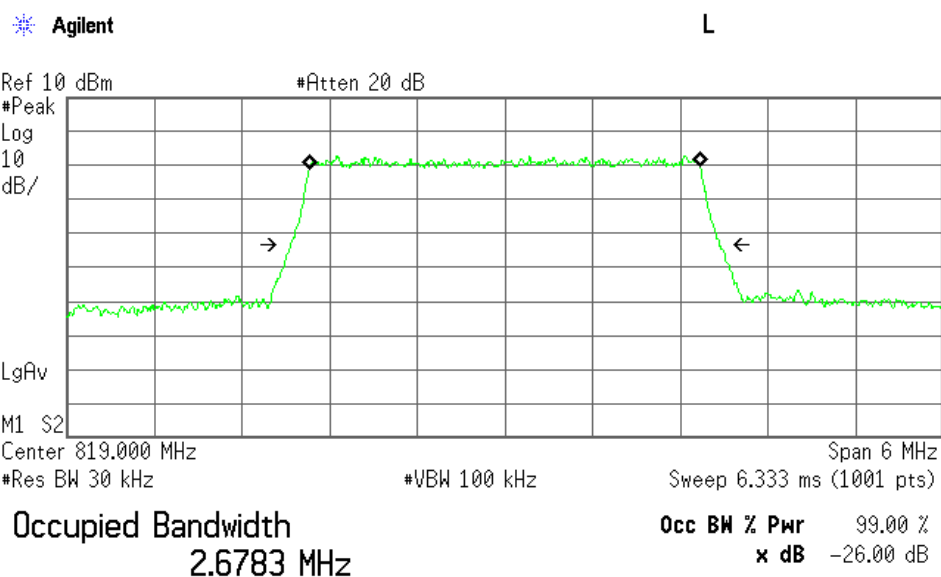

Transmit Freq Error -28.779 Hz
Occupied Bandwidth 2.932 MHz

High Channel

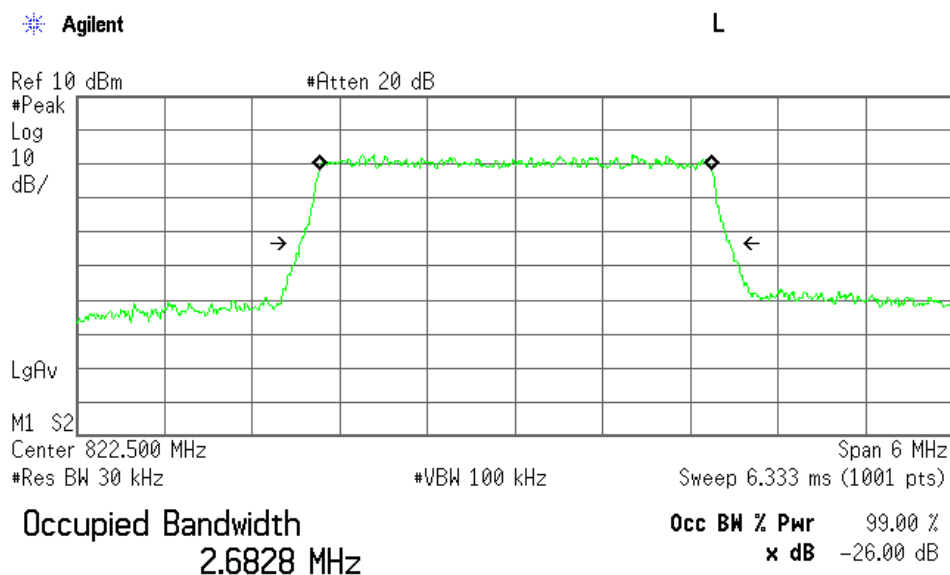


Transmit Freq Error 2.856 kHz
Occupied Bandwidth 2.944 MHz

2-3-1) BW 5MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26715	816.50	4.47	4.89
26740	819.00	4.48	4.86
26765	821.50	4.48	4.87

Low Channel

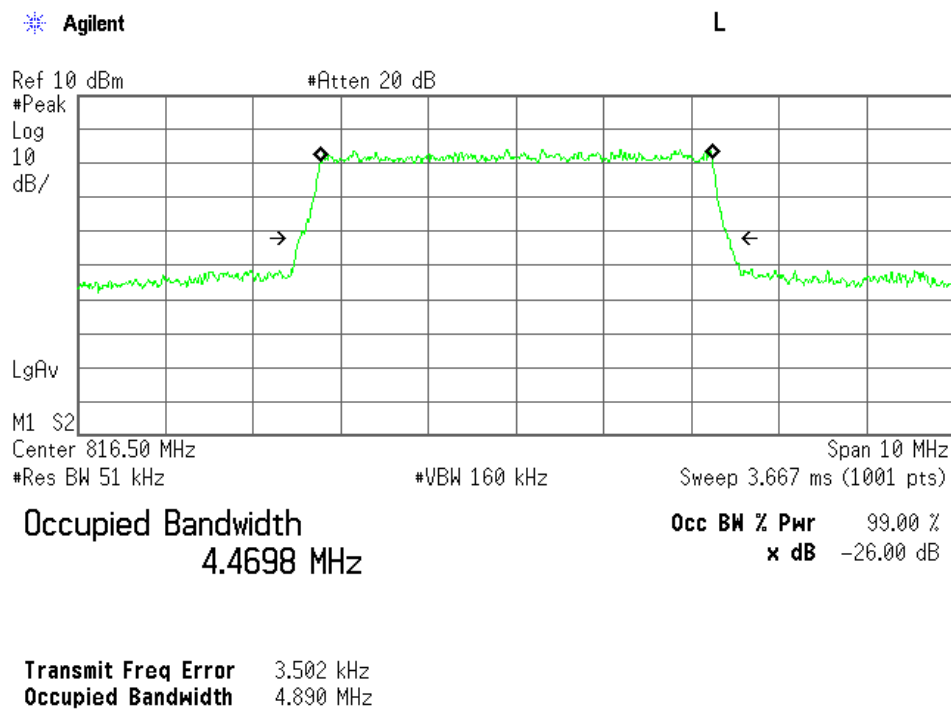


Middle Channel

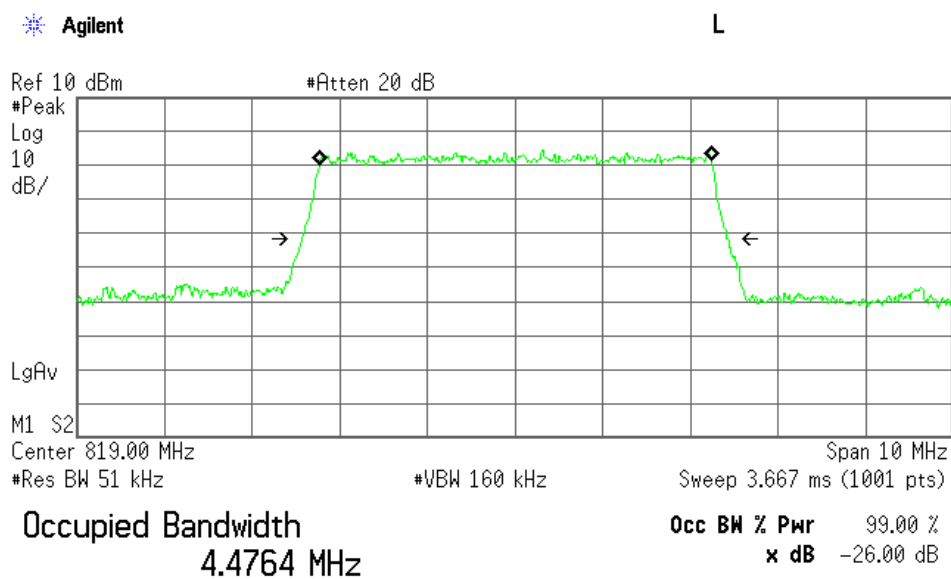

Transmit Freq Error 7.008 kHz
Occupied Bandwidth 4.862 MHz

High Channel

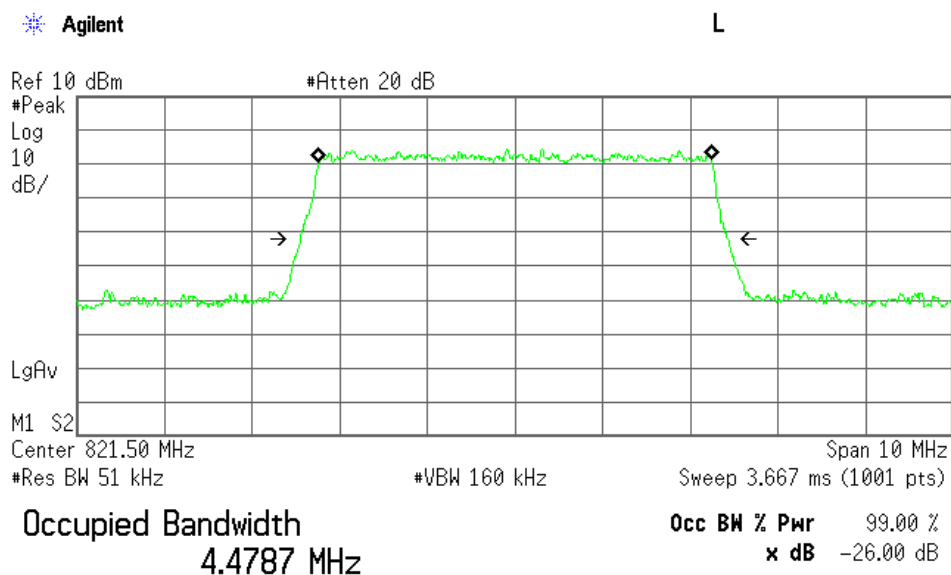

Transmit Freq Error 3.178 kHz
Occupied Bandwidth 4.865 MHz


2-3-2) BW 5MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26715	816.50	4.47	4.83
26740	819.00	4.46	4.83
26765	821.50	4.47	4.83


Low Channel

Agilent

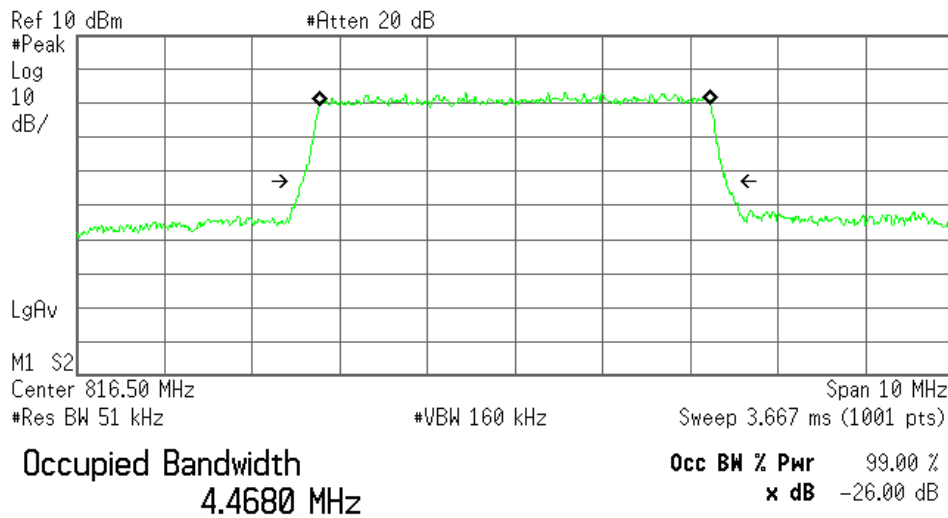


Transmit Freq Error -513.629 Hz
 Occupied Bandwidth 4.833 MHz

Middle Channel

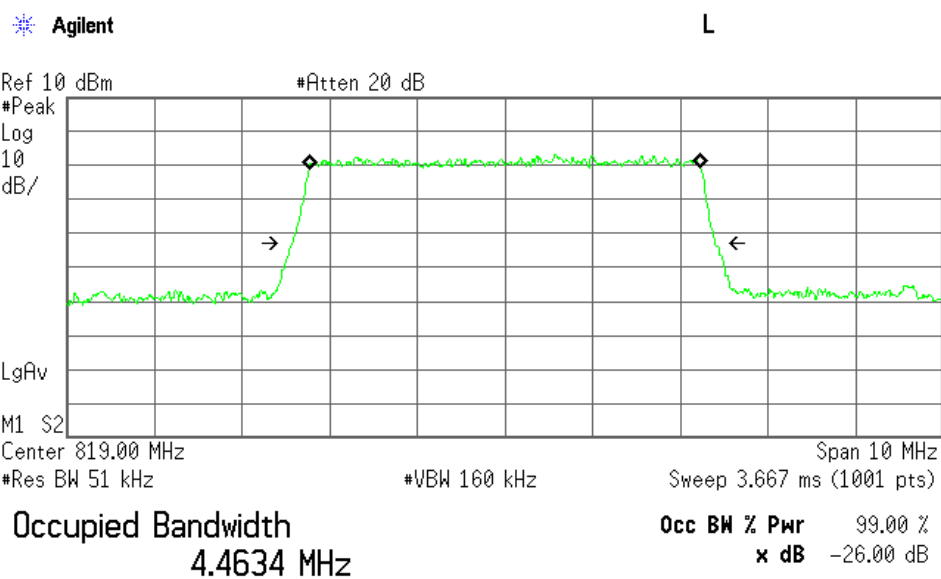

Transmit Freq Error 934.964 Hz
Occupied Bandwidth 4.825 MHz

High Channel

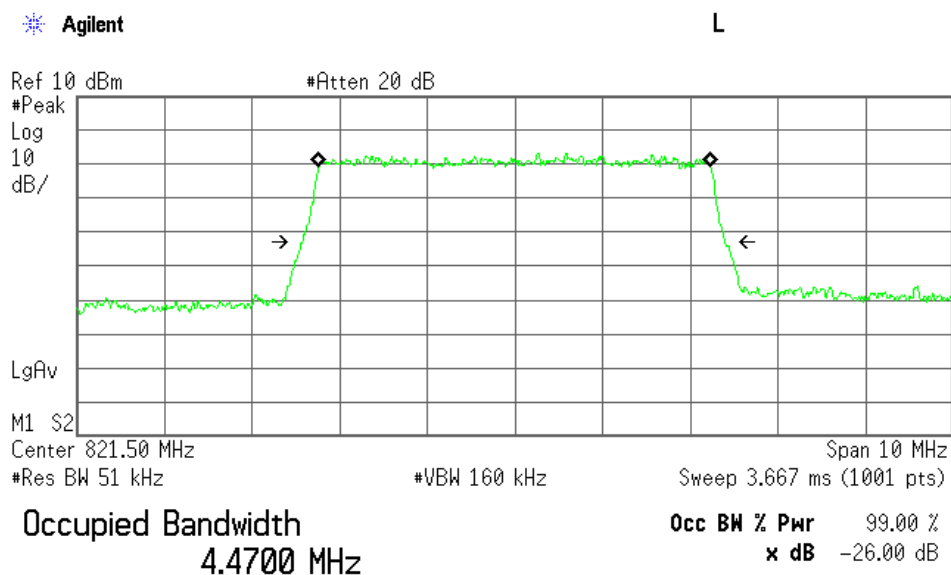


Transmit Freq Error -2.167 kHz
Occupied Bandwidth 4.828 MHz

2-4-1) BW 10MHz(Full RB)

Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26740	819.00	8.93	9.66

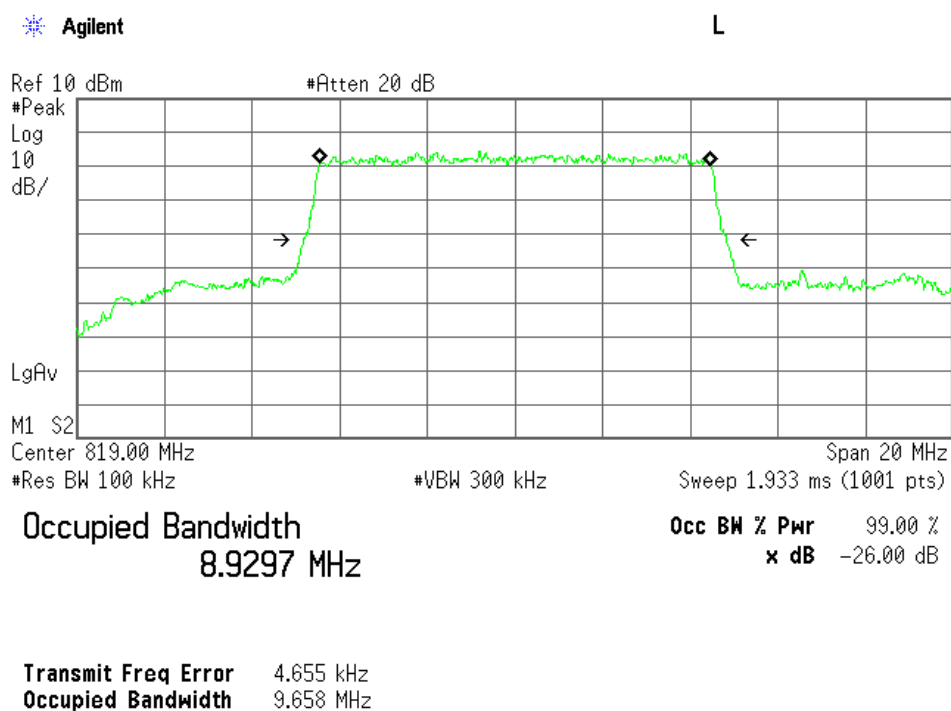


2-4-2) BW 10MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
26740	819.00	8.93	9.67

Agilent

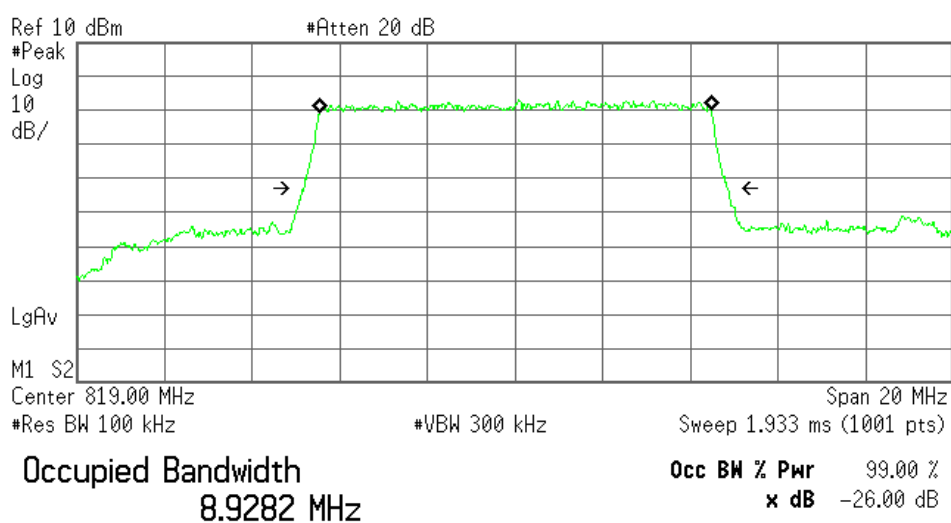

Transmit Freq Error 9.035 kHz

Occupied Bandwidth 9.669 MHz

7.5 Spurious Emissions at Antenna Terminals (§2.1051)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.5.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

Min. Limit Margin 33.8 dB at 4241.500 MHz

Remarks : BW 1.4 MHz

Part 90

Min. Limit Margin >35.5 dB at 8147/8190/8233 MHz
at 8155/8255 MHz
at 8165/8215 MHz
at 8190 MHz

Uncertainty of Measurement Results

9 kHz – 1 GHz ± 1.4 dB(2 σ)
1 GHz – 18 GHz ± 1.7 dB(2 σ)
18 GHz – 40 GHz ± 2.3 dB(2 σ)

Remarks : BW 10 MHz

7.5.2 Test Instruments


Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16
High Pass Filter	HPM50108	010 (D-94)	MICRO-TRONICS	2016/02/08

NOTE : The calibration interval of the above test instruments is 12 months.


7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Antenna Conducted Emission was measured with a spectrum analyzer. The test system is shown as follows:

- a) Frequency Range: 9 kHz – 1.2 GHz



- b) Frequency Range: 1.2 GHz – 10 GHz



The setting of the spectrum analyzer are shown as follows:

Frequency Range	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 10 GHz
Res. Bandwidth	200 Hz	10 kHz	1 MHz
Video Bandwidth	1 kHz	30 kHz	3 MHz
Sweep Time	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold

7.5.4 Test Data

1. Part 22

1-1) BW 1.4MHz(1RB)

(LTE 1.4MHz)

Test Date: October 28, 2015

Temp.: 26 °C, Humi: 36 %

Transmitting Frequency CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26797	824.700	1649.400	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2474.100	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3298.800	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4123.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4948.200	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5772.900	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6597.600	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7422.300	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8247.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26915	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
27033	848.300	1696.600	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2544.900	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3393.200	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4241.500	21.1	-67.9	-13.0	-46.8	+33.8	C
		5089.800	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5938.100	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6786.400	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7634.700	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8483.000	21.6	< -70.0	-13.0	< -48.4	> +35.4	C

Calculated result at 4241.5 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-67.9 dBm</u>
Result	=	-46.8 dBm


Minimum Margin: -13.0 - (-46.8) = 33.8 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

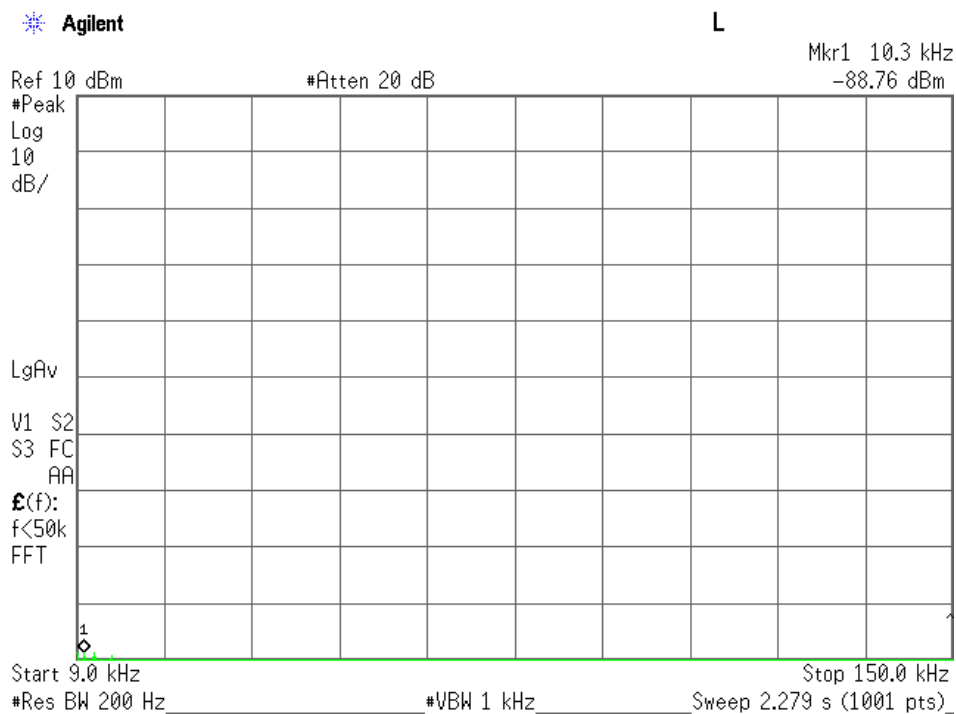


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

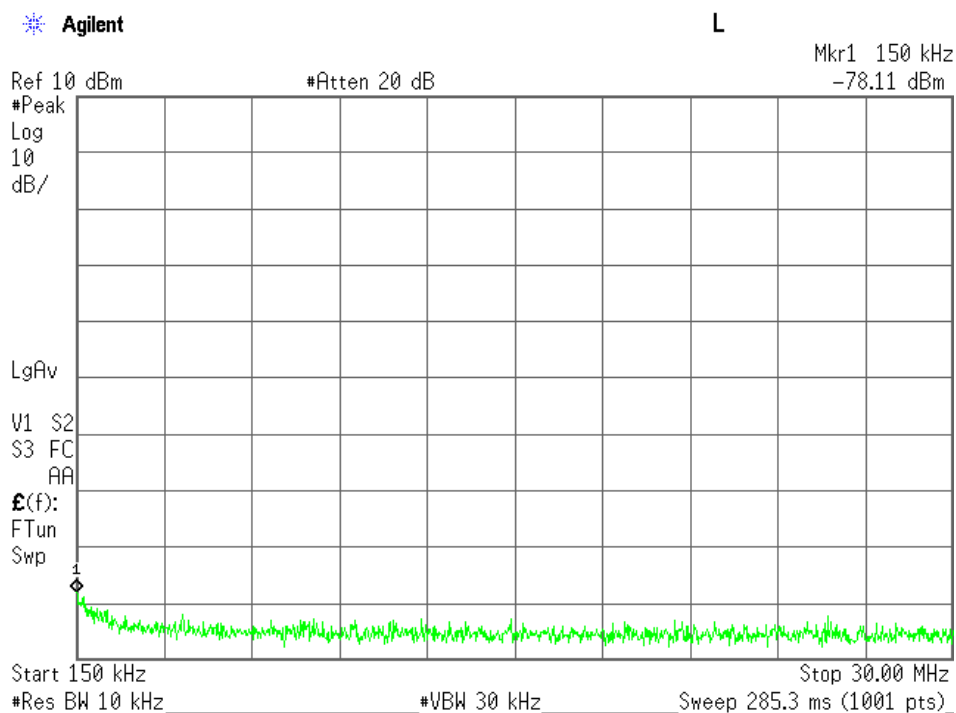


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

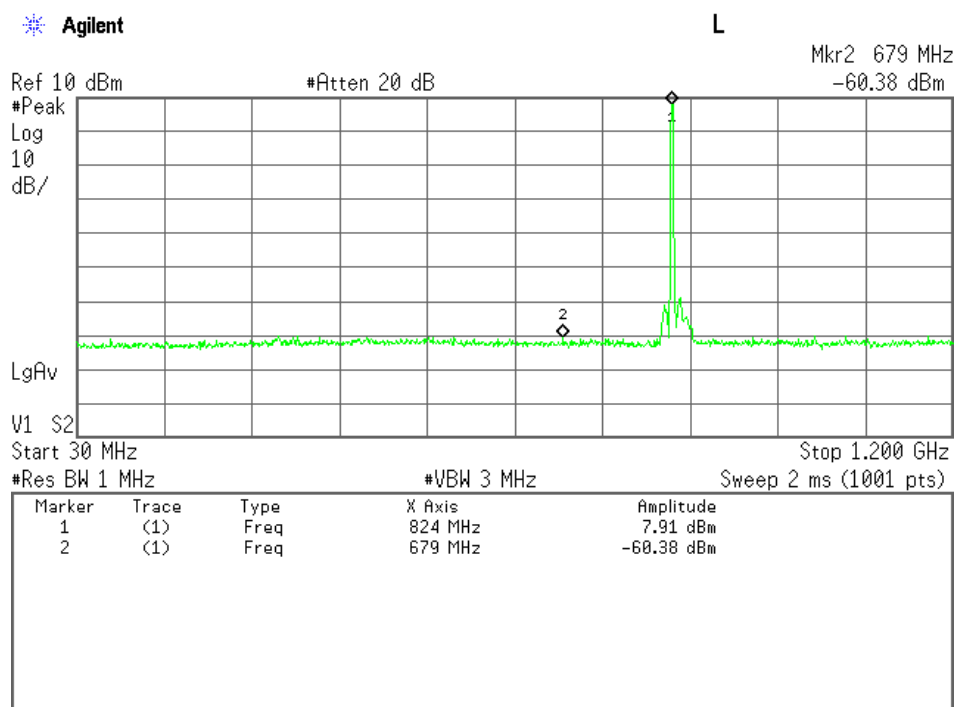


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

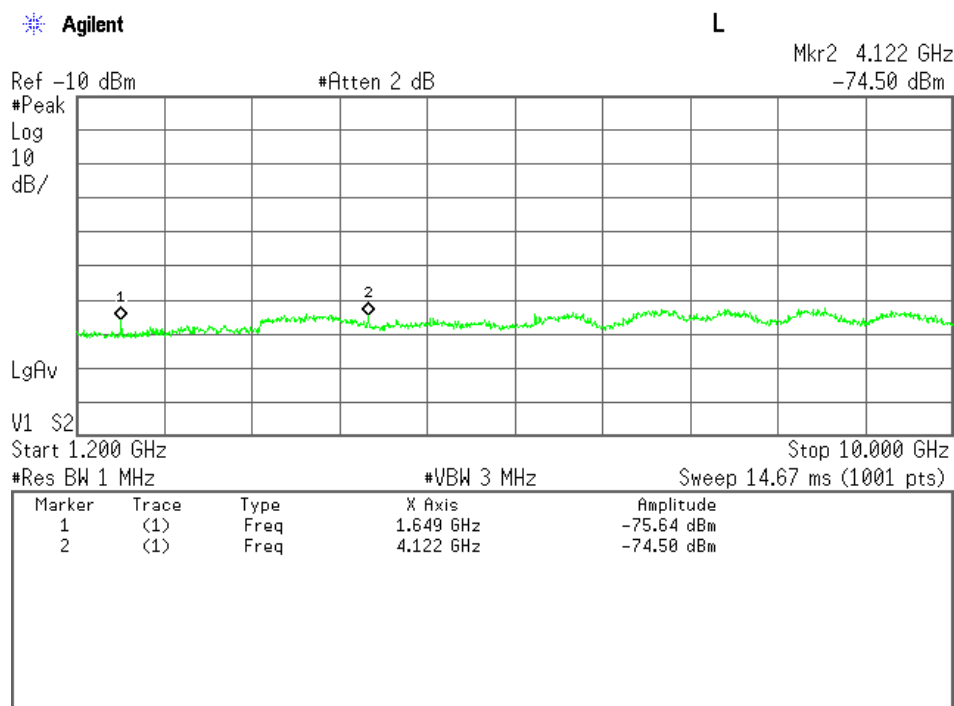


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

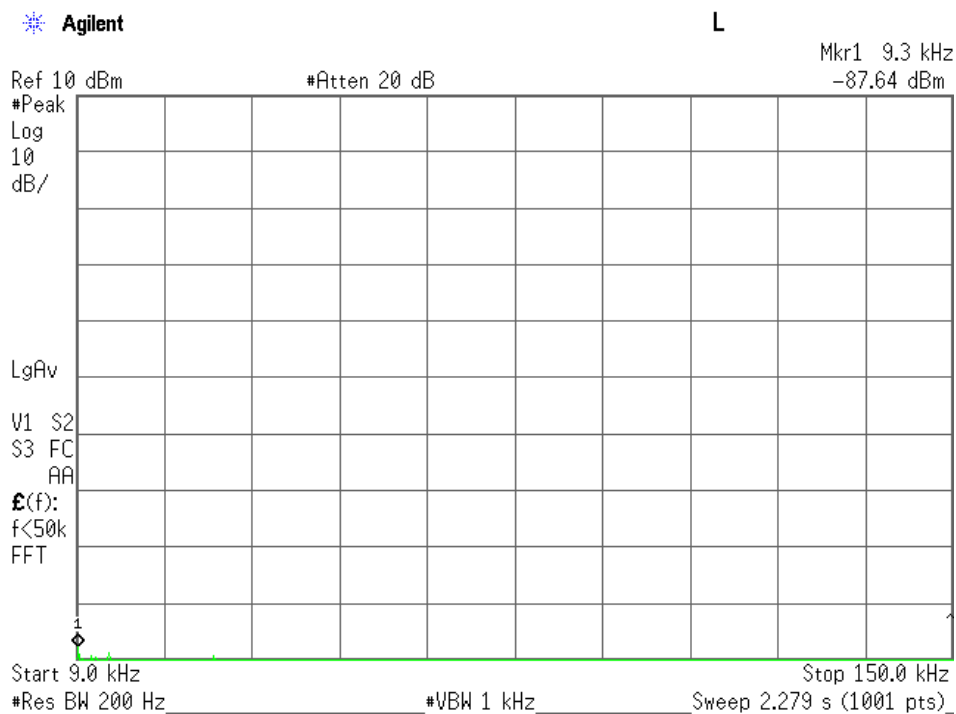


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

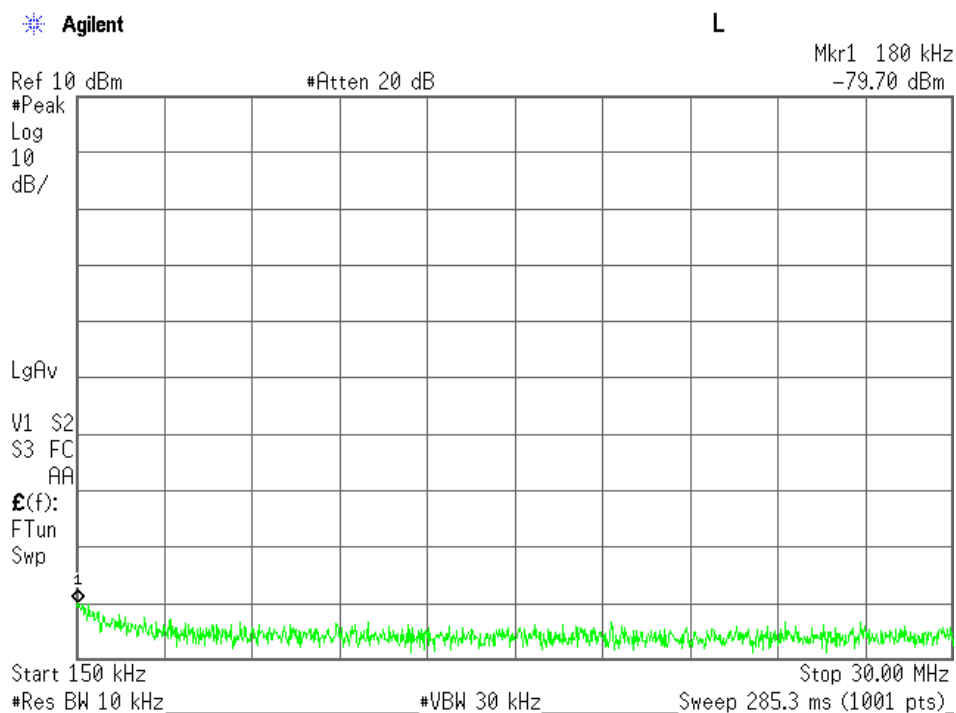


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

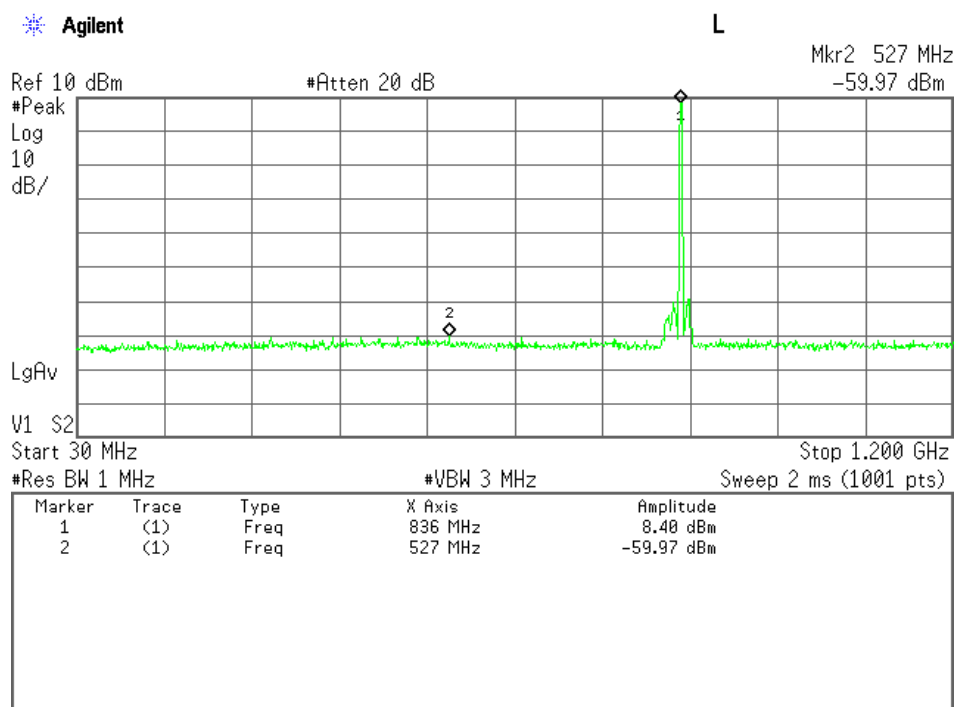


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

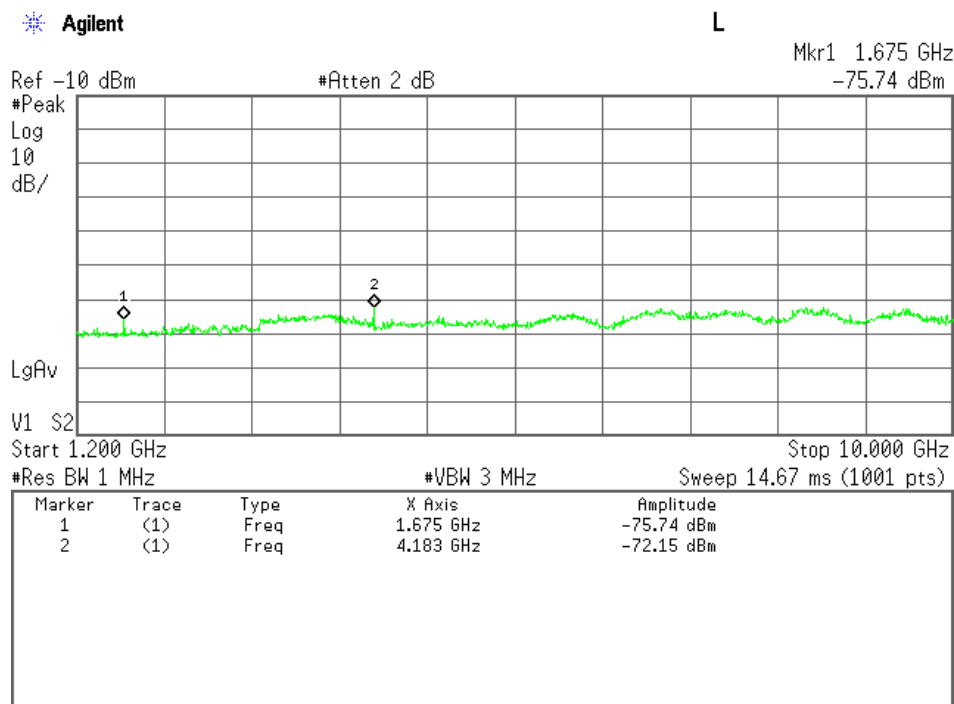


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

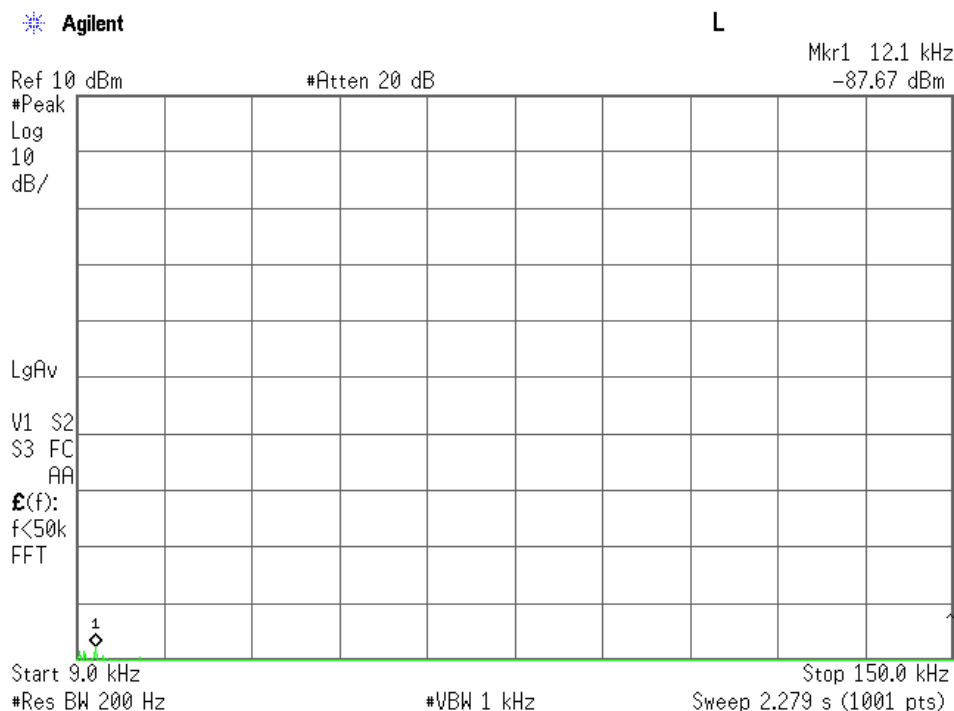


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

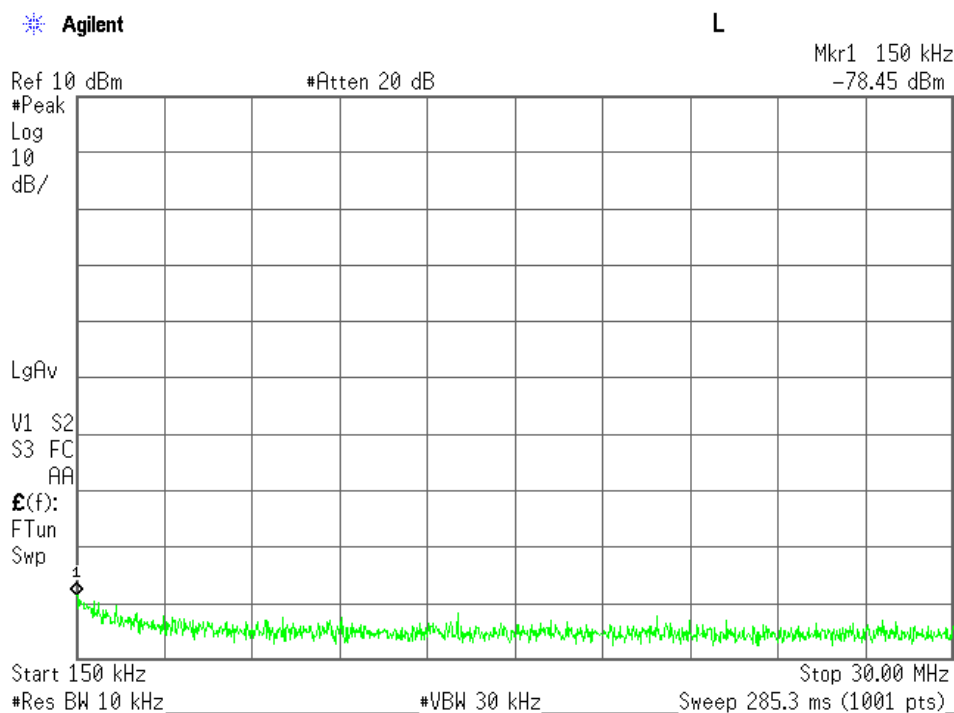

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

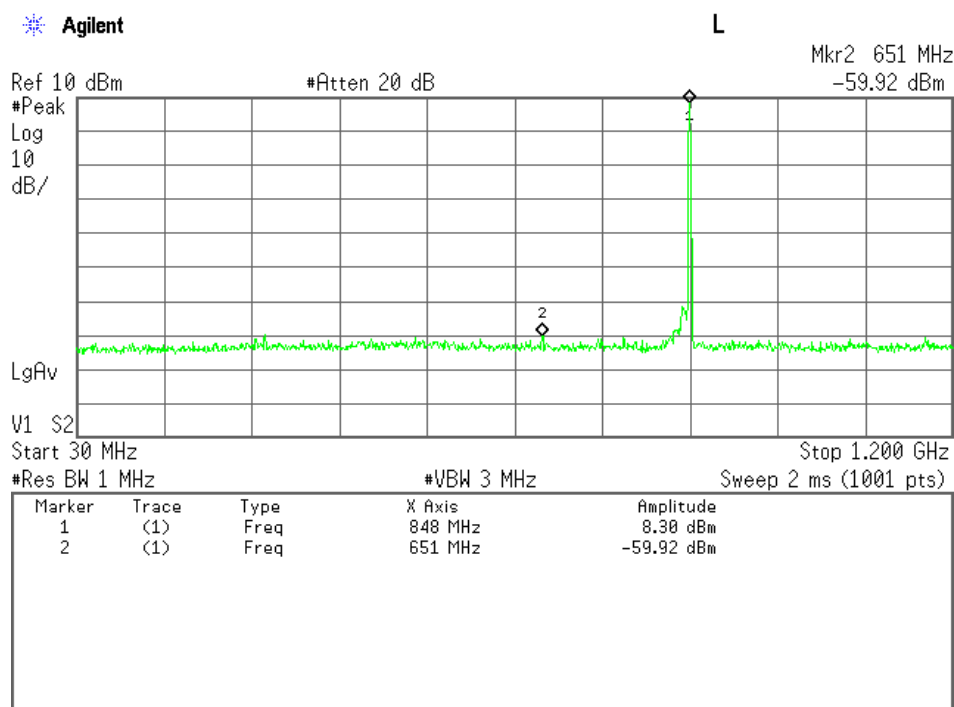

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

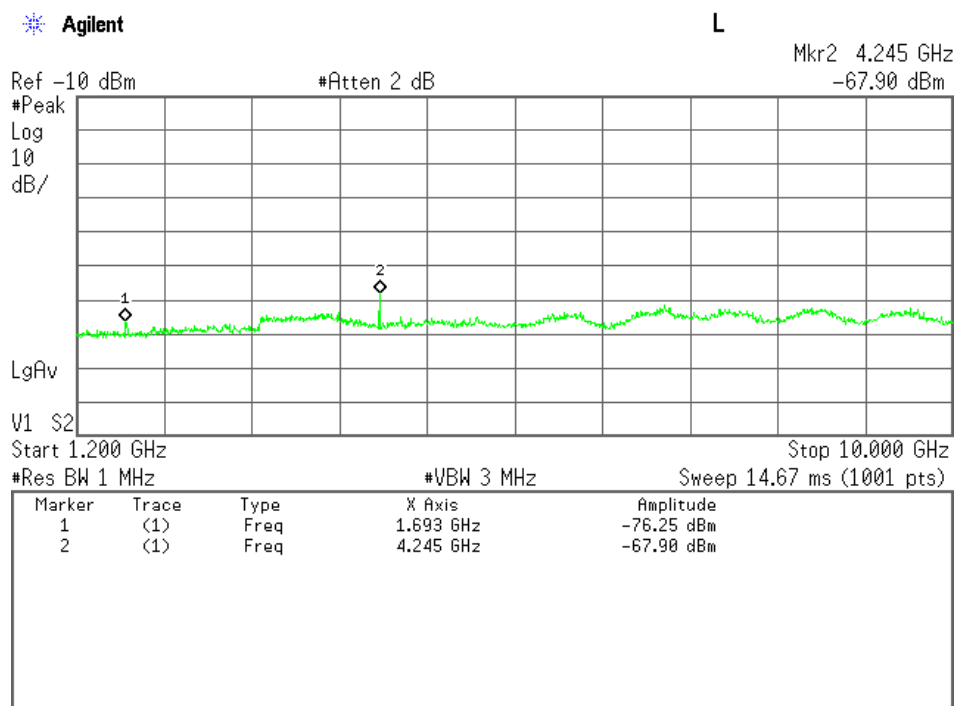

1-2) BW 3MHz(1RB)

(LTE 3MHz)

Test Date: October 28, 2015

Temp.: 26 °C, Humi: 36 %

Transmitting Frequency CH	Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26805	825.500	1651.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2476.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3302.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4127.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4953.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5778.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6604.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7429.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8255.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26915	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
27025	847.500	1695.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2542.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3390.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4237.500	21.1	-69.0	-13.0	-47.9	+34.9	C
		5085.000	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5932.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6780.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7627.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8475.000	21.6	< -70.0	-13.0	< -48.4	> +35.4	C

Calculated result at 4237.5 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-69.0 dBm</u>
Result	=	-47.9 dBm


Minimum Margin: -13.0 - (-47.9) = 34.9 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

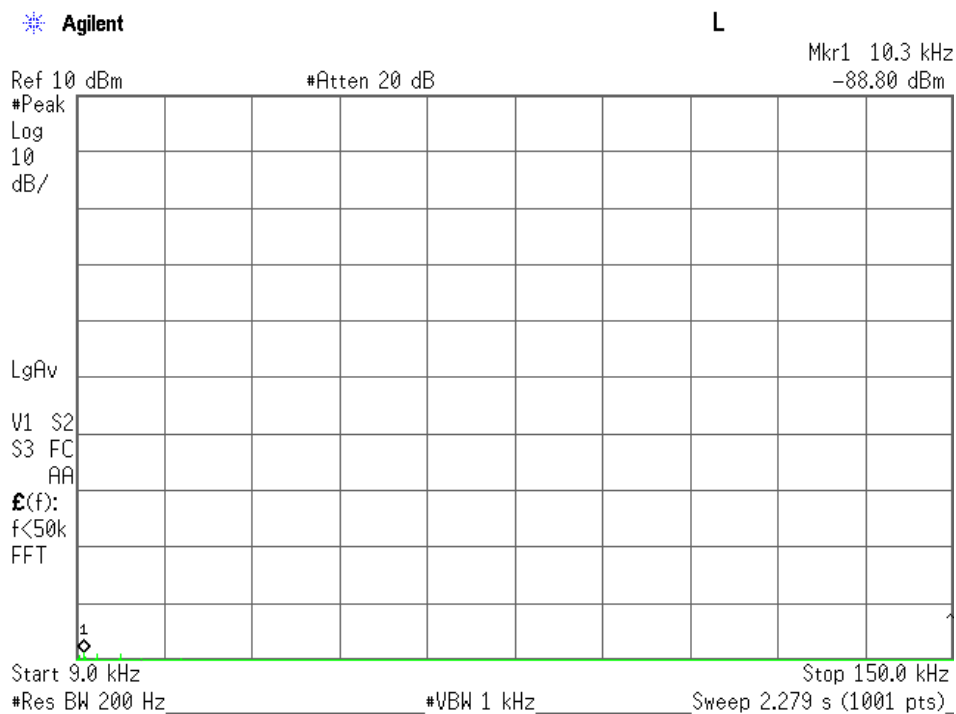


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

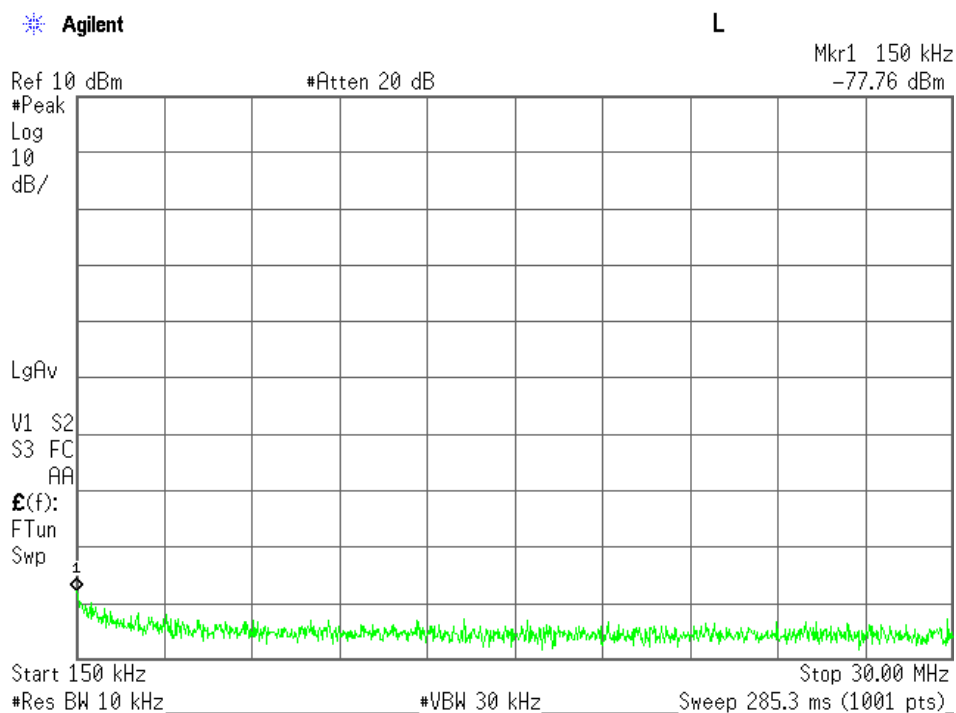


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

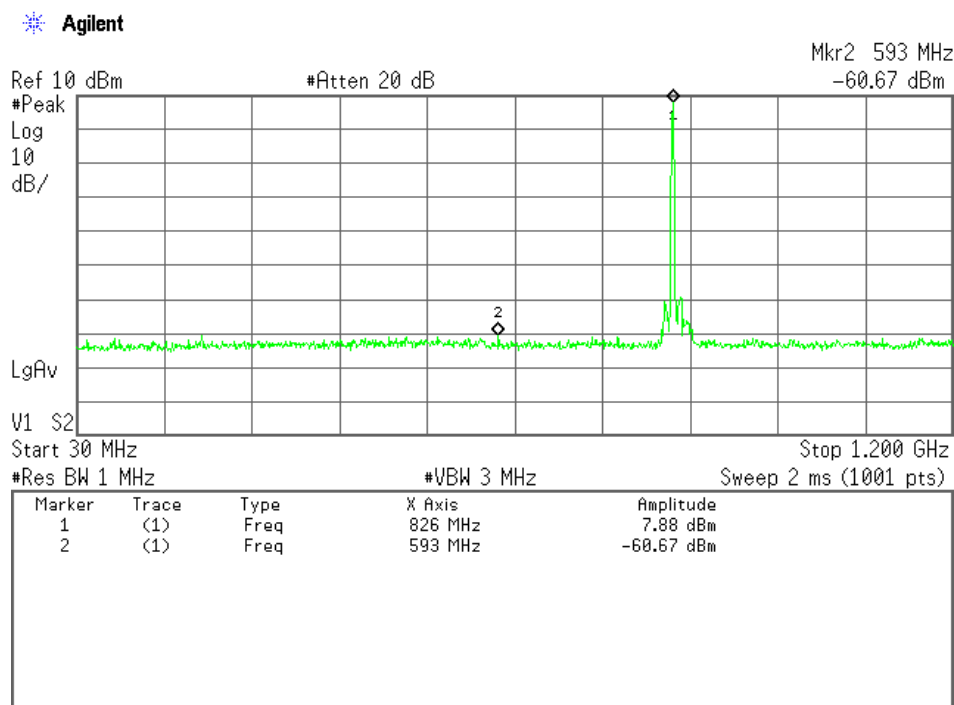


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

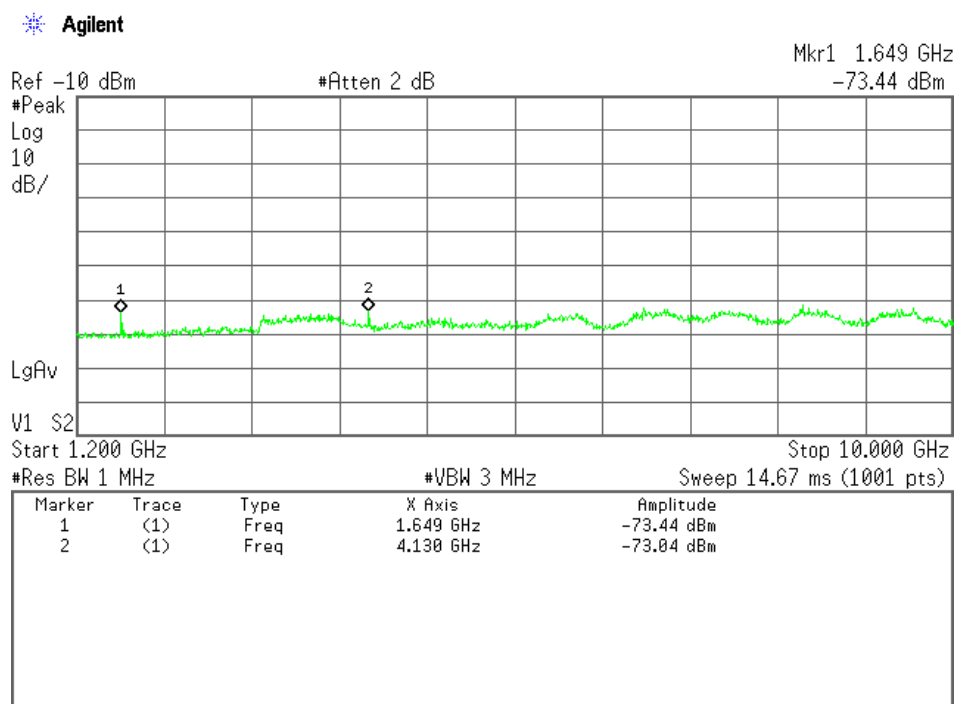


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

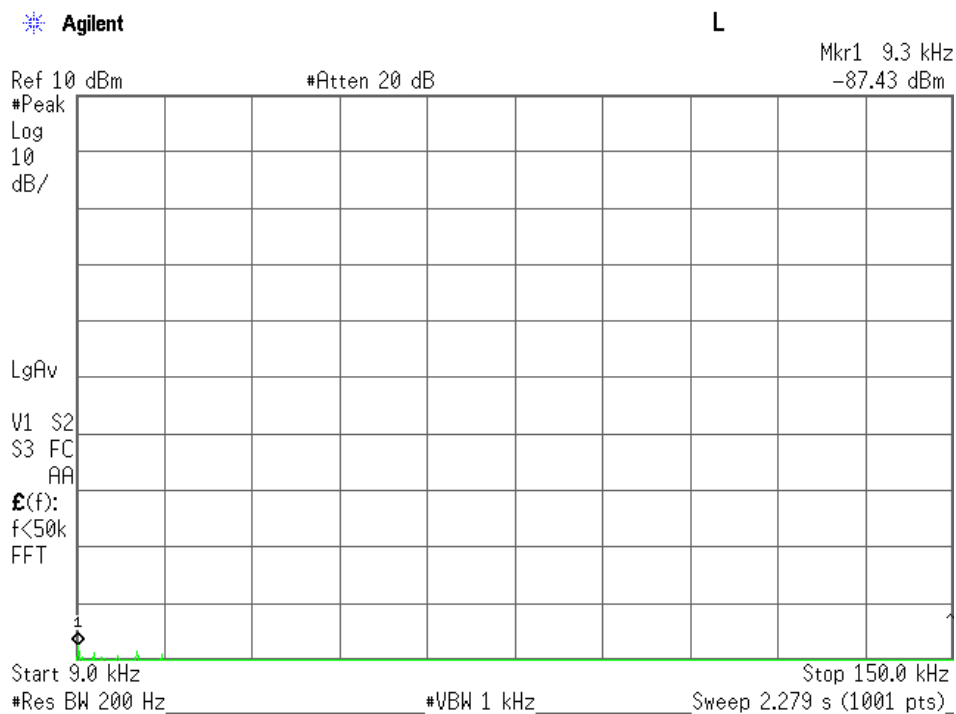


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

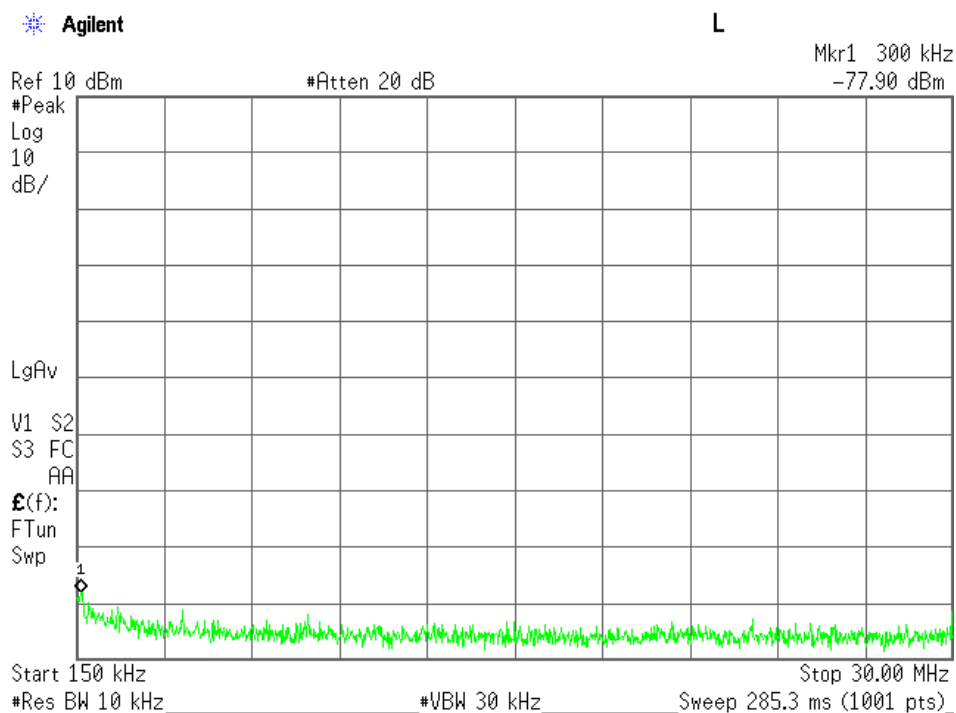


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

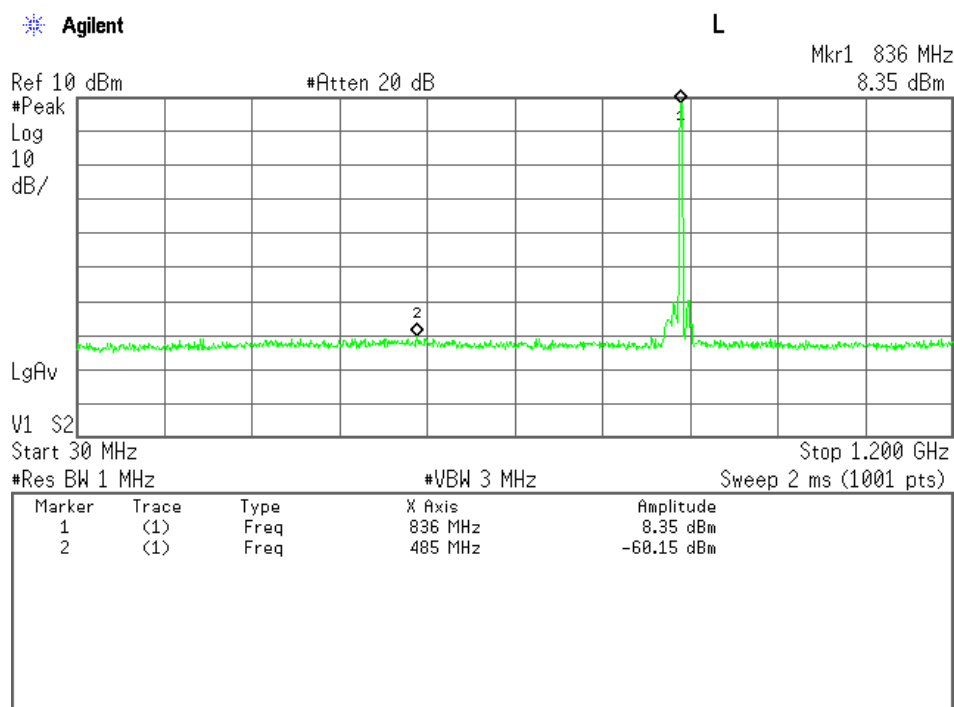


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

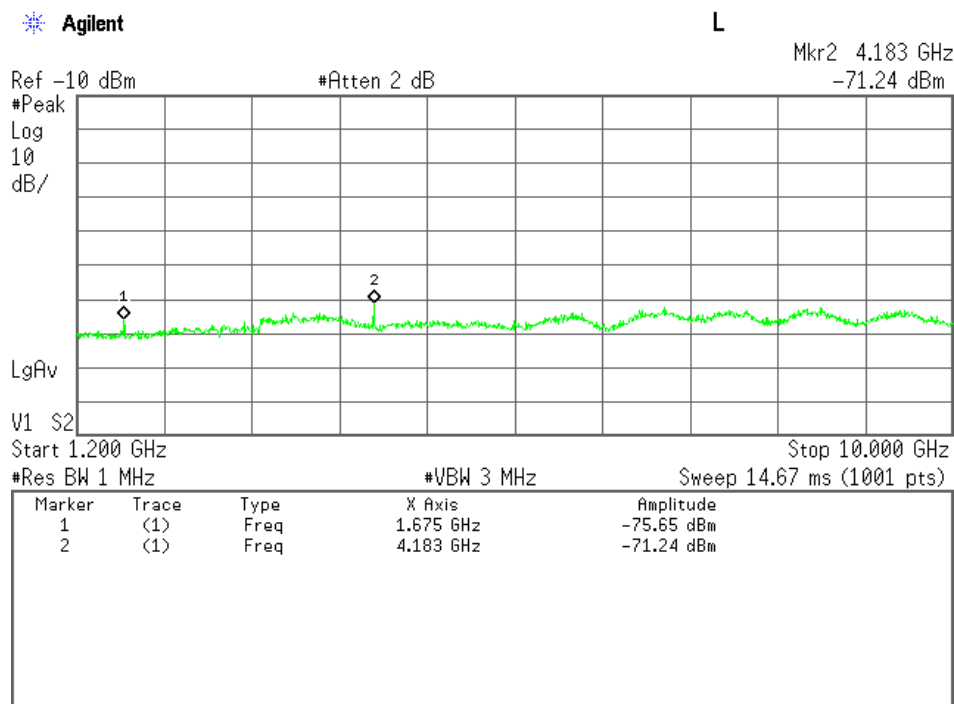


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

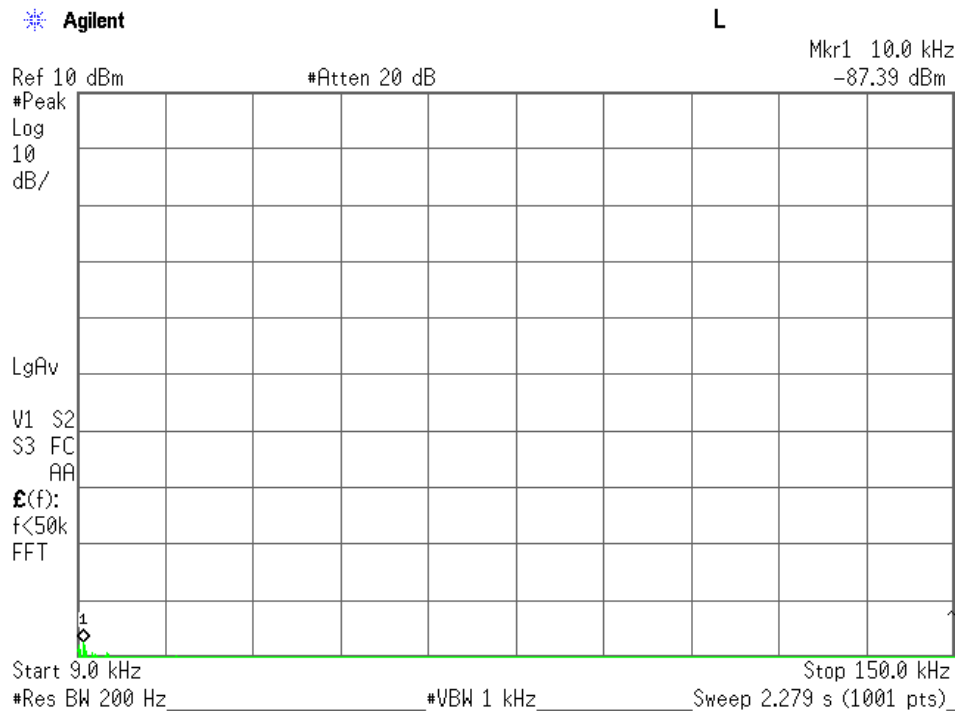


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

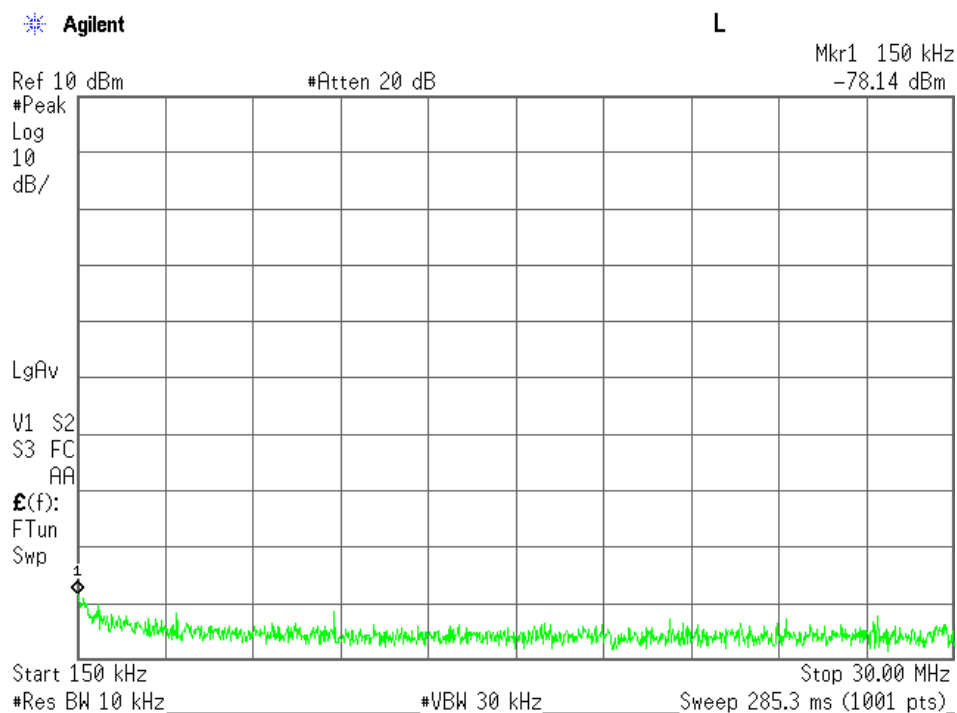

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

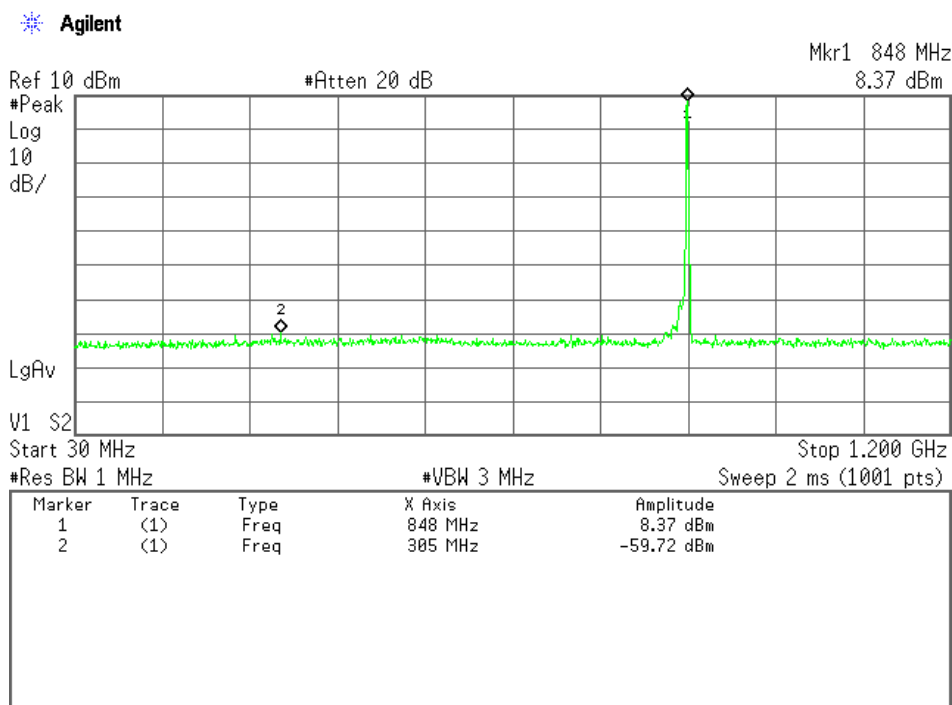

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

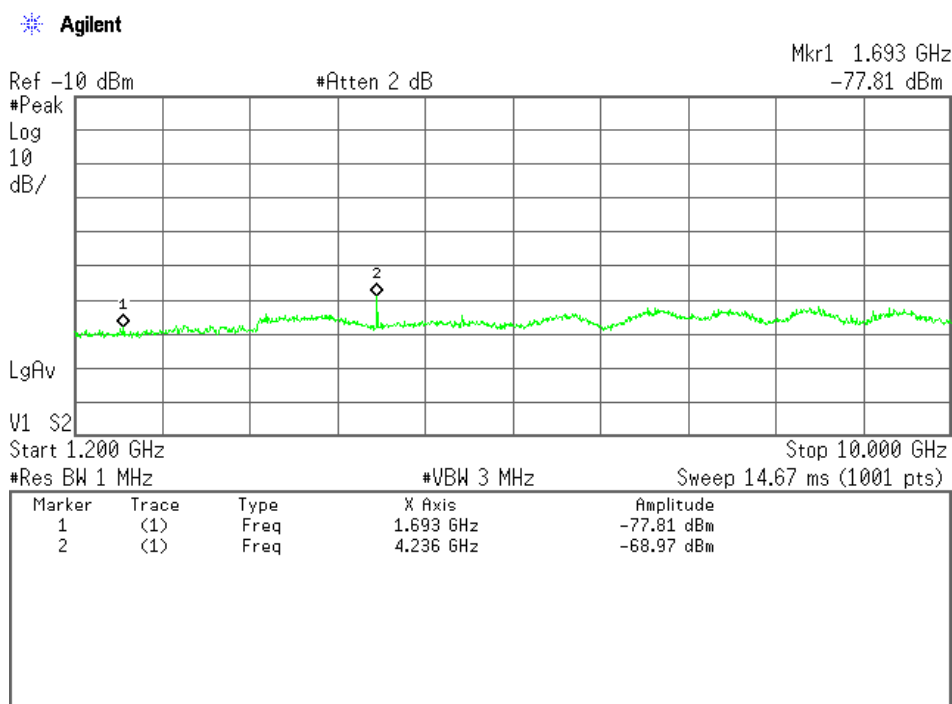

1-3) BW 5MHz(1RB)

(LTE 5MHz)

Test Date: October 28, 2015

Temp.: 26 °C, Humi: 36 %

Transmitting Frequency CH [MHz]		Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26815	826.500	1653.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2479.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3306.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4132.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4959.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5785.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6612.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7438.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8265.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26915	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
27015	846.500	1693.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2539.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3386.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4232.500	21.1	-68.6	-13.0	-47.5	+34.5	C
		5079.000	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5925.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6772.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7618.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8465.000	21.6	< -70.0	-13.0	< -48.4	> +35.4	C

Calculated result at 4232.5 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-68.6 dBm</u>
Result	=	-47.5 dBm


Minimum Margin: -13.0 - (-47.5) = 34.5 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

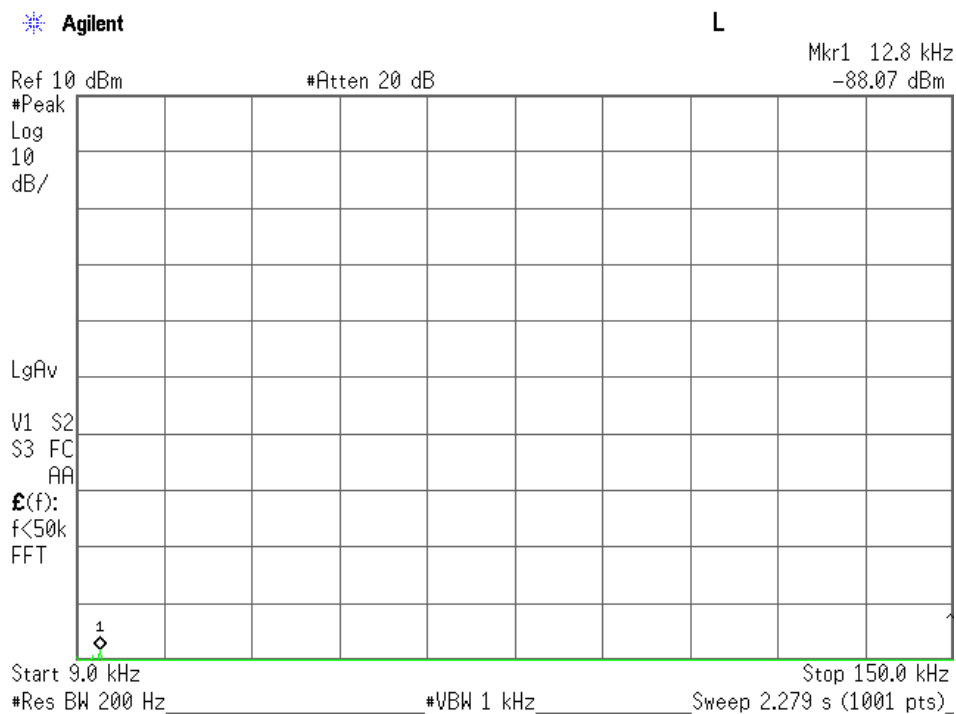


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

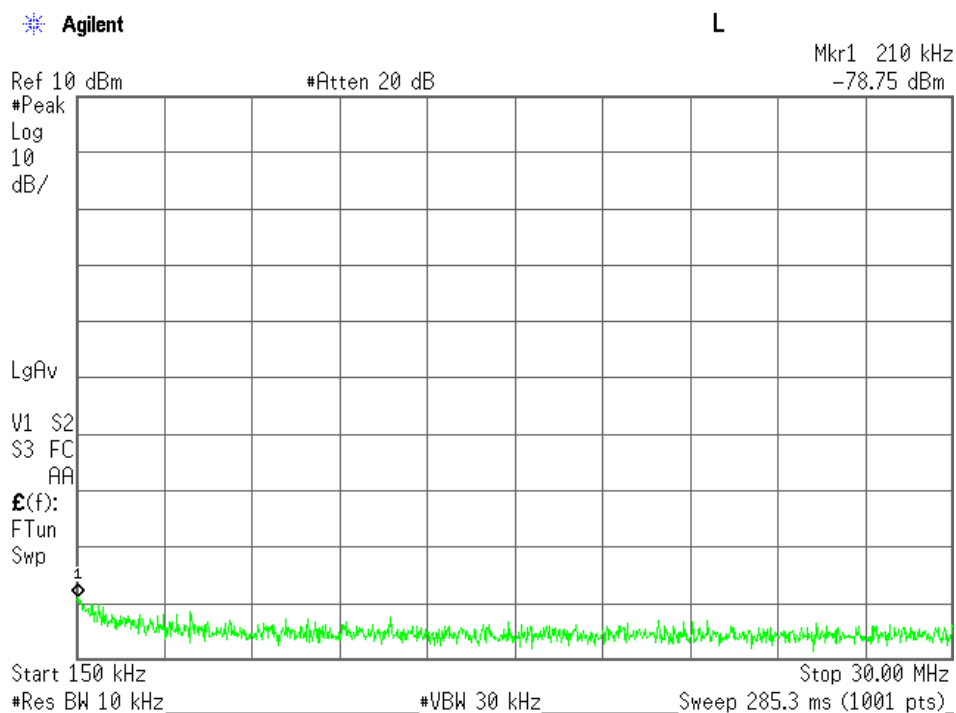


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

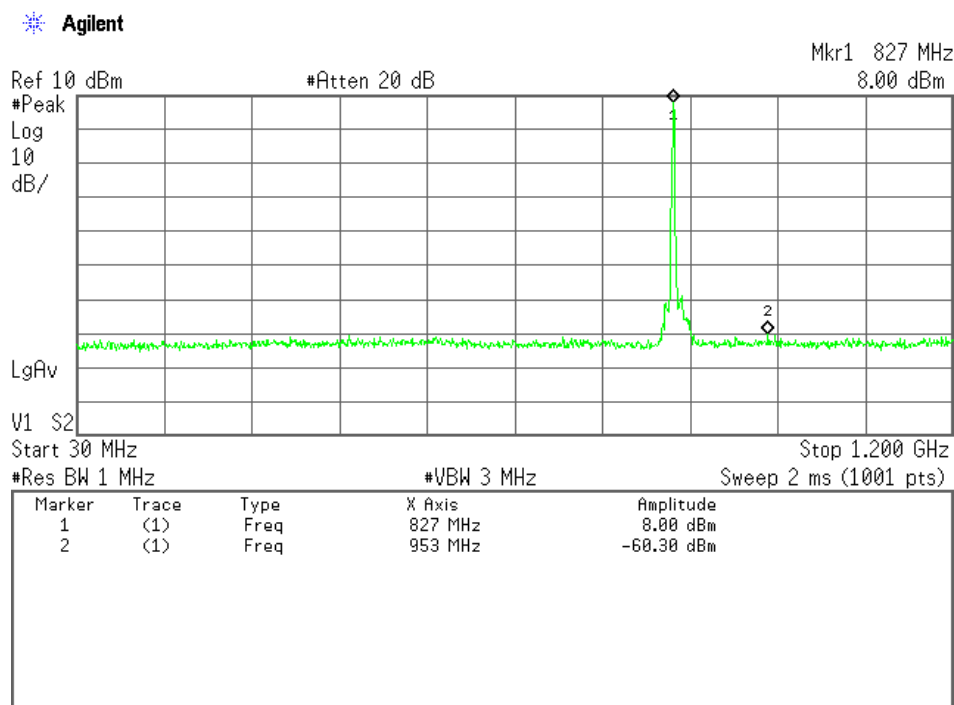


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

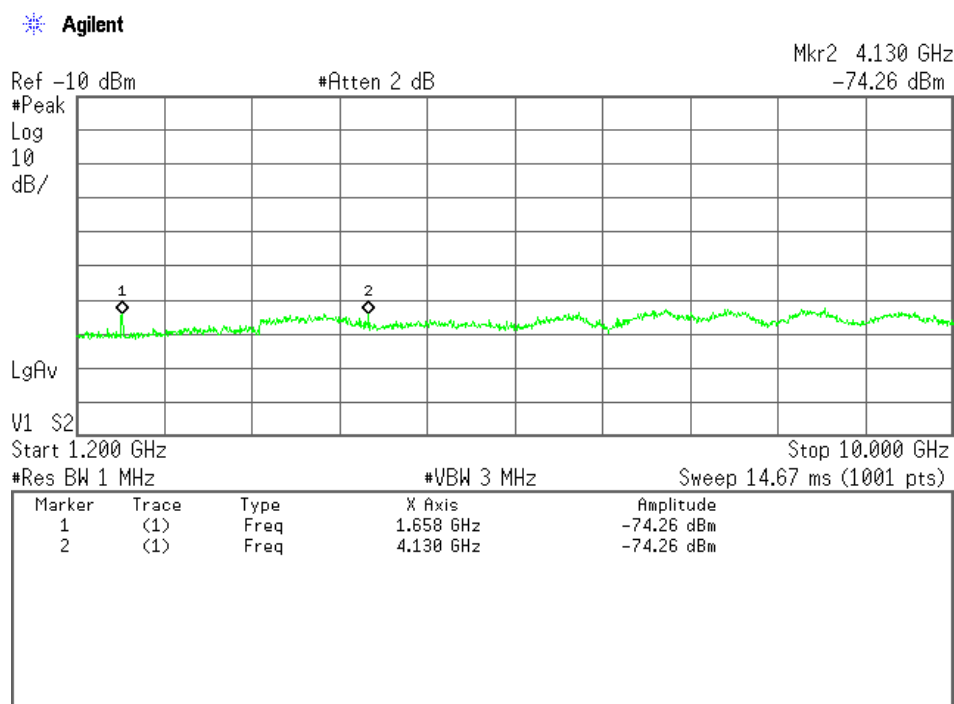


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

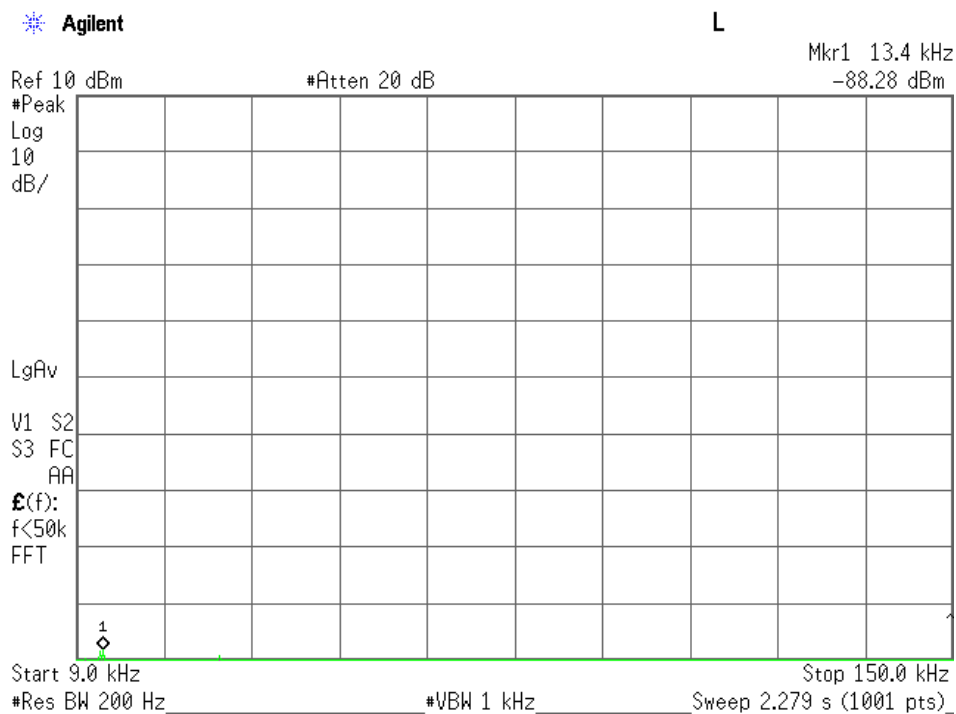


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

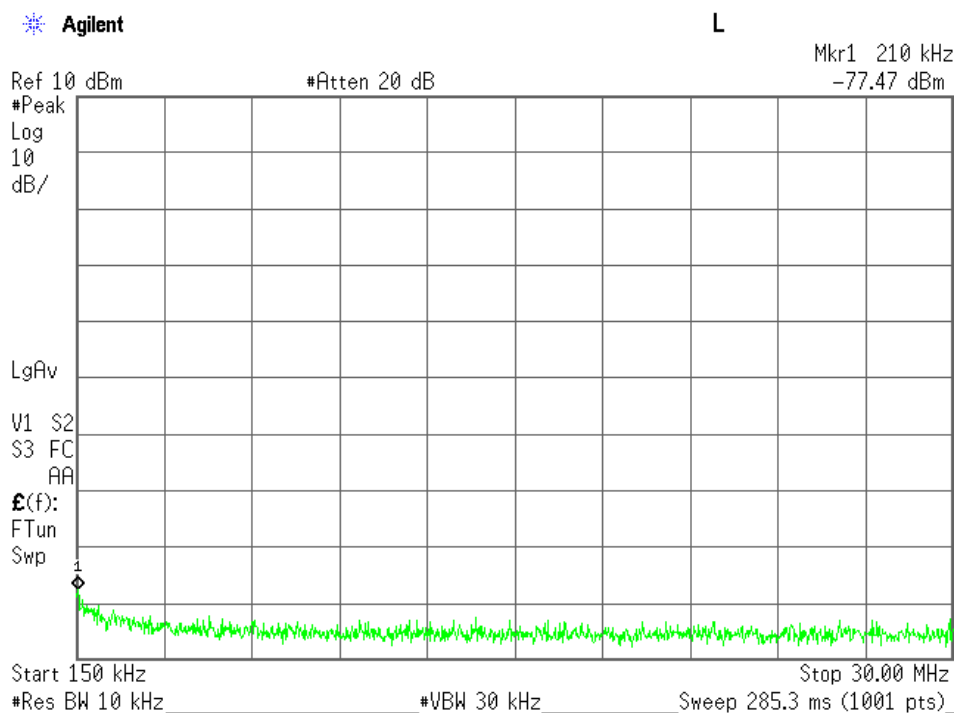


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

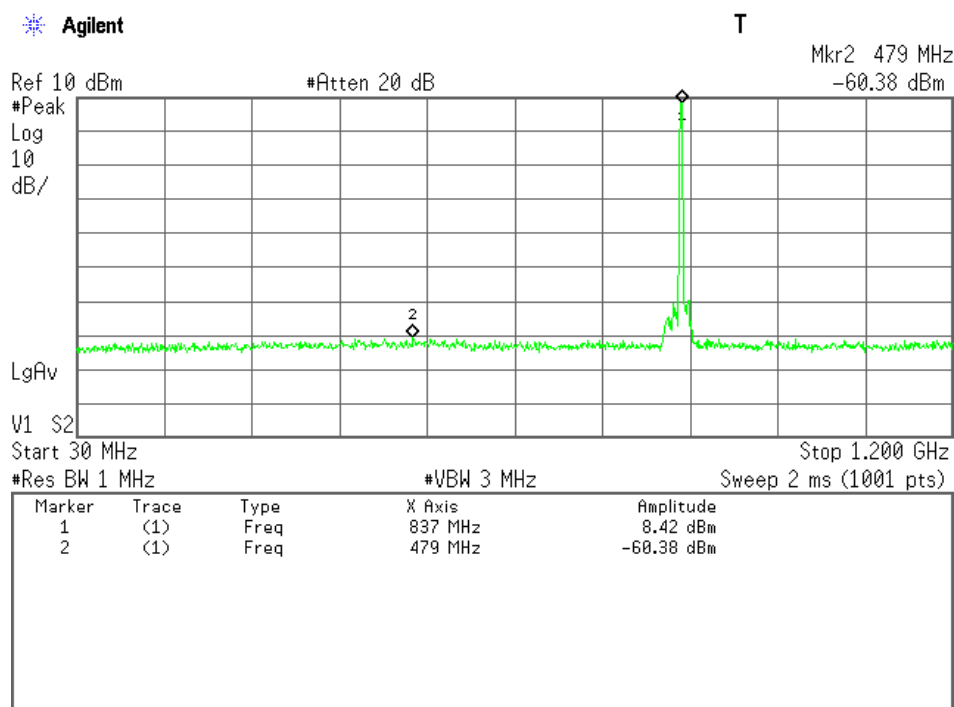


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

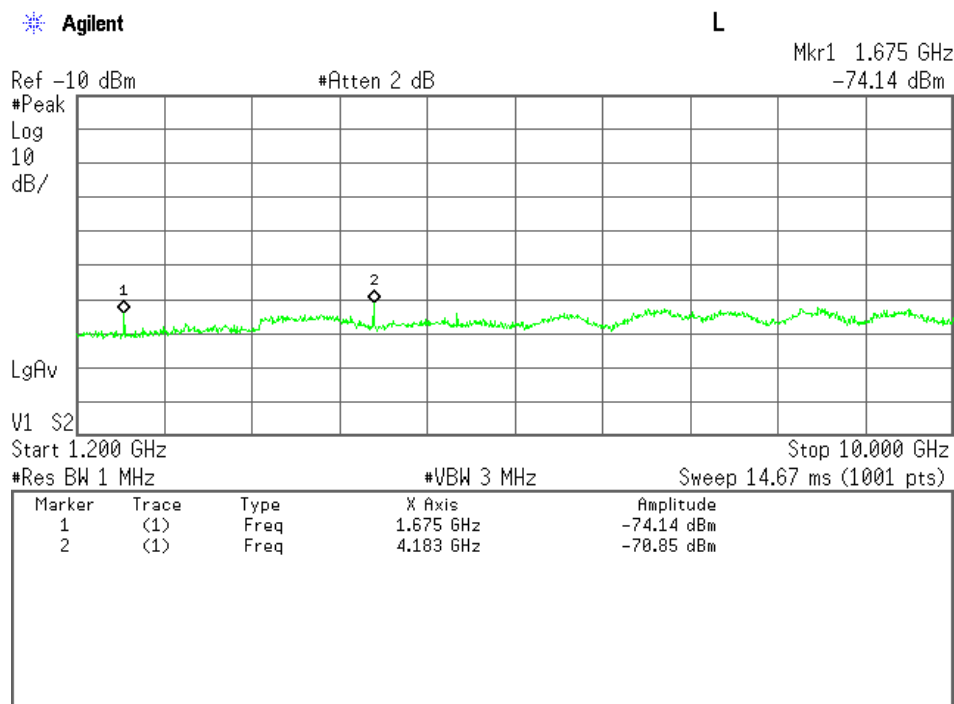


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

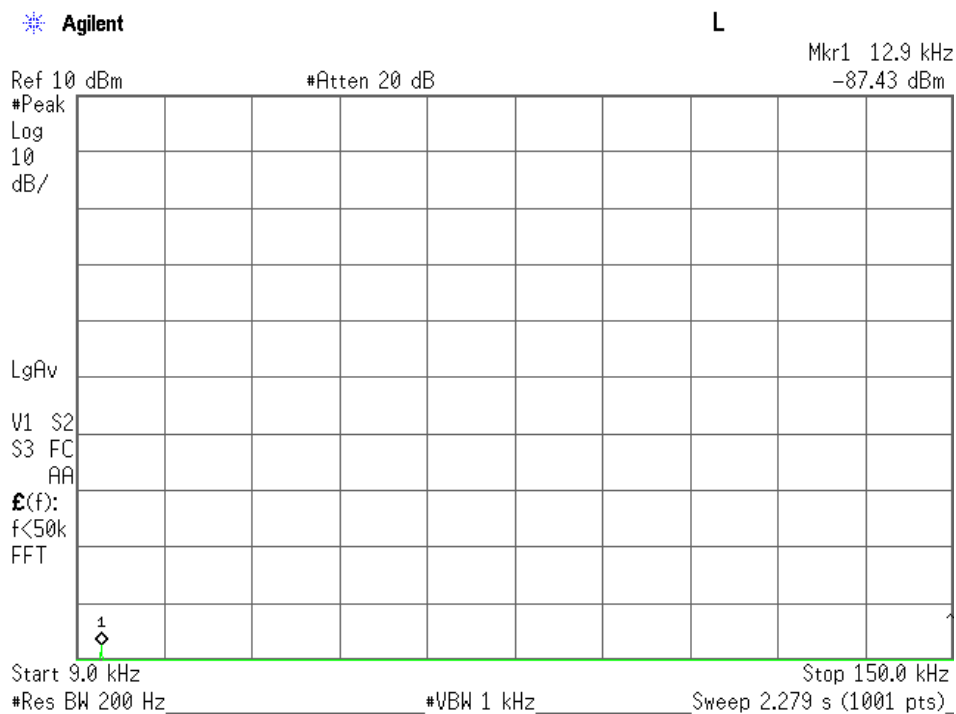


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

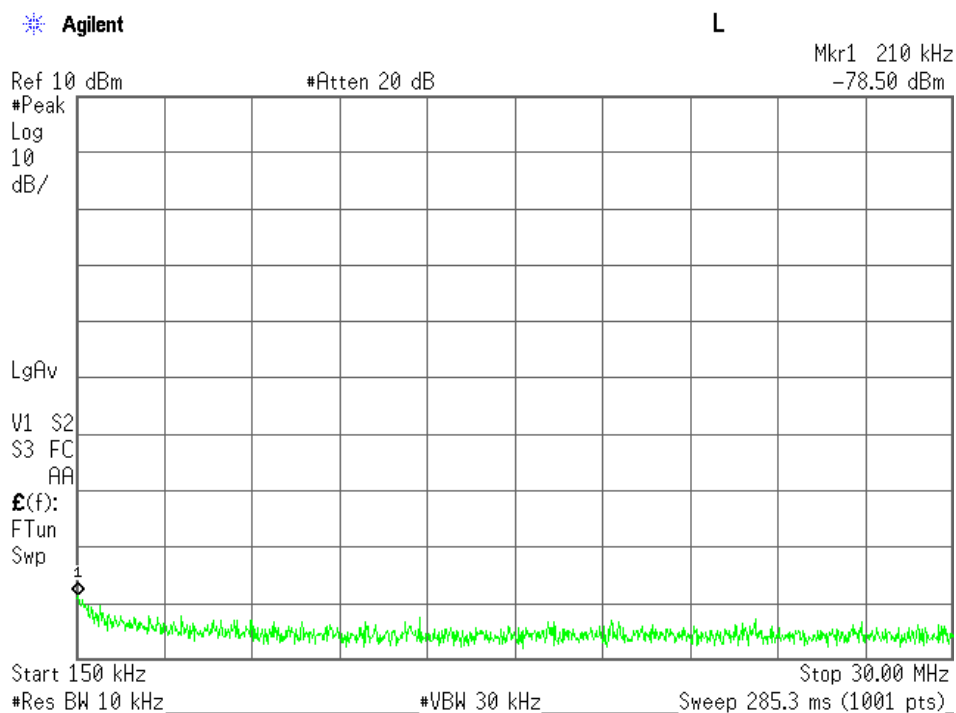

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

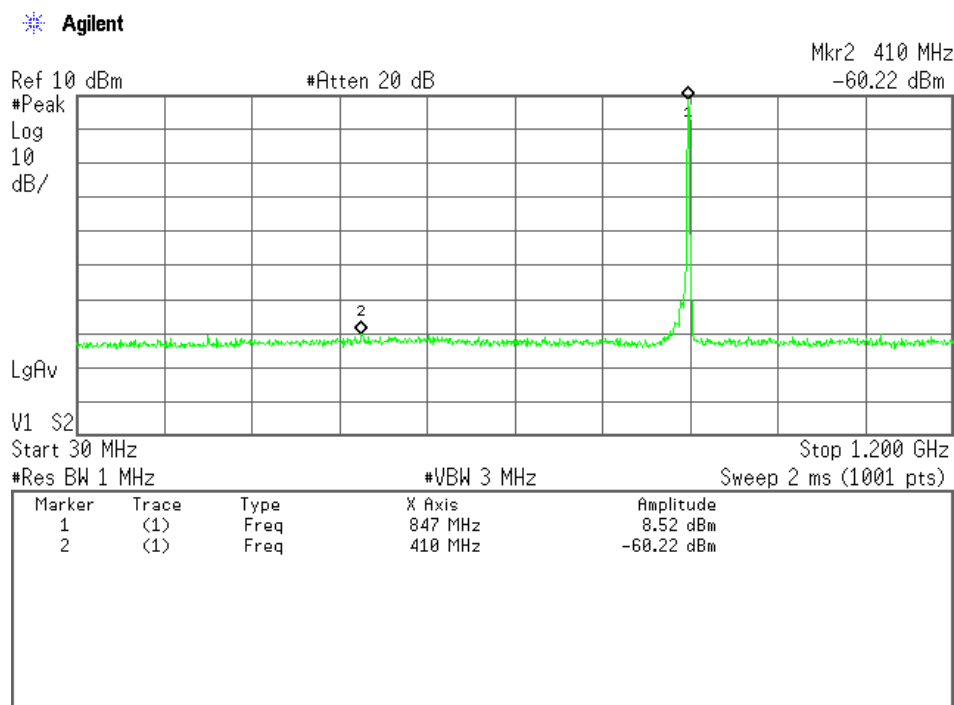

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

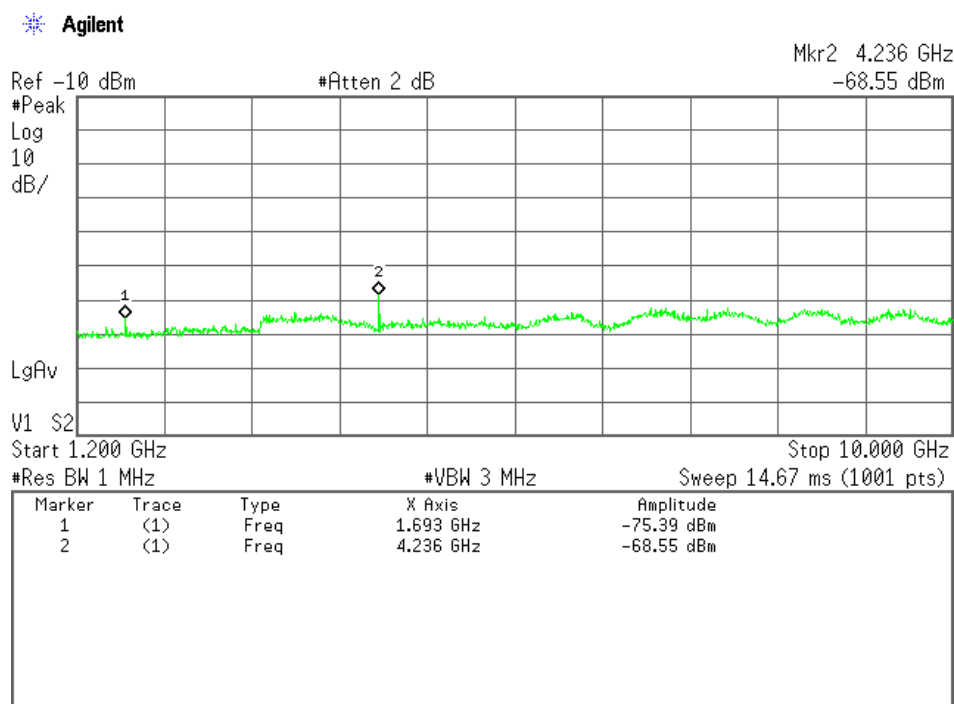

1-4) BW 10MHz(1RB)

(LTE 10MHz)

Test Date: October 28, 2015

Temp.: 26 °C, Humi: 36 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26840	829.000	1658.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2487.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3316.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4145.000	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4974.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5803.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6632.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7461.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
26915	836.500	8290.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
		1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
26990	844.000	7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
		1688.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2532.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3376.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4220.000	21.1	-68.2	-13.0	-47.1	+34.1	C
		5064.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5908.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6752.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7596.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8440.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 4220.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-68.2 dBm</u>
Result	=	-47.1 dBm


Minimum Margin: -13.0 - (-47.1) = 34.1 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

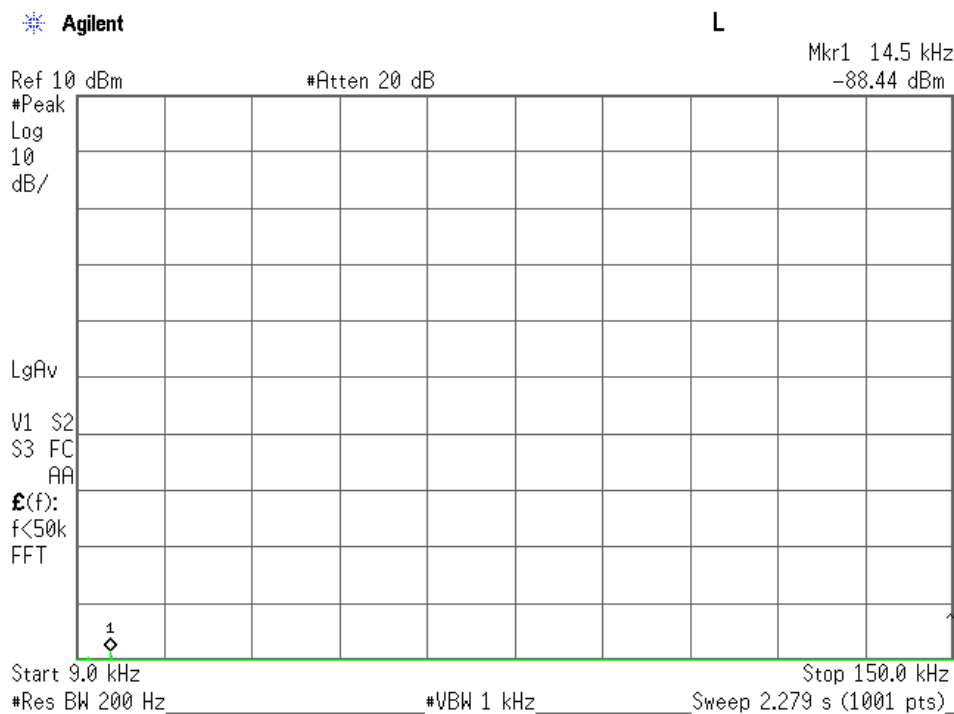


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

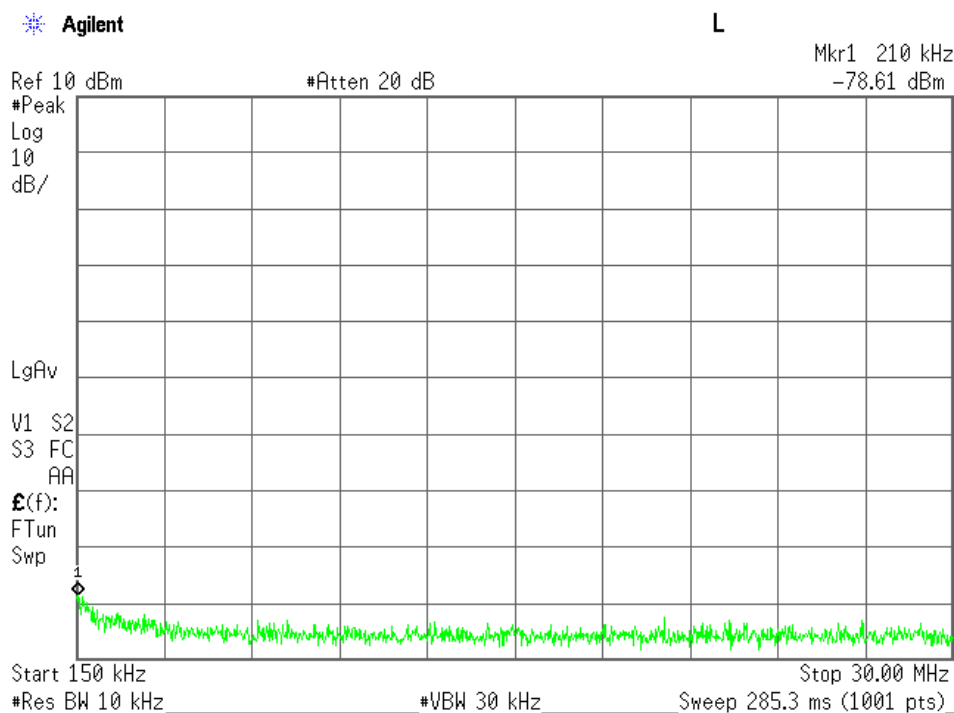


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

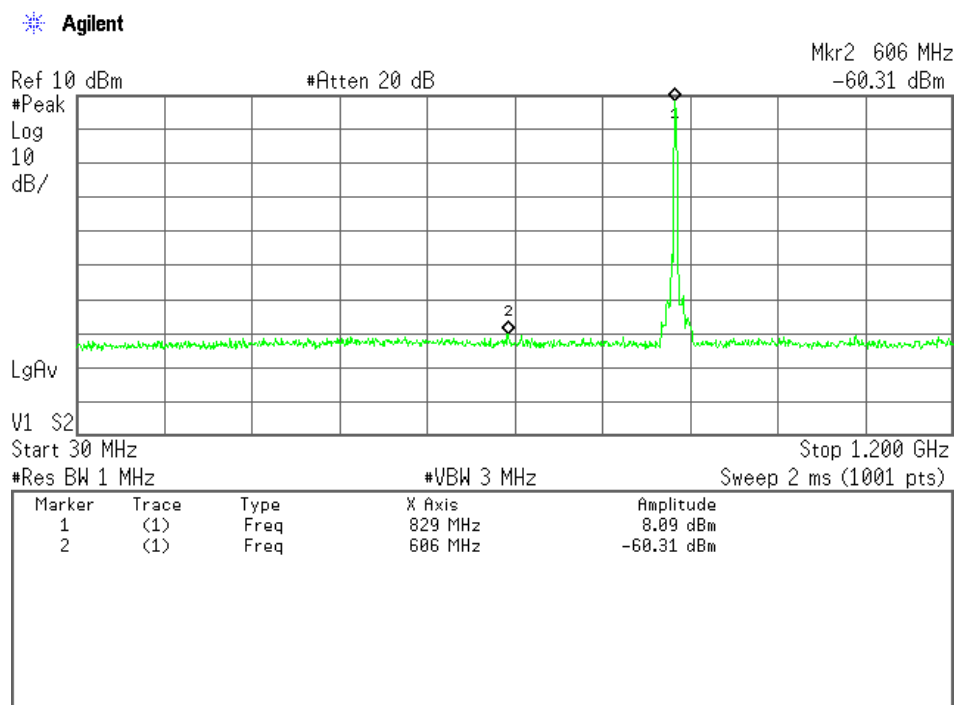


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

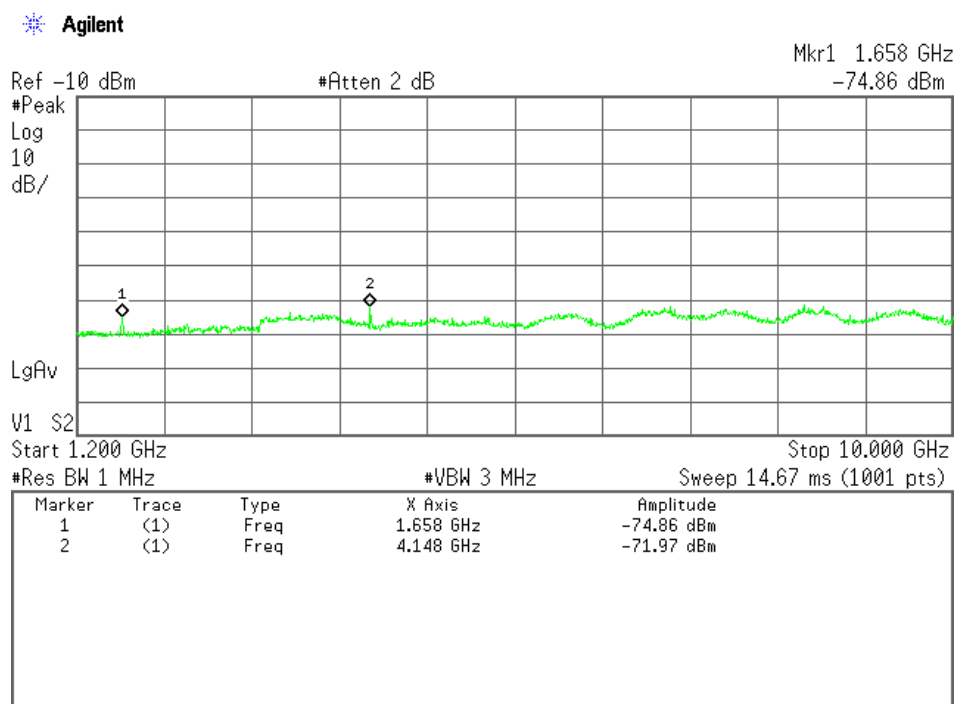


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

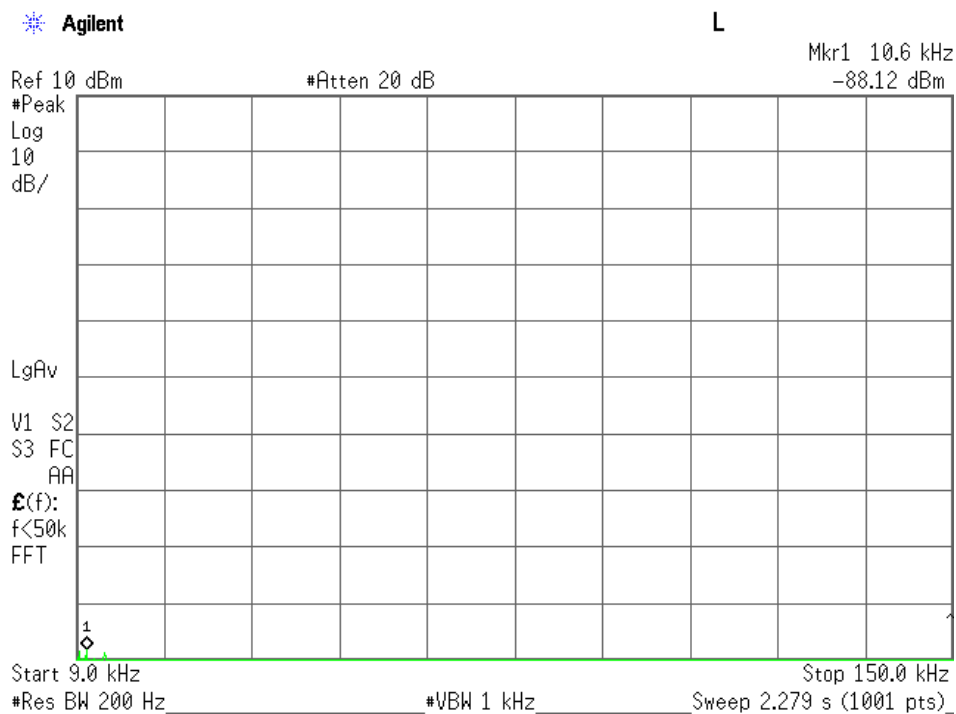


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

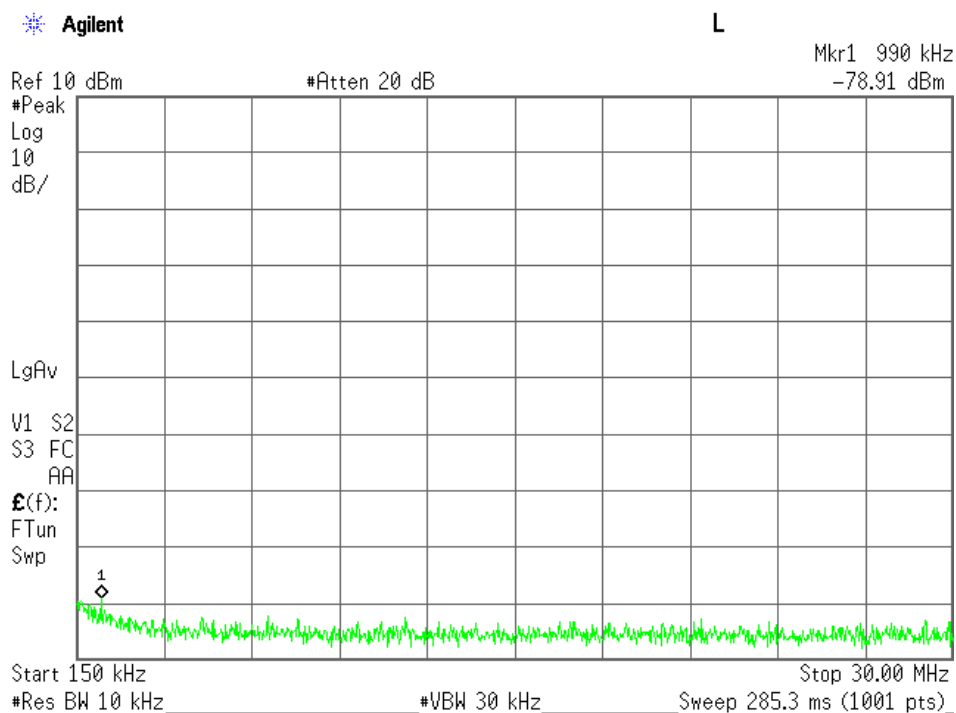


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

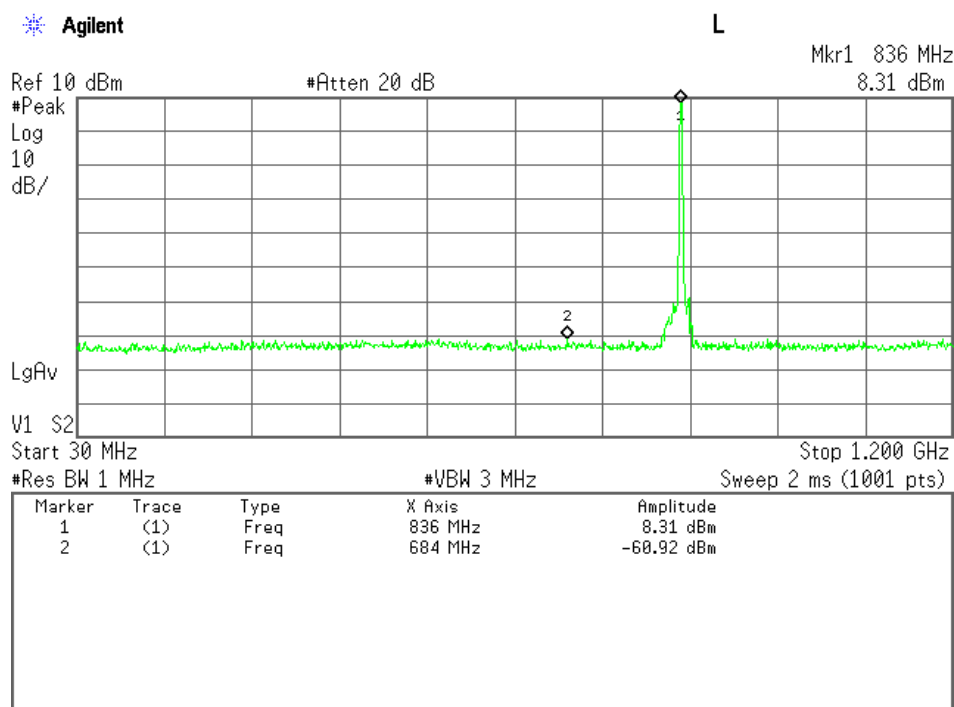


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

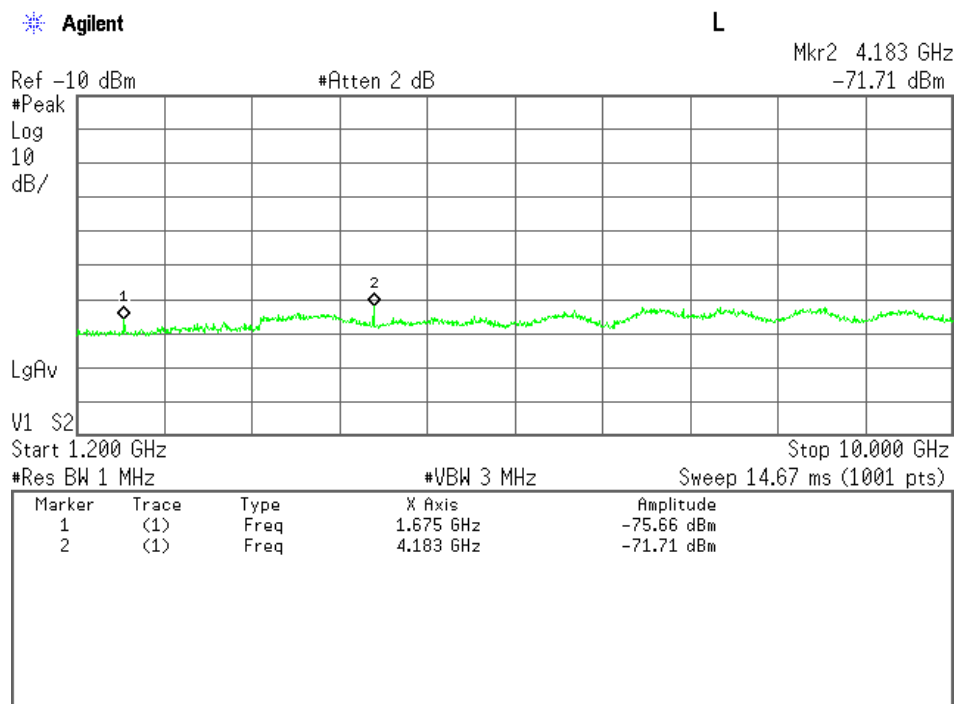


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

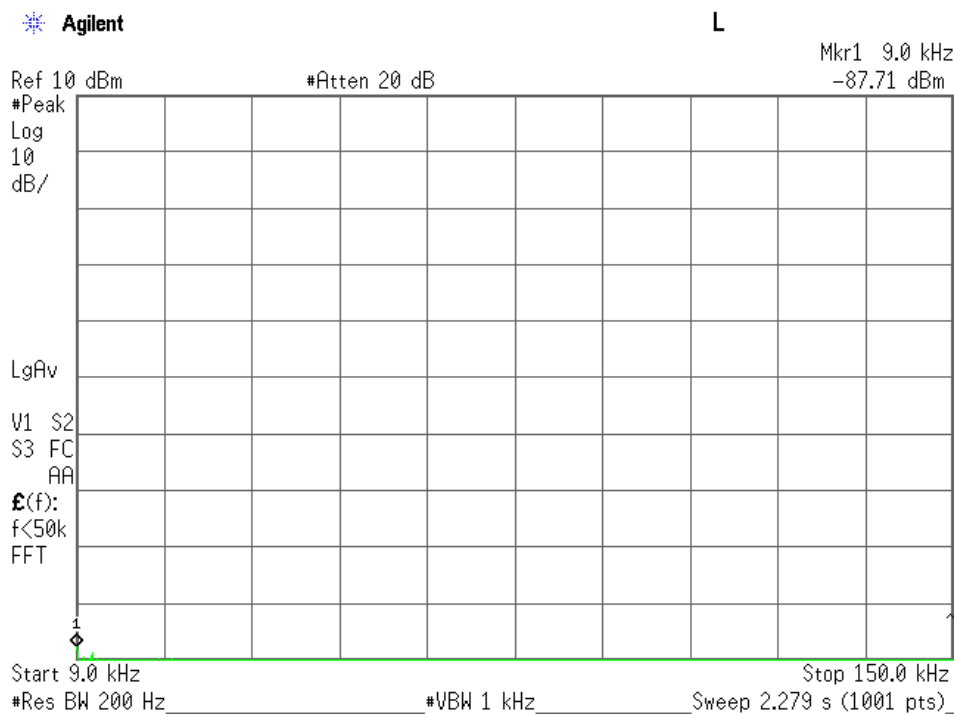


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

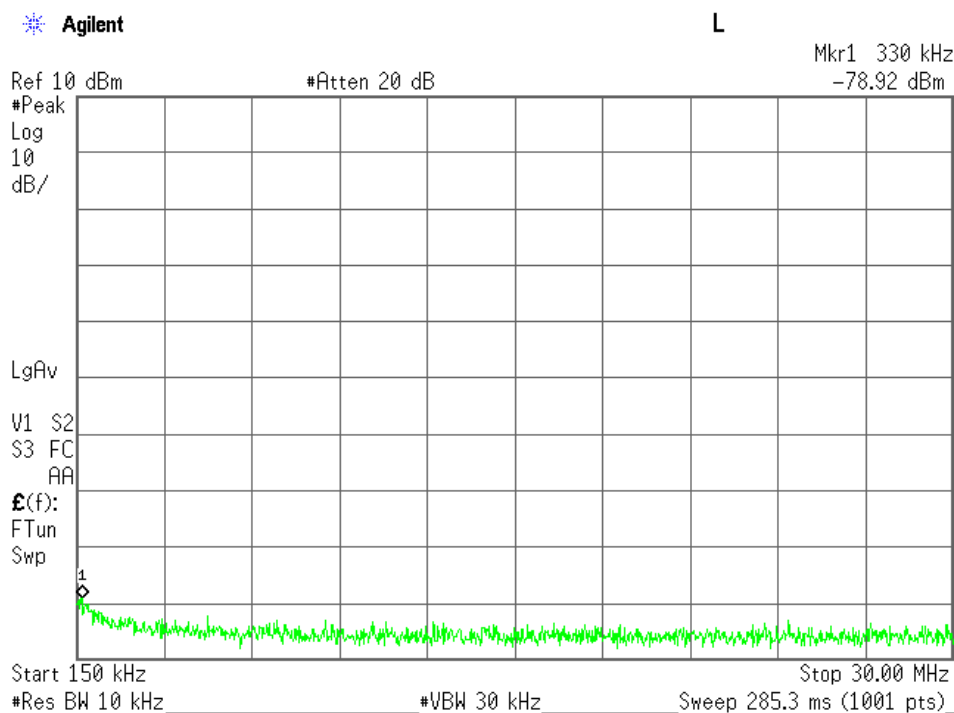

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

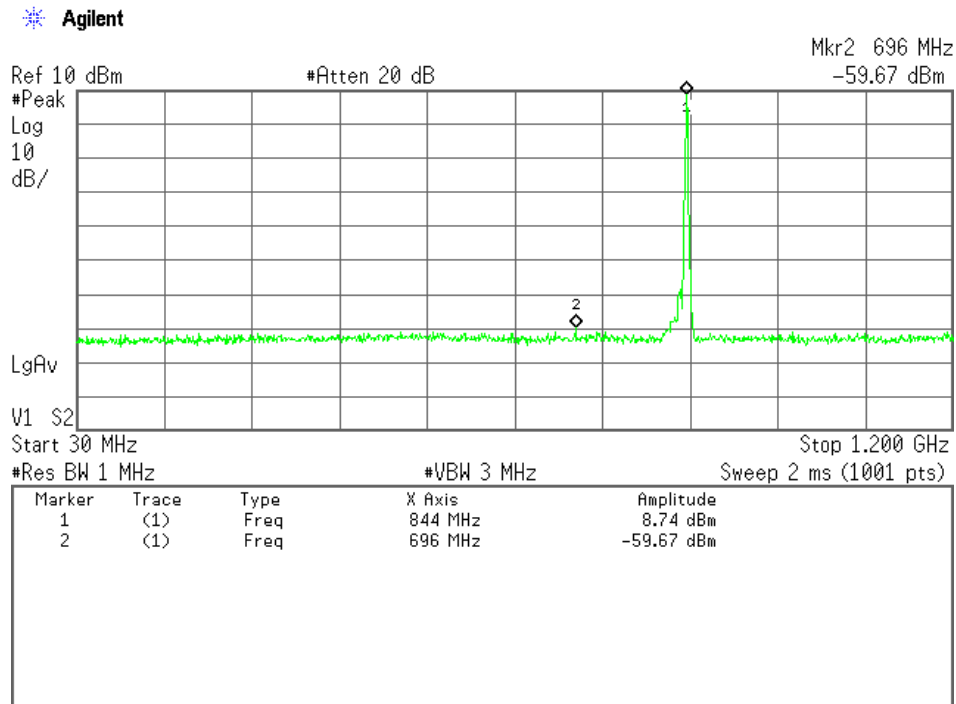

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

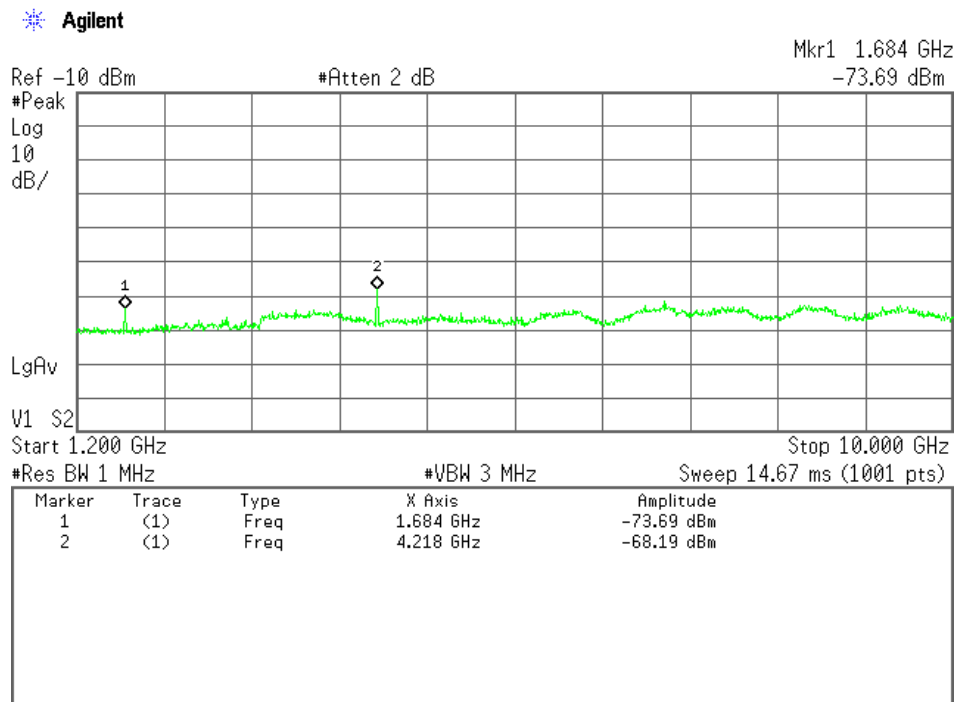

1-5) BW 15MHz(1RB)

(LTE 15MHz)

Test Date: October 28, 2015

Temp.: 26 °C, Humi: 36 %

Transmitting Frequency CH	Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26865	831.500	1663.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2494.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3326.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4157.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4989.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5820.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6652.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7483.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8315.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26915	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26965	841.500	1683.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2524.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3366.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4207.500	21.1	-68.7	-13.0	-47.6	+34.6	C
		5049.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5890.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6732.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7573.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8415.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 4207.5 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-68.7 dBm</u>
Result	=	-47.6 dBm


Minimum Margin: -13.0 - (-47.6) = 34.6 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

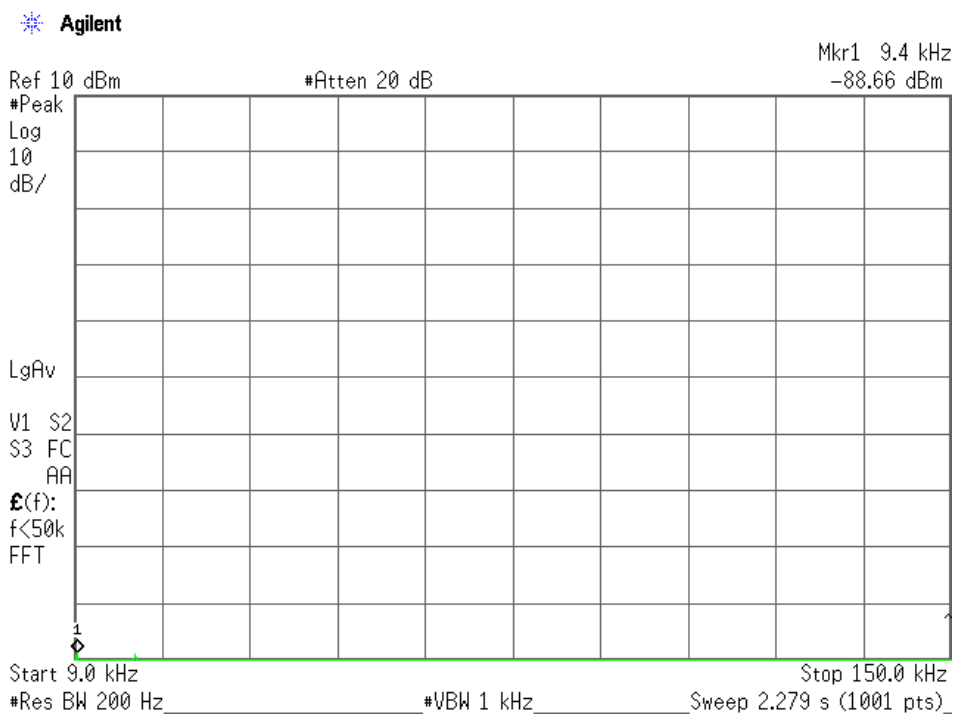


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

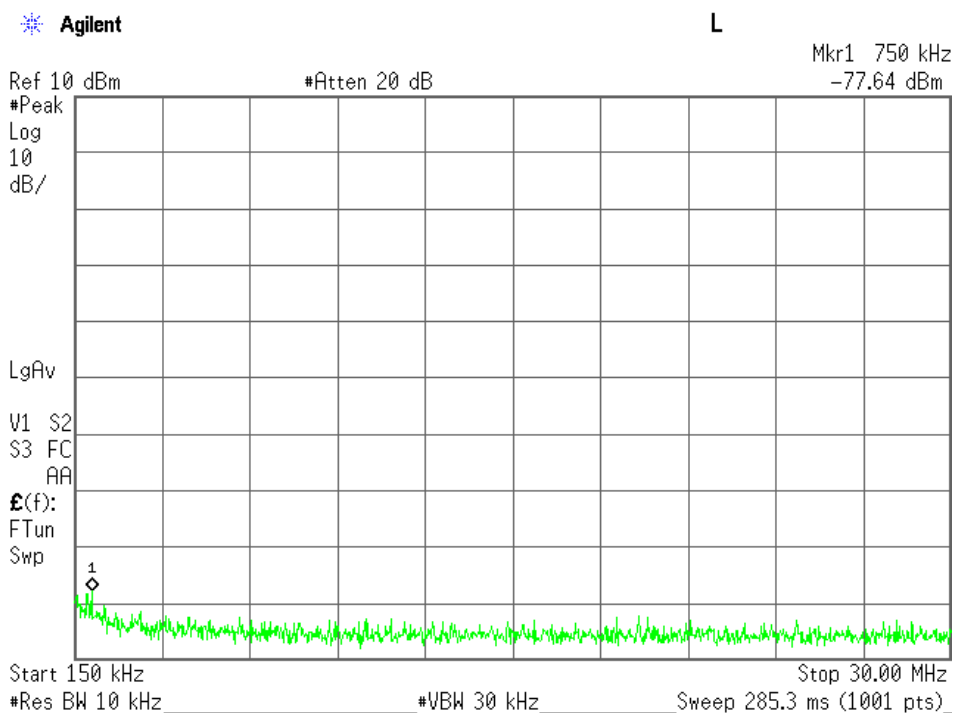


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

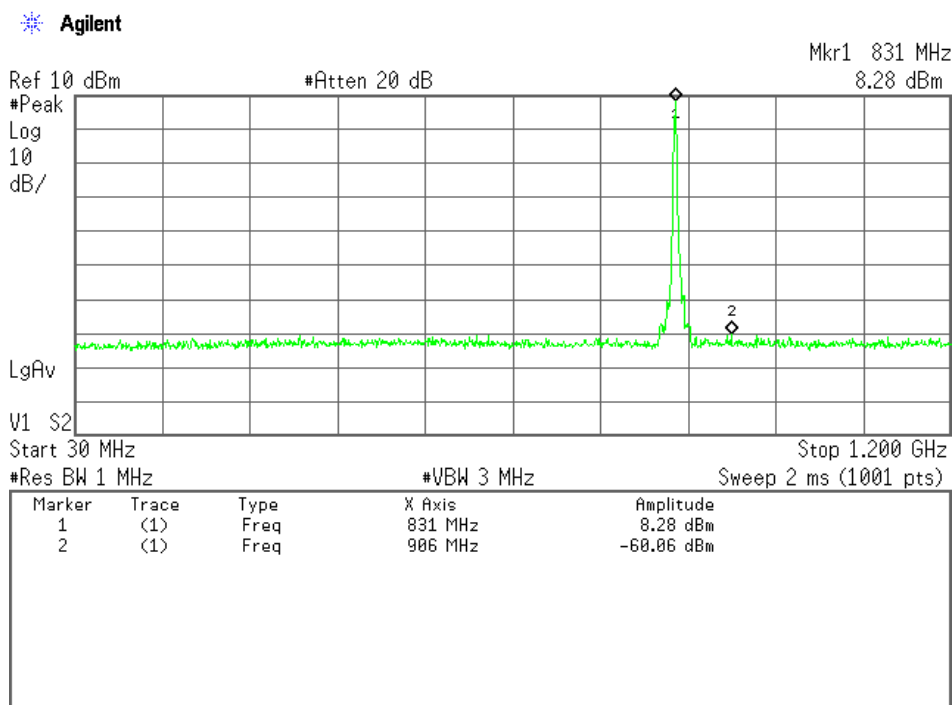


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

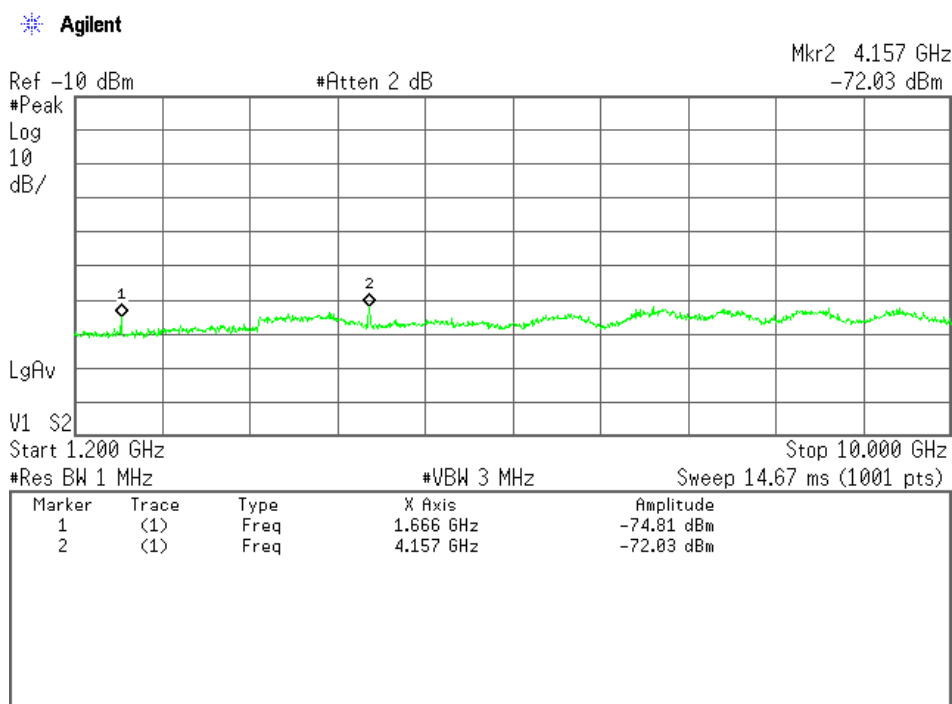


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

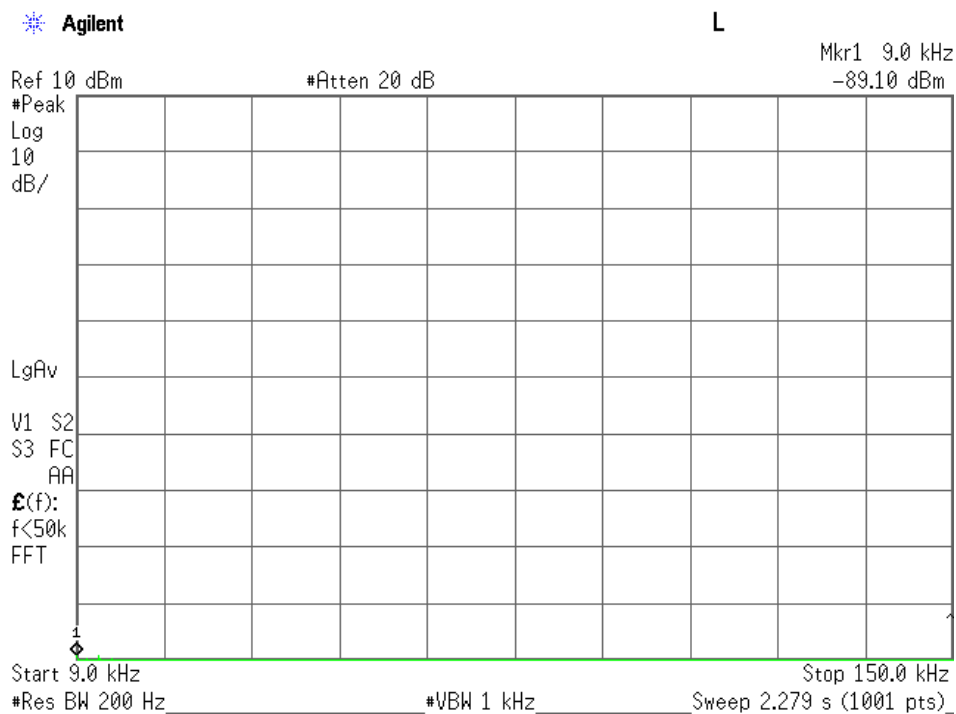


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

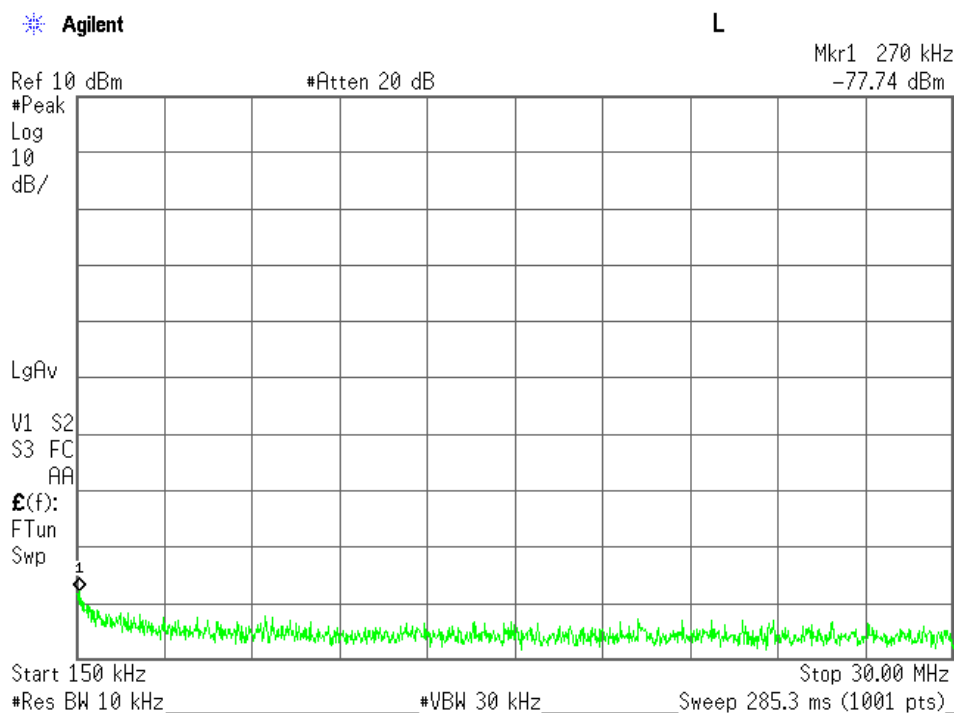


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

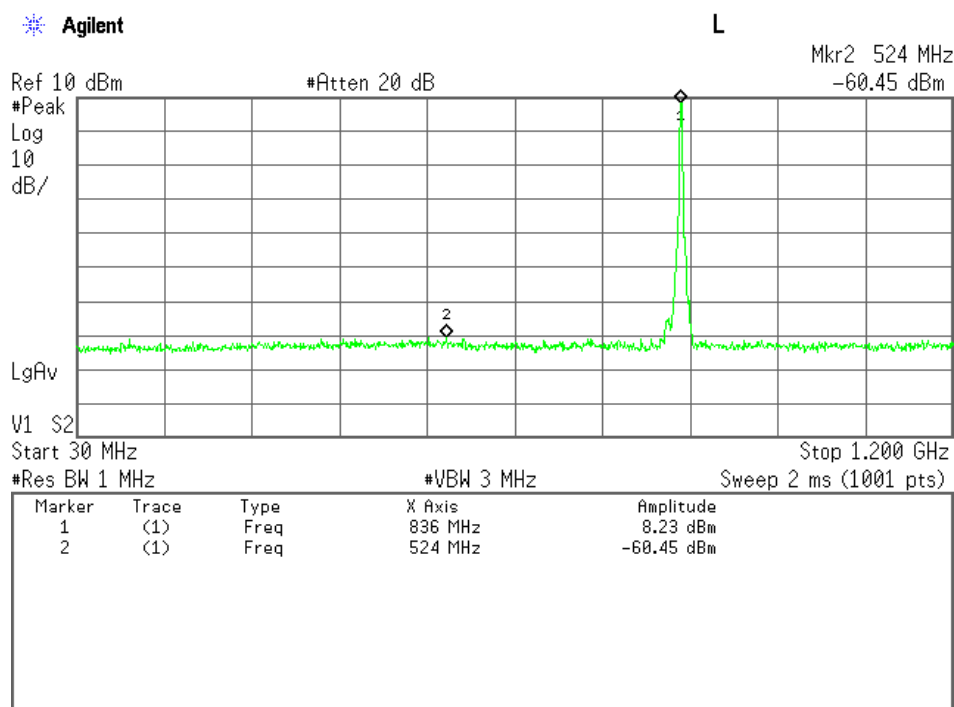


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

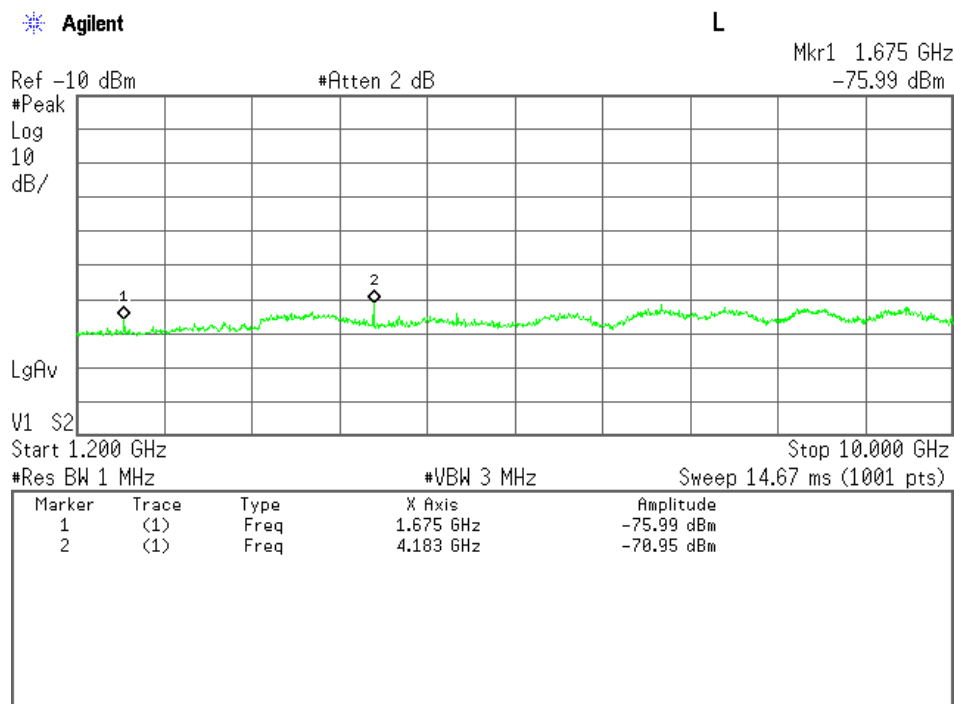


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

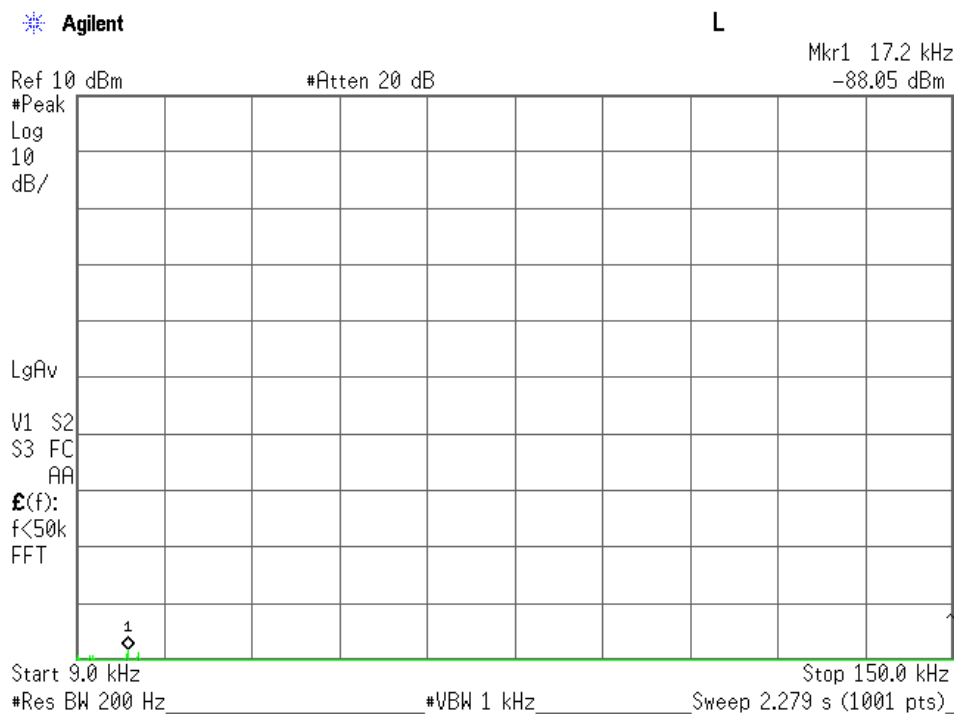


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

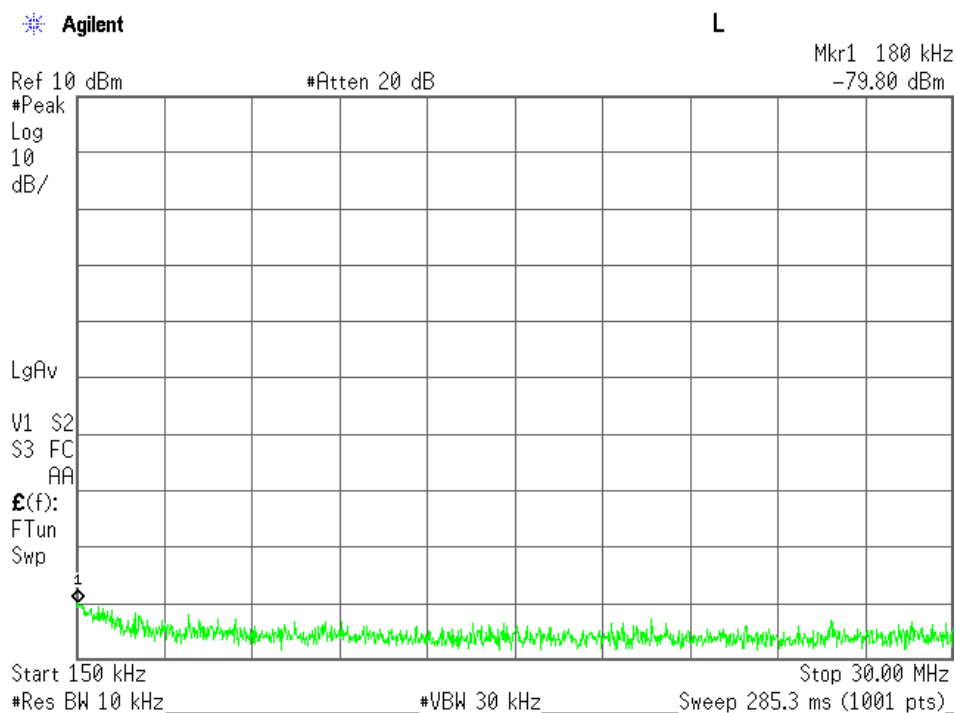

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

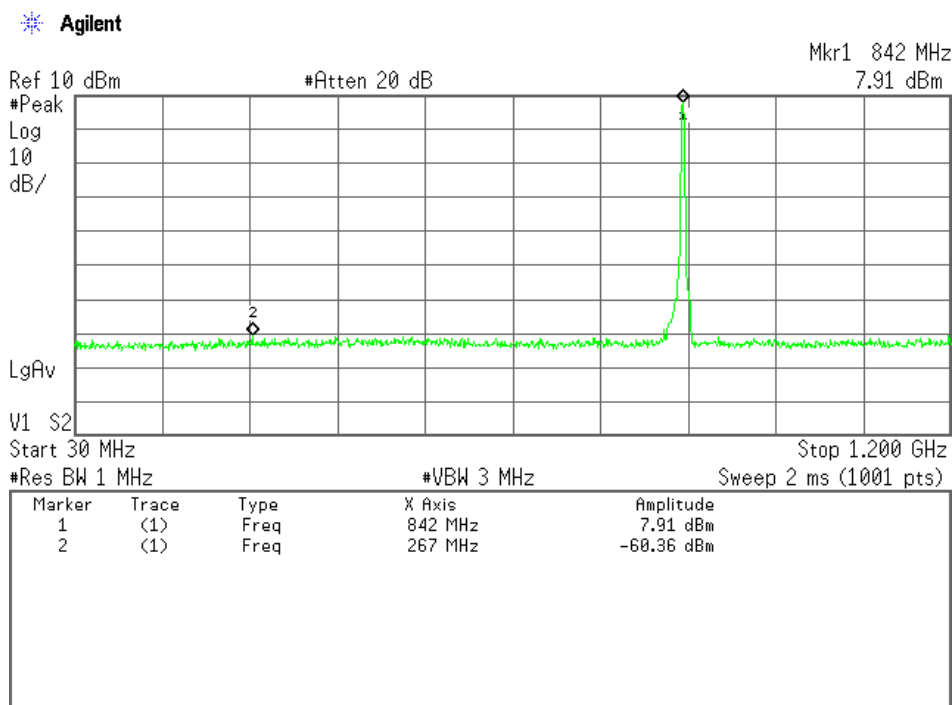

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

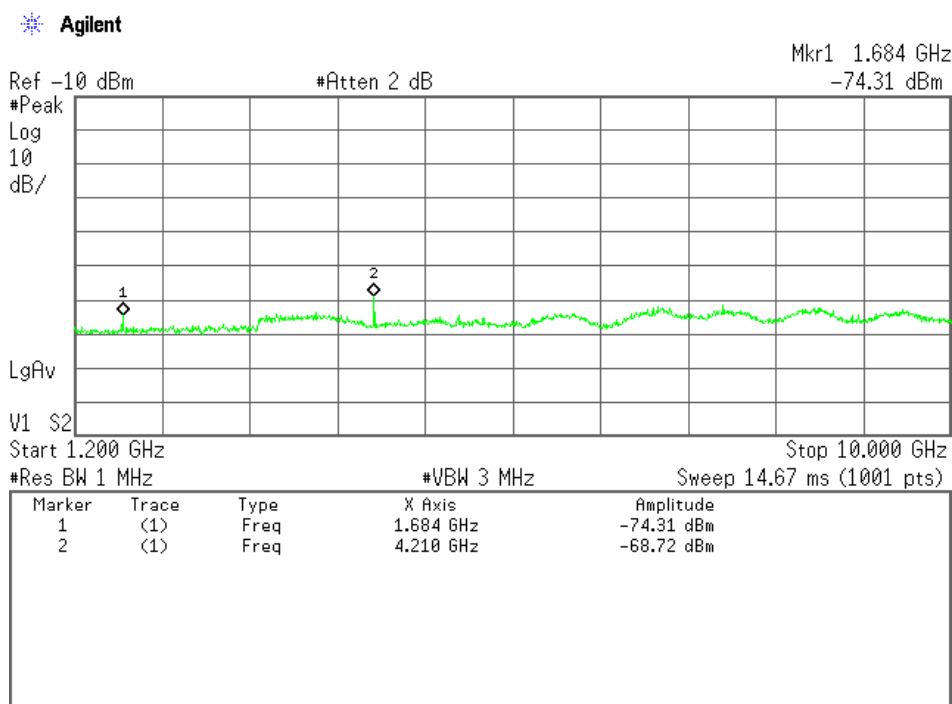

2. Part 90

2-1) BW 1.4MHz(1RB)

(LTE 1.4MHz)

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26697	814.700	1629.400	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2444.100	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3258.800	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4073.500	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4888.200	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5702.900	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6517.600	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7332.300	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8147.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26740	819.000	1638.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2457.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3276.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4095.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4914.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5733.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6552.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7371.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8190.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26783	823.300	1646.600	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2469.900	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3293.200	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4116.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4939.800	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5763.100	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6586.400	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7409.700	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8233.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 8147.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.5 dB
+) <u>Meter Reading</u>	=	<u><-70.0 dBm</u>
Result	=	<-48.5 dBm


Minimum Margin: -13.0 - (<-48.5) = >35.5 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

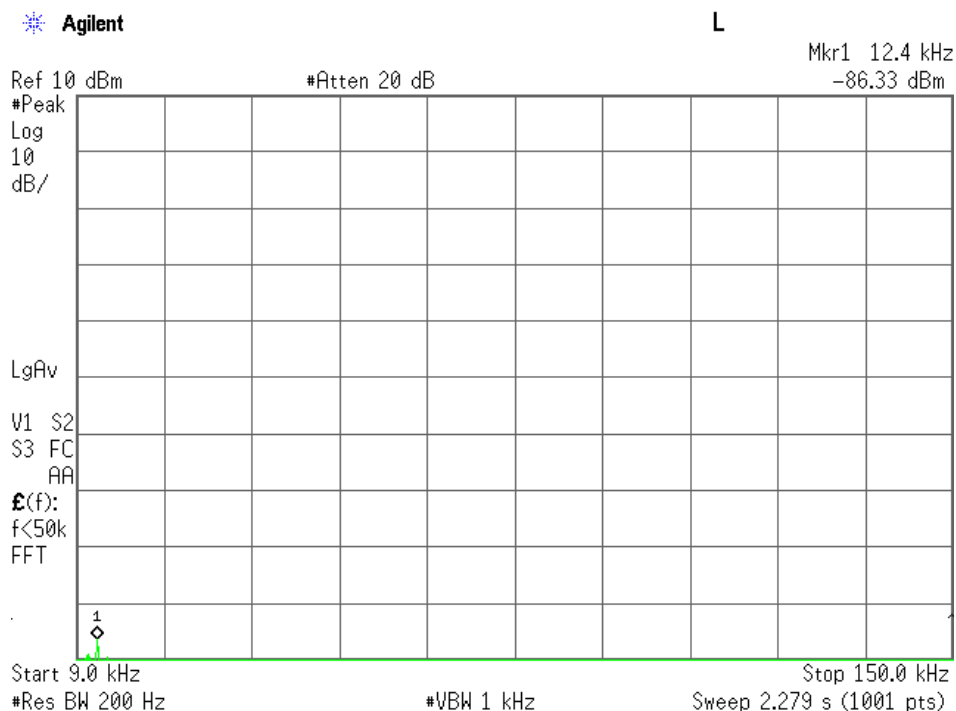


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

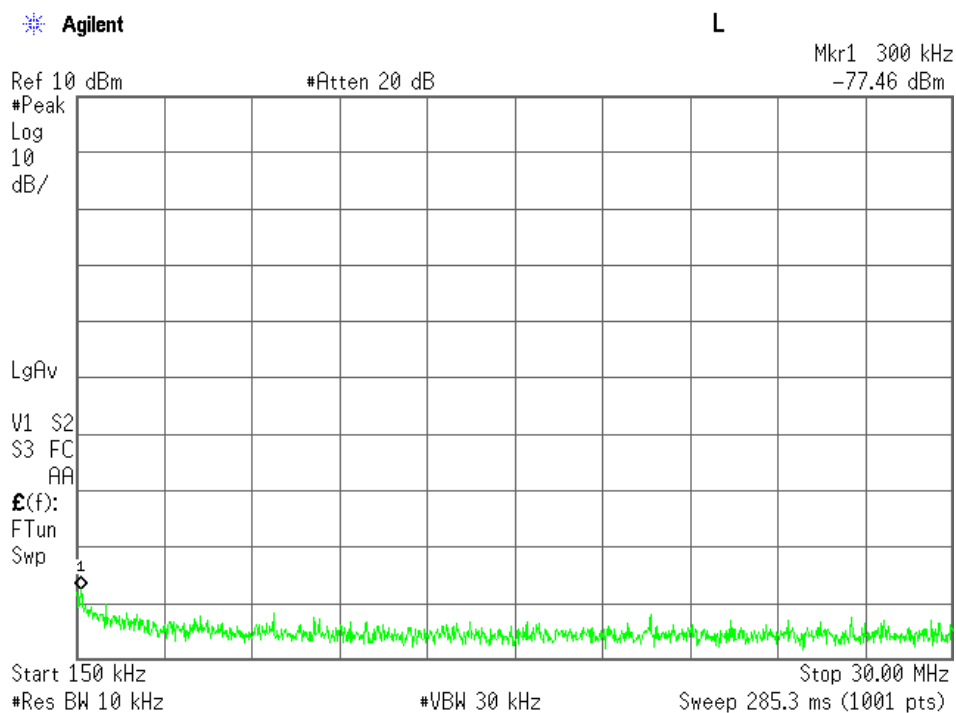


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

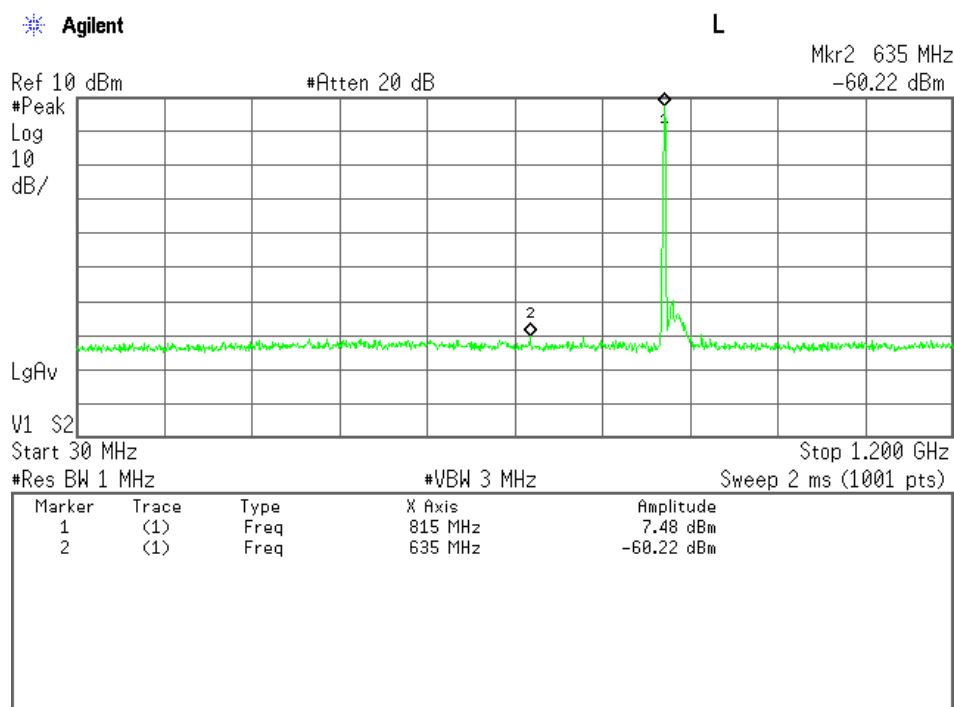


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

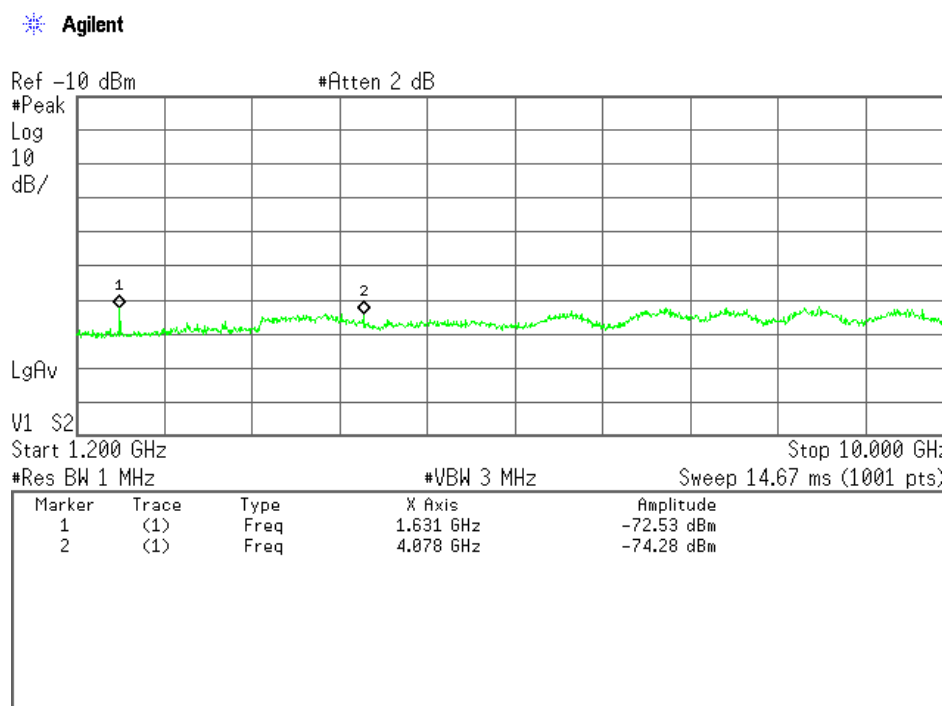


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

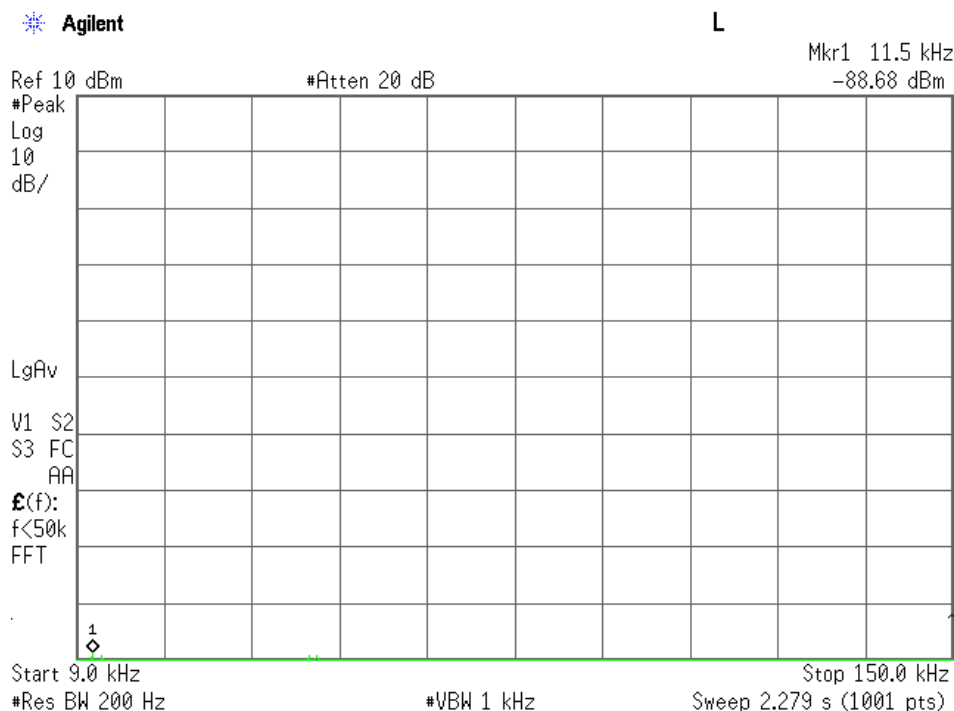


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

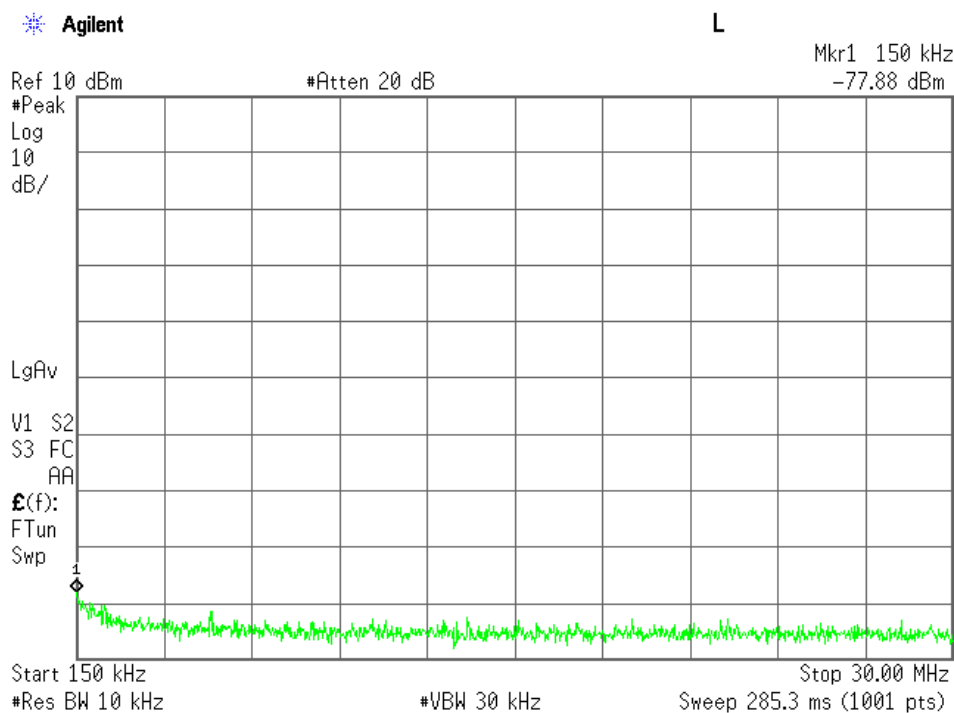


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

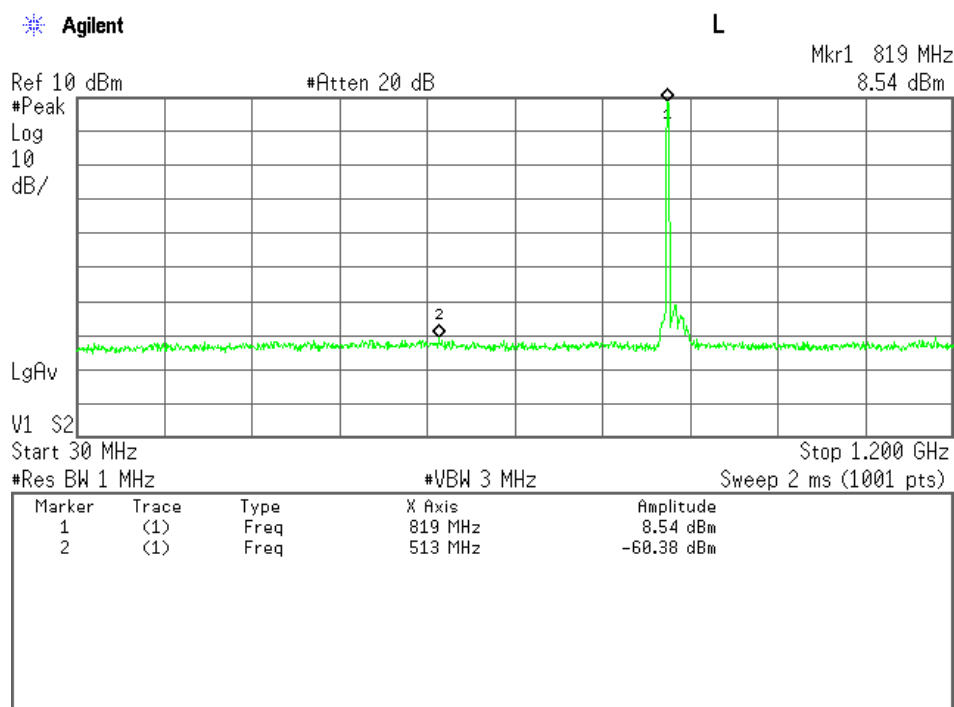


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

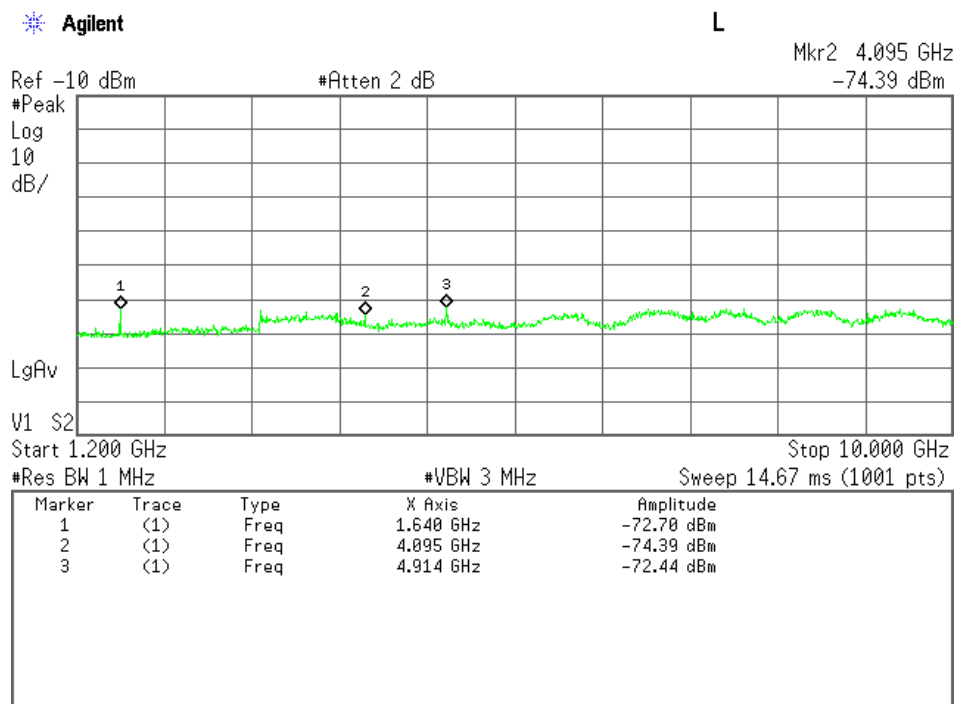


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

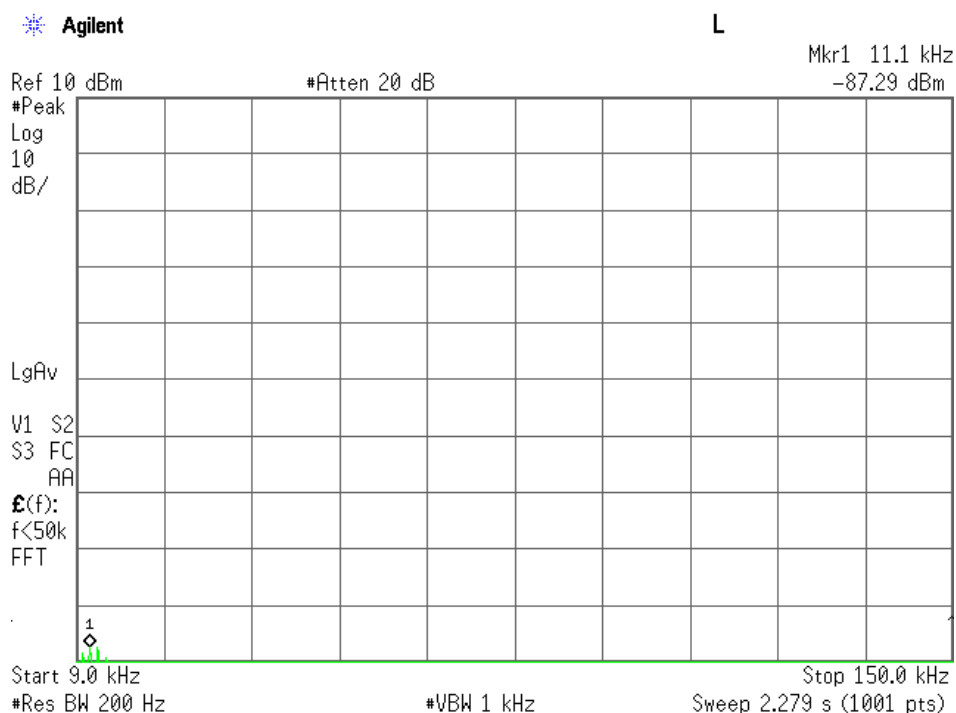


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

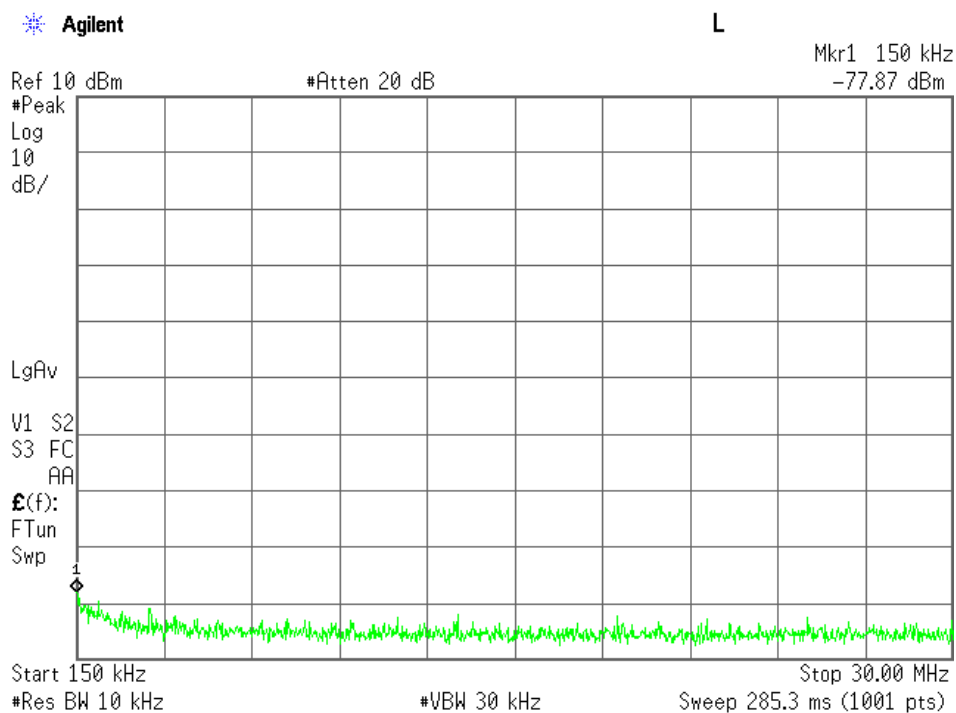

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

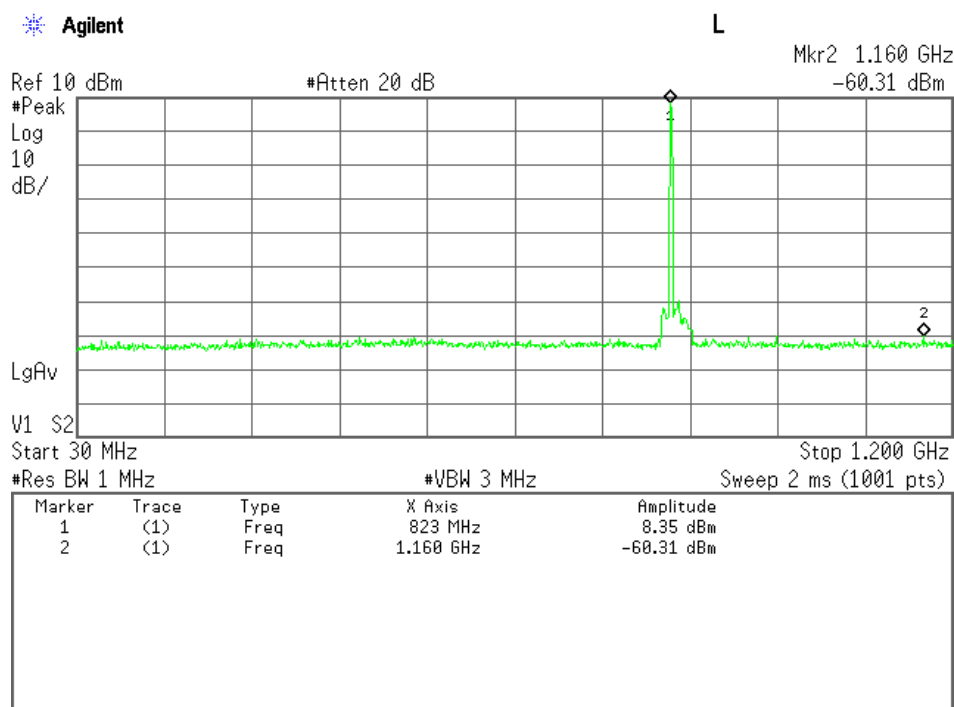

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

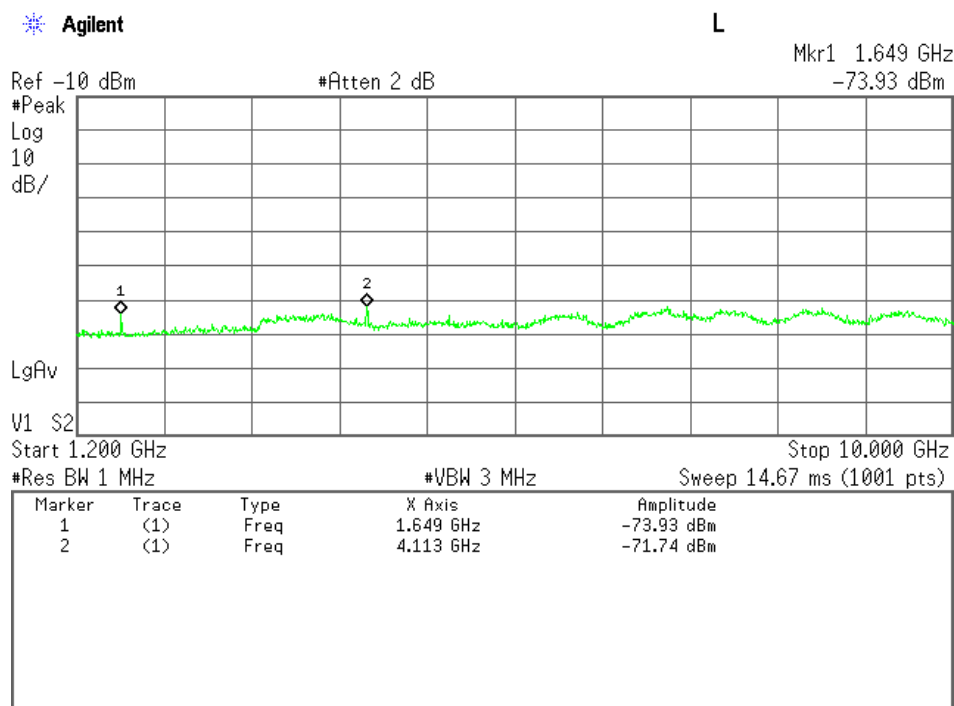

2-2) BW 3MHz(1RB)

(LTE 3MHz)

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26705	815.500	1631.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2446.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3262.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4077.500	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4893.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5708.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6524.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7339.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8155.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26740	819.000	1638.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2457.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3276.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4095.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4914.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5733.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6552.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7371.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8190.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
26775	822.500	1645.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2467.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3290.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4112.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4935.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5757.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6580.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7402.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8225.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 8155.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.5 dB
+) <u>Meter Reading</u>	=	<u><-70.0 dBm</u>
Result	=	<-48.5 dBm


Minimum Margin: -13.0 - (<-48.5) = >35.5 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

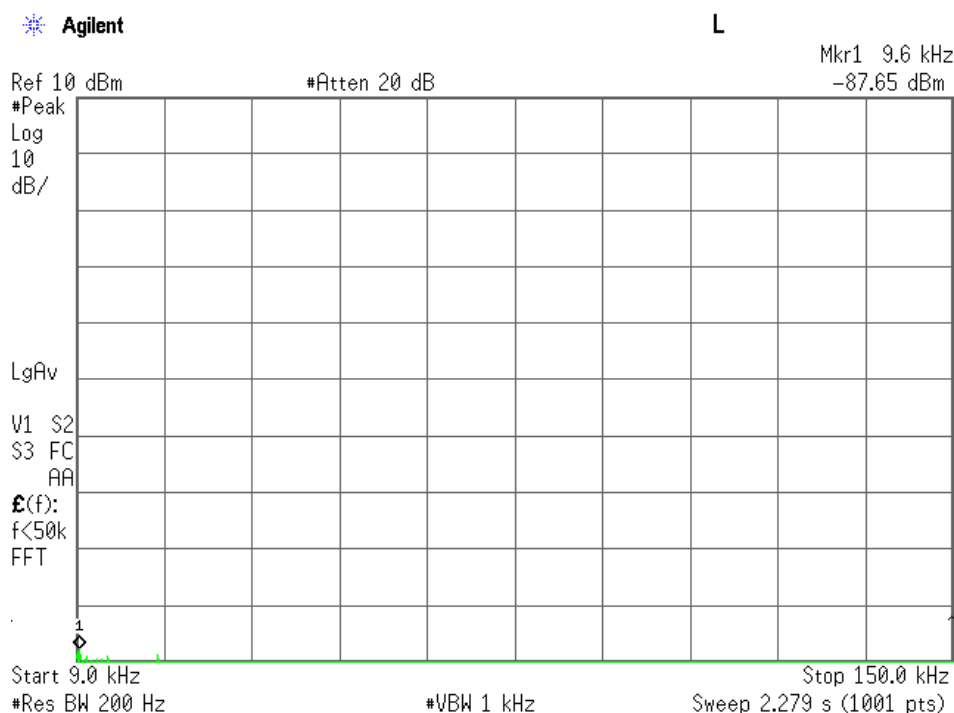


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

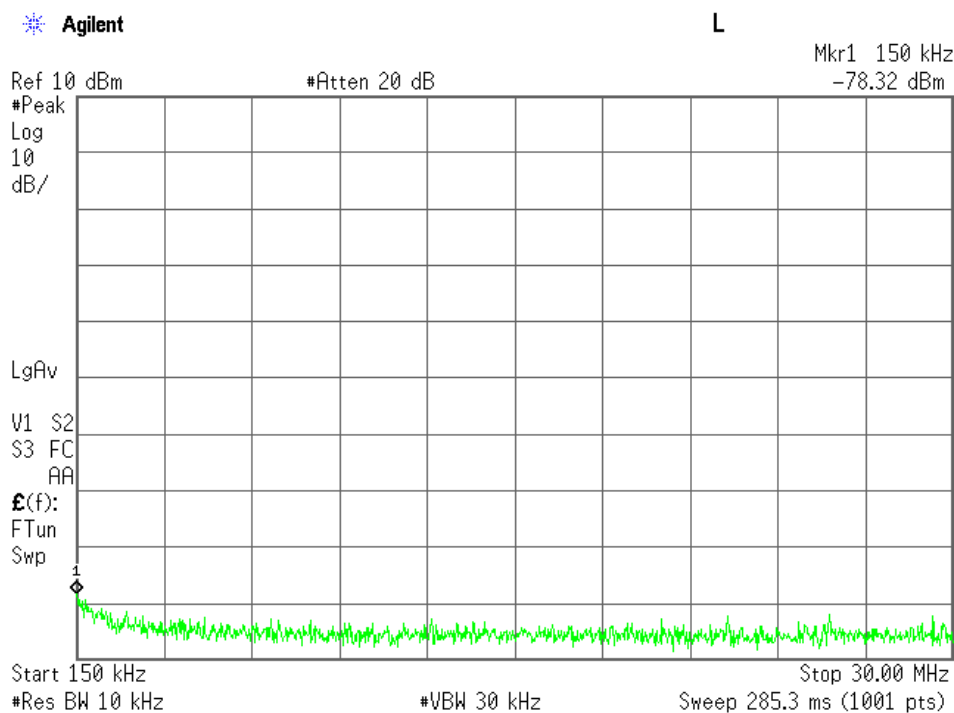


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

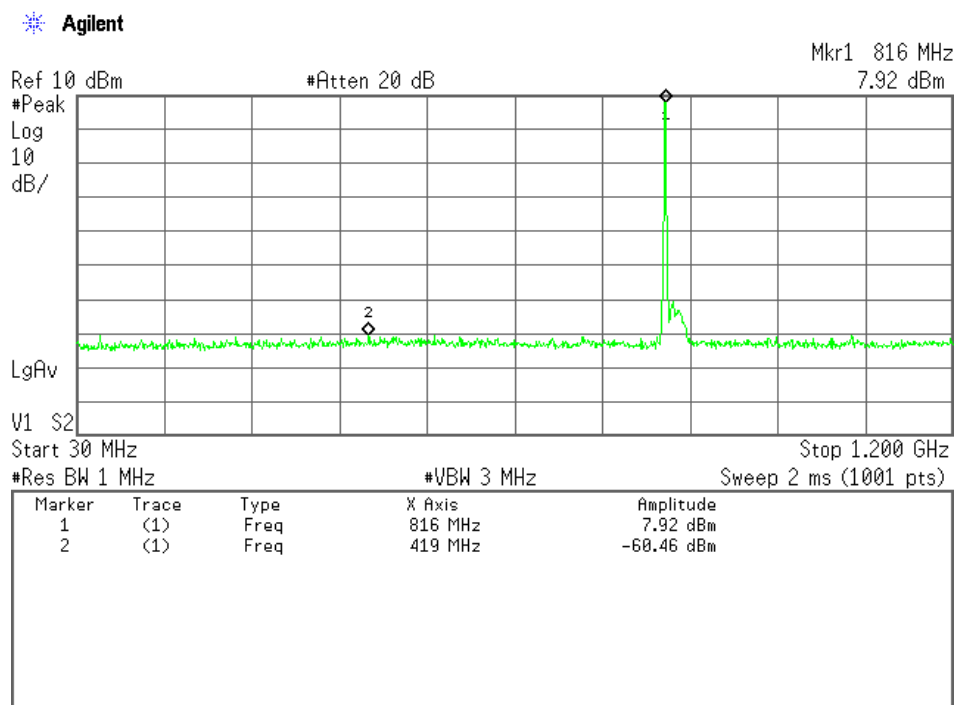


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

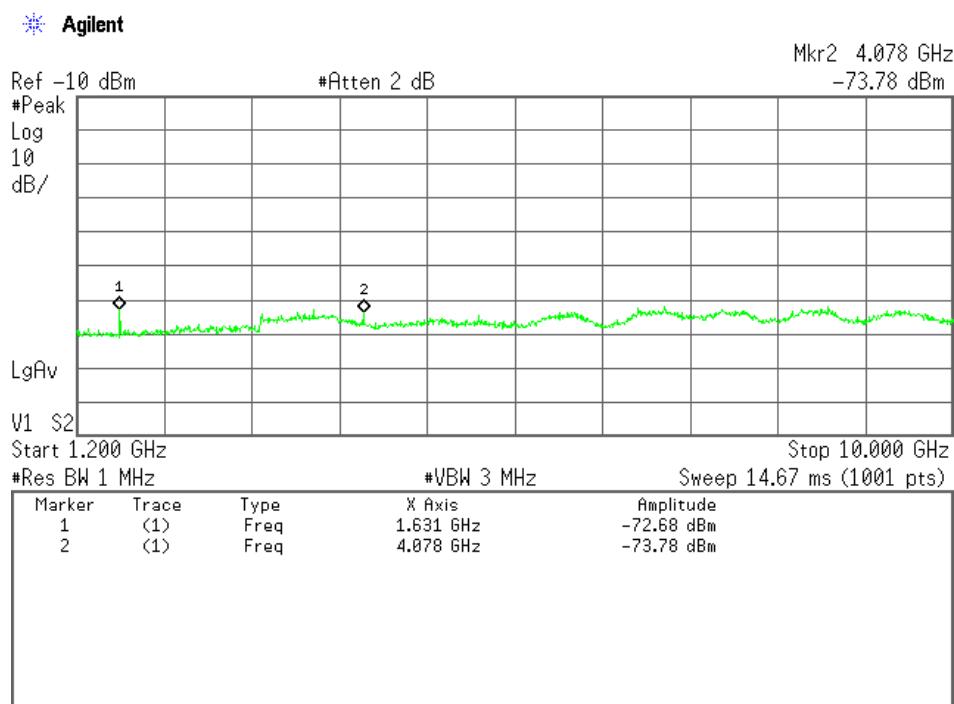


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

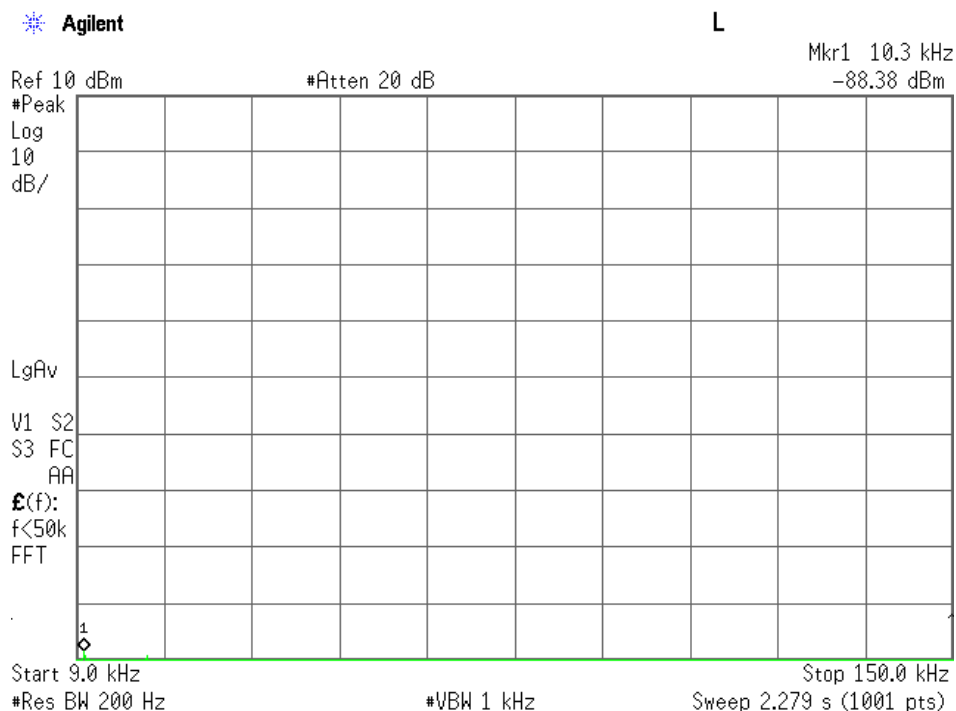


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

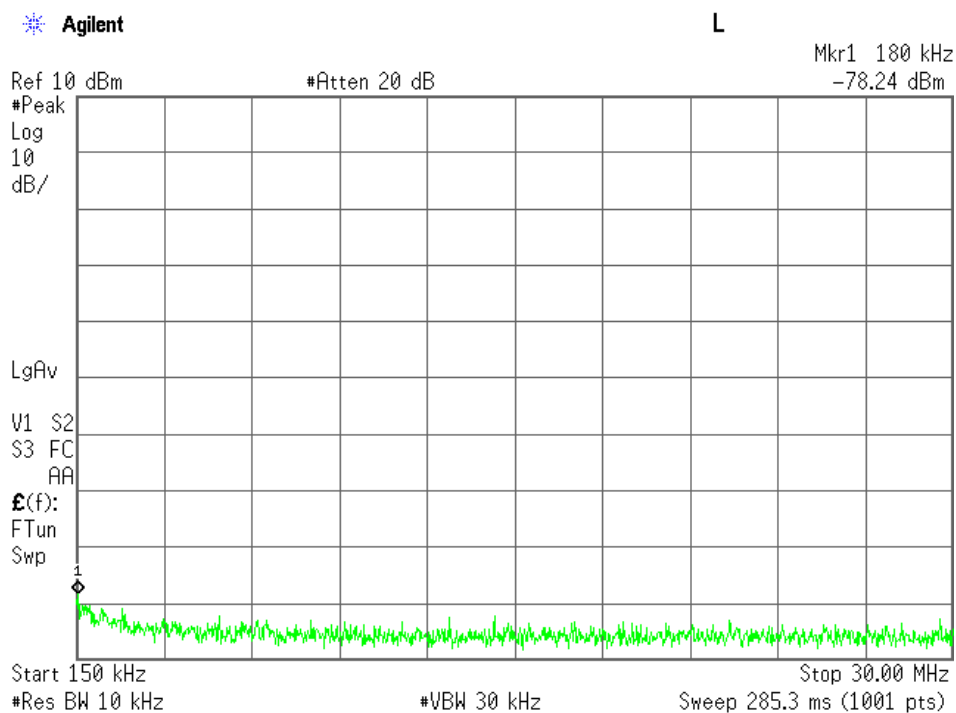


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

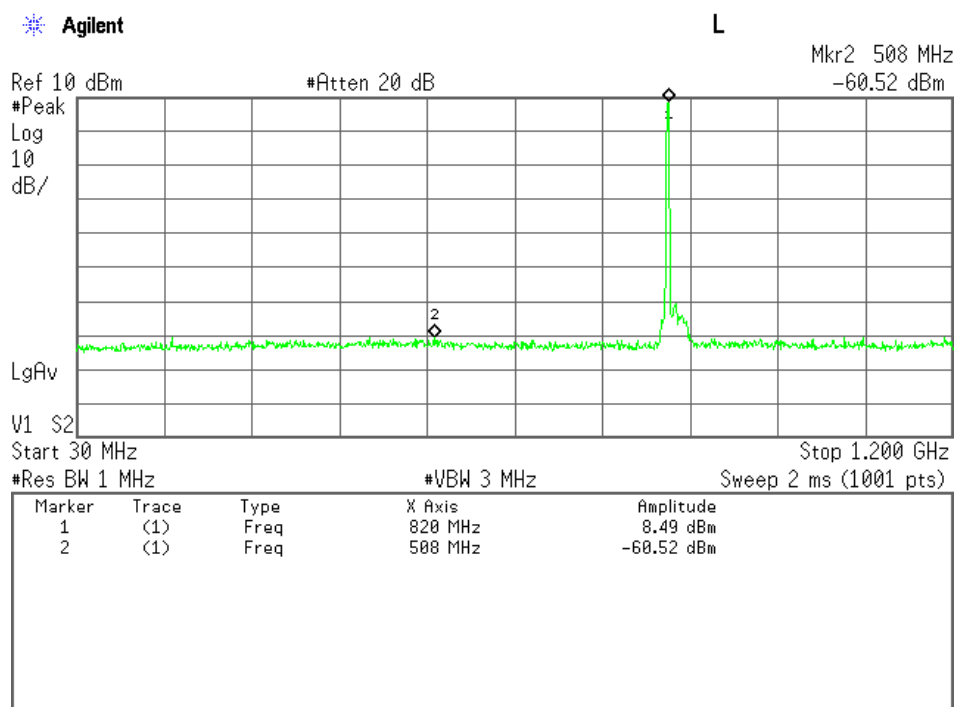


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

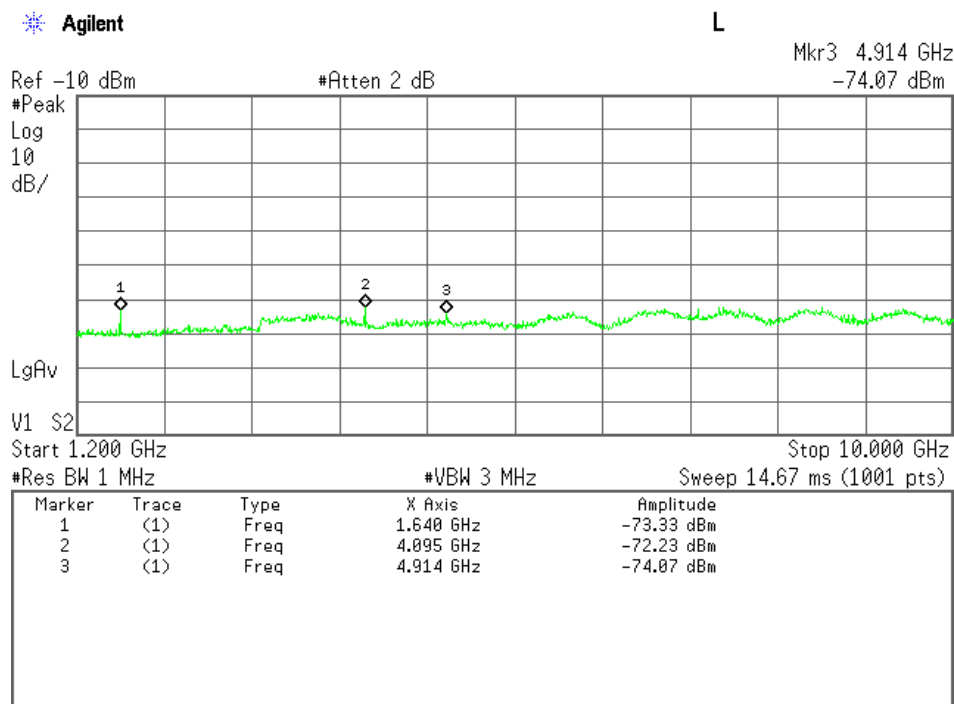


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

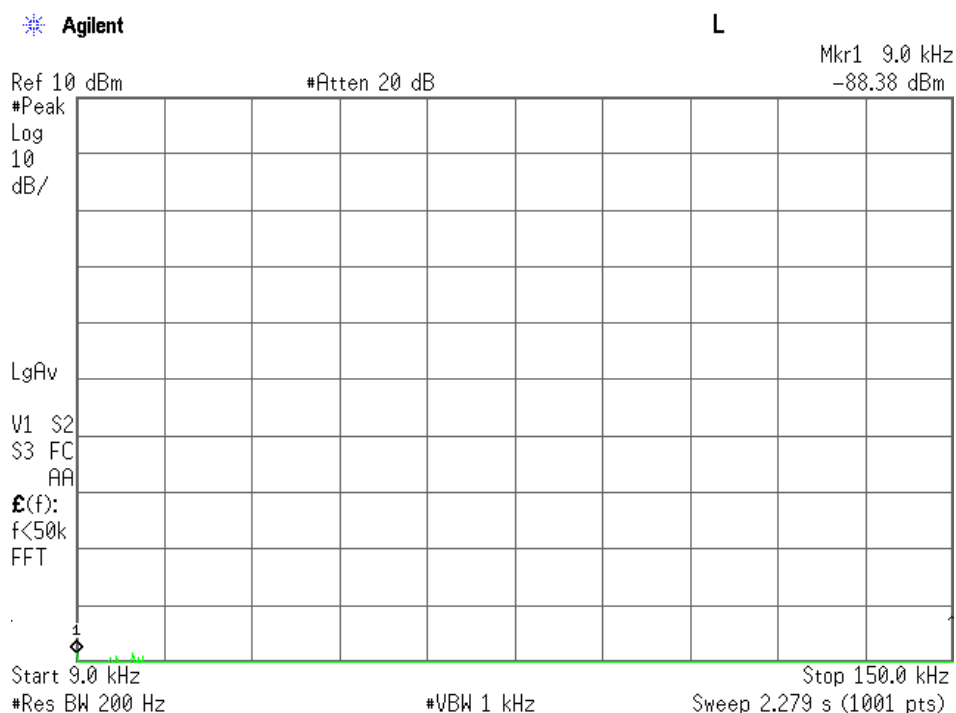


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

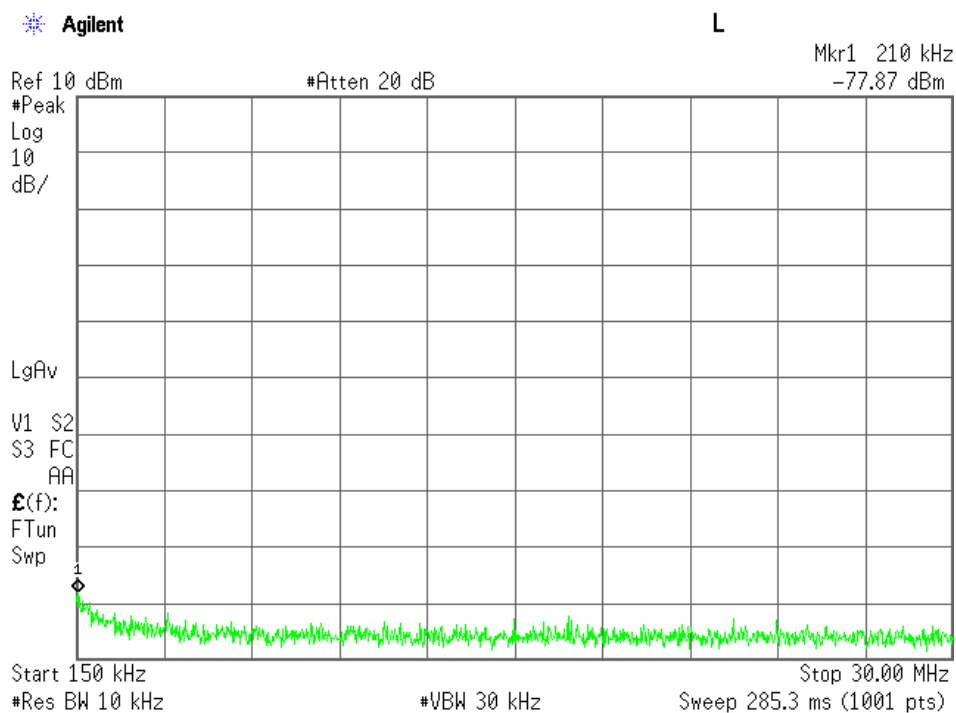

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

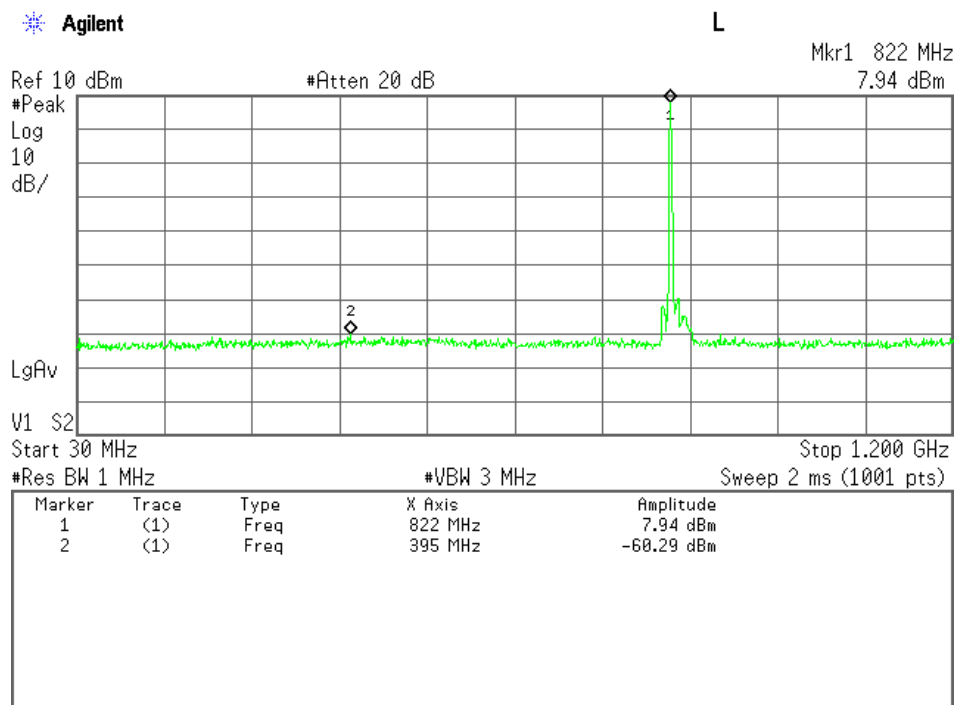

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

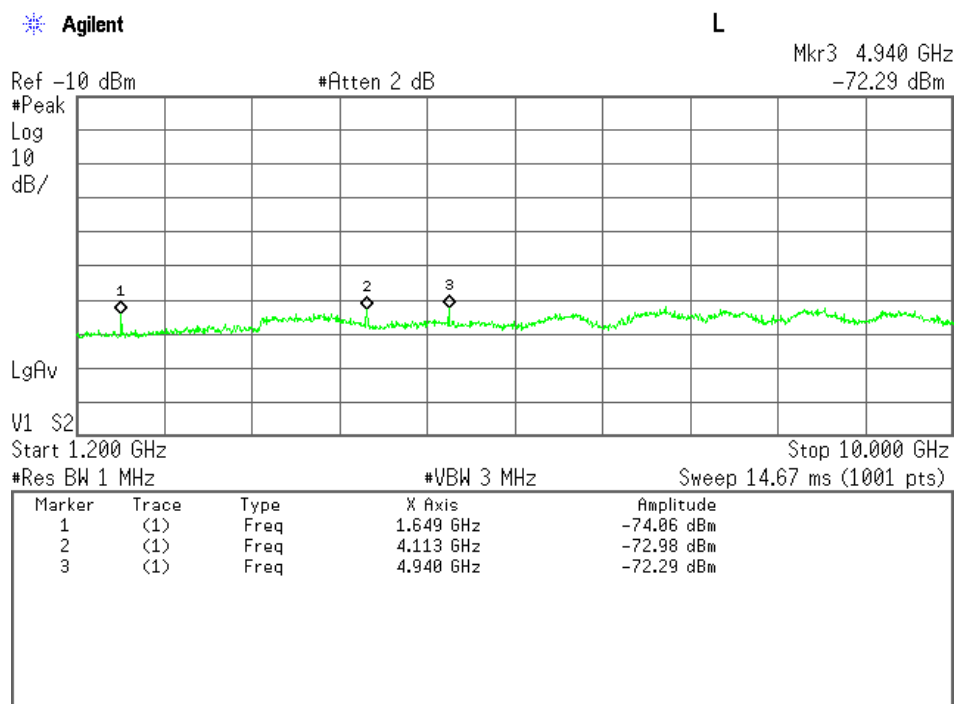

2-3) BW 5MHz(1RB)

(LTE 5MHz)

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26715	816.500	1633.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2449.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3266.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4082.500	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4899.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5715.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6532.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7348.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
26740	819.000	8165.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
		1638.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2457.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3276.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4095.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4914.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5733.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6552.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
26765	821.500	7371.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8190.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
		1643.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2464.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3286.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4107.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4929.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5750.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
26765	821.500	6572.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7393.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8215.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 8165.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.5 dB
+) <u>Meter Reading</u>	=	<u><-70.0 dBm</u>
Result	=	<-48.5 dBm


Minimum Margin: -13.0 - (<-48.5) = >35.5 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10 \log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

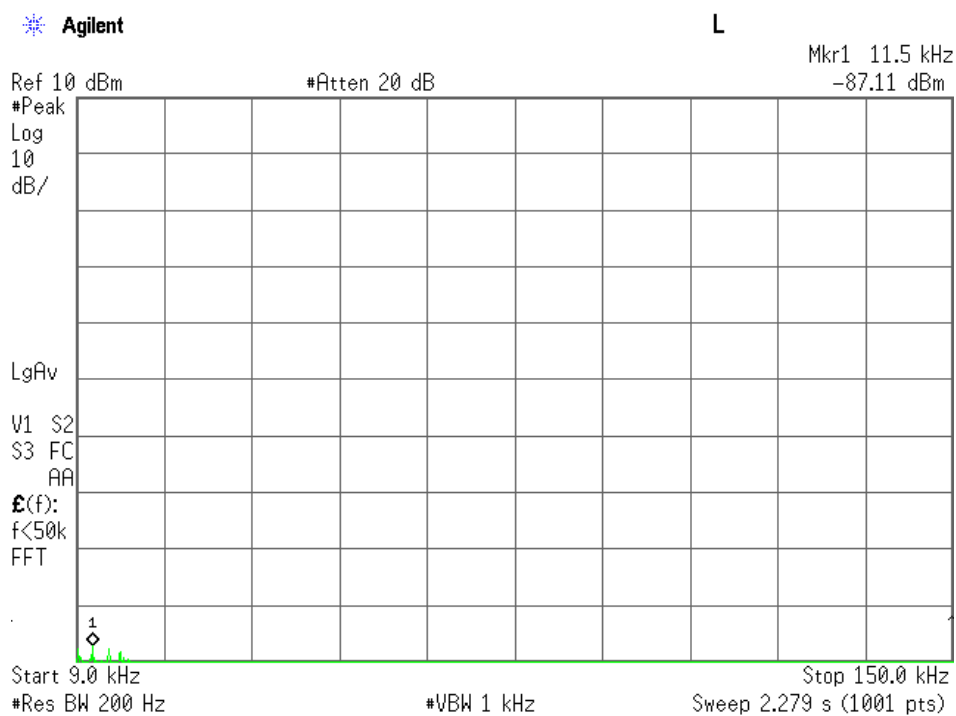


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

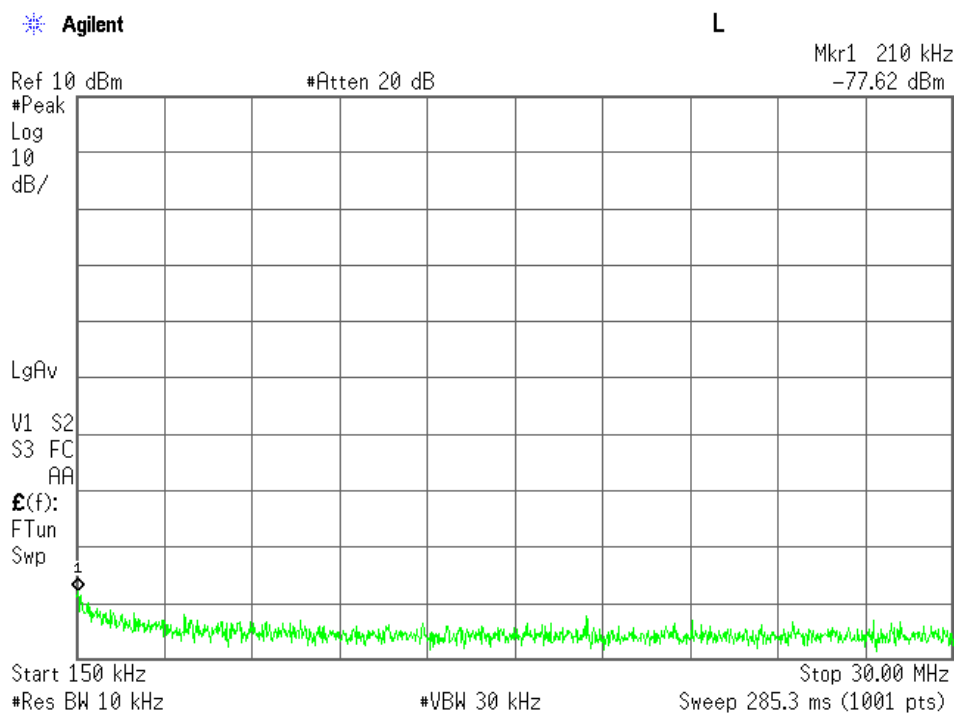


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

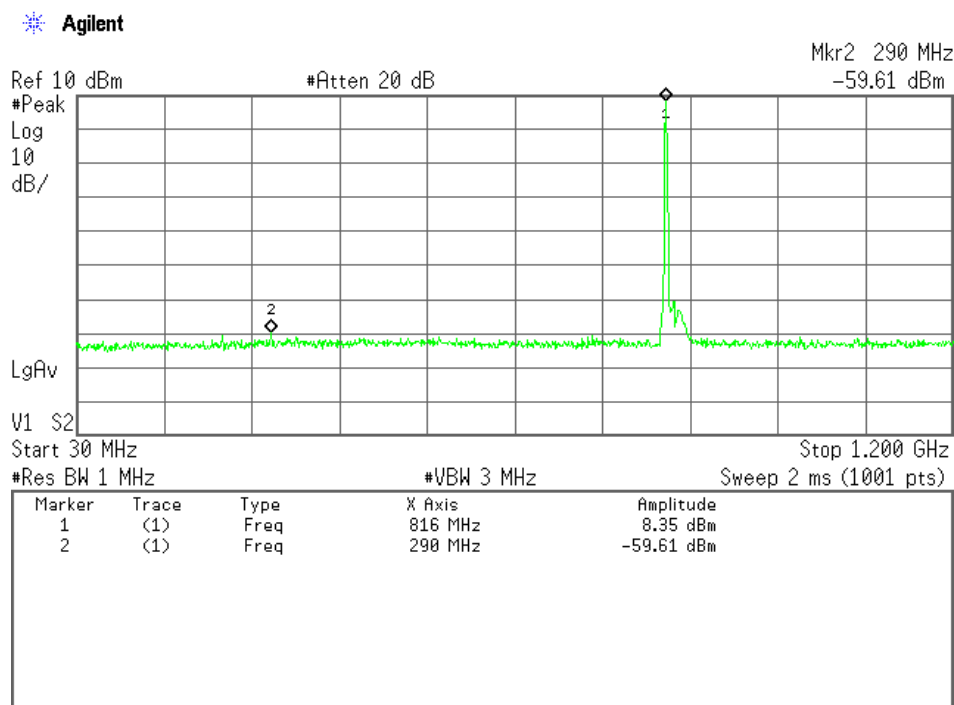


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

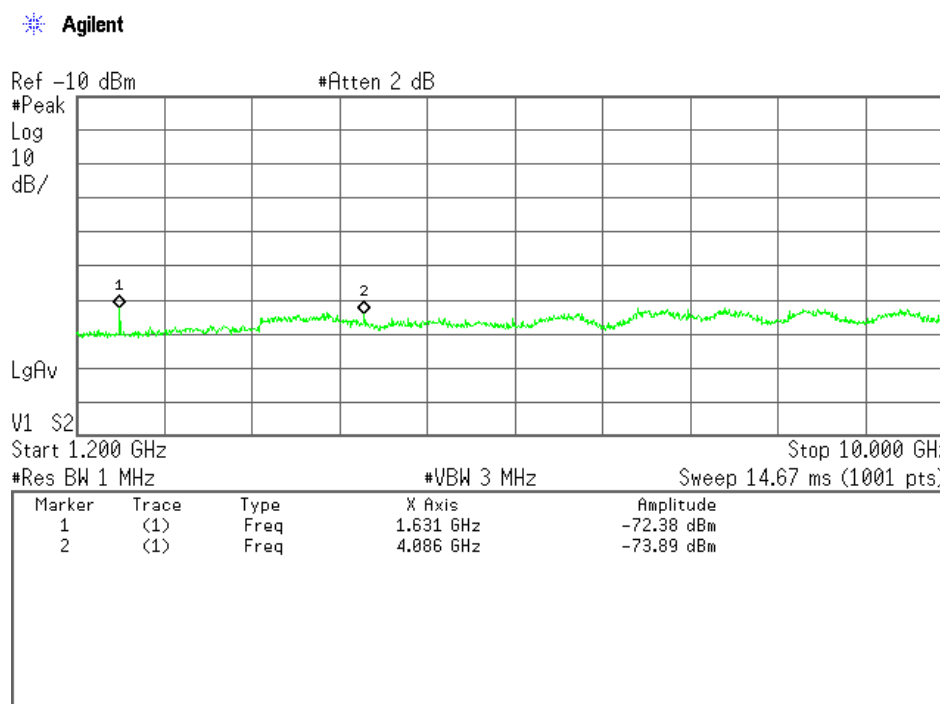


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

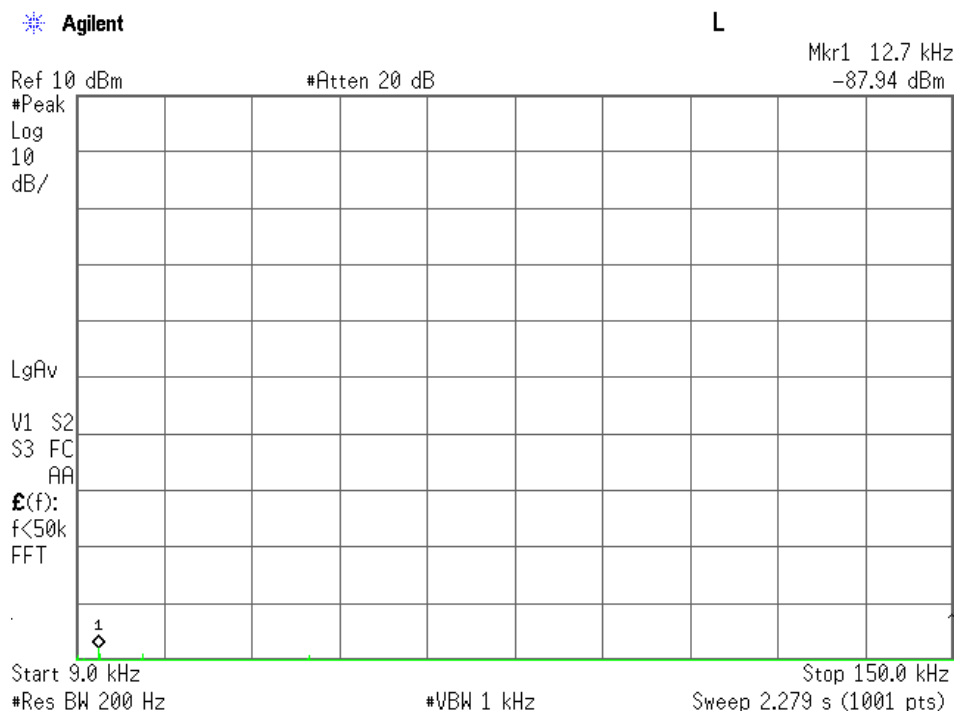


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

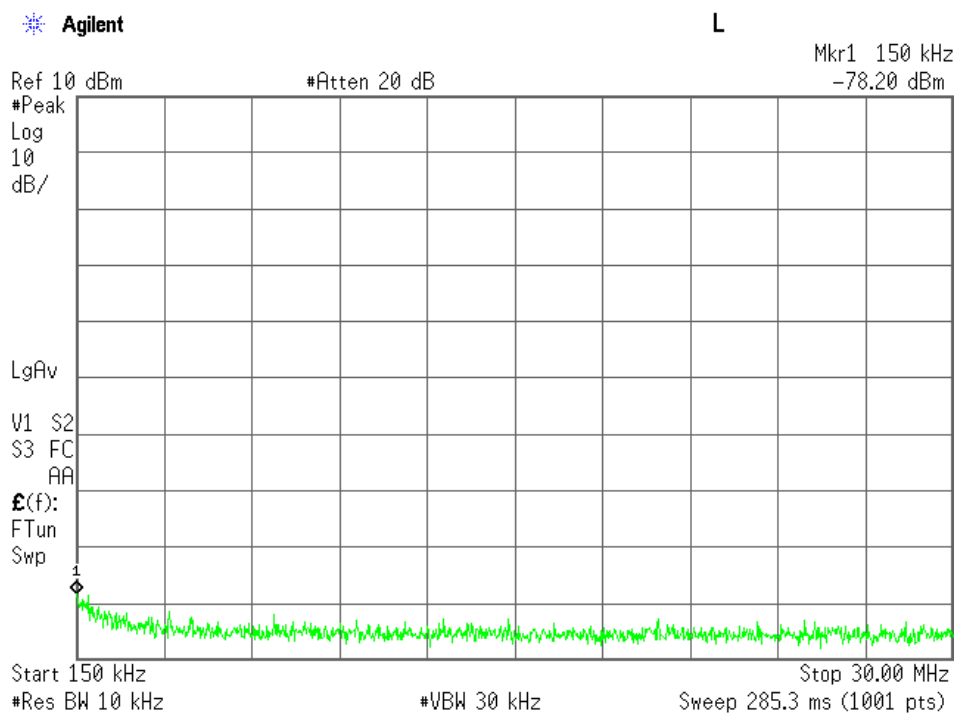


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

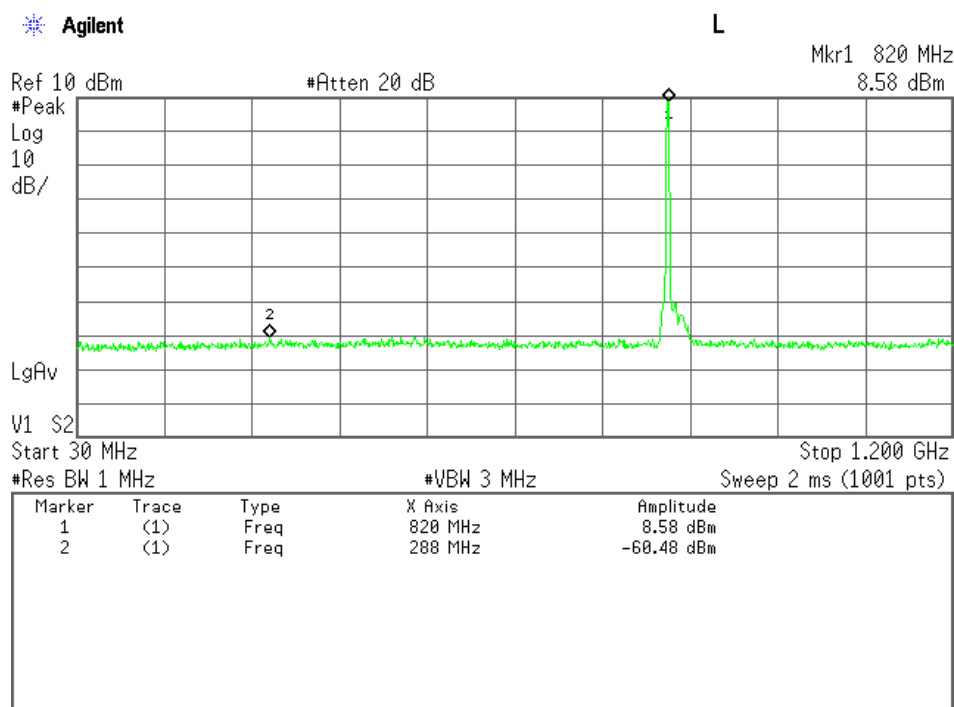


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

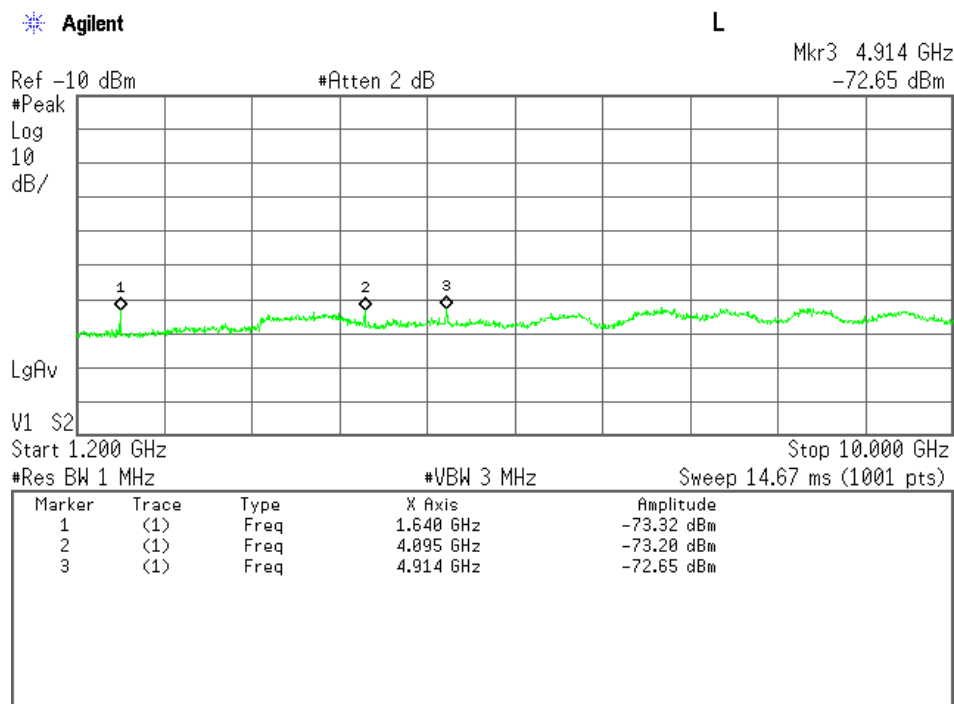


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

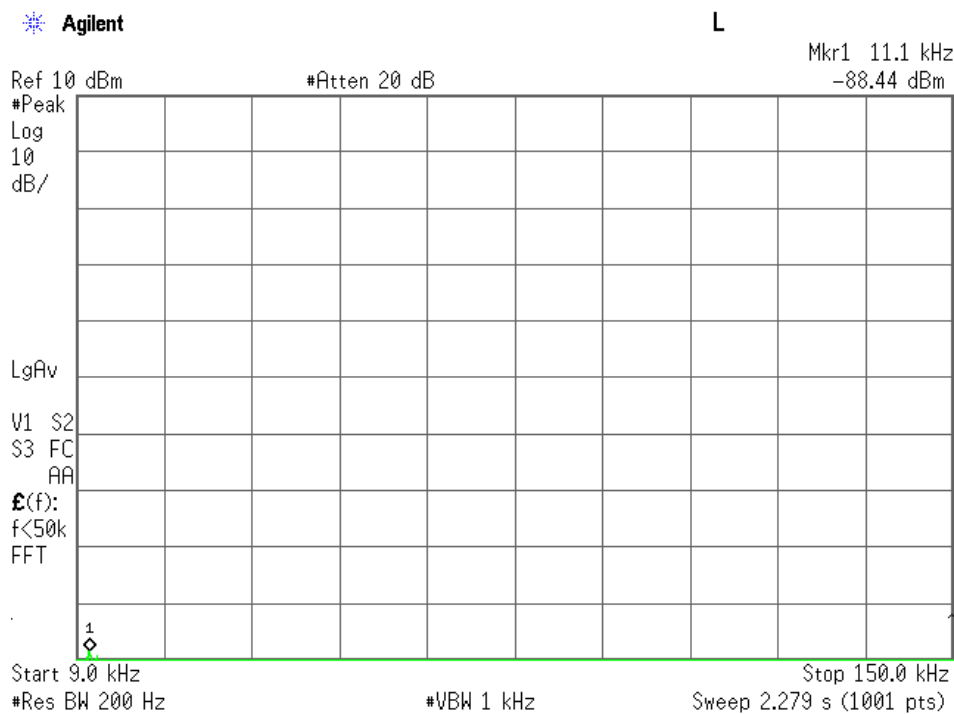


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

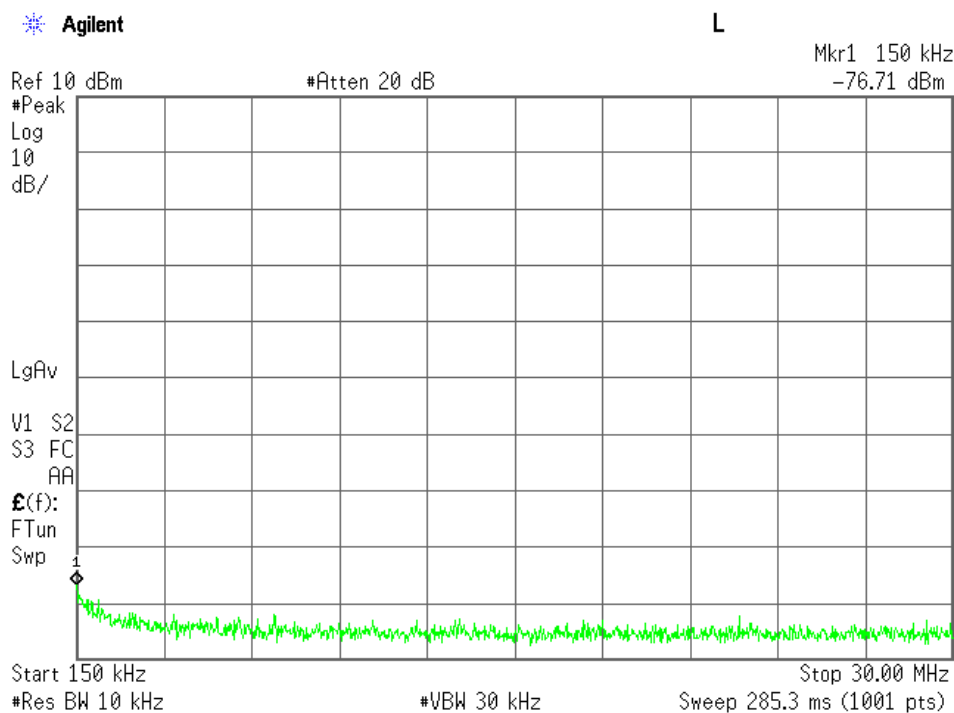

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

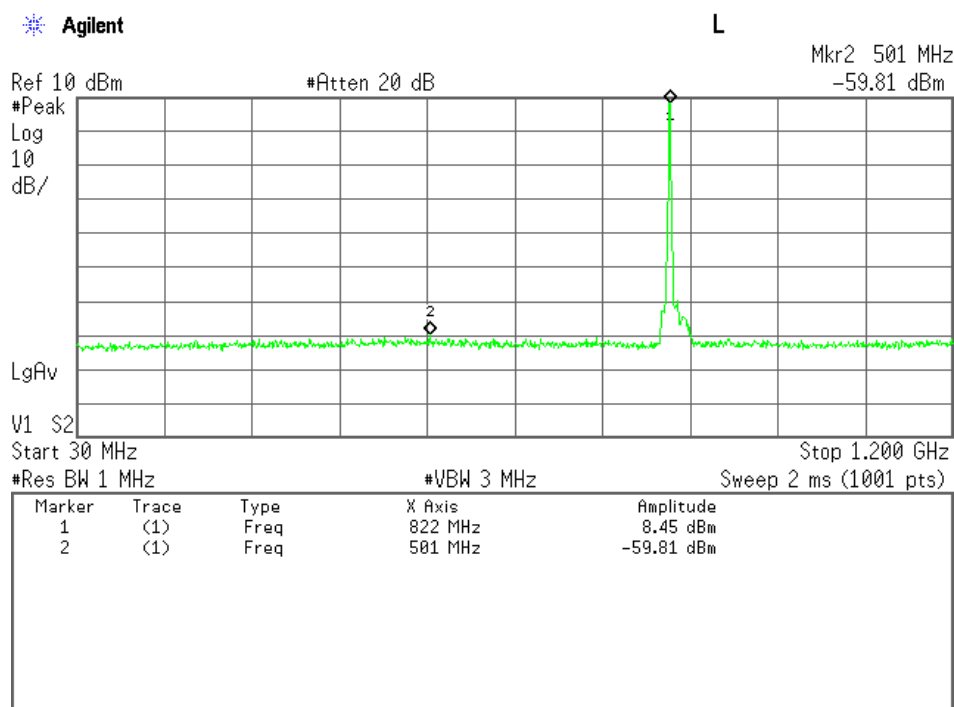

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

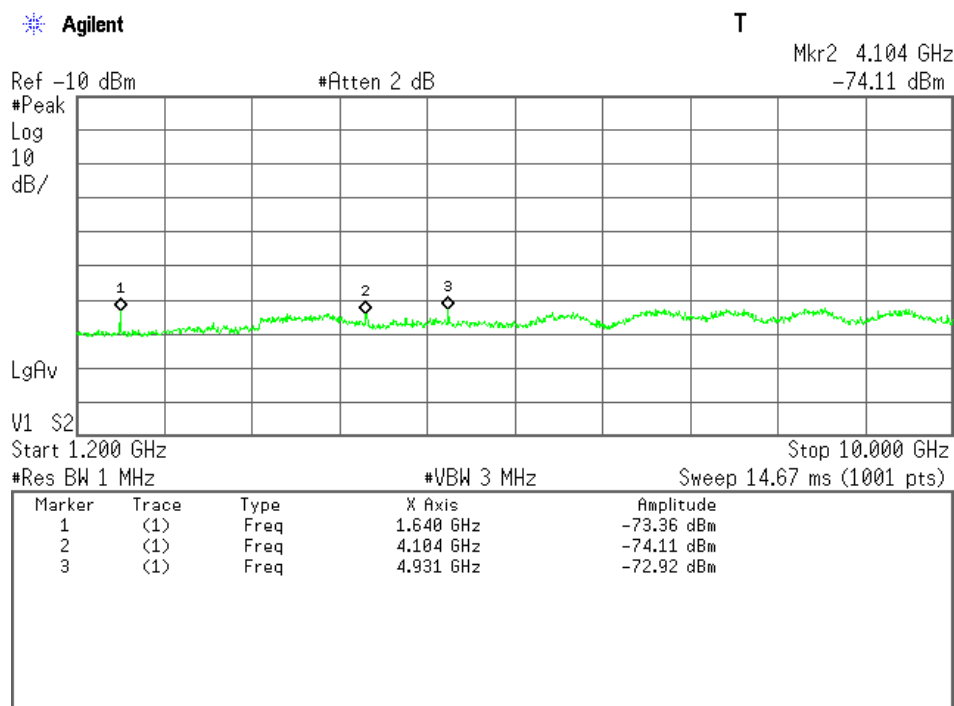

2-4) BW 10MHz(1RB)

(LTE 10MHz)

Test Date: October 29, 2015

Temp.: 25 °C, Humi: 34 %

Transmitting Frequency CH	Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
26740	819.000	1638.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2457.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3276.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4095.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4914.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5733.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6552.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7371.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8190.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 8190.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.5 dB
+) Meter Reading	=	<-70.0 dBm
Result	=	<-48.5 dBm


Minimum Margin: -13.0 - (<-48.5) = >35.5 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Out-Of-Band Emissions (9 kHz – 150 kHz)

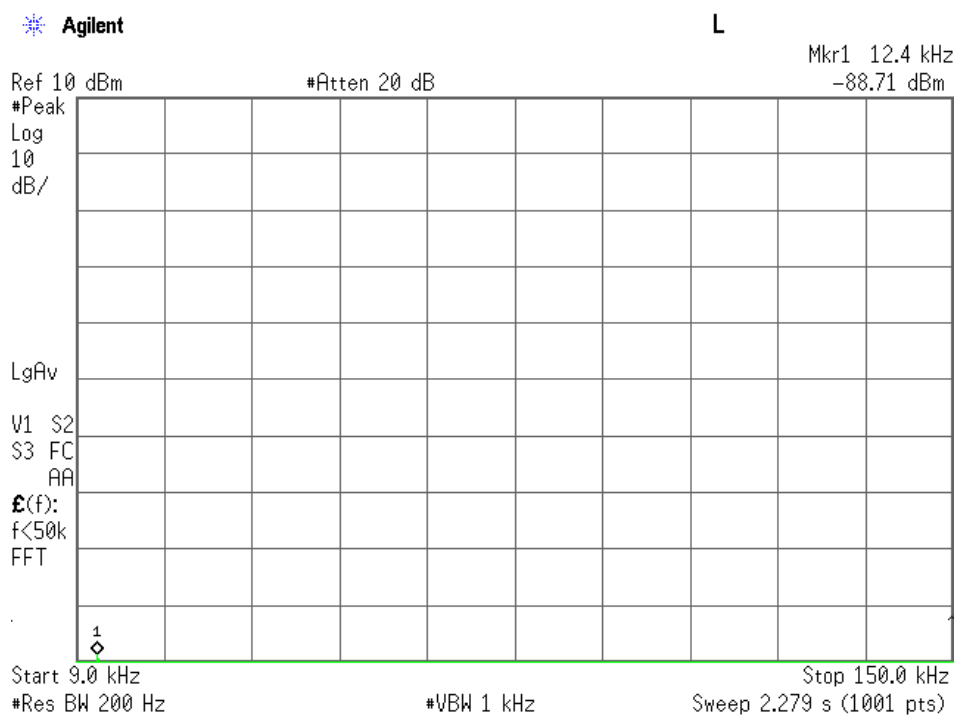


Out-Of-Band Emissions (150 kHz – 30 MHz)

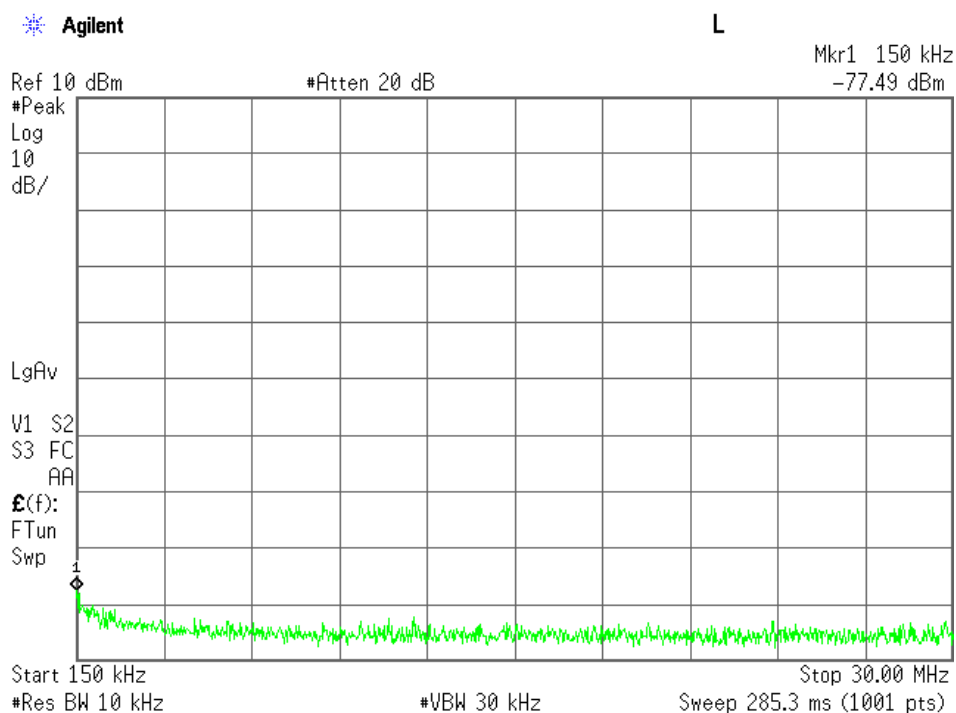

Out-Of-Band Emissions (30 MHz – 1.2 GHz)

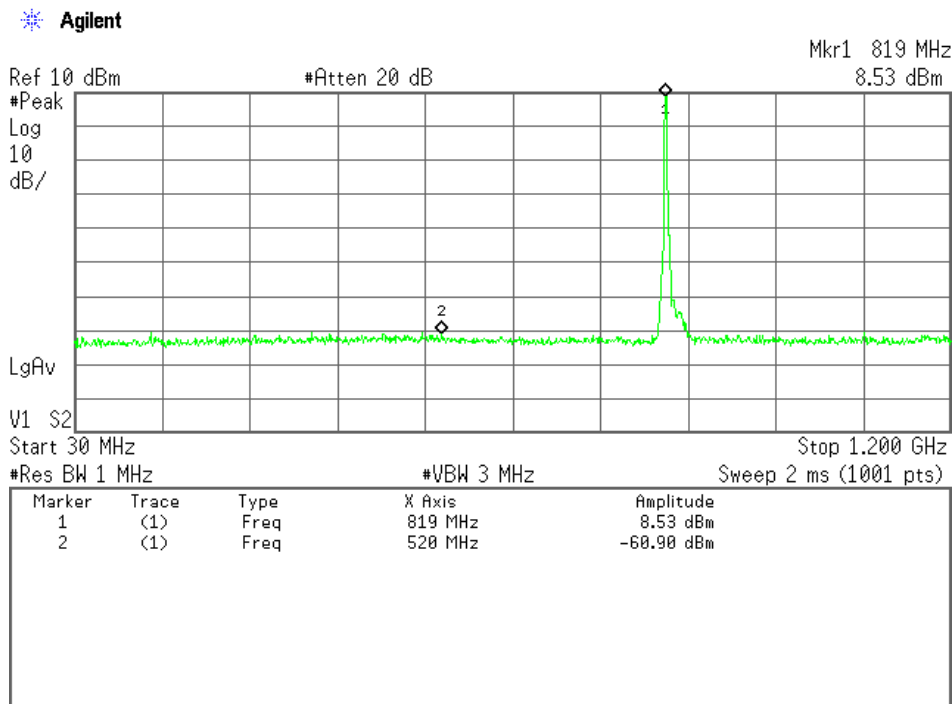

Out-Of-Band Emissions (1.2 GHz – 100 GHz)

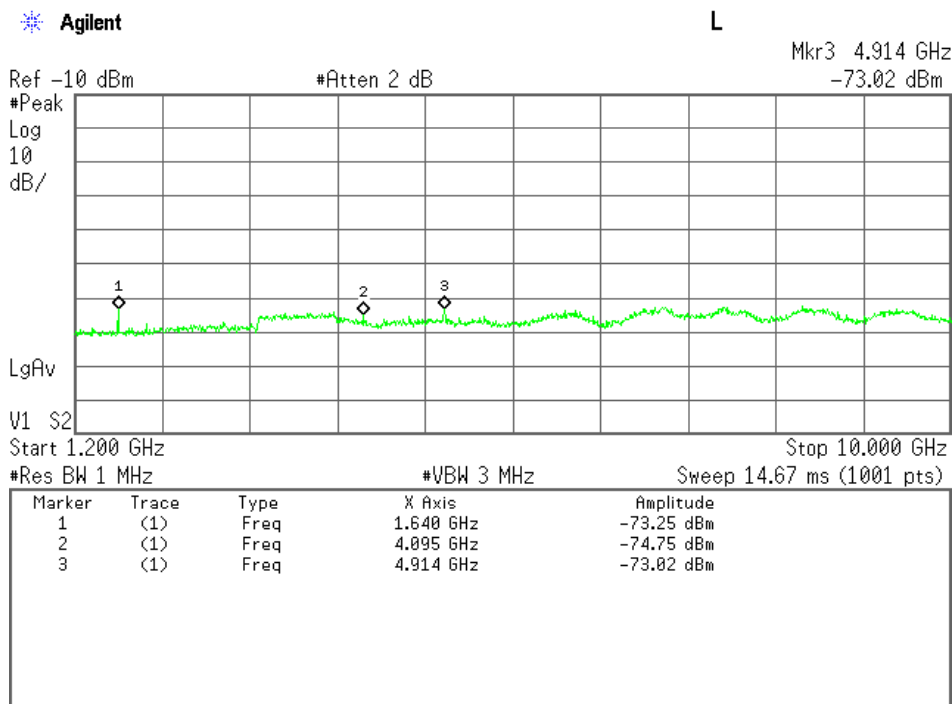

7.6 Band-Edge Emission (§2.1051)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.6.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

Min. Limit Margin 8.0 dB at 824.0 MHz

The Band-Edge level is -21.0 dBm at 824.0 MHz

Remarks : BW 3MHz 16QAM

Part 90

Min. Limit Margin 0.8 dB at 814.0 MHz

The Band-Edge level is -20.8 dBm at 814.0 MHz

Uncertainty of Measurement Results ± 1.4 dB(2σ)

Remarks : BW 3MHz QPSK. The measurement result is within the range of measurement uncertainty.


7.6.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

LTE Bandwidth	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz
Band-Edge Frequency	824 MHz / 849 MHz, 814 MHz/824 MHz				
Res. Bandwidth	20 kHz	30 kHz	51 kHz	100 kHz	150 kHz
Video Bandwidth	62 kHz	100 kHz	160 kHz	300 kHz	470 kHz
Span	5 MHz	10 MHz	20 MHz	20 MHz	30 MHz
Sweep Time	100 ms				
Detector	Power Average(RMS)				
Trace	Average				

7.6.4 Test Data


Test Date :October 28, 2015

Temp.:26°C, Humi:36%


1. Part 22
- 1-1-1) BW 1.4MHz
- Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26797	824.70	824.0	-32.8 (at 824.0 MHz)	-13.0	+19.8
27033	848.30	849.0	-31.3 (at 849.0 MHz)	-13.0	+18.3

Low Channel(1RB Offset 0), Band-Edge Emission

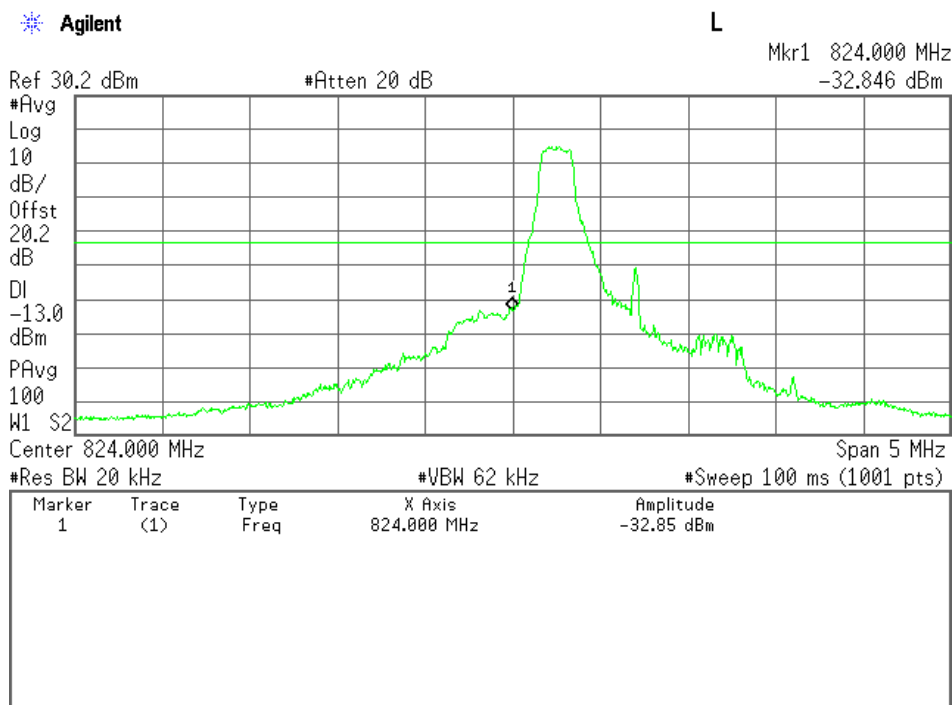


Low Channel(Full RB), Band-Edge Emission

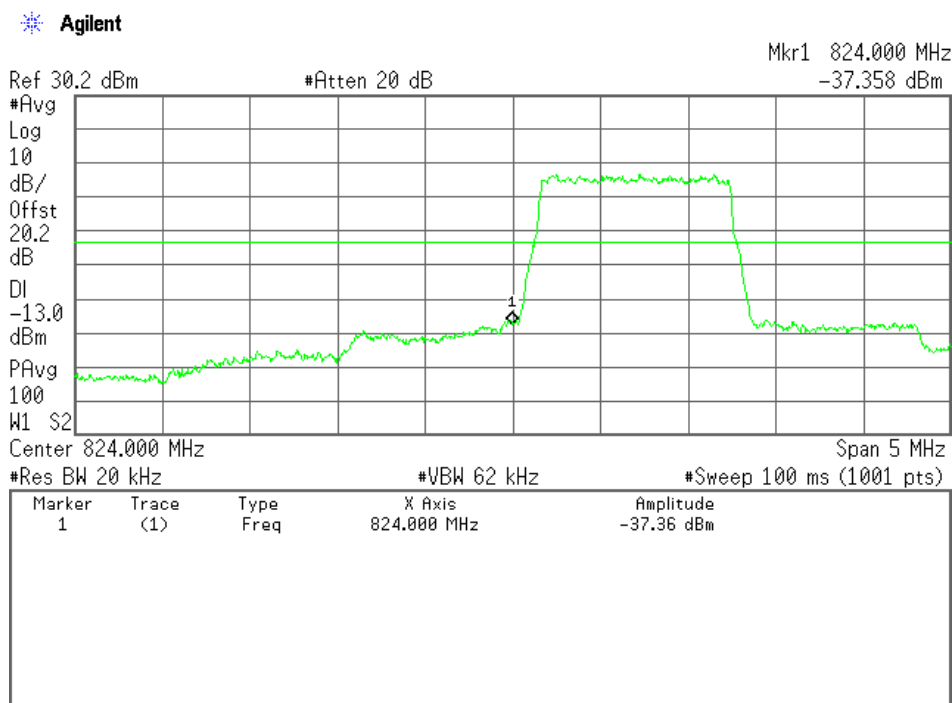


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

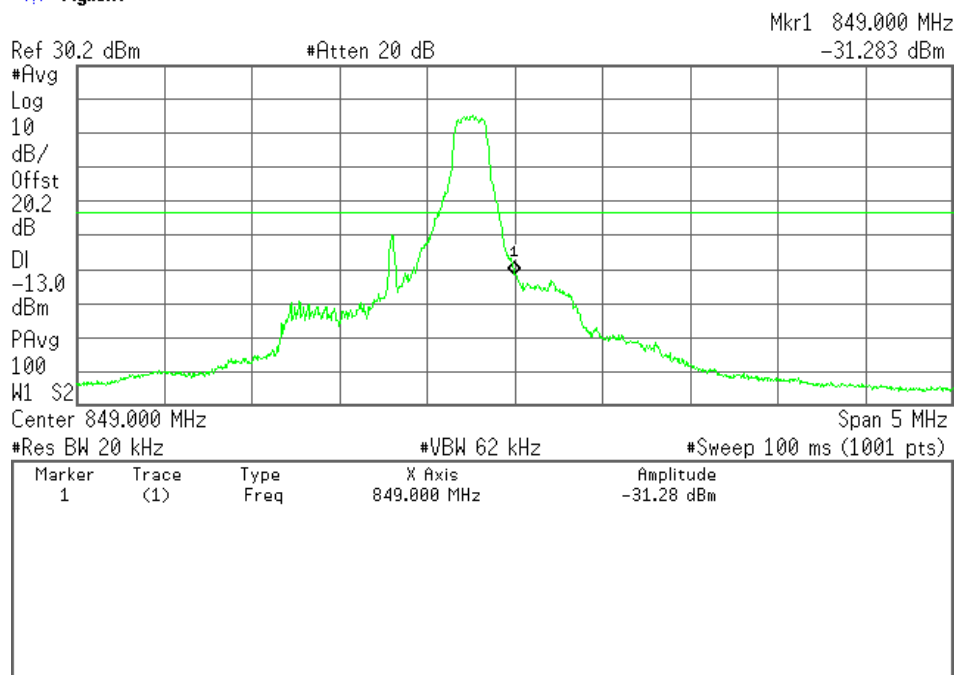

High Channel(Full RB), Band-Edge Emission

Agilent

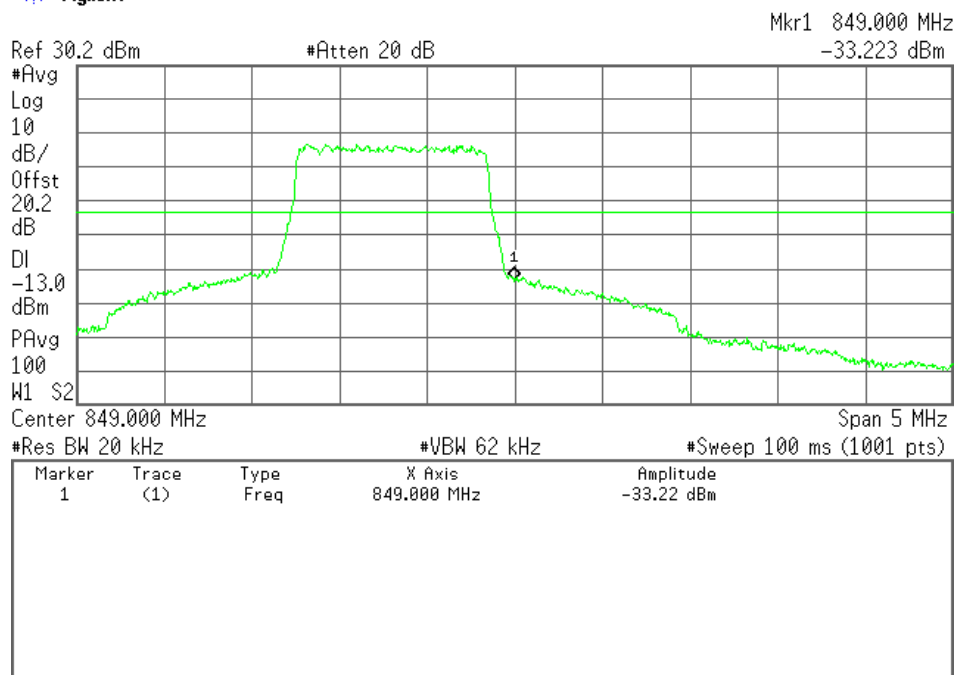


1-1-2) BW 1.4MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26797	824.70	824.0	-32.5 (at 824.0 MHz)	-13.0	+19.5
27033	848.30	849.0	-32.2 (at 849.0 MHz)	-13.0	+19.2

Low Channel(1RB Offset 0), Band-Edge Emission

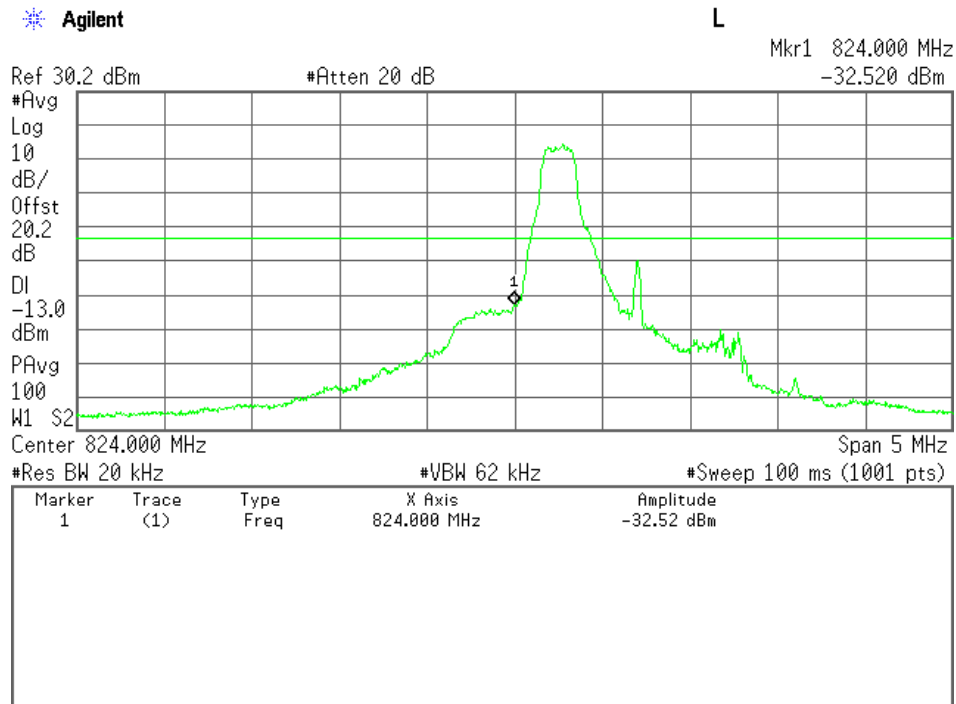


Low Channel(Full RB), Band-Edge Emission

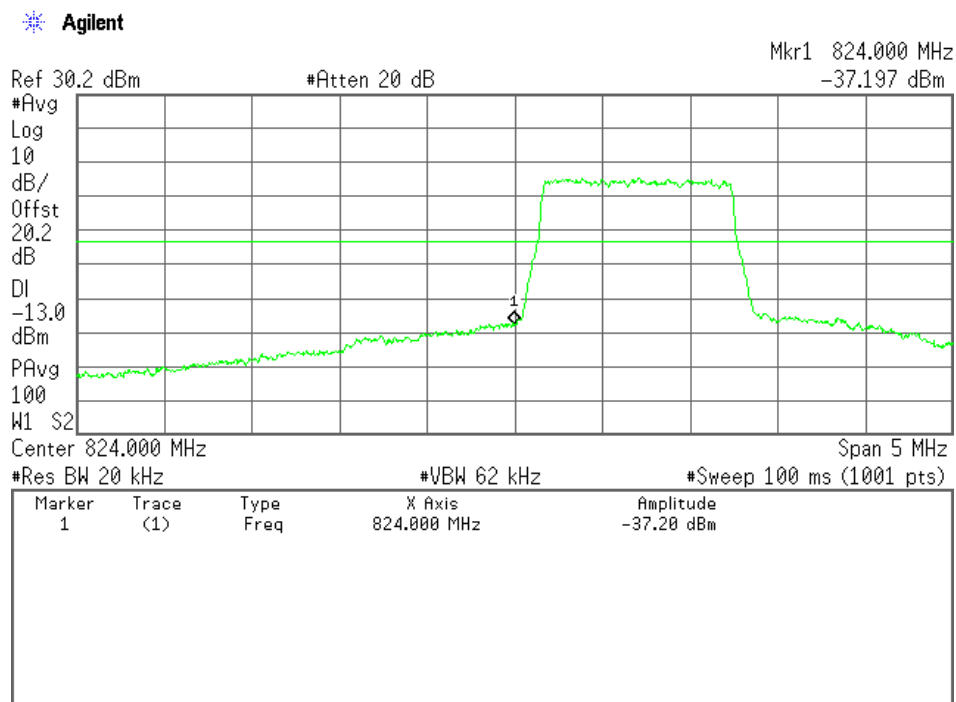


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

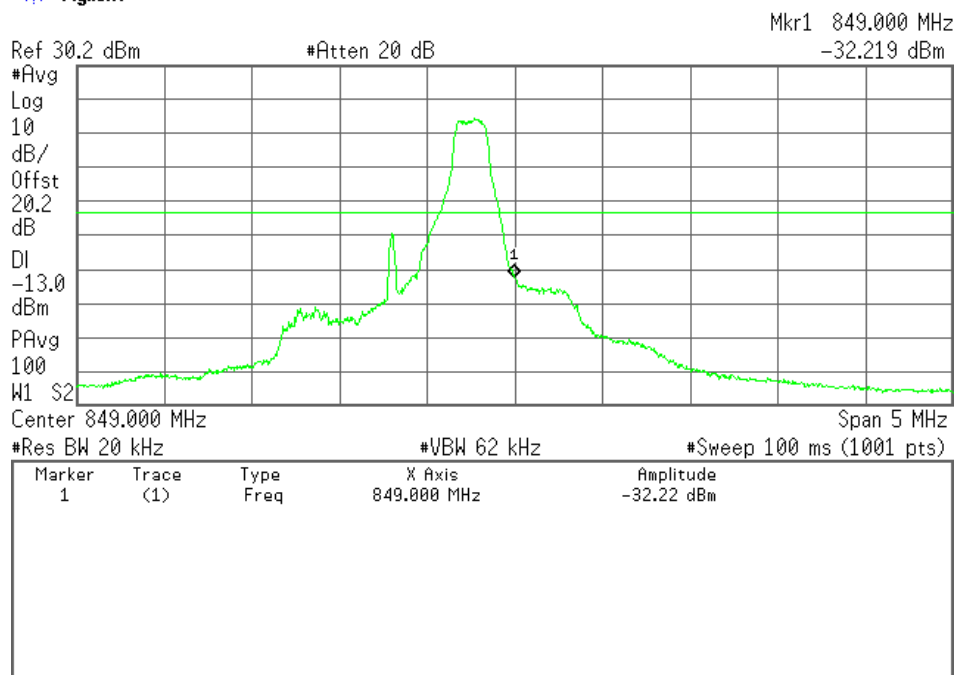

High Channel(Full RB), Band-Edge Emission

Agilent

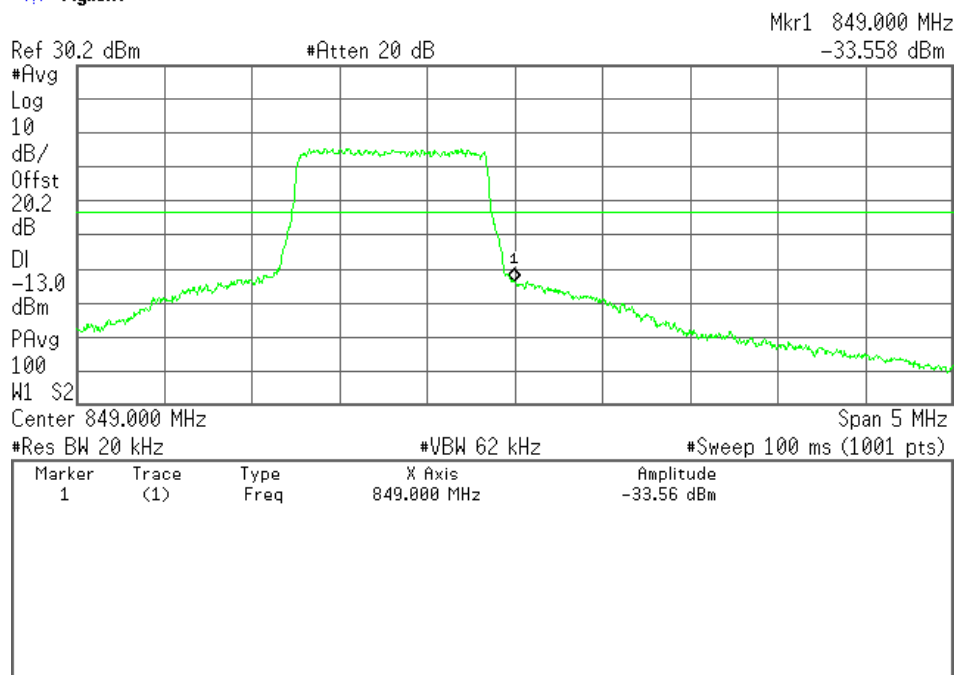


1-2-1) BW 3MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26805	825.50	824.0	-22.1 (at 824.0 MHz)	-13.0	+9.1
27025	847.50	849.0	-22.4 (at 849.0 MHz)	-13.0	+9.4

Low Channel(1RB Offset 0), Band-Edge Emission

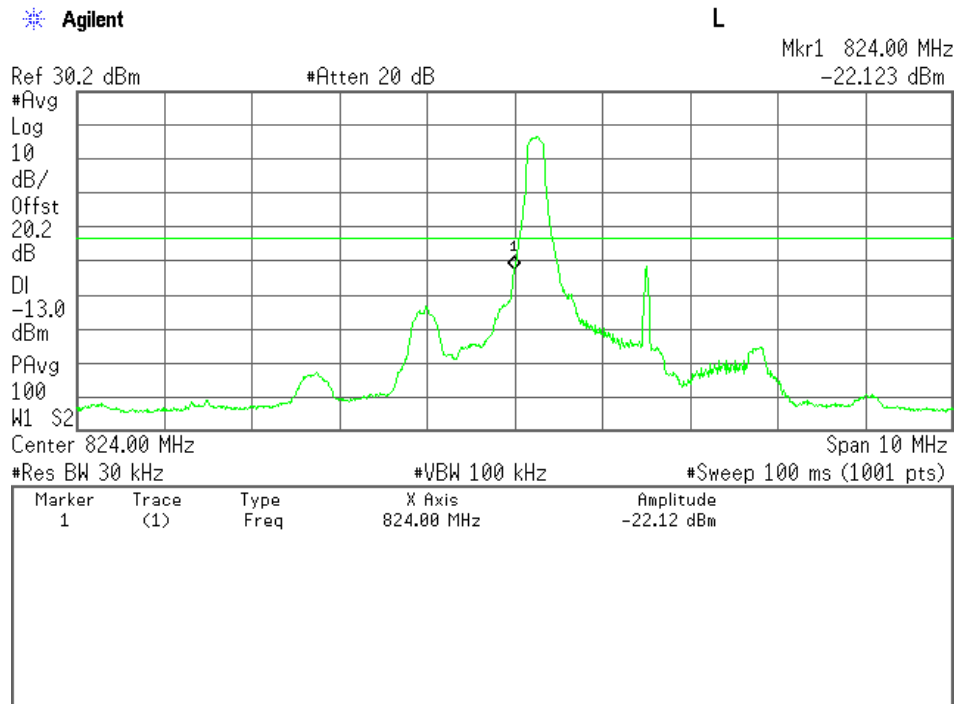


Low Channel(Full RB), Band-Edge Emission

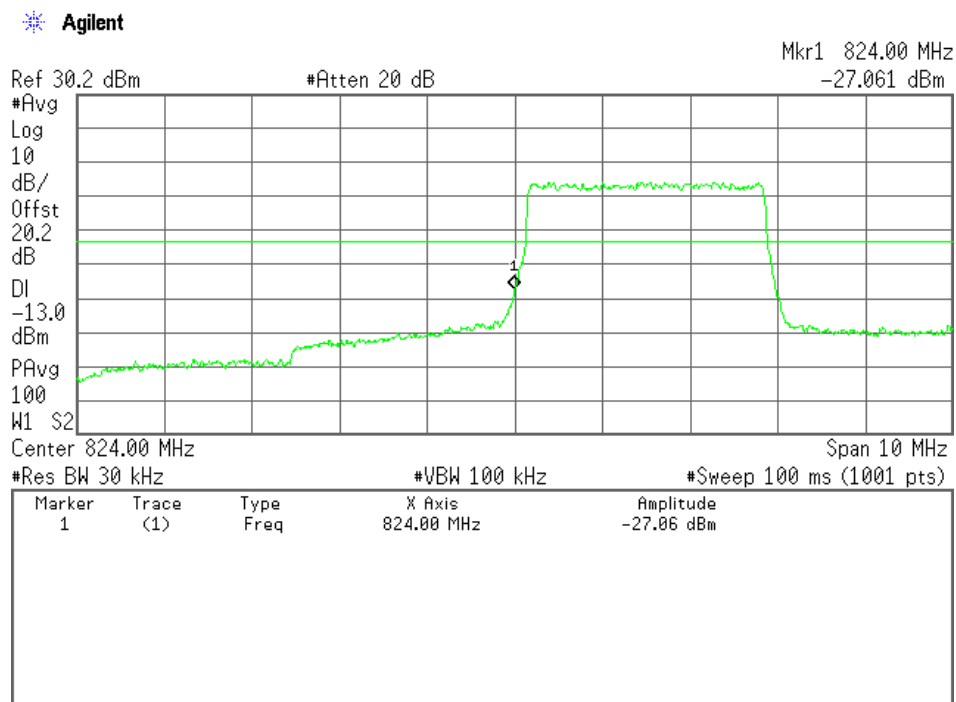


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

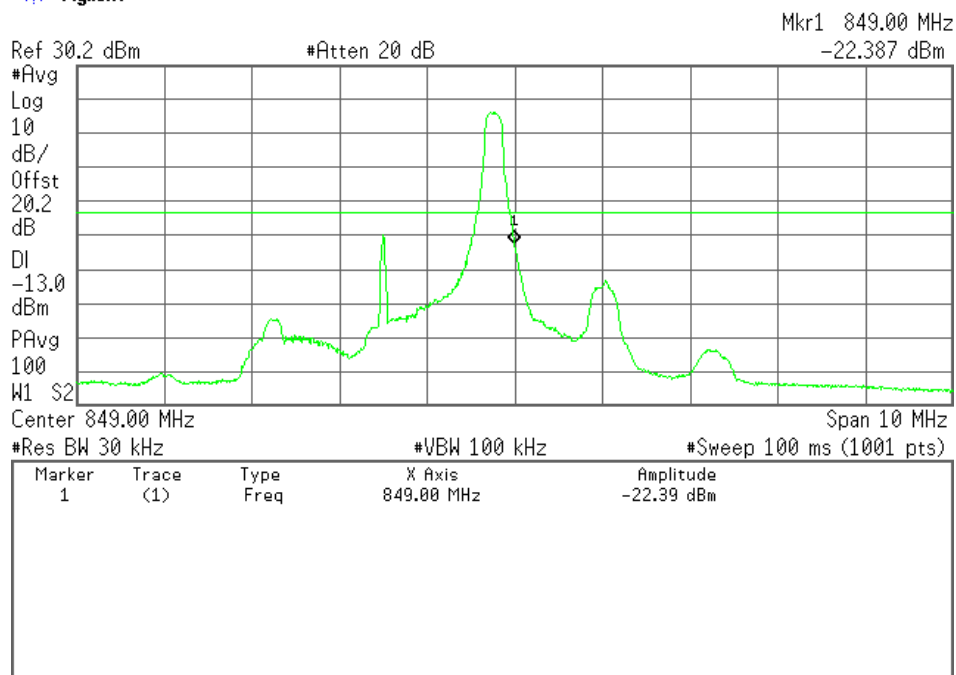

High Channel(Full RB), Band-Edge Emission

Agilent

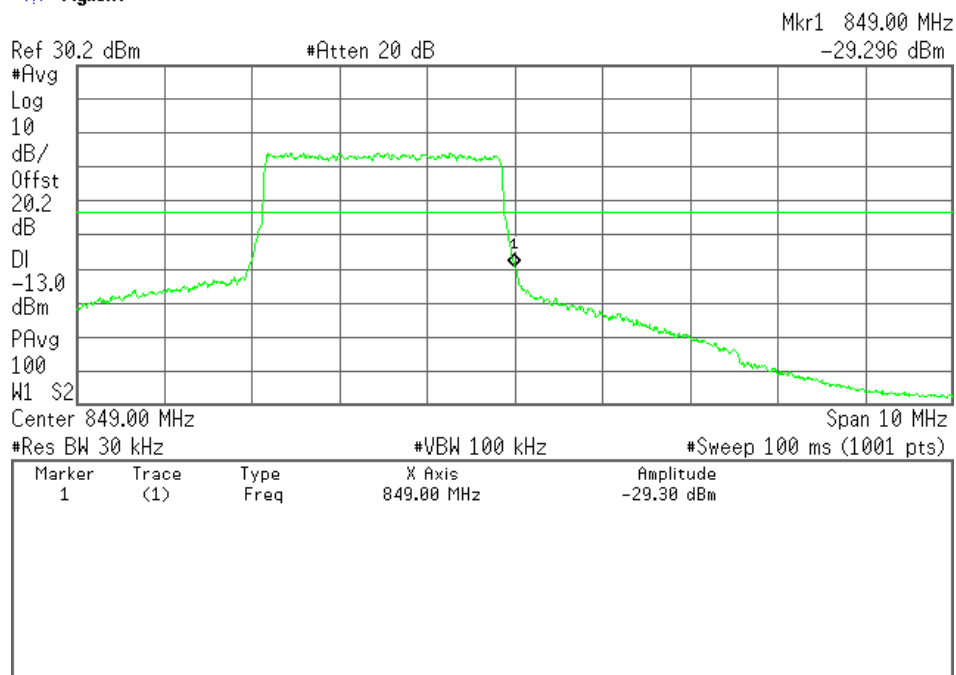


1-2-2) BW 3MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26805	825.50	824.0	-21.0 (at 824.0 MHz)	-13.0	+8.0
27025	847.50	849.0	-23.6 (at 849.0 MHz)	-13.0	+10.6

Low Channel(1RB Offset 0), Band-Edge Emission

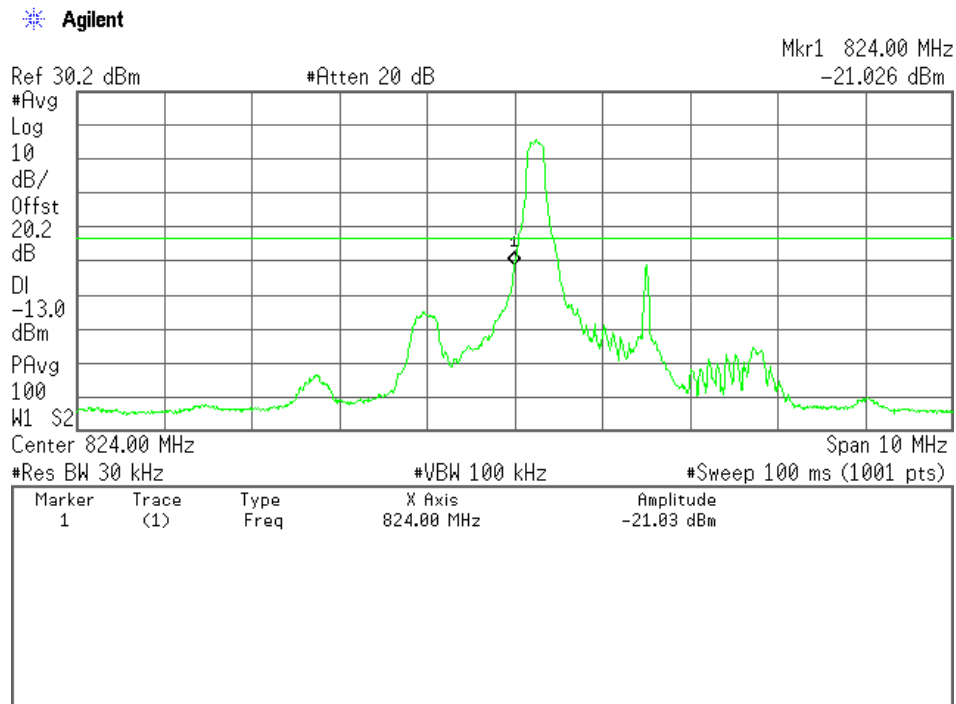


Low Channel(Full RB), Band-Edge Emission

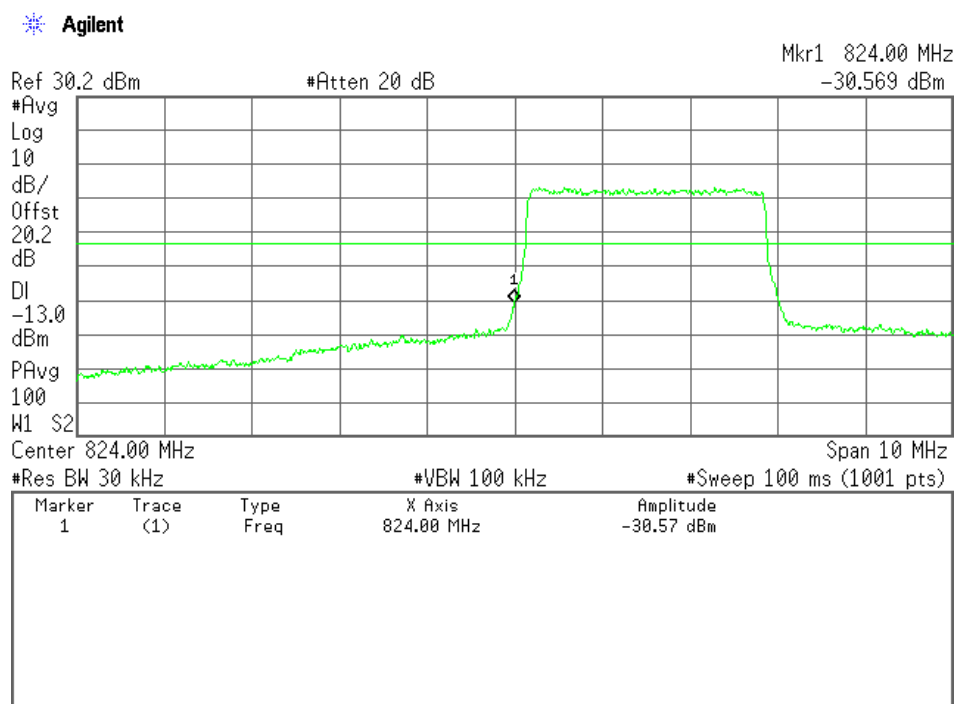


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

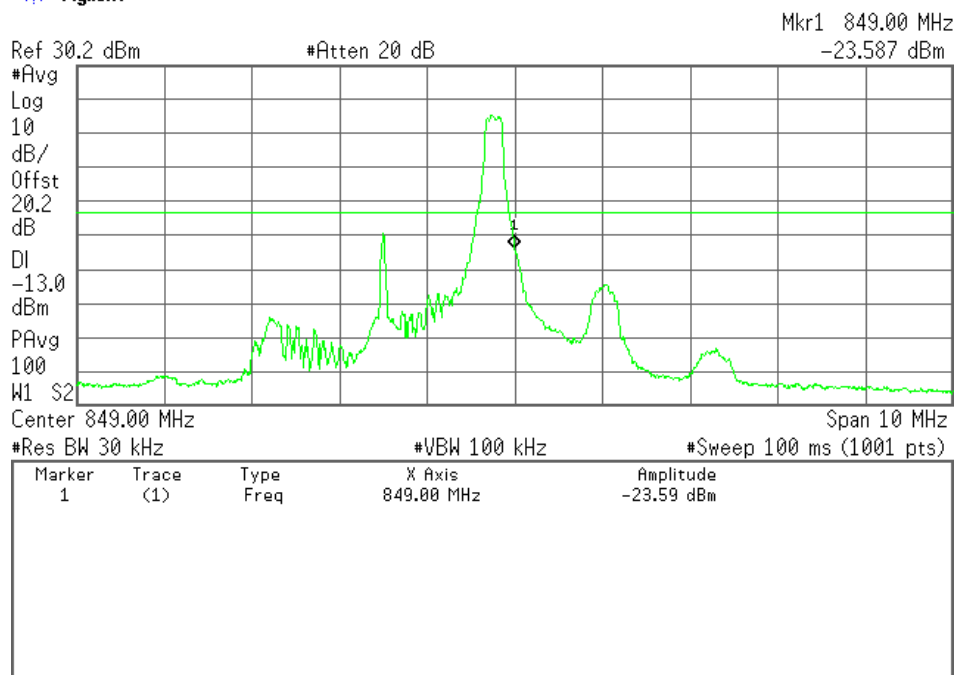

High Channel(Full RB), Band-Edge Emission

Agilent

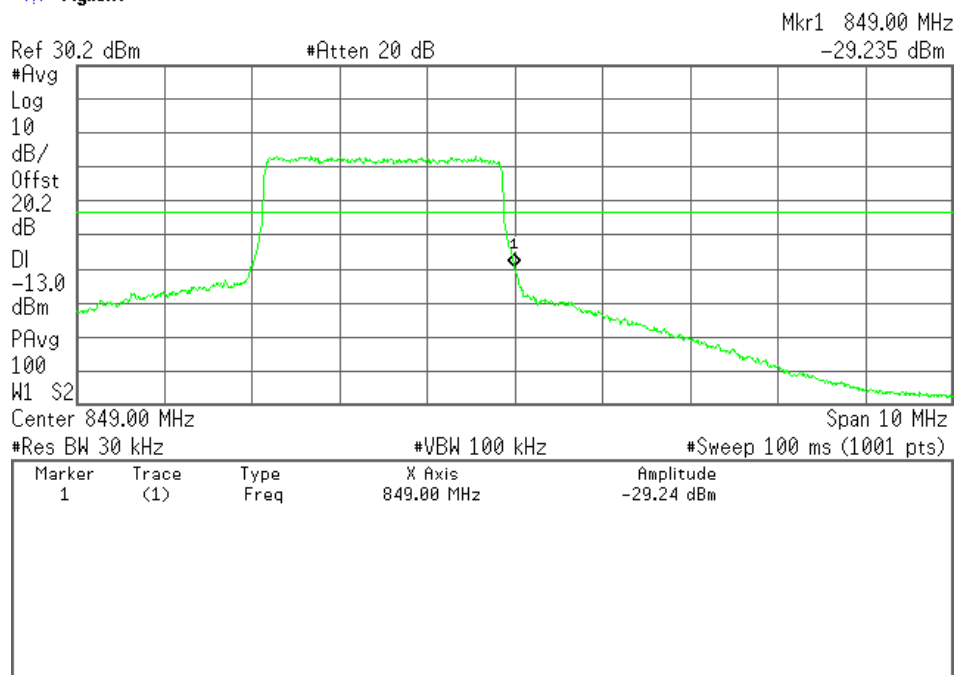


1-3-1) BW 5MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26815	826.50	824.0	-23.6 (at 824.0 MHz)	-13.0	+10.6
27015	846.50	849.0	-25.9 (at 849.0 MHz)	-13.0	+12.9

Low Channel(1RB Offset 0), Band-Edge Emission

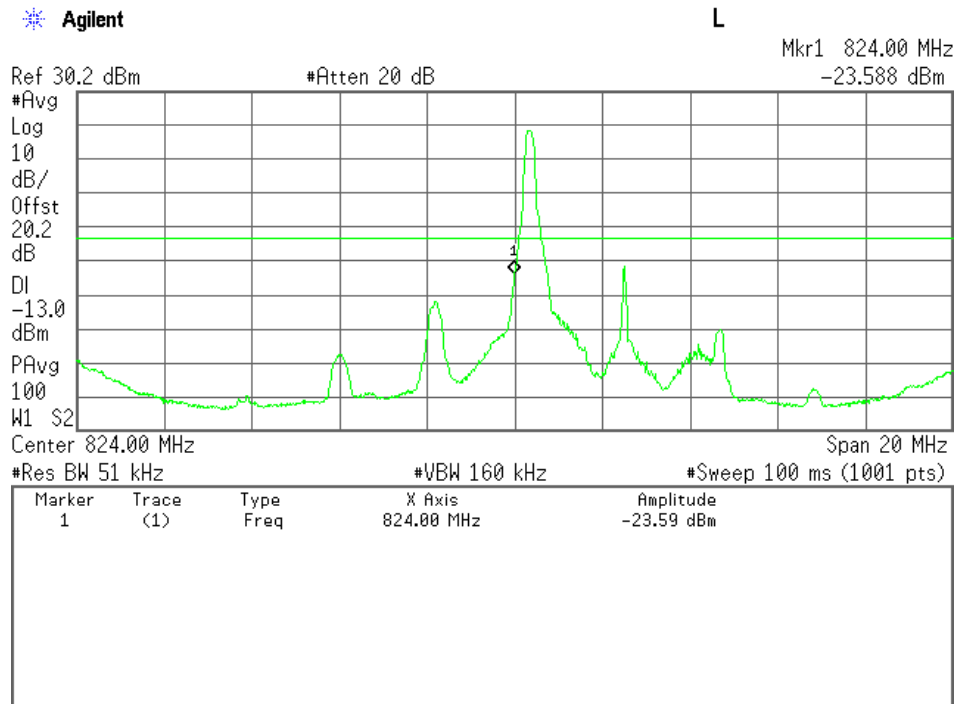


Low Channel(Full RB), Band-Edge Emission

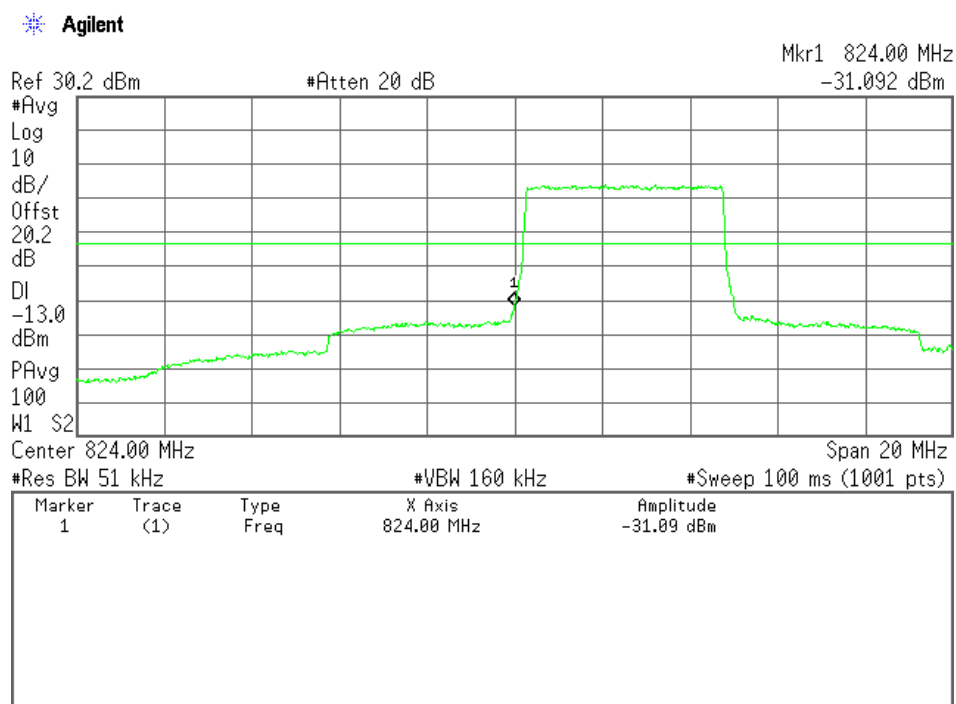


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

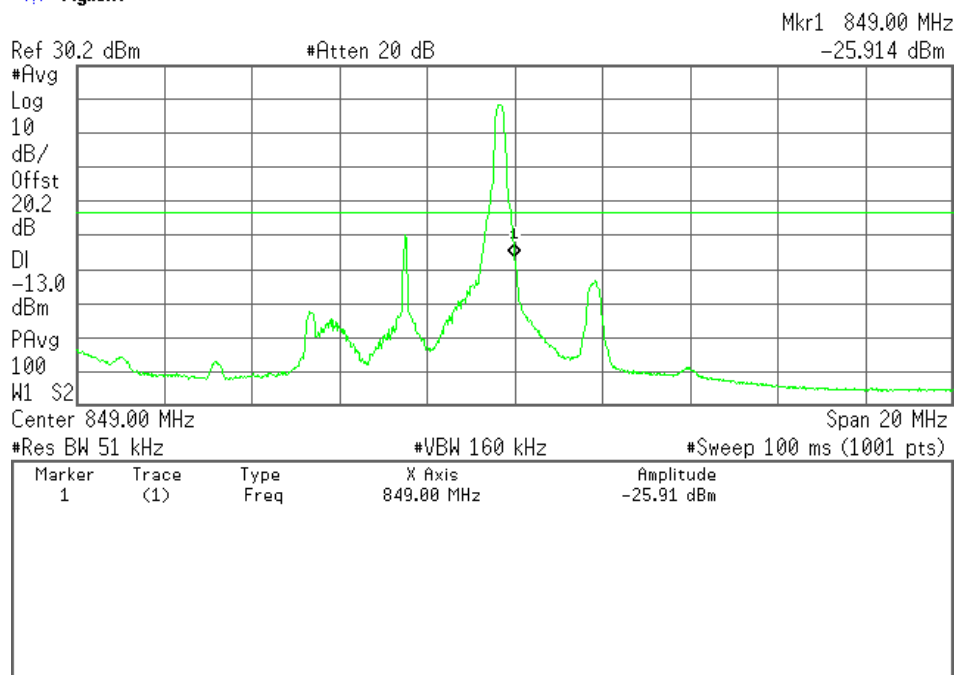

High Channel(Full RB), Band-Edge Emission

Agilent

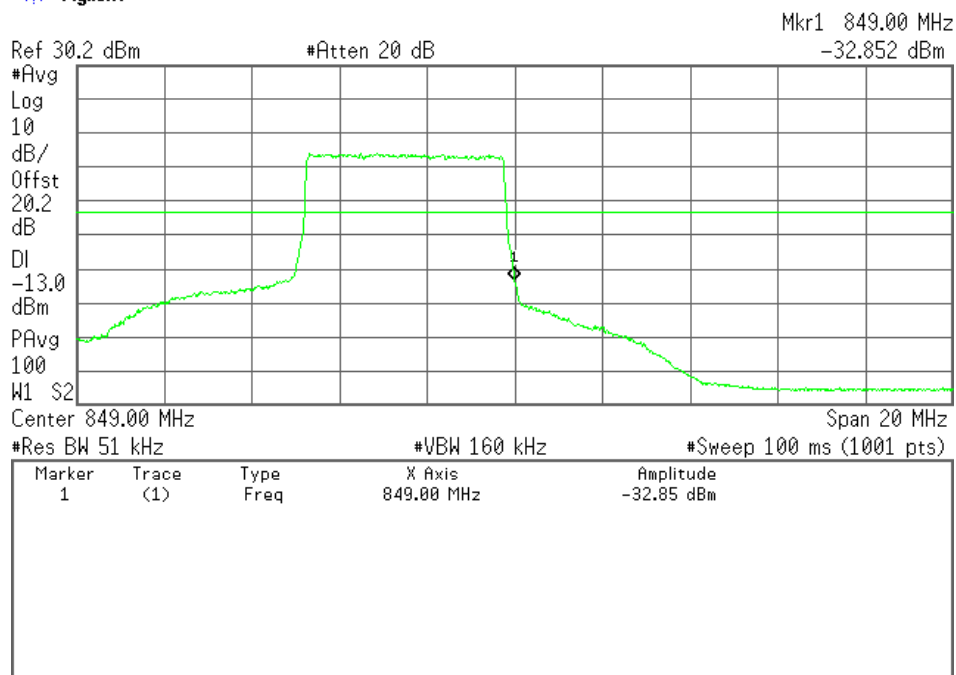


1-3-2) BW 5MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26815	826.50	824.0	-23.2 (at 824.0 MHz)	-13.0	+10.2
27015	846.50	849.0	-24.6 (at 849.0 MHz)	-13.0	+11.6

Low Channel(1RB Offset 0), Band-Edge Emission

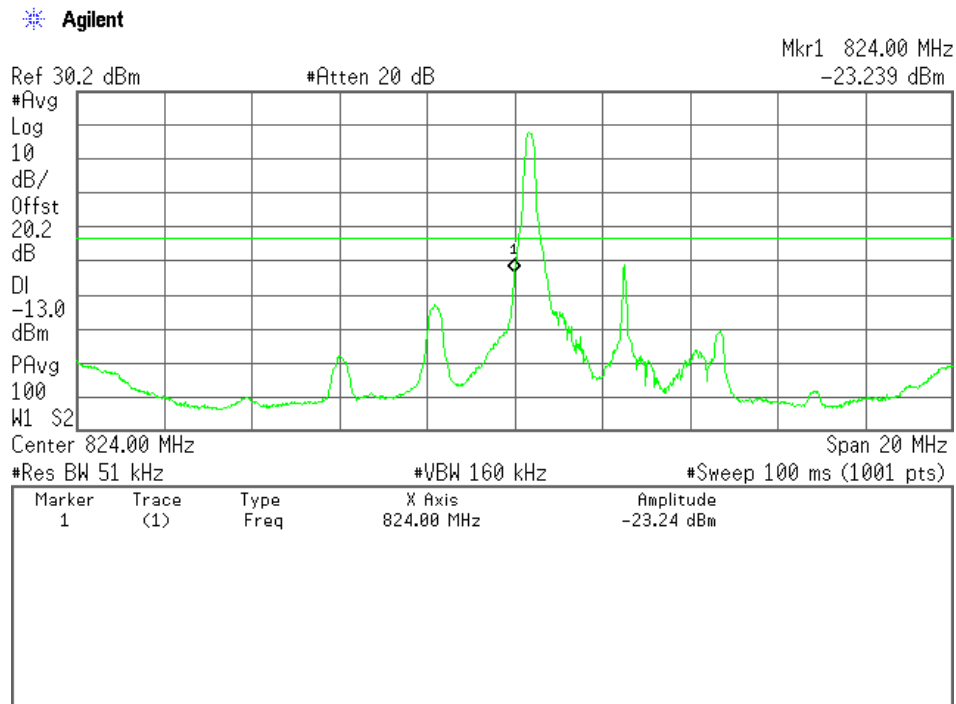


Low Channel(Full RB), Band-Edge Emission

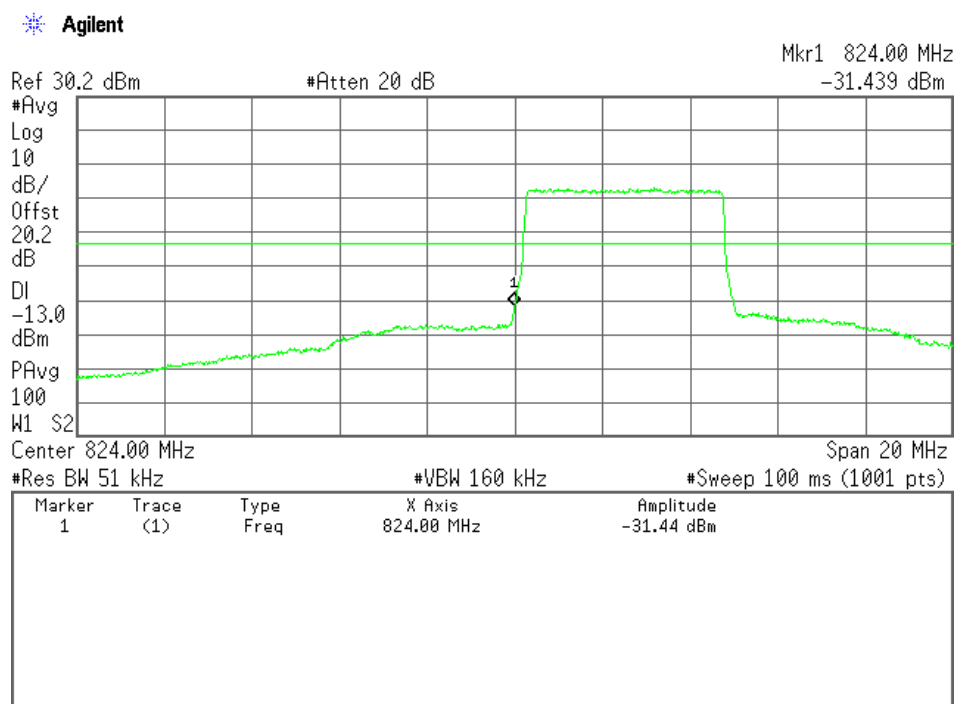


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

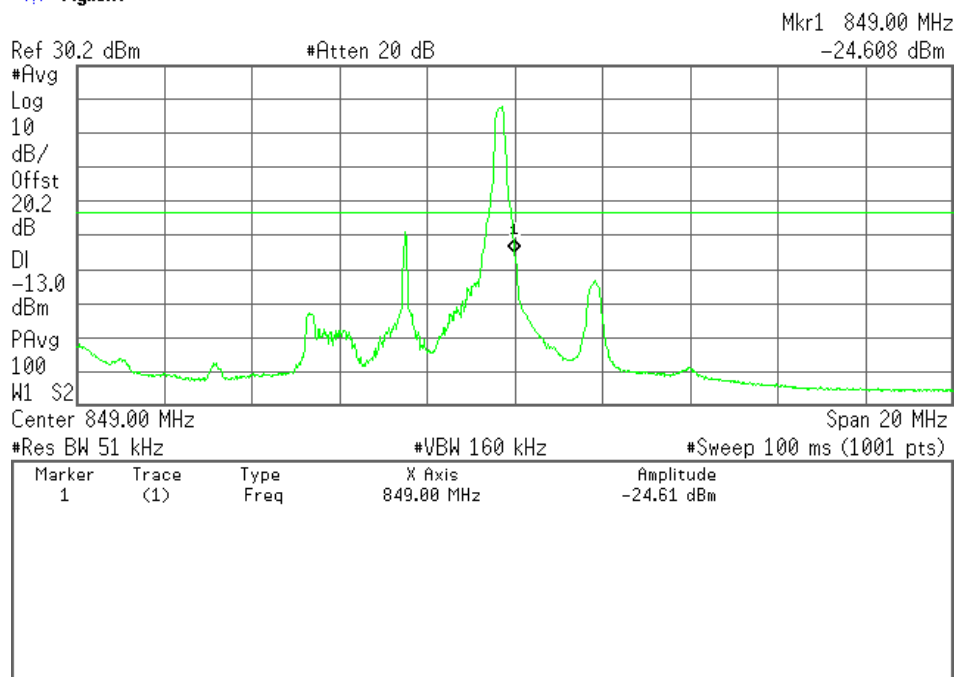

High Channel(Full RB), Band-Edge Emission

Agilent

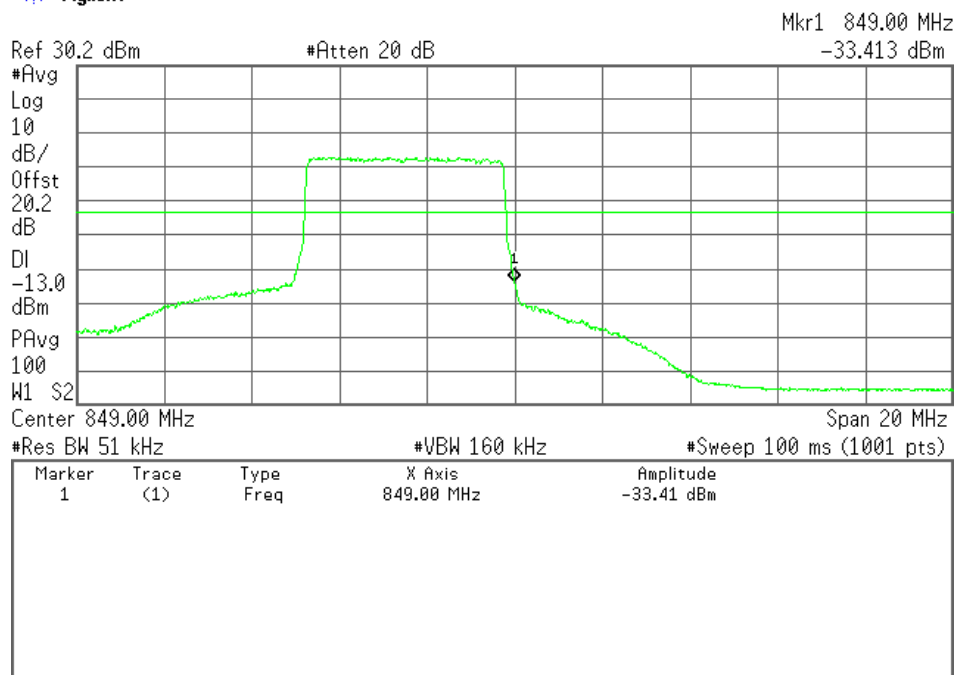


1-4-1) BW 10MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26840	829.00	824.0	-30.0 (at 820.2 MHz)	-13.0	+17.0
26990	844.00	849.0	-34.8 (at 849.0 MHz)	-13.0	+21.8

Low Channel(1RB Offset 0), Band-Edge Emission

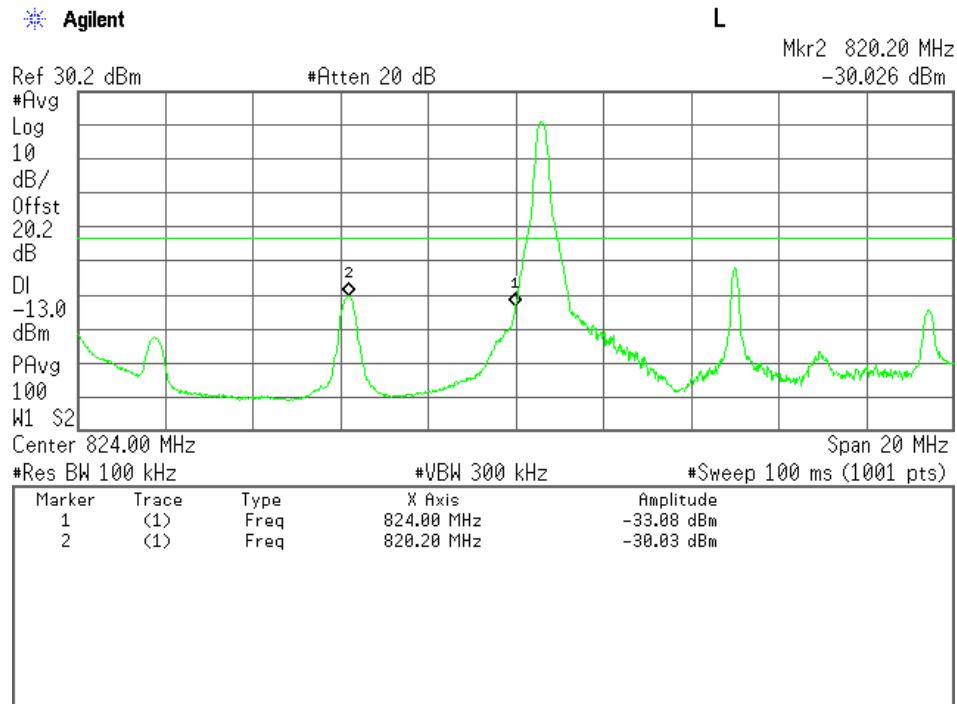


Low Channel(Full RB), Band-Edge Emission

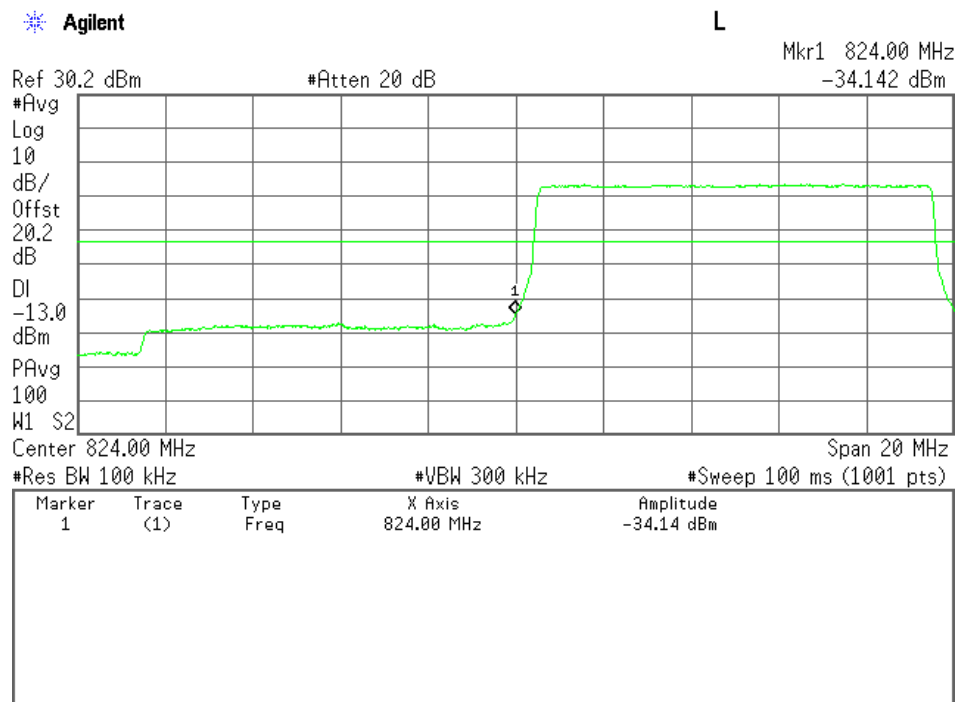

High Channel(1RB Offset Max), Band-Edge Emission


Agilent

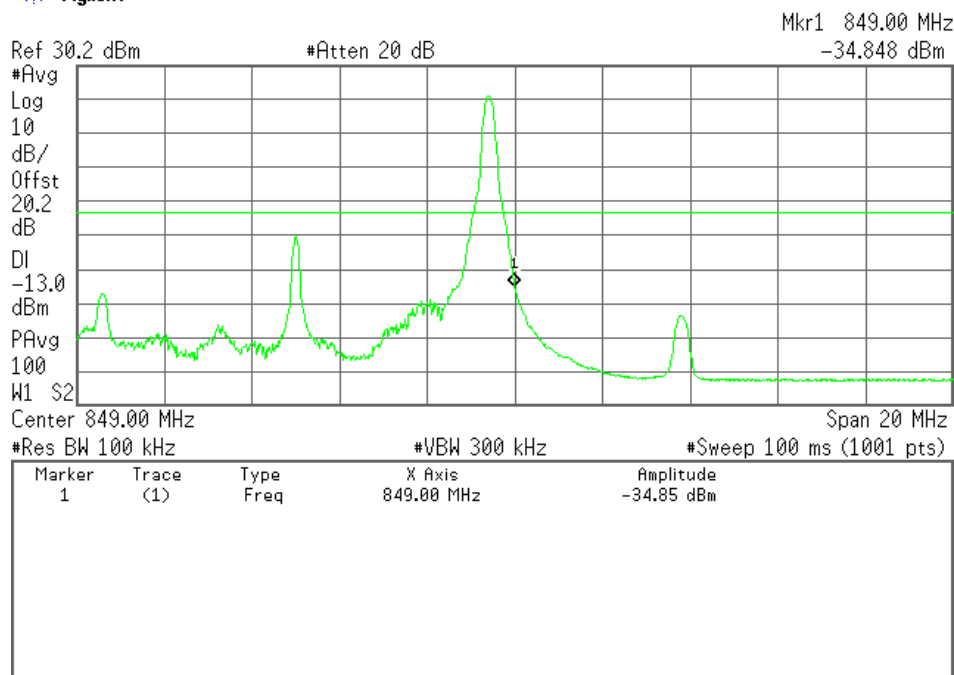

High Channel(Full RB), Band-Edge Emission

Agilent

L

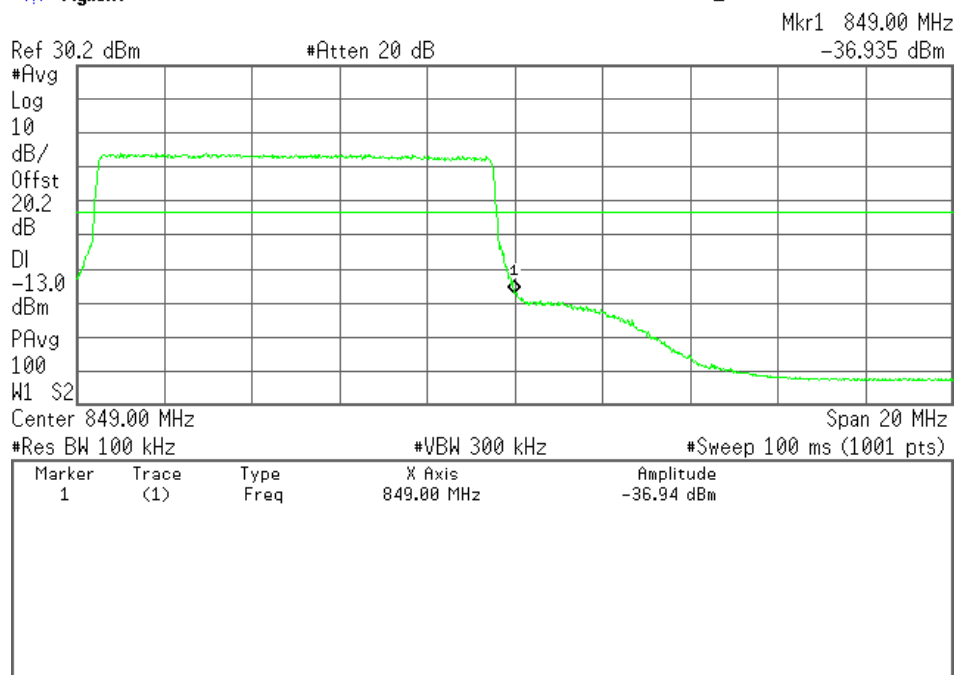


1-4-2) BW 10MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26840	829.00	824.0	-30.9 (at 820.2 MHz)	-13.0	+17.9
26990	844.00	849.0	-34.6 (at 849.0 MHz)	-13.0	+21.6

Low Channel(1RB Offset 0), Band-Edge Emission

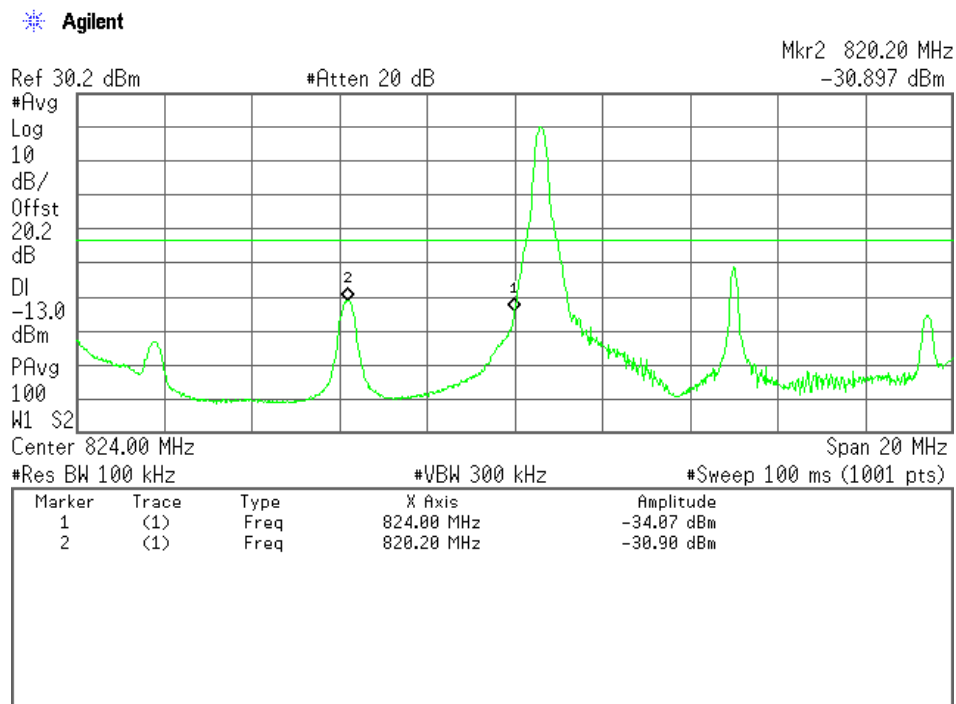


Low Channel(Full RB), Band-Edge Emission

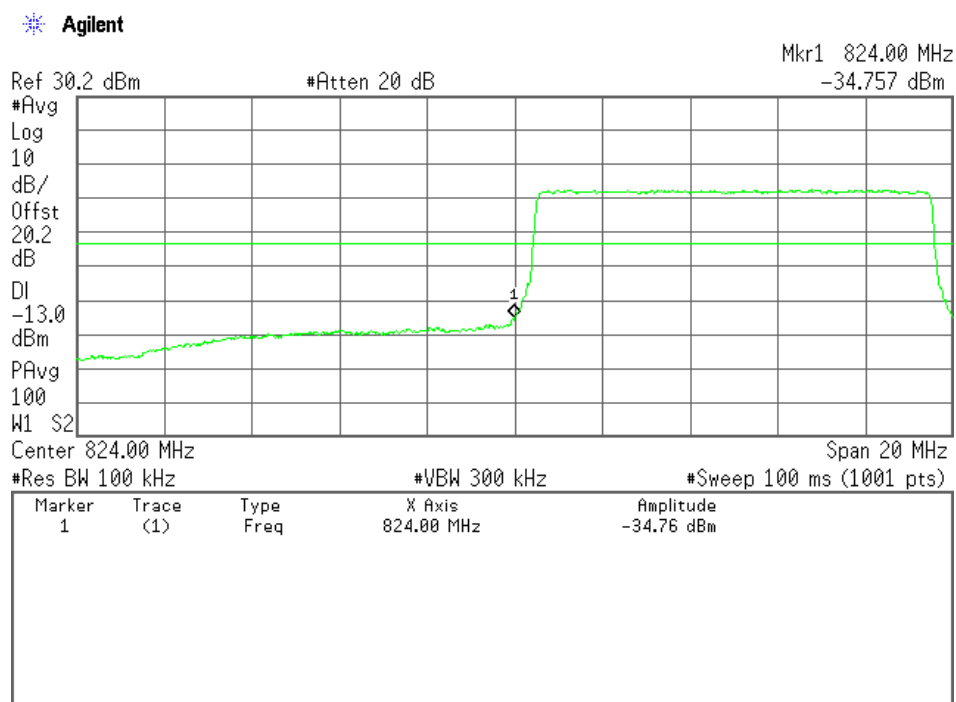


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

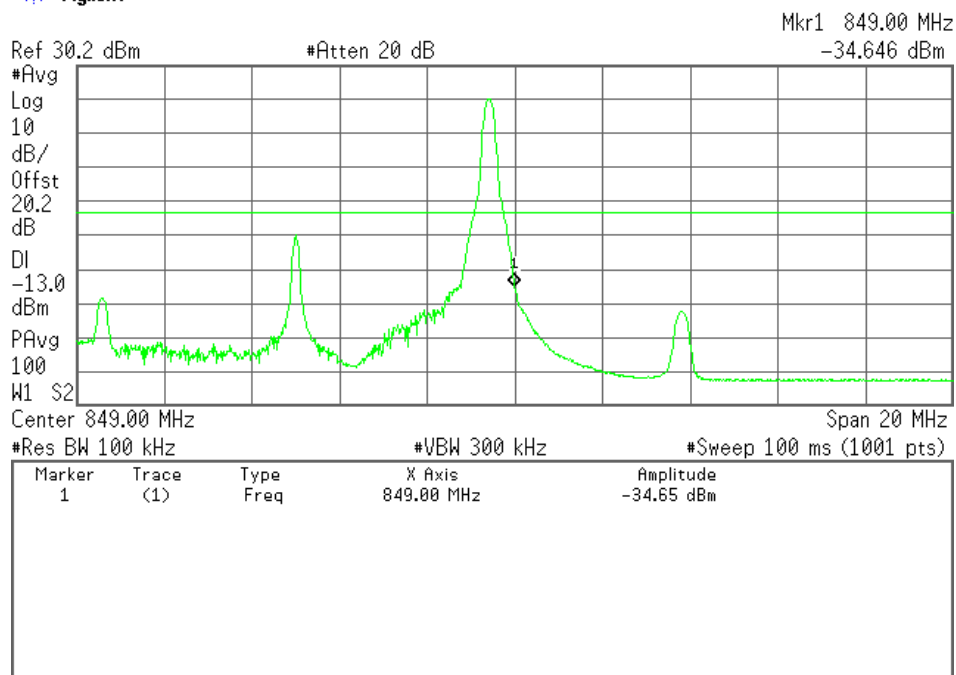

High Channel(Full RB), Band-Edge Emission

Agilent

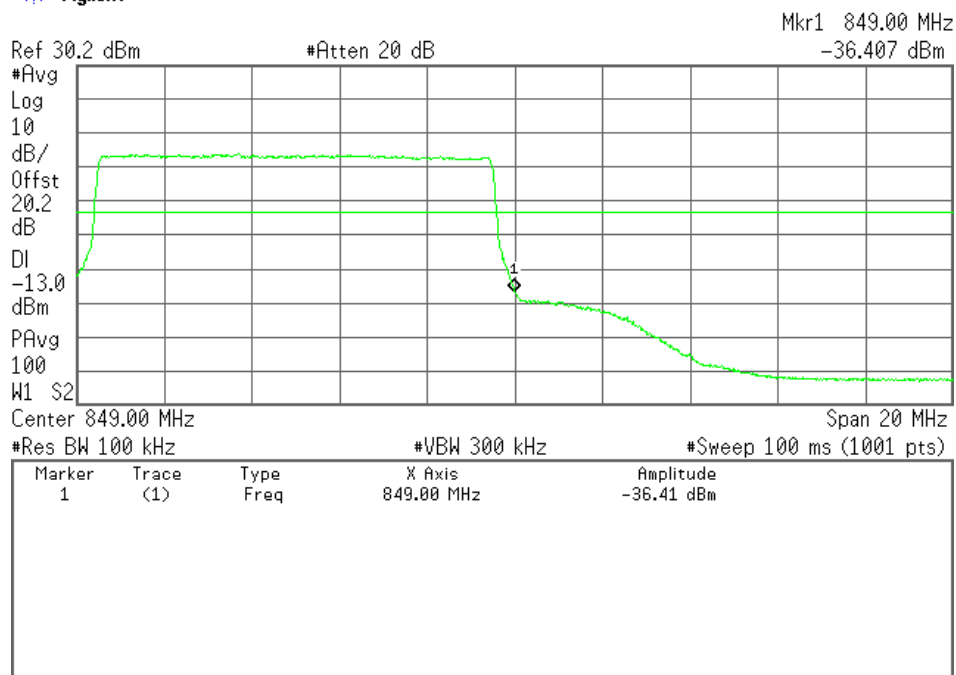


1-5-1) BW 15MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26865	831.50	824.0	-29.2 (at 818.2 MHz)	-13.0	+16.2
26965	841.50	849.0	-32.3 (at 849.0 MHz)	-13.0	+19.3

Low Channel(1RB Offset 0), Band-Edge Emission

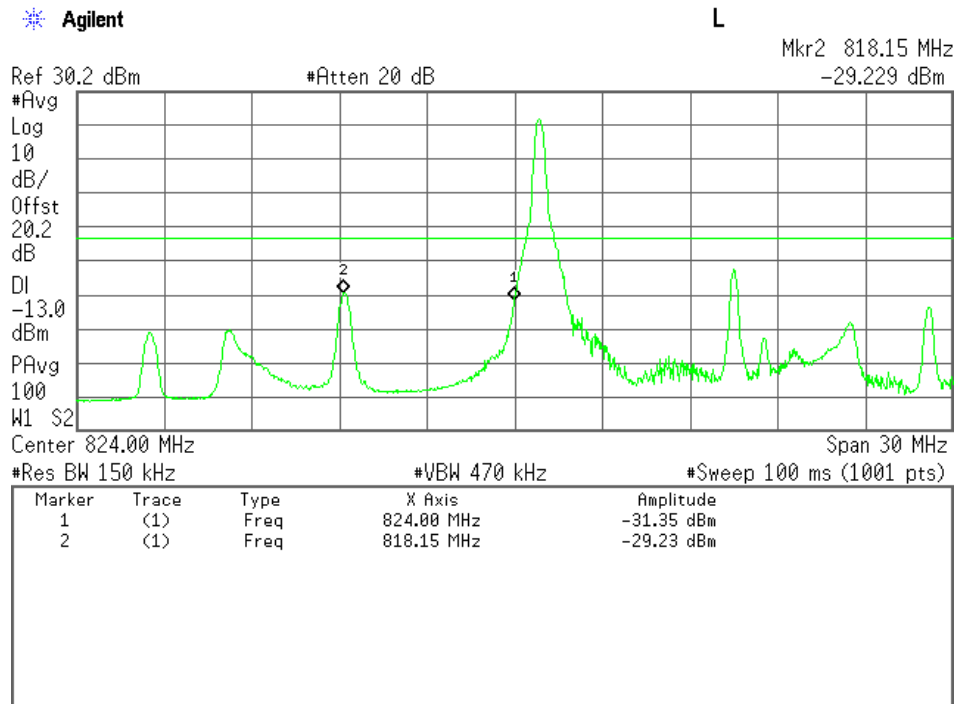


Low Channel(Full RB), Band-Edge Emission

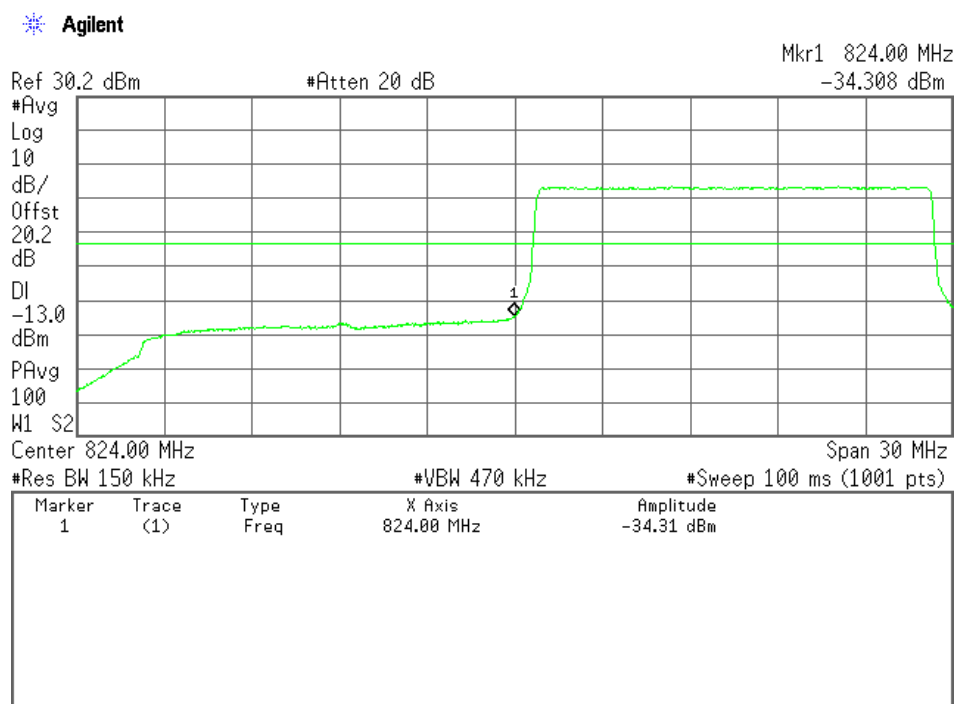


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

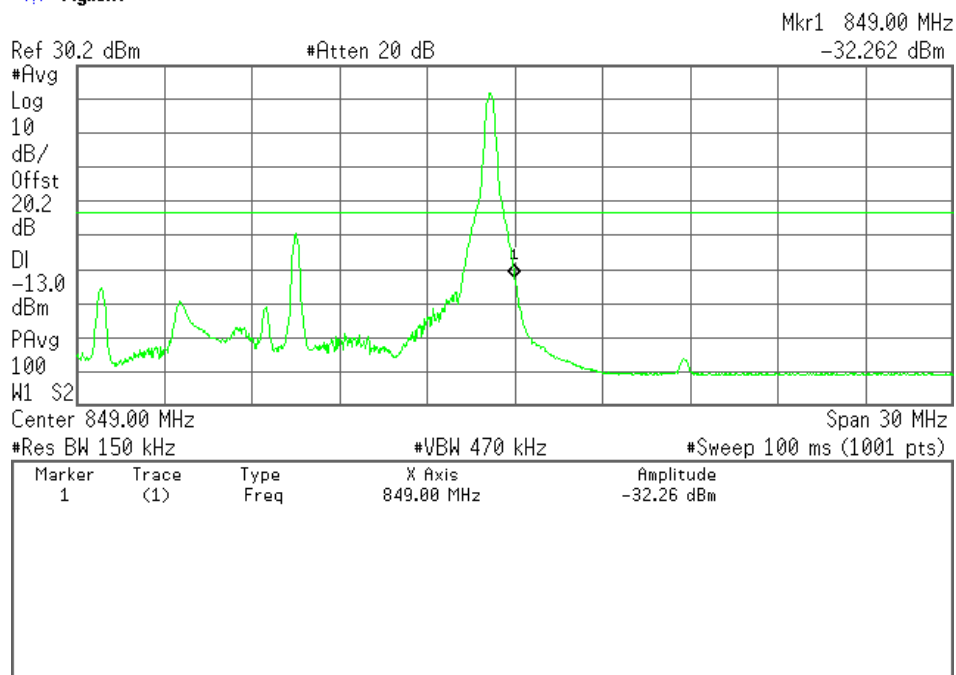

High Channel(Full RB), Band-Edge Emission

Agilent

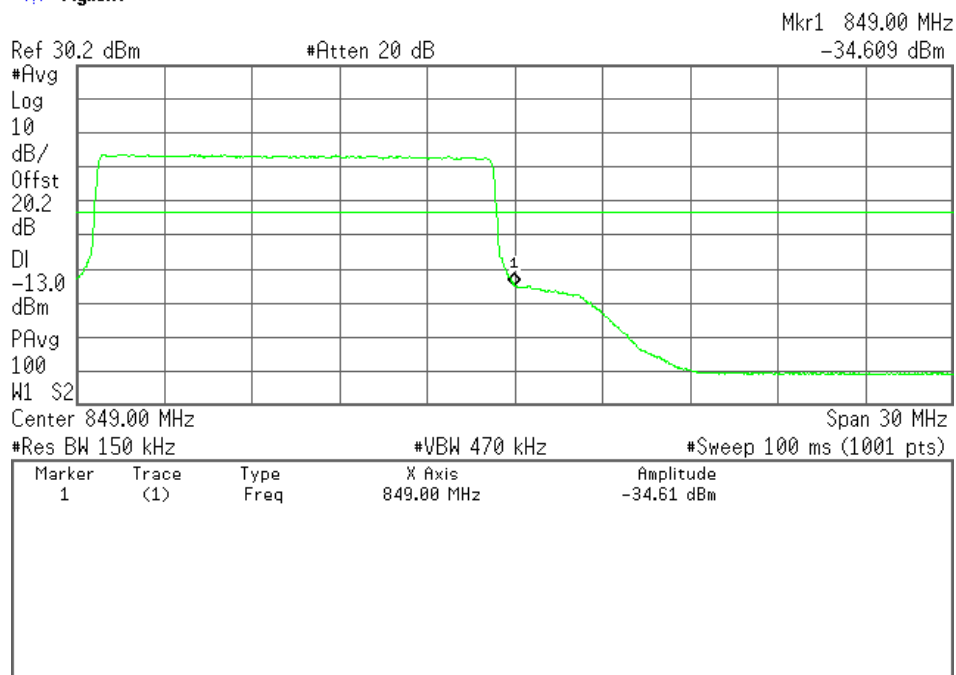


1-5-2) BW 15MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26865	831.50	824.0	-29.9 (at 818.2 MHz)	-13.0	+16.9
26965	841.50	849.0	-32.2 (at 849.0 MHz)	-13.0	+19.2

Low Channel(1RB Offset 0), Band-Edge Emission

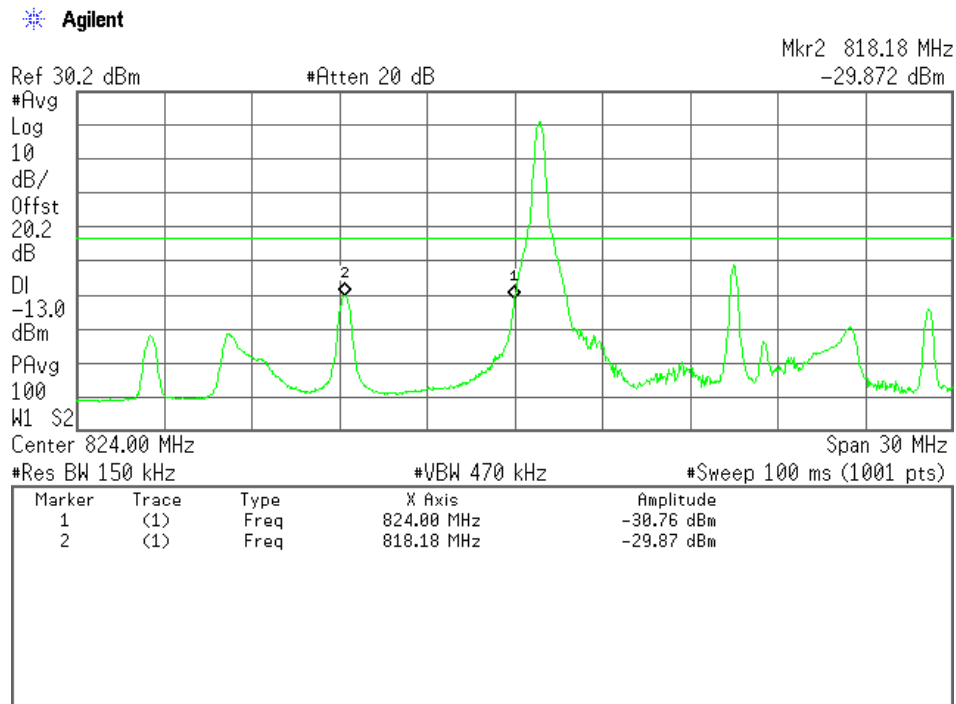


Low Channel(Full RB), Band-Edge Emission

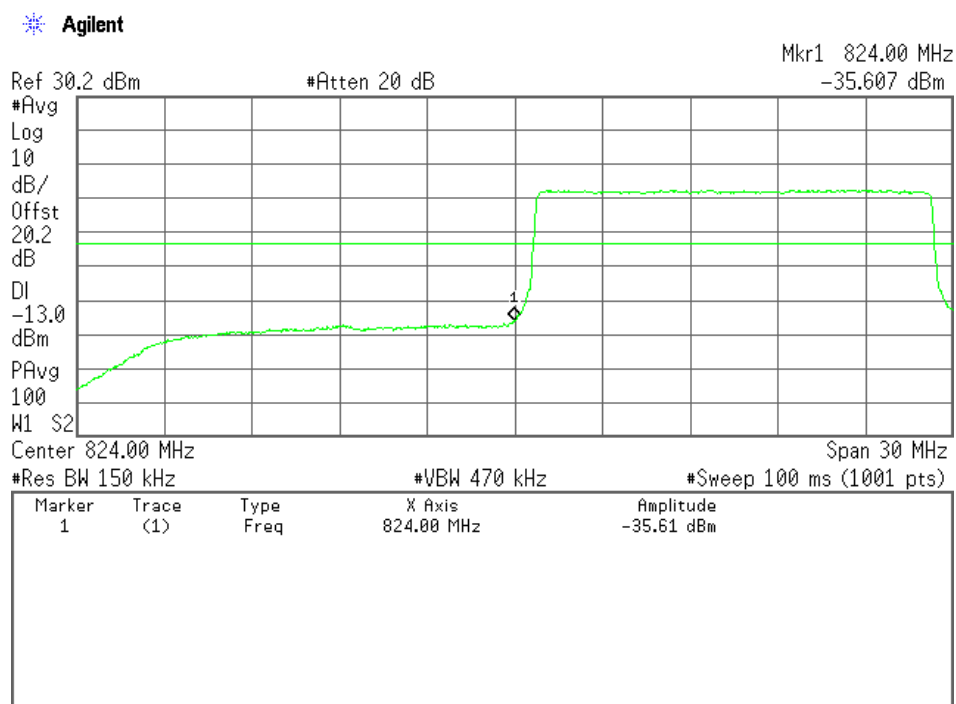


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

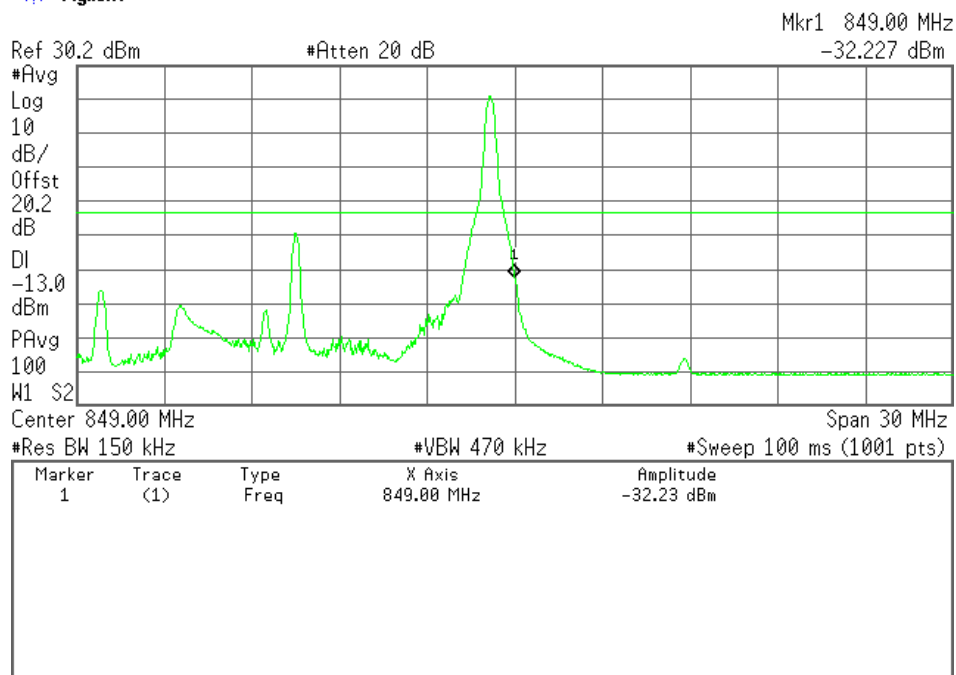

High Channel(Full RB), Band-Edge Emission

Agilent

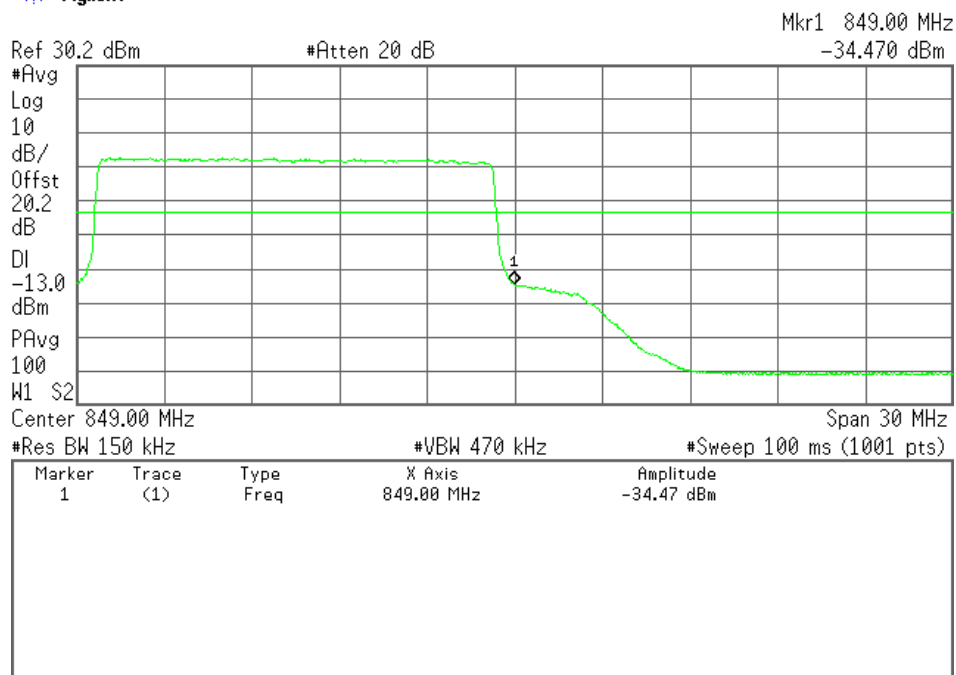

Test Date :October 29, 2015
Temp.:25°C, Humi:34%


2. Part 90

2-1-1) BW 1.4MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26697	814.70	814.0	-31.4 (at 814.0 MHz)	-20.0	+11.4
26783	823.30	824.0	-32.5 (at 824.0 MHz)	-20.0	+12.5


Low Channel(1RB Offset 0), Band-Edge Emission

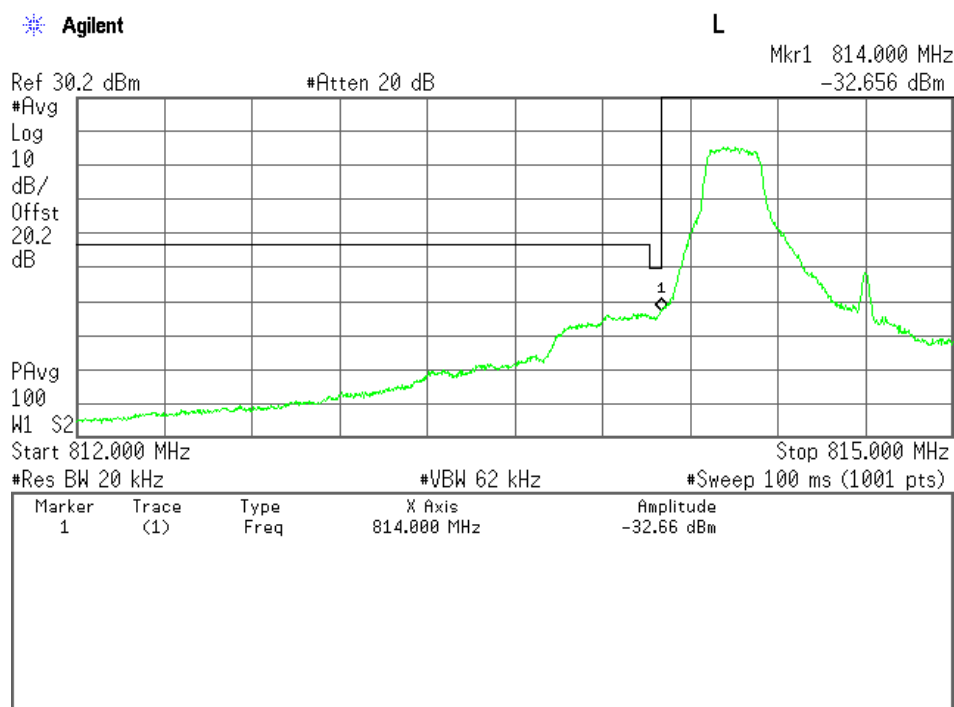


Low Channel(Full RB), Band-Edge Emission

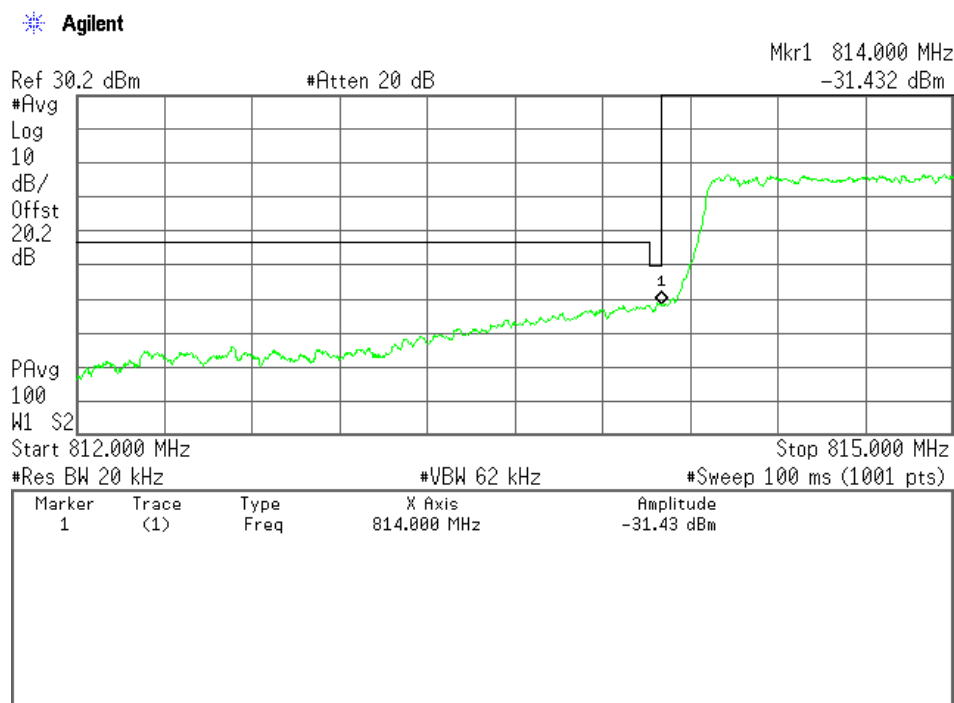

High Channel(1RB Offset Max), Band-Edge Emission

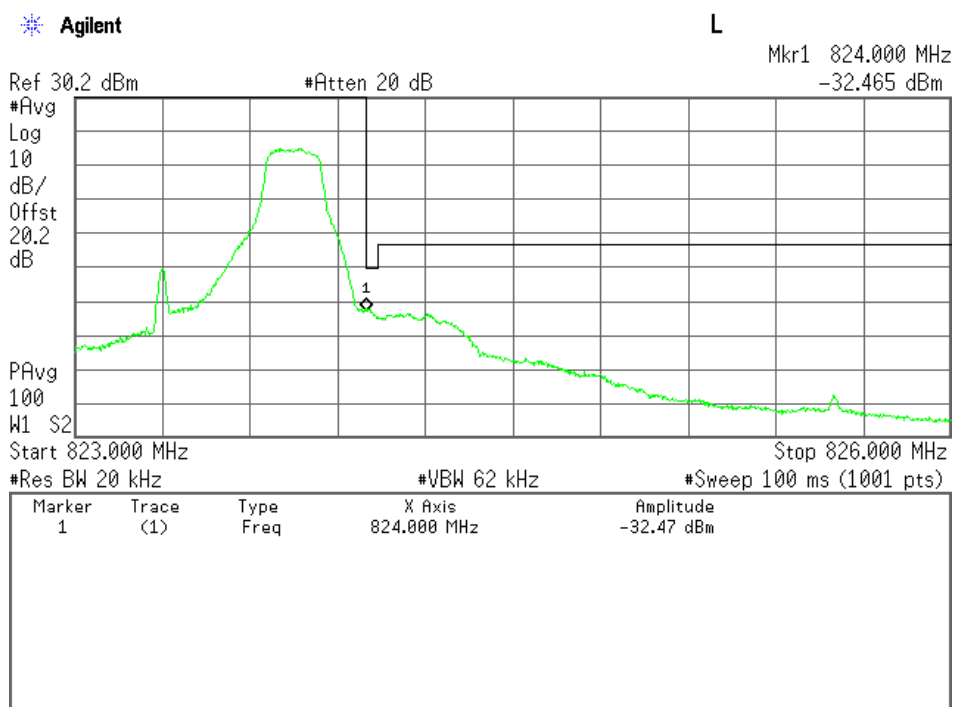

High Channel(Full RB), Band-Edge Emission

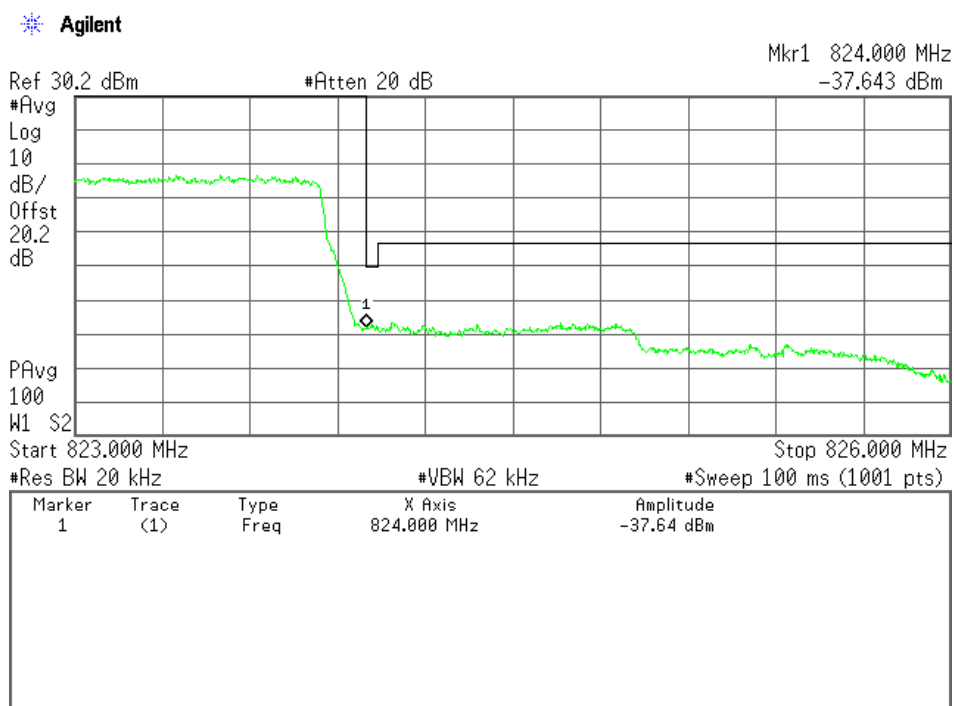


2-1-2) BW 1.4MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26697	814.70	814.0	-31.7 (at 814.0 MHz)	-20.0	+11.7
26783	823.30	824.0	-33.4 (at 824.0 MHz)	-20.0	+13.4

Low Channel(1RB Offset 0), Band-Edge Emission

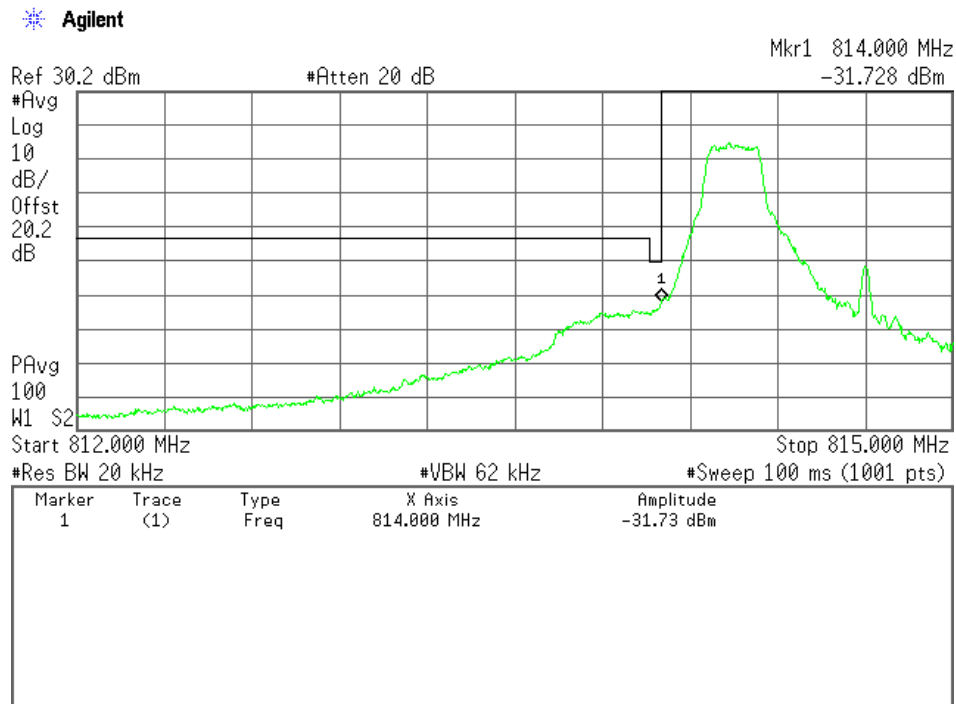


Low Channel(Full RB), Band-Edge Emission

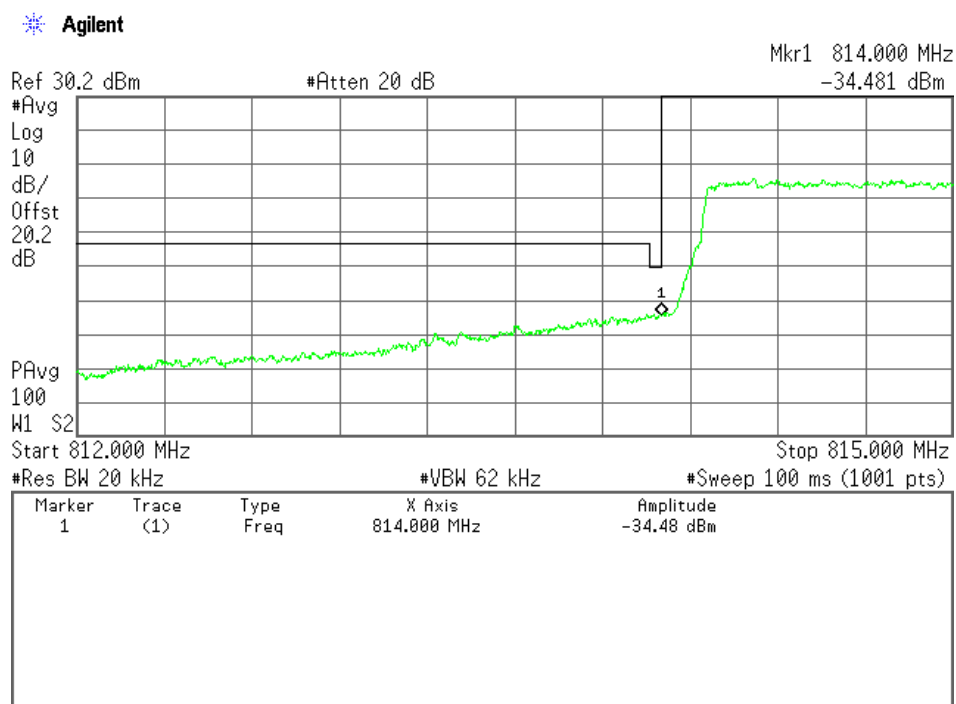


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

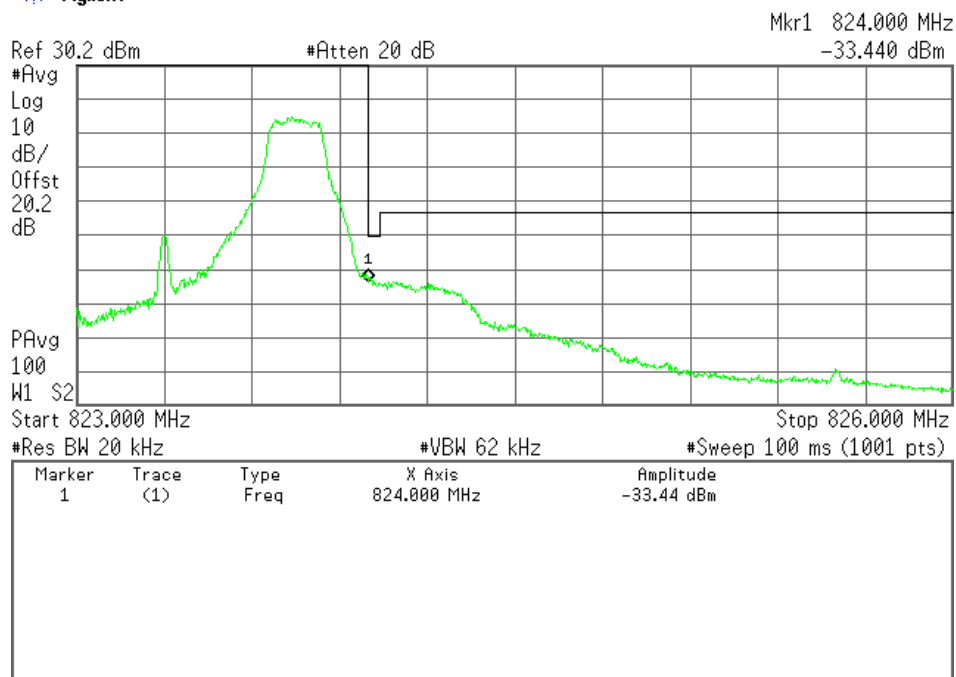

High Channel(Full RB), Band-Edge Emission

Agilent

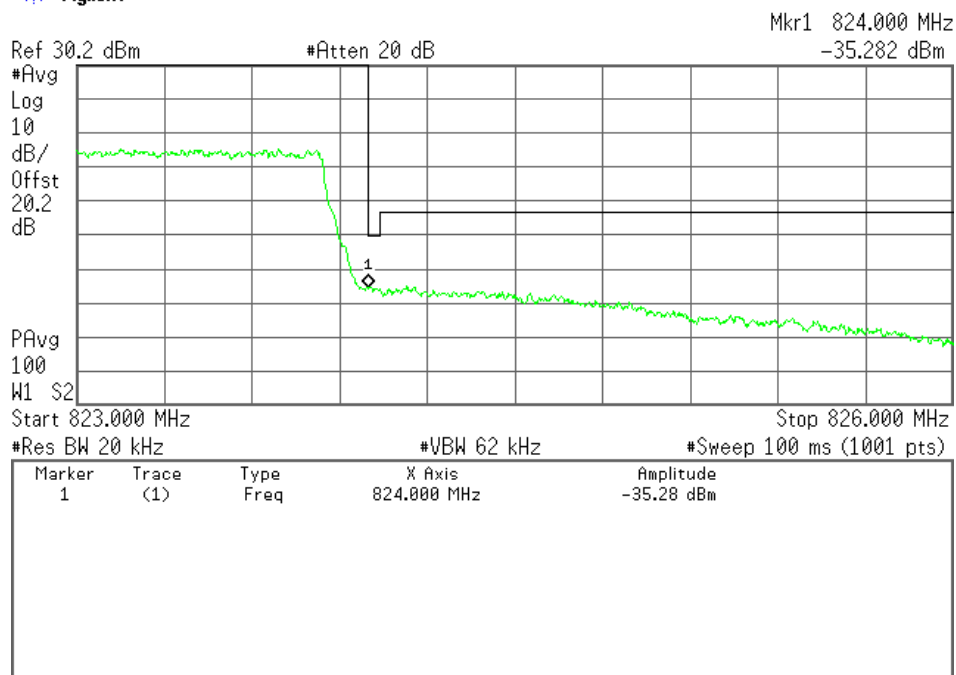


2-2-1) BW 3MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26705	815.50	814.0	-20.8 (at 814.0 MHz)	-20.0	+0.8
26775	822.50	824.0	-21.3 (at 824.0 MHz)	-20.0	+1.3


Low Channel(1RB Offset 0), Band-Edge Emission

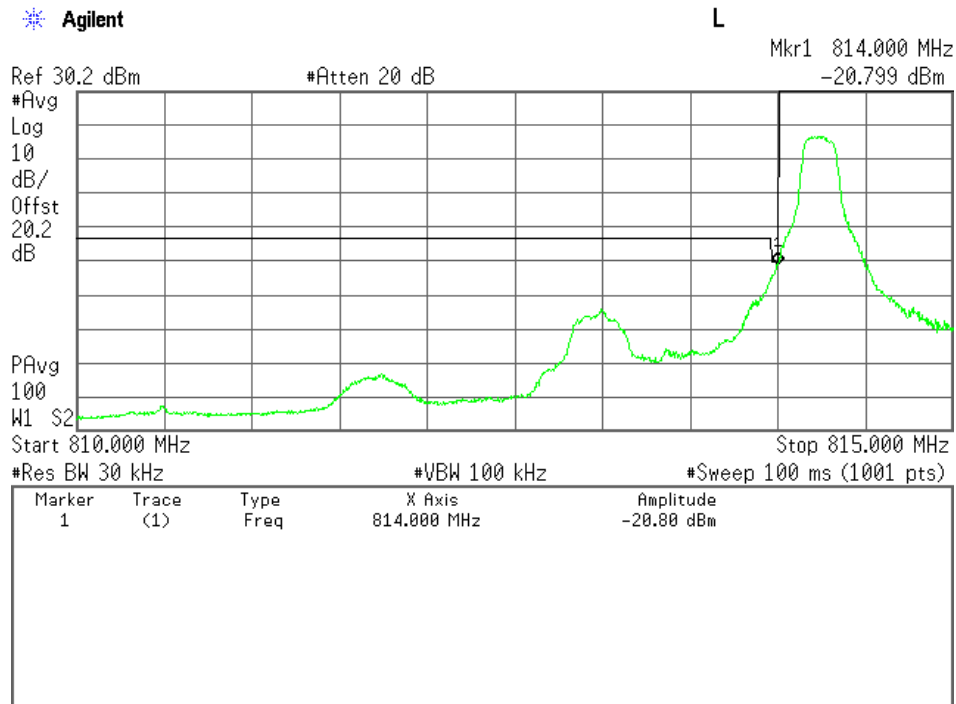


Low Channel(Full RB), Band-Edge Emission

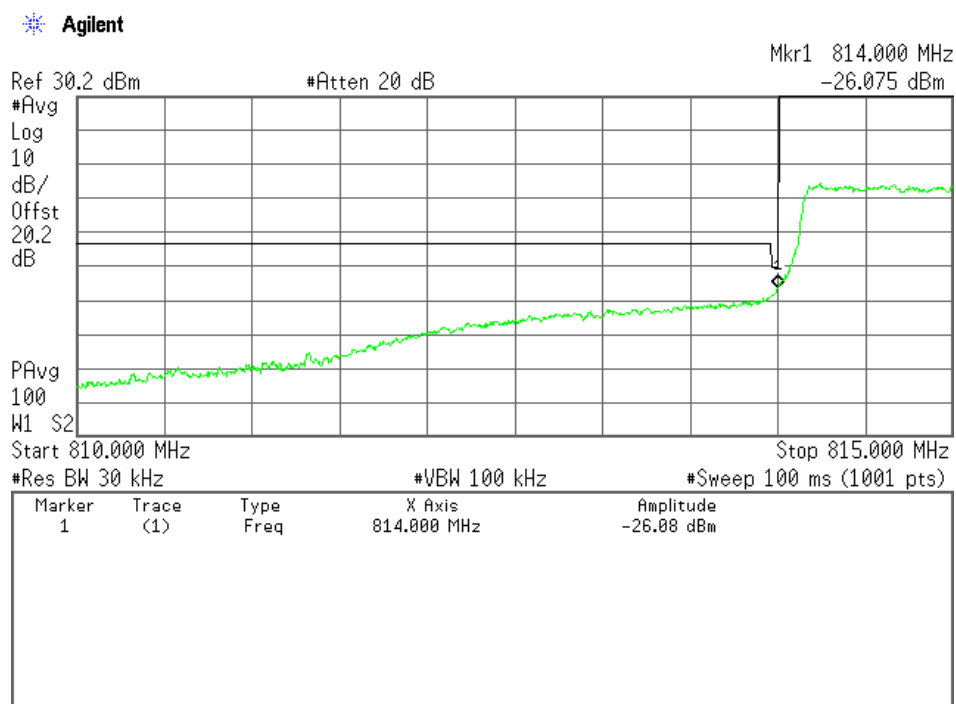

High Channel(1RB Offset Max), Band-Edge Emission

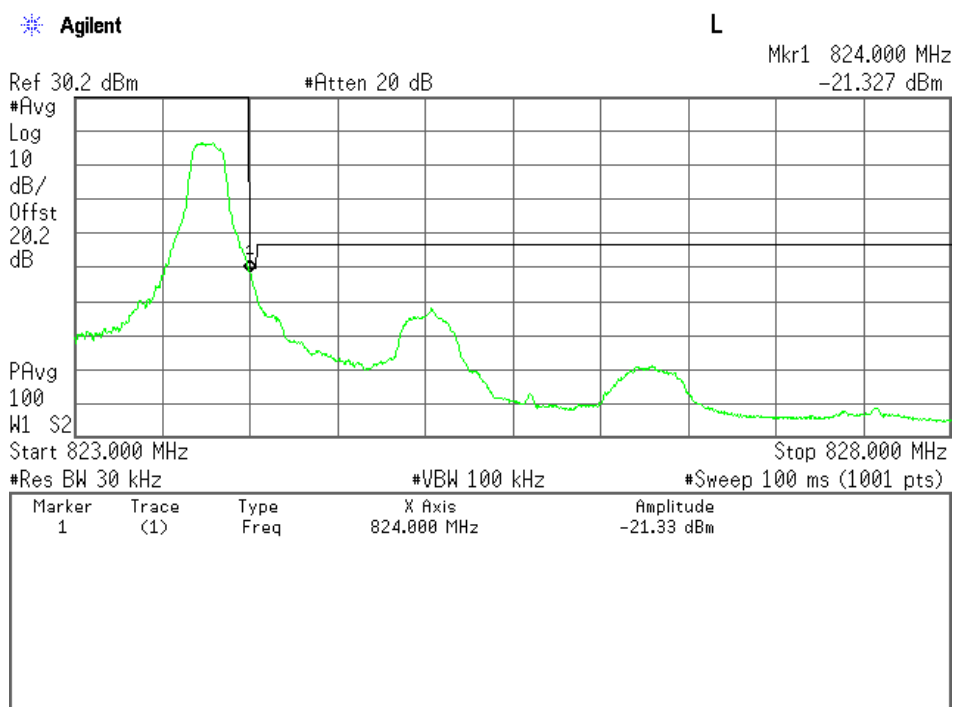

High Channel(Full RB), Band-Edge Emission

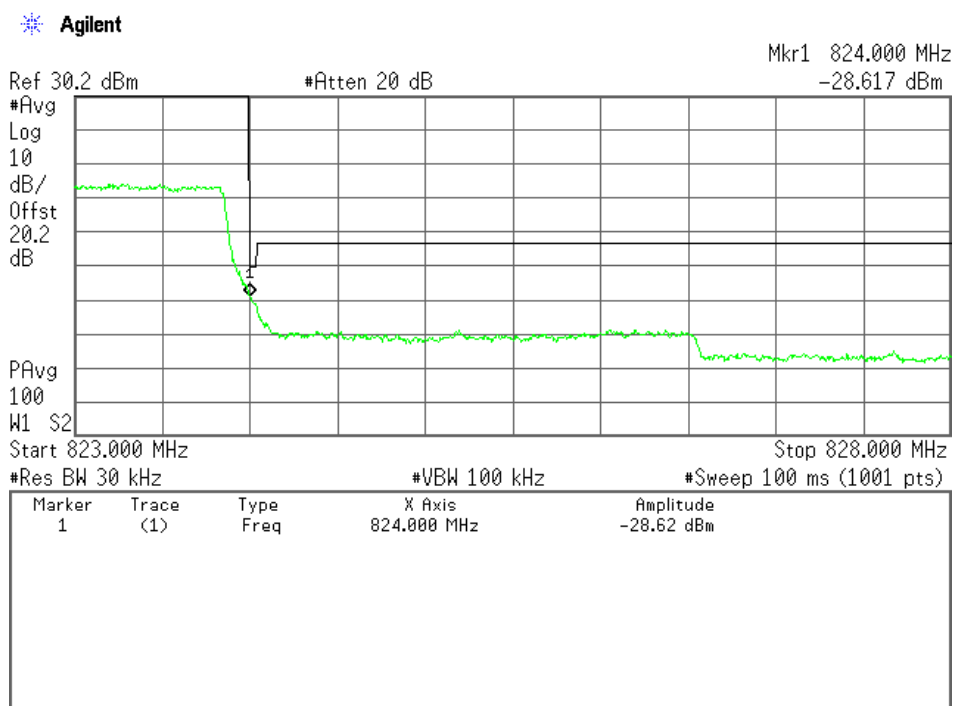


2-2-2) BW 3MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26705	815.50	814.0	-21.7 (at 814.0 MHz)	-20.0	+1.7
26775	822.50	824.0	-22.6 (at 824.0 MHz)	-20.0	+2.6

Low Channel(1RB Offset 0), Band-Edge Emission

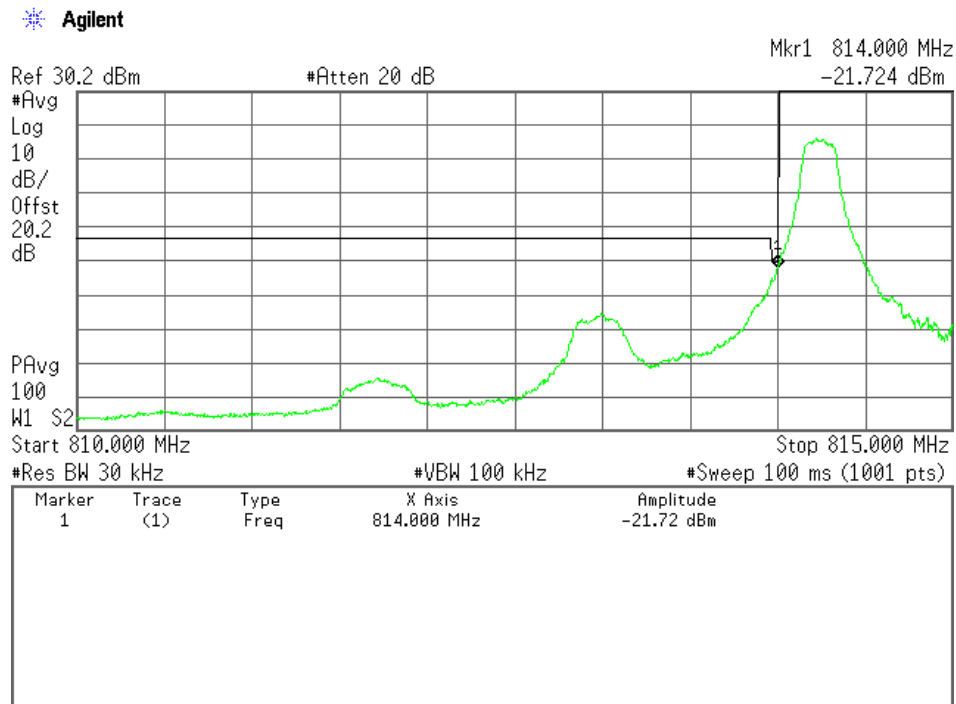


Low Channel(Full RB), Band-Edge Emission

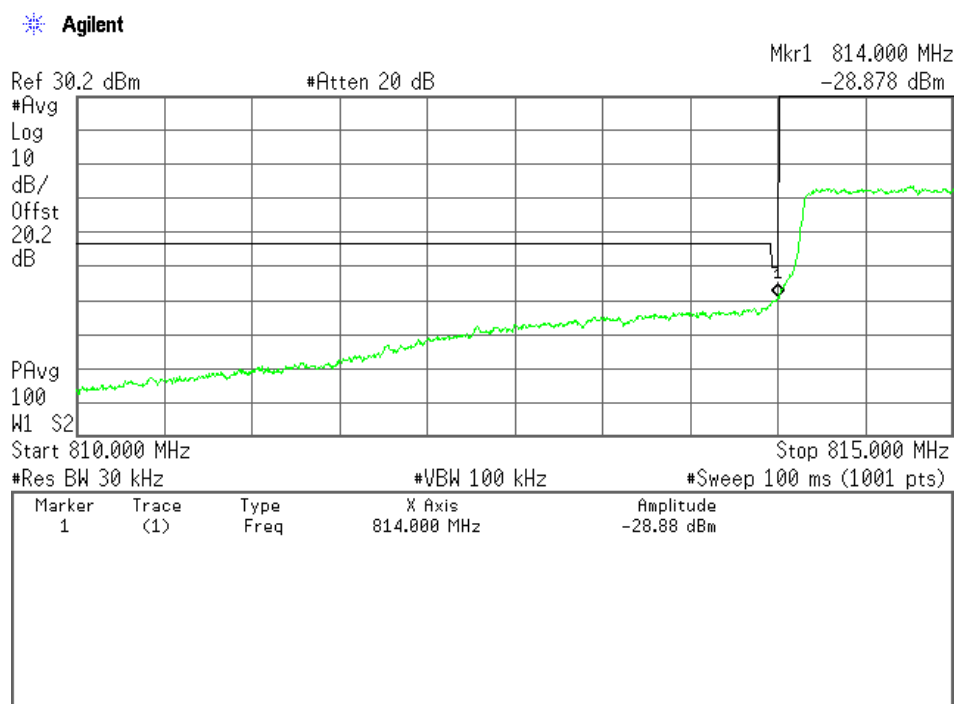


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

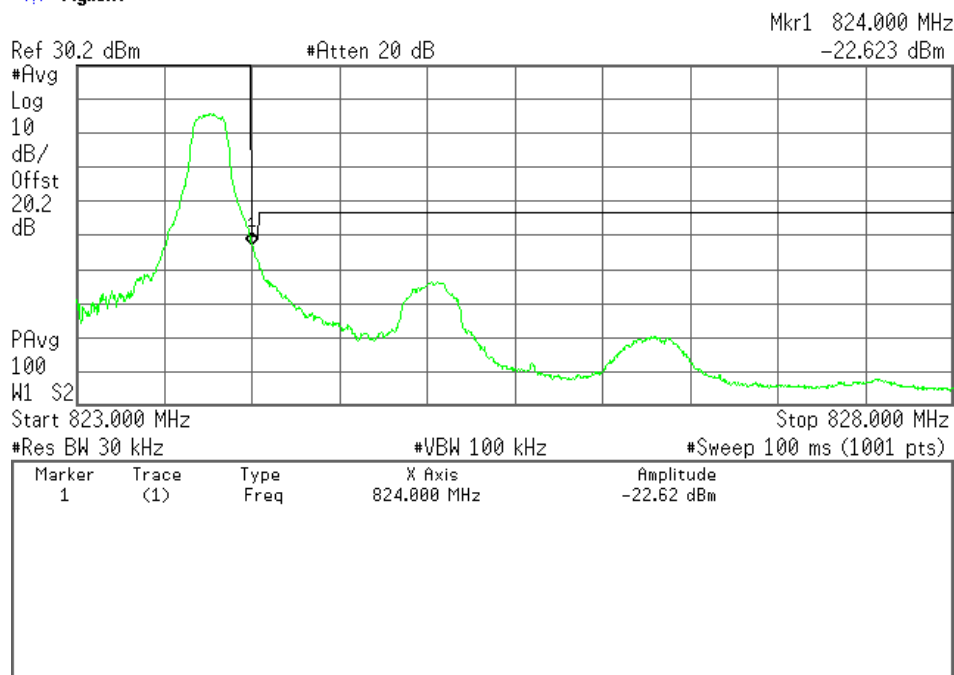

High Channel(Full RB), Band-Edge Emission

Agilent

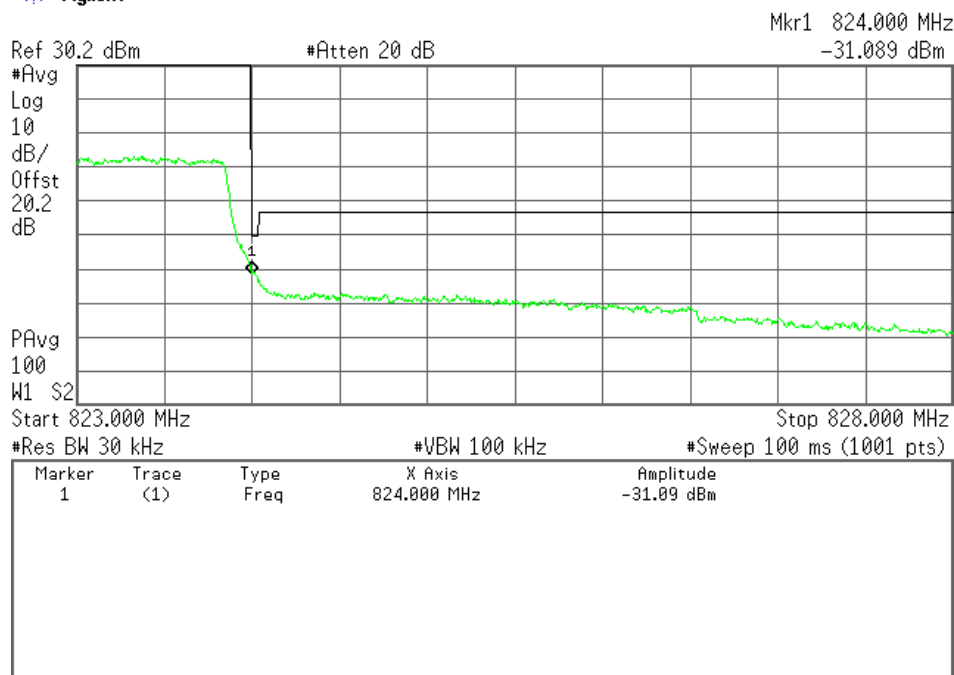


2-3-1) BW 5MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26715	816.50	814.0	-24.0 (at 814.0 MHz)	-20.0	+4.0
26765	821.50	824.0	-23.5 (at 824.0 MHz)	-20.0	+3.5


Low Channel(1RB Offset 0), Band-Edge Emission

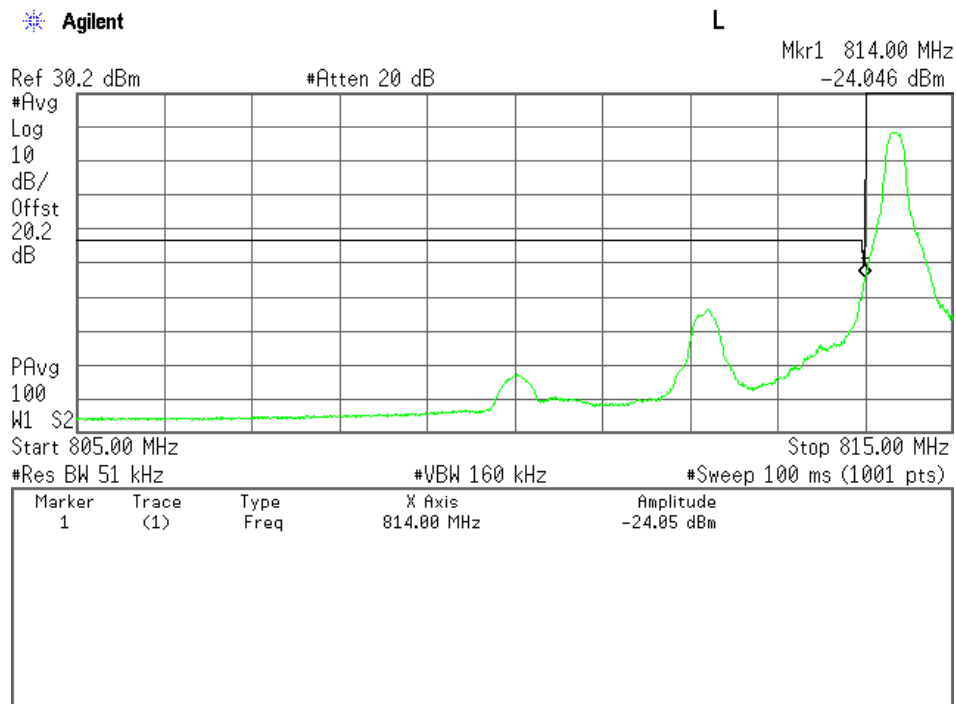


Low Channel(Full RB), Band-Edge Emission

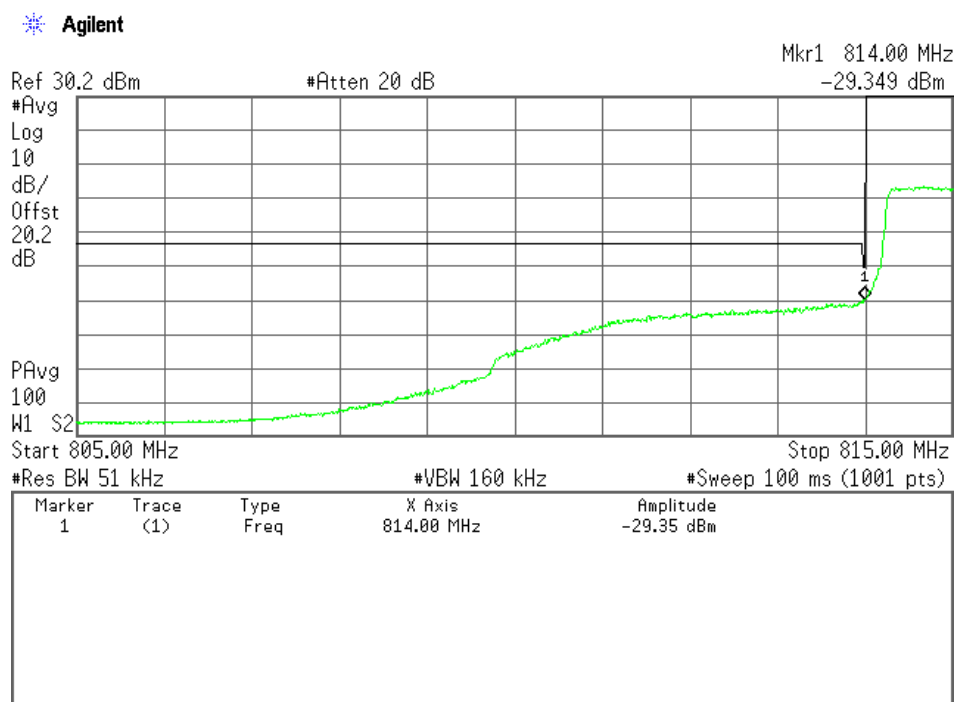

High Channel(1RB Offset Max), Band-Edge Emission

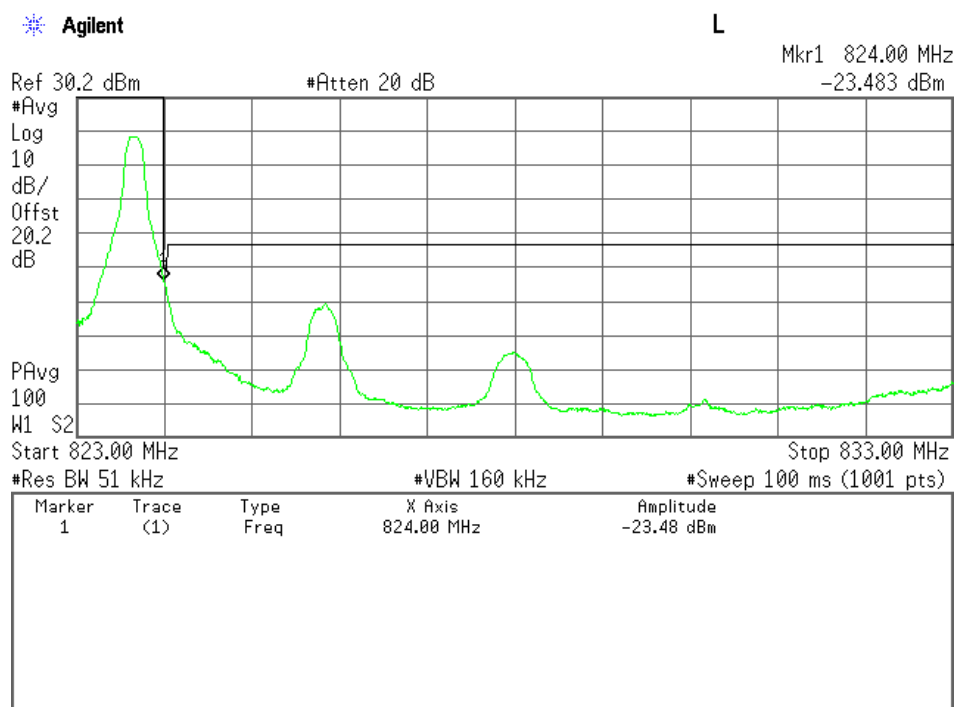

High Channel(Full RB), Band-Edge Emission

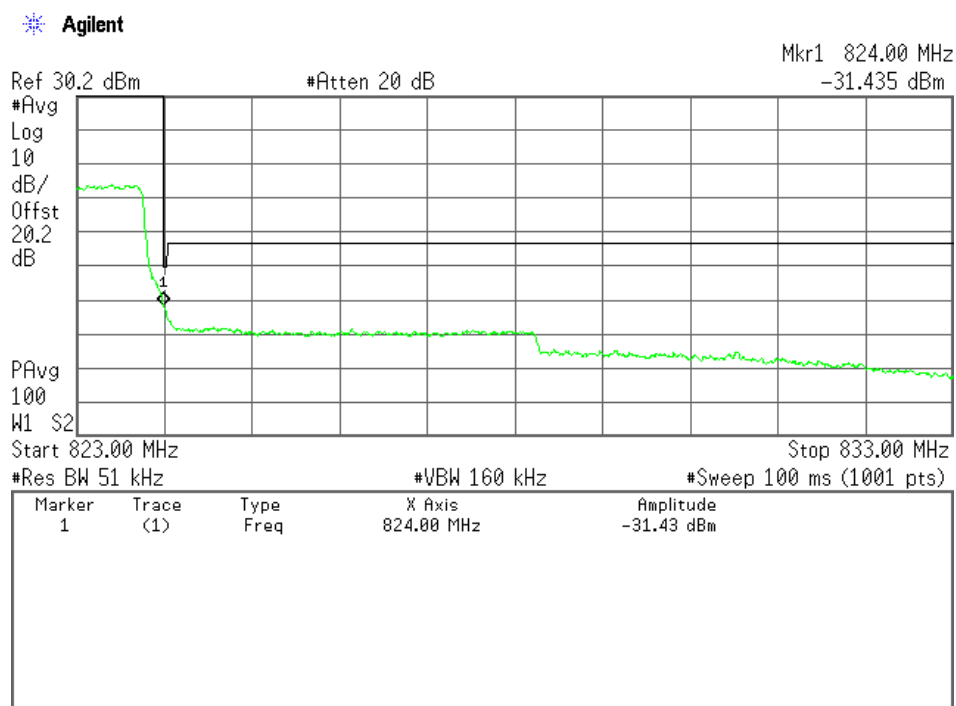


2-3-2) BW 5MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26715	816.50	814.0	-24.6 (at 814.0 MHz)	-20.0	+4.6
26765	821.50	824.0	-24.1 (at 824.0 MHz)	-20.0	+4.1


Low Channel(1RB Offset 0), Band-Edge Emission

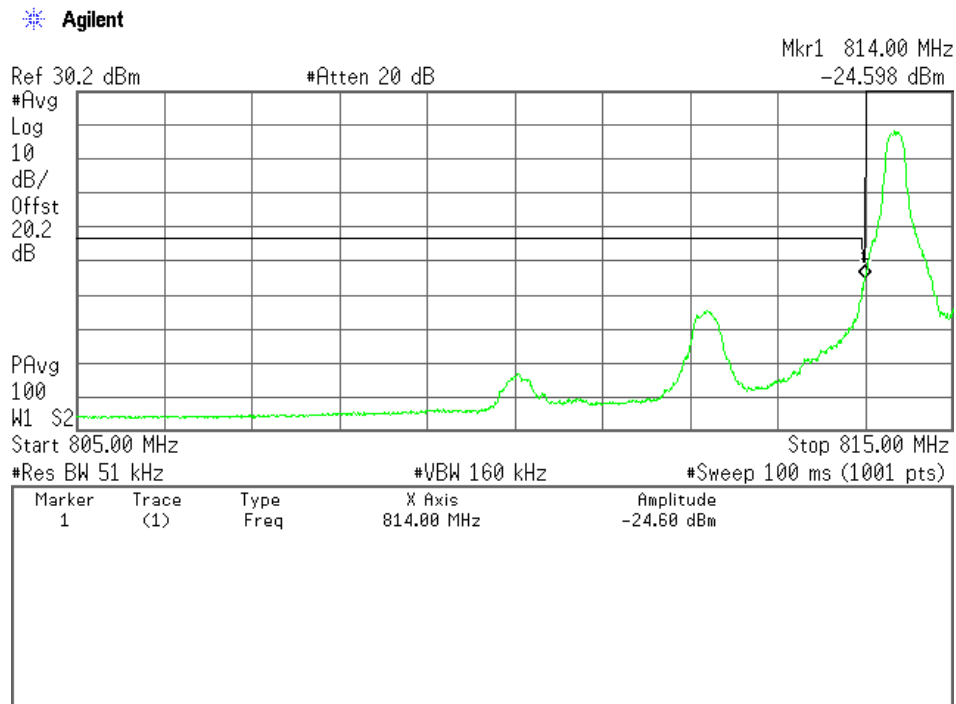


Low Channel(Full RB), Band-Edge Emission

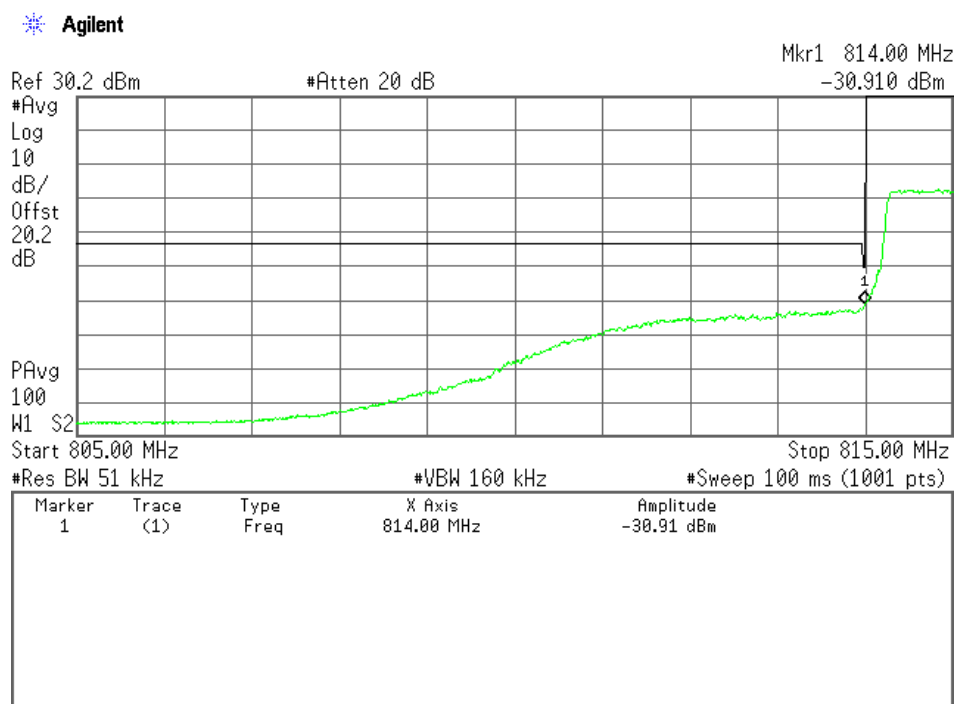

High Channel(1RB Offset Max), Band-Edge Emission

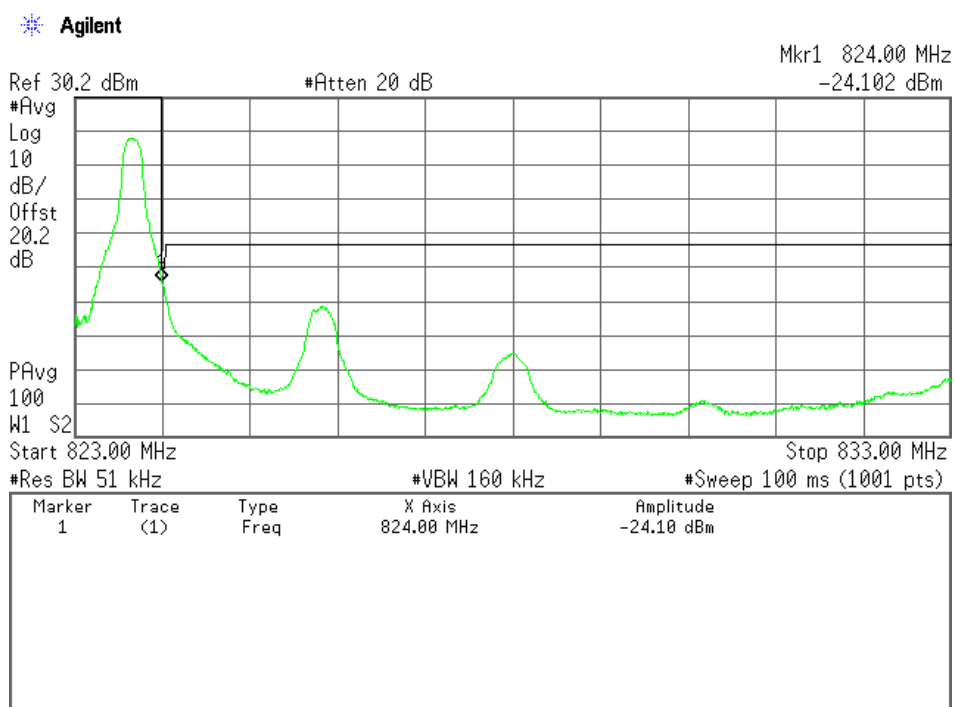

High Channel(Full RB), Band-Edge Emission

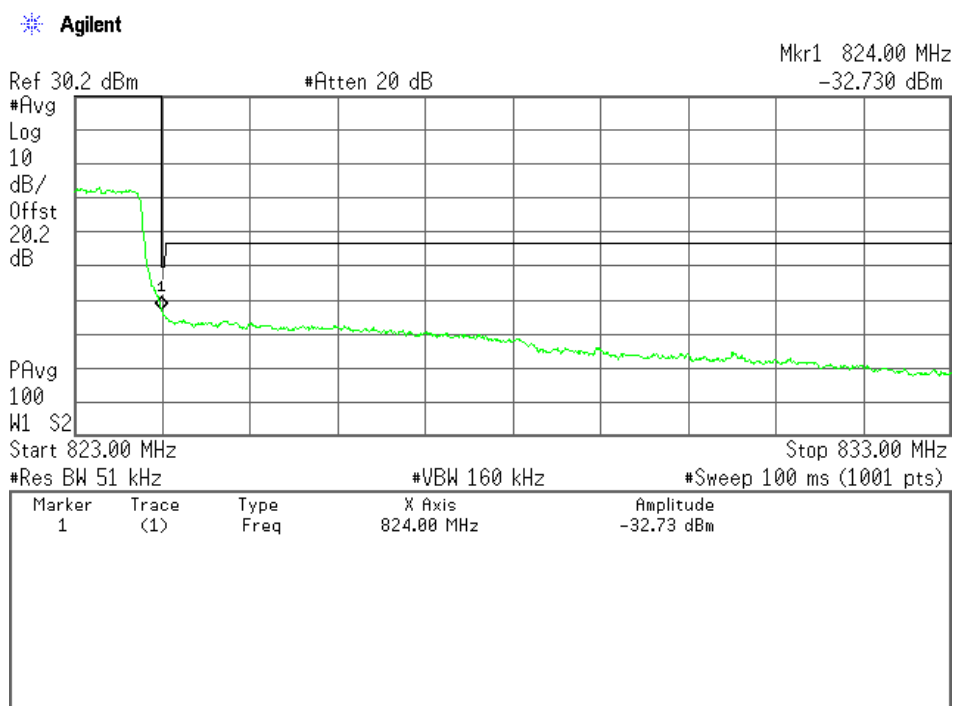


2-4-1) BW 10MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26740	819.00	814.0	-32.0 (at 814.0 MHz)	-20.0	+12.0
26740	819.00	824.0	-28.1 (at 824.0 MHz)	-20.0	+8.1


Low Channel(1RB Offset 0), Band-Edge Emission

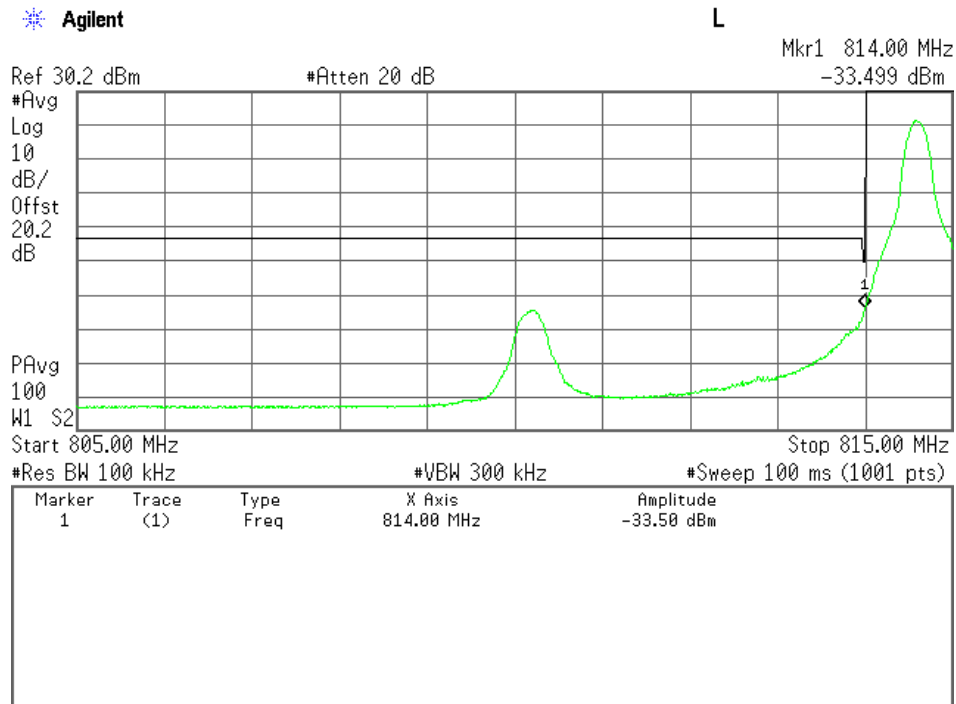


Low Channel(Full RB), Band-Edge Emission

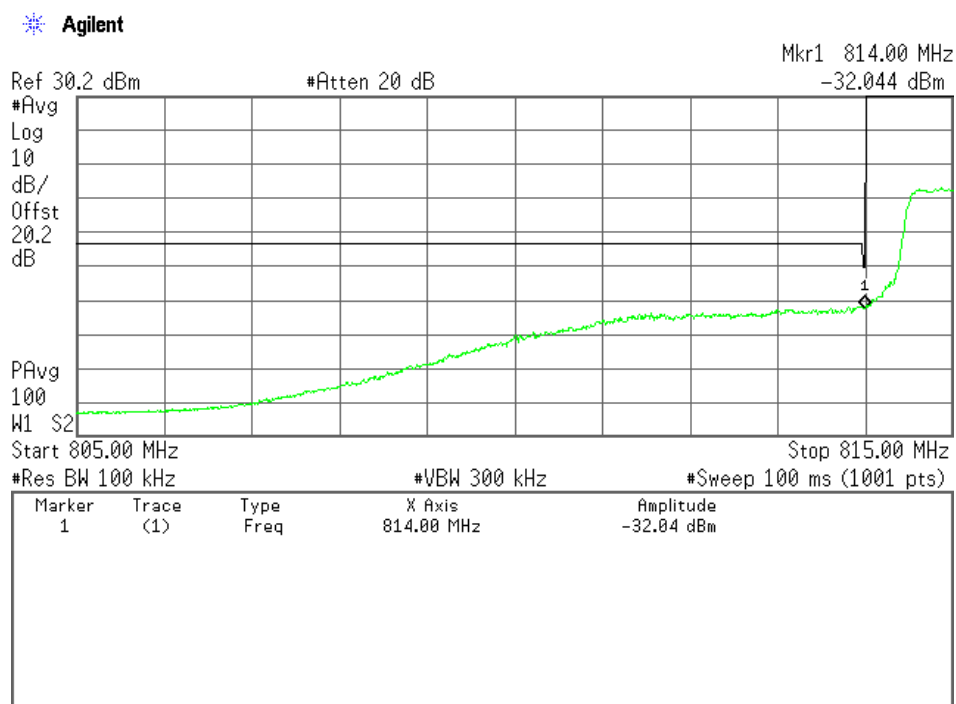

High Channel(1RB Offset Max), Band-Edge Emission

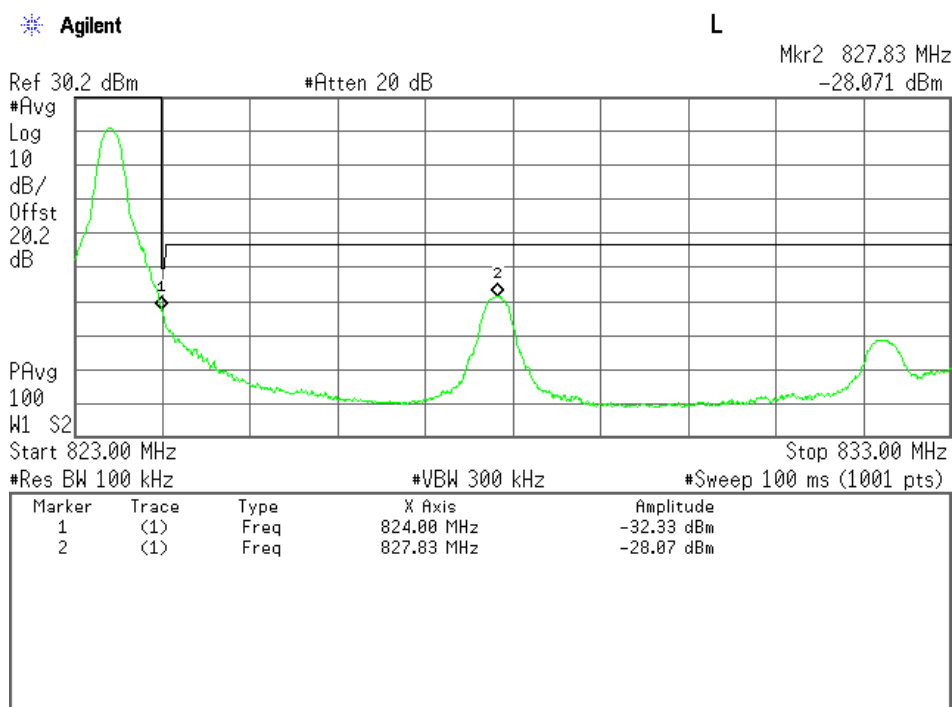

High Channel(Full RB), Band-Edge Emission

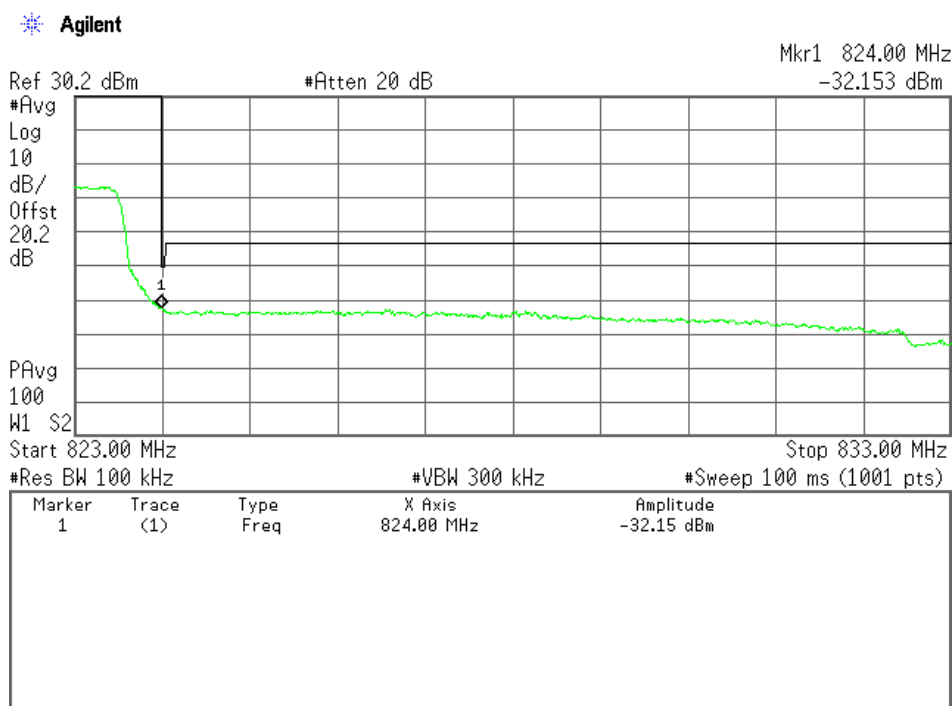


2-4-2) BW 10MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
26740	819.00	814.0	-33.9 (at 814.0 MHz)	-20.0	+13.9
26740	819.00	824.0	-28.9 (at 824.0 MHz)	-20.0	+8.9


Low Channel(1RB Offset 0), Band-Edge Emission

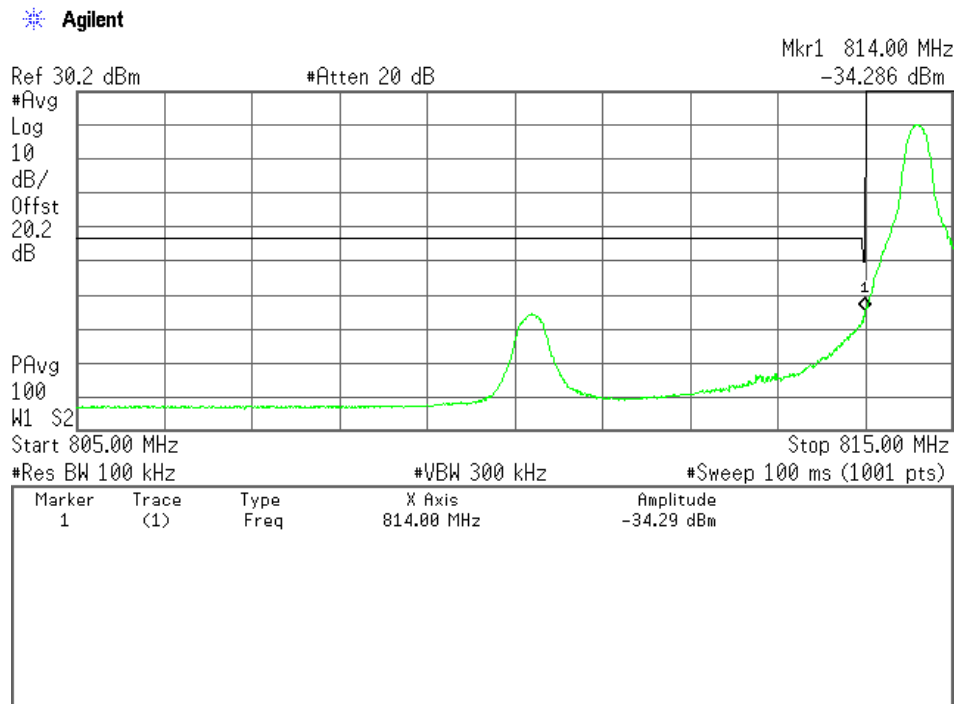


Low Channel(Full RB), Band-Edge Emission

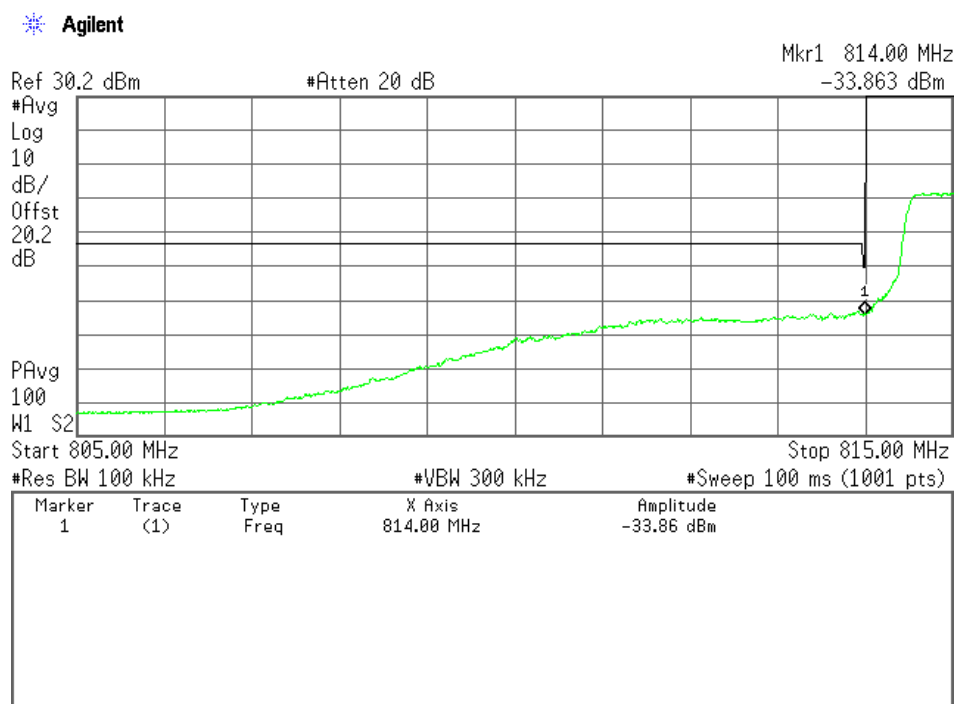

High Channel(1RB Offset Max), Band-Edge Emission

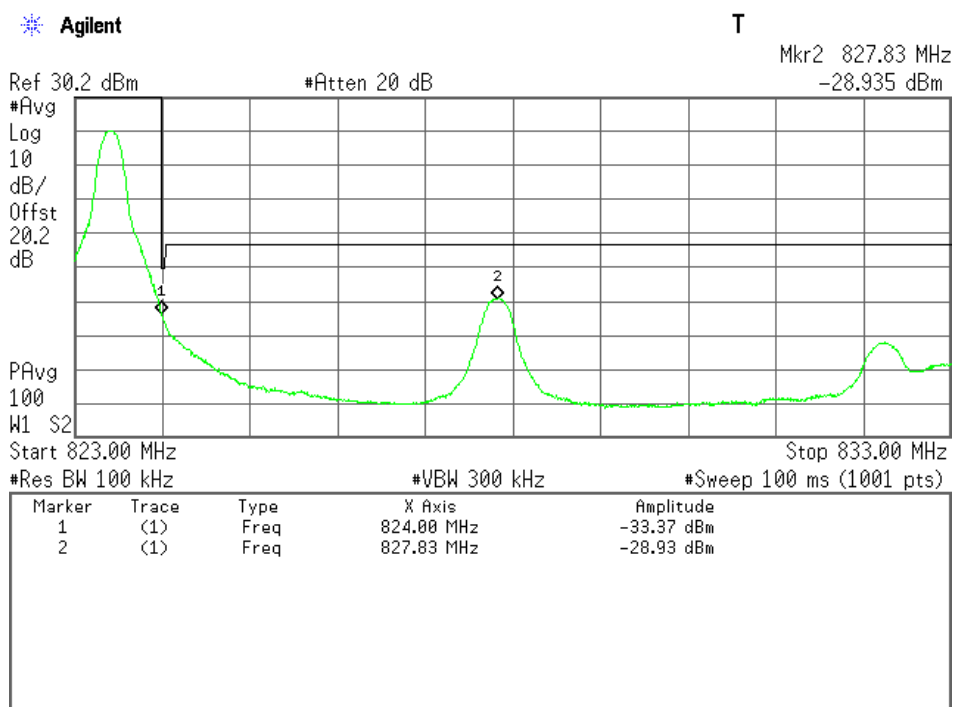

High Channel(Full RB), Band-Edge Emission

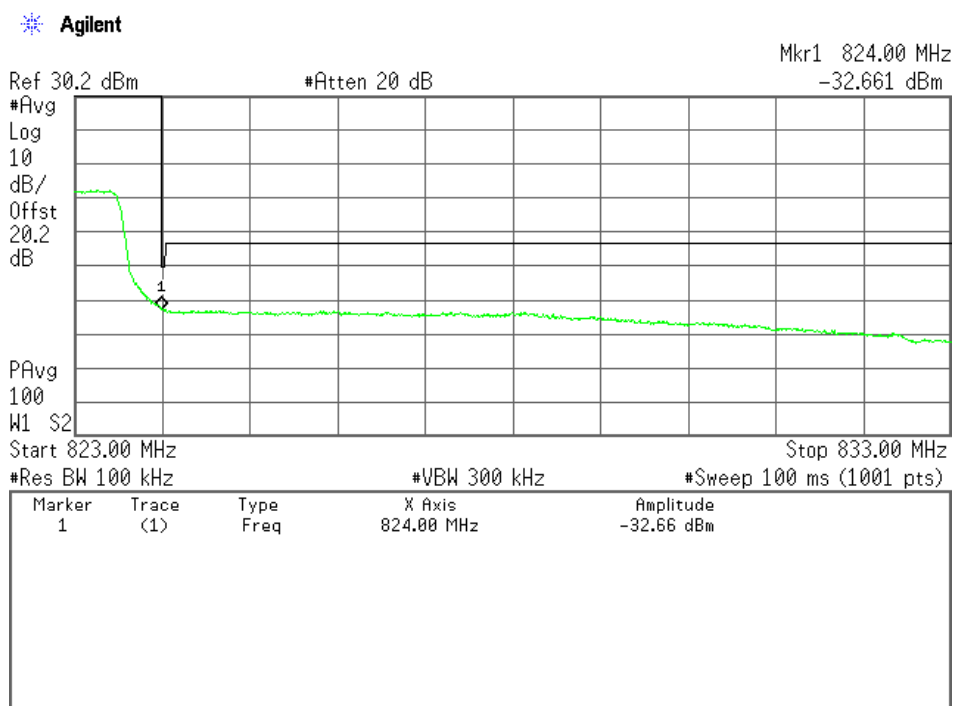

7.7 Field Strength of Spurious Radiation (§2.1053)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.7.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

Min. Limit Margin	<u>>29.6</u> dB	at	<u>8255/8475</u> MHz
		at	<u>8265/8465</u> MHz
		at	<u>8290/8440</u> MHz
		at	<u>8315/8415</u> MHz

Remarks : _____

Part 90

Min. Limit Margin	<u>>29.7</u> dB	at	<u>8215/8233</u> MHz
-------------------	--------------------	----	----------------------

Uncertainty of Measurement Results	30 MHz – 1000 MHz	<u>± 1.6</u>	dB(2 σ)
	1 GHz – 18 GHz	<u>± 1.8</u>	dB(2 σ)

Remarks : _____

7.7.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
Signal Generator	E8257D	MY45140309 (B-39)	Agilent	2016/08/10
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2016/07/16
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2016/07/16
Biconical Antenna	VHA9103/BBA9106	2355 (C-30)	Schwarzbeck	2016/05/24
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2016/05/24
Dipole Antenna (TX)	KBA-511A	0-273-2 (C-17)	Kyoritsu	2016/05/20
Dipole Antenna (TX)	KBA-611	0-248-2 (C-20)	Kyoritsu	2016/05/20
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2016/04/15
Pre-Amplifier	TPA0118-36	1010 (A-37)	TOYO	2016/05/11
Horn Antenna	91888-2	562 (C-41-1)	EATON	2016/06/16
Horn Antenna	91889-2	568 (C-41-2)	EATON	2016/06/16
Horn Antenna	3160-04	9903-1053 (C-55)	EMCO	2016/06/29
Horn Antenna	3160-05	9902-1061 (C-56)	EMCO	2016/06/29
Horn Antenna	3160-06	9712-1045 (C-57)	EMCO	2016/06/29
Horn Antenna	3160-07	9902-1113 (C-58)	EMCO	2016/06/29
Attenuator	2-10	AW7937 (D-40)	Weinschel	2016/10/12
Attenuator	54A-10	W5713 (D-29)	Weinschel	2016/08/16
Attenuator	2-10	BA6214 (D-79)	Weinschel	2015/11/18
RF Cable	SUCOFLEX102E	6683/2E (C-70)	HUBER+SUHNER	2015/11/18
RF Cable	SUCOFLEX104	267479/4 (C-66)	HUBER+SUHNER	2016/01/19
RF Cable	SUCOFLEX104	267414/4 (C-67)	HUBER+SUHNER	2016/01/19
High Pass Filter	HPM50108	010 (D-94)	MICRO-TRONICS	2016/02/08

NOTE : The calibration interval of the above test instruments is 12 months.

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

Step 1) The spurious radiation for transmitter were measured at the distance 3 m away from the EUT which was placed on a non-conducted support 0.8 m in height and was varying at three orthogonal axes. The receiving antenna was oriented for vertical polarization and varied from 1 m to 4 m until the maximum emission level was detected on the measuring instrument. The EUT was rotated 360 degrees until the maximum emission was received. The measurement was also repeated with the receiving antenna in the horizontal polarization.

This test was carried out using the half-wave dipole antenna for up to 1GHz and using the horn antenna for above 1 GHz.

Step 2)

A) Up to 1 GHz

The ERP measurement was carried out with according to Step 2 in Clause 7.2.3. Then the RF power in the substitution antenna half-wave dipole antenna for up to 1 GHz and the substitution horn antenna for above 1 GHz.

The ERP is calculated in the following equation.

$$\text{ERP(dBm)} = P(\text{dBm}) - (\text{Balun Loss of the half-wave dipole Ant. (dB)}) + \text{Cable Loss (dB)}$$

B) Above 1 GHz

The ERP is calculated from the maximum emission level by the following formula.

$$\frac{e^2}{120\pi} = \frac{\text{eirp}}{4\pi d^2} \quad \text{----(Eq.1)}$$

$$\text{erp} = \text{eirp} - Gd \quad \text{----(Eq.2)}$$

Where, $e[V/m]$: Field Strength at measuring distance($d=3m$)

$\text{eirp}[W]$: Equivalent Isotropic Radiated Power

$\text{erp}[W]$: Effective Radiated Power

$Gd(dBi)$: Gain of the substitution half-wave dipole antenna(2.15dBi)

$$\text{eirp} = \frac{(de)^2}{30} = \frac{3}{10}e^2$$

$$\therefore 10\log(\text{eirp}) = 20\log(e) + 10\log(3/10) = 20\log(e) - 5.23$$

$$10\log(\text{eirp}) = \text{EIRP}[dBm] - 30$$


$$20\log(e) = E[dB(\mu V/m)] - 120$$

$$\therefore \text{EIRP} = E - 120 + 30 - 5.23 = E - 95.23$$


$$\therefore \text{ERP}[dBm] = \text{EIRP} - 2.15 = E - 97.38$$

The respective calculated ERP of the spurious and harmonics were compared with the ERP of fundamental frequency by specified attenuation limits, $43+10\log_{10}(TP \text{ in watt})[dB]$. Where, TP = Transmitter power at the ANT OUT under test configuration as the hands free unit used.

Radiated Emission 30 MHz to 1000 MHz

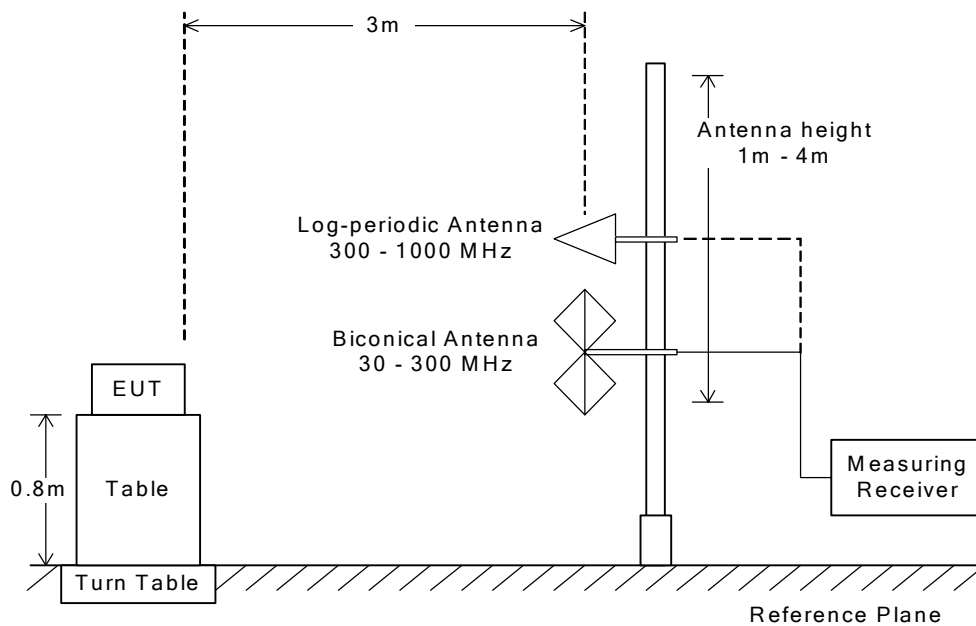


Radiated Emission above 1 GHz

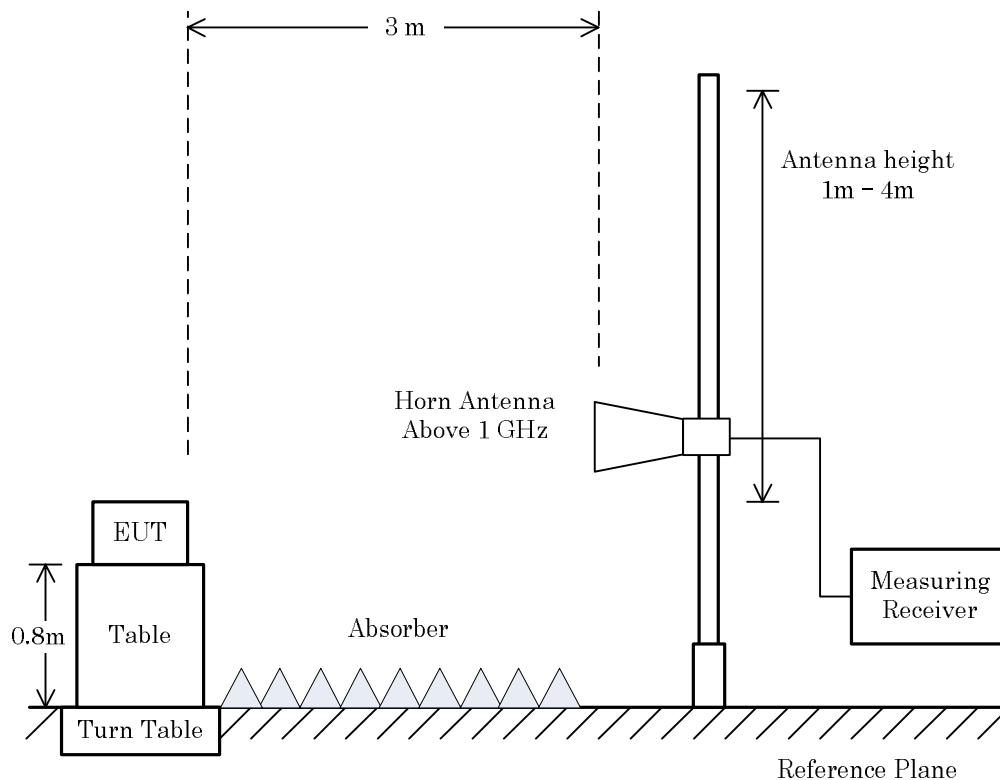

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

Radiated Emission 30 to 1000 MHz – Substitution Method

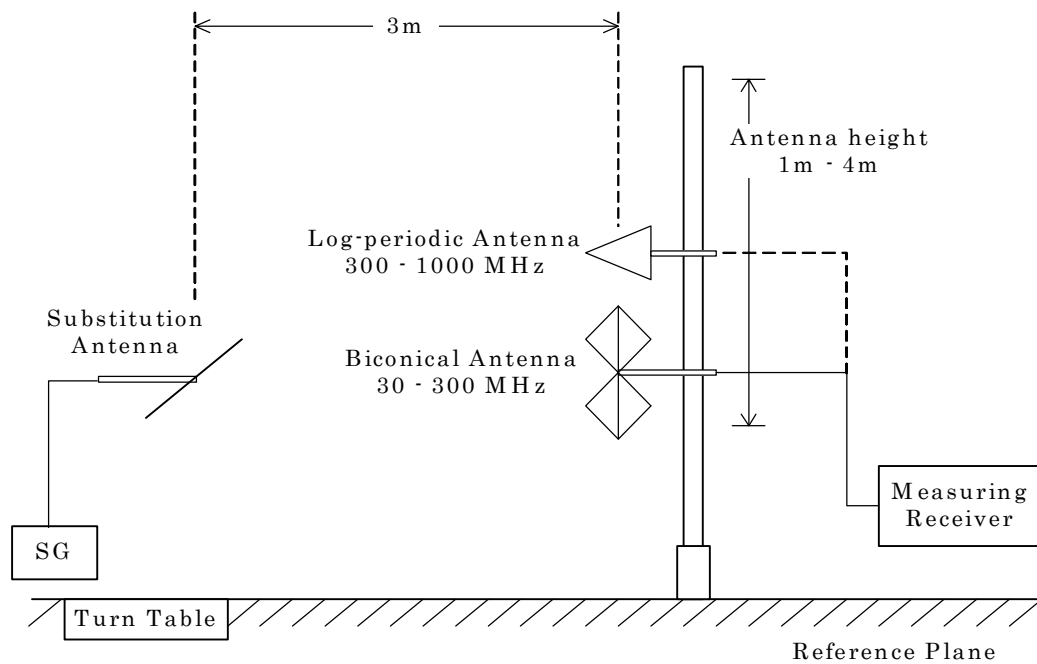

7.7.4 Test Data

1. Part 22

1-1) BW 1.4MHz(1RB)

(LTE 1.4MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26797	824.700	1649.400	-53.4	-53.4	-13.0	+40.4	C
		2474.100	-55.2	< -56.2	-13.0	+42.2	C
		3298.800	< -55.1	< -55.1	-13.0	> +42.1	C
		4123.500	-44.8	-43.7	-13.0	+30.7	C
		4948.200	< -47.9	< -47.9	-13.0	> +34.9	C
		5772.900	< -47.5	< -47.5	-13.0	> +34.5	C
		6597.600	< -45.7	< -45.7	-13.0	> +32.7	C
		7422.300	< -45.9	< -45.9	-13.0	> +32.9	C
		8247.000	< -42.7	< -42.7	-13.0	> +29.7	C
26915	836.500	1673.000	-52.6	-53.7	-13.0	+39.6	C
		2509.500	-54.5	< -56.1	-13.0	+41.5	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-45.4	-44.4	-13.0	+31.4	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
27033	848.300	1696.600	-53.4	-54.3	-13.0	+40.4	C
		2544.900	-53.2	< -56.2	-13.0	+40.2	C
		3393.200	< -54.7	< -54.7	-13.0	> +41.7	C
		4241.500	-45.5	-44.5	-13.0	+31.5	C
		5089.800	< -47.8	< -47.8	-13.0	> +34.8	C
		5938.100	< -45.3	< -45.3	-13.0	> +32.3	C
		6786.400	< -45.8	< -45.8	-13.0	> +32.8	C
		7634.700	< -45.9	< -45.9	-13.0	> +32.9	C
		8483.000	< -42.7	< -42.7	-13.0	> +29.7	C

Calculated result at 8247.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.7) = >29.7$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

1-2) BW 3MHz(1RB)

(LTE 3MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26805	825.500	1651.000	-51.9	-52.8	-13.0	+38.9	C
		2476.500	-54.7	< -56.2	-13.0	+41.7	C
		3302.000	< -55.2	< -55.2	-13.0	> +42.2	C
		4127.500	-44.3	-43.4	-13.0	+30.4	C
		4953.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5778.500	< -47.5	< -47.5	-13.0	> +34.5	C
		6604.000	< -45.7	< -45.7	-13.0	> +32.7	C
		7429.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8255.000	< -42.6	< -42.6	-13.0	> +29.6	C
26915	836.500	1673.000	-52.2	-54.1	-13.0	+39.2	C
		2509.500	-53.6	< -56.1	-13.0	+40.6	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-45.6	-44.5	-13.0	+31.5	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
27025	847.500	1695.000	-51.9	-53.7	-13.0	+38.9	C
		2542.500	-54.3	-54.9	-13.0	+41.3	C
		3390.000	< -54.8	< -54.8	-13.0	> +41.8	C
		4237.500	-46.1	-45.0	-13.0	+32.0	C
		5085.000	< -47.8	< -47.8	-13.0	> +34.8	C
		5932.500	< -45.3	< -45.3	-13.0	> +32.3	C
		6780.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7627.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8475.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8255.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

1-3) BW 5MHz(1RB)

(LTE 5MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26815	826.500	1653.000	-51.3	-52.5	-13.0	+38.3	C
		2479.500	-55.0	-55.4	-13.0	+42.0	C
		3306.000	< -55.2	< -55.2	-13.0	> +42.2	C
		4132.500	-43.0	-44.3	-13.0	+30.0	C
		4959.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5785.500	< -47.6	< -47.6	-13.0	> +34.6	C
		6612.000	< -45.7	< -45.7	-13.0	> +32.7	C
		7438.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8265.000	< -42.6	< -42.6	-13.0	> +29.6	C
26915	836.500	1673.000	-52.0	-53.9	-13.0	+39.0	C
		2509.500	-53.2	< -56.1	-13.0	+40.2	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-43.8	-44.8	-13.0	+30.8	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
27015	846.500	1693.000	-51.1	-52.2	-13.0	+38.1	C
		2539.500	-53.8	-54.9	-13.0	+40.8	C
		3386.000	< -54.8	< -54.8	-13.0	> +41.8	C
		4232.500	-42.7	-43.8	-13.0	+29.7	C
		5079.000	< -47.8	< -47.8	-13.0	> +34.8	C
		5925.500	< -45.4	< -45.4	-13.0	> +32.4	C
		6772.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7618.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8465.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8265.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

1-4) BW 10MHz(1RB)

(LTE 10MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26840	829.000	1658.000	-52.3	-52.7	-13.0	+39.3	C
		2487.000	-54.2	-54.9	-13.0	+41.2	C
		3316.000	< -55.2	< -55.2	-13.0	> +42.2	C
		4145.000	-45.6	-45.7	-13.0	+32.6	C
		4974.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5803.000	< -47.6	< -47.6	-13.0	> +34.6	C
		6632.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7461.000	< -45.9	< -45.9	-13.0	> +32.9	C
		8290.000	< -42.6	< -42.6	-13.0	> +29.6	C
26915	836.500	1673.000	-52.6	-53.6	-13.0	+39.6	C
		2509.500	-54.4	< -56.1	-13.0	+41.4	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-43.8	-44.0	-13.0	+30.8	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
26990	844.000	1688.000	-51.4	-53.2	-13.0	+38.4	C
		2532.000	-55.3	< -56.1	-13.0	+42.3	C
		3376.000	< -54.9	< -54.9	-13.0	> +41.9	C
		4220.000	-45.8	-45.6	-13.0	+32.6	C
		5064.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5908.000	< -45.4	< -45.4	-13.0	> +32.4	C
		6752.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7596.000	< -46.0	< -46.0	-13.0	> +33.0	C
		8440.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8290.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

1-5) BW 15MHz(1RB)

(LTE 15MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26865	831.500	1663.000	-51.3	-52.9	-13.0	+38.3	C
		2494.500	-52.9	-54.5	-13.0	+39.9	C
		3326.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4157.500	-45.8	-45.3	-13.0	+32.3	C
		4989.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5820.500	< -47.6	< -47.6	-13.0	> +34.6	C
		6652.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7483.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8315.000	< -42.6	< -42.6	-13.0	> +29.6	C
26915	836.500	1673.000	-53.0	-53.8	-13.0	+40.0	C
		2509.500	-55.9	< -56.1	-13.0	+42.9	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-45.2	-44.3	-13.0	+31.3	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
26965	841.500	1683.000	-50.2	-52.4	-13.0	+37.2	C
		2524.500	-53.1	-52.6	-13.0	+39.6	C
		3366.000	< -54.9	< -54.9	-13.0	> +41.9	C
		4207.500	-42.9	-42.7	-13.0	+29.7	C
		5049.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5890.500	< -45.4	< -45.4	-13.0	> +32.4	C
		6732.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7573.500	< -46.0	< -46.0	-13.0	> +33.0	C
		8415.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8315.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

2. Part 90

2-1) BW 1.4MHz(1RB)

(LTE 1.4MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26697	814.700	1629.400	-52.7	-54.0	-13.0	+39.7	C
		2444.100	< -56.1	-56.0	-13.0	+43.0	C
		3258.800	< -55.1	< -55.1	-13.0	> +42.1	C
		4073.500	-46.0	-45.4	-13.0	+32.4	C
		4888.200	< -47.9	< -47.9	-13.0	> +34.9	C
		5702.900	< -47.7	< -47.7	-13.0	> +34.7	C
		6517.600	< -45.8	< -45.8	-13.0	> +32.8	C
		7332.300	< -45.9	< -45.9	-13.0	> +32.9	C
		8147.000	< -46.0	< -46.0	-13.0	> +33.0	C
26740	819.000	1638.000	-53.2	-54.0	-13.0	+40.2	C
		2457.000	< -56.1	< -56.1	-13.0	> +43.1	C
		3276.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4095.000	-43.7	-43.2	-13.0	+30.2	C
		4914.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5733.000	< -47.6	< -47.6	-13.0	> +34.6	C
		6552.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7371.000	< -45.9	< -45.9	-13.0	> +32.9	C
		8190.000	< -46.0	< -46.0	-13.0	> +33.0	C
26783	823.300	1646.600	-53.7	-53.7	-13.0	+40.7	C
		2469.900	< -56.1	-55.6	-13.0	+42.6	C
		3293.200	< -55.1	< -55.1	-13.0	> +42.1	C
		4116.500	-44.1	-43.7	-13.0	+30.7	C
		4939.800	< -47.9	< -47.9	-13.0	> +34.9	C
		5763.100	< -47.5	< -47.5	-13.0	> +34.5	C
		6586.400	< -45.7	< -45.7	-13.0	> +32.7	C
		7409.700	< -45.9	< -45.9	-13.0	> +32.9	C
		8233.000	< -42.7	< -42.7	-13.0	> +29.7	C

Calculated result at 8233.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.7) = >29.7$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

2-2) BW 3MHz(1RB)

(LTE 3MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26705	815.500	1631.000	-52.9	-53.4	-13.0	+39.9	C
		2446.500	< -56.1	< -56.1	-13.0	> +43.1	C
		3262.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4077.500	-45.8	-45.2	-13.0	+32.2	C
		4893.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5708.500	< -47.6	< -47.6	-13.0	> +34.6	C
		6524.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7339.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8155.000	< -46.0	< -46.0	-13.0	> +33.0	C
26740	819.000	1638.000	-53.4	-54.1	-13.0	+40.4	C
		2457.000	-55.8	< -56.1	-13.0	+42.8	C
		3276.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4095.000	-43.8	-43.6	-13.0	+30.6	C
		4914.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5733.000	< -47.6	< -47.6	-13.0	> +34.6	C
		6552.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7371.000	< -45.9	< -45.9	-13.0	> +32.9	C
		8190.000	< -46.0	< -46.0	-13.0	> +33.0	C
26775	822.500	1645.000	-53.4	-53.5	-13.0	+40.4	C
		2467.500	-54.4	-54.5	-13.0	+41.4	C
		3290.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4112.500	-44.9	-44.6	-13.0	+31.6	C
		4935.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5757.500	< -47.5	< -47.5	-13.0	> +34.5	C
		6580.000	< -45.7	< -45.7	-13.0	> +32.7	C
		7402.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8225.000	< -42.8	< -42.8	-13.0	> +29.8	C

Calculated result at 8225.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.8) = >29.8$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

2-3) BW 5MHz(1RB)

(LTE 5MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26715	816.500	1633.000	-53.1	-53.5	-13.0	+40.1	C
		2449.500	< -56.1	< -56.1	-13.0	> +43.1	C
		3266.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4082.500	-45.1	-45.2	-13.0	+32.1	C
		4899.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5715.500	< -47.6	< -47.6	-13.0	> +34.6	C
		6532.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7348.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8165.000	< -45.9	< -45.9	-13.0	> +32.9	C
26740	819.000	1638.000	-53.3	-54.0	-13.0	+40.3	C
		2457.000	< -56.1	< -56.1	-13.0	> +43.1	C
		3276.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4095.000	-43.7	-43.3	-13.0	+30.3	C
		4914.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5733.000	< -47.6	< -47.6	-13.0	> +34.6	C
		6552.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7371.000	< -45.9	< -45.9	-13.0	> +32.9	C
		8190.000	< -46.0	< -46.0	-13.0	> +33.0	C
26765	821.500	1643.000	-53.6	-53.7	-13.0	+40.6	C
		2464.500	-54.6	-56.0	-13.0	+41.6	C
		3286.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4107.500	-44.9	-44.7	-13.0	+31.7	C
		4929.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5750.500	< -47.5	< -47.5	-13.0	> +34.5	C
		6572.000	< -45.7	< -45.7	-13.0	> +32.7	C
		7393.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8215.000	< -42.7	< -42.7	-13.0	> +29.7	C

Calculated result at 8215.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.7) = >29.7$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

2-4) BW 10MHz(1RB)

(LTE 10MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
26740	819.000	1638.000	-53.0	-53.2	-13.0	+40.0	C
		2457.000	< -56.1	< -56.1	-13.0	> +43.1	C
		3276.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4095.000	-43.9	-43.4	-13.0	+30.4	C
		4914.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5733.000	< -47.6	< -47.6	-13.0	> +34.6	C
		6552.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7371.000	< -45.9	< -45.9	-13.0	> +32.9	C
		8190.000	< -46.0	< -46.0	-13.0	> +33.0	C

Calculated result at 4095.0 MHz, as the worst point shown on underline:
Minimum Margin: -13.0 - (-43.4) = 30.4 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 30 MHz to 10 GHz.
- All emissions not reported were more than 20 dB below the applied limits.
- Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

7.8 Frequency Stability (§2.1055)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.8.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Part 22

The Frequency Stability level is +/-0.01 ppm at 836.500 MHz

Uncertainty of Measurement Results ± 0.03 ppm(2σ)

Remarks : _____

Part 90

The Frequency Stability level is -0.01 ppm at 819.000 MHz

Uncertainty of Measurement Results ± 0.03 ppm(2σ)

Remarks : _____

7.8.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Base Station Simulator	MT8815B	6200711439 (B-69)	Anritsu	2016/08/13
Environmental Chamber	SH-641	92010990 (F-32)	ESPEC	2016/07/06
DC Voltage Meter	2011	02247S (B-33)	YOKOGAWA	2016/04/07
DC Power Supply	NL035-10	35883293 (F-4)	TAKASAGO	N/A

NOTE : The calibration interval of the above test instruments is 12 months.


7.8.3 Test Method and Test Setup (Diagrammatic illustration)

Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from –30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from –30 to +50 degrees Celsius at the interval of 10 degrees.

Frequency Stability versus Power Supply Voltage

The EUT was placed in an environmental chamber and was tested at the temperature of +20 degrees Celsius. The EUT was stabilized at the temperature. The power (4.0VDC) and the power (3.7VDC, the ending voltage) was applied to the EUT allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup.

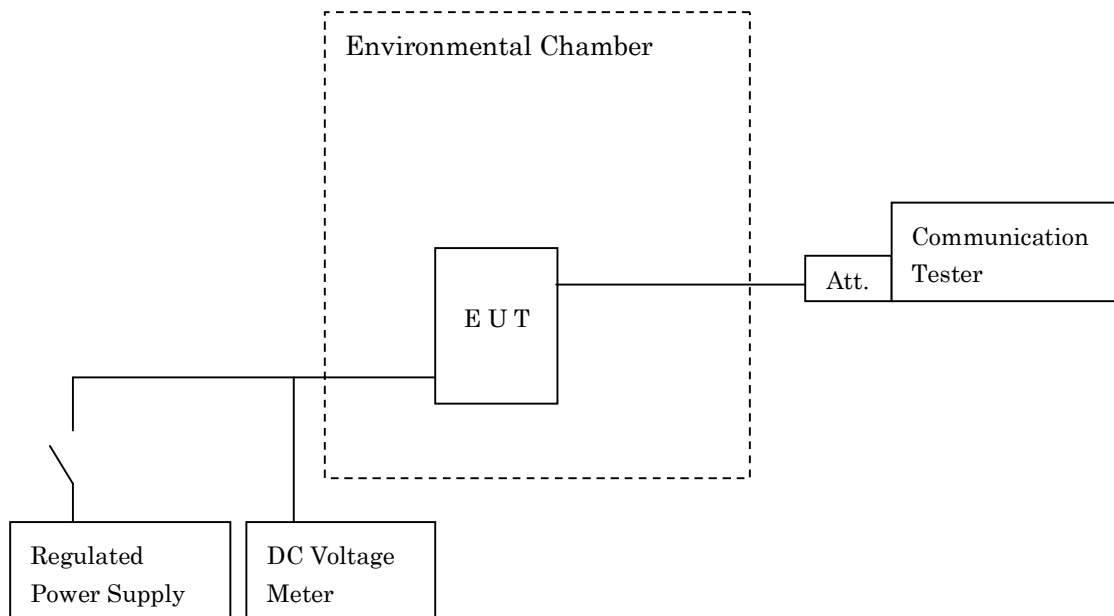

7.8.4 Test Data

Part22

(LTE)

Test Date: November 4, 2015

- November 5, 2015

1. Frequency Stability Measurement versus Temperature

Transmitting Frequency : 836.500 MHz (26915 ch)

DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
-30	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
-20	+ 0.00	<u>+ 0.01</u>	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49
-10	<u>+ 0.01</u>	<u>+ 0.01</u>	+ 0.00	+ 0.00	2.50	2.49
0	<u>+ 0.01</u>	<u>+ 0.01</u>	+ 0.00	<u>+ 0.01</u>	2.50	2.49
10	+ 0.00	<u>- 0.01</u>	+ 0.00	+ 0.00	2.50	2.49
20	+ 0.00	<u>+ 0.01</u>	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49
30	<u>- 0.01</u>	<u>- 0.01</u>	+ 0.00	+ 0.00	2.50	2.49
40	+ 0.00	+ 0.00	+ 0.00	<u>- 0.01</u>	2.50	2.49
50	<u>- 0.01</u>	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49

2. Frequency Stability Measurement versus Power Supply Voltage

Transmitting Frequency : 836.500 MHz (26915 ch)

Ambient Temperature: : 20 °C

DC Supply Voltage [V]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
4.0	+ 0.00	<u>+ 0.01</u>	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49
3.7(Ending)	<u>+ 0.01</u>	<u>+ 0.01</u>	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -30 °C / 2 minutes

DC Supply Voltage : 4 VDC

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.

Part90

(LTE)

Test Date: November 4, 2015

- November 5, 2015

1. Frequency Stability Measurement versus Temperature

Transmitting Frequency : 819.000 MHz (26740 ch)
DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
-30	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
-20	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
-10	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
0	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
10	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	+ 0.00	2.50	2.49
20	+ 0.00	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
30	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
40	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
50	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49

2. Frequency Stability Measurement versus Power Supply Voltage

Transmitting Frequency : 819.000 MHz (26740 ch)
Ambient Temperature: : 20 °C

DC Supply Voltage [V]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
4.0	+ 0.00	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
3.7 (Ending)	<u>- 0.01</u>	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -30 °C / Startup

DC Supply Voltage : 4 VDC

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.