



REPORT No. : SZ18080098S02

# TEST REPORT

**APPLICANT** : Audio-Technica Corporation  
**PRODUCT NAME** : WIRELESS HEADPHONES  
**MODEL NAME** : ATH-SPORT7TW  
**BRAND NAME** : audio-technica  
**FCC ID** : JFZSPORT7TW  
**STANDARD(S)** : FCC 47 CFR 2.1093  
IEEE 1528-2013  
**TEST DATE** : 2018-09-29 to 2018-09-29  
**ISSUE DATE** : 2018-10-08

Tested by:

*Gan Yueming*  
Gan Yueming(Test engineer)

Approved by:

*Peng Huarui*  
Peng Huarui (Supervisor)



# DIRECTORY

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>1 SAR RESULTS SUMMARY.....</b>                                      | <b>4</b>  |
| <b>2 TECHNICAL INFORMATION.....</b>                                    | <b>5</b>  |
| 2.1 APPLICANT AND MANUFACTURER INFORMATION.....                        | 5         |
| 2.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION.....                        | 5         |
| 2.3 ENVIRONMENT OF TEST SITE.....                                      | 6         |
| <b>3 INTRODUCTION.....</b>                                             | <b>7</b>  |
| 3.1 INTRODUCTION.....                                                  | 7         |
| 3.2 SAR DEFINITION.....                                                | 7         |
| <b>4 RF EXPOSURE LIMITS.....</b>                                       | <b>8</b>  |
| <b>5 APPLIED REFERENCE DOCUMENTS.....</b>                              | <b>8</b>  |
| <b>6 SAR MEASUREMENT SYSTEM.....</b>                                   | <b>9</b>  |
| 6.1 E-FIELD PROBE.....                                                 | 10        |
| 6.2 DATA ACQUISITION ELECTRONICS (DAE).....                            | 11        |
| 6.3 ROBOT.....                                                         | 12        |
| 6.4 MEASUREMENT SERVER.....                                            | 12        |
| 6.5 LIGHT BEAM UNIT.....                                               | 12        |
| 6.6 PHANTOM.....                                                       | 13        |
| 6.7 DEVICE HOLDER.....                                                 | 13        |
| 6.8 DATA STORAGE AND EVALUATION.....                                   | 14        |
| 6.9 TEST EQUIPMENT LIST.....                                           | 16        |
| 6.10 TISSUE SIMULATING LIQUIDS.....                                    | 17        |
| <b>7 SAR SYSTEM VERIFICATION.....</b>                                  | <b>19</b> |
| <b>8 EUT TESTING POSITION.....</b>                                     | <b>21</b> |
| 8.1 SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM..... | 21        |
| 8.2 BODY WORN ACCESSORY CONFIGURATIONS.....                            | 21        |
| <b>9 MEASUREMENT PROCEDURES.....</b>                                   | <b>22</b> |
| 9.1 SPATIAL PEAK SAR EVALUATION.....                                   | 22        |
| 9.2 POWER REFERENCE MEASUREMENT.....                                   | 23        |
| 9.3 AREA SCAN PROCEDURES.....                                          | 23        |
| 9.4 ZOOM SCAN PROCEDURES.....                                          | 23        |
| 9.5 SAR AVERAGED METHODS.....                                          | 23        |
| 9.6 POWER DRIFT MONITORING.....                                        | 23        |
| <b>10 CONDUCTED RF OUTPUT POWER.....</b>                               | <b>24</b> |
| 10.1 BLUETOOTH CONDUCTED POWER.....                                    | 24        |
| <b>11 ANTENNA EVALUATION.....</b>                                      | <b>25</b> |
| 11.1 EUT ANTENNA LOCATION.....                                         | 25        |
| <b>12 BLOCK DIAGRAM OF THE TESTS TO BE PERFORMED.....</b>              | <b>26</b> |
| 12.1 BODY.....                                                         | 26        |
| <b>13 TEST RESULTS LIST.....</b>                                       | <b>27</b> |
| <b>14 SAR TEST RESULTS SUMMARY.....</b>                                | <b>28</b> |
| 14.1 HOTSPOT SAR DATA.....                                             | 28        |
| <b>15 SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....</b>                  | <b>29</b> |
| <b>16 MEASUREMENT UNCERTAINTY.....</b>                                 | <b>30</b> |
| <b>17 MEASUREMENT CONCLUSION.....</b>                                  | <b>32</b> |
| <b>Annex A General Information</b>                                     |           |
| <b>Annex B Test Setup Photos</b>                                       |           |



REPORT No. : SZ18080098S02

**Annex C Plots of System Performance Check**

**Annex D Plots of Maximum SAR Test Results**

**Annex E SATIMO Calibration Certificate**

| Version No. | Date       | Description |
|-------------|------------|-------------|
| 1.0         | 2018-10-08 | Original    |
|             |            |             |
|             |            |             |
|             |            |             |
|             |            |             |



## 1 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

| Frequency Band |           | Highest SAR Summary (1g SAR (W/kg)) |               |
|----------------|-----------|-------------------------------------|---------------|
|                |           | Body-Right Ear                      | Body-Left Ear |
|                |           | (Separation 0mm)                    |               |
| 2.4GHz Band    | Bluetooth | 0.014                               | 0.013         |

|                                      |       |            |                       |
|--------------------------------------|-------|------------|-----------------------|
| Max Scaled SAR <sub>1g</sub> (W/Kg): | Body: | 0.014 W/kg | Limit(W/kg): 1.6 W/kg |
|--------------------------------------|-------|------------|-----------------------|

**Note:**

1. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.



## 2 Technical Information

**Note:** Provide by manufacturer.

### 2.1 Applicant and Manufacturer Information

|                              |                                                         |
|------------------------------|---------------------------------------------------------|
| <b>Applicant:</b>            | Audio-Technica Corporation                              |
| <b>Applicant Address:</b>    | 2-46-1 Nishi-Naruse, Machida, Tokyo, Japan 194-8666     |
| <b>Manufacturer:</b>         | Audio-Technica Fukui Inc.                               |
| <b>Manufacturer Address:</b> | 87-1 Totani-cho, Echizen-shi, Fukui-ken, Japan 915-0003 |

### 2.2 Equipment Under Test (EUT) Description

|                          |                                                      |
|--------------------------|------------------------------------------------------|
| <b>EUT Type:</b>         | WIRELESS HEADPHONES                                  |
| <b>Hardware Version:</b> | V001                                                 |
| <b>Software Version:</b> | V1.0                                                 |
| <b>Frequency Bands:</b>  | Bluetooth: 2402 MHz ~ 2480 MHz                       |
| <b>Modulation Mode:</b>  | Bluetooth: GFSK, $\pi/4$ -DQPSK, 8-DPSK<br>BLE: GFSK |
| <b>Antenna Type:</b>     | FPC Antenna                                          |

**Note:** For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



REPORT No. : SZ18080098S02

## 2.3 Environment of Test Site

|                       |                  |
|-----------------------|------------------|
| Temperature:          | 20 ... 25 ° C    |
| Humidity:             | 30 ... 75 %      |
| Atmospheric Pressure: | 980 ... 1020 hPa |

### 3 Introduction

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 4 RF Exposure Limits

Limits for General Population/Uncontrolled Exposure (W/kg)

| Type Exposure                                        | Uncontrolled Environment Limit |
|------------------------------------------------------|--------------------------------|
| Spatial Peak SAR (1g cube tissue for head and trunk) | 1.60W/kg                       |
| Spatial Peak SAR (1g cube tissue for limbs)          | 4.00W/kg                       |
| Spatial Peak SAR (1g cube tissue for whole body)     | 0.08 W/kg                      |

**Note:**


1. This limit is according to recommendation 1999/519/EC, Annex II (Basic Restrictions)
2. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation)

## 5 Applied Reference Documents

Leading reference documents for testing:

| No. | Identity             | Document Title                                                                                                                                                                   |
|-----|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 47 CFR § 2.1093      | Radio Frequency Radiation Exposure Evaluation: Portable Devices                                                                                                                  |
| 2   | IEEE 1528-2013       | IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| 3   | KDB 447498 D01v06    | General RF Exposure Guidance                                                                                                                                                     |
| 4   | KDB 865664 D01v01r04 | SAR Measurement 100 MHz to 6 GHz                                                                                                                                                 |
| 5   | KDB 865664 D02v01r02 | SAR Reporting                                                                                                                                                                    |

## 6 SAR Measurement System

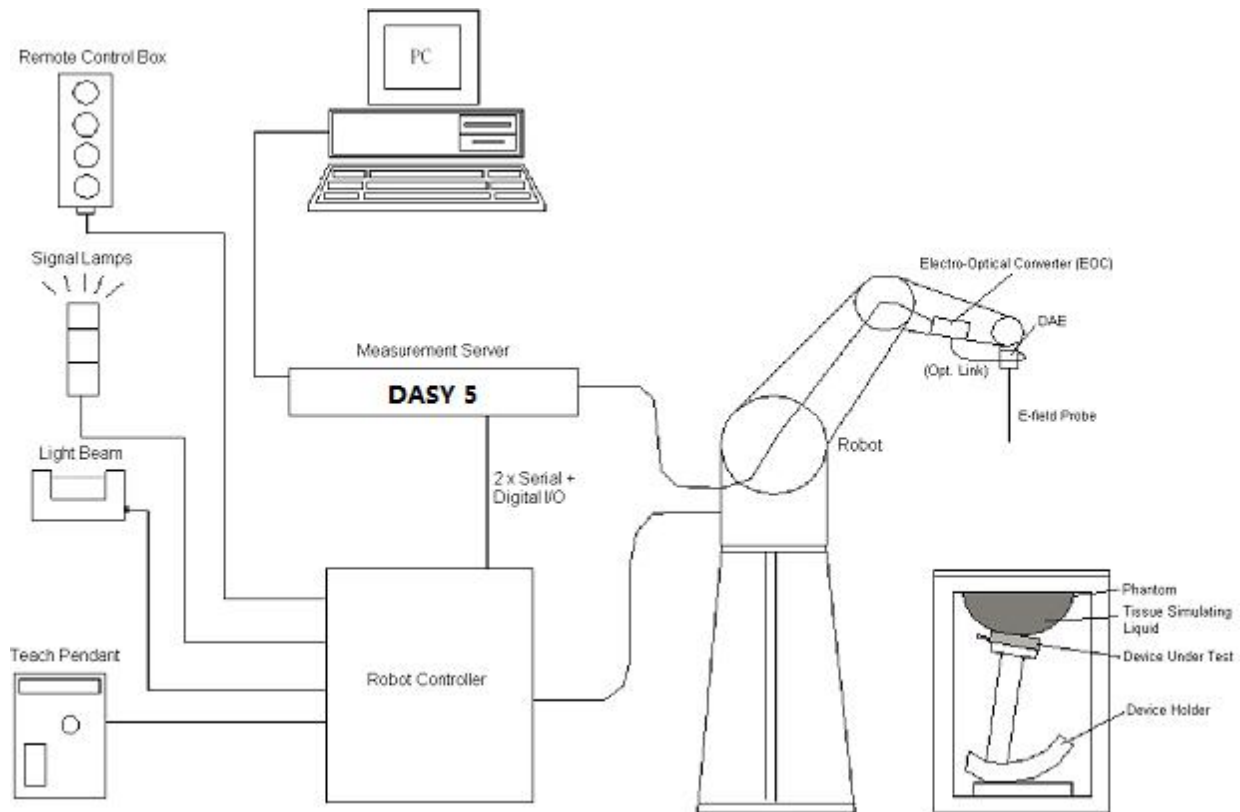

**Fig.6.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in the following sub-sections.

## 6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### ➤ E-Field Probe Specification <EX3DV3 Probe>

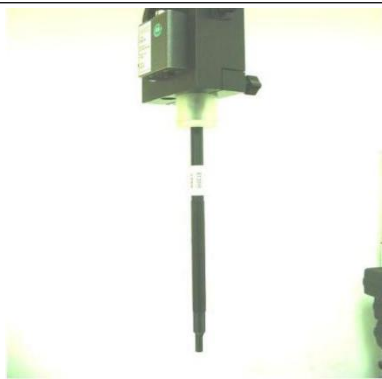
|                      |                                                                                                                                                                                                                   |                                                                                    |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in optical fiber for surface detection system.<br>Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB                                                                                                                                                                          |                                                                                    |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.4$ dB in HSL (rotation normal to probe axis)                                                                                                           |                                                                                    |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                                  |                                                                                    |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 6.8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.7 mm                                                                                    |                                                                                    |

Fig 6.2 Photo of ES3DV3

### <EX3DV4 Probe>

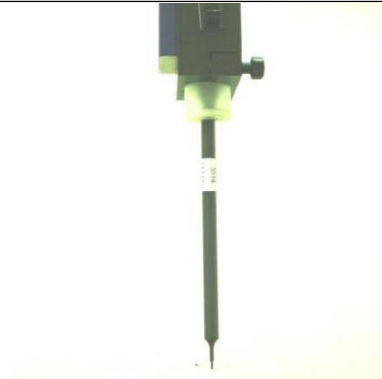
|                      |                                                                                                                                                             |                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB                                                                                                                    |                                                                                      |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                         |                                                                                      |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                           |                                                                                      |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |                                                                                      |

Fig 6.3 Photo of EX3DV4

### ➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (Norm X, Norm Y and Norm Z), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix E of this report.

## 6.2 Data Acquisition Electronics (DAE)

The Data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

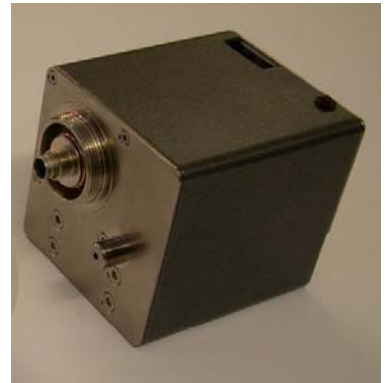


Fig. 6.4 Photo of DAE

### 6.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; nobelt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



**Fig. 6.5 Photo of Robot**

### 6.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY 5: 400MHz, Intel Celeron), chip-disk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig. 6.6 Photo of Server for DASY5**

### 6.5 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



**Fig. 6.7 Photo of Light Beam**

## 6.6 Phantom

### <SAM Twin Phantom>

|                              |                                                                                 |
|------------------------------|---------------------------------------------------------------------------------|
| Shell Thickness              | 2 ± 0.2 mm (sagging: <1%)<br>Center ear point: 6 ± 0.2 mm                       |
| Filling Volume<br>Dimensions | Approx. 25 liters<br>Length: 1000 mm; Width: 500 mm;<br>Height: adjustable feet |
| Measurement<br>Areas         | Left Head, Right Head, Flat phantom                                             |



**Fig. 6.8**Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

## 6.7 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ±0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP).

Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-low POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.




**Fig. 6.9**Photo of Device Holder

### <Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

**Fig 6.10 Laptop Extension Kit**

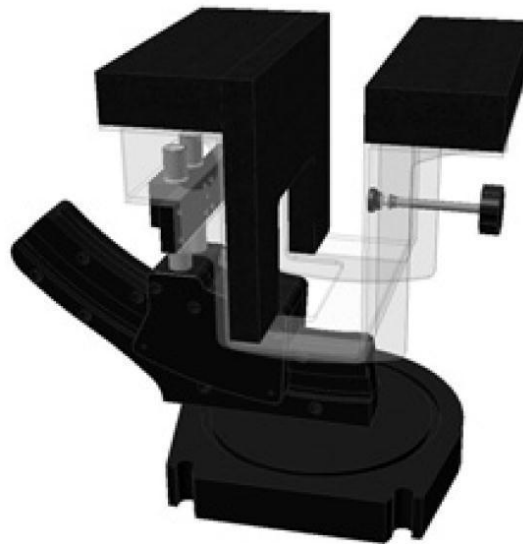

## 6.8 Data storage and Evaluation

### ➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verifications of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### ➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                           |                           |                                         |
|---------------------------|---------------------------|-----------------------------------------|
| <b>Probe Parameters:</b>  | - Sensitivity             | $\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$ |
|                           | - Conversion              | $\text{ConvF}_i$                        |
|                           | - Diode compression point | $\text{dcp}_i$                          |
| <b>Device Parameters:</b> | - Frequency               | $f$                                     |
|                           | - Crest                   | $cf$                                    |
| <b>Media Parameters:</b>  | - Conductivity            | $\sigma$                                |

- Density

$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With  $V_i$  = compensated signal of channel  $i$ , ( $i = x, y, z$ )

$U_i$  = input signal of channel  $i$ , ( $i = x, y, z$ )

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-Field Probes: } E_i = \sqrt{\frac{v_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-Field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With  $V_i$  = compensated signal of channel  $i$ , ( $i = x, y, z$ )

$\text{Norm}_i$  = sensor sensitivity of channel  $i$ , ( $i = x, y, z$ ),  $\mu\text{V}/(\text{V/m})^2$

$\text{ConvF}$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency (GHz)

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

With SAR = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m

$\sigma$  = conductivity in (mho/m) or (Siemens/m)

$\rho$  = equipment tissue density in  $\text{g/cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



## 6.9 Test Equipment List


| Manufacturer  | Name of Equipment             | Type/Model    | Serial Number | Calibration |            |
|---------------|-------------------------------|---------------|---------------|-------------|------------|
|               |                               |               |               | Last Cal.   | Due Date   |
| SPEAG         | 2450MHz System Validation Kit | D2450V2       | 805           | 2017.10.12  | 2018.10.11 |
| SPEAG         | Dosimetric E-Field Probe      | ES3DV3        | 3154          | 2017.10.30  | 2018.10.29 |
| SPEAG         | Data Acquisition Electronics  | DAE4          | 1516          | 2018.07.14  | 2019.07.13 |
| SPEAG         | SAM Twin Phantom 2            | QD 000 P40 CB | TP-1464       | NCR         | NCR        |
| SPEAG         | Phone Positioner              | N/A           | N/A           | NCR         | NCR        |
| Agilent       | Network Analyzer              | E5071B        | MY42404762    | 2018.04.17  | 2019.04.16 |
| mini-circuits | Amplifier                     | ZHL-42W+      | 608501717     | NCR         | NCR        |
| Agilent       | Signal Generator              | SMP_02        | N/A           | 2018.04.17  | 2019.04.16 |
| Agilent       | Signal Generator              | N5182B        | MY53050509    | 2018.04.17  | 2019.04.16 |
| Agilent       | Power Sensor                  | N8482A        | MY41091706    | 2018.04.17  | 2019.04.16 |
| Agilent       | Power Meter                   | E4416A        | MY45102093    | 2018.04.17  | 2019.04.16 |
| Anritsu       | Power Sensor                  | MA2411B       | N/A           | 2018.04.17  | 2019.04.16 |
| R&S           | Power Meter                   | NRVD          | 101066        | 2018.04.17  | 2019.04.16 |
| MCL           | Attenuation1                  | 351-218-010   | N/A           | NA          | NA         |
| THERMOMETER   | Thermo meter                  | DC-803        | N/A           | 2017.12.08  | 2018.12.07 |
| N/A           | Tissue Simulating Liquids     | Head 2450MHz  | N/A           | 24H         |            |

### Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
6. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
7. N.C.R means No Calibration Requirement.

## 6.10 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.11, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 6.12.

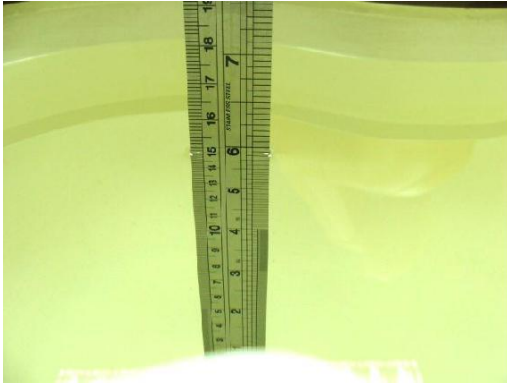

**Fig 6.11 Photo of Liquid Height for Head SAR**



**Fig 6.12 Photo of Liquid Height for Body SAR**

The following table gives the recipes for tissue simulating liquids

| Frequency (MHz)  | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|---------------------------|-------------------------------|
| Head             |           |           |               |          |               |          |                           |                               |
| 750              | 41.1      | 57.0      | 0.2           | 1.4      | 0.2           | 0        | 0.89                      | 41.9                          |
| 835              | 40.3      | 57.9      | 0.2           | 1.4      | 0.2           | 0        | 0.90                      | 41.5                          |
| 1800, 1900, 2000 | 55.2      | 0         | 0             | 0.3      | 0             | 44.5     | 1.40                      | 40.0                          |
| 2450             | 55.0      | 0         | 0             | 0        | 0             | 45.0     | 1.80                      | 39.2                          |
| 2600             | 54.8      | 0         | 0             | 0.1      | 0             | 45.1     | 1.96                      | 39.0                          |

Simulating Liquid for 5GHz, Manufactured by SPEAG

| Ingredients        | (% by weight) |
|--------------------|---------------|
| Water              | 64~78%        |
| Mineral oil        | 11~18%        |
| Emulsifiers        | 9~15%         |
| Additives and Salt | 2~3%          |



REPORT No. : SZ18080098S02

The dielectric parameters of liquids were verified prior to the SAR evaluation using a Speag Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity ( $\sigma$ ) | Conductivity Target ( $\sigma$ ) | Delta ( $\sigma$ ) (%) | Limit (%) | Date       |
|-----------------|-------------|-------------------|---------------------------|----------------------------------|------------------------|-----------|------------|
| 2450            | HSL         | 22.9              | 1.85                      | 1.80                             | 2.78                   | ±5        | 2018.09.29 |

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Permittivity ( $\epsilon_r$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date       |
|-----------------|-------------|-------------------|-------------------------------|--------------------------------------|----------------------------|-----------|------------|
| 2450            | HSL         | 22.9              | 40.04                         | 39.20                                | 2.14                       | ±5        | 2018.09.29 |

## 7 SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### ➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### ➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

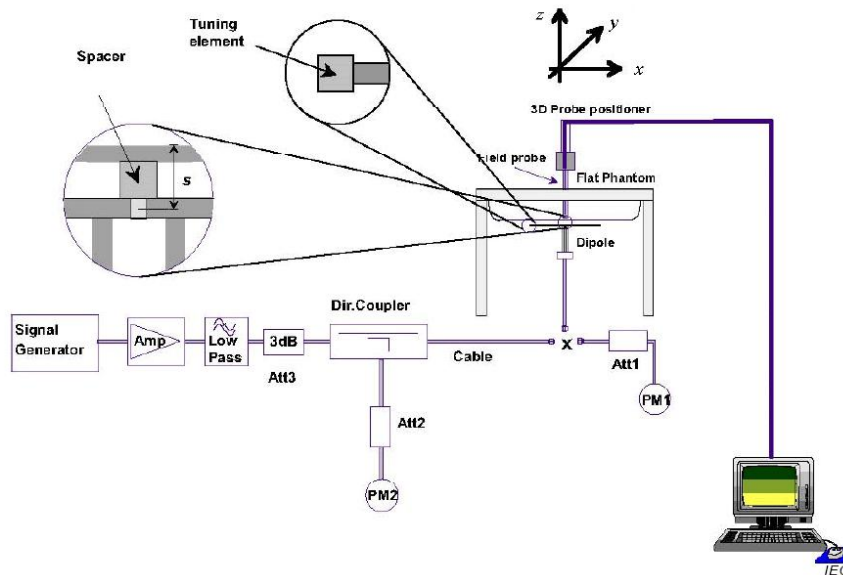


Fig.7.1 System Verification Setup Diagram

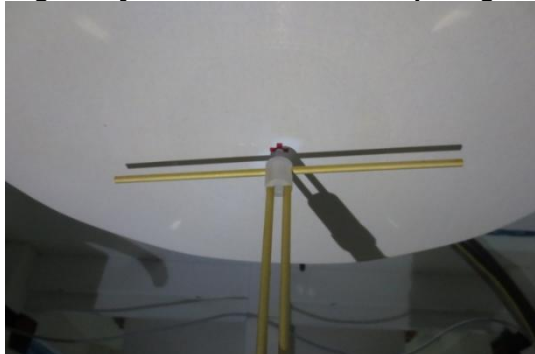


Fig.7.2 Photo of Dipole setup



➤ **System Verification Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

**<1g SAR>**

| Date       | Freq.<br>(MHz) | Tissue<br>Type | Input<br>Power<br>(mW) | Dipole<br>S/N | Probe<br>S/N | DAE<br>S/N | Measured<br>1g SAR<br>(W/kg) | Targeted<br>1g SAR<br>(W/kg) | Normalized<br>1g SAR<br>(W/kg) | Deviation<br>(%) |
|------------|----------------|----------------|------------------------|---------------|--------------|------------|------------------------------|------------------------------|--------------------------------|------------------|
| 2018.09.29 | 2450           | HSL            | 250                    | D2450V2-805   | SN3154       | 480        | 13.16                        | 52.80                        | 52.64                          | 0.30             |

**<10g SAR>**

| Date       | Freq.<br>(MHz) | Tissue<br>Type | Input<br>Power<br>(mW) | Dipole<br>S/N | Probe<br>S/N | DAE<br>S/N | Measured<br>10g SAR<br>(W/kg) | Targeted<br>10g SAR<br>(W/kg) | Normalized<br>10g SAR<br>(W/kg) | Deviation<br>(%) |
|------------|----------------|----------------|------------------------|---------------|--------------|------------|-------------------------------|-------------------------------|---------------------------------|------------------|
| 2018.09.29 | 2450           | HSL            | 250                    | D2450V2-805   | SN3154       | 480        | 6.19                          | 24.50                         | 24.76                           | -1.05            |

**Note:** System checks the specific test data please see Annex C

## 8 EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back of the EUT with phantom 15 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

### 8.1 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

### 8.2 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 15 mm or holster surface and the flat phantom to 0 mm.

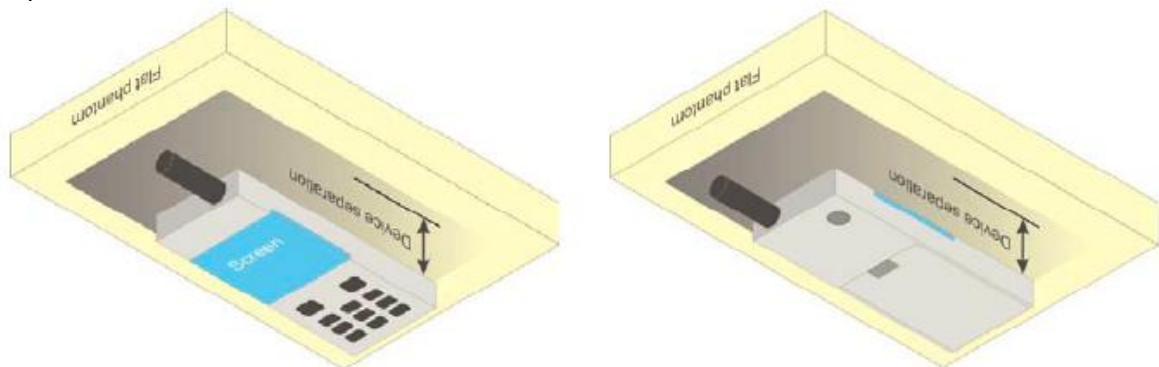


Fig.7.3 Illustration for Body Worn Position

## 9 Measurement Procedures

The measurement procedures are as bellows:

### <Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

### <Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the DASY software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

### 9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.



## 9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 9.3 Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a  $10\text{mm}^2$  step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

## 9.4 Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of  $1000\text{ kg/m}^3$  is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of  $5 \times 5 \times 7$  (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

## 9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

## 9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 10 Conducted RF Output Power


### 10.1 Bluetooth Conducted Power

| Mode                | Channel | Frequency<br>(MHz) | Peak Power (dBm) |        |        |
|---------------------|---------|--------------------|------------------|--------|--------|
|                     |         |                    | DH5              | 2DH5   | 3DH5   |
| BR / EDR            | CH 00   | 2402               | 12.627           | 10.975 | 11.275 |
|                     | CH 39   | 2441               | <b>13.300</b>    | 12.003 | 12.253 |
|                     | CH 78   | 2480               | 12.718           | 11.365 | 11.635 |
| Tune-up Limit (dBm) |         |                    | 13.500           | 12.500 | 12.500 |

| Mode          | Channel | Frequency<br>(MHz) | Peak Power (dBm) |
|---------------|---------|--------------------|------------------|
|               |         |                    | GFSK             |
| LE            | CH 00   | 2402               | 11.825           |
|               | CH 19   | 2440               | 12.695           |
|               | CH 39   | 2480               | 12.505           |
| Tune-up Limit |         |                    | 13.000           |

## 11 Antenna Evaluation

### 11.1 EUT Antenna Location

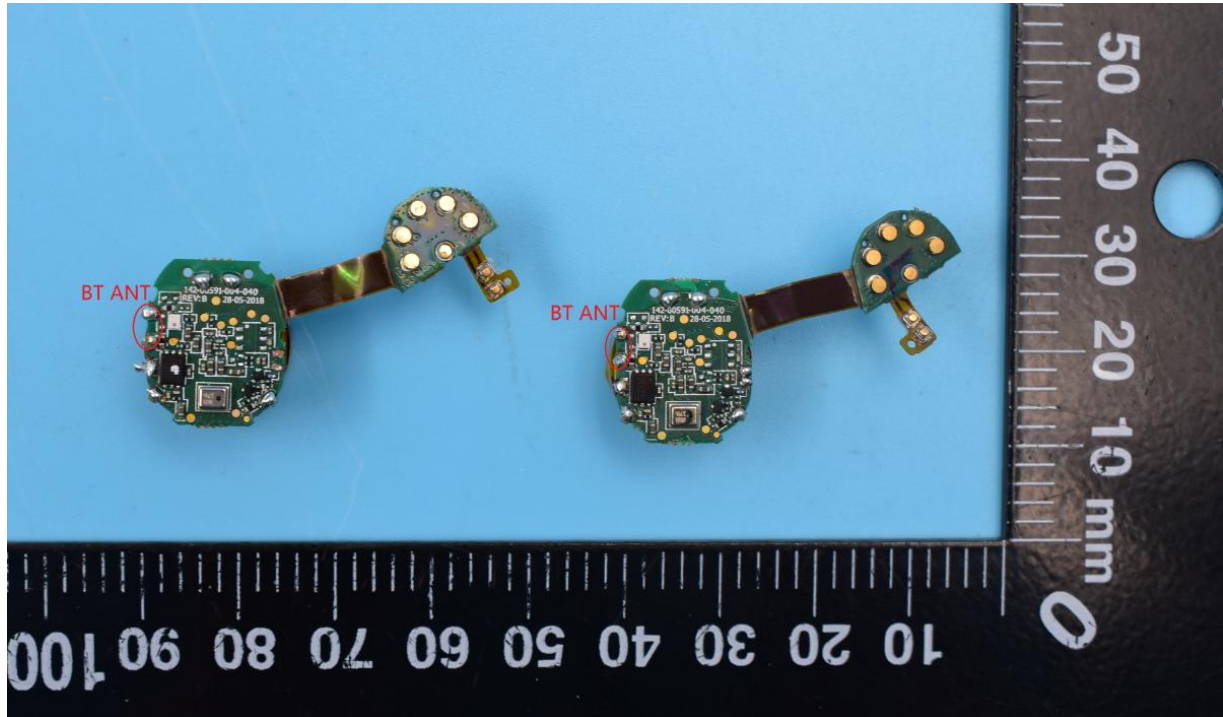

## 12 Block diagram of the tests to be performed

### 12.1 Body

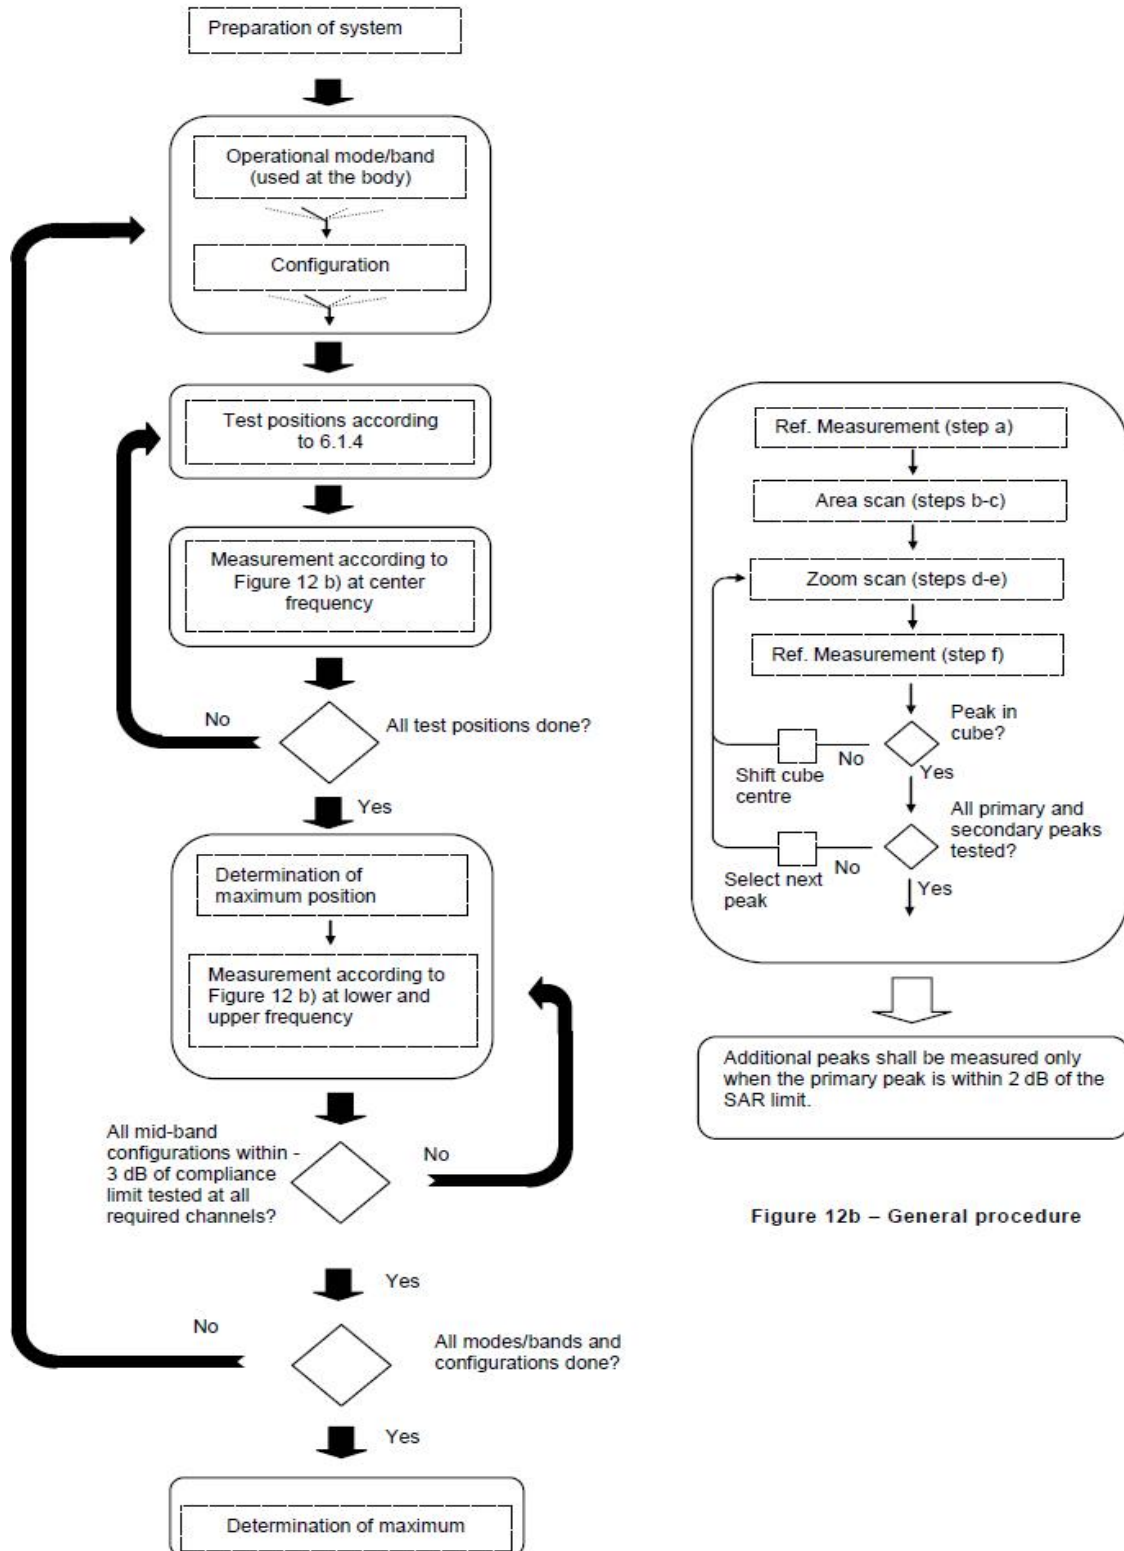


Figure 12b – General procedure



## 13 Test Results List

### Test Guidance:

1. The reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - d. For Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. The SAR testing shall be performed at the middle frequency channels of each operating mode as the primary test channel. If the SAR measured at the middle channel for each test configuration is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional. And the High and Low frequency channels must be tested at a worst exposure position, and if the primary test channel reported SAR is  $\geq 0.8$  W/kg at the test exposure position, the High and Low frequency channels are also must be required.



## 14 SAR Test Results Summary

### 14.1 Hotspot SAR Data

#### ➤ Bluetooth Hotspot SAR <Body Right Ear>

| Plot No. | Band/Mode     | Test Position | CH. | Freq. (MHz) | Average Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|----------|---------------|---------------|-----|-------------|---------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
|          | Bluetooth/DH5 | Front Side    | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.010                          | 0.010                             |
|          | Bluetooth/DH5 | Back Side     | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.007                          | 0.007                             |
| 1#       | Bluetooth/DH5 | Left Side     | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.013                          | <b>0.014</b>                      |
|          | Bluetooth/DH5 | Right Side    | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.005                          | 0.005                             |
|          | Bluetooth/DH5 | Top Side      | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.003                          | 0.003                             |
|          | Bluetooth/DH5 | Bottom Side   | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.004                          | 0.004                             |

#### <Body Left Ear>

| Plot No. | Band/Mode     | Test Position | CH. | Freq. (MHz) | Average Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|----------|---------------|---------------|-----|-------------|---------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
|          | Bluetooth/DH5 | Front Side    | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.008                          | 0.008                             |
|          | Bluetooth/DH5 | Back Side     | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.009                          | 0.009                             |
| 2#       | Bluetooth/DH5 | Left Side     | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.012                          | <b>0.013</b>                      |
|          | Bluetooth/DH5 | Right Side    | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.006                          | 0.006                             |
|          | Bluetooth/DH5 | Top Side      | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.003                          | 0.003                             |
|          | Bluetooth/DH5 | Bottom Side   | 39  | 2441        | 13.30               | 13.50               | 1.047                  | 0.004                          | 0.004                             |

#### Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤0.8W/kg, other channels SAR testing is not necessary.



## 15 SAR Simultaneous Transmission Analysis

### Simultaneous Evaluation:

| Test Position | Body-Right Ear | Body-Left Ear | Simultaneous transmission Condition<br>(1g SAR (W/kg)) |
|---------------|----------------|---------------|--------------------------------------------------------|
| Left Side     | 0.014          | 0.013         | 0.027                                                  |

## 16 Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A Type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in below Table.

| Uncertainty Distributions | Normal   | Rectangular  | Triangular   | U-Shape      |
|---------------------------|----------|--------------|--------------|--------------|
| Multi-plying Factor       | $1/k(b)$ | $1/\sqrt{3}$ | $1/\sqrt{6}$ | $1/\sqrt{2}$ |

**Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



| a                                                                               | b           | c            | d              | e=<br>f(d,k) | f          | g           | h=<br>c*f/e    | i= c*g/e        | k   |
|---------------------------------------------------------------------------------|-------------|--------------|----------------|--------------|------------|-------------|----------------|-----------------|-----|
| Uncertainty Component                                                           | Sec.        | Tol<br>(+-%) | Prob.<br>Dist. | Div.         | Ci<br>(1g) | Ci<br>(10g) | 1g Ui<br>(+-%) | 10g Ui<br>(+-%) | Vi  |
| Measurement System                                                              |             |              |                |              |            |             |                |                 |     |
| Probe calibration                                                               | E.2.1       | 5.83         | N              | 1            | 1          | 1           | 5.83           | 5.83            | ∞   |
| Axial Isotropy                                                                  | E.2.2       | 3.5          | R              | $\sqrt{3}$   | 1          | 1           | 2.02           | 2.02            | ∞   |
| Hemispherical Isotropy                                                          | E.2.2       | 5.9          | R              | $\sqrt{3}$   | 1          | 1           | 3.41           | 3.41            | ∞   |
| Boundary effect                                                                 | E.2.3       | 1.0          | R              | $\sqrt{3}$   | 1          | 1           | 0.58           | 0.58            | ∞   |
| Linearity                                                                       | E.2.4       | 4.7          | R              | $\sqrt{3}$   | 1          | 1           | 2.71           | 2.71            | ∞   |
| System detection limits                                                         | E.2.5       | 1.0          | R              | $\sqrt{3}$   | 1          | 1           | 0.58           | 0.58            | ∞   |
| Readout Electronics                                                             | E.2.6       | 0.5          | N              | 1            | 1          | 1           | 0.5            | 0.5             | ∞   |
| Reponse Time                                                                    | E.2.7       | 3.0          | R              | $\sqrt{3}$   | 1          | 1           | 3.0            | 3.0             | ∞   |
| Integration Time                                                                | E.2.8       | 1.4          | R              | $\sqrt{3}$   | 1          | 1           | 0.81           | 0.81            | ∞   |
| RF ambient Conditions                                                           | E.6.1       | 3.0          | R              | $\sqrt{3}$   | 1          | 1           | 1.73           | 1.73            | ∞   |
| Probe positioner Mechanical Tolerance                                           | E.6.2       | 1.4          | R              | $\sqrt{3}$   | 1          | 1           | 0.81           | 0.81            | ∞   |
| Probe positioning with respect to Phantom Shell                                 | E.6.3       | 1.4          | R              | $\sqrt{3}$   | 1          | 1           | 0.81           | 0.81            | ∞   |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | E.5.2       | 2.3          | R              | $\sqrt{3}$   | 1          | 1           | 1.33           | 1.33            | ∞   |
| Test sample Related                                                             |             |              |                |              |            |             |                |                 |     |
| Test sample positioning                                                         | E.4.2.<br>1 | 2.6          | N              | 1            | 1          | 1           | 2.6            | 2.6             | N-1 |
| Device Holder Uncertainty                                                       | E.4.1.<br>1 | 3.0          | N              | 1            | 1          | 1           | 3.0            | 3.0             | N-1 |
| Output power Power drift - SAR drift measurement                                | 6.6.2       | 5.0          | R              | $\sqrt{3}$   | 1          | 1           | 2.89           | 2.89            | ∞   |
| Phantom and Tissue Parameters                                                   |             |              |                |              |            |             |                |                 |     |
| Phantom Uncertainty (Shape and thickness tolerances)                            | E.3.1       | 4.0          | R              | $\sqrt{3}$   | 1          | 1           | 2.31           | 2.31            | ∞   |
| Liquid conductivity - deviation from target value                               | E.3.2       | 2.0          | R              | $\sqrt{3}$   | 0.6<br>4   | 0.43        | 1.69           | 1.13            | ∞   |
| Liquid conductivity - measurement uncertainty                                   | E.3.3       | 2.5          | N              | 1            | 0.6<br>4   | 0.43        | 3.20           | 2.15            | M   |
| Liquid permittivity - deviation from target value                               | E.3.2       | 2.5          | R              | $\sqrt{3}$   | 0.6        | 0.49        | 1.28           | 1.04            | ∞   |
| Liquid permittivity - measurement uncertainty                                   | E.3.3       | 5.0          | N              | 1            | 0.6        | 0.49        | 6.00           | 4.90            | M   |
| Liquid conductivity – temperature uncertainty                                   | E.3.4       |              | R              | $\sqrt{3}$   | 0.7<br>8   | 0.41        |                |                 | ∞   |
| Liquid permittivity – temperature uncertainty                                   | E.3.4       |              | R              | $\sqrt{3}$   | 0.2<br>3   | 0.26        |                |                 | ∞   |
| Combined Standard Uncertainty                                                   |             |              | RSS            |              |            |             | 11.55          | 12.07           |     |



|                                                   |  |  |     |  |  |  |        |        |  |
|---------------------------------------------------|--|--|-----|--|--|--|--------|--------|--|
| Expanded Uncertainty<br>(95% Confidence interval) |  |  | K=2 |  |  |  | ±23.20 | ±24.17 |  |
|---------------------------------------------------|--|--|-----|--|--|--|--------|--------|--|

## 17 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the India, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested. Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.



REPORT No. : SZ18080098S02

## Annex A General Information

### 1. Identification of the Responsible Testing Laboratory

|                                      |                                                                                                                                  |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Company Name:</b>                 | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| <b>Department:</b>                   | Morlab Laboratory                                                                                                                |
| <b>Address:</b>                      | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| <b>Responsible Test Lab Manager:</b> | Mr. Su Feng                                                                                                                      |
| <b>Telephone:</b>                    | +86 755 36698555                                                                                                                 |
| <b>Facsimile:</b>                    | +86 755 36698525                                                                                                                 |

### 2. Identification of the Responsible Testing Location

|                 |                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory                                                            |
| <b>Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

## Annex B Test Setup Photos



Front Side\_0mm



Back Side\_0mm

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.




Left Side\_0mm



Right Side\_0mm



Top Side\_0mm

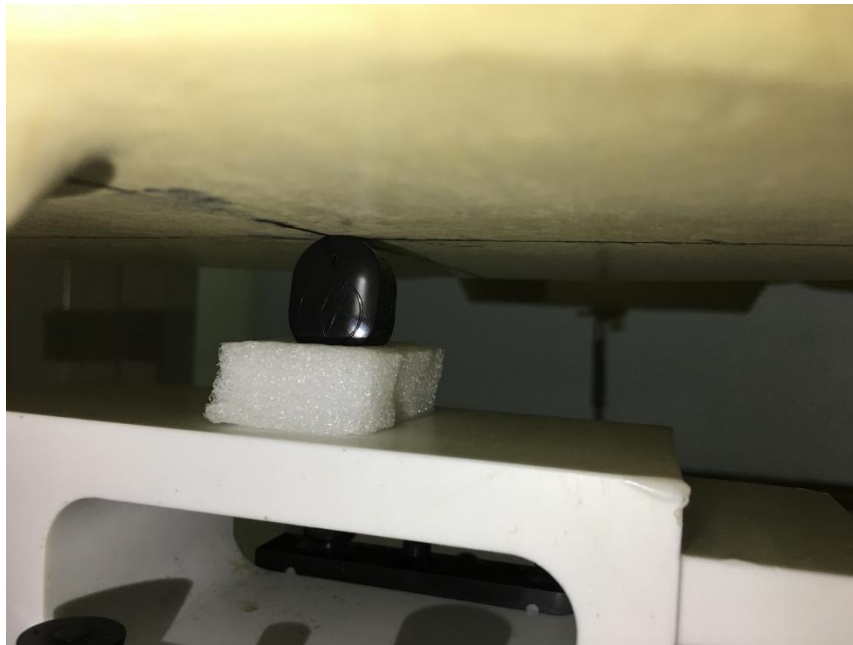

Bottom Side\_0mm



REPORT No. : SZ18080098S02

## Annex C Plots of System Performance Check

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

[Http://www.morlab.cn](http://www.morlab.cn)

E-mail: [service@morlab.cn](mailto:service@morlab.cn)

## System Check\_2450MHz\_Head\_180929

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_180929 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 40.036$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.9 °C

### DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1516; Calibrated: 2018.07.14
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW2450/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.6 W/kg


**CW2450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.51 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.1 W/kg

**SAR(1 g) = 13.16 W/kg; SAR(10 g) = 6.19 W/kg**

Maximum value of SAR (measured) = 14.5 W/kg

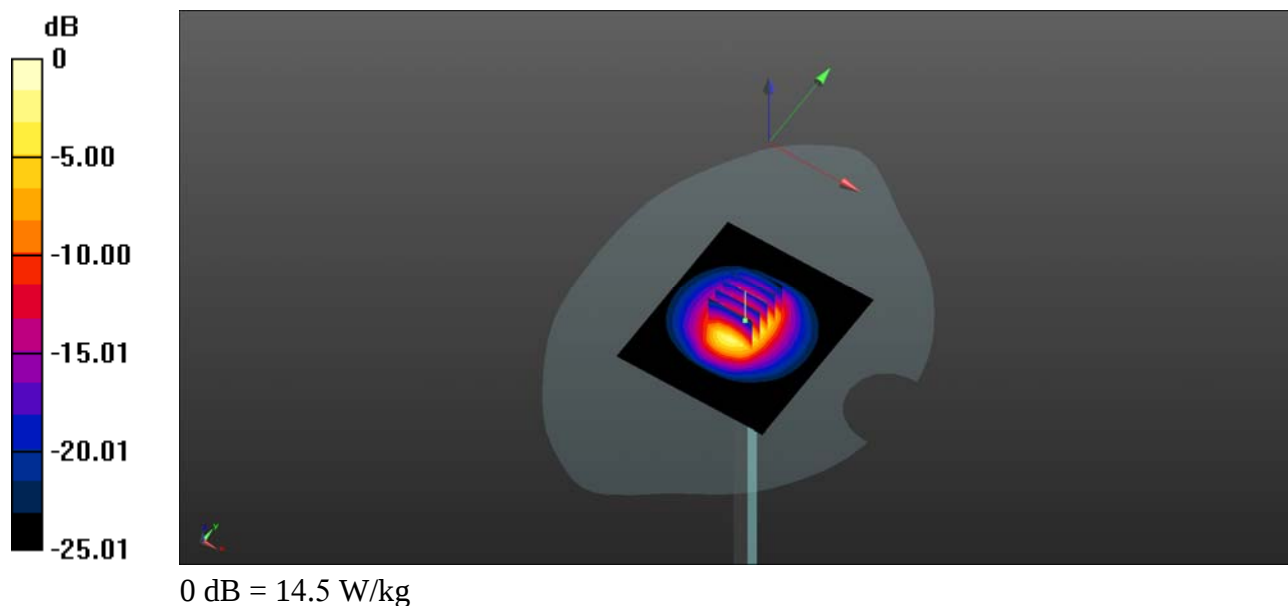



REPORT No. : SZ18080098S02

## Annex D Plots of Maximum SAR Test Results

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

[Http://www.morlab.cn](http://www.morlab.cn)

E-mail: [service@morlab.cn](mailto:service@morlab.cn)

**Bluetooth\_DH5\_Left Side\_0mm\_Ch39**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_1809029 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.841$  S/m;  $\epsilon_r = 40.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.28, 4.28, 4.28); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1516; Calibrated: 2018.07.14
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch39/Area Scan (61x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.215 W/kg


**Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.002 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.0132 W/kg; SAR(10 g) = 0.06214 W/kg**

Maximum value of SAR (measured) = 0.093 W/kg

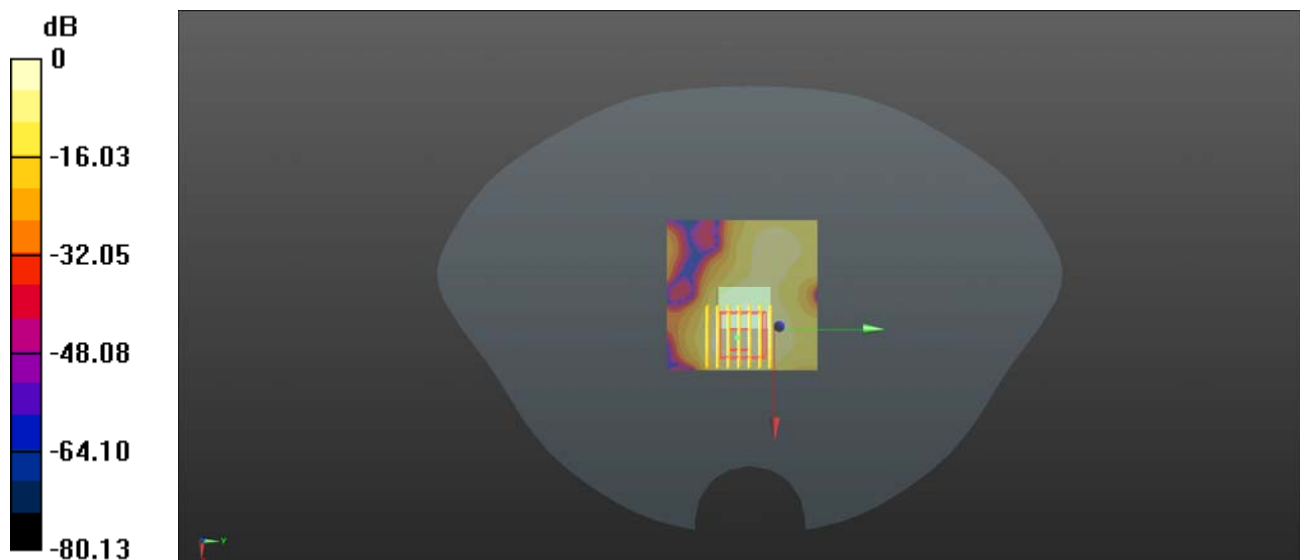

0 dB = 0.093 W/kg

**Bluetooth\_DH5\_Left Side\_0mm\_Ch39**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_1809029 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.841$  S/m;  $\epsilon_r = 40.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.28, 4.28, 4.28); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1516; Calibrated: 2018.07.14
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch39/Area Scan (61x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.198 W/kg


**Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.987 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.513 W/kg

**SAR(1 g) = 0.0115 W/kg; SAR(10 g) = 0.05872 W/kg**

Maximum value of SAR (measured) = 0.087 W/kg

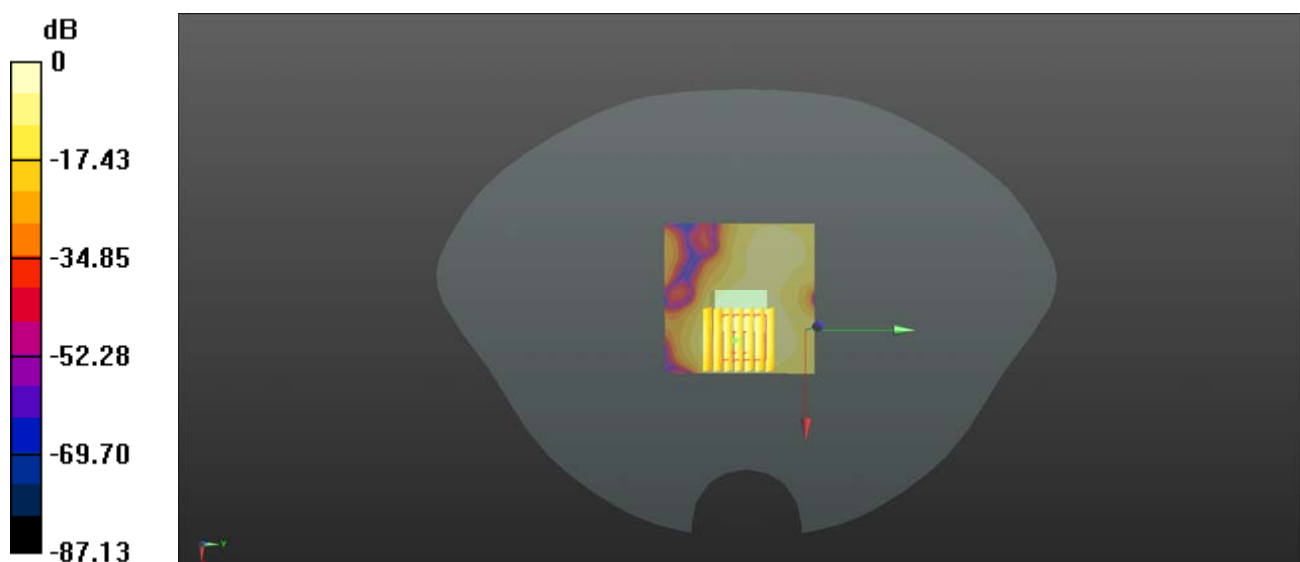

0 dB = 0.087 W/kg



REPORT No. : SZ18080098S02

## Annex E DASY Calibration Certificate

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

[Http://www.morlab.cn](http://www.morlab.cn)

E-mail: [service@morlab.cn](mailto:service@morlab.cn)



In Collaboration with  
**s p e a g**  
**CALIBRATION LABORATORY**



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client : **KEHU**

Certificate No: **Z18-60213**

## CALIBRATION CERTIFICATE

Object **DAE4 - SN: 1516**

Calibration Procedure(s) **FF-Z11-002-01**  
**Calibration Procedure for the Data Acquisition Electronics (DAEx)**

Calibration date: **July 14, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Process Calibrator 753 | 1971018 | 20-Jun-18 (CTTL, No.J18X05034)           | June-19               |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: July 16, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

## **Glossary:**

DAE                      data acquisition electronics  
Connector angle      information used in DASY system to align probe sensor X  
to the robot coordinate system.

## **Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB =  $6.1\mu\text{V}$ , full range =  $-100\dots+300\text{ mV}$

Low Range: 1LSB =  $61\text{nV}$ , full range =  $-1\dots+3\text{mV}$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                          | Y                          | Z                          |
|---------------------|----------------------------|----------------------------|----------------------------|
| High Range          | $404.244 \pm 0.15\% (k=2)$ | $404.721 \pm 0.15\% (k=2)$ | $404.504 \pm 0.15\% (k=2)$ |
| Low Range           | $3.97926 \pm 0.7\% (k=2)$  | $3.93773 \pm 0.7\% (k=2)$  | $4.00116 \pm 0.7\% (k=2)$  |

## Connector Angle

|                                           |                           |
|-------------------------------------------|---------------------------|
| Connector Angle to be used in DASY system | $203.5^\circ \pm 1^\circ$ |
|-------------------------------------------|---------------------------|



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

**Morlab**

**Certificate No: Z17-97169**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3154**

Calibration Procedure(s) **FF-Z11-004-01**  
**Calibration Procedures for Dosimetric E-field Probes**

Calibration date: **October 30, 2017**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|-------------|------------------------------------------|-----------------------|
| Power Meter NRP2        | 101919      | 27-Jun-17 (CTTL, No.J17X05857)           | Jun-18                |
| Power sensor NRP-Z91    | 101547      | 27-Jun-17 (CTTL, No.J17X05857)           | Jun-18                |
| Power sensor NRP-Z91    | 101548      | 27-Jun-17 (CTTL, No.J17X05857)           | Jun-18                |
| Reference10dBAttenuator | 18N50W-10dB | 13-Mar-16(CTTL,No.J16X01547)             | Mar-18                |
| Reference20dBAttenuator | 18N50W-20dB | 13-Mar-16(CTTL, No.J16X01548)            | Mar-18                |
| Reference Probe EX3DV4  | SN 3617     | 23-Jan-17(SPEAG,No.EX3-3617_Jan17)       | Jan-18                |
| DAE4                    | SN 549      | 13-Dec-16(SPEAG, No.DAE4-549_Dec16)      | Dec -17               |

| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| SignalGeneratorMG3700A  | 6201052605 | 27-Jun-17 (CTTL, No.J17X05858)           | Jun-18                |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285)           | Jan -18               |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: November 03, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## Glossary:

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                    |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                   |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                  |
| DCP                   | diode compression point                                                                                                                     |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                |
| A,B,C,D               | modulation dependent linearization parameters                                                                                               |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                           |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i<br>$\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



In Collaboration with  
**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

# Probe ES3DV3

## SN: 3154

Calibrated: October 30, 2017

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3154

### Basic Calibration Parameters

|                                                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|----------------------------------------------------------|----------|----------|----------|-----------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.27     | 1.20     | 1.23     | ±10.0%    |
| DCP(mV) <sup>B</sup>                                     | 100.5    | 104.4    | 102.1    |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB/μV | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0        | 1.0 | 0.00    | 283.2    | ±2.7%                     |
|     |                           | Y | 0.0     | 0.0        | 1.0 |         | 277.8    |                           |
|     |                           | Z | 0.0     | 0.0        | 1.0 |         | 278.4    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3154

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.26    | 6.26    | 6.26    | 0.60               | 1.25                    | ± 12.1%     |
| 900                  | 41.5                               | 0.97                            | 6.16    | 6.16    | 6.16    | 0.44               | 1.48                    | ± 12.1%     |
| 1750                 | 40.1                               | 1.37                            | 5.15    | 5.15    | 5.15    | 0.51               | 1.48                    | ± 12.1%     |
| 1900                 | 40.0                               | 1.40                            | 4.98    | 4.98    | 4.98    | 0.69               | 1.22                    | ± 12.1%     |
| 2100                 | 39.8                               | 1.49                            | 5.07    | 5.07    | 5.07    | 0.64               | 1.25                    | ± 12.1%     |
| 2300                 | 39.5                               | 1.67                            | 4.76    | 4.76    | 4.76    | 0.90               | 1.05                    | ± 12.1%     |
| 2450                 | 39.2                               | 1.80                            | 4.61    | 4.61    | 4.61    | 0.83               | 1.16                    | ± 12.1%     |
| 2600                 | 39.0                               | 1.96                            | 4.26    | 4.26    | 4.26    | 0.74               | 1.20                    | ± 12.1%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3154

### Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.22    | 6.22    | 6.22    | 0.70               | 1.16                    | ± 12.1%     |
| 900                  | 55.0                               | 1.05                            | 6.12    | 6.12    | 6.12    | 0.43               | 1.51                    | ± 12.1%     |
| 1750                 | 53.4                               | 1.49                            | 4.91    | 4.91    | 4.91    | 0.64               | 1.28                    | ± 12.1%     |
| 1900                 | 53.3                               | 1.52                            | 4.71    | 4.71    | 4.71    | 0.70               | 1.23                    | ± 12.1%     |
| 2100                 | 53.2                               | 1.62                            | 4.92    | 4.92    | 4.92    | 0.59               | 1.44                    | ± 12.1%     |
| 2300                 | 52.9                               | 1.81                            | 4.40    | 4.40    | 4.40    | 0.90               | 1.15                    | ± 12.1%     |
| 2450                 | 52.7                               | 1.95                            | 4.28    | 4.28    | 4.28    | 0.87               | 1.16                    | ± 12.1%     |
| 2600                 | 52.5                               | 2.16                            | 4.08    | 4.08    | 4.08    | 0.81               | 1.20                    | ± 12.1%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) <http://www.chinattl.cn>

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

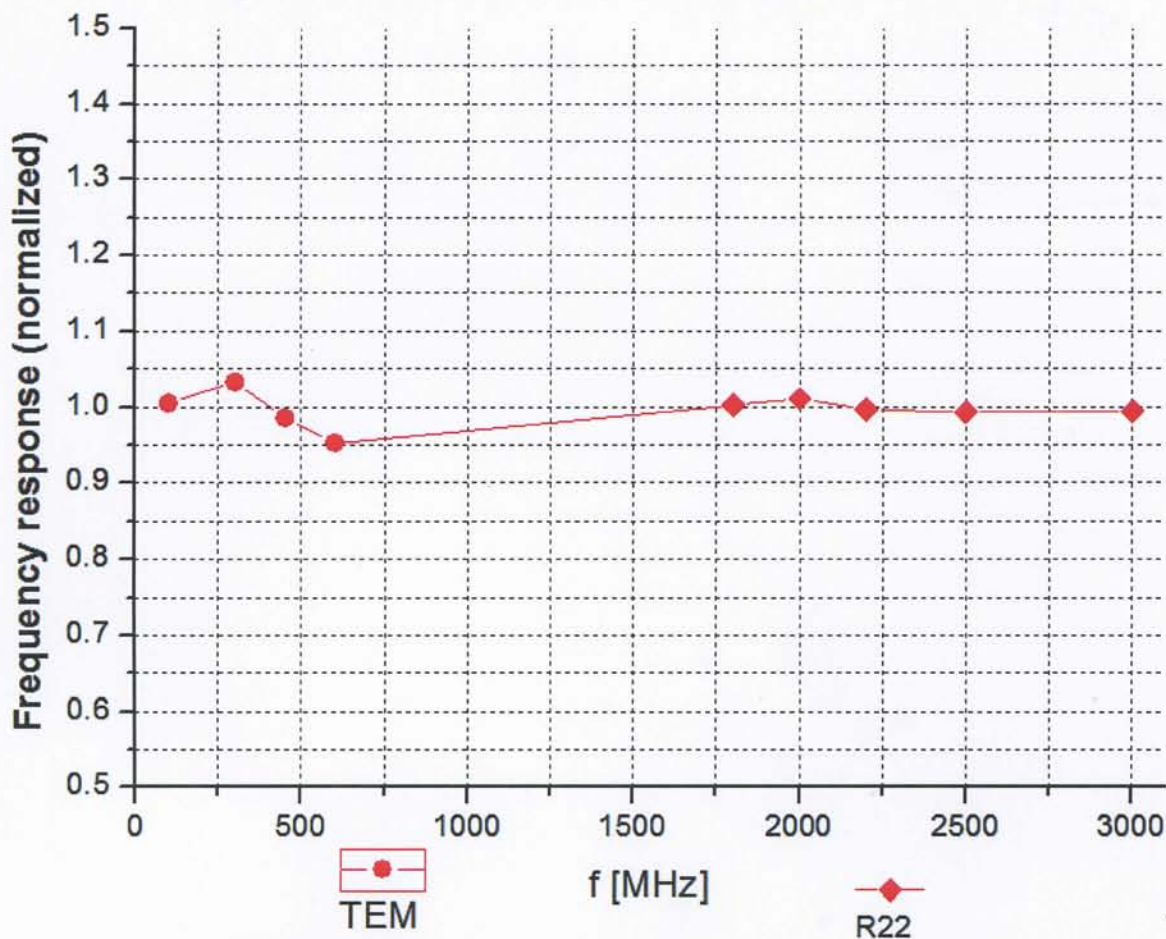

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2218


Fax: +86-10-62304633-2209

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)




<http://www.chinattl.cn>

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

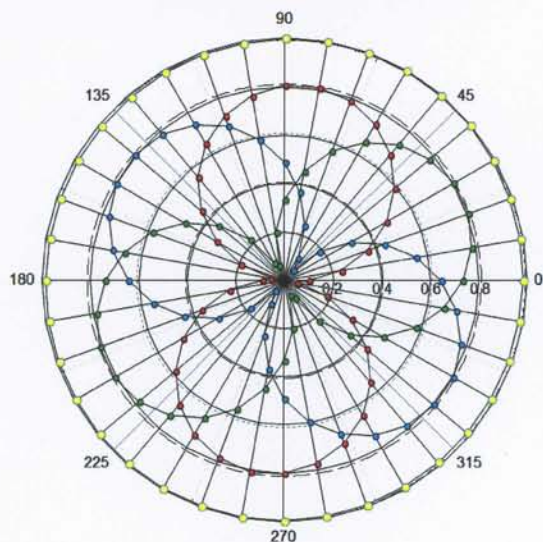

**f=1800 MHz, R22**

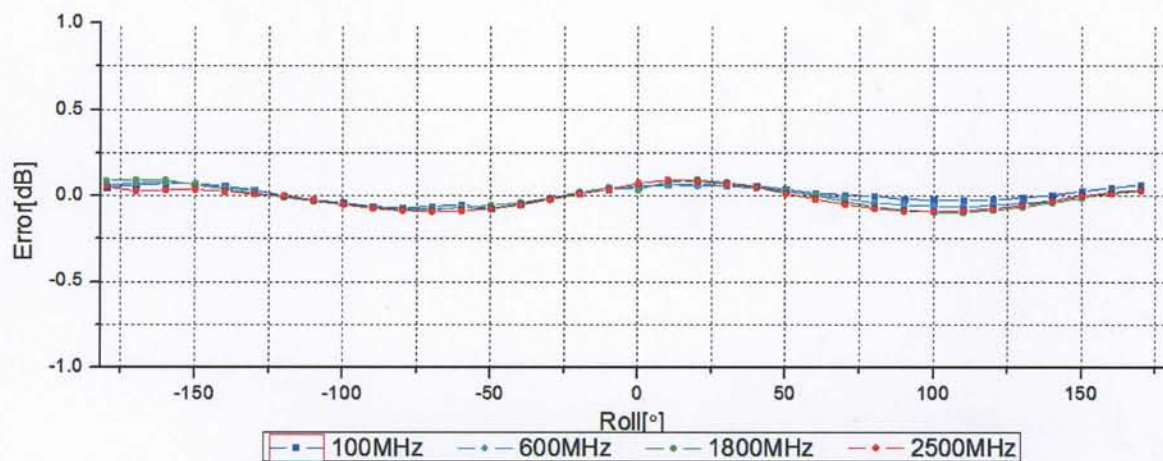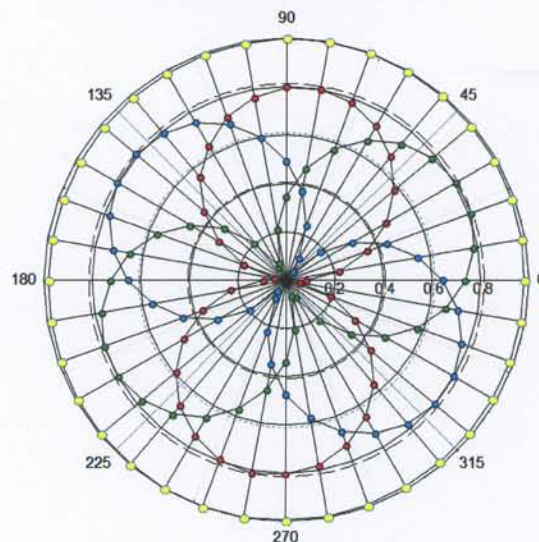


**Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )**



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

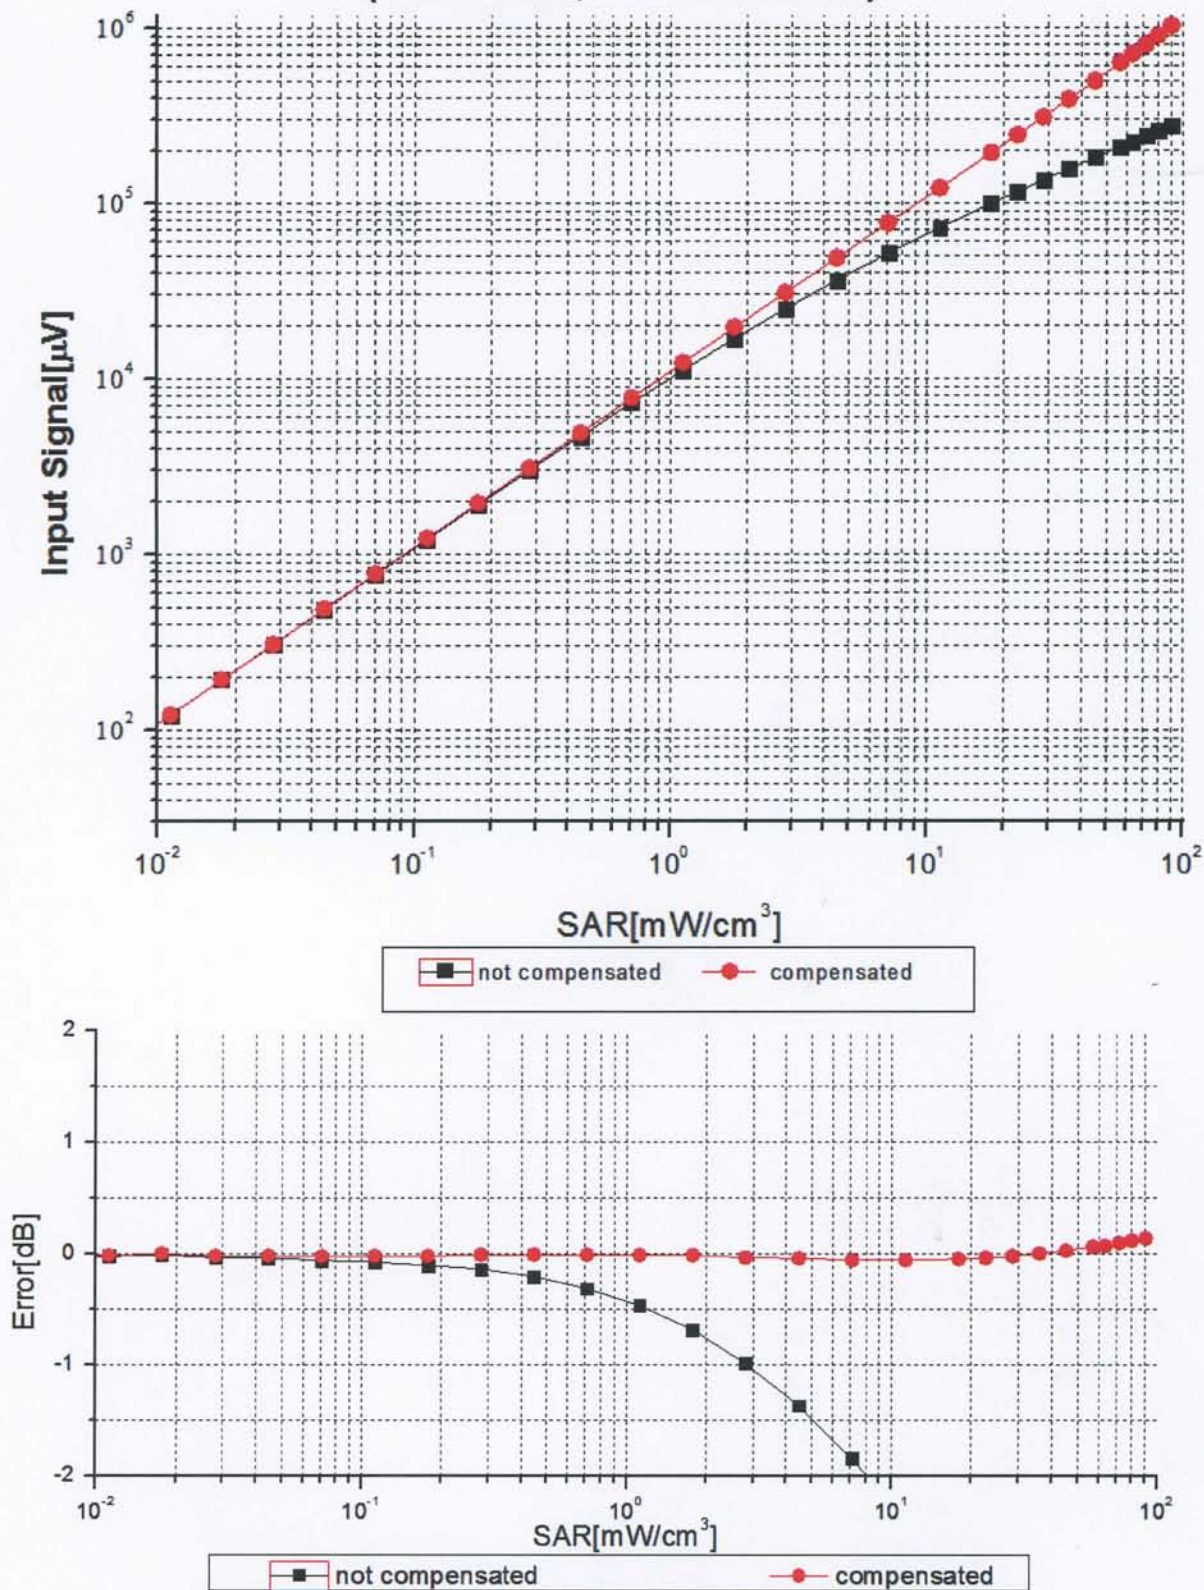

Uncertainty of Linearity Assessment: ±0.9% (k=2)




In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY


Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Conversion Factor Assessment


**f=750 MHz, WGLS R9(H\_convF)**

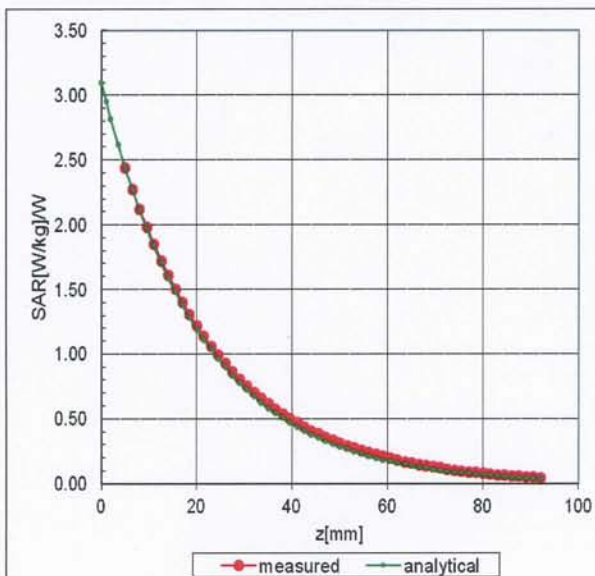

**f=1750 MHz, WGLS R22(H\_convF)**

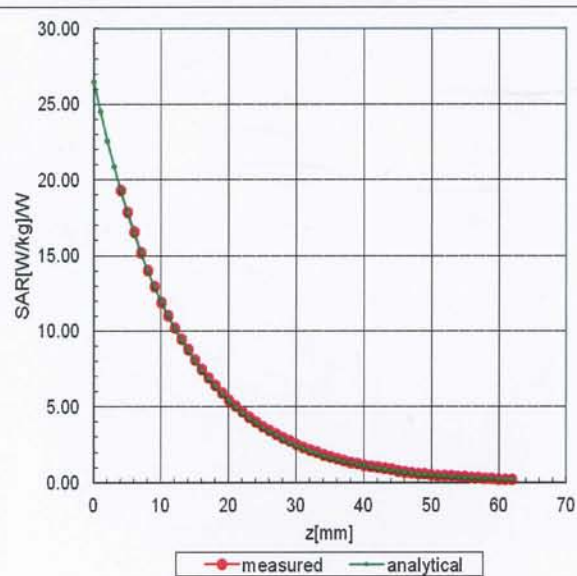

## Deviation from Isotropy in Liquid

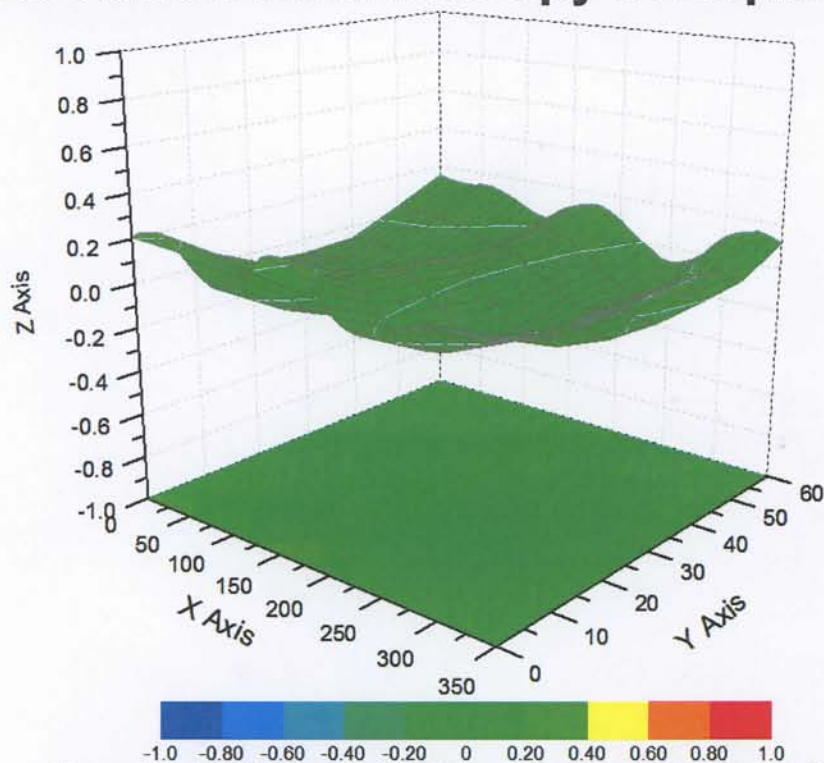

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  (K=2)

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3154

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 62.2       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disable    |
| Probe Overall Length                          | 337mm      |
| Probe Body Diameter                           | 10mm       |
| Tip Length                                    | 10mm       |
| Tip Diameter                                  | 4mm        |
| Probe Tip to Sensor X Calibration Point       | 2mm        |
| Probe Tip to Sensor Y Calibration Point       | 2mm        |
| Probe Tip to Sensor Z Calibration Point       | 2mm        |
| Recommended Measurement Distance from Surface | 3mm        |



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

**Morlab**

Certificate No: **Z17-97174**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 805**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **October 12, 2017**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm 3$ ) $^{\circ}\text{C}$  and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102196     | 02-Mar-17 (CTTL, No.J17X01254)           | Mar-18                |
| Power sensor NRV-Z5     | 100596     | 02-Mar-17 (CTTL, No.J17X01254)           | Mar-18                |
| Reference Probe EX3DV4  | SN 3846    | 13-Jan-17(CTTL-SPEAG,No.Z16-97251)       | Jan-18                |
| DAE4                    | SN 1331    | 19-Jan-17(CTTL-SPEAG,No.Z17-97015)       | Jan-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 13-Jan-17 (CTTL, No.J17X00286)           | Jan-18                |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285)           | Jan-18                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: October 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

#### **Glossary:**

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

#### **Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### **Additional Documentation:**

- e) DASY4/5 System Handbook

#### **Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                          |              |
|------------------------------|--------------------------|--------------|
| DASY Version                 | DASY52                   | 52.10.0.1446 |
| Extrapolation                | Advanced Extrapolation   |              |
| Phantom                      | Triple Flat Phantom 5.1C |              |
| Distance Dipole Center - TSL | 10 mm                    | with Spacer  |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm        |              |
| Frequency                    | 2450 MHz $\pm$ 1 MHz     |              |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.1 $\pm$ 6 % | 1.82 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | <1.0 °C             | ----           | ----                 |

## SAR result with Head TSL

|                                                         |                    |                                |
|---------------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                                |
| SAR measured                                            | 250 mW input power | 13.2 mW / g                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 52.5 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                                |
| SAR measured                                            | 250 mW input power | 6.19 mW / g                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.7 mW / g $\pm$ 18.7 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 53.3 $\pm$ 6 % | 1.96 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | <1.0 °C             | ----           | ----                 |

## SAR result with Body TSL

|                                                         |                    |                                |
|---------------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                                |
| SAR measured                                            | 250 mW input power | 13.1 mW / g                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 52.5 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                                |
| SAR measured                                            | 250 mW input power | 6.13 mW / g                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 24.5 mW / g $\pm$ 18.7 % (k=2) |



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 54.4Ω+ 3.22jΩ |
| Return Loss                          | - 25.7dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 50.3Ω+ 4.92jΩ |
| Return Loss                          | - 26.2dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.262 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 10.12.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 805**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.819$  S/m;  $\epsilon_r = 39.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(7.22,7.22,7.22); Calibrated: 1/13/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.6 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 27.0 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.19 W/kg**

Maximum value of SAR (measured) = 21.7 W/kg

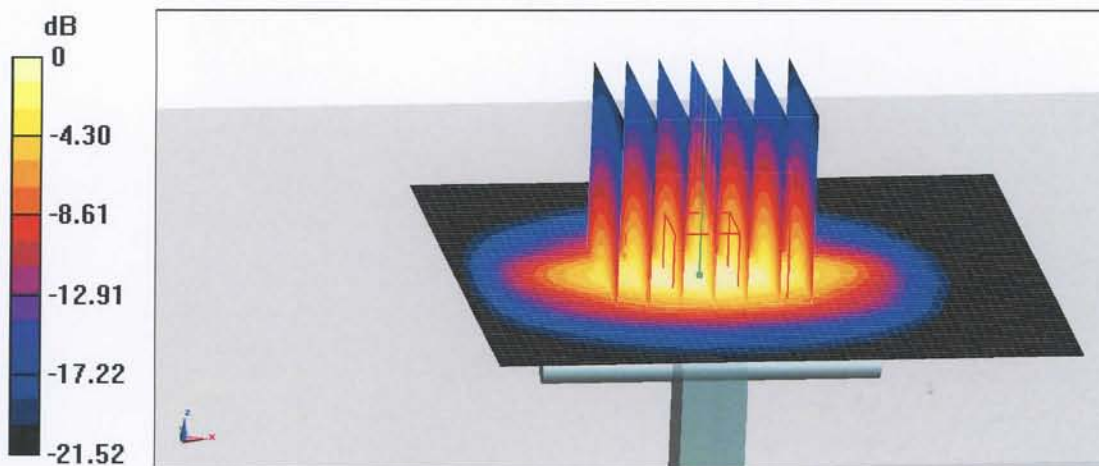

0 dB = 21.7 W/kg = 13.36 dBW/kg




In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

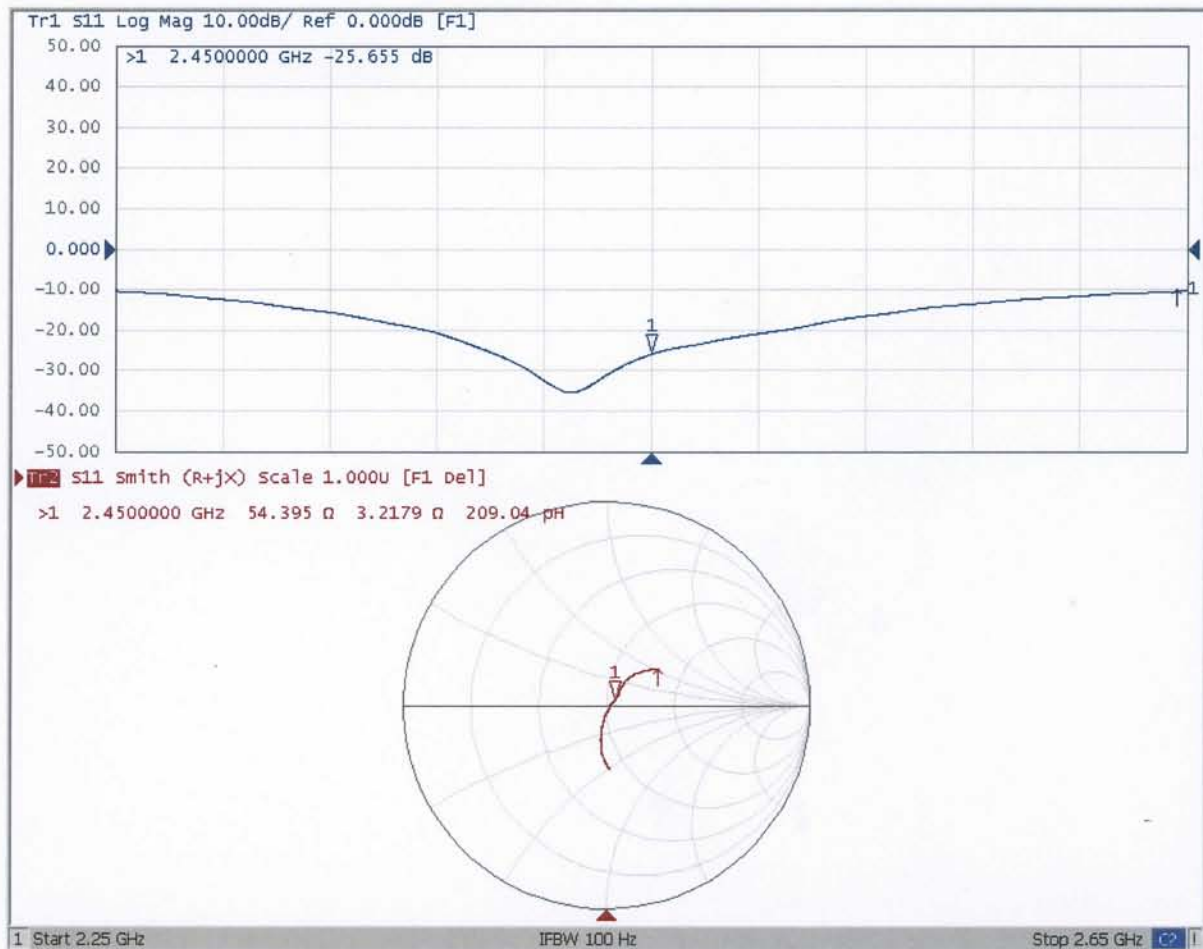



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 10.12.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 805**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.957$  S/m;  $\epsilon_r = 53.32$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(7.31,7.31,7.31); Calibrated: 1/13/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.76 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 26.3 W/kg

**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.13 W/kg**

Maximum value of SAR (measured) = 21.3 W/kg

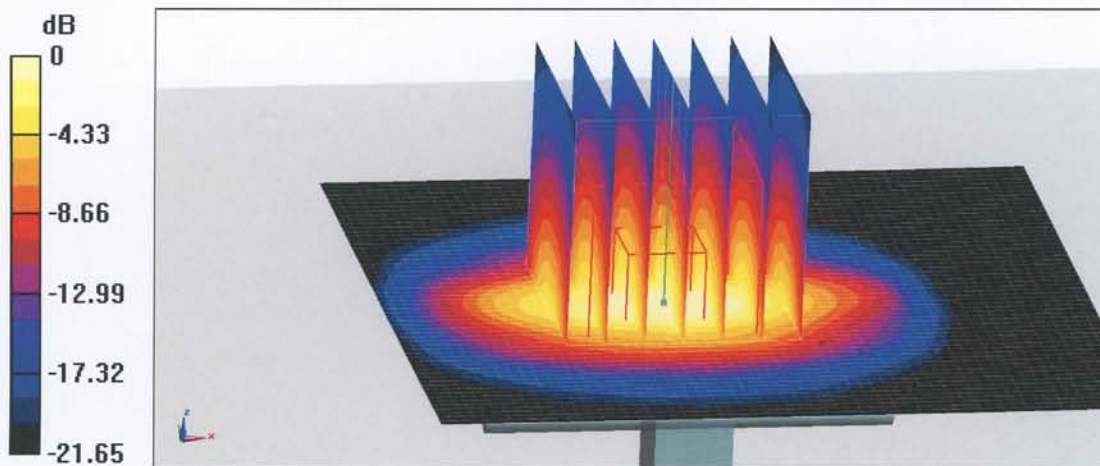

0 dB = 21.3 W/kg = 13.28 dBW/kg



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Impedance Measurement Plot for Body TSL

