



Antenna Location

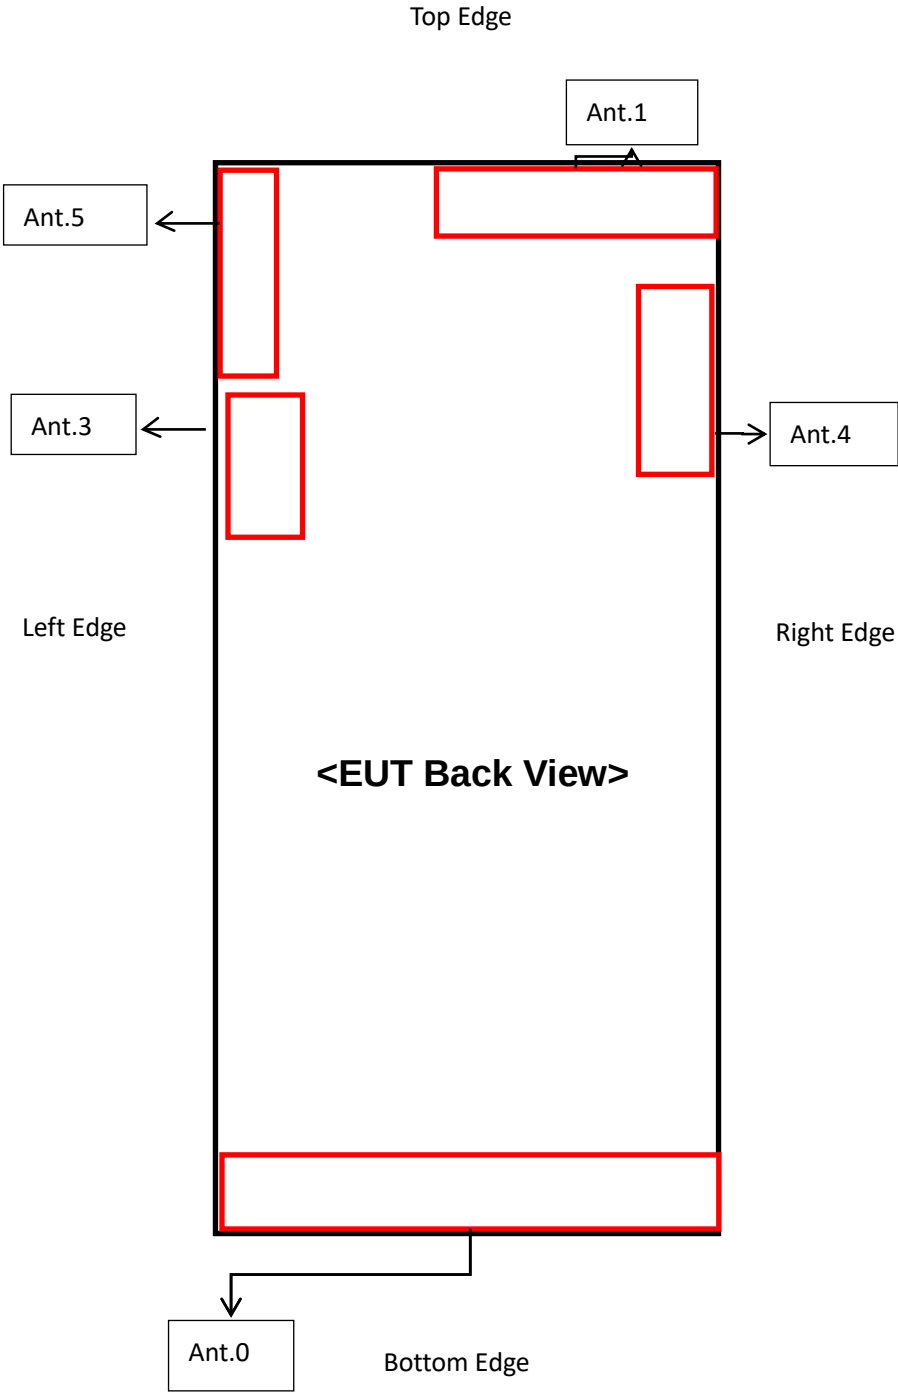

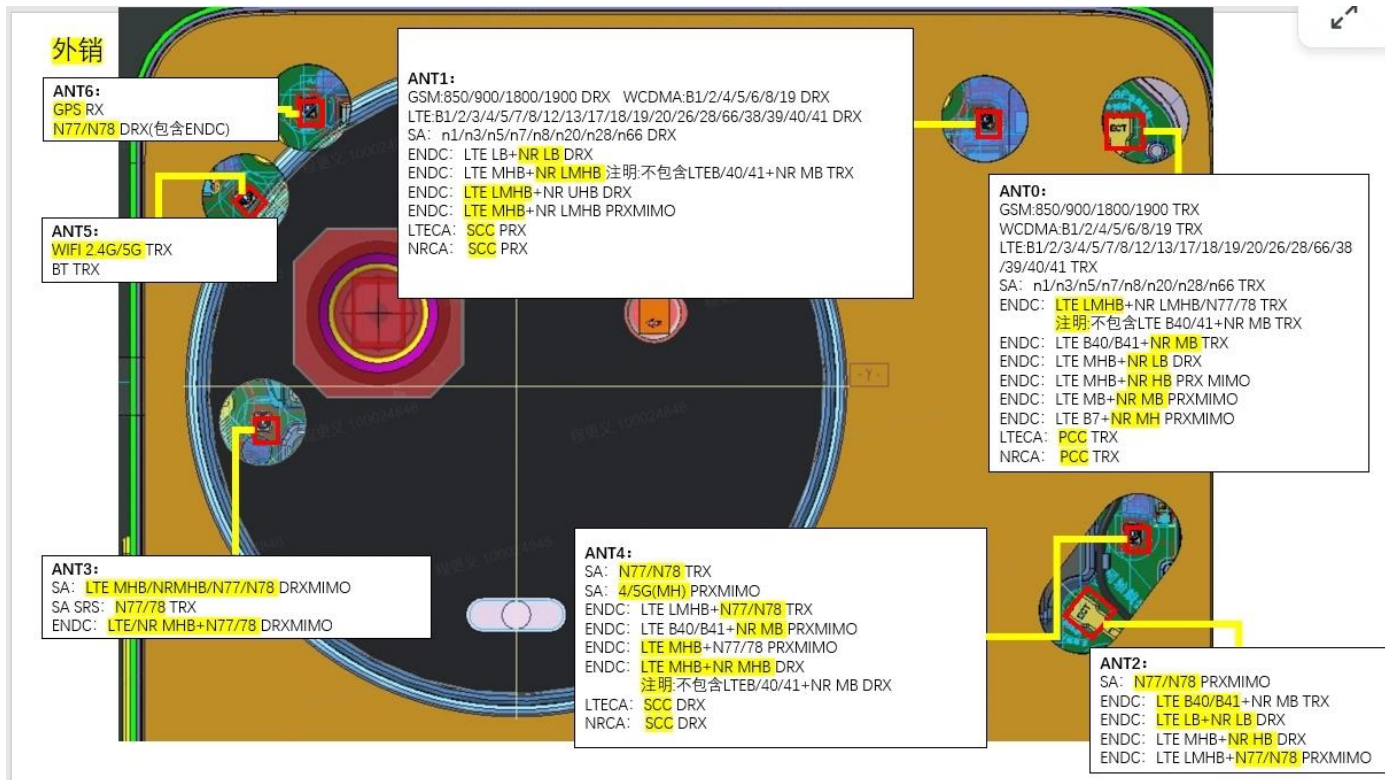

Antenna	Support Bands
Antenna 0	GSM850/1900, WCDMA 2/4/5, LTE B2/4/5/7/12/13/17/26/38/41/66, SA n5/7/38/41/66 NSA n5/7/38/41/66 NSA LTE B2/4/5/7/12/41/66
Antenna 1	GSM850/1900, WCDMA 2/4/5, LTE B2/4/5/7/12/13/17/26/38/41/66, SA n5/7/38/41/66 NSA n5/7/38/41/66 NSA LTE B2/4/5/7/12/41/66
Antenna 4	LTE B4/7/66/38/41 SA n7/66/38/41 NSA n7/66/38/41
Antenna 5	WIFI2.4G/5G; Bluetooth

Antenna	Front Side(mm)	Back Side(mm)	Left Edge(mm)	Right Edge(mm)	Top Edge(mm)	Bottom Edge(mm)
Ant.0	<25	<25	<25	<25	>25	<25
Ant.1	<25	<25	>25	<25	<25	>25
Ant.4	<25	<25	>25	<25	<25	>25
Ant.5	<25	<25	<25	>25	<25	>25
Note: 1.Per KDB 941225 DO6,When the overall length and width of a device is > 9 cm *5 cm, a test separation distance of 10 mm is required for hotspot mode SAR measurements and hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.						

--BLANK BELOW--