

Test & Certification Center (TCC) - Dallas
DTXC 1280-EN-1.0

FCC ID: QMNRM-124
Test Report #: WR-1042.001
February 9, 2006

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

CFR 47 Part 15 Test Report

Test Report Number: WR-1042.001

Terminal device:

FCC ID: QMNRM-124 Model: 2855i Type: RM-124 HWID: 3201 SW: VR125_05w21_21.nbr
(Detailed information is listed in section 4).

Originator: Cindy Trinh
Function: TCC - Dallas – EMC
Version/Status: 1.0 Approved
Location: TCC Directories
Date: February 9, 2006

Change History:

Version	Date	Status	Handled By	Comments
0.1	9-Feb-06	Draft	Cindy Trinh	
0.2	9-Feb-06	Proposal	Cindy Trinh	
0.3	9-Feb-06	Reviewed	Severson Mark	
1.0	9-Feb-06	Approved	Severson Mark	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.

Tel. 972-894-5000

Client:

Nokia, Inc.
12278 Scripps Summit Dr.
San Diego, CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Date and signatures:**February 9, 2006**

For the contents:

Cindy Trinh

Mark Severson

Test Engineer**Technical Review**

TABLE OF CONTENTS

1. GENERAL	3
1.1 QUALITY SYSTEM	3
1.2 OBJECTIVE	3
1.3 TEST SUMMARY	3
2. STANDARDS BASIS	4
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	5
3.1 ABBREVIATIONS	5
3.2 ACRONYMS	5
3.3 TERMS	5
4. EQUIPMENT-UNDER-TEST (EUT)	6
4.1 DESCRIPTION OF TESTED DEVICE(S):	6
5. TEST EQUIPMENT LIST	7
6. IDLE MODE RADIATED EMISSIONS	8
6.1 SETUP	8
6.2 PASS/FAIL CRITERIA	8
6.3 DETAILED TEST RESULTS	8

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.

Test & Certification Center (TCC) - Dallas
DTXC 1280-EN-1.0

FCC ID: QMNRM-124
Test Report #: WR-1042.001
February 9, 2006

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661N.

1.2 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 15.109.

1.3 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
Idle Mode Radiated Emissions	FCC Part 15.109	6	Complies

2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 15	Code of Federal Regulations (CFR) Title 47, Part 15 – Radio Frequency Devices: Subpart B – Unintentional Radiators and Subpart C – Intentional Radiators
3	CISPR 22 / EN55022	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.
4	ICES-003	Digital Apparatus, Industry Canada
5	RSS-132	800 MHz Cellular Telephones Employing New Technologies
6	RSS-133	2 GHz Personal Communications Services, Industry Canada
7	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
8	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.



3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

- dB - decibel
- dBm - decibels per milliwatt (absolute measurement)
- dB μ V - decibel per microvolt
- dB μ V/m - decibel of microvolt per meter
- GHz - gigahertz or 1000000000 hertz
- kHz - kilohertz or 1000 hertz
- MHz - megahertz or 1000000 hertz

3.2 Acronyms

- AMPS - Advanced Mobile Phone System
- BSS - Base Station Simulator
- CDMA - Code Division Multiple Access
- EMC - Electromagnetic Compatibility
- EMI - Electromagnetic Interference
- EUT - Equipment under Test
- GSM - Global System for Mobile communications
- PCS - Personal Communications Services
- RF - Radio Frequency

3.3 Terms

- Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, and CDMA.
- Cellular - refers to a frequency in the 800MHz band.
- PCS - refers to a frequency in the 1900MHz band.

Test & Certification Center (TCC) - Dallas
DTXC 1280-EN-1.0

FCC ID: QMNRM-124
Test Report #: WR-1042.001
February 9, 2006

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	January 27, 2006	Functional	Phone	FCC ID: QMNRM-124 Type: RM-124 HWID: 3201 SW: VR125_05w21_21.nbr ESN: 03314216070
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	N/A	N/A	Battery	Type: BL-6C Other: 3.7vdc
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	N/A	N/A	Charger	Type: AC-3U
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	N/A	N/A	Headset	Type: HS-9
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	N/A	N/A	Laptop	Manufacturer: IBM Model: T40 Type: 2373 SN: 99ZVGF9
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	N/A	N/A	Data cable	Type: DKU-2 SN: JL44083821
FCC Part 15.109	AMPS, CDMA 800/1900, USB Data Transfer	N/A	N/A	AC Adapter	Manufacturer: IBM PN: 02K6543

Test & Certification Center (TCC) - Dallas
DTXC 1280-EN-1.0

FCC ID: QMNRM-124
Test Report #: WR-1042.001
February 9, 2006

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.


Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
6	04073	EMI Receiver	R&S	ESIB 26	03-Aug-06	12 months
6	02625	Base Station	R&S	CMU-200	30-Aug-06	12 months
6	02871	Biconilog Antenna	EMC Automation	3003C	08-July-06	12 months
6	04076	Horn Antenna	ETS	3117	18-Aug-06	12 months
6	02836	Turntable and Tower Controller	Sunol	FM2022 & 2846	N/A	N/A

6. IDLE MODE RADIATED EMISSIONS

Specification: FCC Part 15.109

6.1 Setup

Testing was performed in accordance with ANSI C63.4, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.

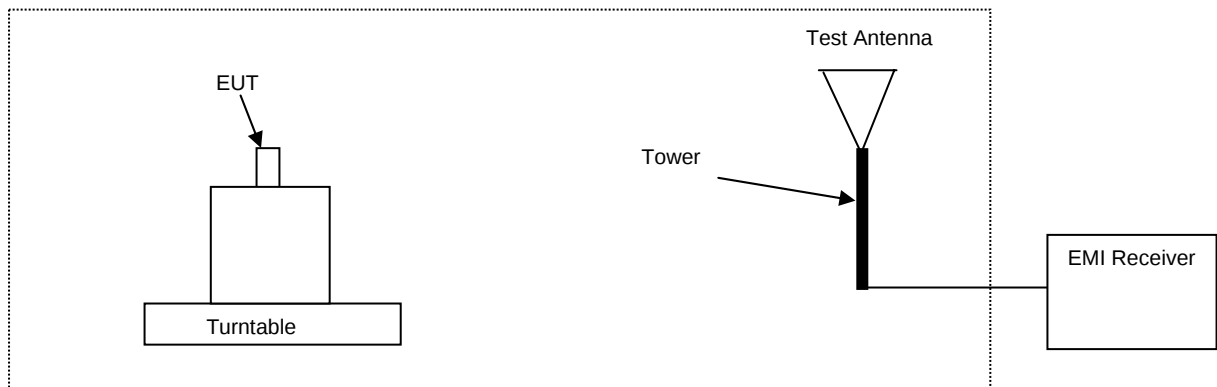

6.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Class B Limit (dBμV/m at 3m)
Cellular	30 – 88	40
Cellular	88 – 216	43.5
Cellular	216 – 960	46
Cellular	> 960 *	54

* Frequency to be investigated up to the 5th harmonic of the highest clock or frequency used

6.3 Detailed Test Results

Test Technician / Engineer	Cindy Trinh
Date of Measurement	1-Feb-06 8 Feb 06
Temperature	23 to 24 °C
Humidity	43 to 50 %RH
Test Result	Complies with FCC Part 15.109

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Test & Certification Center (TCC) - Dallas
DTXC 1280-EN-1.0

FCC ID: QMNRM-124
Test Report #: WR-1042.001
February 9, 2006

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

CDMA 800
USB Data Transfer

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
33.126253	26.80	21.88	45.00	-18.20	VERTICAL	PASSED
35.771543	29.20	28.84	48.40	-19.20	VERTICAL	PASSED
959.219840	22.50	13.34	23.60	-1.10	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
9421.851703	39.30	92.26	21.40	17.90	VERTICAL	PASSED
9724.456914	39.90	98.86	21.60	18.30	VERTICAL	PASSED
10423.843687	40.70	108.39	20.30	20.40	VERTICAL	PASSED
10962.429860	41.10	113.50	19.80	21.30	VERTICAL	PASSED
11020.546092	41.10	113.50	19.60	21.50	VERTICAL	PASSED
11621.250501	41.90	124.45	19.70	22.20	VERTICAL	PASSED

Test & Certification Center (TCC) - Dallas
DTXC 1280-EN-1.0

FCC ID: QMNRM-124
Test Report #: WR-1042.001
February 9, 2006

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

AMPS
USB Data Transfer

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.961924	33.10	45.19	44.50	-11.40	VERTICAL	PASSED
399.598798	40.20	102.33	45.20	-5.00	VERTICAL	PASSED
489.077555	20.70	10.84	24.10	-3.40	HORIZONTAL	PASSED
819.941283	26.80	21.88	23.60	3.20	VERTICAL	PASSED
933.367735	32.00	39.81	27.80	4.20	VERTICAL	PASSED

CDMA 1900
USB Data Transfer

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
32.242886	27.60	23.99	45.50	-17.90	VERTICAL	PASSED
399.600401	35.90	62.37	46.90	-11.00	VERTICAL	PASSED
486.773547	24.70	17.18	34.10	-9.40	VERTICAL	PASSED
488.977555	14.50	5.31	23.90	-9.40	VERTICAL	PASSED
801.203206	33.20	45.71	36.30	-3.10	HORIZONTAL	PASSED
931.561723	33.30	46.24	35.10	-1.80	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1201.902806	37.30	73.28	36.60	0.70	VERTICAL	PASSED
1602.202405	36.80	69.18	33.00	3.80	VERTICAL	PASSED
1876.761523	31.30	36.73	24.80	6.50	VERTICAL	PASSED
2002.004008	39.30	92.26	33.40	5.90	VERTICAL	PASSED
8352.705411	38.40	83.18	21.90	16.50	VERTICAL	PASSED
9726.960922	40.00	100.00	21.70	18.30	VERTICAL	PASSED
10440.881764	40.80	109.65	20.50	20.30	VERTICAL	PASSED
10925.349699	41.30	116.14	19.90	21.40	VERTICAL	PASSED