



Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Report No.: AGC13145210901FE05

Page 44 of 90

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density								
Test Mode	Test Channel Power density (MHz) (dBm/20kHz)		Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2412	2.157	-6.082		Pass			
802.11b	2437	-1.083	-9.322		Pass			
	2462	0.348	-7.891	- ≪8	Pass			
3	2412	-2.994	-11.233		Pass			
802.11g	2437	-4.525	-12.764	- \$8	Pass			
	2462	-2.906	-11.145		Pass			
60	2412	-3.083	-11.322	- ₹8	Pass			
802.11n20	2437	-4.148	-12.387		Pass			
	2462	-2.876	-11.115	- \$8	Pass			
z.C	2422	-5.292	-13.531	- \$8	Pass			
802.11n40	2437	-6.071	-14.31	- ₹8	Pass			
	2452	-5.075	-13.314		Pass			

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).



Test Graphs of Conducted Output Power Spectral Density




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test_Graph_802.11b_ANT1_2437_1Mbps_PSD







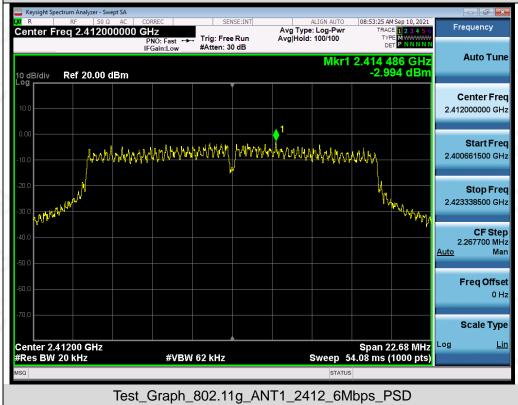


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



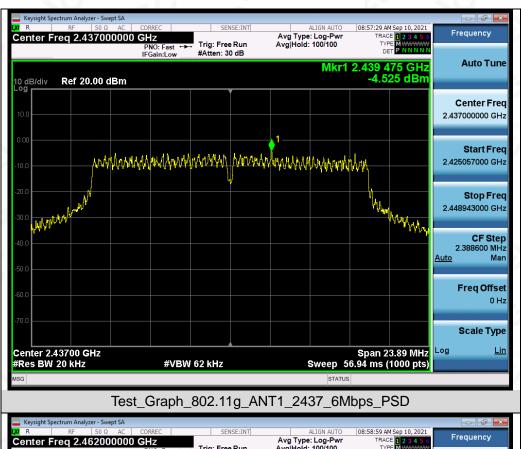

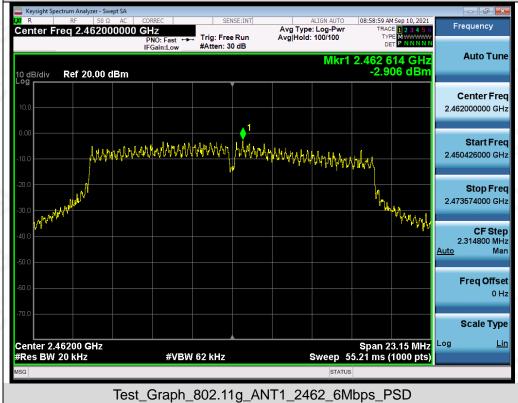



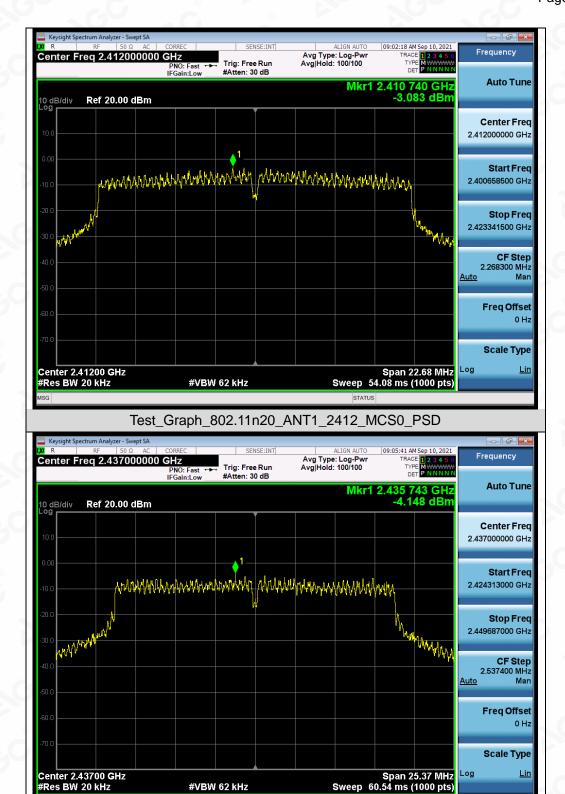


Compliance Besting/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or naving not been signed by authorized approver, or having been altered without authorization, or naving not been signed by according to the test results of the report is not permitted without the written authorization of AGC. The test results are the insulated by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test_Graph_802.11n20_ANT1_2437_MCS0_PSD

#VBW 62 kHz



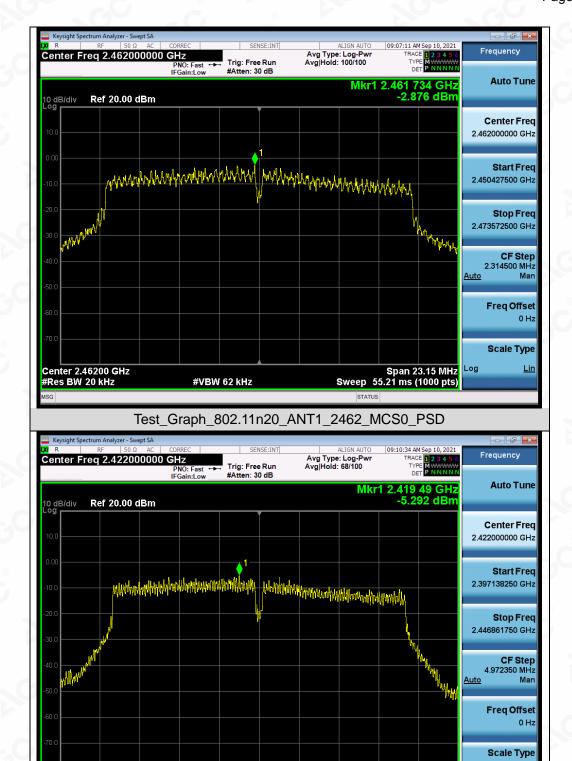

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test_Graph_802.11n40_ANT1_2422_MCS0_PSD

#VBW 62 kHz


Span 49.72 MHz Sweep 118.5 ms (1000 pts)

Center 2.42200 GHz #Res BW 20 kHz

Scale Type

Span 52.49 MHz Sweep 125.1 ms (1000 pts)



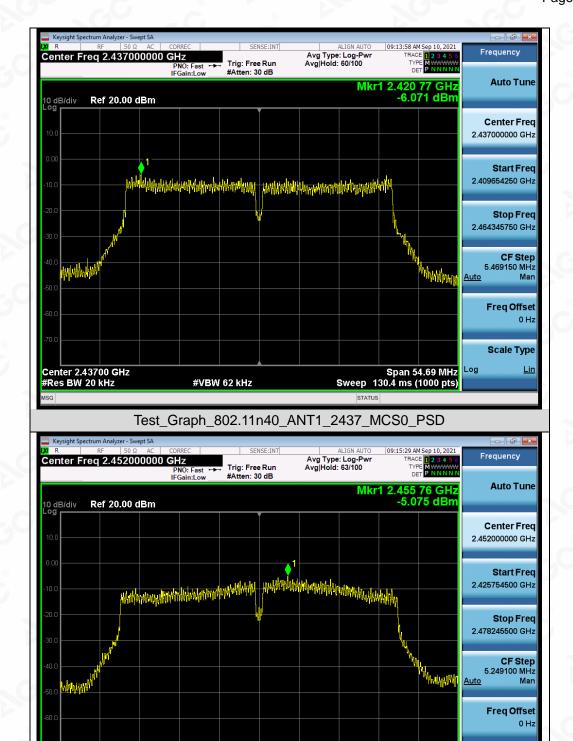


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test_Graph_802.11n40_ANT1_2452_MCS0_PSD

#VBW 62 kHz

Center 2.45200 GHz #Res BW 20 kHz





11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

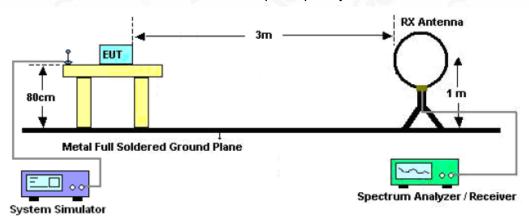

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

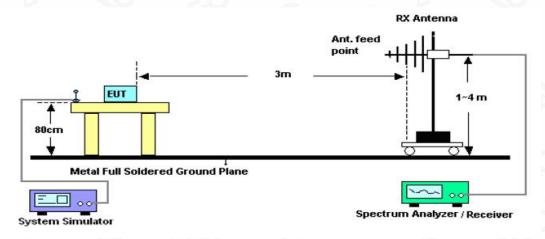

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

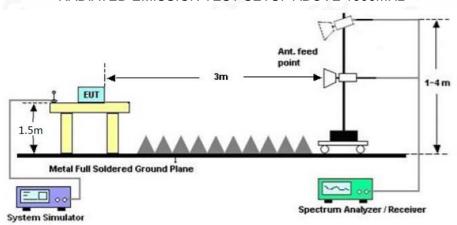

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC13145210901FE05

Page 53 of 90

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

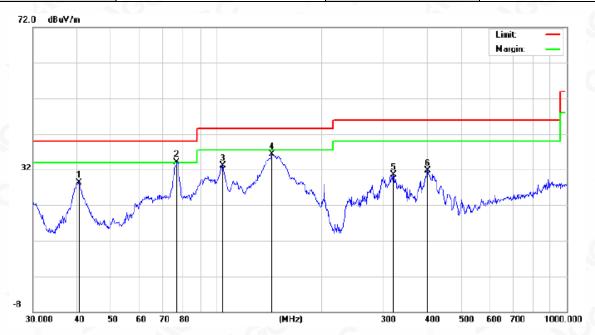


No. Mk. Freq. Reading Level Correct Factor Measurement Limit Over 1 40.5591 18.35 10.01 28.36 40.00 -11.64 peak 2 * 77.0504 24.95 9.17 34.12 40.00 -5.88 peak 3 104.1701 22.80 10.35 33.15 43.50 -10.35 peak 4 143.8294 24.02 12.36 36.38 43.50 -7.12 peak 5 319.9370 19.03 11.55 30.58 46.00 -15.42 peak 6 400.4318 17.78 13.97 31.75 46.00 -14.25 peak									
1 40.5591 18.35 10.01 28.36 40.00 -11.64 peak 2 * 77.0504 24.95 9.17 34.12 40.00 -5.88 peak 3 104.1701 22.80 10.35 33.15 43.50 -10.35 peak 4 143.8294 24.02 12.36 36.38 43.50 -7.12 peak 5 319.9370 19.03 11.55 30.58 46.00 -15.42 peak	No.	Mk	. Freq.	_			Limit	Over	
2 * 77.0504 24.95 9.17 34.12 40.00 -5.88 peak 3 104.1701 22.80 10.35 33.15 43.50 -10.35 peak 4 143.8294 24.02 12.36 36.38 43.50 -7.12 peak 5 319.9370 19.03 11.55 30.58 46.00 -15.42 peak			MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector
3 104.1701 22.80 10.35 33.15 43.50 -10.35 peak 4 143.8294 24.02 12.36 36.38 43.50 -7.12 peak 5 319.9370 19.03 11.55 30.58 46.00 -15.42 peak	1		40.5591	18.35	10.01	28.36	40.00	-11.64	peak
4 143.8294 24.02 12.36 36.38 43.50 -7.12 peak 5 319.9370 19.03 11.55 30.58 46.00 -15.42 peak	2	*	77.0504	24.95	9.17	34.12	40.00	-5.88	peak
5 319.9370 19.03 11.55 30.58 46.00 -15.42 peak	3		104.1701	22.80	10.35	33.15	43.50	-10.35	peak
	4		143.8294	24.02	12.36	36.38	43.50	-7.12	peak
6 400.4318 17.78 13.97 31.75 46.00 -14.25 peak	5		319.9370	19.03	11.55	30.58	46.00	-15.42	peak
	6		400.4318	17.78	13.97	31.75	46.00	-14.25	peak

RESULT: PASS




EUT	10.1inch Tablet PC	Model Name	SC-4032WKB	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical	

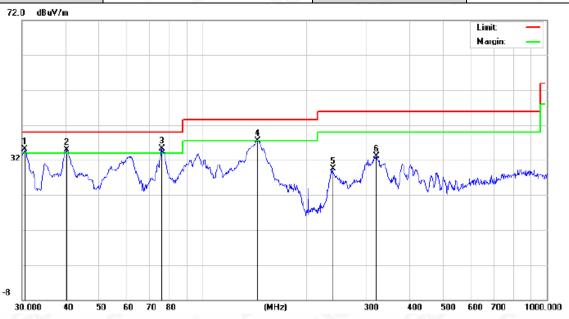

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	4
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	İ	30.5304	27.82	7.19	35.01	40.00	-4.99	peak
2	İ	40.2757	24.83	10.04	34.87	40.00	-5.13	peak
3	*	76.2442	24.56	10.75	35.31	40.00	-4.69	peak
4	İ	144.8418	24.83	12.74	37.57	43.50	-5.93	peak
5		239.1473	15.98	13.51	29.49	46.00	-16.51	peak
6		319.9370	18.75	14.37	33.12	46.00	-12.88	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.





Radiated emission above 1GHz

EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.28	0.08	56.36	74	-17.64	peak
4824.000	47.12	0.08	47.2	54	-6.8	AVG
7236.000	49.52	2.21	51.73	74	-22.27	peak
7236.000	40.37	2.21	42.58	54	-11.42	AVG
	0		· · · · · · · · · · · · · · · · · · ·			-C
mark:		10	20	8		
ctor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			®

Factor = Antenna Fac	tor + Cable Loss	– Pre-amplifier.

EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	56.91	0.08	56.99	74	-17.01	peak
4824.000	45.37	0.08	45.45	54	-8.55	AVG
7236.000	51.07	2.21	53.28	74	-20.72	peak
7236.000	40.35	2.21	42.56	54	-11.44	AVG
		@				©
		<u>-G</u>	8			
mark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Vertical

/Inspection The test results the test report.



Test Mode

EUT	10.1inch Tablet PC	Model Name	SC-4032WKB	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal	

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
47.81	0.14	47.95	74	-26.05	peak
47.64	0.14	47.78	54	-6.22	AVG
51.28	2.36	53.64	74	-20.36	peak
42.69	2.36	45.05	54	-8.95	AVG
8			-6	8	
	8			-6	8
	47.81 47.64 51.28	47.81 0.14 47.64 0.14 51.28 2.36	47.81 0.14 47.95 47.64 0.14 47.78 51.28 2.36 53.64	47.81 0.14 47.95 74 47.64 0.14 47.78 54 51.28 2.36 53.64 74	47.81 0.14 47.95 74 -26.05 47.64 0.14 47.78 54 -6.22 51.28 2.36 53.64 74 -20.36


EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage

Antenna

Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
56.97	0.14	57.11	74	-16.89	peak
46.72	0.14	46.86	54	-7.14	AVG
51.34	2.36	53.7	74	-20.3	peak
40.57	2.36	42.93	54	-11.07	AVG
©		10	G	8	
	(dBµV) 56.97 46.72 51.34	(dBµV) (dB) 56.97 0.14 46.72 0.14 51.34 2.36	(dBμV) (dB) (dBμV/m) 56.97 0.14 57.11 46.72 0.14 46.86 51.34 2.36 53.7	(dBμV) (dB) (dBμV/m) (dBμV/m) 56.97 0.14 57.11 74 46.72 0.14 46.86 54 51.34 2.36 53.7 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 56.97 0.14 57.11 74 -16.89 46.72 0.14 46.86 54 -7.14 51.34 2.36 53.7 74 -20.3

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

802.11b with date rate 1





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	55.26	0.22	55.48	74	-18.52	peak
4924.000	45.87	0.22	46.09	54	-7.91	AVG
7386.000	49.36	2.64	© 52	74	-22	peak
7386.000	40.27	2.64	42.91	54	-11.09	AVG
®				8		
emark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin 💮	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4924.000	56.29	0.22	56.51	74	-17.49	peak
4924.000	46.37	0.22	46.59	54	-7.41	AVG
7386.000	50.28	2.64	52.92	74	-21.08	peak
7386.000	40.13	2.64	42.77	54	-11.23	AVG
	1 3 GV	20	8			-,0
emark:			- 6	®		

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.




Test result for band edge emission at restricted bands

EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

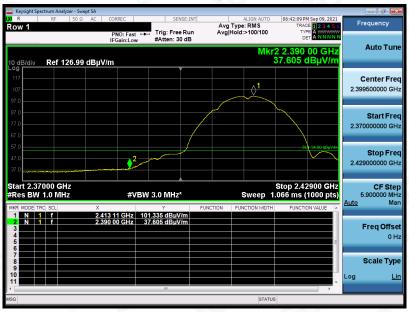

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

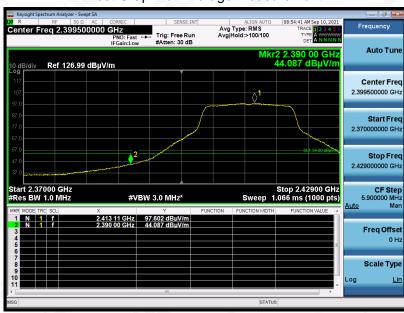




EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

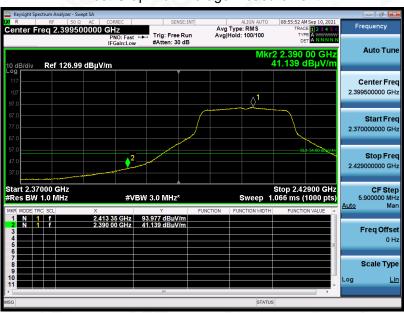



EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

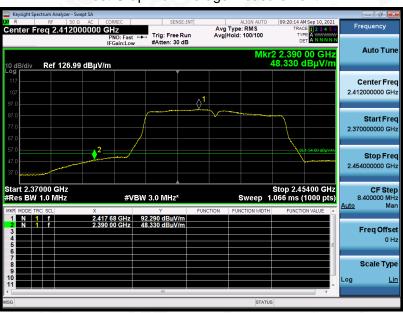




EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

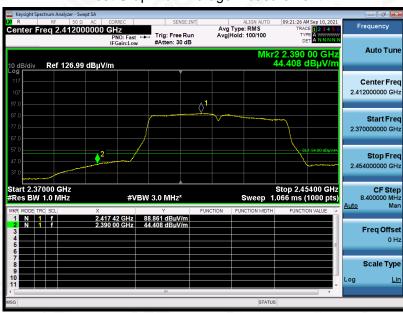

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	10.1inch Tablet PC	Model Name	SC-4032WKB
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


F	Maximum RF Line Voltage		
Frequency	Q.P (dBµV)	Average (dBμV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

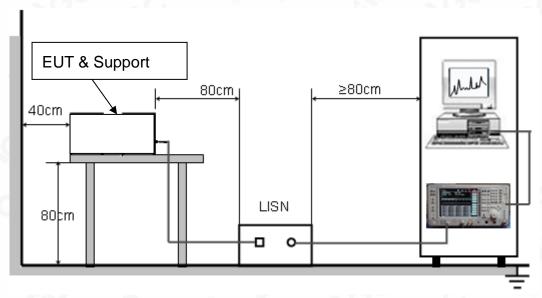





12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

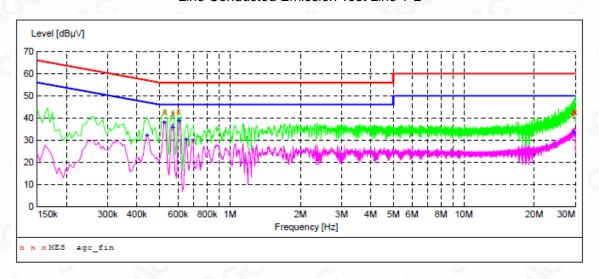

MEASUREMENT RESULT: "agc_fin"


2021/9/22	20:52					
Frequen M	cy Level Hz dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.5260		5.4	56		_	L1
0.5700	00 42.00	5.4	56	14.0	QP	L1
0.6020	00 43.00	5.4	56	13.0	QP	L1
29.1900	00 41.60	9.5	60	18.4	QP	L1
29.5940	00 43.20	9.5	60	16.8	QP	L1
29.9740	00 42.70	9.6	60	17.3	QP	L1

MEASUREMENT RESULT: "agc fin2"

2021/9/22 20	:52					
Frequency MHz			Limit dBµV	Margin dB	Detector	Line
0.442000	32.10	5.6	47	14.9	AV	L1
0.522000	38.10	5.4	46	7.9	AV	L1
0.570000	35.80	5.4	46	10.2	AV	L1
0.606000	38.70	5.4	46	7.3	AV	L1
0.650000	30.50	5.4	46	15.5	AV	L1
29.594000	33.60	9.5	50	16.4	ΔV	T.1



Line Conducted Emission Test Line 2-N

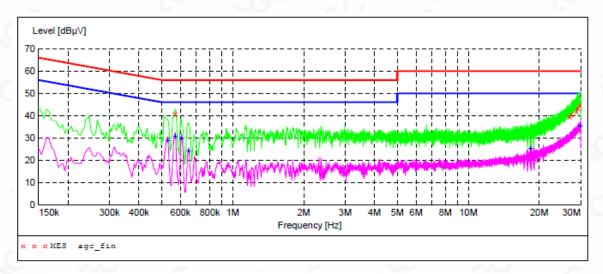

MEASUREMENT RESULT: "agc_fin"

	Limit dBµV	Margin dB	Detector	Line
5.4	56	15.1	QP	N
9.3	60	20.5	QP	N
9.4	60	19.7	QP	N
9.5	60	18.0	QP	N
9.5	60	16.6	QP	N
9.6	60	15.3	QP	N
	7 dB 5.4 9.3 9.4 9.5 9.5	7 dB dBμV 5.4 56 9.3 60 9.4 60 9.5 60 9.5 60	dB dBμV dB 0 5.4 56 15.1 9.3 60 20.5 9.4 60 19.7 9.5 60 18.0 9.5 60 16.6	5.4 56 15.1 QP 9.3 60 20.5 QP 9.4 60 19.7 QP 9.5 60 18.0 QP 9.5 60 16.6 QP

MEASUREMENT RESULT: "agc fin2"

2021/9/22	20:4	14					
Freque	ncy MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.530	000	28.80	5.4	46	17.2	AV	N
0.570	000	30.70	5.4	46	15.3	AV	N
0.606	000	30.10	5.4	46	15.9	AV	N
0.650	000	24.10	5.4	46	21.9	AV	N
18.382	000	25.50	8.7	50	24.5	AV	N
29.938	000	35.30	9.6	50	14.7	AV	N

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.