

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information										
Brand		ODM		RMN		Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)
HP Inc.		Compal		TPN-C166		No		Convertible PC		2.58mm
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor			Type			Antenna Part number (Main/Tx2)		Antenna Part number (Aux/Tx1)		
High-tek			PIFA			219HCTN12274		219HCTN12275		
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.59	2.46	0.8	1.25	1.03	1.03	1.08	1.89	2.19	2.81
Aux	0.99	0.5	1.17	1.19	2.59	2.59	2.98	2.32	2.76	2.76
Module Information										
Model		Form factor and suffixes								
MT7922A22M		Mediatek Tequini2 RZ616 Wi-Fi 6E +Bluetooth 5.3 M.2 2230 AIM-T 160MHz PCI-e+USB WW WLAN								

Antenna Information

Section 1. Antenna Assembly Specifications


1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N: 219HCTN12274 Main Antenna (TX2)	High-Tek Electronics Co., Ltd	PIFA	Connector: CM 958-C437-CM-B-YHU-AO 50 Ohm Coaxial Cable Length: 485 mm Diameter: 1.37 mm	2400-2495	2.59	3.62	3	1.03
				5150-5250	2.46	3.96	3	1.5
				5250-5350	0.8	2.3	3	1.5
				5470-5725	1.25	2.8	3	1.55
				5725-5850	1.03	2.65	3	1.62
				5850-5895	1.03	2.65	3	1.62
				5925-6425	1.08	2.74	3	1.66
				6425-6525	1.89	3.63	3	1.74
				6525-6875	2.19	3.95	3	1.76
				6875-7125	2.81	4.74	3	1.93
P/N: 219HCTN12275 Aux Antenna (TX1)	High-Tek Electronics Co., Ltd	PIFA	Connector: CM 958-C437-CM-B-YHU-AO 50 Ohm Coaxial Cable Length: 585 mm Diameter: 1.37 mm	2400-2495	0.99	2.22	3	1.23
				5150-5250	0.5	2.29	3	1.79
				5250-5350	1.17	2.97	3	1.8
				5470-5725	1.19	3.04	3	1.85
				5725-5850	2.59	4.48	3	1.89
				5850-5895	2.59	4.49	3	1.9
				5925-6425	2.98	4.92	3	1.94
				6425-6525	2.32	4.34	3	2.02
				6525-6875	2.76	4.82	3	2.06
				6875-7125	2.76	4.99	3	2.23

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	2.59

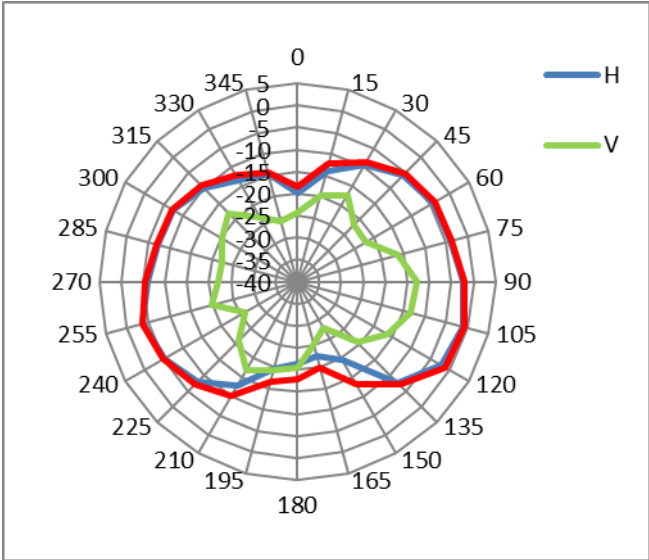


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.46

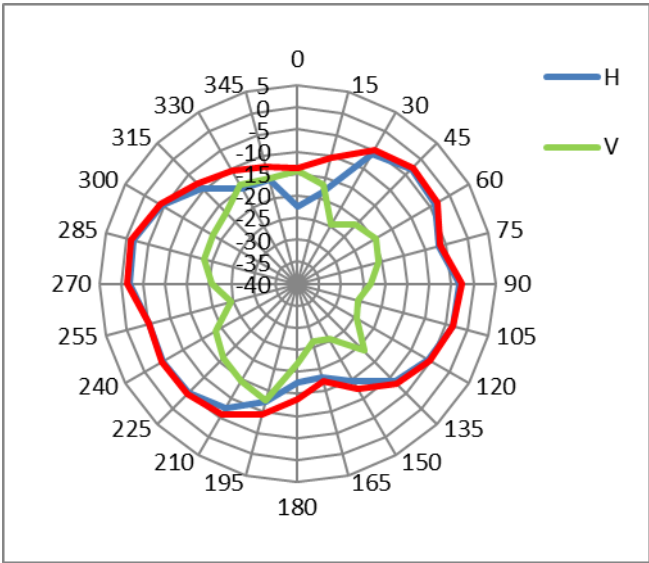


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	0.8

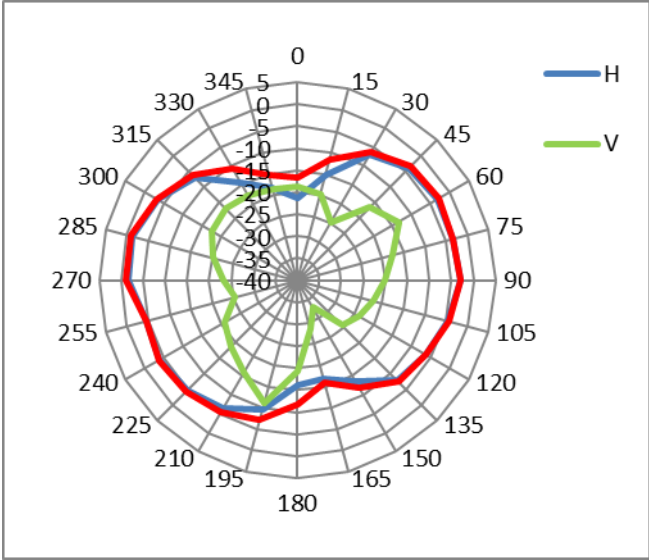


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	1.25

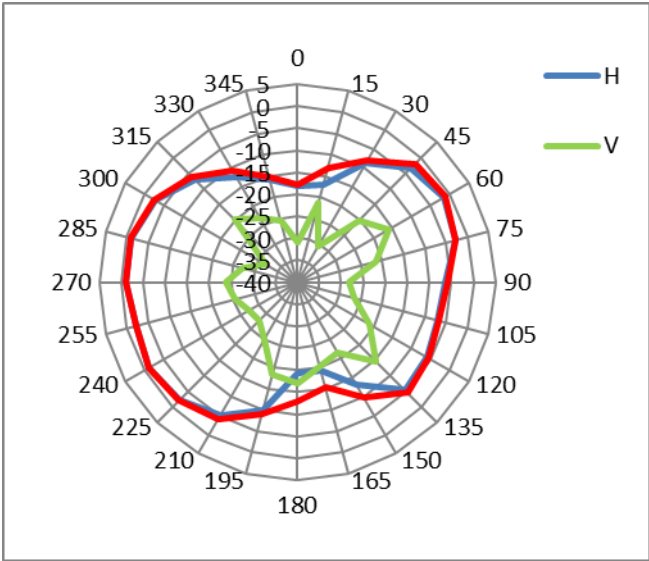


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	1.03

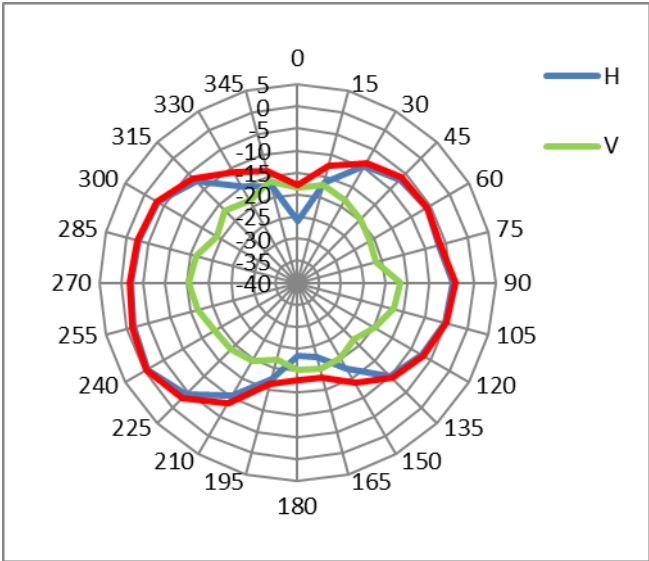


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	1.03

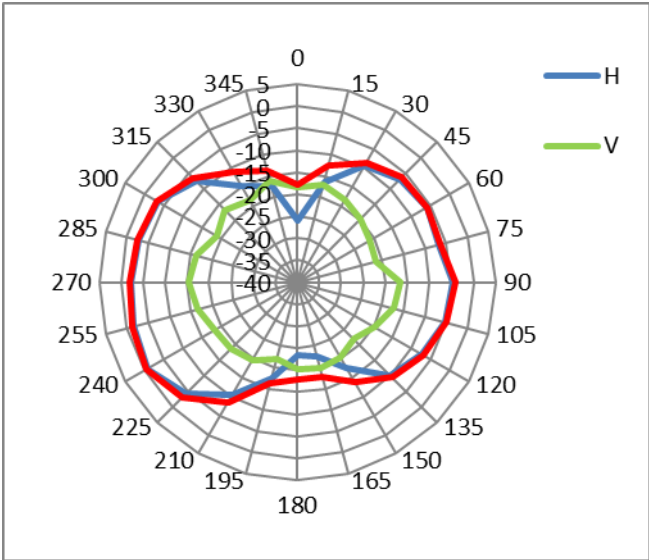


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	1.08

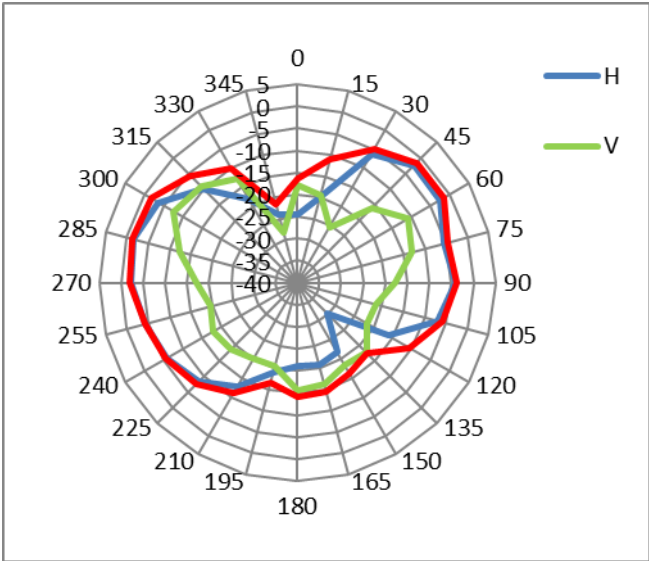


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	1.89

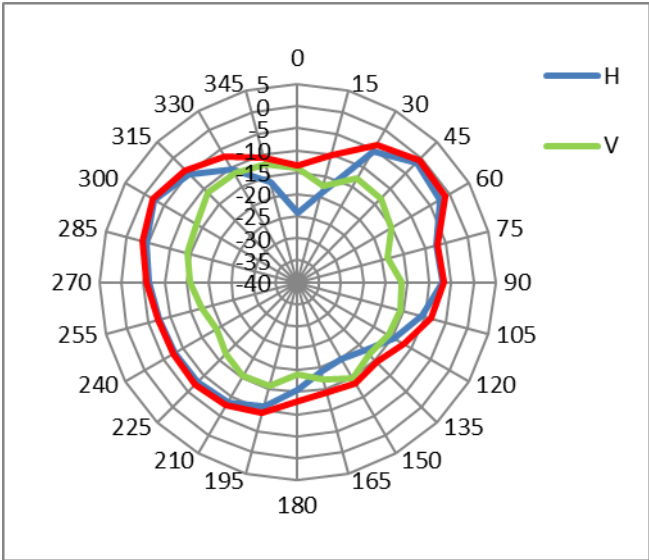


Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.19

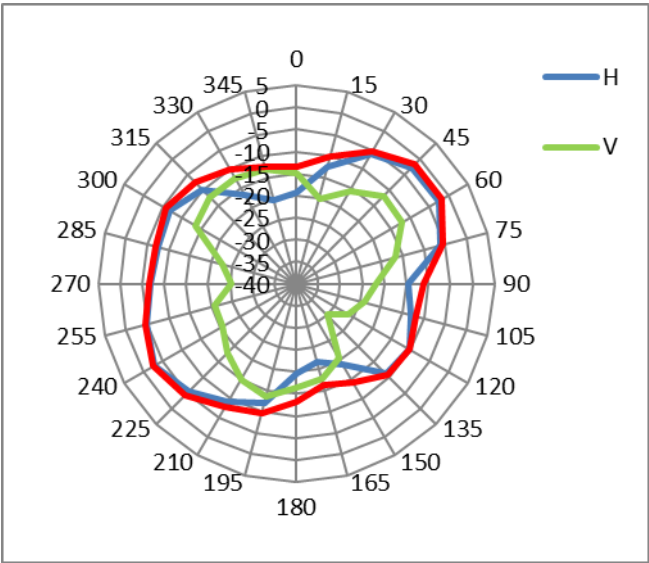

Max Antenna 2D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.81

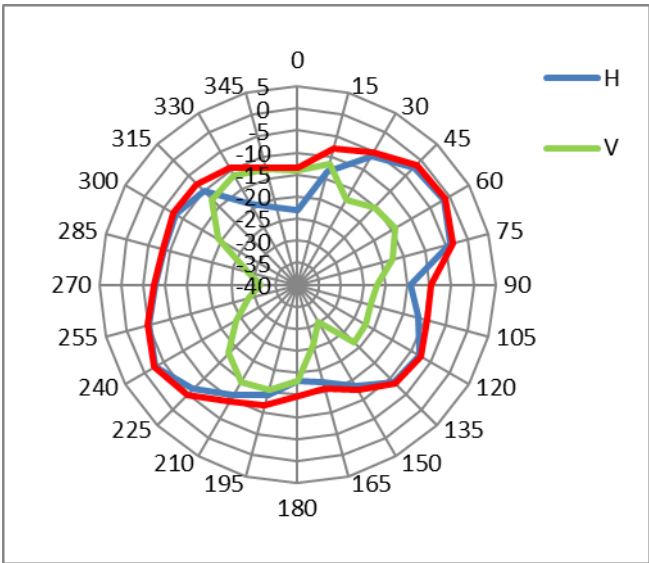

Auxiliary Antenna


Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	0.99

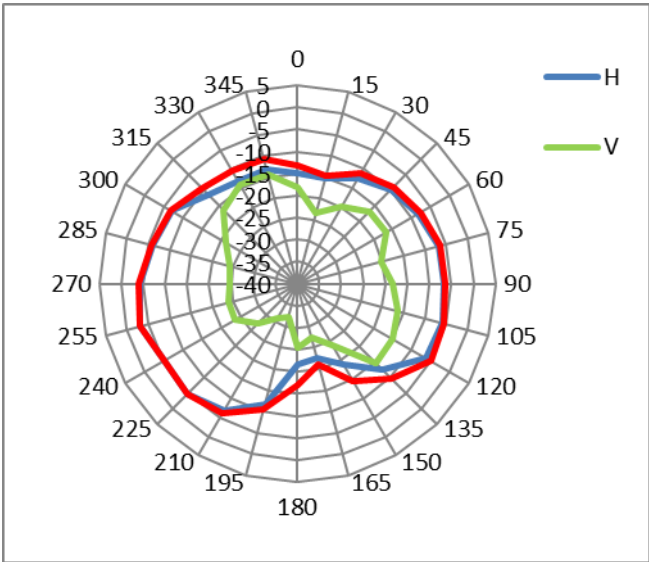


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	0.5

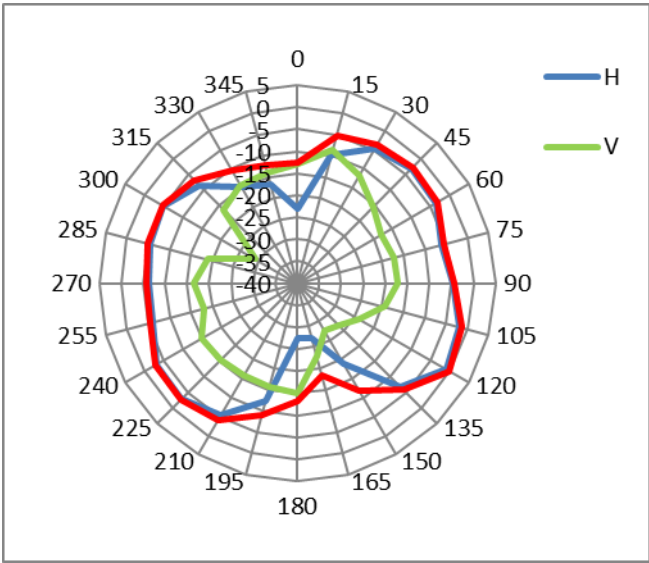


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	1.17

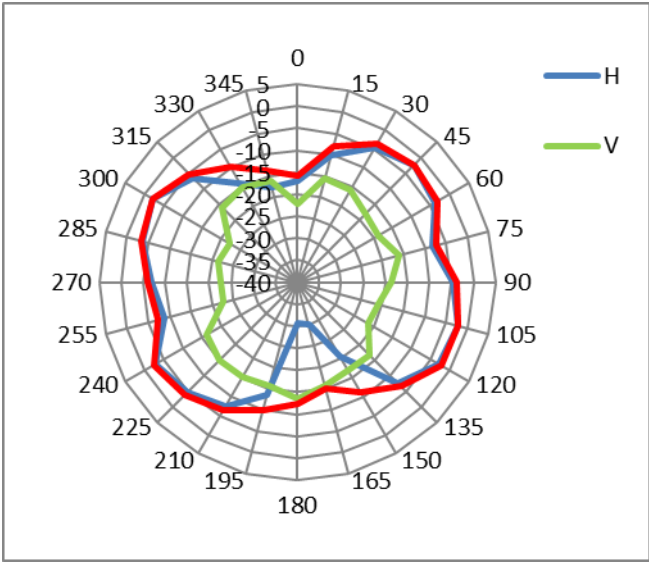


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	1.19

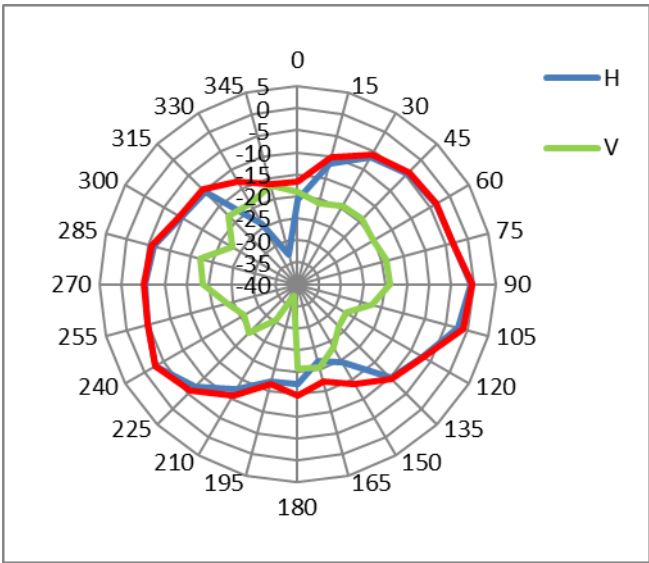


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.59

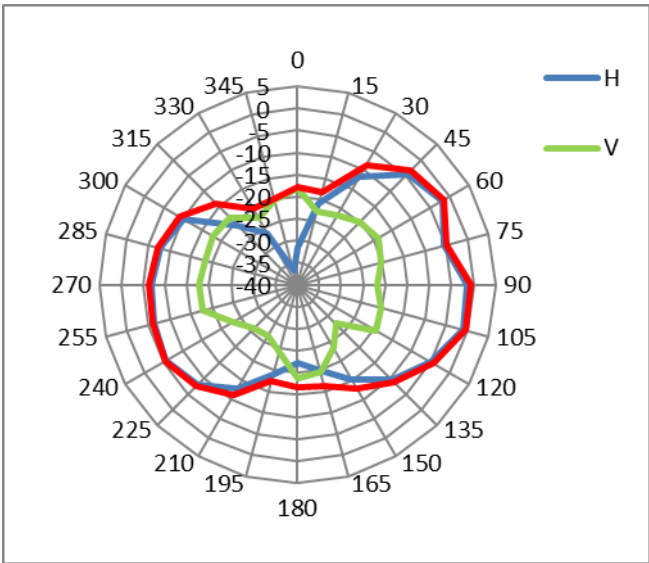


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.59

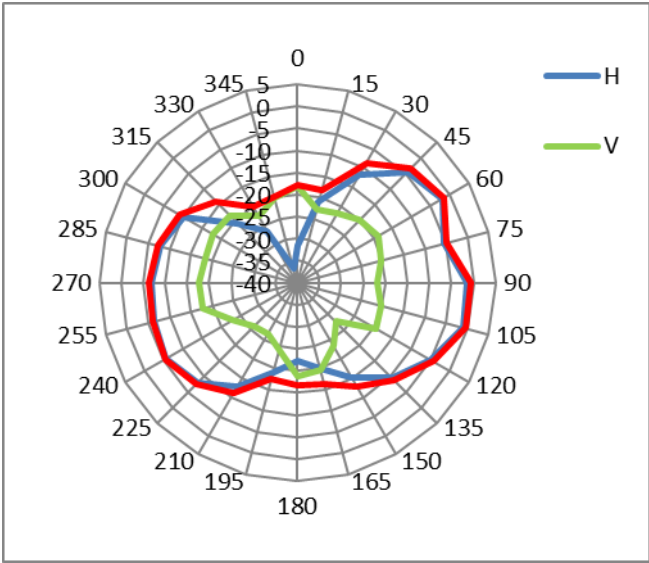


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.98

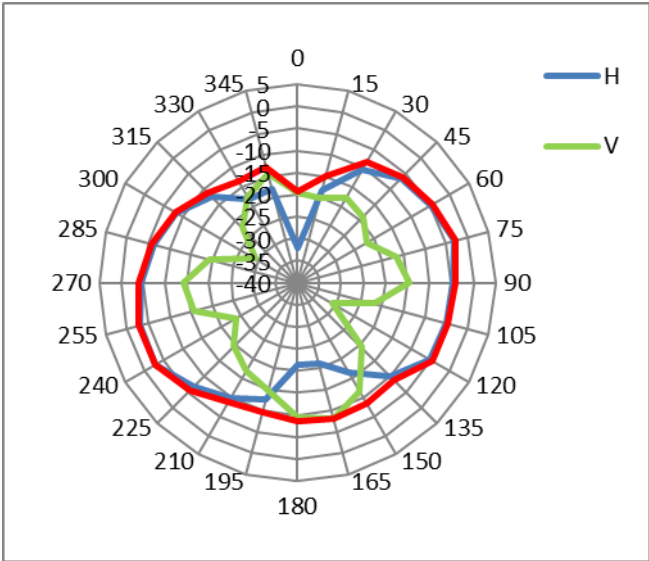


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.32

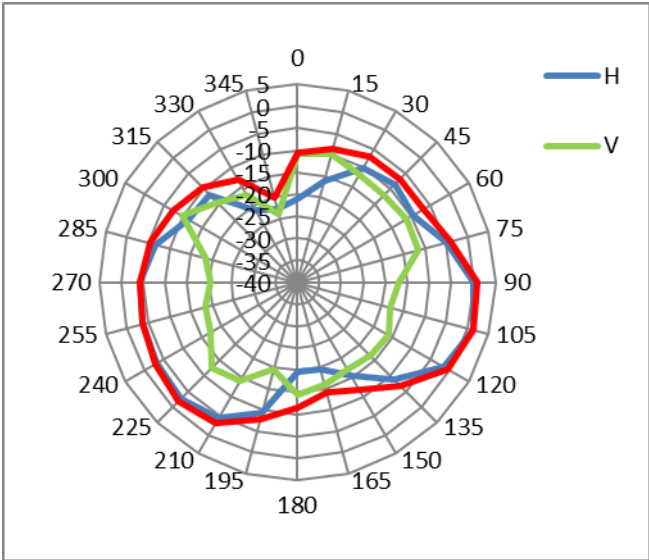

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.76

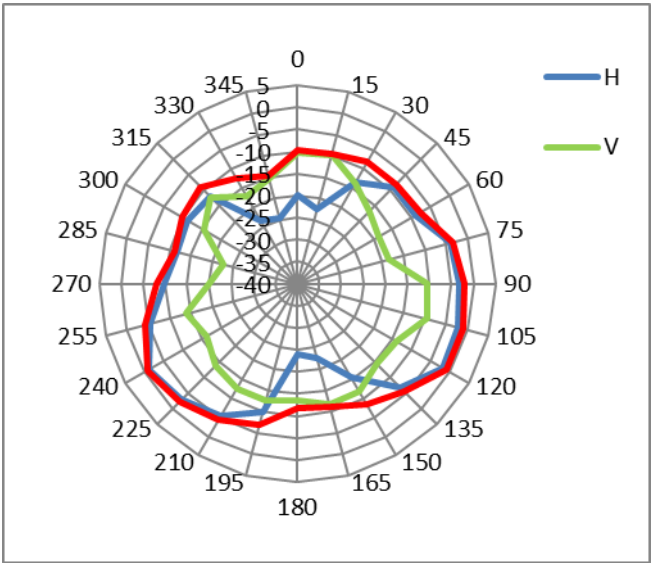

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.76

