



FCC CO-LOCATION RADIO TEST REPORT

FCC ID : 2AFZZRC04
Equipment : Xiaomi WiFi Range Extender AC1200
Brand Name : xiaomi
Model Name : RC04
Applicant : Xiaomi Communications Co., Ltd
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Manufacturer : Xiaomi Communications Co., Ltd
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Standard : FCC Part 15 Subpart E §15.407

The product was received on Apr. 24, 2024 and testing was performed from May 28, 2024 to May 29, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
3 Test Result	9
3.1 Unwanted Emissions Measurement	9
3.2 Antenna Requirements.....	14
4 List of Measuring Equipment.....	15
5 Measurement Uncertainty	16
Appendix A. Radiated Spurious Emission Test Data	
Appendix B. Duty Cycle Plots	
Appendix C. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR441123D	01	Initial issue of report	Jun. 21, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(b)	Unwanted Emissions	Pass	3.20 dB under the limit at 11160.00 MHz
3.2	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Michelle Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Wi-Fi 2.4GHz 802.11b/g/n and Wi-Fi 5GHz 802.11a/n/ac.		
Antenna Type WLAN: <Ant. 1> : External Antenna <Ant. 2> : External Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant. 1: 3.36 Ant. 2: 3.21
5470 MHz ~ 5720 MHz	Peak Gain (dBi)	Ant. 1: 3.72 Ant. 2: 3.93

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010 TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH23-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst plane recorded in this report.

2.1 Carrier Frequency and Channel


2400-2483.5 MHz		5470 MHz ~ 5725 MHz	
802.11b		802.11n HT20	
Channel	Freq. (MHz)	Channel	Freq. (MHz)
06	2437	116	5580

2.2 Test Mode

<Co-Location>

Test Mode	Modulation	Data Rate
Mode 1	WLAN 2.4GHz 802.11b for Ant. 1 + WLAN 5GHz 802.11n HT20 for MIMO <Ant. 1+2>	1Mbps + MCS0

2.3 Connection Diagram of Test System

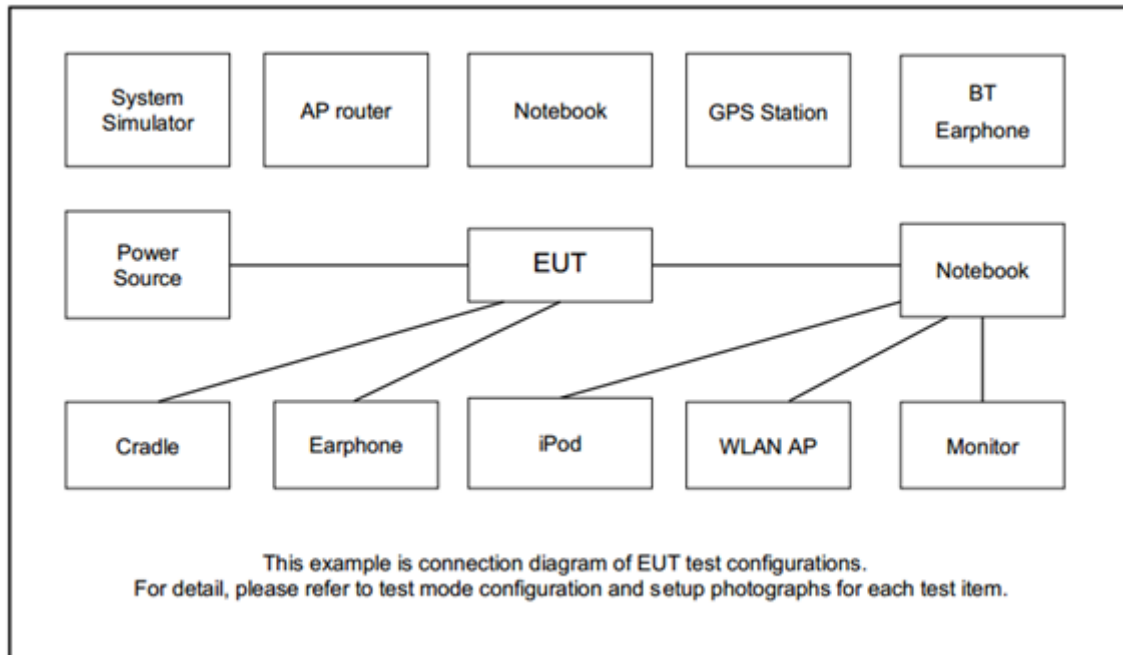

2.4 EUT Operation Test Setup

The RF test items, utility “Tera Term v4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ $1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.1.4 Test Setup


For radiated emissions below 30MHz

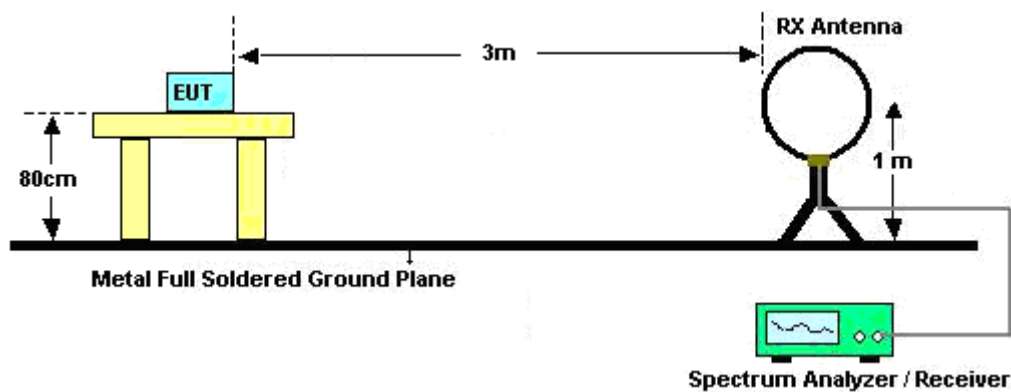


For radiated emissions from 30MHz to 1GHz

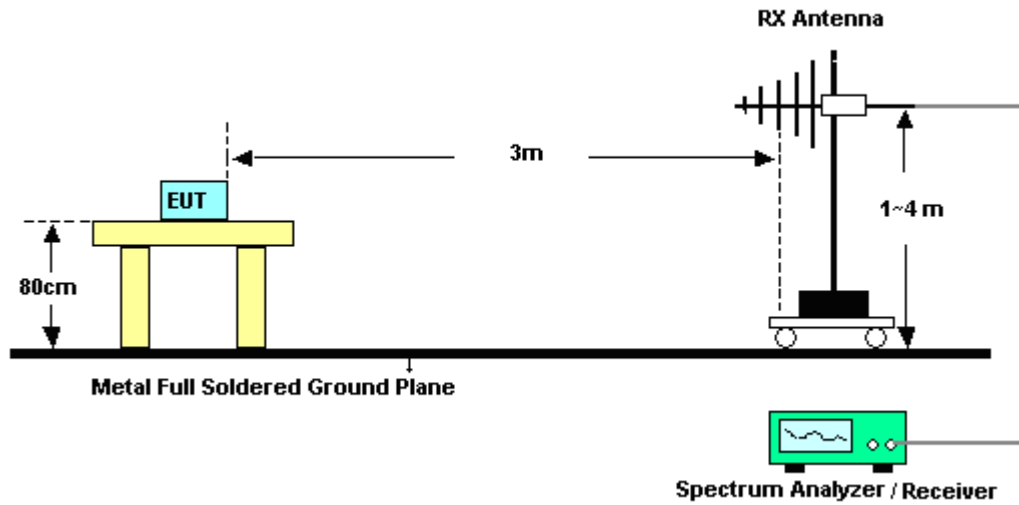

For radiated test from 1GHz to 18GHz

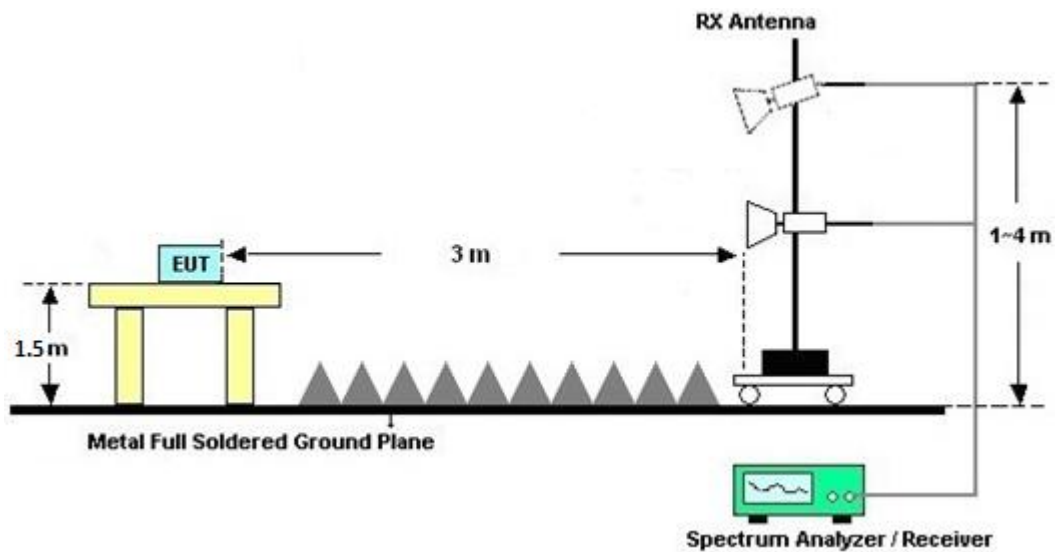

For radiated test above 18GHz

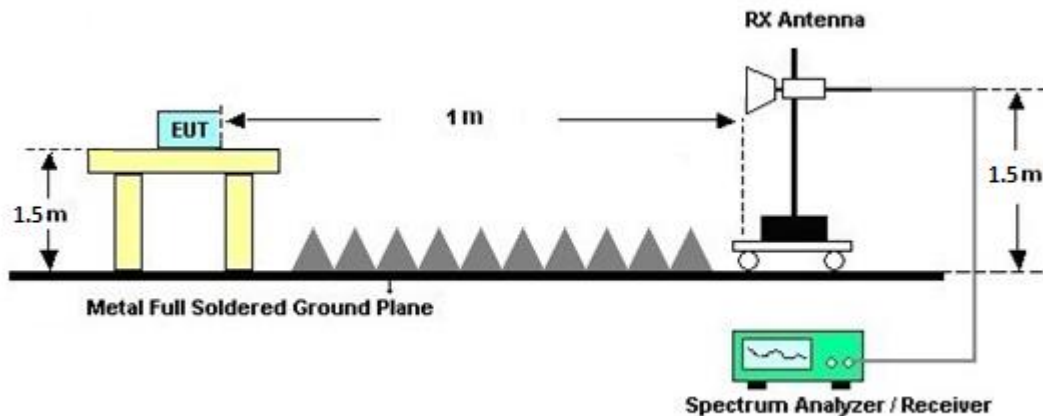

3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.2 Antenna Requirements

3.2.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Sep. 12, 2023	May 28, 2024~ May 29, 2024	Sep. 11, 2024	Radiation (03CH23-HY)
Bilog Antenna with 6dB pad	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	N/A	Oct. 15, 2023	May 28, 2024~ May 29, 2024	Oct. 14, 2024	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	N/A	Jul. 15, 2023	May 28, 2024~ May 29, 2024	Jul. 14, 2024	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jul. 12, 2023	May 28, 2024~ May 29, 2024	Jul. 11, 2024	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	1223	18GHz~40GHz	Jul. 10, 2023	May 28, 2024~ May 29, 2024	Jul. 09, 2024	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	N/A	Sep. 28, 2023	May 28, 2024~ May 29, 2024	Sep. 27, 2024	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060871	18-40GHz	Sep. 06, 2023	May 28, 2024~ May 29, 2024	Sep. 05, 2024	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	N/A	Aug. 17, 2023	May 28, 2024~ May 29, 2024	Aug. 16, 2024	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303B	TP211542	N/A	Oct. 30, 2023	May 28, 2024~ May 29, 2024	Oct. 29, 2024	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 28, 2024~ May 29, 2024	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 28, 2024~ May 29, 2024	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 28, 2024~ May 29, 2024	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019 122	RK-002348	N/A	N/A	May 28, 2024~ May 29, 2024	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	May 28, 2024~ May 29, 2024	Mar. 05, 2025	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 27, 2023	May 28, 2024~ May 29, 2024	Nov. 26, 2024	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/23111 9/231122	N/A	Nov. 27, 2023	May 28, 2024~ May 29, 2024	Nov. 26, 2024	Radiation (03CH23-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li and Lucifer Jiang	Temperature :	21.7~22.5°C
		Relative Humidity :	51.0~57.0%

-L	Low channel location
-R	High channel location







A1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
	5.47-5.725	1+2	802.11n HT20	116	5580	MCS0	-	-
	2400-2483.5	1	802.11b	06	2437	1Mbps	-	LF
	5.47-5.725	1+2	802.11n HT20	116	5580	MCS0	-	
	2400-2483.5	1	802.11b	06	2437	1Mbps	-	SHF
	5.47-5.725	1+2	802.11n HT20	116	5580	MCS0	-	



A2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	6	5418.77	46.29	54.00	-7.71	V	Avg.	Pass	-	Band Edge
	802.11n HT20	116	11160	50.80	54.00	-3.20	V	Avg.	Pass	-	Harmonic
	WLAN Tx LF	-	718.70	37.38	46.00	-8.62	V	Peak	Pass	-	LF
	WLAN Tx SHF	-	37646.00	47.17	68.20	-21.03	H	Peak	Pass	-	SHF

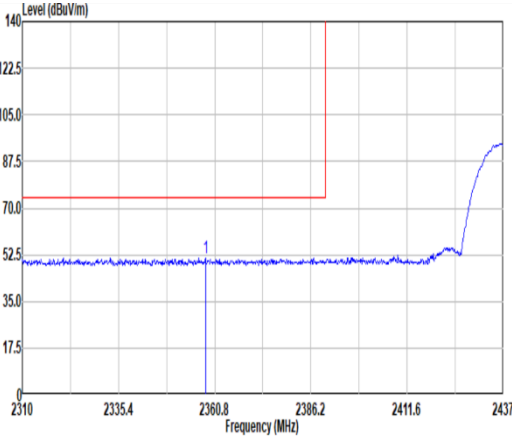
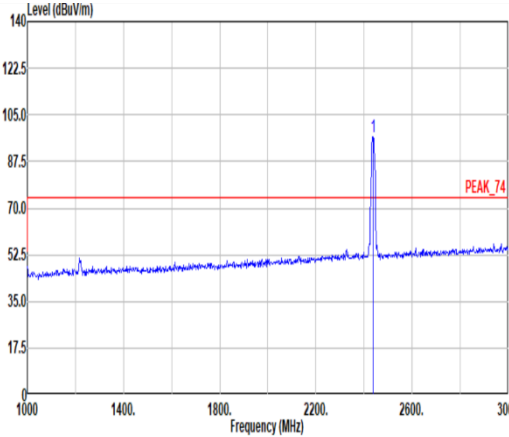
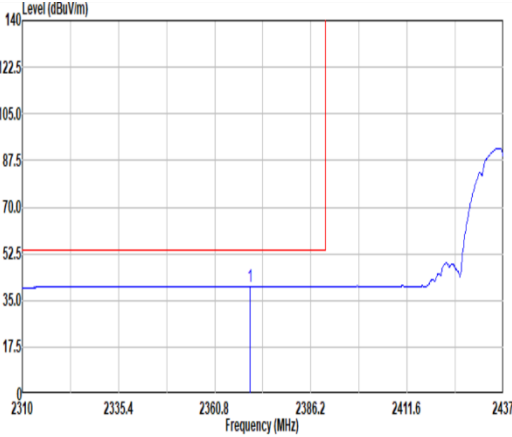
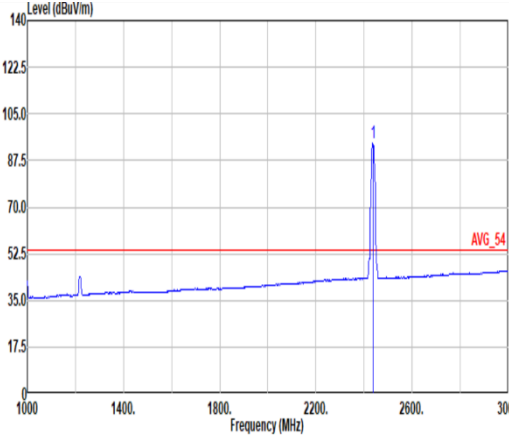


Mode	1																																																																																							
	Band Edge - L																																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2358.39</td><td>51.11</td><td>74.00</td><td>-22.89</td><td>37.72</td><td>27.10</td><td>7.28</td><td>31.71</td><td>10.43</td><td>300</td><td>284 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.39	51.11	74.00	-22.89	37.72	27.10	7.28	31.71	10.43	300	284 PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>96.94</td><td>-----</td><td>-----</td><td>83.66</td><td>26.86</td><td>7.41</td><td>31.76</td><td>10.46</td><td>300</td><td>284 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.94	-----	-----	83.66	26.86	7.41	31.76	10.46	300	284 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2358.39	51.11	74.00	-22.89	37.72	27.10	7.28	31.71	10.43	300	284 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2437.00	96.94	-----	-----	83.66	26.86	7.41	31.76	10.46	300	284 PEAK																																																																													
Avg	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2370.20</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>26.81</td><td>27.10</td><td>7.30</td><td>31.72</td><td>10.43</td><td>300</td><td>284 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2370.20	40.22	54.00	-13.78	26.81	27.10	7.30	31.72	10.43	300	284 AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>93.84</td><td>-----</td><td>-----</td><td>80.56</td><td>26.86</td><td>7.41</td><td>31.76</td><td>10.46</td><td>300</td><td>284 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	93.84	-----	-----	80.56	26.86	7.41	31.76	10.46	300	284 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2370.20	40.22	54.00	-13.78	26.81	27.10	7.30	31.72	10.43	300	284 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2437.00	93.84	-----	-----	80.56	26.86	7.41	31.76	10.46	300	284 AVERAGE																																																																													

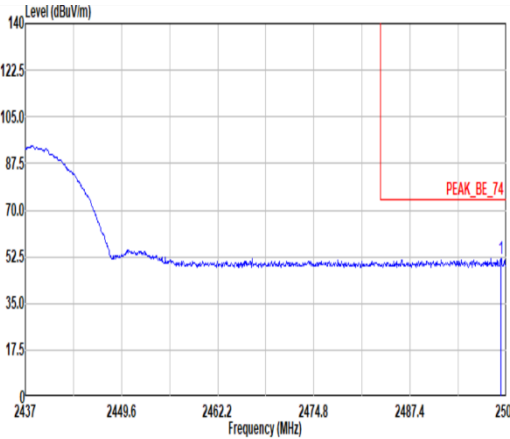
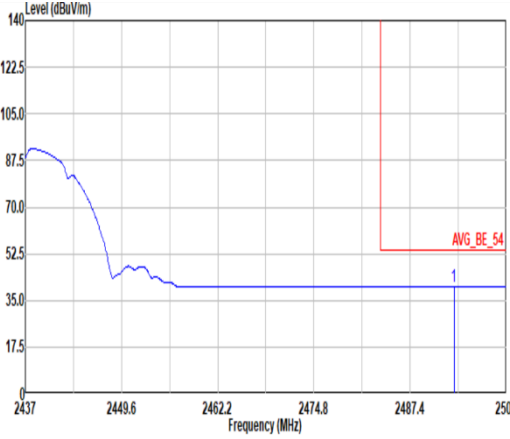


Mode	1																																										
	Band Edge - R																																										
	2400-2483.5_802.11b_CH06_2437MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2499.24</td><td>51.59</td><td>74.00</td><td>-22.41</td><td>38.21</td><td>26.90</td><td>7.49</td><td>31.80</td><td>10.48</td><td>300</td><td>284</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2499.24	51.59	74.00	-22.41	38.21	26.90	7.49	31.80	10.48	300	284	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																	
1 2499.24	51.59	74.00	-22.41	38.21	26.90	7.49	31.80	10.48	300	284	PEAK																																
Avg	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2493.13</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>26.88</td><td>26.90</td><td>7.49</td><td>31.80</td><td>10.48</td><td>300</td><td>284</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2493.13	40.26	54.00	-13.74	26.88	26.90	7.49	31.80	10.48	300	284	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																	
1 2493.13	40.26	54.00	-13.74	26.88	26.90	7.49	31.80	10.48	300	284	AVERAGE																																

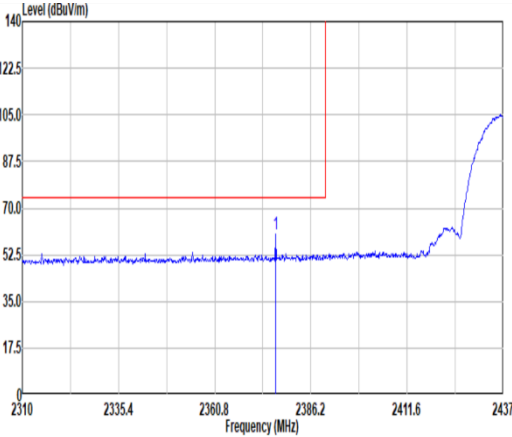
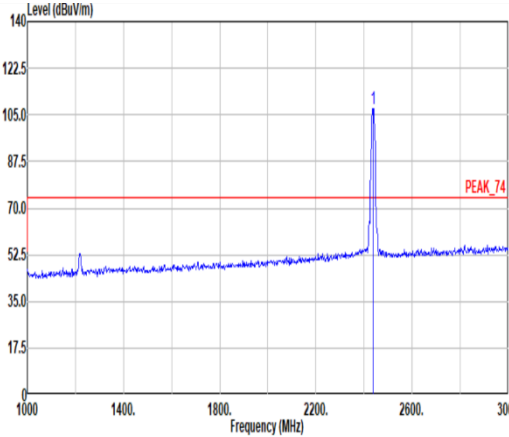
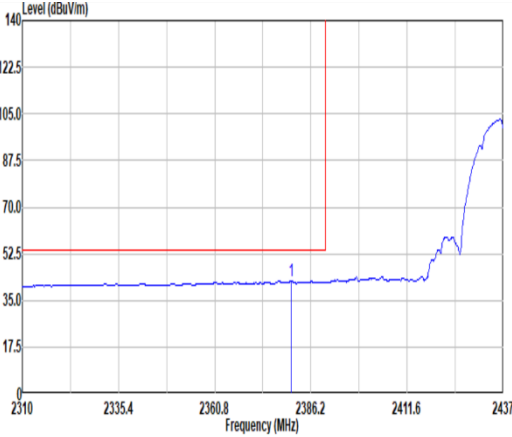
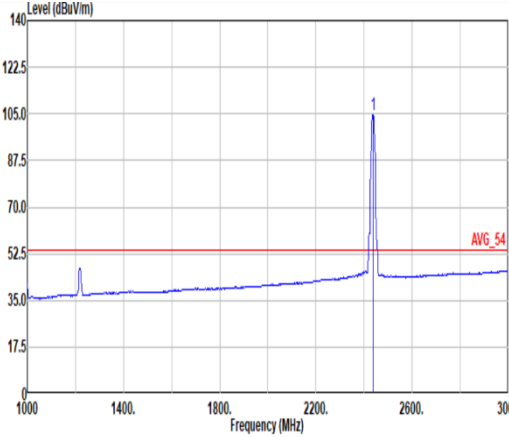


Mode	1																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.00</td><td>60.10</td><td>74.00</td><td>-13.90</td><td>46.74</td><td>27.03</td><td>7.32</td><td>31.72</td><td>10.43</td><td>127</td><td>162</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.00	60.10	74.00	-13.90	46.74	27.03	7.32	31.72	10.43	127	162	PEAK	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>107.50</td><td>-----</td><td>-----</td><td>94.22</td><td>26.86</td><td>7.41</td><td>31.76</td><td>10.46</td><td>127</td><td>162</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	107.50	-----	-----	94.22	26.86	7.41	31.76	10.46	127	162	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2376.00	60.10	74.00	-13.90	46.74	27.03	7.32	31.72	10.43	127	162	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2437.00	107.50	-----	-----	94.22	26.86	7.41	31.76	10.46	127	162	PEAK																																																																														
Avg	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2380.99</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>29.07</td><td>27.00</td><td>7.32</td><td>31.73</td><td>10.44</td><td>127</td><td>162</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2380.99	42.40	54.00	-11.60	29.07	27.00	7.32	31.73	10.44	127	162	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>104.40</td><td>-----</td><td>-----</td><td>91.10</td><td>26.88</td><td>7.41</td><td>31.76</td><td>10.46</td><td>127</td><td>162</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.40	-----	-----	91.10	26.88	7.41	31.76	10.46	127	162	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2380.99	42.40	54.00	-11.60	29.07	27.00	7.32	31.73	10.44	127	162	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2437.00	104.40	-----	-----	91.10	26.88	7.41	31.76	10.46	127	162	AVERAGE																																																																														

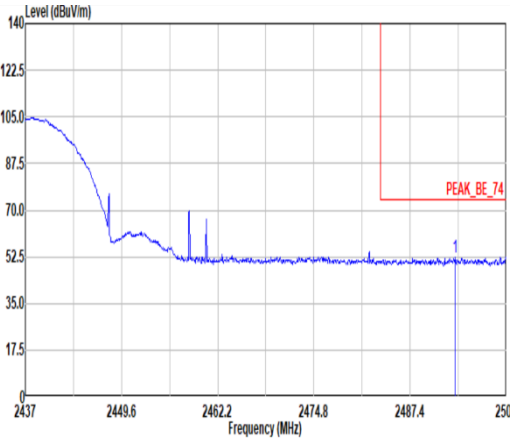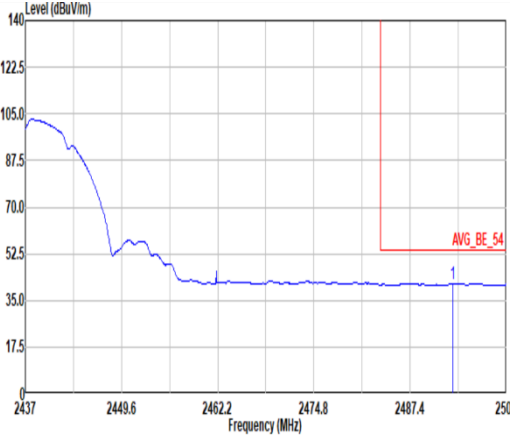


Mode	1																																													
	Band Edge - R																																													
	2400-2483.5_802.11b_CH06_2437MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.32</td><td>52.28</td><td>74.00</td><td>-21.72</td><td>38.90</td><td>26.90</td><td>7.49</td><td>31.80</td><td>10.48</td><td>127</td><td>162</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2493.32	52.28	74.00	-21.72	38.90	26.90	7.49	31.80	10.48	127	162	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2493.32	52.28	74.00	-21.72	38.90	26.90	7.49	31.80	10.48	127	162	PEAK																																		
Avg	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.94</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>27.93</td><td>26.90</td><td>7.49</td><td>31.80</td><td>10.48</td><td>127</td><td>162</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2492.94	41.31	54.00	-12.69	27.93	26.90	7.49	31.80	10.48	127	162	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2492.94	41.31	54.00	-12.69	27.93	26.90	7.49	31.80	10.48	127	162	AVERAGE																																		

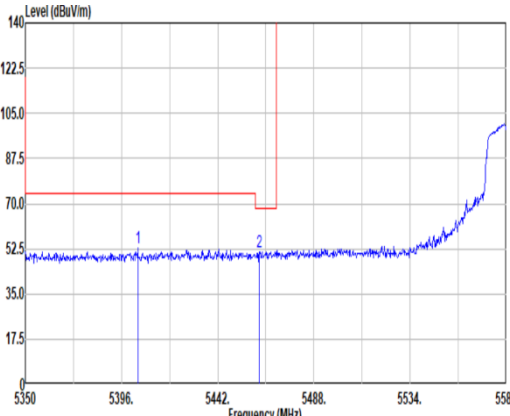
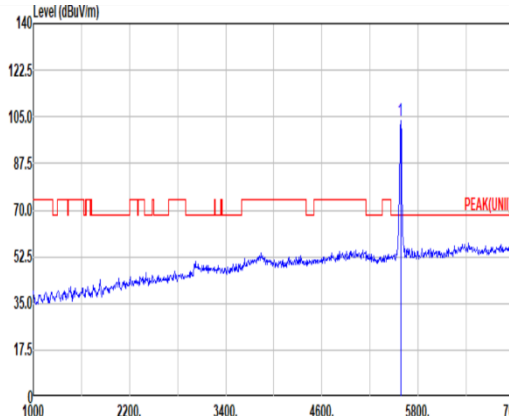
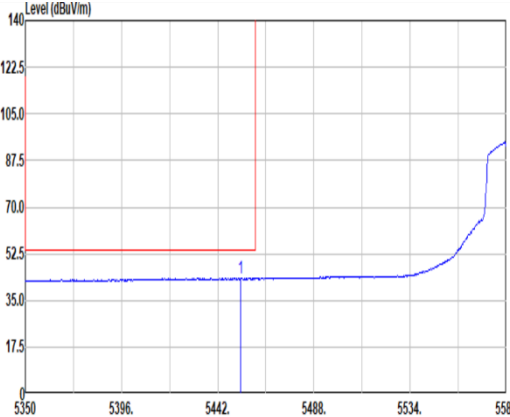
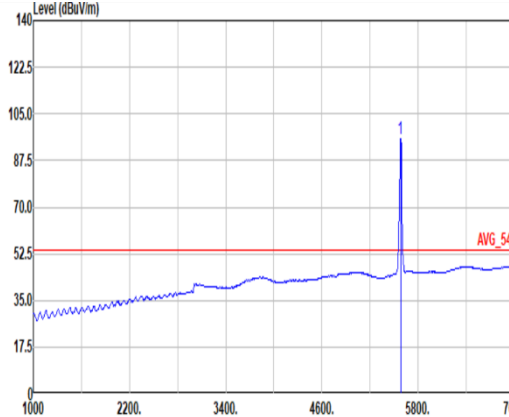


		36																																																																																																														
Mode	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5403.82</td><td>52.66</td><td>74.00</td><td>-21.34</td><td>37.69</td><td>32.52</td><td>11.19</td><td>33.59</td><td>4.09</td><td>400</td><td>318</td><td>PEAK</td></tr><tr><td>2</td><td>5461.78</td><td>51.48</td><td>68.20</td><td>-16.72</td><td>36.40</td><td>32.72</td><td>11.20</td><td>33.68</td><td>4.11</td><td>400</td><td>318</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5403.82	52.66	74.00	-21.34	37.69	32.52	11.19	33.59	4.09	400	318	PEAK	2	5461.78	51.48	68.20	-16.72	36.40	32.72	11.20	33.68	4.11	400	318	PEAK	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>103.52</td><td>-----</td><td>-----</td><td>88.19</td><td>33.07</td><td>11.22</td><td>33.79</td><td>4.15</td><td>400</td><td>318</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5580.00	103.52	-----	-----	88.19	33.07	11.22	33.79	4.15	400	318
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5403.82	52.66	74.00	-21.34	37.69	32.52	11.19	33.59	4.09	400	318	PEAK																																																																																																				
2	5461.78	51.48	68.20	-16.72	36.40	32.72	11.20	33.68	4.11	400	318	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5580.00	103.52	-----	-----	88.19	33.07	11.22	33.79	4.15	400	318	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5453.04</td><td>43.23</td><td>54.00</td><td>-10.77</td><td>28.14</td><td>32.71</td><td>11.20</td><td>33.67</td><td>4.11</td><td>400</td><td>318</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5453.04	43.23	54.00	-10.77	28.14	32.71	11.20	33.67	4.11	400	318	AVERAGE	Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>95.68</td><td>-----</td><td>-----</td><td>80.35</td><td>33.07</td><td>11.22</td><td>33.79</td><td>4.15</td><td>400</td><td>318</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5580.00	95.68	-----	-----	80.35	33.07	11.22	33.79	4.15	400	318	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5453.04	43.23	54.00	-10.77	28.14	32.71	11.20	33.67	4.11	400	318	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5580.00	95.68	-----	-----	80.35	33.07	11.22	33.79	4.15	400	318	AVERAGE																																																																																																				

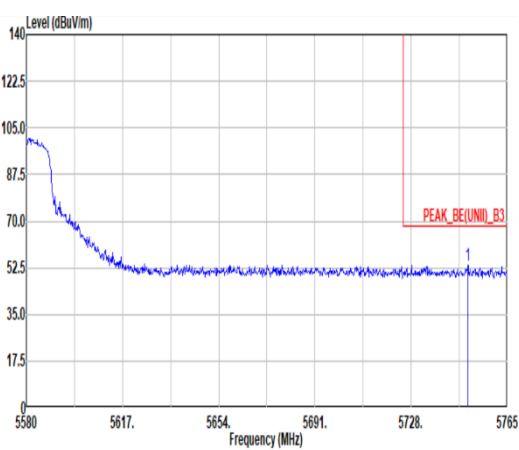


Mode	36																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																													
ANT	1+2																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5749.83</td><td>53.32</td><td>68.20</td><td>-14.88</td><td>37.49</td><td>33.90</td><td>10.99</td><td>33.89</td><td>4.19</td><td>400</td><td>318</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5749.83	53.32	68.20	-14.88	37.49	33.90	10.99	33.89	4.19	400	318	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5749.83	53.32	68.20	-14.88	37.49	33.90	10.99	33.89	4.19	400	318	PEAK																																		

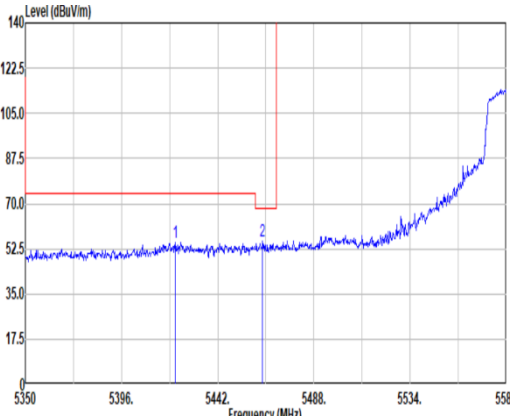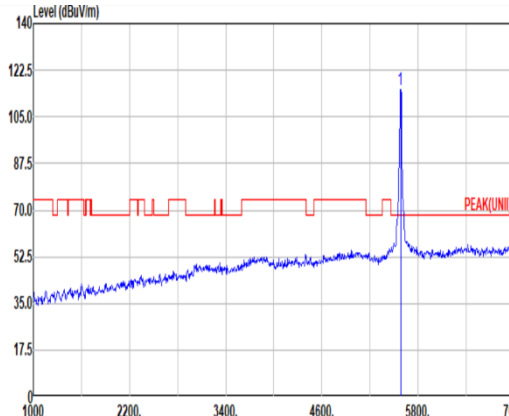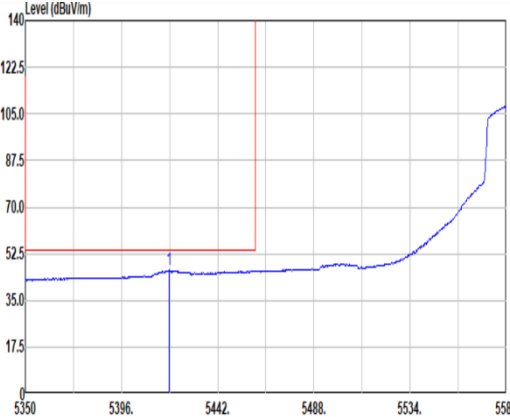
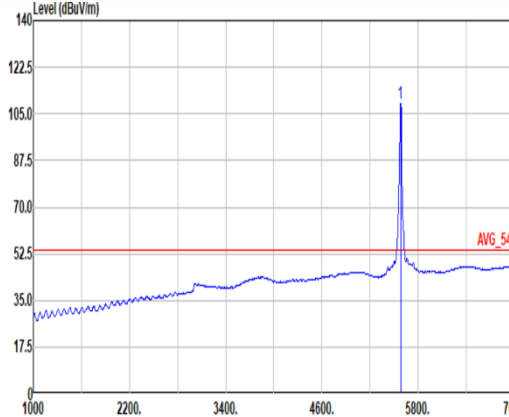


Mode	36																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5421.76</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>39.90</td><td>32.59</td><td>11.19</td><td>33.62</td><td>4.10</td><td>253</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5463.39</td><td>55.58</td><td>68.20</td><td>-12.62</td><td>40.49</td><td>32.73</td><td>11.20</td><td>33.68</td><td>4.11</td><td>253</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5421.76	54.91	74.00	-19.09	39.90	32.59	11.19	33.62	4.10	253	360	PEAK	2	5463.39	55.58	68.20	-12.62	40.49	32.73	11.20	33.68	4.11	253	360	PEAK	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>115.30</td><td>-----</td><td>-----</td><td>99.97</td><td>33.07</td><td>11.22</td><td>33.79</td><td>4.15</td><td>253</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	115.30	-----	-----	99.97	33.07	11.22	33.79	4.15	253	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5421.76	54.91	74.00	-19.09	39.90	32.59	11.19	33.62	4.10	253	360	PEAK																																																																																																				
2	5463.39	55.58	68.20	-12.62	40.49	32.73	11.20	33.68	4.11	253	360	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5580.00	115.30	-----	-----	99.97	33.07	11.22	33.79	4.15	253	360	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5418.77</td><td>46.29</td><td>54.00</td><td>-7.71</td><td>31.29</td><td>32.58</td><td>11.19</td><td>33.62</td><td>4.10</td><td>253</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5418.77	46.29	54.00	-7.71	31.29	32.58	11.19	33.62	4.10	253	360	AVERAGE	Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>109.00</td><td>-----</td><td>-----</td><td>93.68</td><td>33.06</td><td>11.22</td><td>33.79</td><td>4.15</td><td>253</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	109.00	-----	-----	93.68	33.06	11.22	33.79	4.15	253	360	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5418.77	46.29	54.00	-7.71	31.29	32.58	11.19	33.62	4.10	253	360	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5580.00	109.00	-----	-----	93.68	33.06	11.22	33.79	4.15	253	360	AVERAGE																																																																																																				

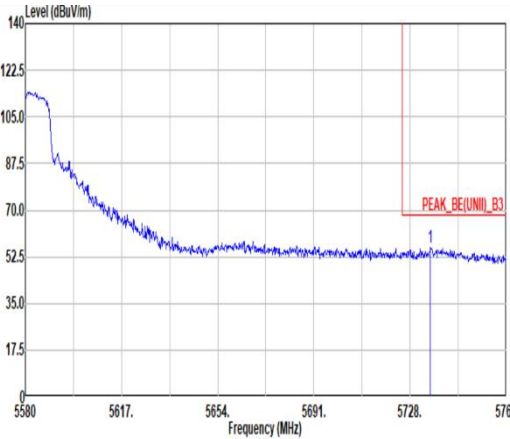

Mode	36																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																													
ANT	1+2																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5735.77</td><td>55.96</td><td>68.20</td><td>-12.24</td><td>40.16</td><td>33.84</td><td>11.01</td><td>33.88</td><td>4.19</td><td>253</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5735.77	55.96	68.20	-12.24	40.16	33.84	11.01	33.88	4.19	253	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5735.77	55.96	68.20	-12.24	40.16	33.84	11.01	33.88	4.19	253	360	PEAK																																		

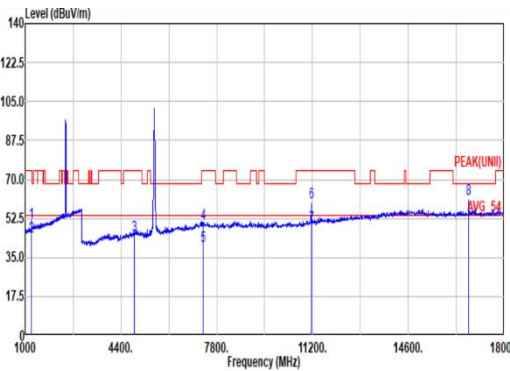
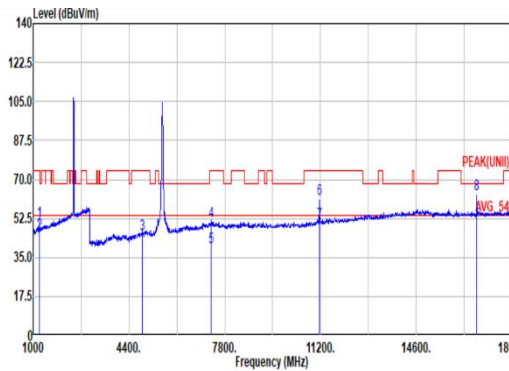


Mode	1																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																												
Peak																																																																																																																																																																																																																														
Avg	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1218.50</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>42.30</td><td>23.60</td><td>5.49</td><td>31.01</td><td>10.16</td><td>400 265 Peak</td></tr><tr><td>2 1218.50</td><td>44.21</td><td>54.00</td><td>-9.79</td><td>35.63</td><td>23.60</td><td>5.49</td><td>31.01</td><td>10.16</td><td>400 265 Average</td></tr><tr><td>3 4874.00</td><td>45.12</td><td>74.00</td><td>-28.88</td><td>33.19</td><td>32.60</td><td>10.52</td><td>32.98</td><td>1.79</td><td>-- -- Peak</td></tr><tr><td>4 7311.00</td><td>50.15</td><td>74.00</td><td>-23.85</td><td>33.45</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.42</td><td>-- -- Peak</td></tr><tr><td>5 7311.00</td><td>39.91</td><td>54.00</td><td>-14.09</td><td>23.21</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.42</td><td>-- -- Average</td></tr><tr><td>6 11160.00</td><td>59.92</td><td>74.00</td><td>-14.08</td><td>43.86</td><td>38.04</td><td>15.31</td><td>39.47</td><td>2.18</td><td>286 128 Peak</td></tr><tr><td>7 11160.00</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>33.12</td><td>38.04</td><td>15.31</td><td>39.47</td><td>2.18</td><td>286 128 Average</td></tr><tr><td>8 16740.00</td><td>61.44</td><td>68.20</td><td>-6.76</td><td>45.02</td><td>40.38</td><td>18.69</td><td>45.79</td><td>3.14</td><td>302 52 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1218.50	50.88	74.00	-23.12	42.30	23.60	5.49	31.01	10.16	400 265 Peak	2 1218.50	44.21	54.00	-9.79	35.63	23.60	5.49	31.01	10.16	400 265 Average	3 4874.00	45.12	74.00	-28.88	33.19	32.60	10.52	32.98	1.79	-- -- Peak	4 7311.00	50.15	74.00	-23.85	33.45	37.20	12.62	35.54	2.42	-- -- Peak	5 7311.00	39.91	54.00	-14.09	23.21	37.20	12.62	35.54	2.42	-- -- Average	6 11160.00	59.92	74.00	-14.08	43.86	38.04	15.31	39.47	2.18	286 128 Peak	7 11160.00	49.18	54.00	-4.82	33.12	38.04	15.31	39.47	2.18	286 128 Average	8 16740.00	61.44	68.20	-6.76	45.02	40.38	18.69	45.79	3.14	302 52 Peak	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1218.50</td><td>51.51</td><td>74.00</td><td>-22.49</td><td>42.93</td><td>23.60</td><td>5.49</td><td>31.01</td><td>10.16</td><td>100 155 Peak</td></tr><tr><td>2 1218.50</td><td>45.74</td><td>54.00</td><td>-8.26</td><td>37.16</td><td>23.60</td><td>5.49</td><td>31.01</td><td>10.16</td><td>100 155 Average</td></tr><tr><td>3 4874.00</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>33.27</td><td>32.60</td><td>10.52</td><td>32.98</td><td>1.79</td><td>-- -- Peak</td></tr><tr><td>4 7311.00</td><td>51.13</td><td>74.00</td><td>-22.87</td><td>34.43</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.42</td><td>-- -- Peak</td></tr><tr><td>5 7311.00</td><td>39.87</td><td>54.00</td><td>-14.13</td><td>23.17</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.42</td><td>-- -- Average</td></tr><tr><td>6 11160.00</td><td>61.07</td><td>74.00</td><td>-12.93</td><td>45.01</td><td>38.04</td><td>15.31</td><td>39.47</td><td>2.18</td><td>318 251 Peak</td></tr><tr><td>7 11160.00</td><td>50.80</td><td>54.00</td><td>-3.20</td><td>34.74</td><td>38.04</td><td>15.31</td><td>39.47</td><td>2.18</td><td>318 251 Average</td></tr><tr><td>8 16740.00</td><td>63.38</td><td>68.20</td><td>-4.82</td><td>46.96</td><td>40.38</td><td>18.69</td><td>45.79</td><td>3.14</td><td>165 343 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1218.50	51.51	74.00	-22.49	42.93	23.60	5.49	31.01	10.16	100 155 Peak	2 1218.50	45.74	54.00	-8.26	37.16	23.60	5.49	31.01	10.16	100 155 Average	3 4874.00	45.20	74.00	-28.80	33.27	32.60	10.52	32.98	1.79	-- -- Peak	4 7311.00	51.13	74.00	-22.87	34.43	37.20	12.62	35.54	2.42	-- -- Peak	5 7311.00	39.87	54.00	-14.13	23.17	37.20	12.62	35.54	2.42	-- -- Average	6 11160.00	61.07	74.00	-12.93	45.01	38.04	15.31	39.47	2.18	318 251 Peak	7 11160.00	50.80	54.00	-3.20	34.74	38.04	15.31	39.47	2.18	318 251 Average	8 16740.00	63.38	68.20	-4.82	46.96	40.38	18.69	45.79	3.14	165 343 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																																																																																																								
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1 1218.50	50.88	74.00	-23.12	42.30	23.60	5.49	31.01	10.16	400 265 Peak																																																																																																																																																																																																																					
2 1218.50	44.21	54.00	-9.79	35.63	23.60	5.49	31.01	10.16	400 265 Average																																																																																																																																																																																																																					
3 4874.00	45.12	74.00	-28.88	33.19	32.60	10.52	32.98	1.79	-- -- Peak																																																																																																																																																																																																																					
4 7311.00	50.15	74.00	-23.85	33.45	37.20	12.62	35.54	2.42	-- -- Peak																																																																																																																																																																																																																					
5 7311.00	39.91	54.00	-14.09	23.21	37.20	12.62	35.54	2.42	-- -- Average																																																																																																																																																																																																																					
6 11160.00	59.92	74.00	-14.08	43.86	38.04	15.31	39.47	2.18	286 128 Peak																																																																																																																																																																																																																					
7 11160.00	49.18	54.00	-4.82	33.12	38.04	15.31	39.47	2.18	286 128 Average																																																																																																																																																																																																																					
8 16740.00	61.44	68.20	-6.76	45.02	40.38	18.69	45.79	3.14	302 52 Peak																																																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																																																																																																								
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1 1218.50	51.51	74.00	-22.49	42.93	23.60	5.49	31.01	10.16	100 155 Peak																																																																																																																																																																																																																					
2 1218.50	45.74	54.00	-8.26	37.16	23.60	5.49	31.01	10.16	100 155 Average																																																																																																																																																																																																																					
3 4874.00	45.20	74.00	-28.80	33.27	32.60	10.52	32.98	1.79	-- -- Peak																																																																																																																																																																																																																					
4 7311.00	51.13	74.00	-22.87	34.43	37.20	12.62	35.54	2.42	-- -- Peak																																																																																																																																																																																																																					
5 7311.00	39.87	54.00	-14.13	23.17	37.20	12.62	35.54	2.42	-- -- Average																																																																																																																																																																																																																					
6 11160.00	61.07	74.00	-12.93	45.01	38.04	15.31	39.47	2.18	318 251 Peak																																																																																																																																																																																																																					
7 11160.00	50.80	54.00	-3.20	34.74	38.04	15.31	39.47	2.18	318 251 Average																																																																																																																																																																																																																					
8 16740.00	63.38	68.20	-4.82	46.96	40.38	18.69	45.79	3.14	165 343 Peak																																																																																																																																																																																																																					





Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
Pol.	Horizontal	Vertical
10.6G -18G Avg		
	Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL	Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL

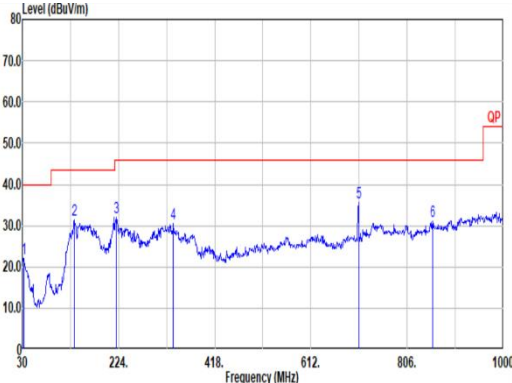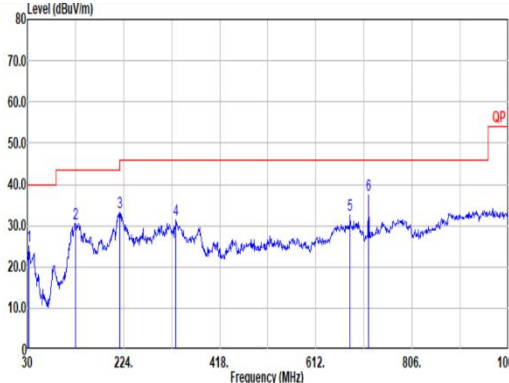

Mode	1																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	 Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>32.91</td><td>22.17</td><td>40.00</td><td>-17.83</td><td>30.46</td><td>23.40</td><td>1.06</td><td>32.75</td><td>0.00 -- -- PEAK</td></tr><tr><td>2</td><td>134.76</td><td>31.34</td><td>43.50</td><td>-12.16</td><td>44.37</td><td>17.73</td><td>1.81</td><td>32.70</td><td>0.13 -- -- PEAK</td></tr><tr><td>3</td><td>220.12</td><td>31.91</td><td>46.00</td><td>-14.09</td><td>46.95</td><td>15.29</td><td>2.22</td><td>32.72</td><td>0.17 -- -- PEAK</td></tr><tr><td>4</td><td>334.58</td><td>30.40</td><td>46.00</td><td>-15.60</td><td>40.52</td><td>19.86</td><td>2.72</td><td>32.80</td><td>0.10 -- -- PEAK</td></tr><tr><td>5</td><td>700.03</td><td>35.76</td><td>46.00</td><td>-10.24</td><td>37.97</td><td>26.79</td><td>3.79</td><td>32.94</td><td>0.15 -- -- PEAK</td></tr><tr><td>6</td><td>857.41</td><td>31.07</td><td>46.00</td><td>-14.93</td><td>29.76</td><td>29.33</td><td>4.19</td><td>32.39</td><td>0.18 -- -- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	32.91	22.17	40.00	-17.83	30.46	23.40	1.06	32.75	0.00 -- -- PEAK	2	134.76	31.34	43.50	-12.16	44.37	17.73	1.81	32.70	0.13 -- -- PEAK	3	220.12	31.91	46.00	-14.09	46.95	15.29	2.22	32.72	0.17 -- -- PEAK	4	334.58	30.40	46.00	-15.60	40.52	19.86	2.72	32.80	0.10 -- -- PEAK	5	700.03	35.76	46.00	-10.24	37.97	26.79	3.79	32.94	0.15 -- -- PEAK	6	857.41	31.07	46.00	-14.93	29.76	29.33	4.19	32.39	0.18 -- -- PEAK	 Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>32.91</td><td>24.97</td><td>40.00</td><td>-15.03</td><td>33.26</td><td>23.40</td><td>1.06</td><td>32.75</td><td>0.00 -- -- PEAK</td></tr><tr><td>2</td><td>127.00</td><td>30.59</td><td>43.50</td><td>-12.91</td><td>43.70</td><td>17.73</td><td>1.77</td><td>32.70</td><td>0.09 -- -- PEAK</td></tr><tr><td>3</td><td>216.24</td><td>33.10</td><td>46.00</td><td>-12.90</td><td>40.50</td><td>14.95</td><td>2.20</td><td>32.72</td><td>0.17 -- -- PEAK</td></tr><tr><td>4</td><td>329.73</td><td>31.33</td><td>46.00</td><td>-14.67</td><td>41.60</td><td>19.73</td><td>2.70</td><td>32.80</td><td>0.10 -- -- PEAK</td></tr><tr><td>5</td><td>600.87</td><td>32.63</td><td>46.00</td><td>-13.37</td><td>35.21</td><td>26.52</td><td>3.73</td><td>32.98</td><td>0.15 -- -- PEAK</td></tr><tr><td>6</td><td>718.70</td><td>37.38</td><td>46.00</td><td>-8.62</td><td>39.07</td><td>27.26</td><td>3.82</td><td>32.92</td><td>0.15 -- -- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	32.91	24.97	40.00	-15.03	33.26	23.40	1.06	32.75	0.00 -- -- PEAK	2	127.00	30.59	43.50	-12.91	43.70	17.73	1.77	32.70	0.09 -- -- PEAK	3	216.24	33.10	46.00	-12.90	40.50	14.95	2.20	32.72	0.17 -- -- PEAK	4	329.73	31.33	46.00	-14.67	41.60	19.73	2.70	32.80	0.10 -- -- PEAK	5	600.87	32.63	46.00	-13.37	35.21	26.52	3.73	32.98	0.15 -- -- PEAK	6	718.70	37.38	46.00	-8.62	39.07	27.26	3.82	32.92	0.15 -- -- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	32.91	22.17	40.00	-17.83	30.46	23.40	1.06	32.75	0.00 -- -- PEAK																																																																																																																																																																													
2	134.76	31.34	43.50	-12.16	44.37	17.73	1.81	32.70	0.13 -- -- PEAK																																																																																																																																																																													
3	220.12	31.91	46.00	-14.09	46.95	15.29	2.22	32.72	0.17 -- -- PEAK																																																																																																																																																																													
4	334.58	30.40	46.00	-15.60	40.52	19.86	2.72	32.80	0.10 -- -- PEAK																																																																																																																																																																													
5	700.03	35.76	46.00	-10.24	37.97	26.79	3.79	32.94	0.15 -- -- PEAK																																																																																																																																																																													
6	857.41	31.07	46.00	-14.93	29.76	29.33	4.19	32.39	0.18 -- -- PEAK																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	32.91	24.97	40.00	-15.03	33.26	23.40	1.06	32.75	0.00 -- -- PEAK																																																																																																																																																																													
2	127.00	30.59	43.50	-12.91	43.70	17.73	1.77	32.70	0.09 -- -- PEAK																																																																																																																																																																													
3	216.24	33.10	46.00	-12.90	40.50	14.95	2.20	32.72	0.17 -- -- PEAK																																																																																																																																																																													
4	329.73	31.33	46.00	-14.67	41.60	19.73	2.70	32.80	0.10 -- -- PEAK																																																																																																																																																																													
5	600.87	32.63	46.00	-13.37	35.21	26.52	3.73	32.98	0.15 -- -- PEAK																																																																																																																																																																													
6	718.70	37.38	46.00	-8.62	39.07	27.26	3.82	32.92	0.15 -- -- PEAK																																																																																																																																																																													

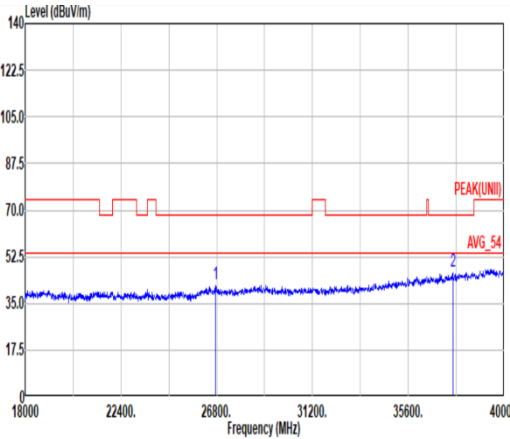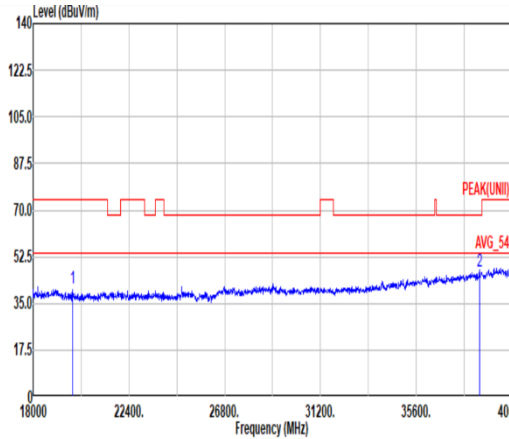


Mode	1																																																																																																															
	SHF																																																																																																															
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 1m SHF_1223_230710 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>26756.00</td><td>42.41</td><td>68.20</td><td>-25.79</td><td>50.03</td><td>40.54</td><td>21.73</td><td>60.35</td><td>-9.54</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>37646.00</td><td>47.17</td><td>68.20</td><td>-21.03</td><td>50.17</td><td>43.33</td><td>26.18</td><td>62.97</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	26756.00	42.41	68.20	-25.79	50.03	40.54	21.73	60.35	-9.54	--	Peak	2	37646.00	47.17	68.20	-21.03	50.17	43.33	26.18	62.97	-9.54	--	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 1m SHF_1223_230710 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>19826.00</td><td>40.45</td><td>74.00</td><td>-33.55</td><td>57.20</td><td>37.91</td><td>18.35</td><td>63.47</td><td>-9.54</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>38504.00</td><td>46.76</td><td>68.20</td><td>-21.44</td><td>49.07</td><td>44.06</td><td>26.67</td><td>63.50</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	19826.00	40.45	74.00	-33.55	57.20	37.91	18.35	63.47	-9.54	--	Peak	2	38504.00	46.76	68.20	-21.44	49.07	44.06	26.67	63.50	-9.54	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	26756.00	42.41	68.20	-25.79	50.03	40.54	21.73	60.35	-9.54	--	Peak																																																																																																					
2	37646.00	47.17	68.20	-21.03	50.17	43.33	26.18	62.97	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	19826.00	40.45	74.00	-33.55	57.20	37.91	18.35	63.47	-9.54	--	Peak																																																																																																					
2	38504.00	46.76	68.20	-21.44	49.07	44.06	26.67	63.50	-9.54	--	Peak																																																																																																					



Appendix B. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11b	98.19	-	-	10Hz
1+2	5GHz 802.11n HT20	80.06	1305	0.77	820Hz

<Ant. 1>

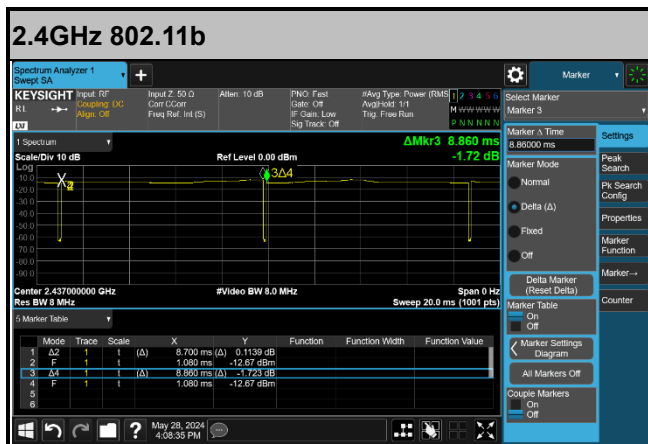

MIMO <Ant. 1+2>

