

CERTIFICATION TEST REPORT

Report Number. : S-4791547056-E2V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-A366U, SM-A366U1, SM-S366V

FCC ID : A3LSMA366U

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax
and NFC

Test Standard(s) : FCC 47 CFR PART 22 SUBPART H
FCC 47 CFR PART 90 SUBPART S

Date Of Issue:
2025-01-06

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2024-12-27	Initial issue	Yeonhee Lim
V2	2025-01-06	Updated to address TCB's question	Yeonhee Lim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. DECISION RULE	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE ORIENTATION.....	10
5.5. DESCRIPTION OF TEST SETUP.....	12
6. TEST AND MEASUREMENT EQUIPMENT	14
7. SUMMARY TABLE	15
8. CONDUCTED RESULTS	16
8.1. CONDUCTED OUTPUT POWER	16
8.1.1. CONDUCTED AVERAGE OUTPUT POWER	17
8.2. PEAK TO AVERAGE RATIO.....	24
8.2.1. CONDUCTED PEAK TO AVERAGE RESULT	25
8.3. OCCUPIED BANDWIDTH.....	34
8.3.1. OCCUPIED BANDWIDTH RESULT	37
8.4. BAND EDGE EMISSIONS	44
8.4.1. BAND EDGE RESULT.....	47
8.4.1. EMISSION MASK RESULT	62
8.5. CONDUCTED SPURIOUS EMISSIONS	77
8.5.1. OUT OF BAND EMISSIONS RESULT	79
8.6. FREQUENCY STABILITY.....	86
8.6.1. FREQUENCY STABILITY RESULT	87
9. RADIATED RESULTS.....	90
9.1. RADIATED POWER (ERP)	90
9.1.1. ERP RESULT	91
9.2. RADIATED SPURIOUS EMISSION	93
9.2.1. SPURIOUS RADIATION RESULT	95

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC.

MODEL NUMBER: SM-A366U, SM-A366U1, SM-S366V

SERIAL NUMBER: R3CXA0QK8FK, R3CXA0QJG2J, R3CX807W0VV (CONDUCTED); R3CXA0QJLCX, 8b11aa6d94347ece (RADIATED);

DATE TESTED: 2024-11-13 – 2025-01-03;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 90S	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Yeonhee Lim
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 22.
3. FCC 47 CFR Part 90.
4. ANSI TIA-603-E, 2016
5. ANSI C63.26, 2015
6. KDB 971168 D01 Power Meas License Digital Systems v03r01
7. KDB 971168 D02 Misc Rev Approv License Devices v02r02
8. KDB 412172 D01 Determining ERP and EIRP v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☐	Chamber 3(3m semi-anechoic chamber)
☐	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{ERP} = \text{SG reading with EUT worst orientation (dBm)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBd)}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.79 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.07 dB
Radiated Disturbance, 1 GHz to 18 GHz	4.99 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Clause 4.3.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC. This test report addresses the WWAN operational mode.

Representative model	Difference	Derivative model
		SM-A366U1, SM-S366V
SM-A366U	Hardware	Same
	Software	The UI has changed according to Service Provider

The model SM-A366U was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average radiated ERP output powers as follows:

GSM

FCC Part 22							
Band	ANT	Frequency Range [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
GSM 850	A	824.20 ~ 848.80	GPRS	32.59	1815.52	28.99	792.50
			EGPRS	26.96	496.59	24.39	274.79

WCDMA

FCC Part 22							
Band	ANT	Frequency Range [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	A	826.40 ~ 846.60	Rel. 99	24.24	265.46	20.20	104.71
			HSDPA	23.93	247.17	19.31	85.31

LTE Band 14

FCC Part 90							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 14	793.00	10	QPSK	24.12	258.23	20.80	120.23
			16QAM	23.31	214.29	19.71	93.54
			64QAM	22.46	176.20		
			256QAM	19.27	84.53		
	790.50 ~ 795.50	5	QPSK	24.08	255.86	21.09	128.53
			16QAM	23.24	210.86	19.09	81.10
			64QAM	22.58	181.13		
			256QAM	19.48	88.72		

LTE Band 26 (Part 90)

FCC Part 90								
Band	ANT	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
					Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 26	A	821.50	15	QPSK	24.39	274.79	19.47	88.51
				16QAM	23.60	229.09	18.56	71.78
				64QAM	22.69	185.78		
				256QAM	19.63	91.83		
		819.00	10	QPSK	24.66	292.42	19.76	94.62
				16QAM	23.93	247.17	18.91	77.80
				64QAM	22.92	195.88		
				256QAM	19.73	93.97		
		816.50 ~ 821.50	5	QPSK	24.66	292.42	19.79	95.28
				16QAM	23.73	236.05	18.88	77.27
				64QAM	22.95	197.24		
				256QAM	19.87	97.05		
		815.50 ~ 822.50	3	QPSK	24.71	295.80	19.79	95.28
				16QAM	23.94	247.74	18.82	76.21
				64QAM	23.00	199.53		
				256QAM	19.98	99.54		
		814.70 ~ 823.30	1.4	QPSK	24.65	291.74	19.48	88.72
				16QAM	23.76	237.68	18.41	69.34
				64QAM	22.88	194.09		
				256QAM	19.86	96.83		

LTE Band 26 (Straddle)

Straddle								
Band	ANT	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
					Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 26	A	824.00	15	QPSK	24.39	274.79	19.08	80.91
				16QAM	23.58	228.03	17.99	62.95
				64QAM	22.62	182.81		
				256QAM	19.73	93.97		
			10	QPSK	24.68	293.76	19.03	79.98
				16QAM	23.94	247.74	18.09	64.42
				64QAM	22.96	197.70		
				256QAM	19.94	98.63		
			5	QPSK	24.61	289.07	18.84	76.56
				16QAM	23.72	235.50	17.93	62.09
				64QAM	22.90	194.98		
				256QAM	19.69	93.11		
			3	QPSK	24.56	285.76	18.75	74.99
				16QAM	23.80	239.88	17.86	61.09
				64QAM	22.88	194.09		
				256QAM	19.79	95.28		
			1.4	QPSK	24.59	287.74	18.73	74.64
				16QAM	23.70	234.42	17.93	62.09
				64QAM	22.75	188.36		
				256QAM	19.69	93.11		

LTE Band 26 (Part 22)

FCC Part 22								
Band	ANT	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
					Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 26	A	831.50 ~ 841.50	15	QPSK	24.44	277.97	19.88	97.27
				16QAM	23.71	234.96	18.69	73.96
				64QAM	22.78	189.67		
				256QAM	19.72	93.76		
		829.00 ~ 844.00	10	QPSK	24.62	289.73	19.59	90.99
				16QAM	23.87	243.78	18.65	73.28
				64QAM	22.84	192.31		
				256QAM	19.81	95.72		
		826.50 ~ 846.50	5	QPSK	24.56	285.76	20.06	101.39
				16QAM	23.72	235.50	19.04	80.17
				64QAM	22.87	193.64		
				256QAM	19.80	95.50		
		825.50 ~ 847.50	3	QPSK	24.60	288.40	20.00	100.00
				16QAM	23.76	237.68	18.95	78.52
				64QAM	22.77	189.23		
				256QAM	19.86	96.83		
		824.70 ~ 848.30	1.4	QPSK	24.56	285.76	19.64	92.04
				16QAM	23.65	231.74	19.04	80.17
				64QAM	22.82	191.43		
				256QAM	19.80	95.50		

NR Band n5

FCC Part 22									
Band	ANT	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Mode	Conducted		Radiated	
						Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
n5	A	834.00 - 839.00	20	DFT-s OFDM	π/2 BPSK	24.74	297.85		
					QPSK	24.66	292.42	20.27	106.41
					16QAM	23.62	230.14	19.15	82.22
					64QAM	22.39	173.38		
					256QAM	20.01	100.23		
				CP-OFDM	QPSK	23.26	211.84		
					16QAM	22.86	193.20		
					64QAM	21.10	128.82		
					256QAM	18.26	66.99		
		831.50 - 841.50	15	DFT-s OFDM	π/2 BPSK	24.68	293.76		
					QPSK	24.76	299.23	20.32	107.65
					16QAM	23.65	231.74	19.51	89.33
					64QAM	22.42	174.58		
				256QAM	20.01	100.23			
				CP-QFDM	QPSK	23.24	210.86		
		829.00 - 844.00	10	DFT-s OFDM	π/2 BPSK	24.67	293.09		
					QPSK	24.64	291.07	20.09	102.09
					16QAM	23.58	228.03	19.10	81.28
					64QAM	22.30	169.82		
				256QAM	19.77	94.84			
				CP-OFDM	QPSK	23.12	205.12		
		826.50 - 846.50	5	DFT-s OFDM	π/2 BPSK	24.74	297.85		
					QPSK	24.75	298.54	20.19	104.47
					16QAM	23.74	236.59	19.63	91.83
					64QAM	22.45	175.79		
				256QAM	19.89	97.50			
				CP-OFDM	QPSK	23.24	210.86		

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a internal antenna for the supported bands with a maximum peak gain as follow:

Frequency (MHz)	ANT	Peak Gain (dBd)
GSM850 / WCDMA Band 5 / LTE Band 5, 26 / NR Band n5 814 - 849 MHz	A	-2.90
LTE Band 14 788 – 798 MHz	A	-3.50

5.4. WORST-CASE ORIENTATION

Following modes should be considered as worst-case scenario for all other measurements.

- GSM GPRS/EGPRS
The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on GPRS and EGPRS modulations. It was found GPRS results were worst case.
- UMTS REL 99/HSDPA
The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on REL 99 and HSDPA modulations. It was found REL 99 results were worst case.
- LTE Bands
The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, 64QAM and 256QAM modulations. It was found QPSK and 16QAM results were worst case.
- NR n5
The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on $\pi/2$ BPSK, QPSK, 16QAM, 64QAM and 256QAM modulations. It was found QPSK and 16QAM results were worst case.

This device supports NSA and SA Mode and Worst case reported.
So the test case is as below.

NR Band	NSA	SA
n5	LTE B2, 4, 7, 30, 48, 66	<u>Stand Alone</u>

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

● Conducted Spurious Emission

Highest conducted output power setting for each bands						
LTE Band	ANT	Frequency (MHz)	Bandwidth (MHz)	Modulation	RB size	RB offset
14	A	793.0	10	QPSK	1	25
26	A	815.5	3	QPSK	1	8
		822.5			1	0
		824.0	10	QPSK	1	25
		829.0	10	QPSK	1	25
		831.5			1	25
		844.0			1	25
NR Band	ANT	Frequency (MHz)	Bandwidth (MHz)	Modulation	RB size	RB offset
5	A	831.5	15	DFT-s OFDM QPSK	1	39
		836.5			1	1
		841.5			1	1

● Radiated Spurious Emission

Highest ERP setting for each bands						
LTE Band	ANT	Frequency (MHz)	Bandwidth (MHz)	Modulation	RB size	RB offset
14	A	790.5	5	QPSK	1	12
		793.0			1	0
		795.5			1	24
26	A	816.5	5	QPSK	1	0
		821.5			1	0
		824.0	15	QPSK	1	0
		826.5	5	QPSK	1	0
		831.5			1	12
		846.5			1	12
NR Band	ANT	Frequency (MHz)	Bandwidth (MHz)	Modulation	RB size	RB offset
5	A	831.5	15	DFT-s OFDM QPSK	1	77
		836.5			1	1
		841.5			1	77

The fundamental and radiated spurious emission were investigated in three orthogonal orientations X, Y and Z it was determined that below orientation was worst-case orientation for each band.

Band	ANT	ERP			RSE		
		X	Y	Z	X	Y	Z
GSM 850	A	-	-	O	O	-	-
WCDMA B5	A	-	-	O	-	-	O
LTE B14	A	O	-	-	O	-	-
LTE B26	A	-	-	O	-	-	O
NR n5	A	-	-	O	-	O	-

Note1 : For the radiated spurious testing, the EUT attached with travel adapter for the worst case condition. The EUT is continuously communicated with the call box during the tests.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacture	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37TC7A00JBDKA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02115A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is continuously communicated with the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

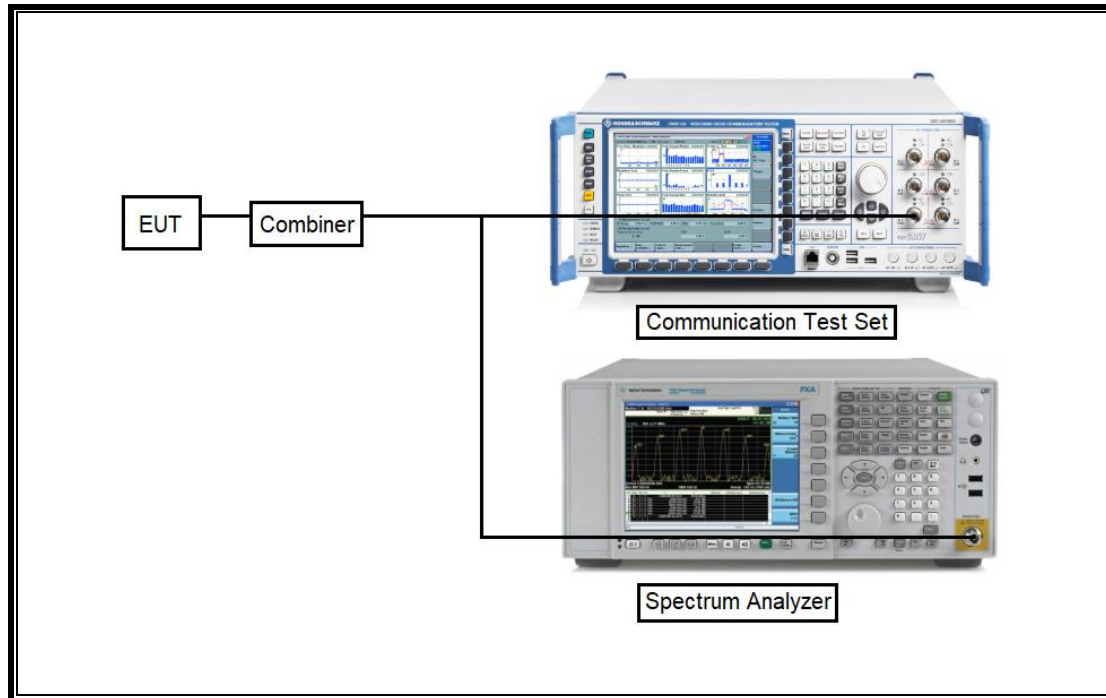

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

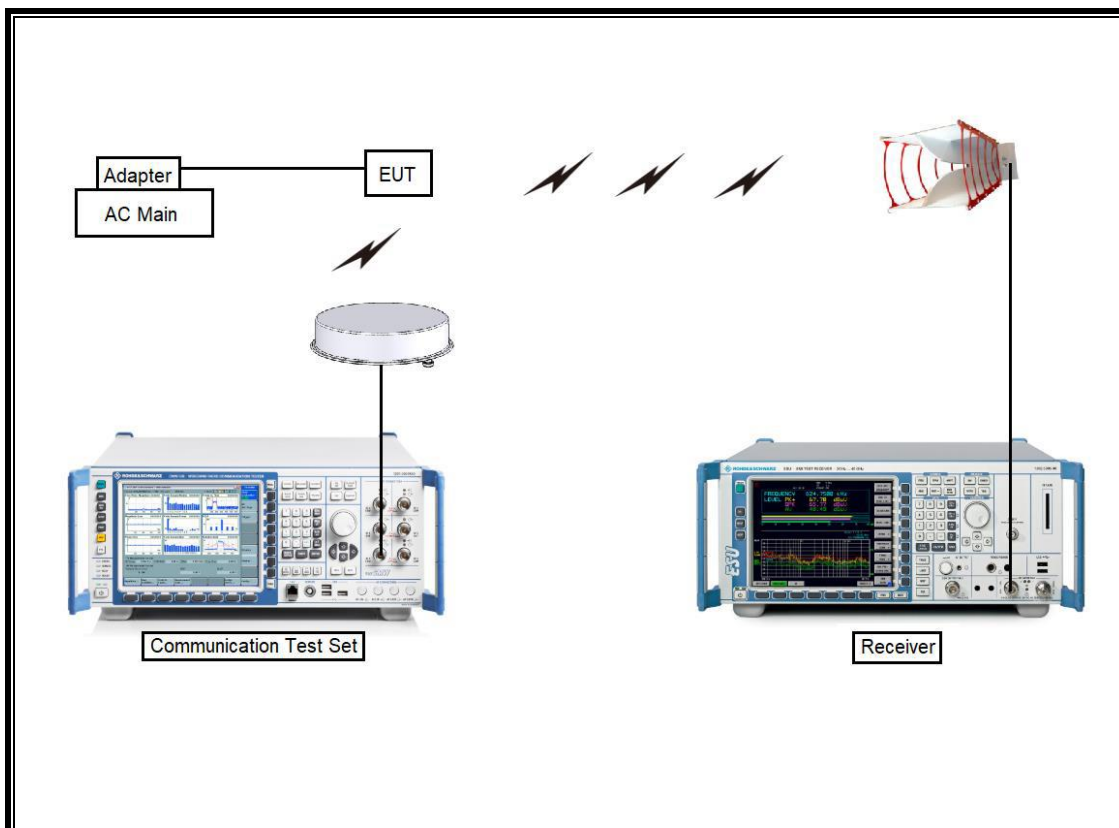

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB-4	00164753	2025-01-17
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2026-07-23
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2025-10-06
Preamplifier	ETS	3116C-PA	00168841	2025-07-25
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	750	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	845	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	749	2026-08-12
Antenna, Horn, 18 GHz	ETS	3115	00167211	2026-07-17
Antenna, Horn, 18 GHz	ETS	3115	00161451	2026-07-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	2026-07-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	2026-07-17
Communications Test Set	R&S	CMW500	169797	2025-07-23
DC Power Supply	Agilent / HP	E3640A	MY54226395	2025-07-24
Preamplifier, 1000 MHz	Sonoma	310N	341282	2025-07-22
Preamplifier, 1000 MHz	Sonoma	310N	370599	2025-07-22
Preamplifier, 1000 MHz	Sonoma	310N	351741	2025-07-22
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2025-07-23
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-182020	28451	2025-07-22
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-181515	23576	2025-07-25
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2025-07-24
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2025-01-03
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY57143717	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2025-07-22
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G005	2025-07-23
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G006	2025-07-23
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	010	2025-07-23
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	011	2025-07-23
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G001	2025-07-23
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G002	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A009	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A001	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A008	2025-07-23
Attenuator	PASTERNAK	PE7004-10	2	2025-07-23
Attenuator	PASTERNAK	PE7395-10	A011	2025-07-25
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-07
Temperature Chamber	ESPEC	SH-642	93001109	2025-07-23
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2025-01-03
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2025-01-03
UXM5G Wireless Test Platform	KEYSIGHT	E7515B	MY57510655	2025-01-03
UL Software				
Description	Manufacturer	Model	Version	
Antenna port test software	UL	CLT	Ver 3.4	
Radiated software	UL	UL EMC	Ver 9.5	
Antenna port test software (5G NR FR1)	UL	UL iM	Ver 1.06	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Results
2.1046	Conducted Output Power	N/A	Conducted	Pass
2.1049	Occupied Bandwidth (99%)	N/A		Pass
22.917(a)	Conducted Band Edge / Conducted Spurious Emission	-13 dBm		Pass
90.543(e)		-35 dBm		
90.691	Emission Mask	Section 8.4.1		Pass
22.355 90.213	Frequency Stability	2.5 ppm		Pass
22.913(a)(5)	Effective Radiated Power	38.5 dBm	Radiated	Pass
90.542(a)(7)		34.77 dBm		
90.635(b)		50 dBm		
22.917(a) 90.543(e) 90.691(a)	Radiated Spurious Emission	-13 dBm		Pass

8. CONDUCTED RESULTS

8.1. CONDUCTED OUTPUT POWER

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to either CMW500 Test Set or E7515B Test set and configured to operate at maximum power.

NOTE

5G NR: All Waveforms (CP-OFDM vs DFT-s_OFDM) and modulations ($\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

RESULTS

See the following pages.

8.1.1. CONDUCTED AVERAGE OUTPUT POWER

GSM

Mode	Coding Scheme	Time Slots	Maximum Average Power (dBm)			
			Measured		Tune-up Limit	
			Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	32.15	22.96	33.5	24.3
			32.59	23.40		
			32.44	23.25		
GPRS (GMSK)	CS1	1	32.14	22.95	33.5	24.3
			32.50	23.31		
			32.28	23.09		
		2	31.67	25.49	32.5	26.3
			31.90	25.72		
			31.58	25.40		
		3	28.93	24.51	30.5	26.1
			28.92	24.50		
			29.19	24.77		
		4	27.03	23.86	28.5	25.3
			27.16	23.99		
			27.45	24.28		
EGPRS (8PSK)	MCS5	1	26.29	17.10	28.0	18.8
			26.89	17.70		
			26.96	17.77		
		2	24.89	18.71	26.0	19.8
			25.51	19.33		
			25.65	19.47		
		3	22.72	18.30	24.0	19.6
			22.81	18.39		
			22.85	18.43		
		4	21.70	18.53	22.5	19.3
			21.96	18.79		
			22.00	18.83		

WCDMA B5

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.13	N/A	24.5
		4183	836.6	24.24		
		4233	846.6	24.11		
HSDPA	Subtest 1	4132	826.4	23.74	0	24.0
		4183	836.6	23.93		
		4233	846.6	23.88		
	Subtest 2	4132	826.4	23.75	0	24.0
		4183	836.6	23.93		
		4233	846.6	23.85		
	Subtest 3	4132	826.4	23.21	0.5	23.5
		4183	836.6	23.45		
		4233	846.6	23.31		
	Subtest 4	4132	826.4	23.25	0.5	23.5
		4183	836.6	23.46		
		4233	846.6	23.45		
HSUPA	Subtest 1	4132	826.4	22.99	0	23.5
		4183	836.6	23.23		
		4233	846.6	22.66		
	Subtest 2	4132	826.4	20.91	2	21.5
		4183	836.6	21.23		
		4233	846.6	21.18		
	Subtest 3	4132	826.4	22.06	1	22.5
		4183	836.6	22.24		
		4233	846.6	22.06		
	Subtest 4	4132	826.4	20.99	2	21.5
		4183	836.6	21.24		
		4233	846.6	21.10		
	Subtest 5	4132	826.4	22.60	0	23.5
		4183	836.6	22.82		
		4233	846.6	22.77		
DC-HSDPA	Subtest 1	4132	826.4	23.74	0	24.0
		4183	836.6	23.94		
		4233	846.6	23.96		
	Subtest 2	4132	826.4	23.79	0	24.0
		4183	836.6	23.93		
		4233	846.6	23.99		
	Subtest 3	4132	826.4	23.29	0.5	23.5
		4183	836.6	23.46		
		4233	846.6	23.49		
	Subtest 4	4132	826.4	23.27	0.5	23.5
		4183	836.6	23.44		
		4233	846.6	23.31		

LTE Band 14

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
					23330			
				793.00 MHz				
10 MHz	QPSK	1	0		24.10		0.0	25.5
		1	25		24.12		0.0	25.5
		1	49		23.44		0.0	25.5
		25	0		23.11		1.0	24.5
		25	12		23.18		1.0	24.5
		25	25		22.96		1.0	24.5
		50	0		23.21		1.0	24.5
	16QAM	1	0		23.25		1.0	24.5
		1	25		23.31		1.0	24.5
		1	49		22.94		1.0	24.5
		25	0		22.11		2.0	23.5
		25	12		22.24		2.0	23.5
		25	25		22.04		2.0	23.5
		50	0		22.24		2.0	23.5
	64QAM	1	0		22.46		2.0	23.5
		1	25		22.23		2.0	23.5
		1	49		21.50		2.0	23.5
		25	0		21.22		3.0	22.5
		25	12		21.20		3.0	22.5
		25	25		21.10		3.0	22.5
		50	0		21.04		3.0	22.5
	256QAM	1	0		19.27		5.0	20.5
		1	25		19.23		5.0	20.5
		1	49		18.97		5.0	20.5
		25	0		19.04		5.0	20.5
		25	12		19.17		5.0	20.5
		25	25		19.16		5.0	20.5
		50	0		19.09		5.0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23305	23330	23355		
				790.50 MHz	793.00 MHz	795.50 MHz		
5 MHz	QPSK	1	0	24.03	24.06	24.02	0.0	25.5
		1	12	24.08	23.49	23.76	0.0	25.5
		1	24	24.06	23.16	23.53	0.0	25.5
		12	0	23.06	22.95	23.08	1.0	24.5
		12	7	23.16	22.74	22.95	1.0	24.5
		12	13	23.14	23.00	22.74	1.0	24.5
		25	0	23.16	23.17	23.00	1.0	24.5
	16QAM	1	0	23.19	23.24	23.22	1.0	24.5
		1	12	23.12	23.15	23.13	1.0	24.5
		1	24	23.18	23.24	22.73	1.0	24.5
		12	0	22.13	22.15	22.14	2.0	23.5
		12	7	22.18	22.29	22.00	2.0	23.5
		12	13	22.17	22.13	21.80	2.0	23.5
		25	0	22.16	22.13	22.03	2.0	23.5
	64QAM	1	0	22.20	22.39	22.14	2.0	23.5
		1	12	22.58	21.97	22.21	2.0	23.5
		1	24	22.21	22.20	21.86	2.0	23.5
		12	0	21.15	21.12	21.13	3.0	22.5
		12	7	21.20	21.38	21.09	3.0	22.5
		12	13	21.24	21.18	20.89	3.0	22.5
		25	0	21.16	21.16	21.06	3.0	22.5
	256QAM	1	0	19.18	19.03	19.09	5.0	20.5
		1	12	19.37	18.73	19.48	5.0	20.5
		1	24	19.01	19.00	19.03	5.0	20.5
		12	0	19.05	19.01	19.03	5.0	20.5
		12	7	19.09	19.06	19.30	5.0	20.5
		12	13	19.08	19.13	18.97	5.0	20.5
		25	0	19.10	19.16	18.93	5.0	20.5

LTE Band 26

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						MPR	Tune-up Limit
				Measured Pwr (dBm)							
				26765 821.50 MHz	26790 824.50 MHz	26865 831.50 MHz	26915 836.50 MHz	26965 841.50 MHz			
15 MHz	QPSK	1	0	24.36	24.39	24.25	24.36	24.33	0.0	25.5	
		1	37	24.39	24.33	24.35	24.31	24.44	0.0	25.5	
		1	74	24.17	24.29	24.08	24.20	24.36	0.0	25.5	
		36	0	23.43	23.38	23.35	23.29	23.23	1.0	24.5	
		36	20	23.47	23.45	23.38	23.31	23.32	1.0	24.5	
		36	39	23.42	23.40	23.33	23.36	23.33	1.0	24.5	
		75	0	23.48	23.46	23.39	23.28	23.41	1.0	24.5	
	16QAM	1	0	23.47	23.58	23.58	23.36	23.42	1.0	24.5	
		1	37	23.60	23.56	23.44	23.71	23.42	1.0	24.5	
		1	74	23.36	23.40	23.37	23.35	23.49	1.0	24.5	
		36	0	22.52	22.43	22.36	22.33	22.31	2.0	23.5	
		36	20	22.53	22.53	22.37	22.32	22.40	2.0	23.5	
		36	39	22.48	22.44	22.37	22.42	22.31	2.0	23.5	
		75	0	22.50	22.43	22.39	22.34	22.38	2.0	23.5	
	64QAM	1	0	22.69	22.62	22.55	22.62	22.64	2.0	23.5	
		1	37	22.61	22.62	22.58	22.70	22.78	2.0	23.5	
		1	74	22.42	22.56	22.39	22.60	22.45	2.0	23.5	
		36	0	21.51	21.51	21.38	21.40	21.35	3.0	22.5	
		36	20	21.55	21.54	21.43	21.39	21.40	3.0	22.5	
		36	39	21.53	21.46	21.41	21.42	21.43	3.0	22.5	
		75	0	21.58	21.54	21.48	21.38	21.43	3.0	22.5	
	256QAM	1	0	19.50	19.64	19.61	19.72	19.52	5.0	20.5	
		1	37	19.63	19.56	19.63	19.51	19.55	5.0	20.5	
		1	74	19.41	19.73	19.58	19.50	19.65	5.0	20.5	
		36	0	19.52	19.49	19.39	19.37	19.37	5.0	20.5	
		36	20	19.57	19.56	19.45	19.38	19.42	5.0	20.5	
		36	39	19.48	19.49	19.49	19.44	19.36	5.0	20.5	
		75	0	19.55	19.56	19.42	19.35	19.45	5.0	20.5	
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit	
				26740 819.00 MHz	26790 824.00 MHz	26840 829.00 MHz	26865 831.50 MHz	26990 844.00 MHz			
10 MHz	QPSK	1	0	24.61	24.64	24.61	24.56	24.42	0.0	25.5	
		1	25	24.66	24.68	24.62	24.61	24.54	0.0	25.5	
		1	49	24.55	24.60	24.50	24.45	24.52	0.0	25.5	
		25	0	23.68	23.62	23.58	23.49	23.43	1.0	24.5	
		25	12	23.68	23.66	23.60	23.61	23.44	1.0	24.5	
		25	25	23.62	23.58	23.57	23.49	23.48	1.0	24.5	
		50	0	23.69	23.62	23.58	23.56	23.41	1.0	24.5	
	16QAM	1	0	23.93	23.94	23.87	23.76	23.79	1.0	24.5	
		1	25	23.80	23.76	23.78	23.70	23.71	1.0	24.5	
		1	49	23.73	23.88	23.65	23.49	23.52	1.0	24.5	
		25	0	22.70	22.64	22.63	22.52	22.45	2.0	23.5	
		25	12	22.71	22.66	22.58	22.58	22.43	2.0	23.5	
		25	25	22.65	22.57	22.56	22.53	22.49	2.0	23.5	
		50	0	22.65	22.60	22.60	22.53	22.50	2.0	23.5	
	64QAM	1	0	22.76	22.96	22.75	22.56	22.84	2.0	23.5	
		1	25	22.92	22.75	22.64	22.67	22.61	2.0	23.5	
		1	49	22.52	22.64	22.68	22.78	22.62	2.0	23.5	
		25	0	21.66	21.67	21.61	21.52	21.41	3.0	22.5	
		25	12	21.70	21.67	21.57	21.57	21.47	3.0	22.5	
		25	25	21.64	21.59	21.57	21.54	21.48	3.0	22.5	
		50	0	21.67	21.63	21.56	21.57	21.43	3.0	22.5	
	256QAM	1	0	19.73	19.63	19.72	19.70	19.81	5.0	20.5	
		1	25	19.72	19.94	19.74	19.60	19.58	5.0	20.5	
		1	49	19.73	19.62	19.73	19.61	19.56	5.0	20.5	
		25	0	19.69	19.62	19.58	19.48	19.49	5.0	20.5	
		25	12	19.71	19.61	19.65	19.63	19.49	5.0	20.5	
		25	25	19.64	19.61	19.55	19.53	19.47	5.0	20.5	
		50	0	19.64	19.62	19.55	19.54	19.39	5.0	20.5	

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)						MPR	Tune-up Limit
				26715	26765	26790	26815	26865	27015		
				816.50 MHz	821.50 MHz	824.00 MHz	826.50 MHz	831.50 MHz	846.50 MHz		
5 MHz	QPSK	1	0	24.63	24.53	24.51	24.54	24.51	24.44	0.0	25.5
		1	12	24.61	24.66	24.53	24.56	24.49	24.44	0.0	25.5
		1	24	24.59	24.46	24.61	24.50	24.41	24.40	0.0	25.5
		12	0	23.61	23.61	23.57	23.53	23.45	23.40	1.0	24.5
		12	7	23.67	23.65	23.60	23.56	23.54	23.47	1.0	24.5
		12	13	23.63	23.60	23.57	23.54	23.48	23.43	1.0	24.5
		25	0	23.66	23.57	23.60	23.55	23.47	23.37	1.0	24.5
	16QAM	1	0	23.66	23.70	23.64	23.66	23.67	23.66	1.0	24.5
		1	12	23.73	23.62	23.72	23.65	23.61	23.72	1.0	24.5
		1	24	23.46	23.65	23.57	23.66	23.53	23.60	1.0	24.5
		12	0	22.67	22.59	22.63	22.49	22.42	22.49	2.0	23.5
		12	7	22.75	22.63	22.62	22.58	22.52	22.52	2.0	23.5
		12	13	22.59	22.56	22.53	22.56	22.46	22.43	2.0	23.5
		25	0	22.66	22.60	22.58	22.54	22.51	22.44	2.0	23.5
	64QAM	1	0	22.73	22.71	22.68	22.81	22.65	22.55	2.0	23.5
		1	12	22.84	22.80	22.90	22.83	22.69	22.64	2.0	23.5
		1	24	22.95	22.74	22.64	22.87	22.62	22.52	2.0	23.5
		12	0	21.68	21.63	21.61	21.61	21.43	21.44	3.0	22.5
		12	7	21.64	21.69	21.60	21.62	21.57	21.53	3.0	22.5
		12	13	21.66	21.62	21.63	21.55	21.54	21.49	3.0	22.5
		25	0	21.68	21.64	21.65	21.56	21.50	21.44	3.0	22.5
	256QAM	1	0	19.79	19.83	19.64	19.80	19.51	19.28	5.0	20.5
		1	12	19.85	19.66	19.69	19.68	19.71	19.75	5.0	20.5
		1	24	19.87	19.79	19.60	19.50	19.66	19.49	5.0	20.5
		12	0	19.70	19.62	19.68	19.56	19.50	19.45	5.0	20.5
		12	7	19.74	19.69	19.63	19.66	19.54	19.58	5.0	20.5
		12	13	19.69	19.63	19.57	19.62	19.50	19.50	5.0	20.5
		25	0	19.67	19.64	19.56	19.58	19.53	19.38	5.0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)						MPR	Tune-up Limit
				26705	26775	26790	26805	26865	27025		
				815.50 MHz	822.50 MHz	824.00 MHz	825.50 MHz	831.50 MHz	847.50 MHz		
3 MHz	QPSK	1	0	24.54	24.61	24.52	24.51	24.35	24.47	0.0	25.5
		1	8	24.71	24.60	24.56	24.60	24.57	24.49	0.0	25.5
		1	14	24.54	24.54	24.50	24.55	24.32	24.40	0.0	25.5
		8	0	23.63	23.59	23.61	23.55	23.46	23.38	1.0	24.5
		8	4	23.70	23.66	23.65	23.59	23.53	23.49	1.0	24.5
		8	7	23.64	23.57	23.56	23.52	23.49	23.39	1.0	24.5
		15	0	23.65	23.60	23.56	23.61	23.51	23.47	1.0	24.5
	16QAM	1	0	23.60	23.94	23.67	23.64	23.54	23.54	1.0	24.5
		1	8	23.70	23.74	23.80	23.76	23.69	23.66	1.0	24.5
		1	14	23.62	23.65	23.62	23.65	23.75	23.64	1.0	24.5
		8	0	22.70	22.60	22.65	22.54	22.48	22.39	2.0	23.5
		8	4	22.78	22.71	22.70	22.59	22.58	22.59	2.0	23.5
		8	7	22.64	22.60	22.62	22.63	22.57	22.52	2.0	23.5
		15	0	22.64	22.64	22.59	22.56	22.52	22.49	2.0	23.5
	64QAM	1	0	22.90	22.67	22.88	22.77	22.66	22.65	2.0	23.5
		1	8	22.80	23.00	22.84	22.72	22.73	22.74	2.0	23.5
		1	14	22.80	22.88	22.83	22.43	22.72	22.44	2.0	23.5
		8	0	21.71	21.60	21.67	21.59	21.42	21.42	3.0	22.5
		8	4	21.77	21.64	21.66	21.62	21.56	21.59	3.0	22.5
		8	7	21.65	21.54	21.59	21.54	21.54	21.53	3.0	22.5
		15	0	21.73	21.68	21.64	21.58	21.48	21.53	3.0	22.5
	256QAM	1	0	19.67	19.54	19.66	19.82	19.63	19.60	5.0	20.5
		1	8	19.98	19.77	19.67	19.83	19.86	19.59	5.0	20.5
		1	14	19.84	19.55	19.79	19.70	19.66	19.59	5.0	20.5
		8	0	19.65	19.60	19.60	19.62	19.43	19.38	5.0	20.5
		8	4	19.63	19.65	19.63	19.67	19.61	19.53	5.0	20.5
		8	7	19.77	19.66	19.63	19.61	19.54	19.53	5.0	20.5
		15	0	19.64	19.65	19.58	19.58	19.53	19.43	5.0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)						MPR	Tune-up Limit
				26697	26783	26790	26797	26865	27033		
				814.70 MHz	823.30 MHz	824.00 MHz	824.70 MHz	831.50 MHz	848.30 MHz		
1.4 MHz	QPSK	1	0	24.54	24.48	24.56	24.48	24.48	24.13	0.0	25.5
		1	3	24.54	24.65	24.55	24.50	24.47	23.95	0.0	25.5
		1	5	24.50	24.58	24.56	24.49	24.49	23.74	0.0	25.5
		3	0	24.41	24.56	24.48	24.55	24.49	23.99	0.0	25.5
		3	1	24.39	24.57	24.59	24.56	24.53	23.93	0.0	25.5
		3	3	24.42	24.58	24.56	24.50	24.44	23.75	0.0	25.5
		6	0	23.13	23.05	23.03	23.05	22.95	22.92	1.0	24.5
	16QAM	1	0	23.38	23.61	23.54	23.60	23.61	23.24	1.0	24.5
		1	3	23.48	23.76	23.61	23.60	23.65	23.03	1.0	24.5
		1	5	23.47	23.64	23.70	23.51	23.57	22.97	1.0	24.5
		3	0	23.45	23.61	23.58	23.63	23.51	23.26	1.0	24.5
		3	1	23.51	23.62	23.67	23.59	23.48	23.09	1.0	24.5
		3	3	23.47	23.67	23.66	23.53	23.61	23.01	1.0	24.5
		6	0	22.60	22.60	22.61	22.49	22.51	22.14	2.0	23.5
	64QAM	1	0	22.84	22.72	22.70	22.54	22.73	22.37	2.0	23.5
		1	3	22.73	22.88	22.72	22.66	22.61	22.32	2.0	23.5
		1	5	22.62	22.85	22.66	22.71	22.64	22.30	2.0	23.5
		3	0	22.81	22.77	22.58	22.69	22.70	22.41	2.0	23.5
		3	1	22.68	22.83	22.68	22.71	22.52	22.31	2.0	23.5
		3	3	22.76	22.79	22.75	22.82	22.56	22.20	2.0	23.5
		6	0	21.71	21.56	21.57	21.51	21.43	21.34	3.0	22.5
	256QAM	1	0	19.80	19.64	19.57	19.61	19.80	19.36	5.0	20.5
		1	3	19.72	19.86	19.68	19.53	19.59	19.61	5.0	20.5
		1	5	19.64	19.50	19.54	19.56	19.70	19.32	5.0	20.5
		3	0	19.72	19.70	19.69	19.48	19.65	19.61	5.0	20.5
		3	1	19.69	19.70	19.60	19.67	19.50	19.54	5.0	20.5
		3	3	19.75	19.73	19.64	19.56	19.51	19.47	5.0	20.5
		6	0	19.69	19.60	19.65	19.55	19.45	19.33	5.0	20.5

NR Band n5

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					166800	167300	167800		
					834.00 MHz	836.50 MHz	839.00 MHz		
20 MHz	DFT-s-OFDM	$\pi/2$ BPSK	1	0	23.87	23.91	23.96	0.5	25.0
			1	1	24.68	24.61	24.72	0.0	25.5
			52	2	24.70	24.59	24.74	0.0	25.5
			104	104	24.31	24.27	24.09	0.0	25.5
			1	105	23.56	23.61	23.69	0.5	25.0
			50	0	23.72	23.68	23.82	0.5	25.0
			50	28	24.57	24.53	24.55	0.0	25.5
			50	56	23.46	23.43	23.39	0.5	25.0
			100	0	23.50	23.49	23.50	0.5	25.0
		QPSK	1	0	23.36	23.35	23.44	1.0	24.5
			1	1	24.61	24.60	24.66	0.0	25.5
			1	52	24.58	24.56	24.51	0.0	25.5
			1	104	24.22	24.24	23.91	0.0	25.5
			1	105	23.17	23.15	23.16	1.0	24.5
			50	0	23.65	23.66	23.70	1.0	24.5
			50	28	24.50	24.51	24.47	0.0	25.5
			50	56	23.40	23.41	23.32	1.0	24.5
			100	0	23.45	23.48	23.44	1.0	24.5
		16QAM	1	0	22.70	22.43	22.50	2.0	23.5
			1	1	23.58	23.60	23.62	1.0	24.5
			1	52	23.56	23.57	23.47	1.0	24.5
			1	104	23.18	23.23	22.85	1.0	24.5
			1	105	22.44	22.13	22.23	2.0	23.5
			50	0	22.36	22.44	22.42	2.0	23.5
			50	28	23.37	23.33	23.40	1.0	24.5
			50	56	22.23	22.24	22.26	2.0	23.5
			100	0	22.40	22.36	22.40	2.0	23.5
		64QAM	1	1	22.32	22.39	22.35	2.5	23.0
		256QAM	1	1	19.87	20.01	19.67	4.5	21.0
	CP-OFDM	QPSK	1	0	21.42	21.46	21.46	3.0	22.5
			1	1	23.08	23.19	23.26	1.5	24.0
			1	52	22.94	22.83	22.96	1.5	24.0
			1	104	23.06	22.85	22.83	1.5	24.0
			1	105	22.48	22.49	22.47	3.0	22.5
			50	0	21.36	21.41	21.39	3.0	22.5
			50	28	22.93	22.84	22.86	1.5	24.0
			50	56	22.49	22.50	22.34	3.0	22.5
			100	0	21.39	21.36	21.34	3.0	22.5
		16QAM	1	0	21.50	21.51	21.79	3.0	22.5
			1	1	22.34	22.53	22.86	2.0	23.5
			1	52	22.33	22.46	22.81	2.0	23.5
			1	104	22.22	22.39	22.71	2.0	23.5
			1	105	22.25	22.42	22.44	3.0	22.5
			50	0	21.47	21.53	21.46	3.0	22.5
			50	28	22.47	22.53	22.40	2.0	23.5
			50	56	22.41	22.45	22.34	3.0	22.5
			100	0	21.31	21.34	21.39	3.0	22.5
		64QAM	1	1	20.71	20.88	21.10	3.5	22.0
		256QAM	1	1	17.78	17.99	18.26	6.5	19.0
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					166300	167300	168300		
					831.50 MHz	836.50 MHz	841.50 MHz		
15 MHz	DFT-s-OFDM	$\pi/2$ BPSK	1	0	23.80	23.91	23.94	0.5	25.0
			1	1	24.54	24.61	24.66	0.0	25.5
			1	39	24.61	24.68	24.30	0.0	25.5
			1	76	24.51	24.45	23.81	0.0	25.5
			1	77	23.61	23.74	23.75	0.5	25.0
			36	0	23.67	23.84	23.66	0.5	25.0
			36	21	24.56	24.68	24.38	0.0	25.5
			36	42	23.64	23.61	23.31	0.5	25.0
			75	0	23.71	23.79	23.59	0.5	25.0
		QPSK	1	0	23.39	23.37	23.45	1.0	24.5
			1	1	24.48	24.76	24.67	0.0	25.5
			1	39	24.54	24.58	24.31	0.0	25.5
			1	76	24.46	24.36	23.79	0.0	25.5
			1	77	23.21	23.18	23.29	1.0	24.5
			36	0	23.62	23.78	23.65	1.0	24.5
			36	21	24.53	24.62	24.35	0.0	25.5
			36	42	23.62	23.57	23.29	1.0	24.5
			75	0	23.70	23.75	23.56	1.0	24.5
		16QAM	1	1	23.46	23.65	23.58	1.0	24.5
			1	39	23.51	23.55	23.26	1.0	24.5
			1	76	23.47	23.30	22.78	1.0	24.5
		64QAM	1	1	22.24	22.42	22.41	2.5	23.0
		256QAM	1	1	20.01	20.00	20.00	4.5	21.0
	CP-OFDM	QPSK	1	1	23.03	23.24	23.24	1.5	24.0

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					165800	167300	168800		
					829.00 MHz	836.50 MHz	844.00 MHz		
10 MHz	DFT-s-OFDM	$\pi/2$ BPSK	1	0	23.62	23.58	23.71	0.5	25.0
			1	1	24.59	24.63	24.49	0.0	25.5
			1	26	24.63	24.53	24.36	0.0	25.5
			1	49	24.61	24.34	23.82	0.0	25.5
			1	50	23.51	23.46	23.56	0.5	25.0
			25	0	23.74	23.67	23.51	0.5	25.0
			25	13	24.67	24.61	24.33	0.0	25.5
			25	26	23.75	23.56	23.26	0.5	25.0
		QPSK	50	0	23.67	23.57	23.42	0.5	25.0
			1	0	23.23	23.06	23.20	1.0	24.5
			1	1	24.57	24.54	24.41	0.0	25.5
			1	26	24.61	24.47	24.26	0.0	25.5
			1	49	24.59	24.28	23.72	0.0	25.5
			1	50	23.19	22.94	23.11	1.0	24.5
			25	0	23.71	23.70	23.44	1.0	24.5
			25	13	24.64	24.61	24.26	0.0	25.5
			25	26	23.74	23.57	23.22	1.0	24.5
			50	0	23.75	23.61	23.37	1.0	24.5
		16QAM	1	1	23.54	23.56	23.37	1.0	24.5
			1	26	23.58	23.45	23.22	1.0	24.5
			1	49	23.55	23.26	22.72	1.0	24.5
		64QAM	1	1	22.30	22.22	22.12	2.5	23.0
		256QAM	1	1	19.77	19.46	19.70	4.5	21.0
	CP-OFDM	QPSK	1	1	23.11	23.12	22.96	1.5	24.0
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					165300	167300	169300		
					826.50 MHz	836.50 MHz	846.50 MHz		
5 MHz	DFT-s-OFDM	$\pi/2$ BPSK	1	0	23.55	23.68	23.70	0.5	25.0
			1	1	24.74	24.57	24.57	0.0	25.5
			1	13	24.53	24.51	24.23	0.0	25.5
			1	23	24.66	24.58	23.89	0.0	25.5
			1	24	23.50	23.46	23.54	0.5	25.0
			12	0	23.67	23.75	23.40	0.5	25.0
			12	6	24.49	24.52	24.12	0.0	25.5
			12	13	23.63	23.59	23.06	0.5	25.0
			25	0	23.65	23.69	23.10	0.5	25.0
		QPSK	1	0	23.24	23.08	23.25	1.0	24.5
			1	1	24.71	24.75	24.50	0.0	25.5
			1	13	24.51	24.48	24.16	0.0	25.5
			1	23	24.65	24.57	23.81	0.0	25.5
			1	24	23.16	22.94	23.13	1.0	24.5
			12	0	23.66	23.74	23.33	1.0	24.5
			12	6	24.46	24.50	24.10	0.0	25.5
			12	13	23.63	23.58	23.04	1.0	24.5
			25	0	23.65	23.60	23.19	1.0	24.5
		16QAM	1	1	23.71	23.74	23.40	1.0	24.5
			1	13	23.51	23.49	23.12	1.0	24.5
			1	23	23.60	23.56	22.80	1.0	24.5
		64QAM	1	1	22.42	22.45	22.22	2.5	23.0
		256QAM	1	1	19.89	19.75	19.65	4.5	21.0
	CP-OFDM	QPSK	1	1	23.24	23.23	23.05	1.5	24.0

8.2. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to either CMW500 Test Set or E7515B Test set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

NOTE


LTE: It was all modulations modulations and worst modulations(QPSK, 256QAM) is reported.
5G NR: All Waveforms (CP-OFDM vs DFT-s_OFDM) and modulations ($\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

RESULTS


See the following pages.

8.2.1. CONDUCTED PEAK TO AVERAGE RESULT


GSM

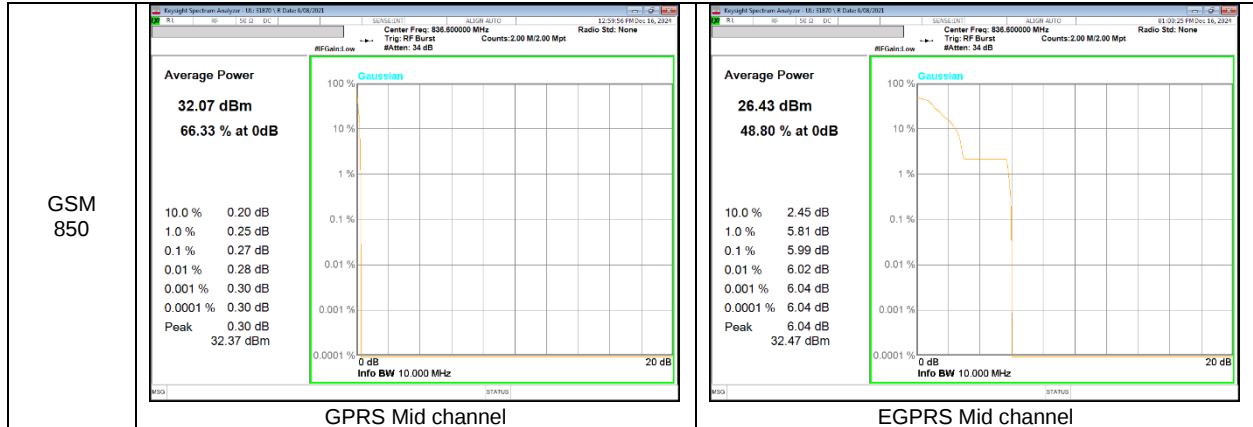

WCDMA

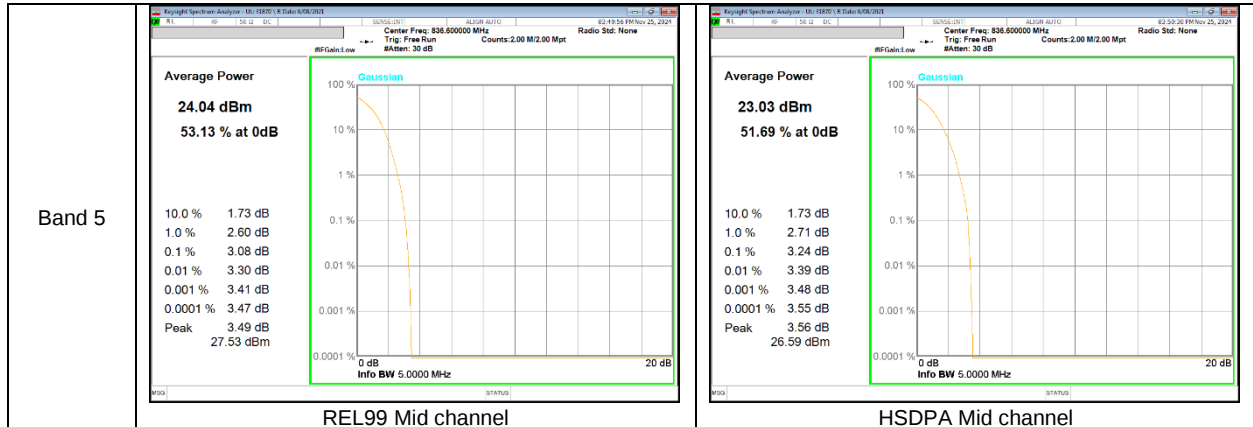


LTE Band 14

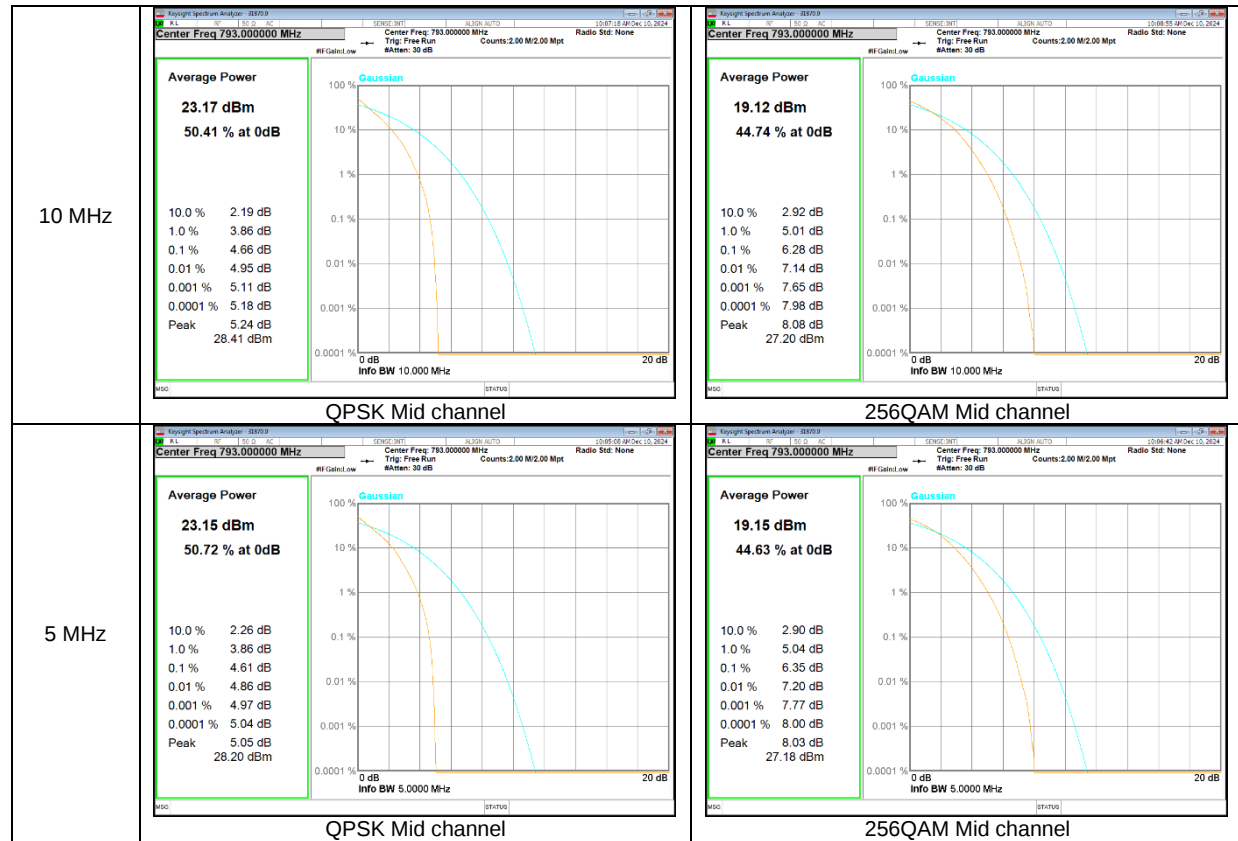


LTE Band 26 (Part 90)



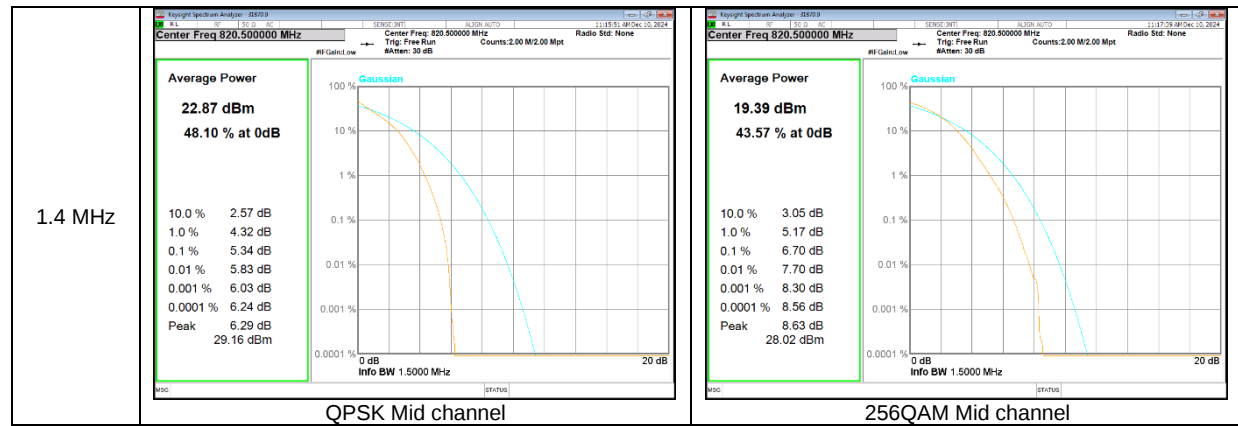


LTE Band 26 (Straddle)



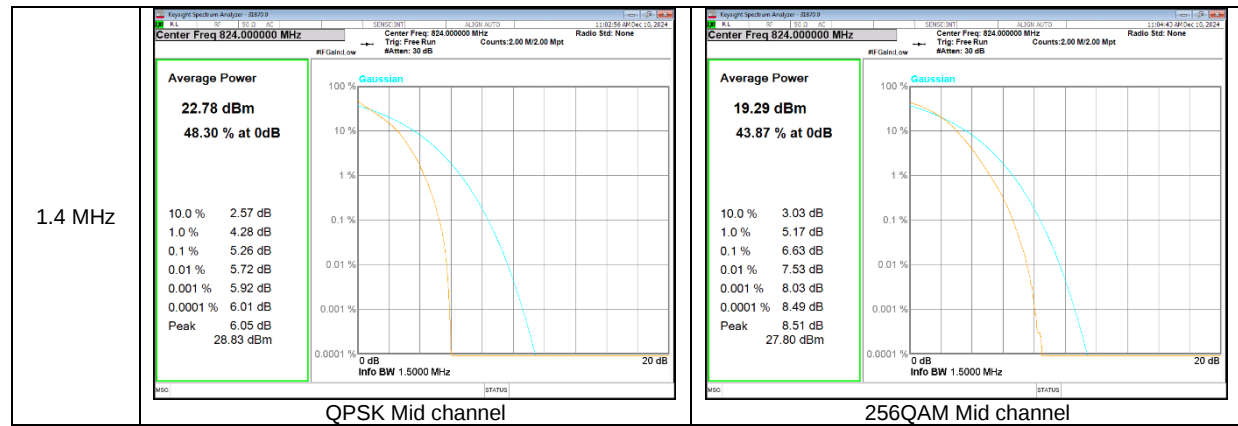


LTE Band 26 (Part 22)



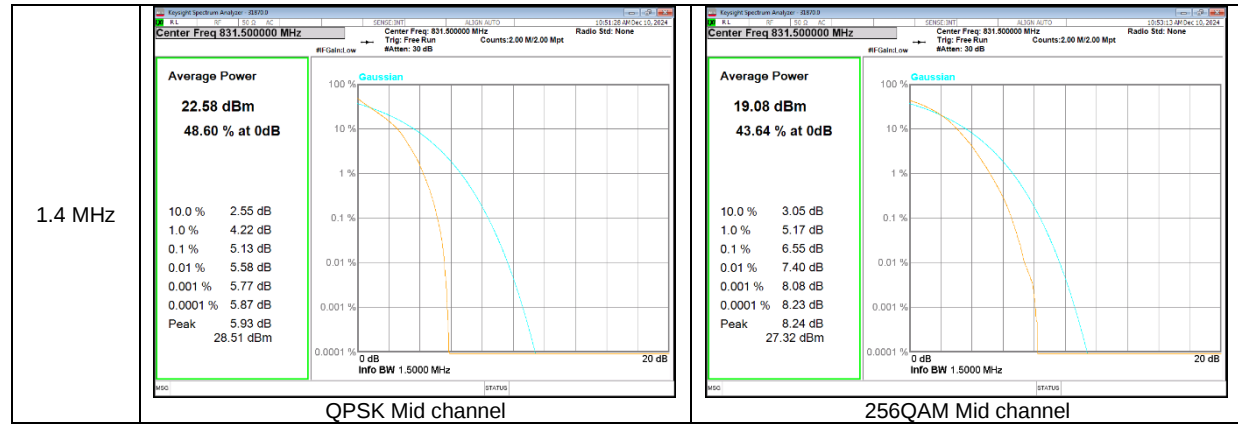

NR Band n5 CP-OFDM

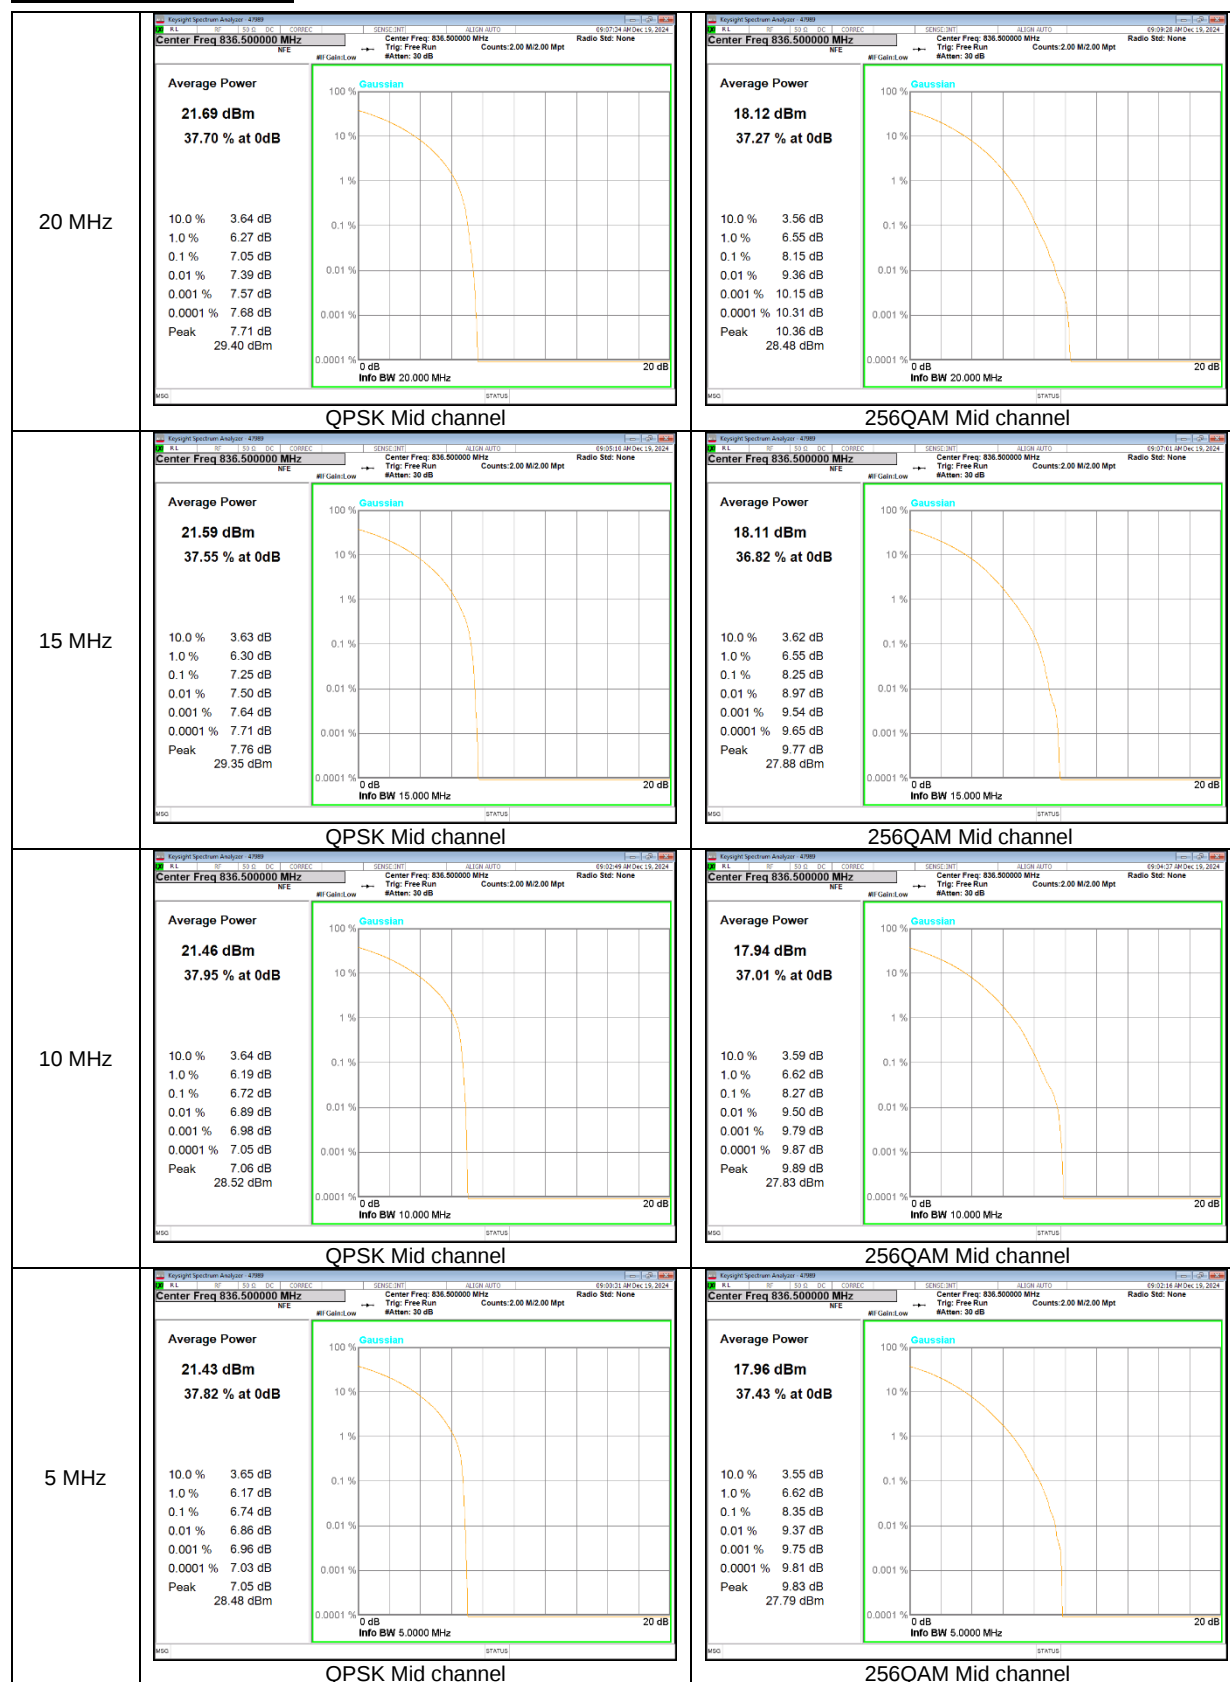

8.3. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at middle channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v03r01)

RESULTS

See the following pages.

- GSM

Band	Modulation	f [MHz]	99% BW (kHz)	-26dB BW (kHz)
850	GPRS	836.6	245.93	316.5
	EGPRS		239.41	302.1

- WCDMA

Band	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
B5	Rel.99	836.6	4.131	4.686
	HSDPA		4.148	4.677

- LTE Band 14

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B14	10M	QPSK	793.0	8.962	9.769
		16QAM		8.974	9.844
	5M	QPSK		4.503	5.071
		16QAM		4.485	5.195

- LTE Band 26 (Part 90)

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B26	15M	QPSK	821.5	13.420	14.400
		16QAM		13.422	14.560
	10M	QPSK	819.0	8.936	9.809
		16QAM		8.942	9.795
	5M	QPSK	819.0	4.498	5.139
		16QAM		4.487	5.065
	3M	QPSK	819.0	2.697	2.999
		16QAM		2.695	3.041
	1.4M	QPSK	819.0	1.088	1.309
		16QAM		1.090	1.310

- LTE Band 26 (Straddle)

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B26	15M	QPSK	824.0	13.412	14.720
		16QAM		13.423	14.430
	10M	QPSK		8.948	9.827
		16QAM		8.966	9.779
	5M	QPSK		4.491	5.050
		16QAM		4.490	5.056
	3M	QPSK		2.689	3.034
		16QAM		2.693	2.992
	1.4M	QPSK		1.089	1.312
		16QAM		1.094	1.321

- LTE Band 26 (Part 22)


Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B26	15M	QPSK	836.5	13.416	14.640
		16QAM		13.446	14.690
	10M	QPSK	831.5	8.953	9.810
		16QAM		8.939	9.589
	5M	QPSK	831.5	4.499	4.988
		16QAM		4.490	5.087
	3M	QPSK	831.5	2.697	3.053
		16QAM		2.686	3.032
	1.4M	QPSK	831.5	1.091	1.303
		16QAM		1.093	1.348

- NR Band n5 CP-OFDM


Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
NR n5	20M	QPSK	836.5	18.926	20.060
		16QAM		18.919	19.900
	15M	QPSK		14.122	15.040
		16QAM		14.101	14.990
	10M	QPSK		9.288	10.130
		16QAM		9.292	10.090
	5M	QPSK		4.493	5.121
		16QAM		4.482	4.981

8.3.1. OCCUPIED BANDWIDTH RESULT

GSM 850

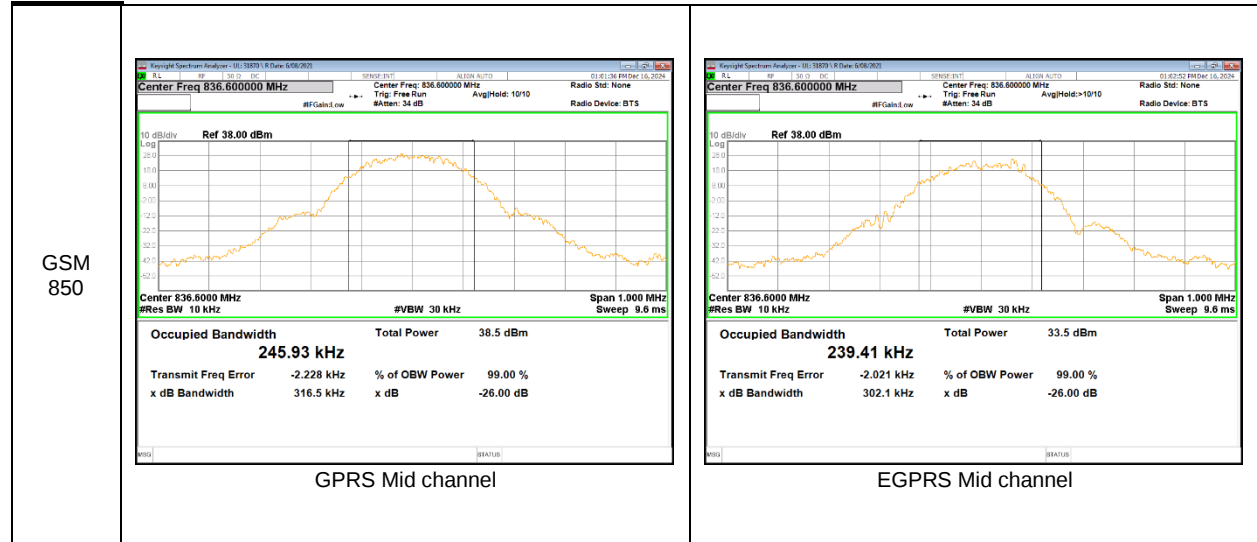

WCDMA Band 5

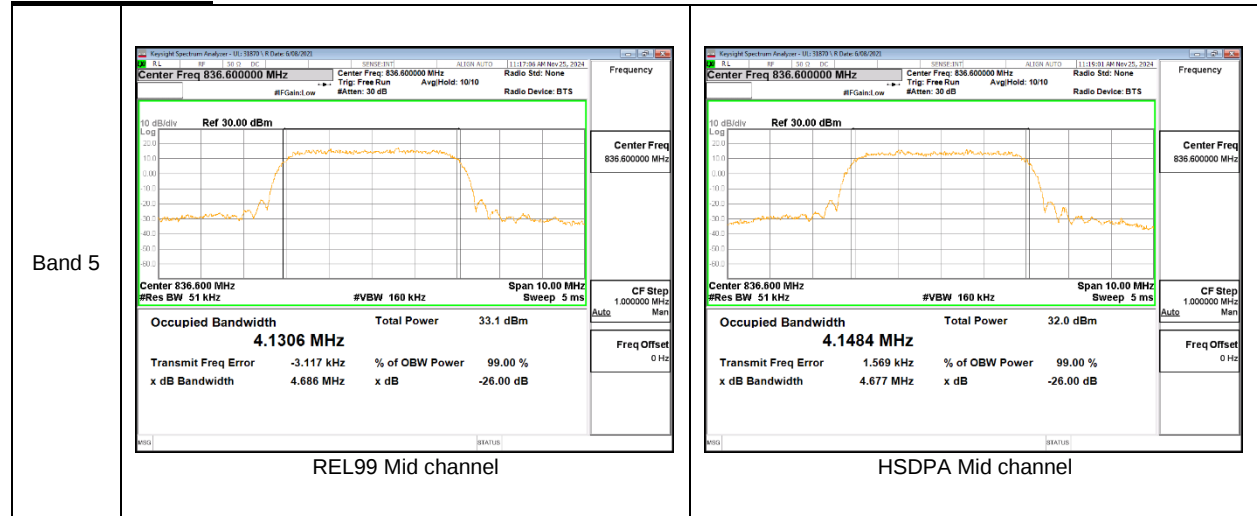


LTE Band 14



LTE Band 26 (Part 90)



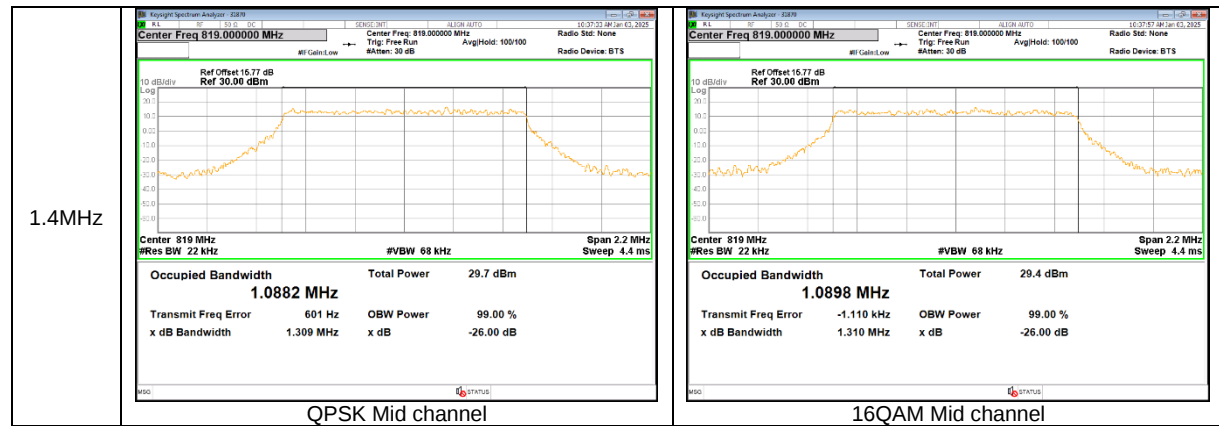

LTE Band 26 (Straddle)





LTE Band 26 (Part 22)





NR Band n5 CP-OFDM



8.4. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §22.917, §90.543 and §90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 90.543:

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

Part 90.691:

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The transmitter output was connected to either CMW500 Test Set or E7515B Test set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

GSM

- a) Set the RBW = 1 - 5% of OBW(GSM850 – 8.2kHz)
/ within 100 kHz from the edge of the authorized frequency block/band.
- b) Set the RBW = 100 kHz / above 100 kHz from the edge of the authorized frequency block/band
- c) Set VBW $\geq 3 \times$ RBW;
- d) Set span $\geq 2 \times$ OBW;
- e) Sweep time = Auto;
- f) Detector = RMS;
- g) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW;
- h) Trace mode = Average(100);
- i) Add duty cycle correction factor (9dB);

WCDMA/LTE/5G NR

- a) Set the RBW = 1 - 1.5 % of OBW (Typically limited to a minimum RBW of 1% of the OBW)
/ within 100 kHz from the edge of the authorized frequency block/band.
- b) Set the RBW = 100 kHz / above 100 kHz from the edge of the authorized frequency block/band
- c) Set VBW $\geq 3 \times$ RBW;
- d) Set span $\geq 2 \times$ OBW;
- e) Sweep time = Auto;
- f) Detector = RMS;
- g) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW;
- h) Trace mode = Average (100);

NOTE1

For frequency range of 736-775 MHz and 793-805 MHz.(LTE Band 14)

- a) Set the RBW = 6.25 kHz (The minimum RBW setting value for the Spectrum analyzer is 6.8 kHz)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Sweep time = 1 second ;
- d) Detector = RMS;
- e) Ensure that the number of measurement points $\geq 2 \times \text{Span} / \text{RBW}$;
- f) Trace Mode = Average;

NOTE2

Note that the spurious emissions outside of the channel include narrowband signals. These signals are all below the -13dBm limits. Although the measurement bandwidth is less than the reference bandwidth of 1MHz no addental correction is applied as ANSI C63.26 section 4.2.3 only requires the correction to be applied when the OBW of the emission being measured is wider than the measurement bandwidth (Where the OBW of the signal under measurement is less than the RBW of the measuring instrument, no bandwidth correction or integration will be required.) Plots for low and high channels show the level of the emission measured with the reduced bandwidth and the level of the same emission measured using the integration method over the 1MHz reference bandwidth are very close, indicating the emissions are narrowband.

NOTE3

5G NR: All Waveforms (CP-OFDM vs DFT-s_OFDM) and modulations ($\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

NOTE4


Emission Mask: All 1RB Positions (Edge RB, Outer RB, Inner RB) and modulations (QPSK, 16QAM, 64QAM, 256QAM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

RESULTS

See the following pages.

8.4.1. BAND EDGE RESULT

GSM

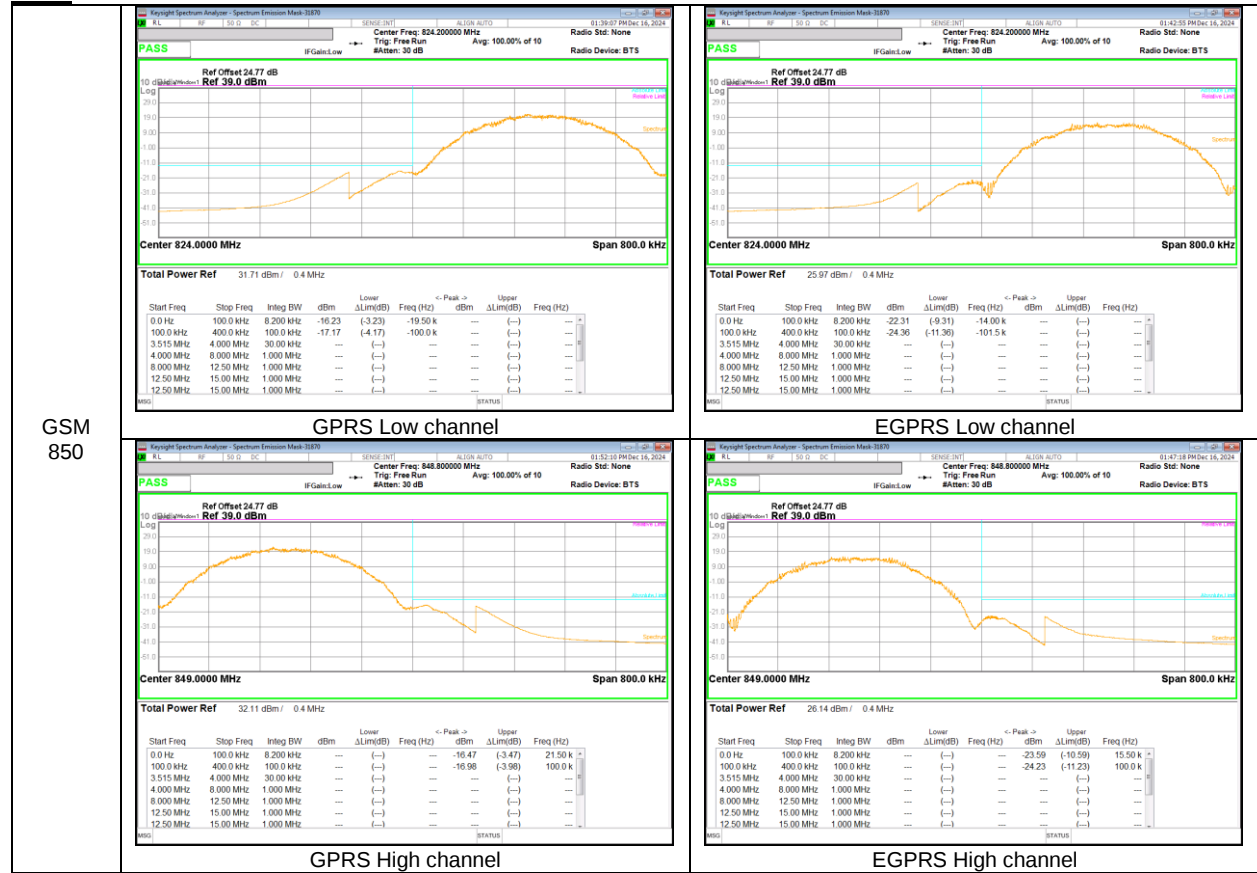

WCDMA

