




⚠ WARNING
This product can expose you to chemicals known to the State of California to cause cancer or birth defects or other reproductive harm. For more information, go to www.p65Warnings.ca.gov.

NEED HELP?
1-833-692-6787

⚠ WARNING
This device is intended only for charging vehicles not requiring ventilation during charging.
This device contains arcing or sparking parts that should not be exposed to flammable vapors.
This equipment should be located at least 18 inches above the floor. Do not use this device with an extension cord.




CAUTION
Risk of electric shock. Do not remove cover or attempt to open the enclosure. No serviceable parts inside. Refer servicing to qualified service personnel. Do not use this product if there is any damage to the unit.






EV charger
Model: EVC48ALVL2C1
Input/Output: 208/240VAC
50/60Hz
Max 48A
Max 11.5kW
MMQ: ±1%
Enclosure type: TYPE 4
Operating Temp: -30~50°C
-22~122°F
Storage Temp: -40~75°C
-40~167°F


FOR USE WITH ELECTRIC VEHICLES.
FOR INDOOR OR OUTDOOR USE.



Intertek
5014466
Conforms to UL Std.2594
Certified to CSA Std.C22.2#280
CAN ICES-3(B)/NMB-3(B)
IC:22089-78134
FCC ID: 2AKGT-78134
Contains FCC ID: XMR201909EC25AFX
Contains IC: 10224A-2019EC25AFX
Contains FCC ID: 2AHMR-BW16
Contains IC: 23236-BW16



4912888535269720090
Date Code: 0K201078134-0
LEDVANCE LLC

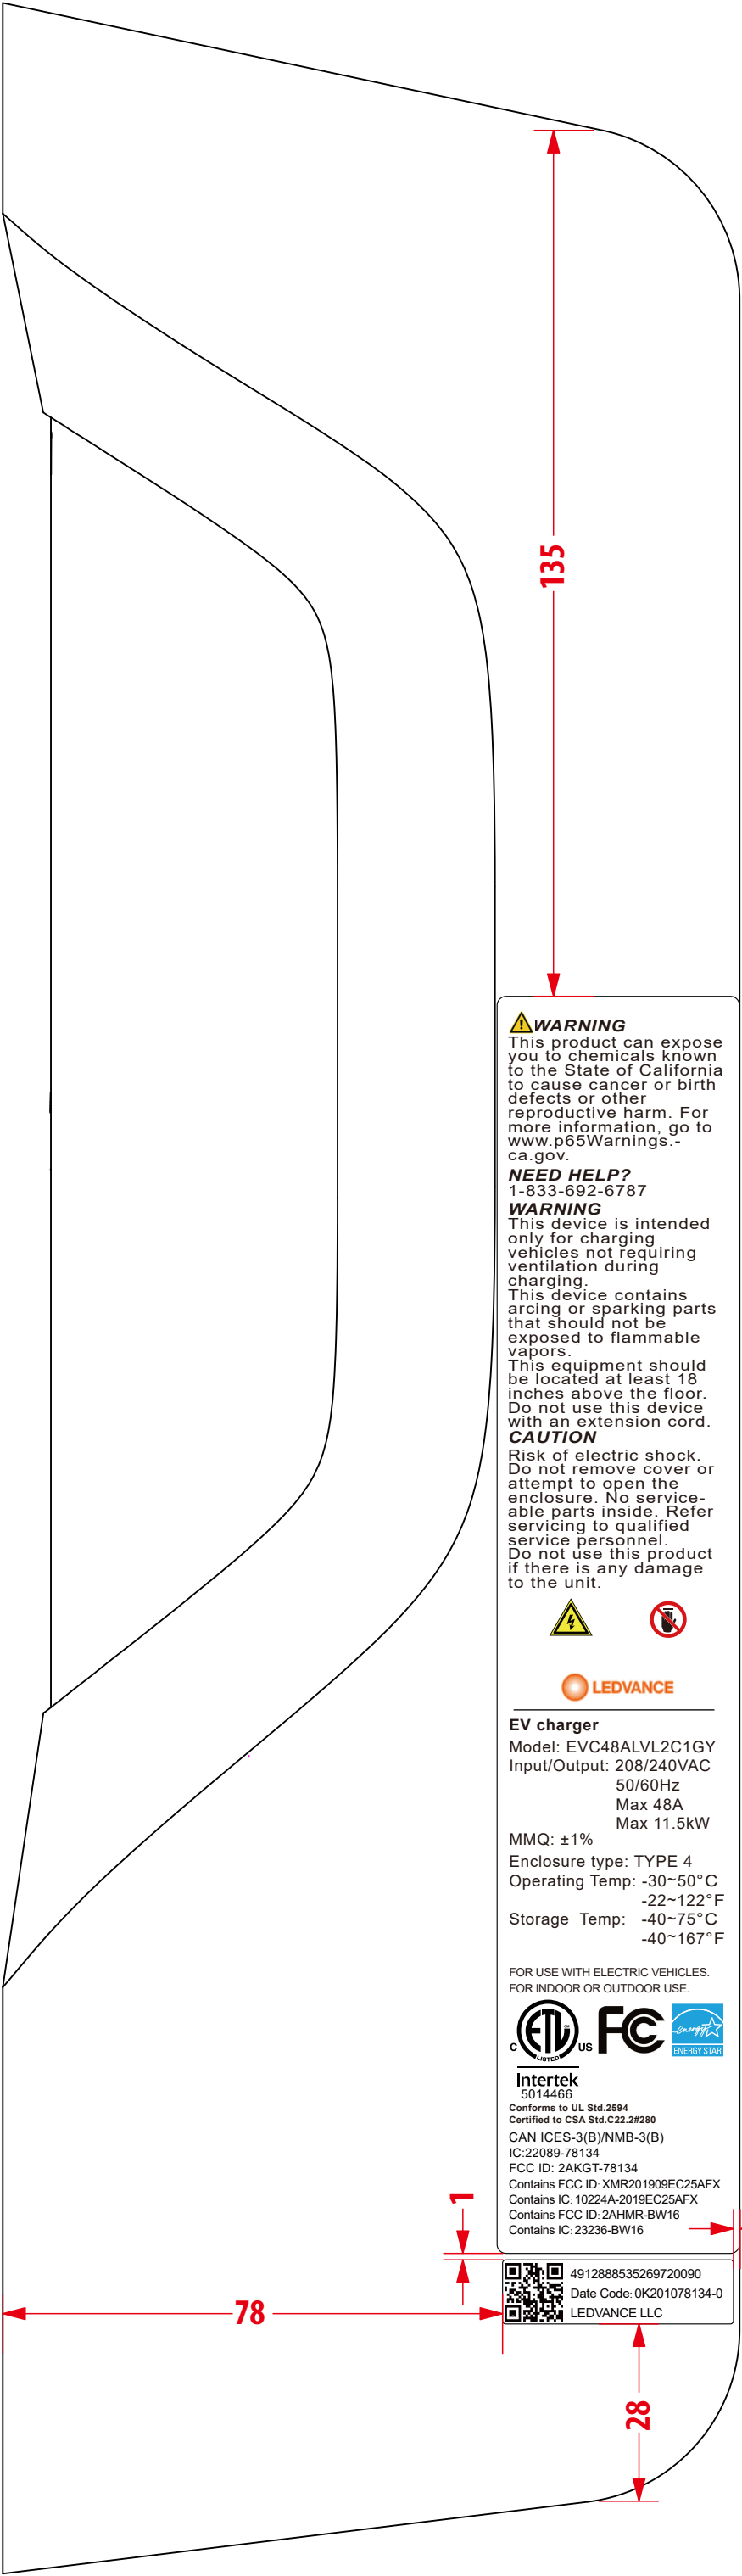

⚠ WARNING
This product can expose you to chemicals known to the State of California to cause cancer or birth defects or other reproductive harm. For more information, go to www.p65Warnings.ca.gov.

NEED HELP?
1-833-692-6787

⚠ WARNING
This device is intended only for charging vehicles not requiring ventilation during charging.
This device contains arcing or sparking parts that should not be exposed to flammable vapors.
This equipment should be located at least 18 inches above the floor. Do not use this device with an extension cord.

CAUTION
Risk of electric shock. Do not remove cover or attempt to open the enclosure. No serviceable parts inside. Refer servicing to qualified service personnel. Do not use this product if there is any damage to the unit.





EV charger
Model: EVC48ALVL2C1GY
Input/Output: 208/240VAC
50/60Hz
Max 48A
Max 11.5kW
MMQ: ±1%
Enclosure type: TYPE 4
Operating Temp: -30~50°C
-22~122°F
Storage Temp: -40~75°C
-40~167°F

FOR USE WITH ELECTRIC VEHICLES.
FOR INDOOR OR OUTDOOR USE.



Intertek
5014466
Conforms to UL Std.2594
Certified to CSA Std.C22.2#280
CAN ICES-3(B)/NMB-3(B)
IC:22089-78134
FCC ID: 2AKGT-78134
Contains FCC ID: XMR201909EC25AFX
Contains IC: 10224A-2019EC25AFX
Contains FCC ID: 2AHMR-BW16
Contains IC: 23236-BW16



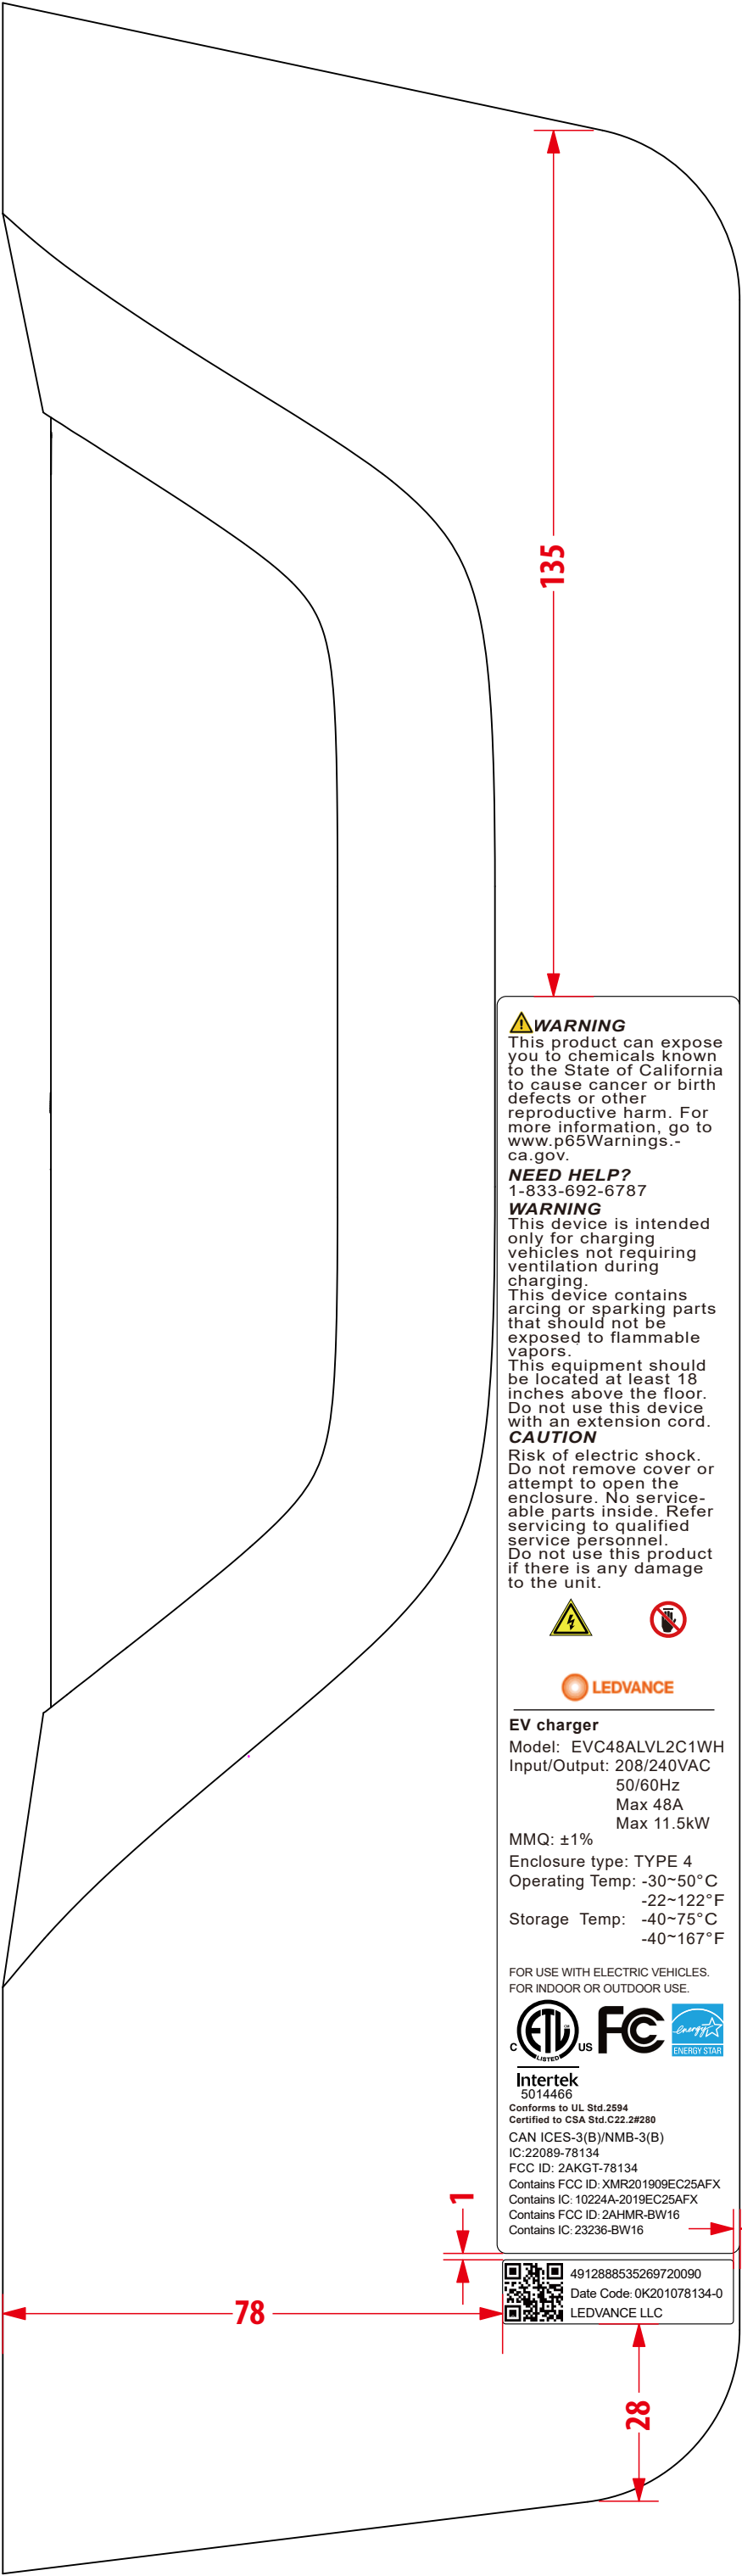

⚠ WARNING
This product can expose you to chemicals known to the State of California to cause cancer or birth defects or other reproductive harm. For more information, go to www.p65Warnings.ca.gov.

NEED HELP?
1-833-692-6787

⚠ WARNING
This device is intended only for charging vehicles not requiring ventilation during charging.
This device contains arcing or sparking parts that should not be exposed to flammable vapors.
This equipment should be located at least 18 inches above the floor. Do not use this device with an extension cord.

CAUTION
Risk of electric shock. Do not remove cover or attempt to open the enclosure. No serviceable parts inside. Refer servicing to qualified service personnel. Do not use this product if there is any damage to the unit.




EV charger
Model: EVC48ALVL2C1WH
Input/Output: 208/240VAC
50/60Hz
Max 48A
Max 11.5kW
MMQ: ±1%
Enclosure type: TYPE 4
Operating Temp: -30~50°C
-22~122°F
Storage Temp: -40~75°C
-40~167°F


FOR USE WITH ELECTRIC VEHICLES.
FOR INDOOR OR OUTDOOR USE.



Intertek
5014466
Conforms to UL Std.2594
Certified to CSA Std.C22.2#280
CAN ICES-3(B)/NMB-3(B)
IC:22089-78134
FCC ID: 2AKGT-78134
Contains FCC ID: XMR201909EC25AFX
Contains IC: 10224A-2019EC25AFX
Contains FCC ID: 2AHMR-BW16
Contains IC: 23236-BW16



4912888535269720090
Date Code: 0K201078134-0
LEDVANCE LLC

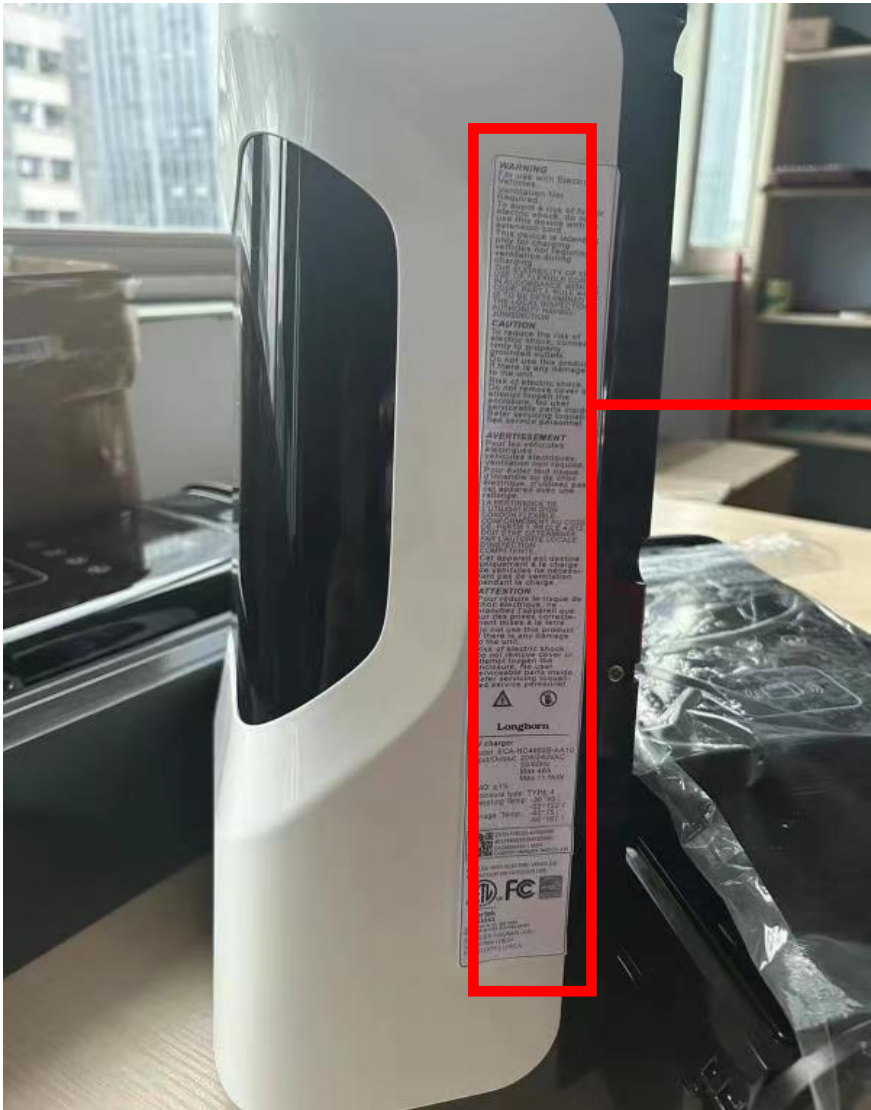

Label
Location