

ISED CABid: ES1909
Lab. Company Number: 4621A

Test Report No:
79469RRF.001A1

Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	Infotainment Head Unit
(*) Trademark	Marelli
(*) Model and /or type reference	HUAIDP21BY
Other identification of the product	FCC ID: RX2HUAIDP21BY IC: 4983A-HUAIDP21BY
(*) Features	Bluetooth, WLAN a, n, ac: (20/40/80 MHz BW), channel #149 HW version: PRS2.1 SW version: PI26.53
Applicant	Marelli Europe S.p.A. Viale A. Borletti 61/63 – 20011 Corbetta (MI) - ITALY
Test method requested, standard	USA FCC Part 15.247 (10-1-23 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-23 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 3 (August 2023). CANADA RSS-Gen Issue 5 amendment 2 (February 2021). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2024-08-09
Report template No	FDT08_24 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	4
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	5
TEST SAMPLE DESCRIPTION	5
IDENTIFICATION OF THE CLIENT	7
TESTING PERIOD AND PLACE	7
DOCUMENT HISTORY	7
ENVIRONMENTAL CONDITIONS	7
REMARKS AND COMMENTS	8
TESTING VERDICTS	9
SUMMARY	10
APPENDIX A: TEST RESULTS. BLUETOOTH EDR	11

Acronyms

Acronym ID	Acronym Description
Avg COT	Average Channel Occupancy Time
BW	Bandwidth
Detector	Detector used
Ebw	Emission Bandwidth
Equipment	Equipment Type
Freq	Frequency
Freq Rng	Frequency Range
Freq Sep	Frequency Separation
Inband Peak Lvl	Inband Peak Level
Lvl	Level
MP	Measurement Point
Mod	Modulation
Mode	MIMO Mode
NHC	Number of Hopping Channels
NHp	Number of hops over the period
Occ Ch BW	Occupied Channel Bandwidth
Peak Power	Maximum Peak Conducted Output Power
Pol	Polarization
Port	Active Port
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:
Measurement uncertainty $\leq \pm 5,35$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:
Measurement uncertainty $\leq \pm 4,32$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:
Measurement uncertainty $\leq \pm 5,51$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the conducted testing of EUT is:

- RF Peak Output Power: Measurement uncertainty $\leq \pm 0,80$ dB
- Accumulated Dwell Time: Measurement uncertainty $\leq \pm 0,16$ %
- Minimum Frequency Occupation Time: Measurement uncertainty $\leq \pm 0,53$ %
- Hopping Frequency Separation: Measurement uncertainty $\leq \pm 1,74$ %
- Occupied Channel Bandwidth: Measurement uncertainty $\leq \pm 1,24$ %
- Conducted Band-edge spurious emissions: Measurement uncertainty $\leq \pm 1,76$ dB

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a Infotainment Head Unit. Infotainment Head Unit, with Bluetooth and Wi-Fi .

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	75807_1.1	AIDA R2 MID (HEADUNIT)	AIDAR2 MID	1ATF3B158F1E	2024-02-05	Element Under Test
S/01	75807_10.1	CONNECTION CABLE	--	--	2024-02-05	Auxiliary Element
S/01	75807_12.1	CONNECTION CABLE	--	--	2024-02-05	Auxiliary Element
S/01	75807_3.1	CAN BOX	--	2026-08	2024-02-05	Auxiliary Element
S/01	75807_5.1	MAIN HARNESS	--	--	2024-02-05	Auxiliary Element
S/01	75807_6.1	CONNECTION CABLE (USB)	--	--	2024-02-05	Auxiliary Element
S/02	75807_46.1	AIDAR2 RF CONDUCTED (HEADUNIT)	HUAIDP21BY	1ATF3B150F1E	2024-03-05	Element Under Test
S/02	75807_50.1	Harness			2024-03-05	Auxiliary Element
S/02	75807_60.1	MCANbox2	AIDAR2		2024-03-12	Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Radiated tests.
S/02	Conducted tests.

Test sample description

Ports..... :	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾
	Main connector (12ways)	>3	[X]	[]	[]
	MQS connector (8ways)	>3	[X]	[]	[]
	shielded cables	>3	[X]	[X]	[]
Supplementary information to the ports..... :					

Rated power supply :	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: Main and MQS cables: 12 Vdc nominal voltage (9.5 - 16 Vdc)					
☒	DC: shielded cables: 12 Vdc nominal voltage (9.5 - 16 Vdc)						
Rated Power..... :							
Clock frequencies..... :							
Other parameters :							
Software version..... :	PI26.53						
Hardware version :	PRS2.1						
Dimensions in cm (W x H x D) ... :	220 x 160 x 52 mm						
Mounting position :	☐	Table top equipment					
	☐	Wall/Ceiling mounted equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
	☒	Other: HUAIDP21BY is installed in vehicle dashboard (automotive environment)					
Modules/parts..... :	Module/parts of test item			Type		Manufacturer	
							
Accessories (not part of the test item) :	Description			Type		Manufacturer	
							
Documents as provided by the applicant :	Description			File name		Issue date	
							

(3) Only for Medical Equipment

Identification of the client

Marelli Europe S.p.A.
Viale A. Borletti 61/63 – 20011 Corbetta (MI) - ITALY

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2024-06-11
Date (finish)	2024-06-14

Document history

Report number	Date	Description
79469RRF.001	2024-07-05	First release.
79469RRF.001A1	2024-08-09	Second release. This test report is modified due to a missing information. This modification test report cancels and replaces the test report 79469RRF.001.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Alvaro Gutierrez Naranjo, Pablo Redondo Reyes.
Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
07445	DC POWER SUPPLY 30V/5A	U8002A	KEYSIGHT TECHNOLOGIES	N/A
05850	DIGITAL MULTIMETER	179	FLUKE	2024-11-02
07760	DIGITAL MULTIMETER	175	FLUKE	2024-11-08
10304	EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE AND SCHWARZ	2026-02-19
06615	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2025-04-04
06609	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2025-04-22
07040	EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz	OSP-B157Wx	ROHDE AND SCHWARZ	2025-04-19
04953	HIGH PASS FILTER 1.1-8GHz	WHK10-990-1100-8000-40SS	WAINWRIGHT INSTRUMENTS	2025-02-14
09029	HIGH PASS FILTER 17-40 GHZ	STHP-17-40G-92	TEMSTRON/TEM WELL	2025-03-29
08770	HIGH PASS FILTER 3-18 GHZ	ST-3GA2833-HS	TEMSTRON/TEM WELL	2024-07-27
06496	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK	2026-12-01
04657	HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2026-06-12
06143	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2027-01-22
07656	LOW PASS FILTER TEMSTRON/TEMWELL DC - 1 GHZ	ST-1GA3250-LS	TEMSTRON/TEM WELL	2025-02-02
07193	MULTI-DEVICE CONTROLLER	CO3000	INNCO	N/A
08848	OPEN SWITCH UNIT UP TO 7.5 GHz	OSP-B157W8 PLUS	ROHDE & SCHWARZ	2024-12-21
00922	POWER SUPPLY DC 40 V / 40 A	NGPE 40/40	ROHDE AND SCHWARZ	N/A
08856	PRE-AMPLIFIER G>30dB 18-40GHz	BLMA 1840-4A	BONN ELEKTRONIK	2025-02-27
03783	PRE-AMPLIFIER G>30dB 1GHz-18GHz	BLMA 0118-3A	BONN ELEKTRONIK	2025-03-15
06142	PRE-AMPLIFIER G>38dB 30MHz-6GHz	BLNA 0360-01N	BONN ELEKTRONIK	2024-06-28
06144	PRE-AMPLIFIER G>40dB 10MHz-6GHz	BLNA 0160-01N	BONN ELEKTRONIK	2024-07-25

Control No.	Equipment	Model	Manufacturer	Next Calibration
06791	SEMIANECHOIC ABSORBER LINED CHAMBER IV	FACT 3 200 STP	ETS LINDGREN	N/A
06793	SHIELDED ROOM	S101	ETS LINDGREN	N/A
07794	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2025-04-21
06668	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2024-12-14
07791	SIGNAL GENERATOR 8kHz-6GHz	SMB100B	ROHDE AND SCHWARZ	2026-03-15
07793	SIGNAL GENERATOR 8kHz-6GHz	SMBV100B	ROHDE AND SCHWARZ	2026-03-11
04848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	N/A
06611	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2025-04-04
07798	WMS32	WMS32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

Bluetooth EDR

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
FCC 15.247 (a) (1) / RSS-247 5.1 (b)	20 dB Bandwidth	P	
FCC 15.247 (a) (1) (iii) / RSS-247 5.1 (d)	Time of Occupancy (Dwell Time)	P	
FCC 15.247 (b) / RSS-247 5.4. (b)	Maximum peak output power and	P	
FCC 15.247 (a) (1) (iii) / RSS-247 5.1 (d)]	Number of hopping channels	P	
FCC 15.247 (d) / RSS-247 5.5	Band-edge emissions compliance	P	
FCC 15.247 (d) / RSS-247 5.5	Emission limitations radiated (Transmitter)	P	
<u>Supplementary information and remarks:</u> None.			

Appendix A: Test results. Bluetooth EDR

TEST CONDITIONS	13
TEST CASES DETAILS	16
<i>99dBw Occupied Channel Bandwidth 99%</i>	16
<i>RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth and Carrier Frequency Separation</i>	28
<i>RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy (Dwell Time)</i>	46
<i>RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels</i>	52
<i>RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power</i>	58
<i>RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)</i>	70
<i>RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)</i>	97

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal: Main and MQS cables: 12 Vdc nominal voltage (9.5 - 16 Vdc) or
shielded cables: 12 Vdc nominal voltage (9.5 - 16 Vdc)

Type of Power Supply: Vehicle battery.

ANTENNA (*):

Type of Antenna: PCB integral antenna (printed antenna)

Maximum Declared Antenna Gain: 0dBi

TEST FREQUENCIES (*):

Modulation	Data rates	Low Channel:	Middle Channel	High Channel
BTEDR GFSK	1-DH5	2402 MHz	2441 MHz	2480 MHz
BTEDR PI/4 DQPSK	2-DH5	2402 MHz	2441 MHz	2480 MHz
BTEDR 8DPSK	3-DH5	2402 MHz	2441 MHz	2480 MHz

During transmitter test the EUT was controlled by a SW tool provided by the client to operate in a continuous transmit mode on the modulation schemes and test channels as required.

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

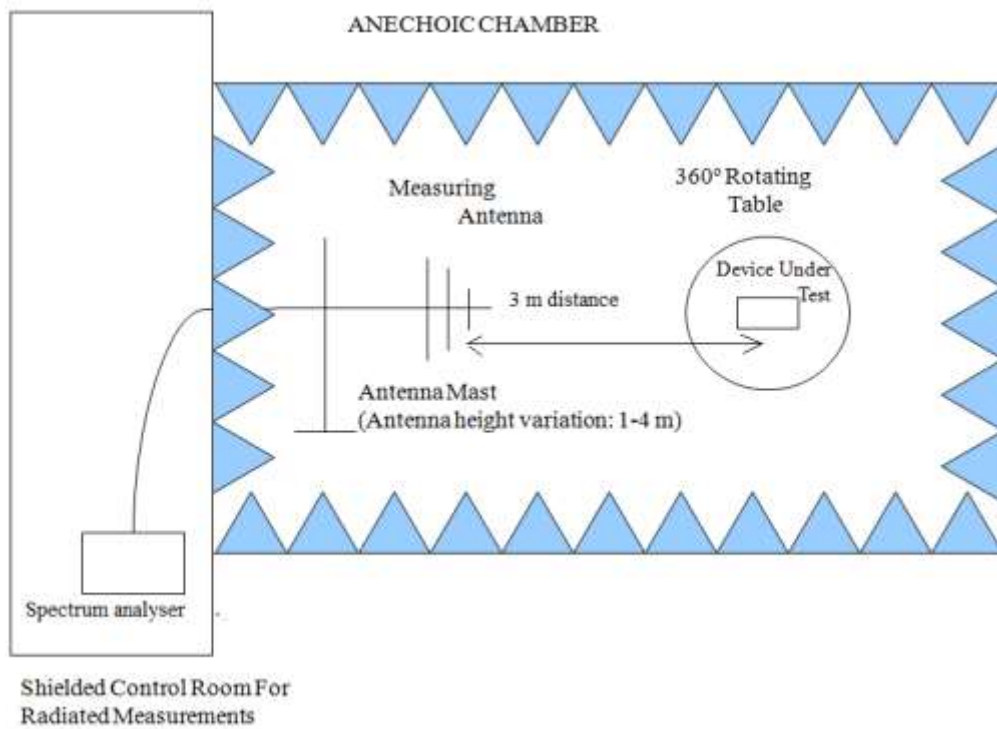

Radiated measurements setup from 1 GHz to 17 GHz:

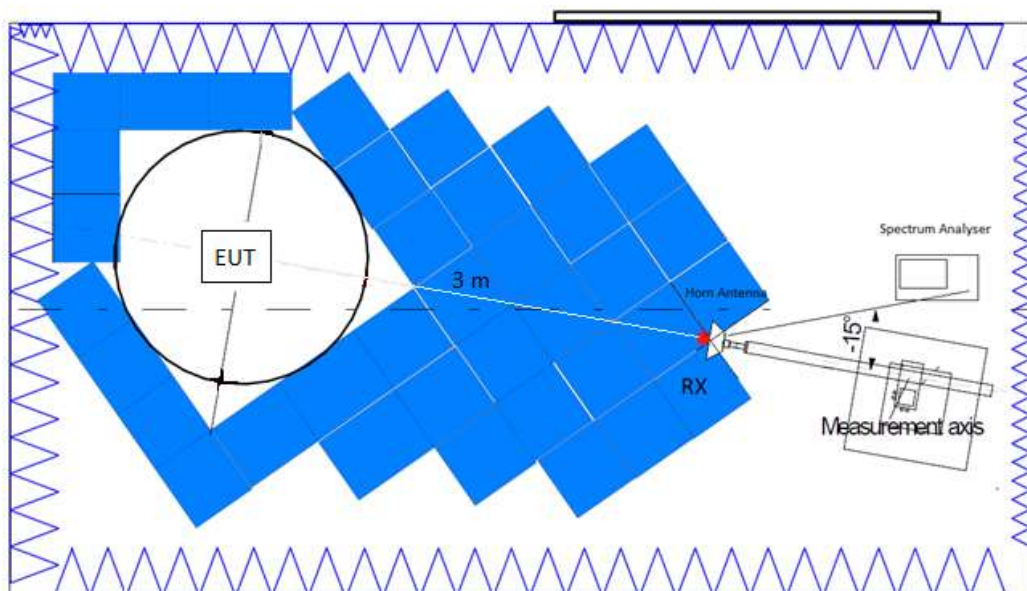

Radiated measurements setup $f > 17$ GHz:

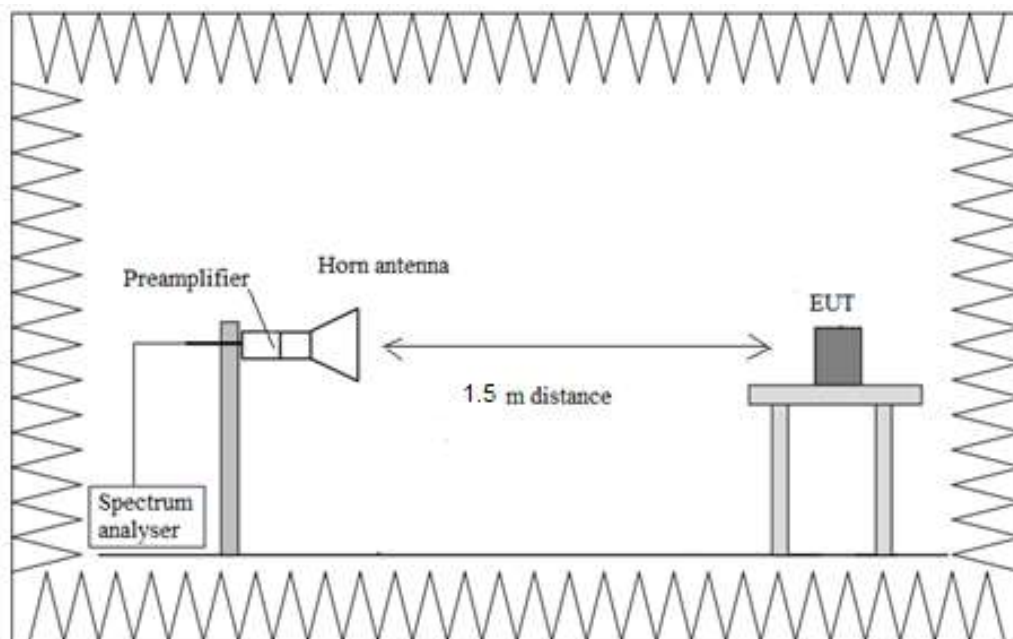

TEST CASES DETAILS

99dBw Occupied Channel Bandwidth 99%

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	0.915
		2441.00000		0.910
		2480.00000		0.910



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

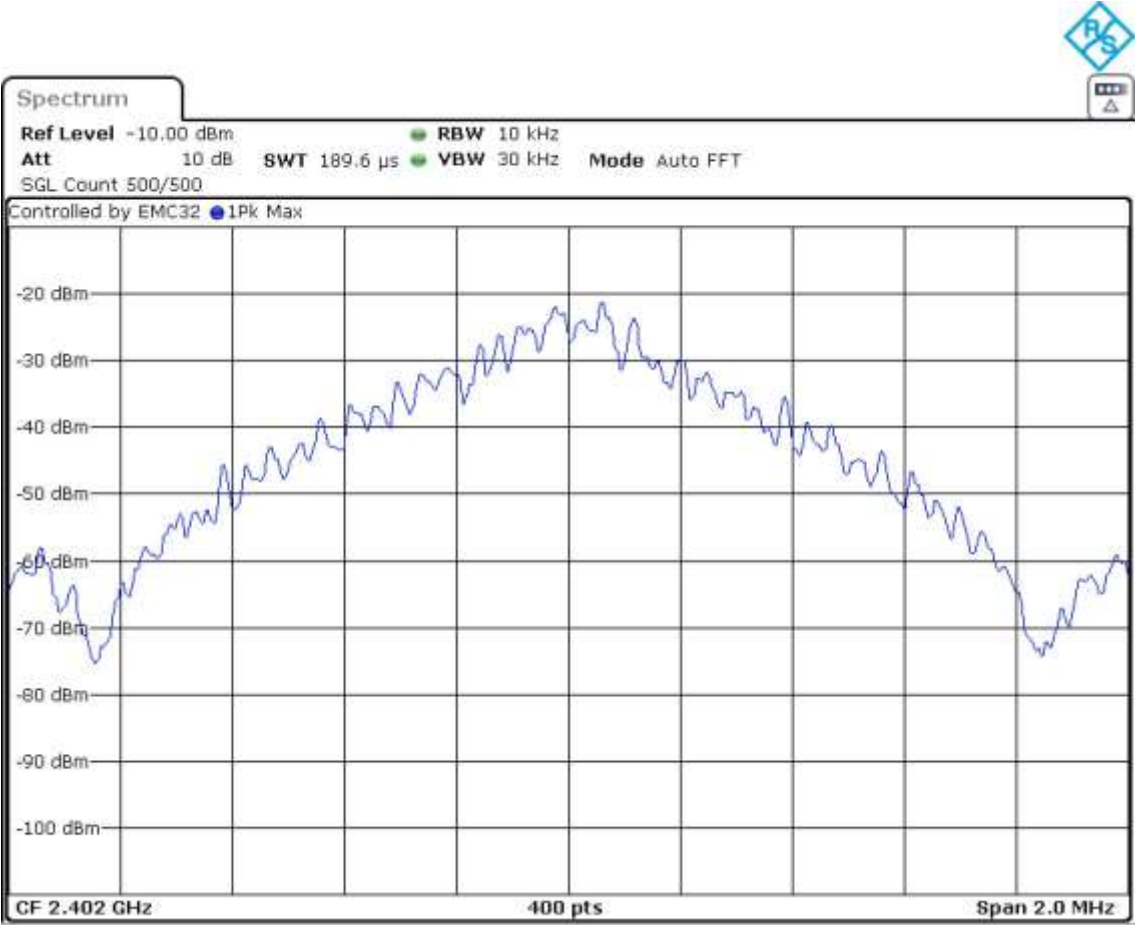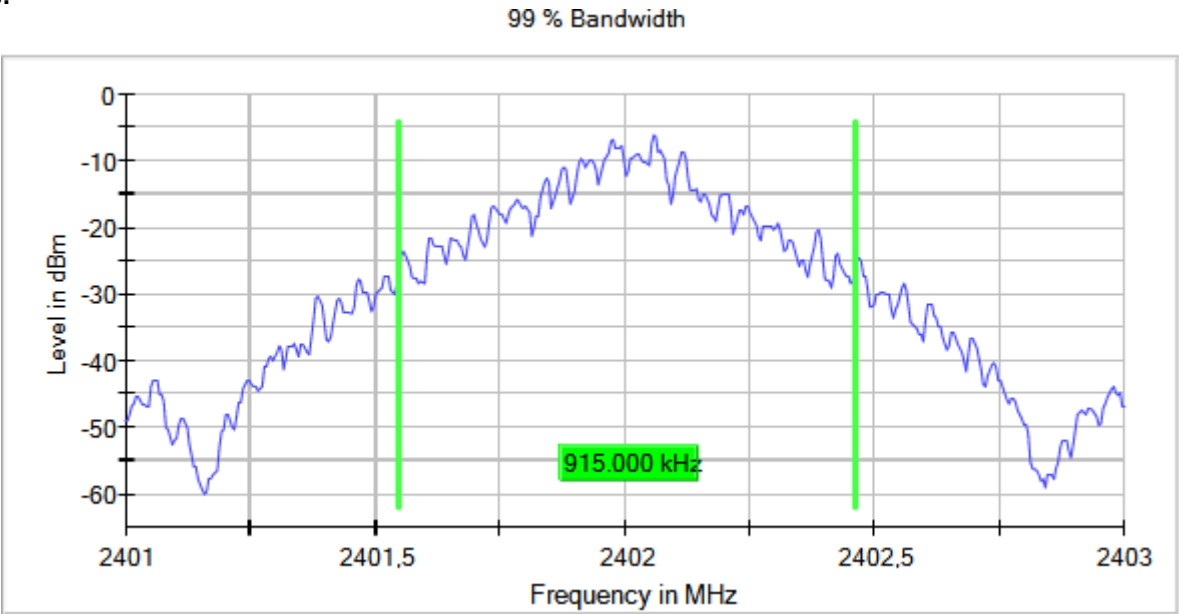



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

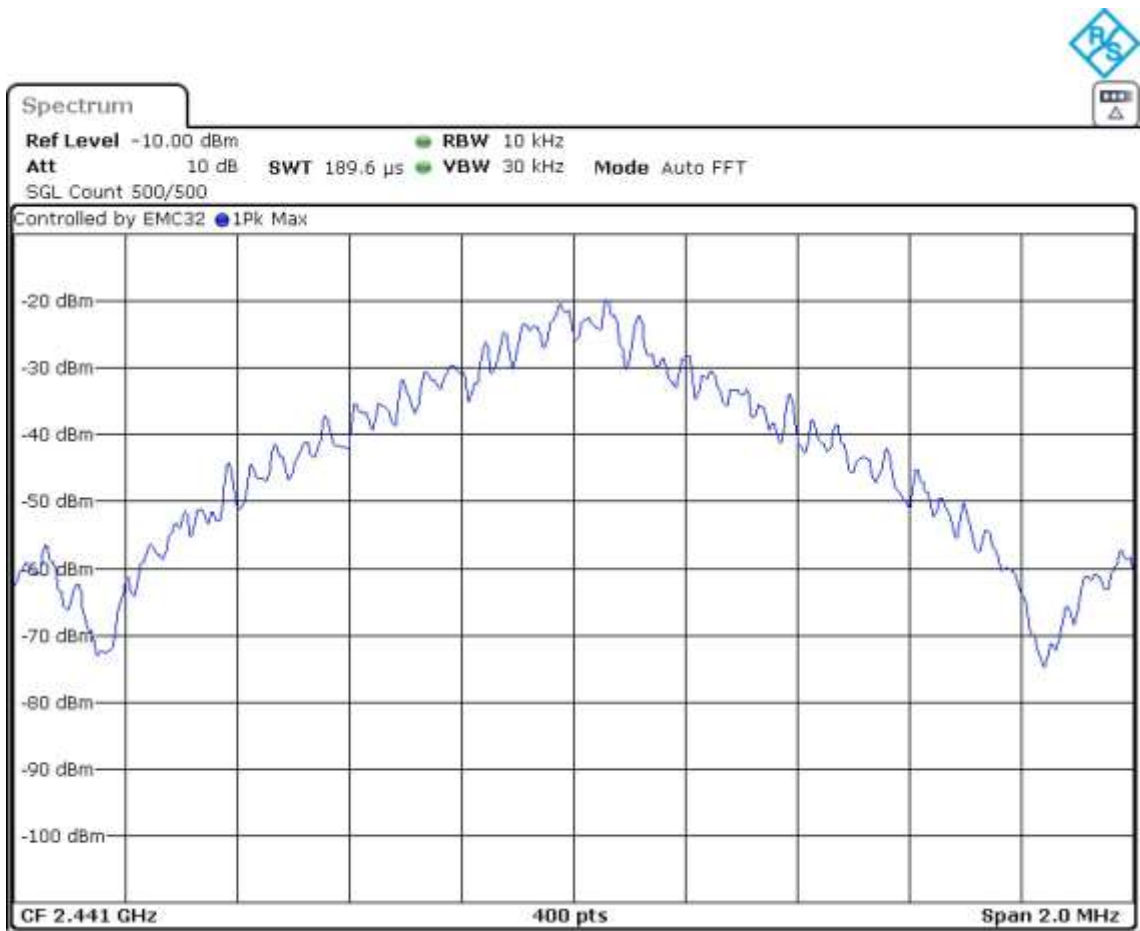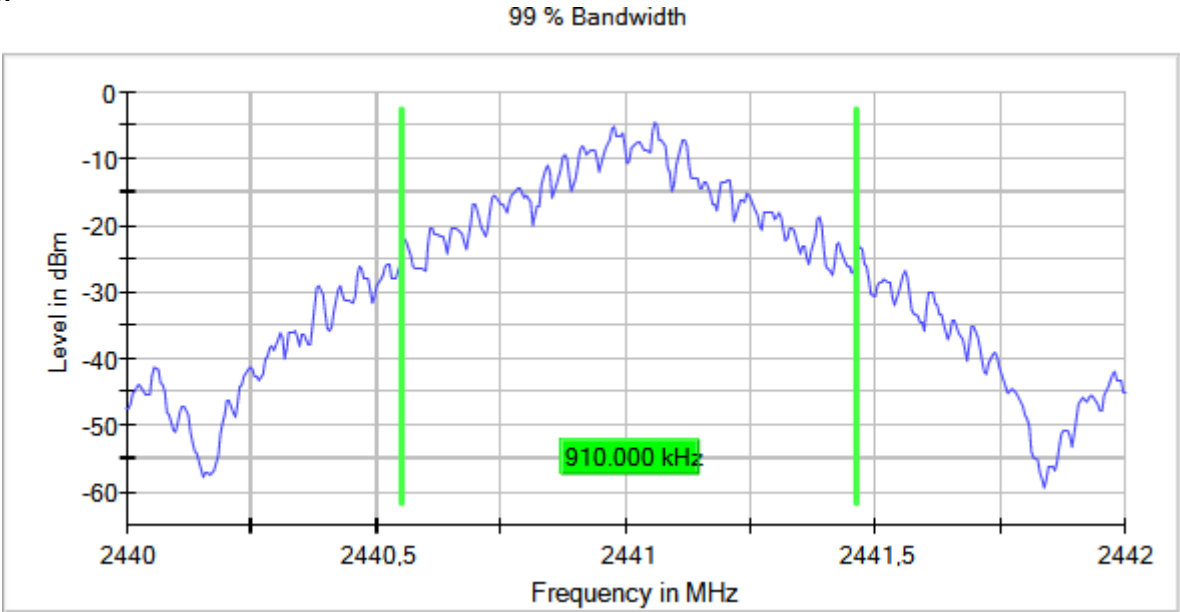

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

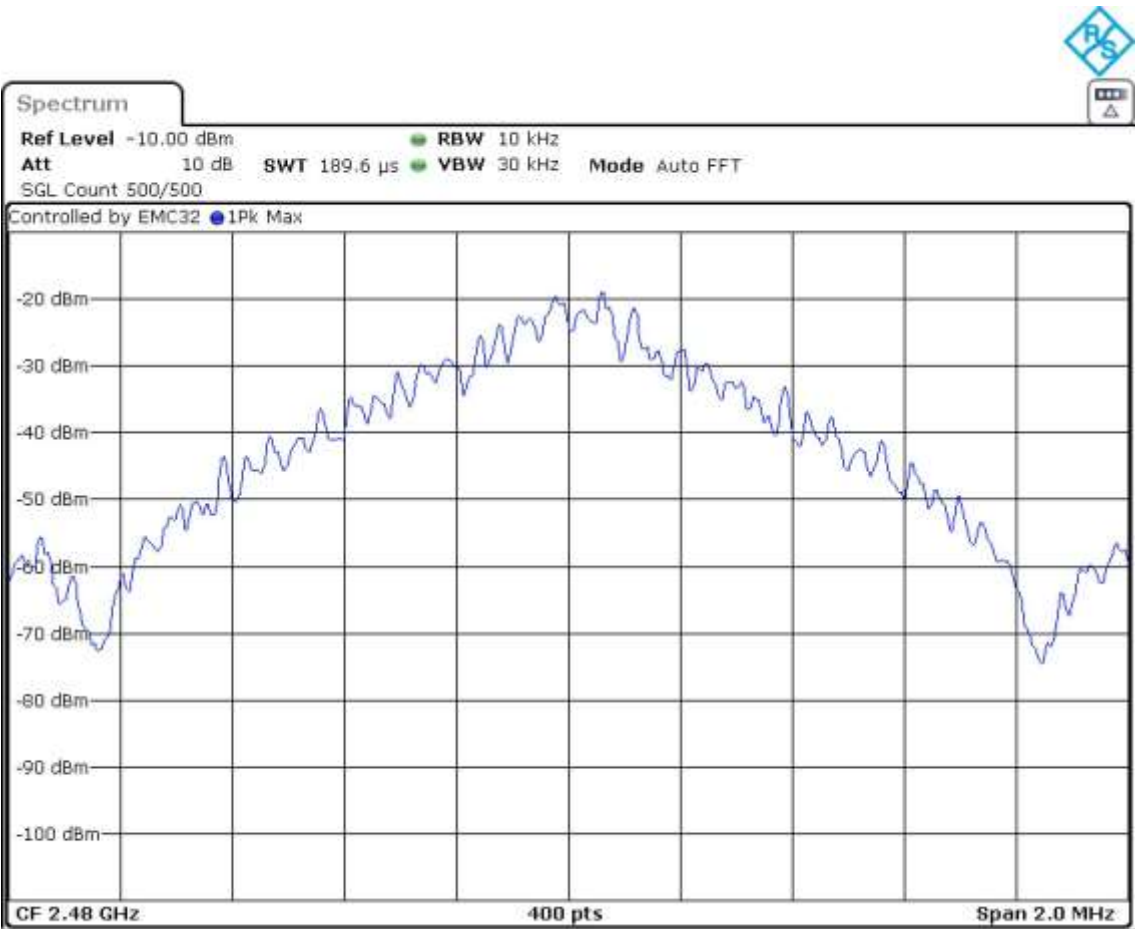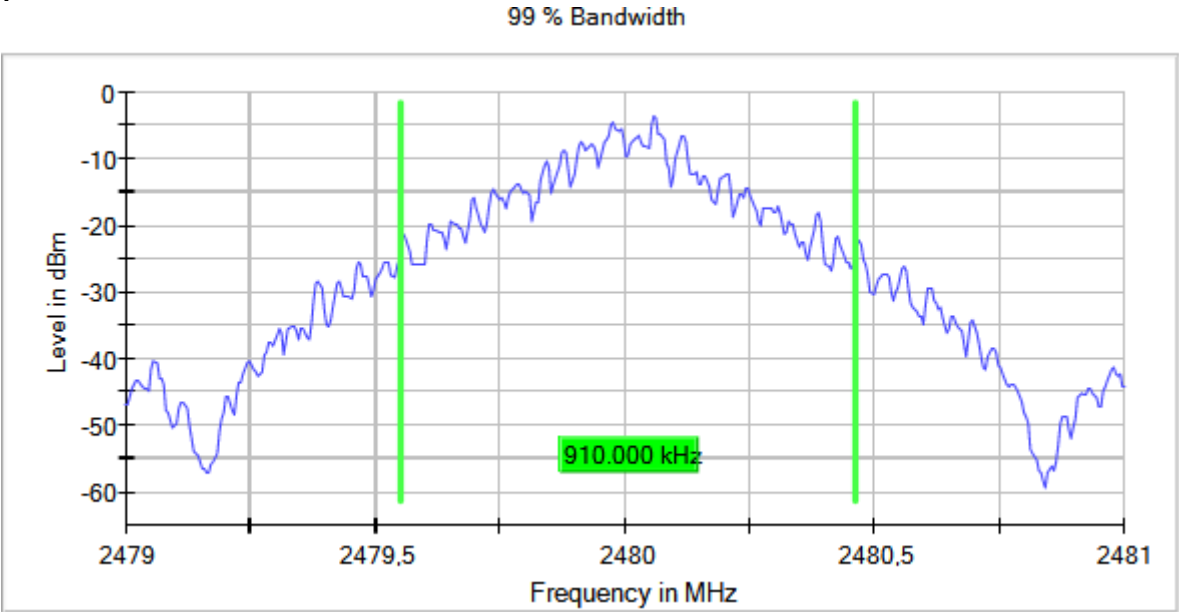

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.195
		2441.00000		1.195
		2480.00000		1.195



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
 MIMO Mode = SISO Active Port = 1

Images:

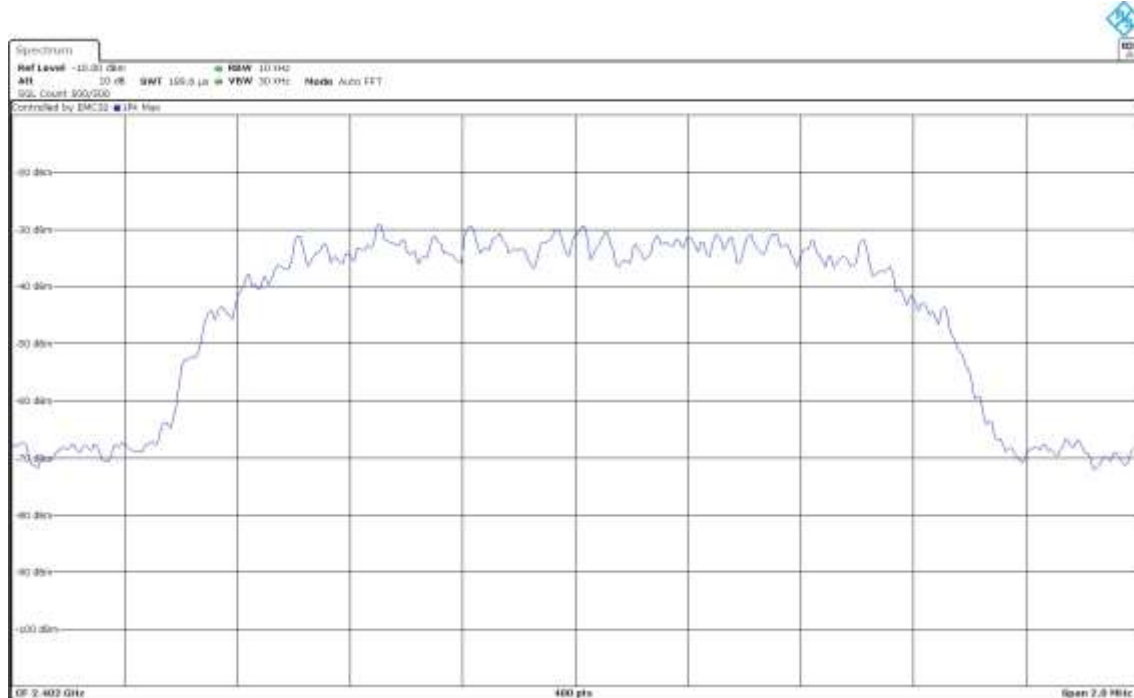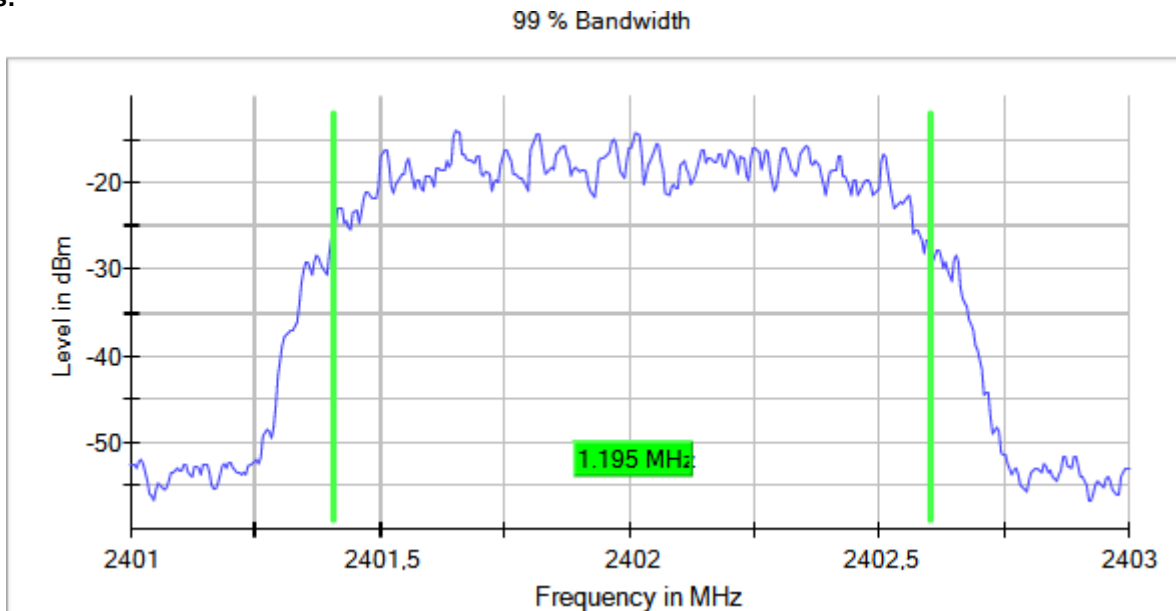



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2441.00000
 MIMO Mode = SISO Active Port = 1

Images:

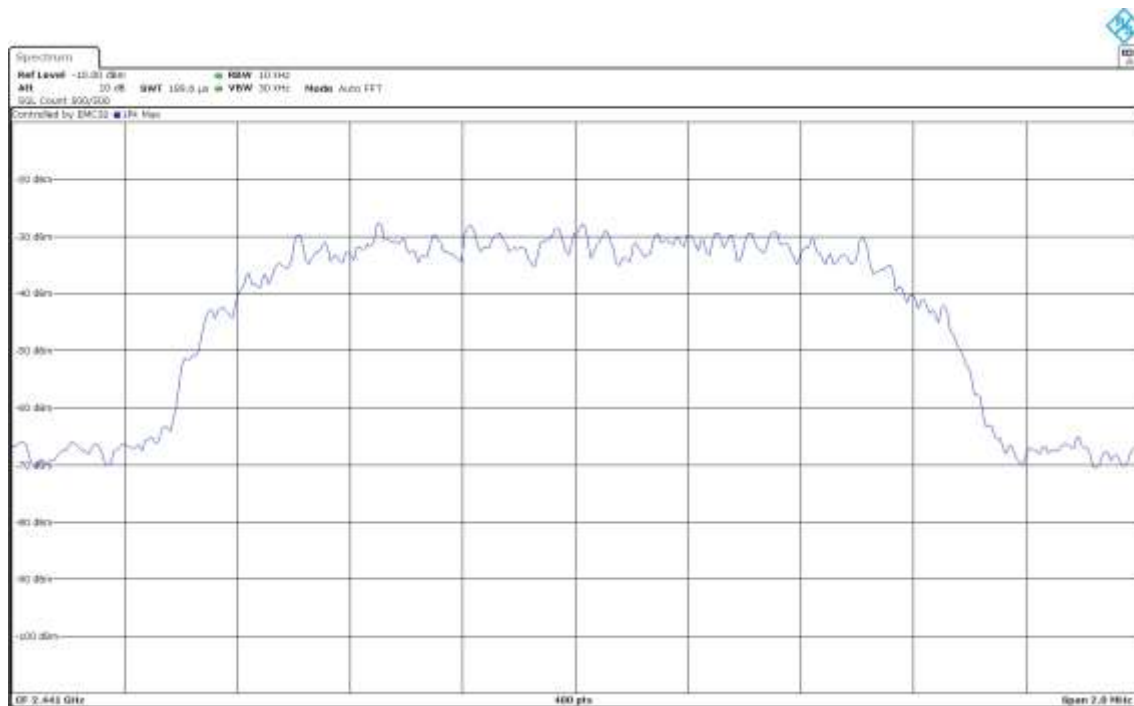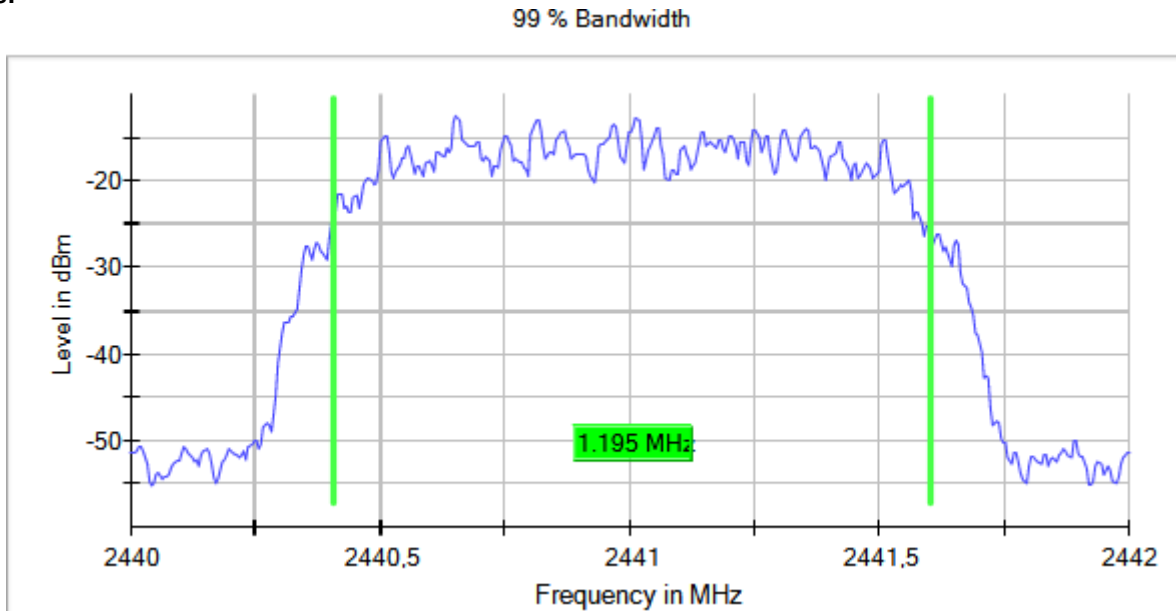

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

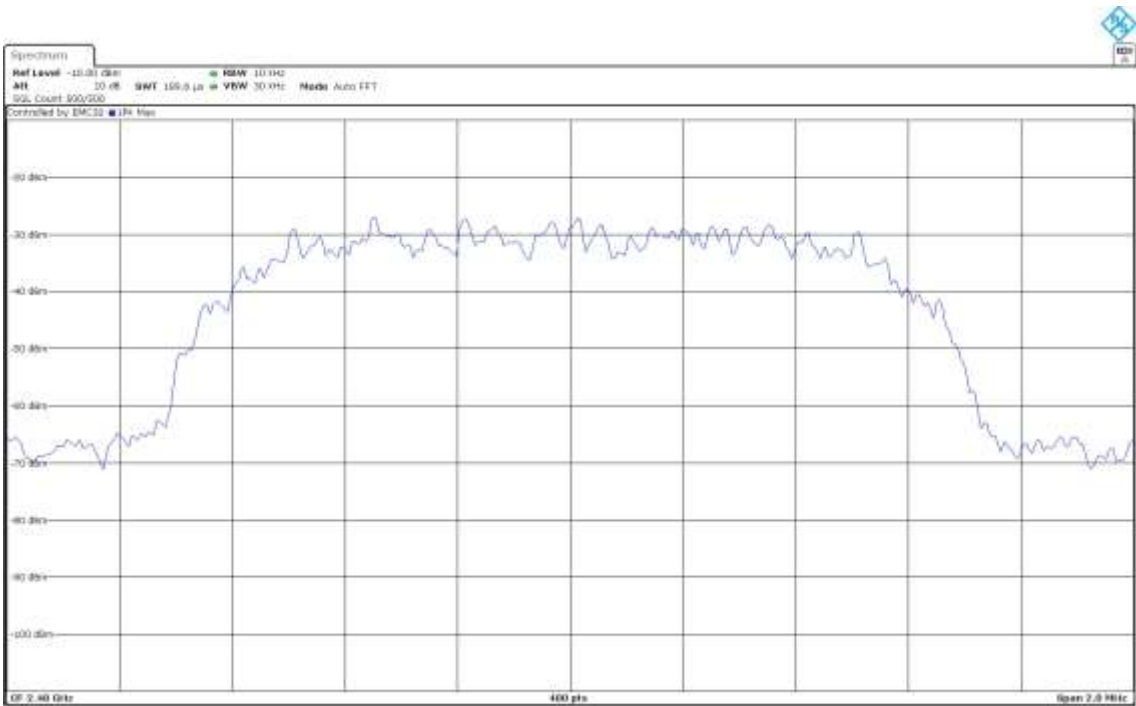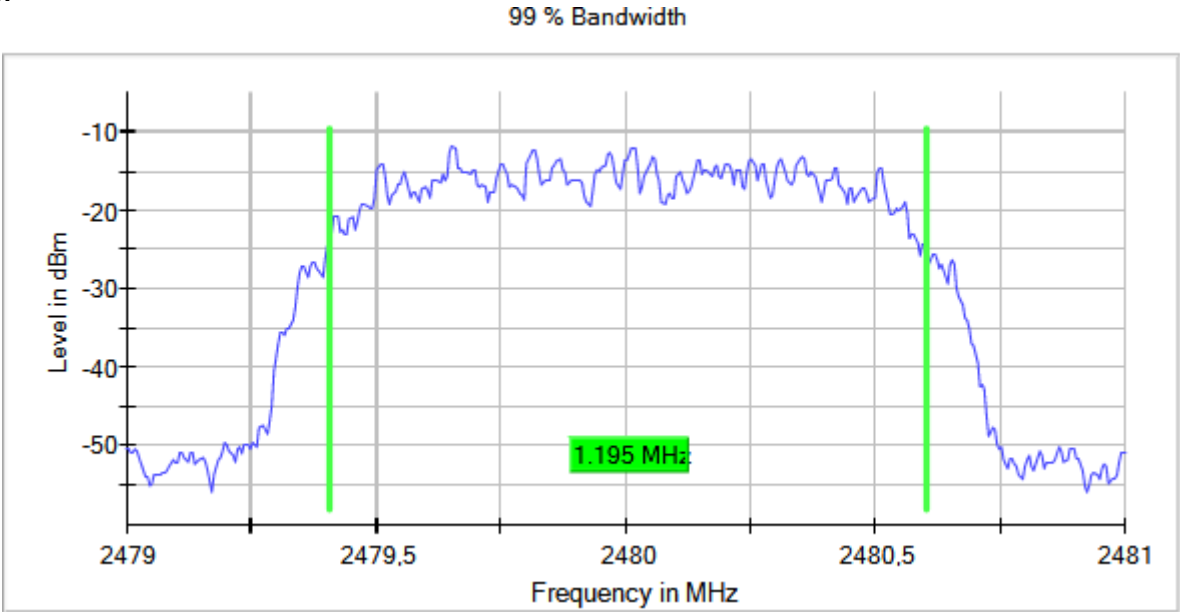

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.205
		2441.00000		1.200
		2480.00000		1.200



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

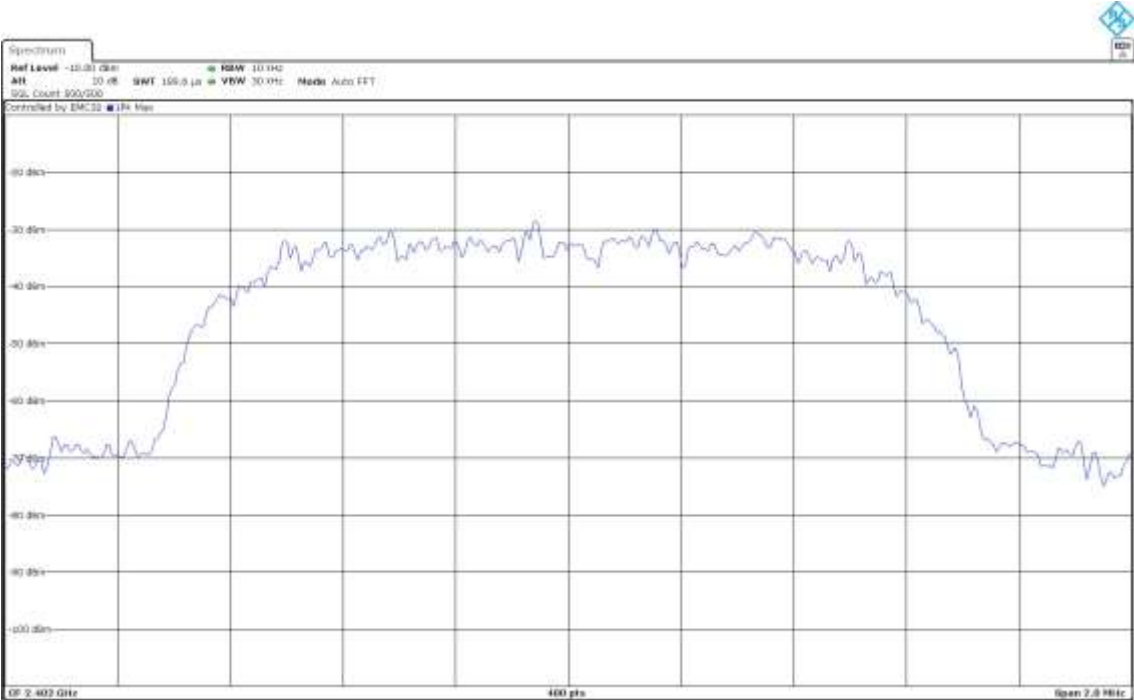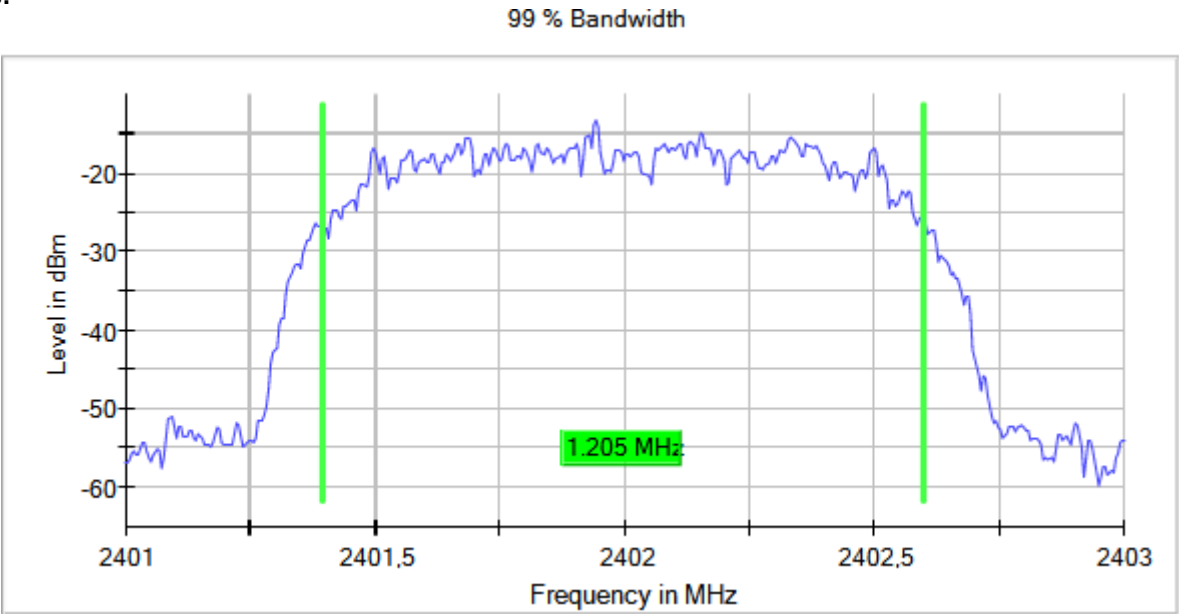

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
 MIMO Mode = SISO Active Port = 1



Images:

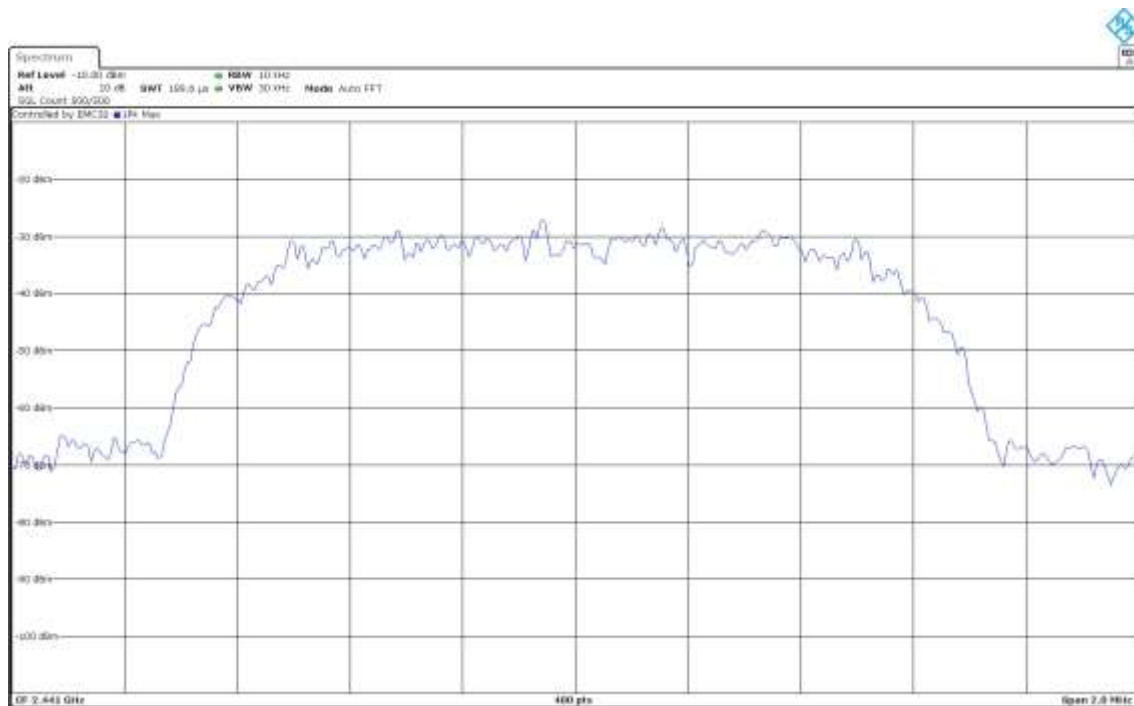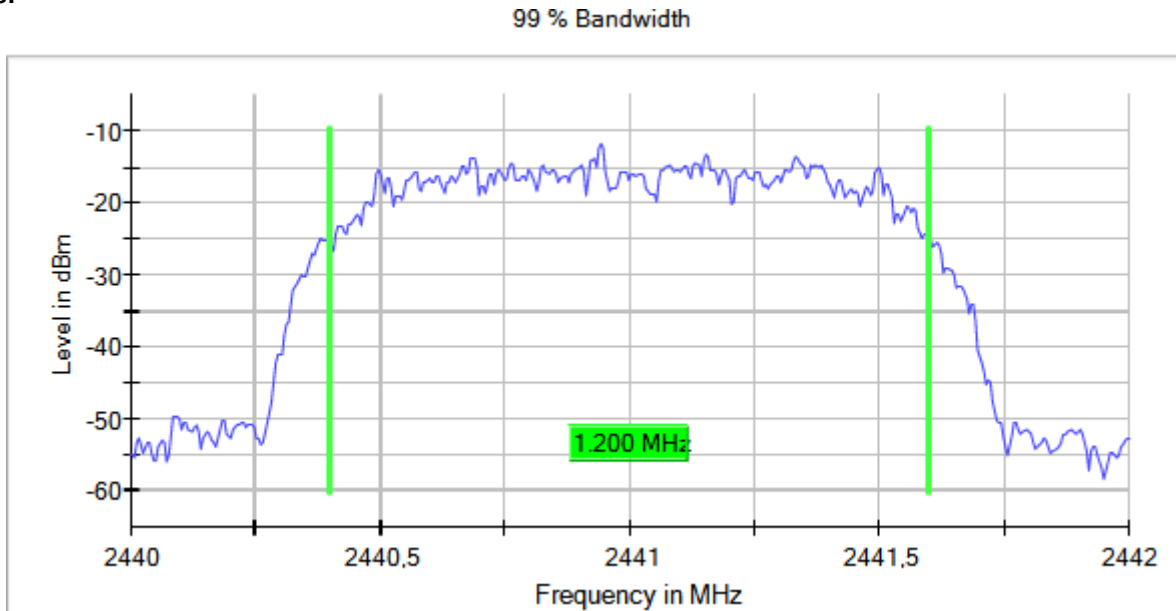

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

99 % Bandwidth

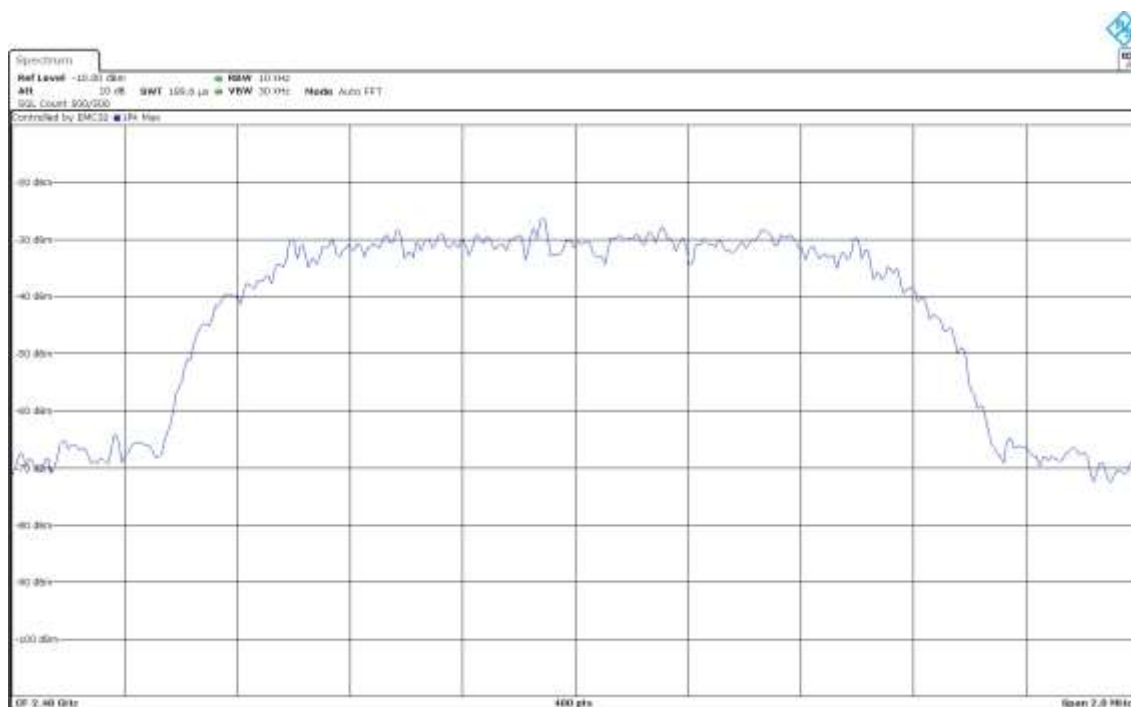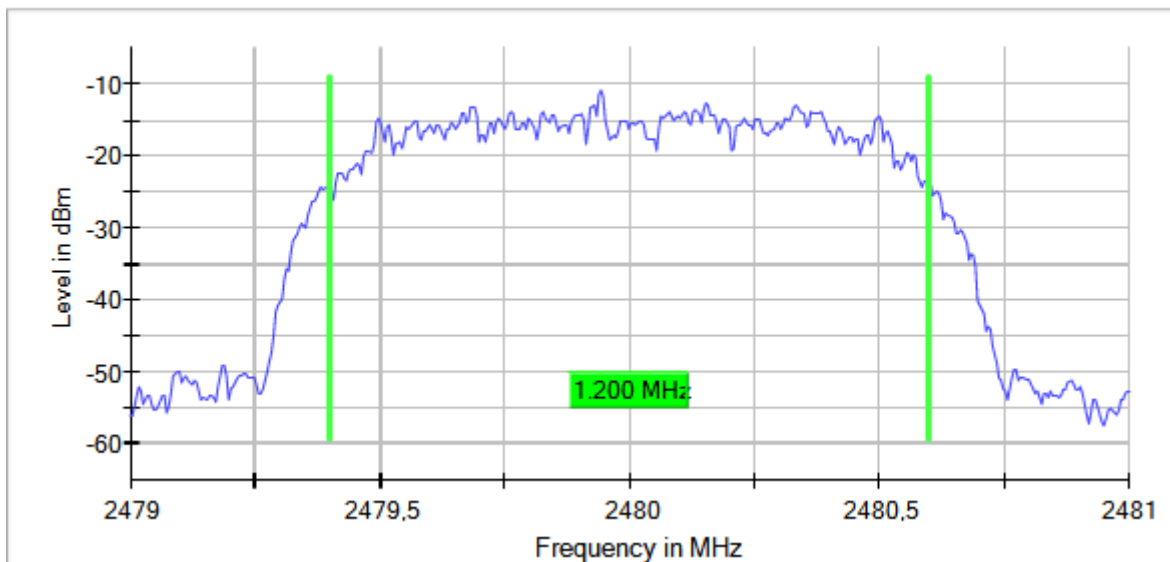

RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth and Carrier Frequency Separation

Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

20 DB BANDWIDTH:

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Ebw (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	0.930
		2441.00000		0.930
		2480.00000		0.930



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

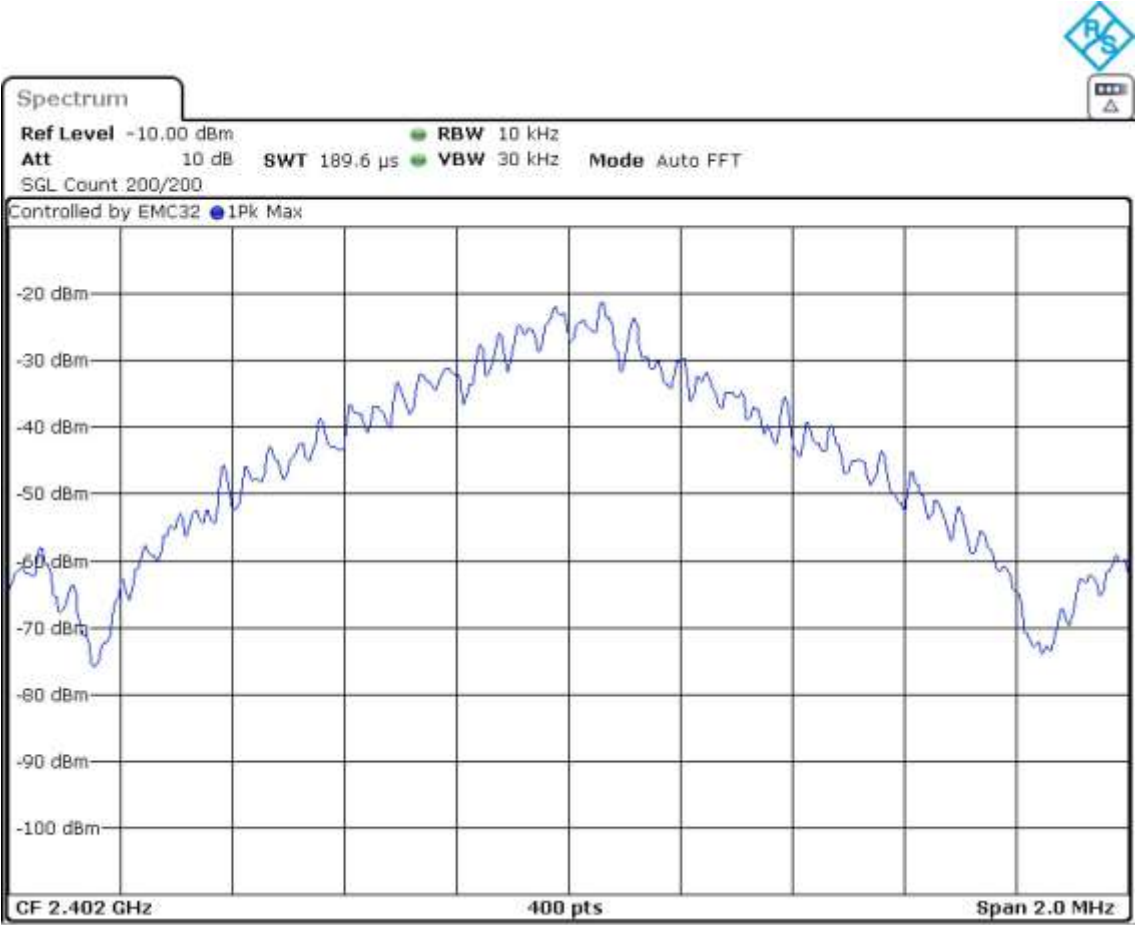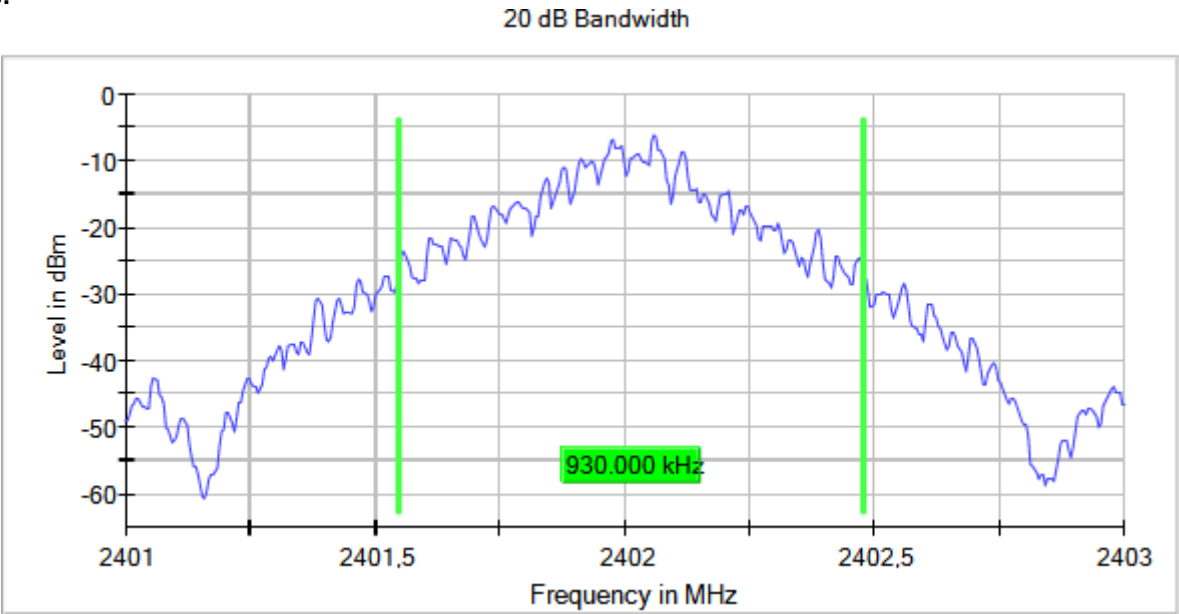



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

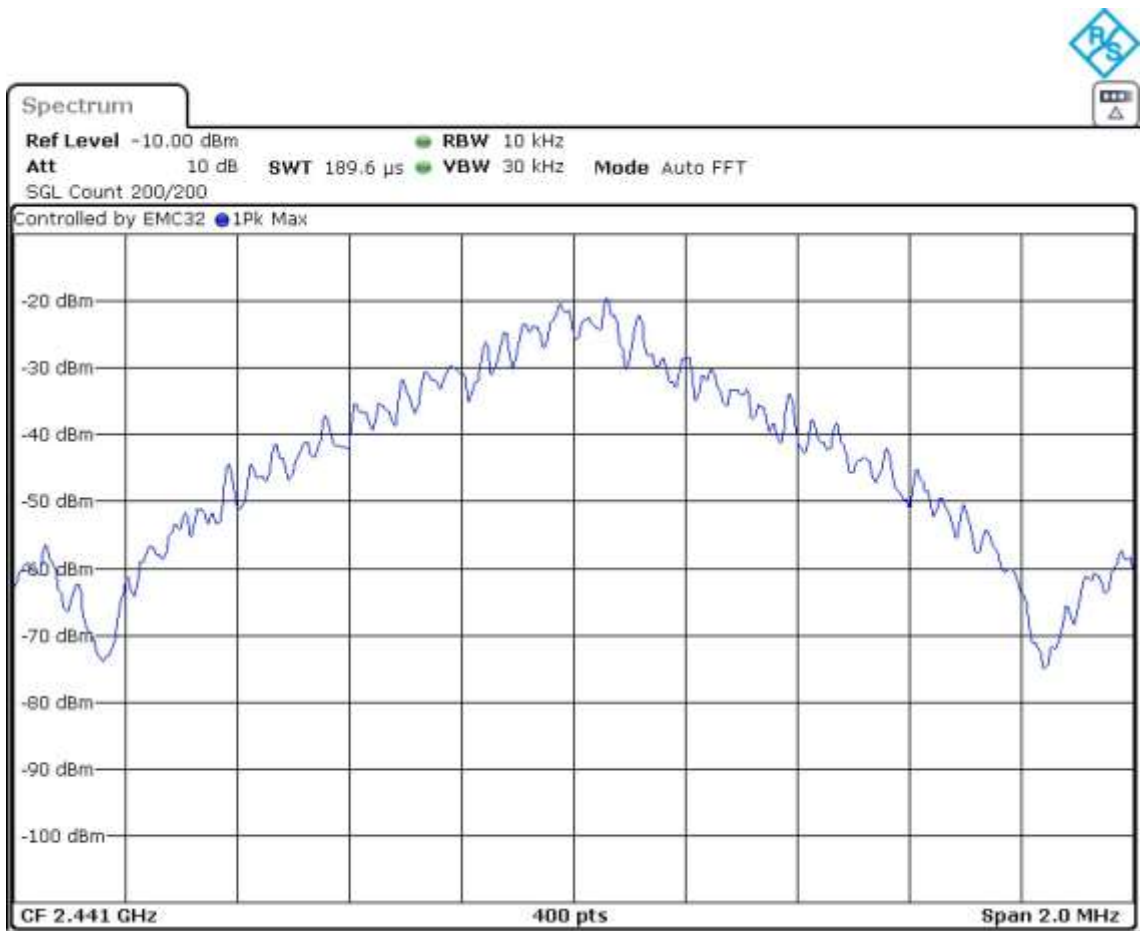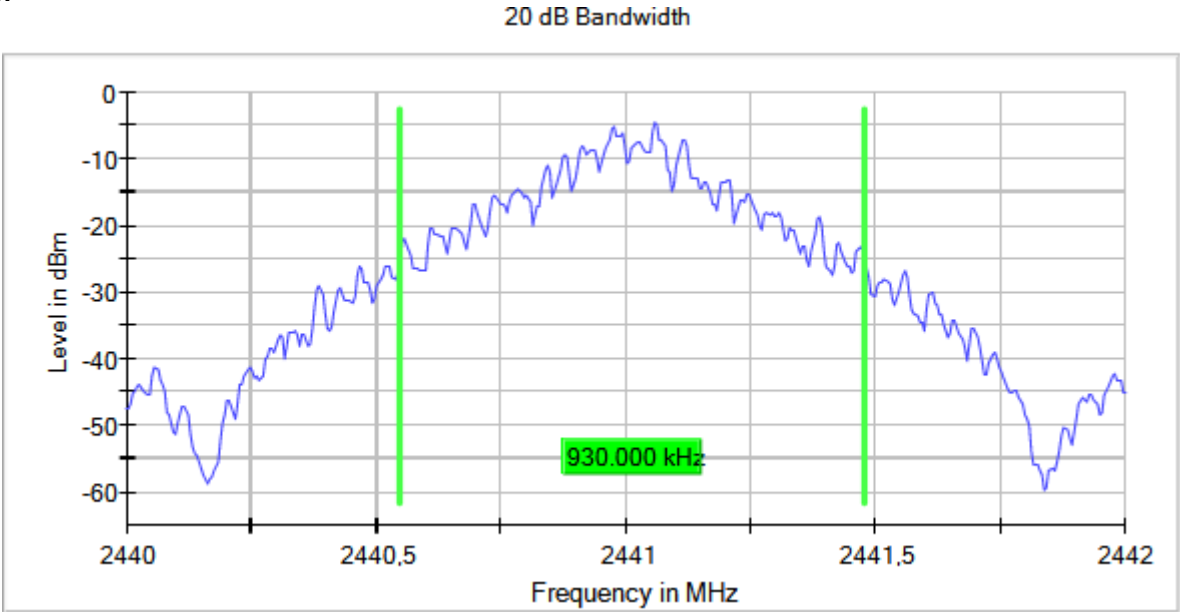

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

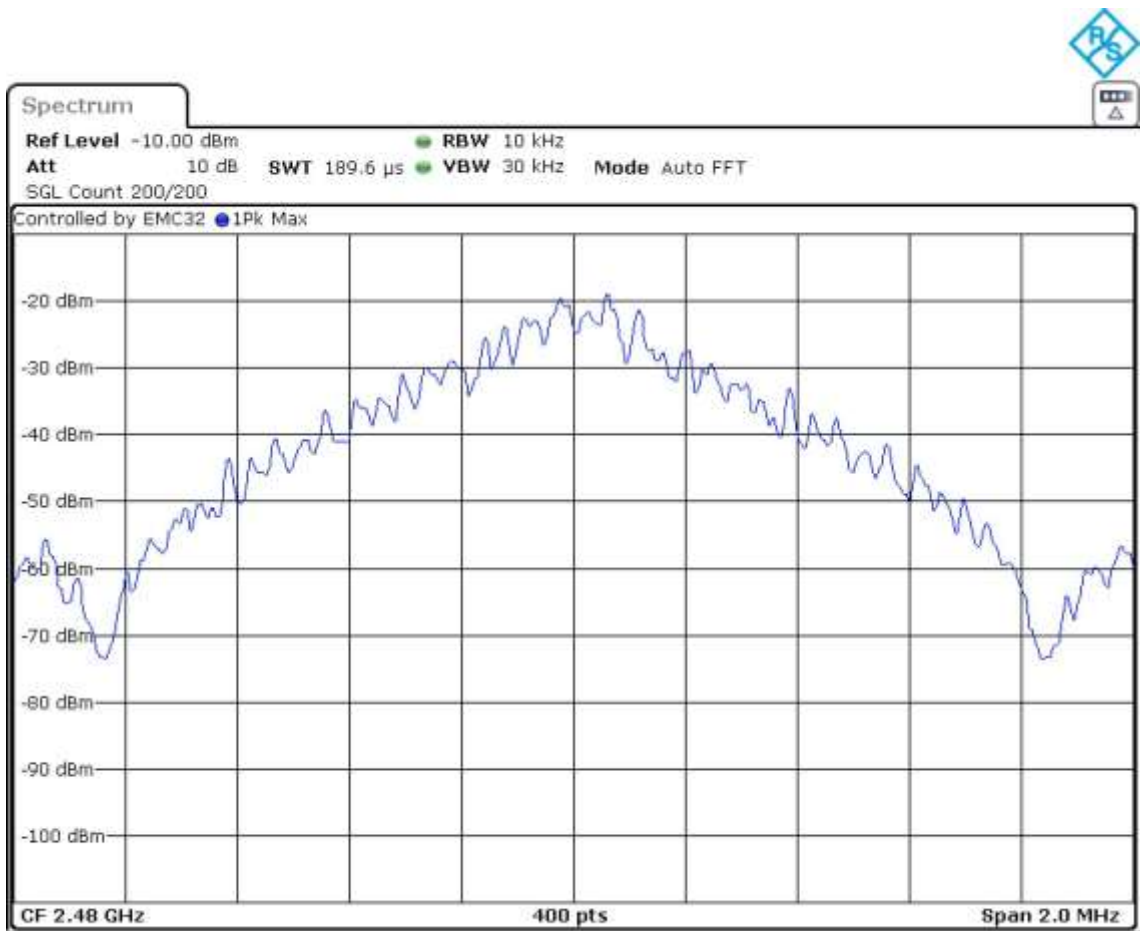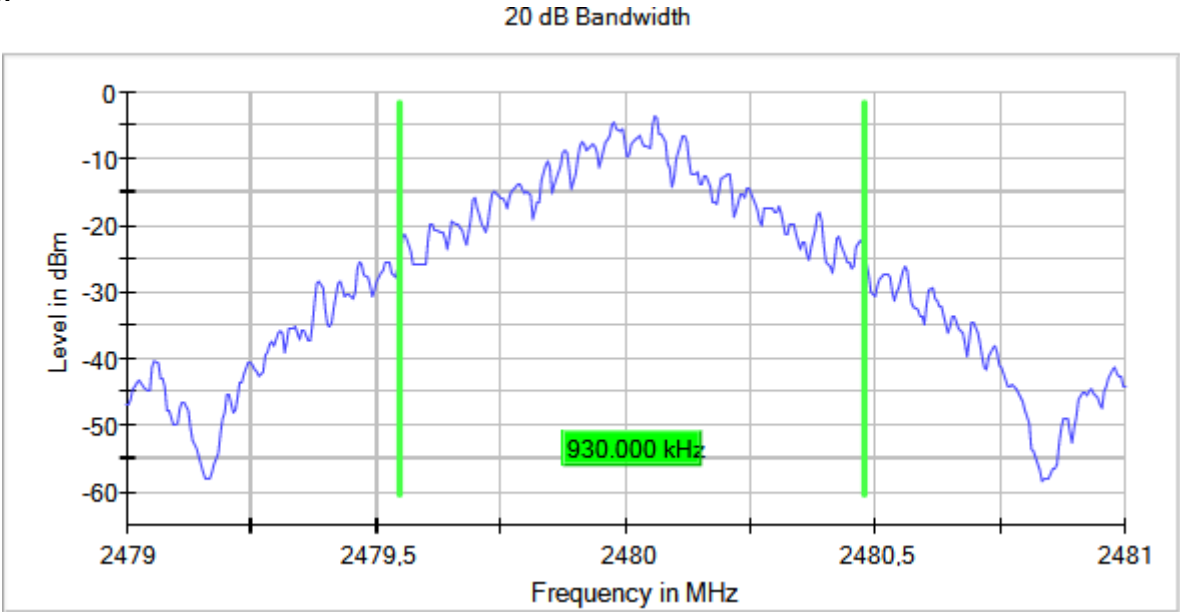

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Ebw (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.335
		2441.00000		1.335
		2480.00000		1.335



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

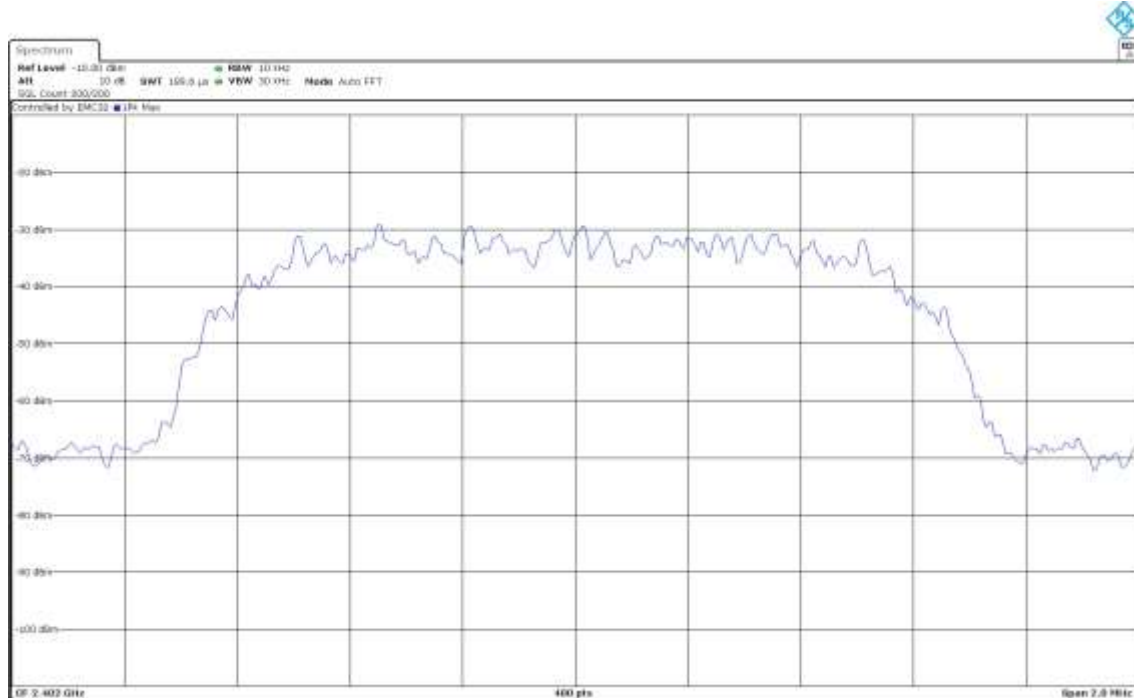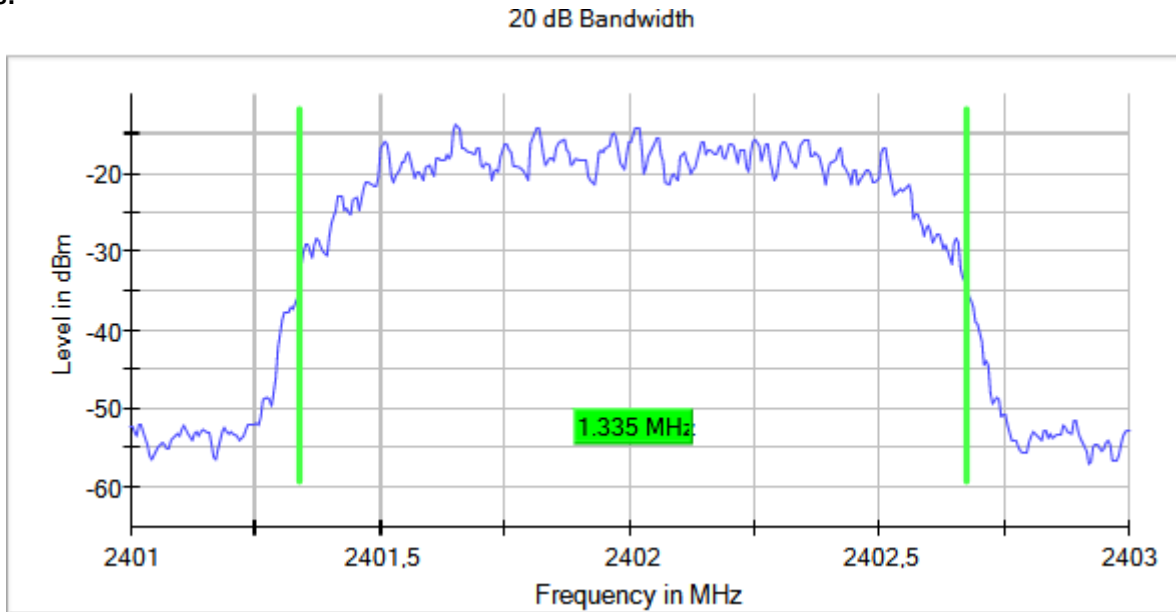



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2441.00000
 MIMO Mode = SISO Active Port = 1

Images:

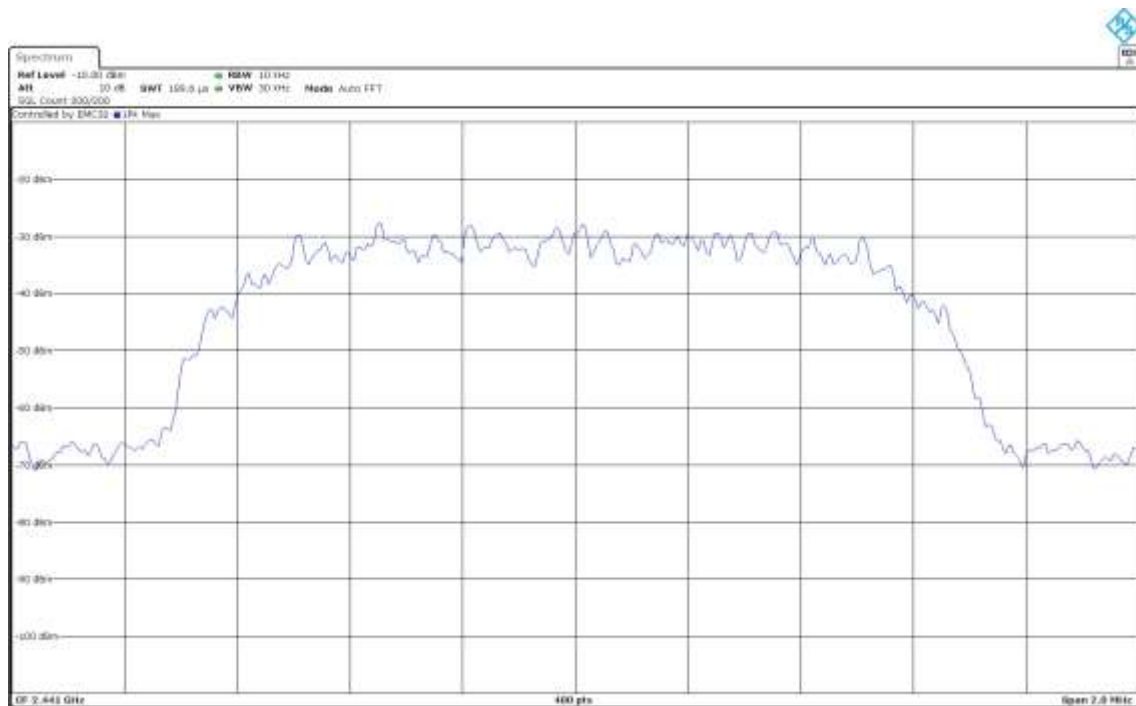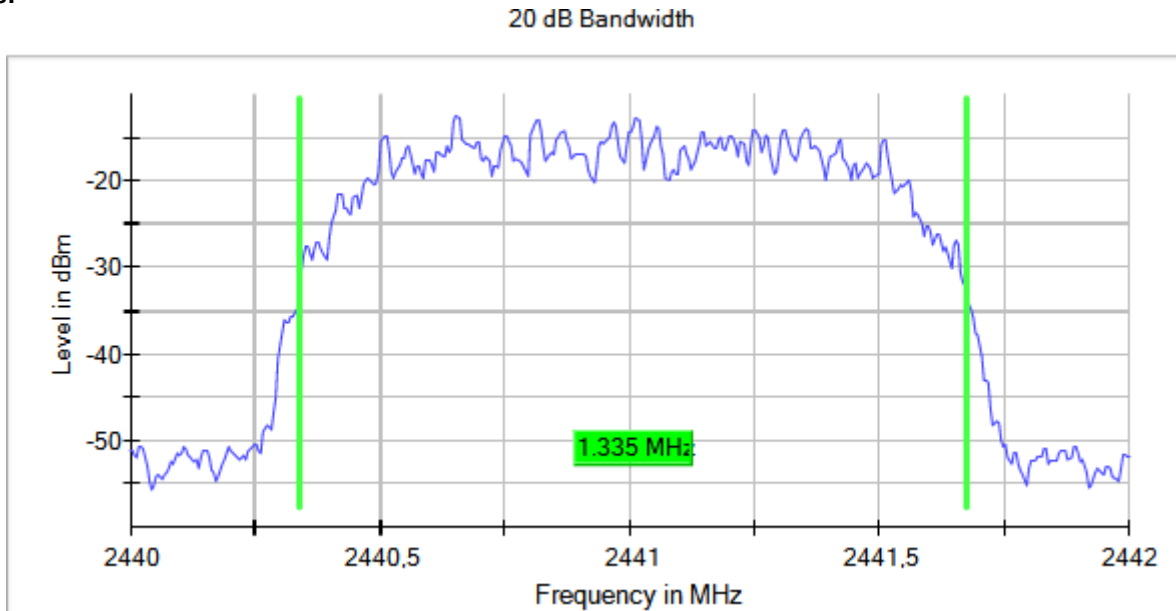

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

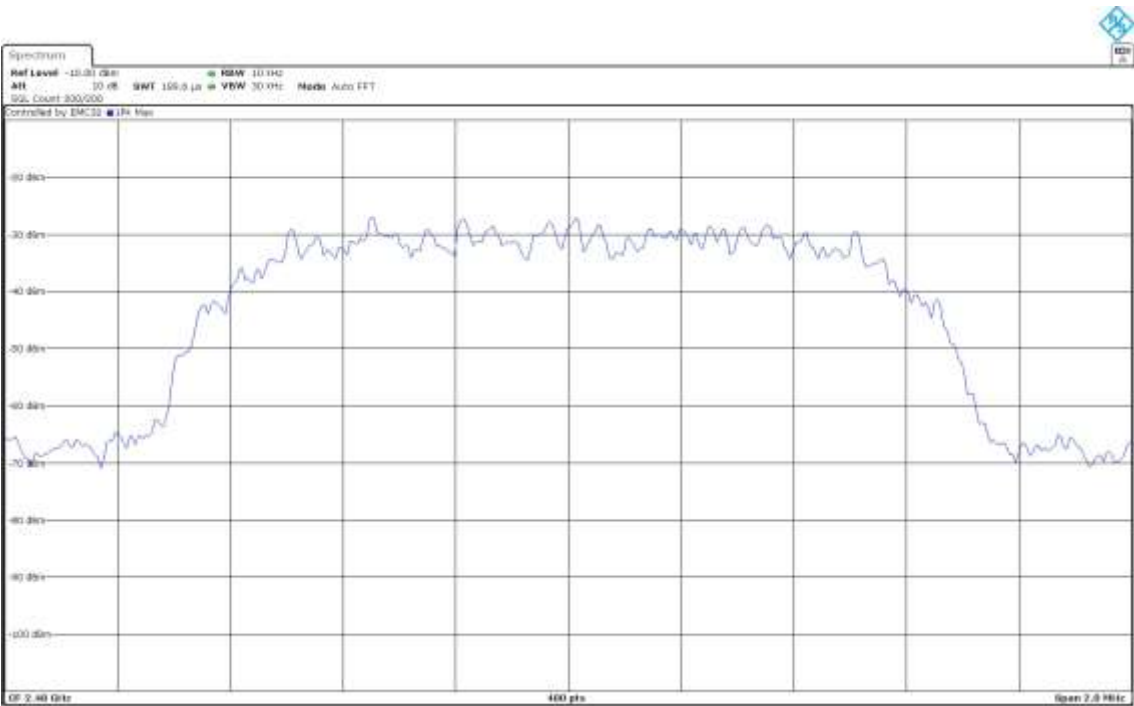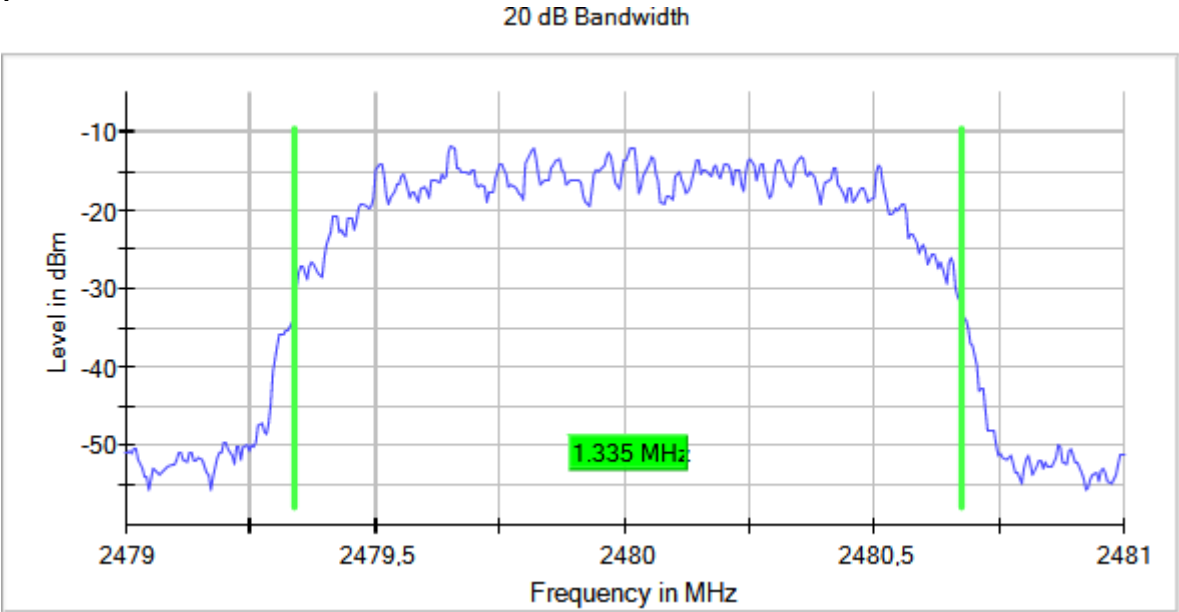

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Ebw (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.335
		2441.00000		1.345
		2480.00000		1.345



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
 MIMO Mode = SISO Active Port = 1

Images:

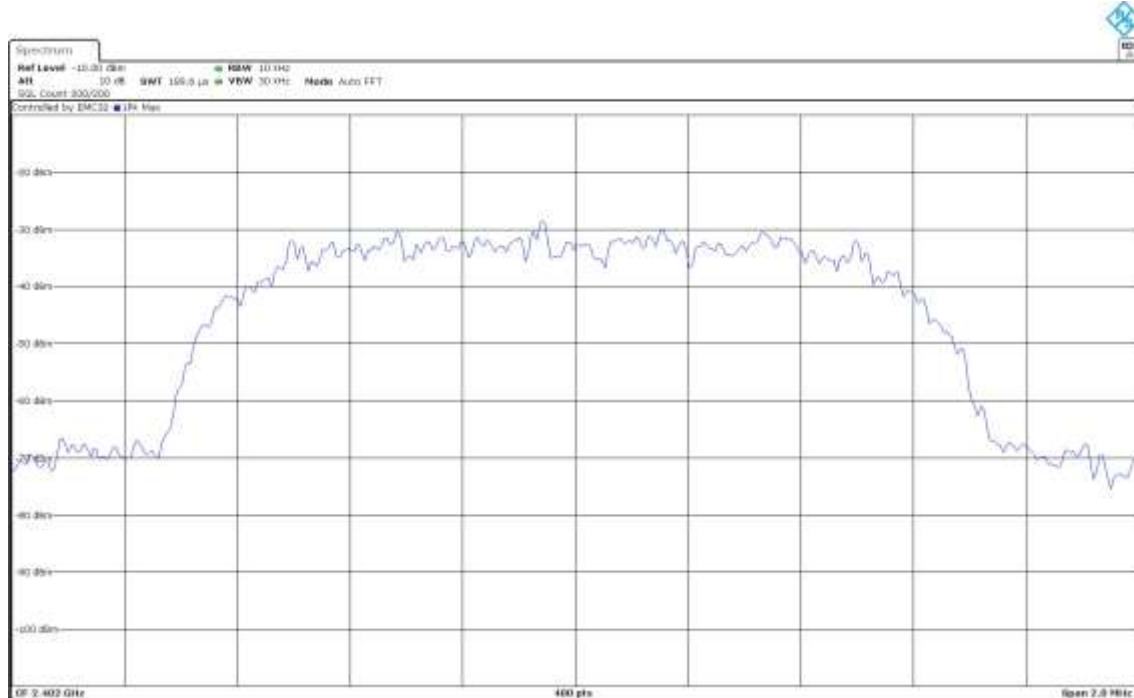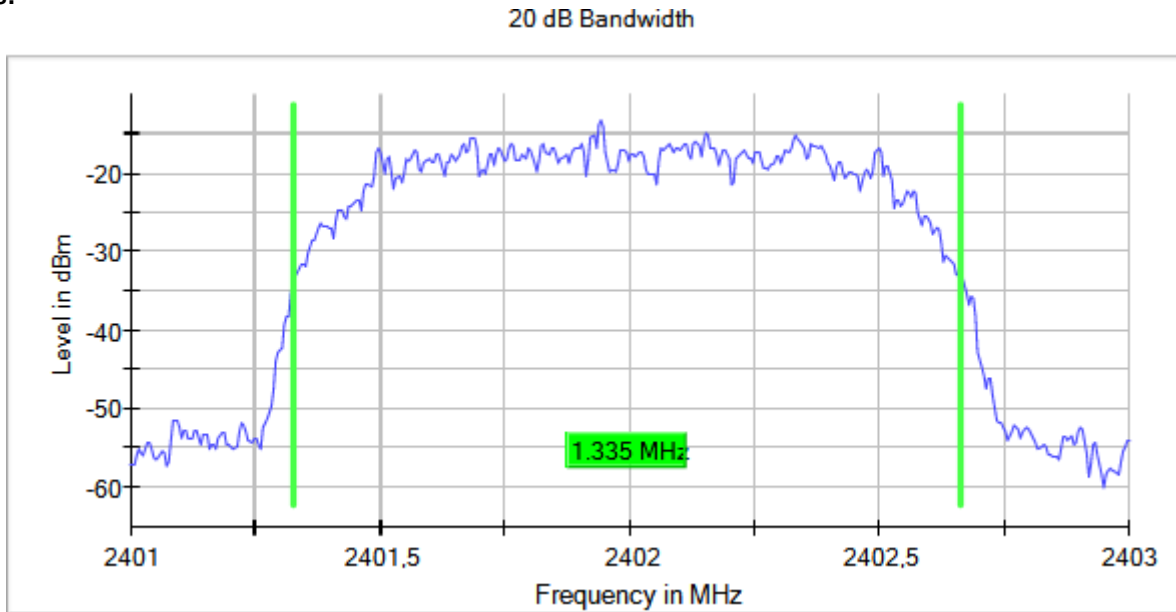



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

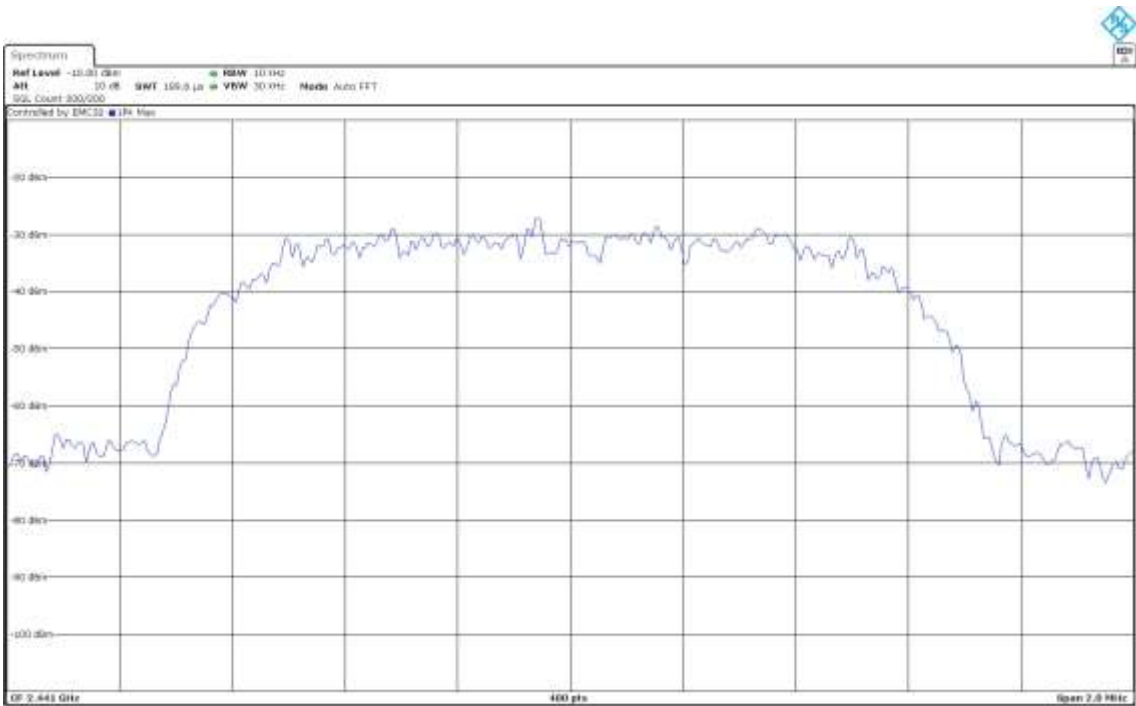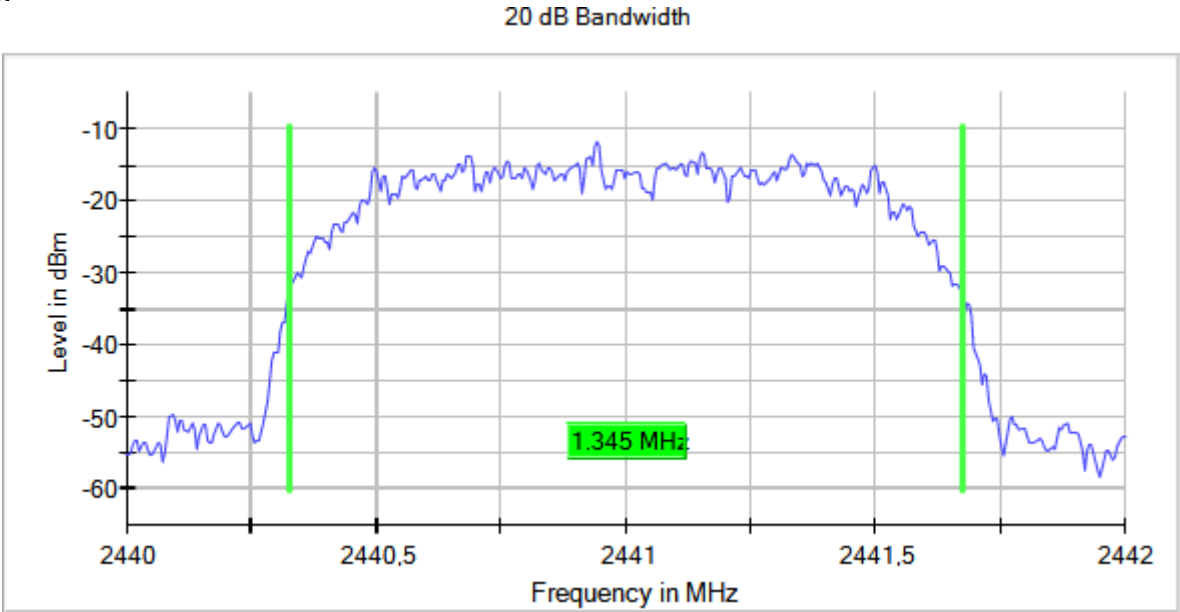

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

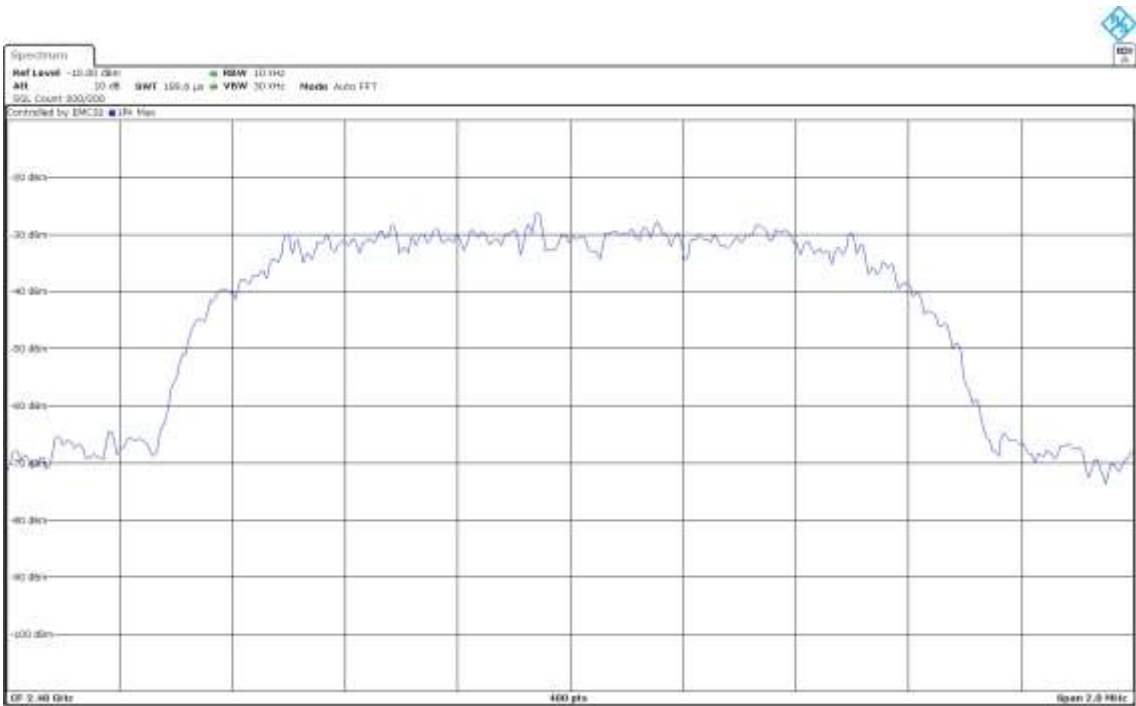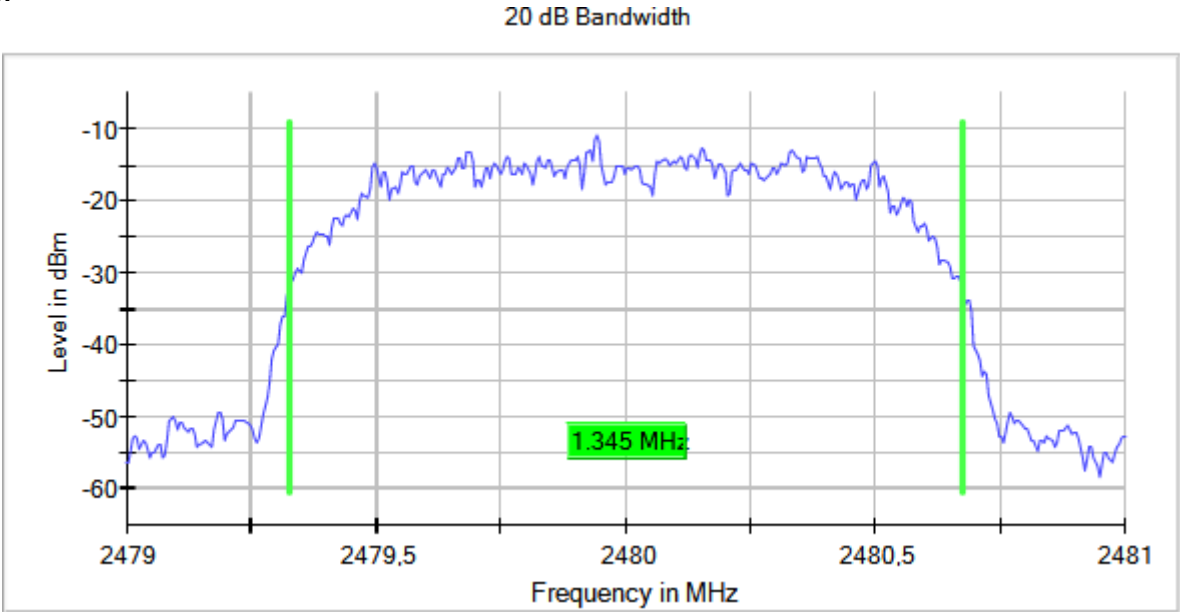

CARRIER FREQUENCY SEPARATION:

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.01



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

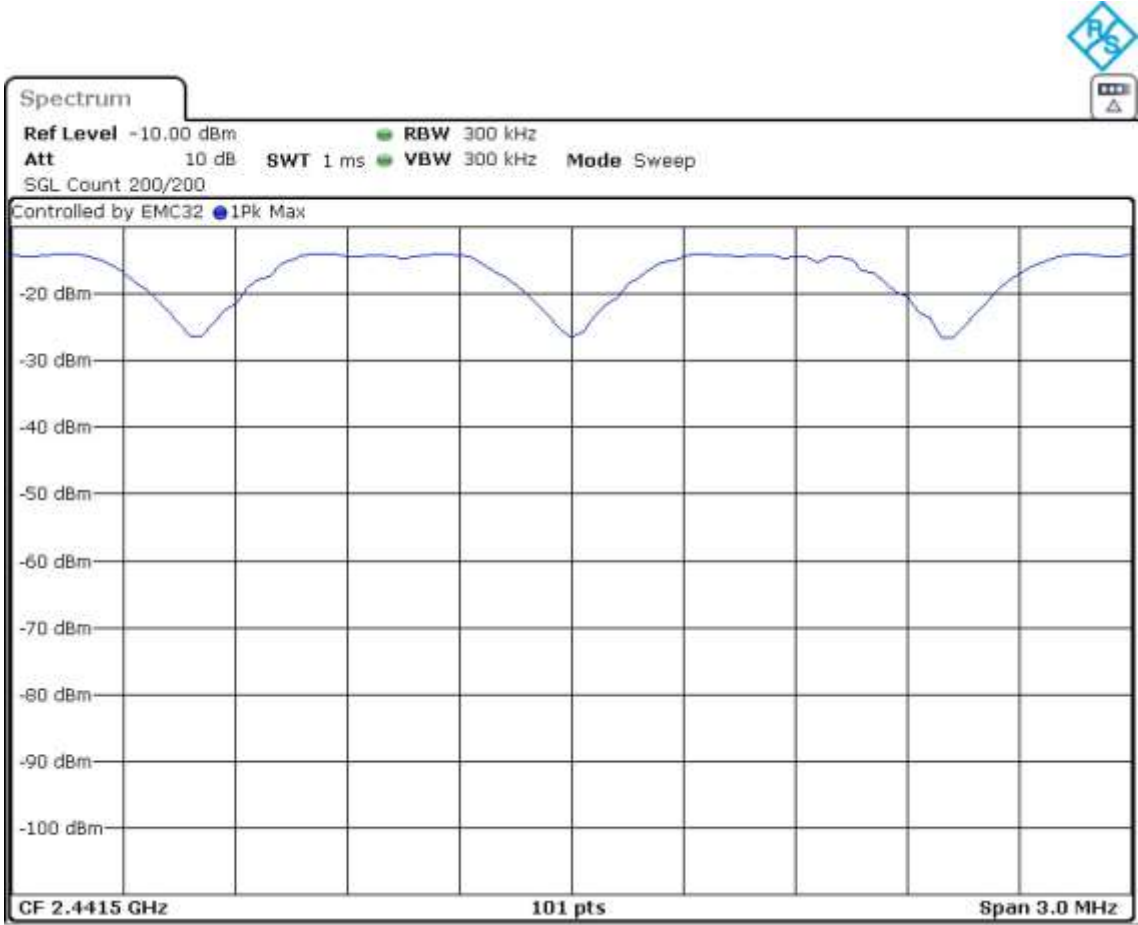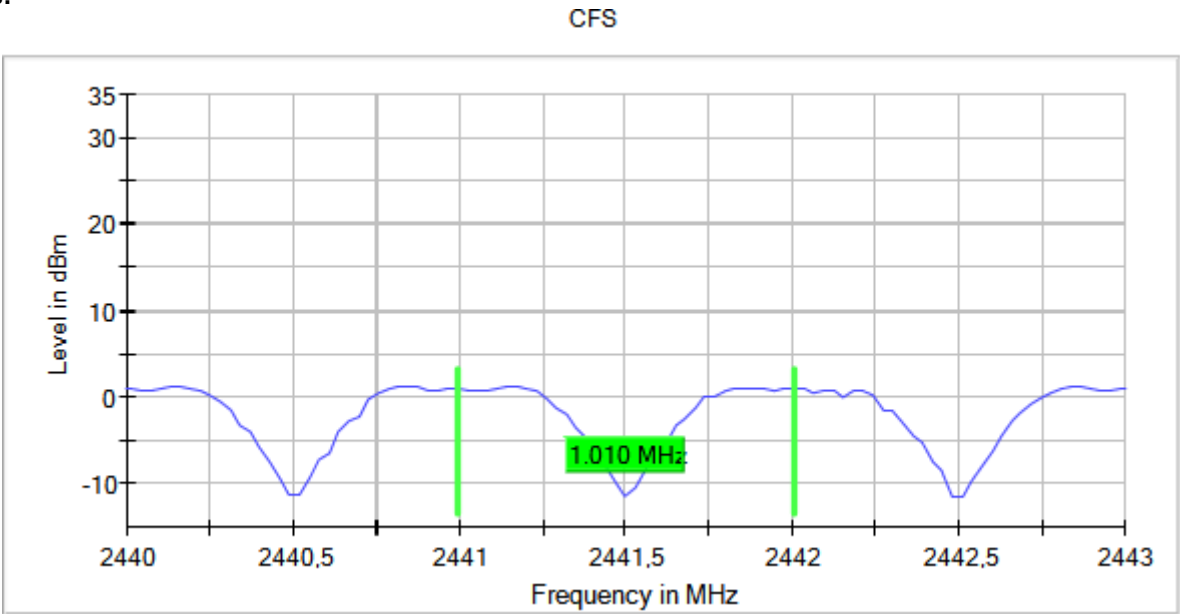

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	0.98



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
Active Port = 1

Images:

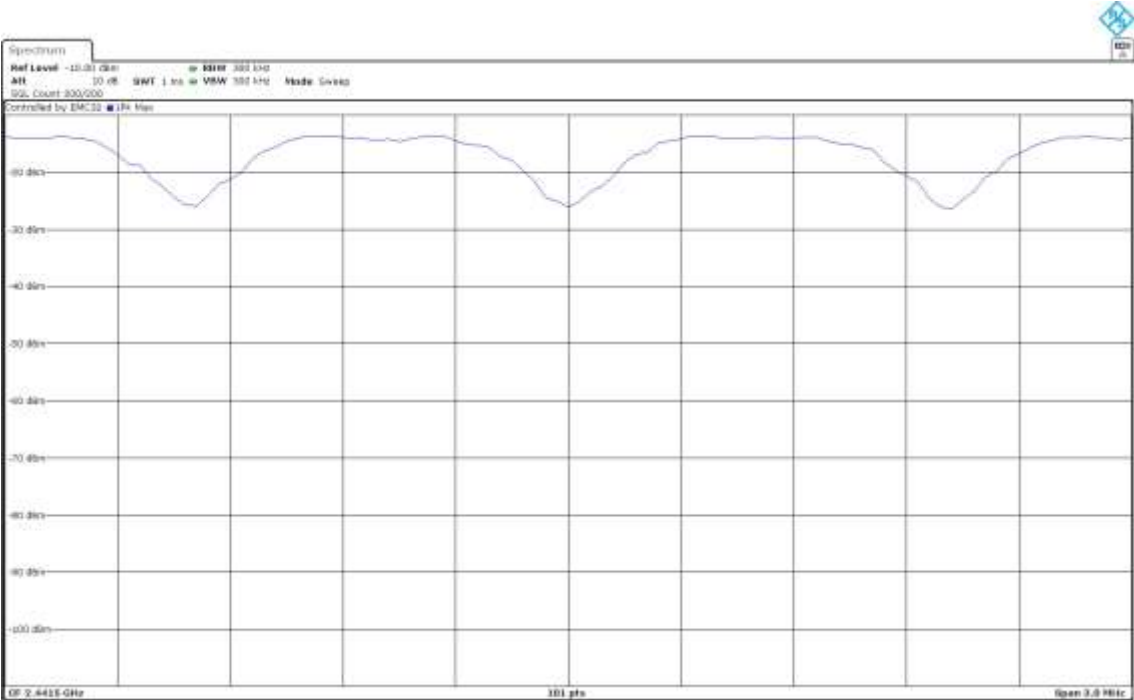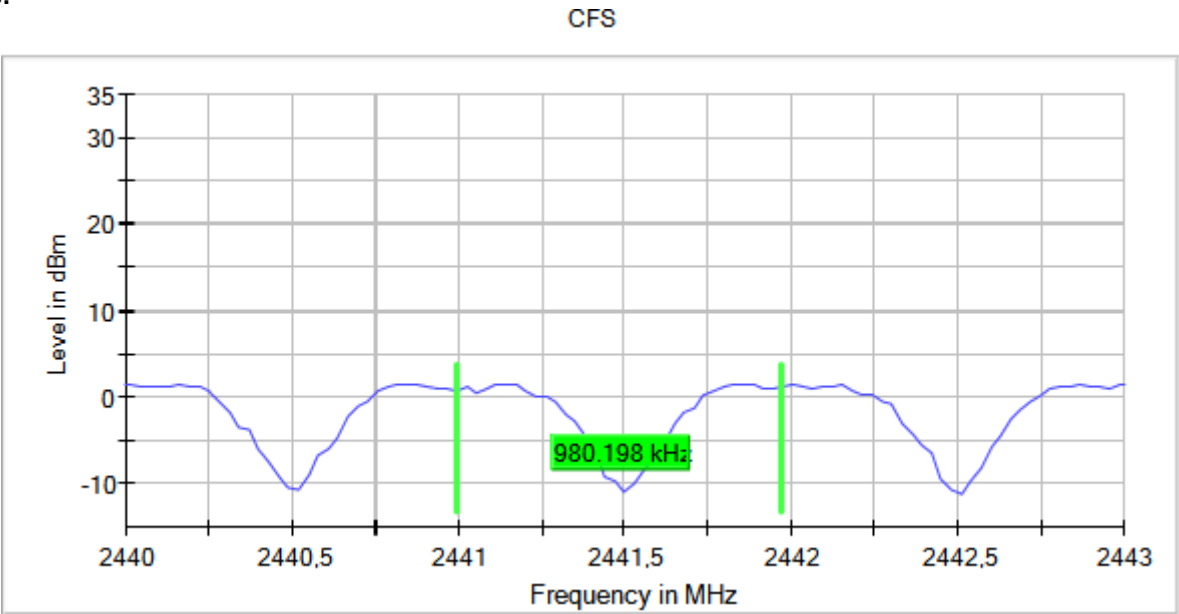

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.01



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
Active Port = 1

Images:

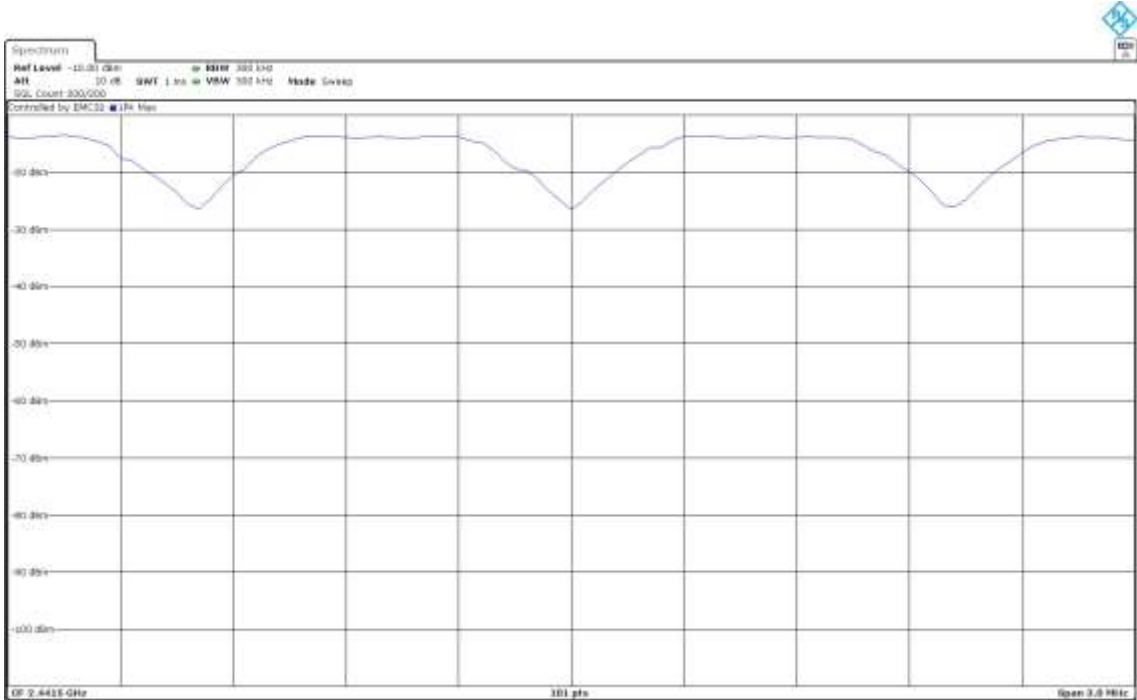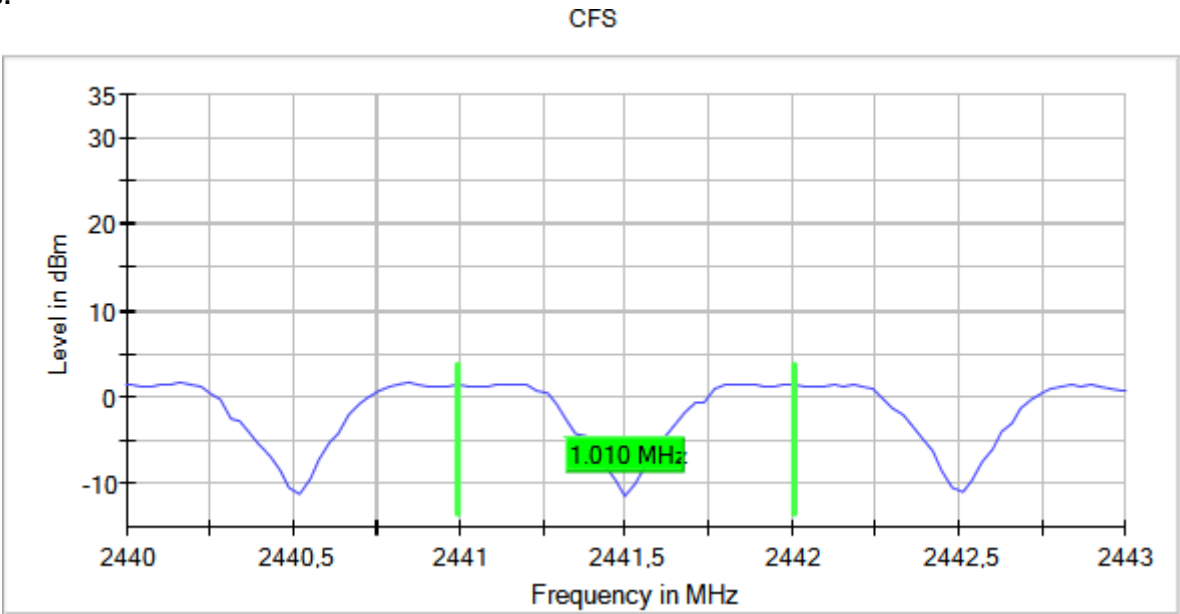

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy
(Dwell Time)

Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = 0.4 x 79= 31.6 seconds.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	105	42.54



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

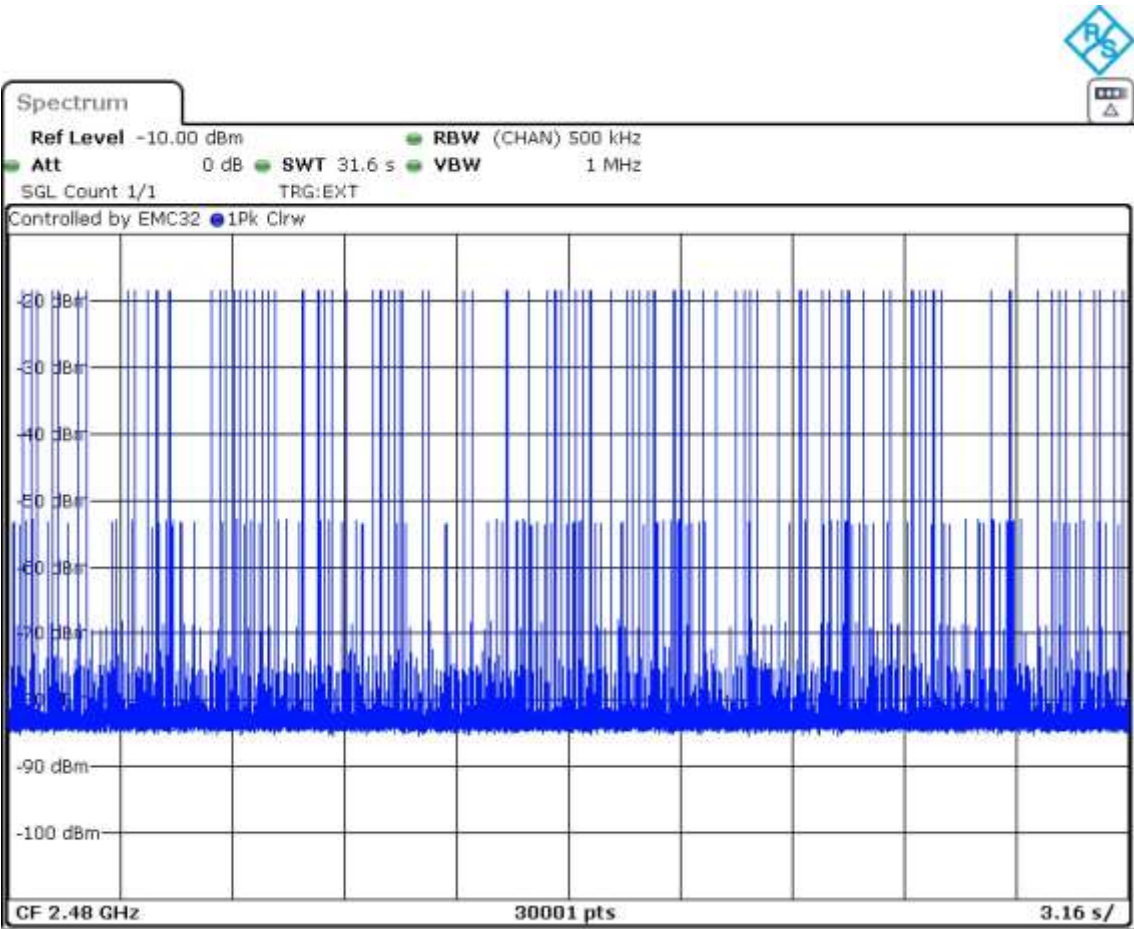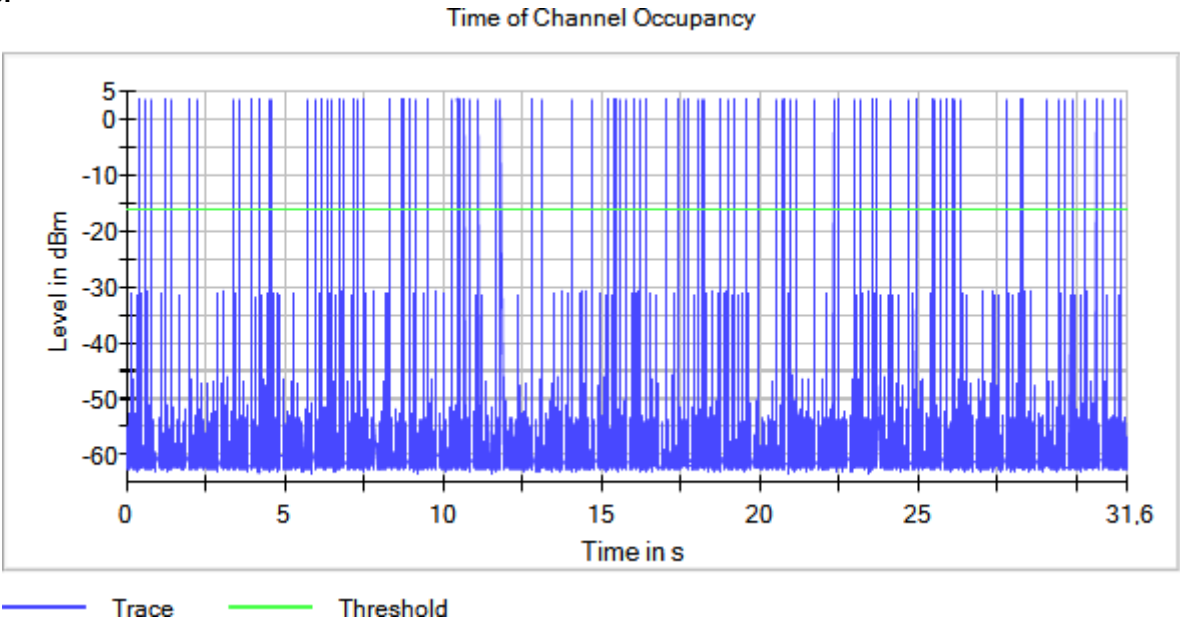

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	114	33.39



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
Active Port = 1

Images:

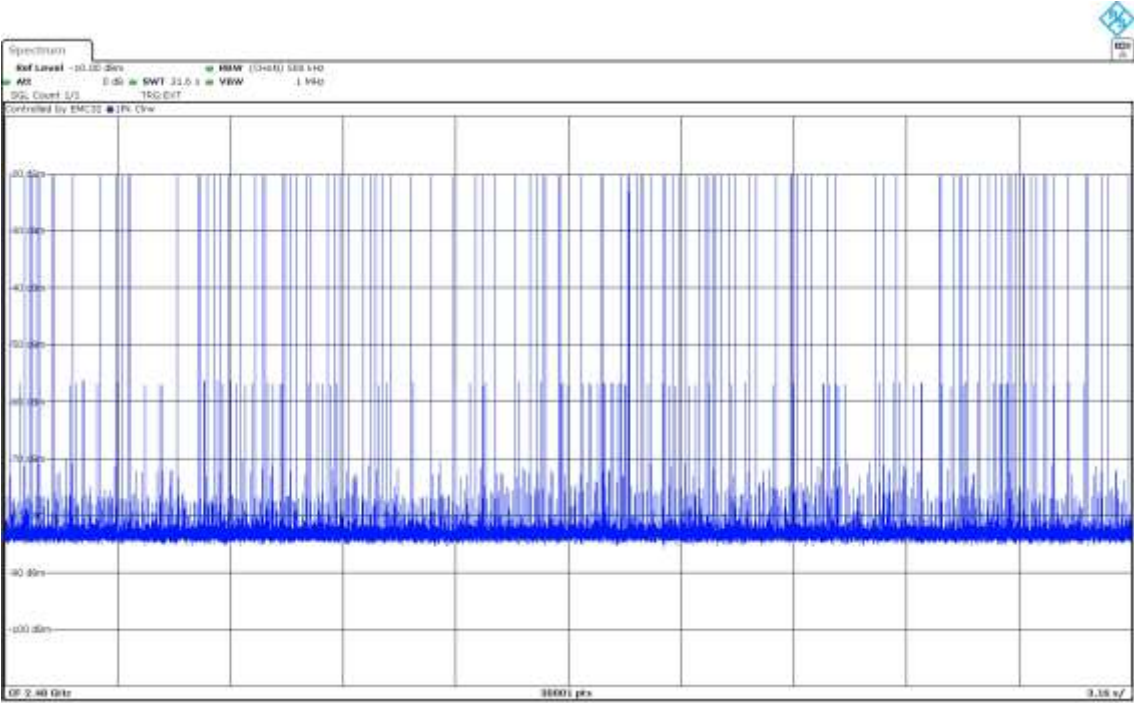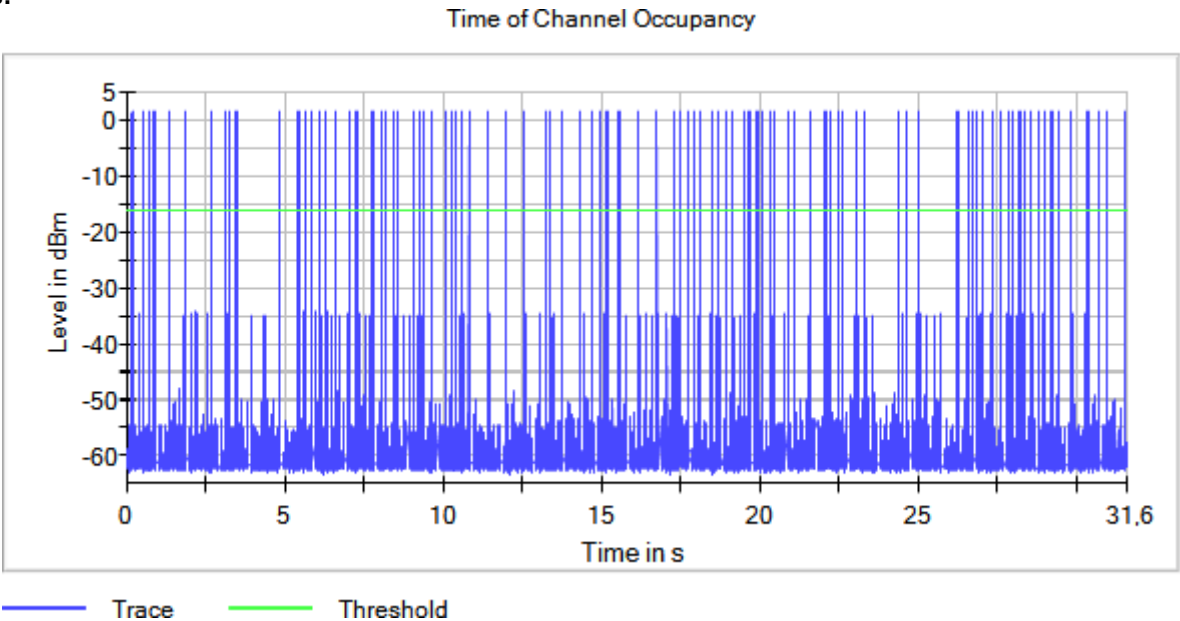

Modulation: BT (8DPSK 3-DH5)
MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	110	27.66



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

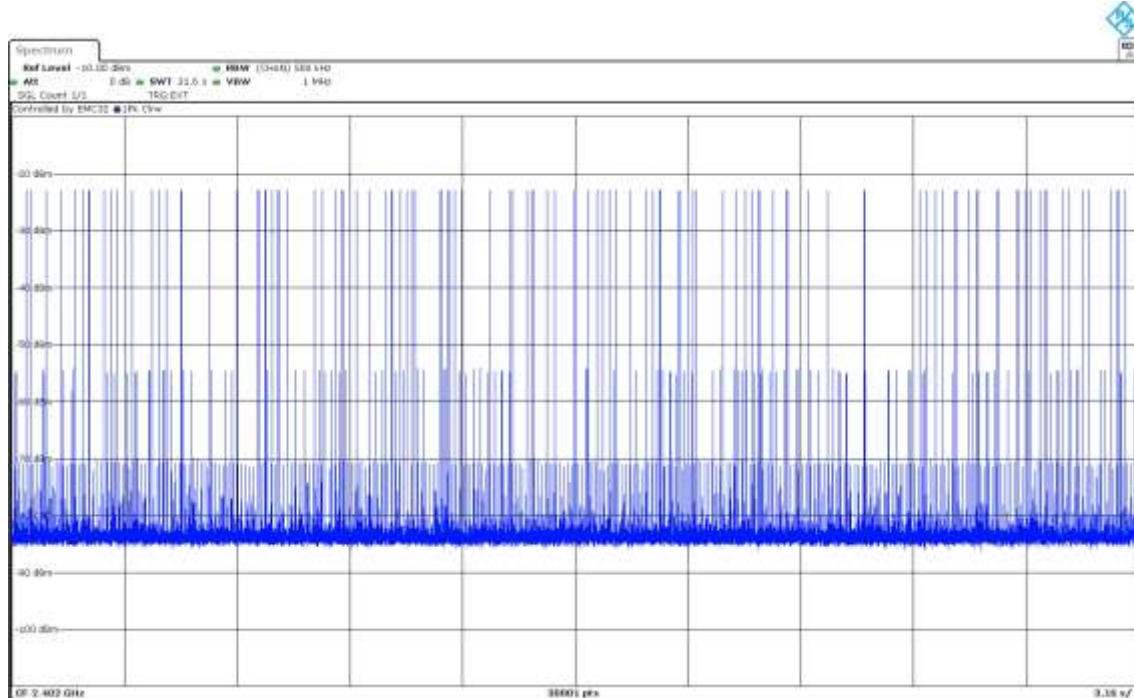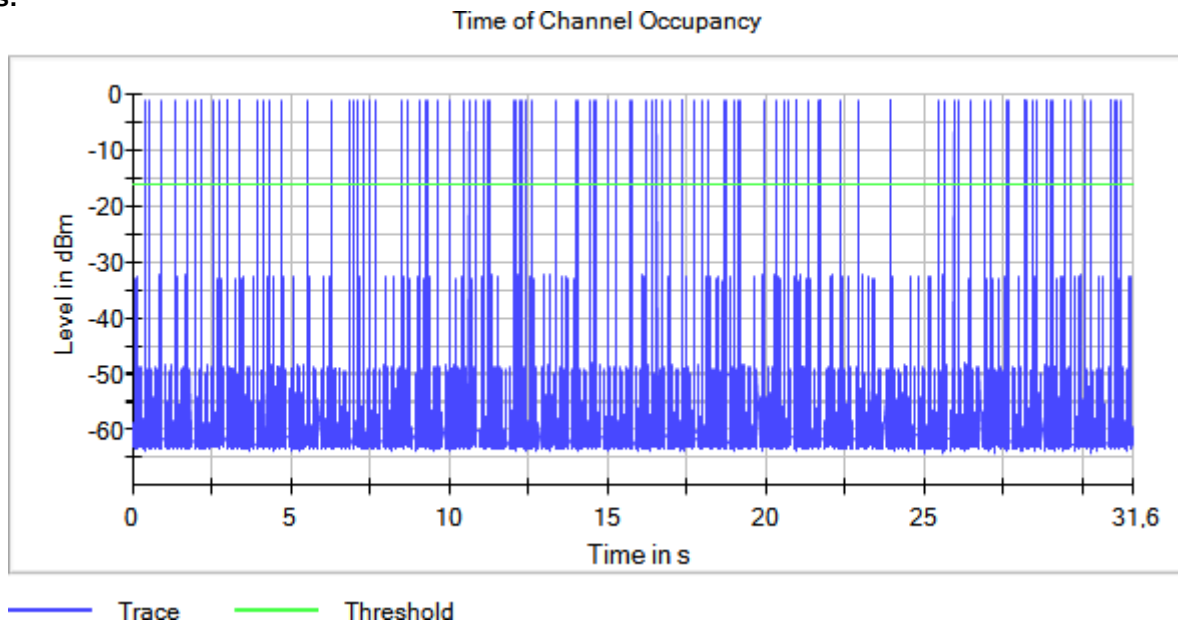

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	78



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

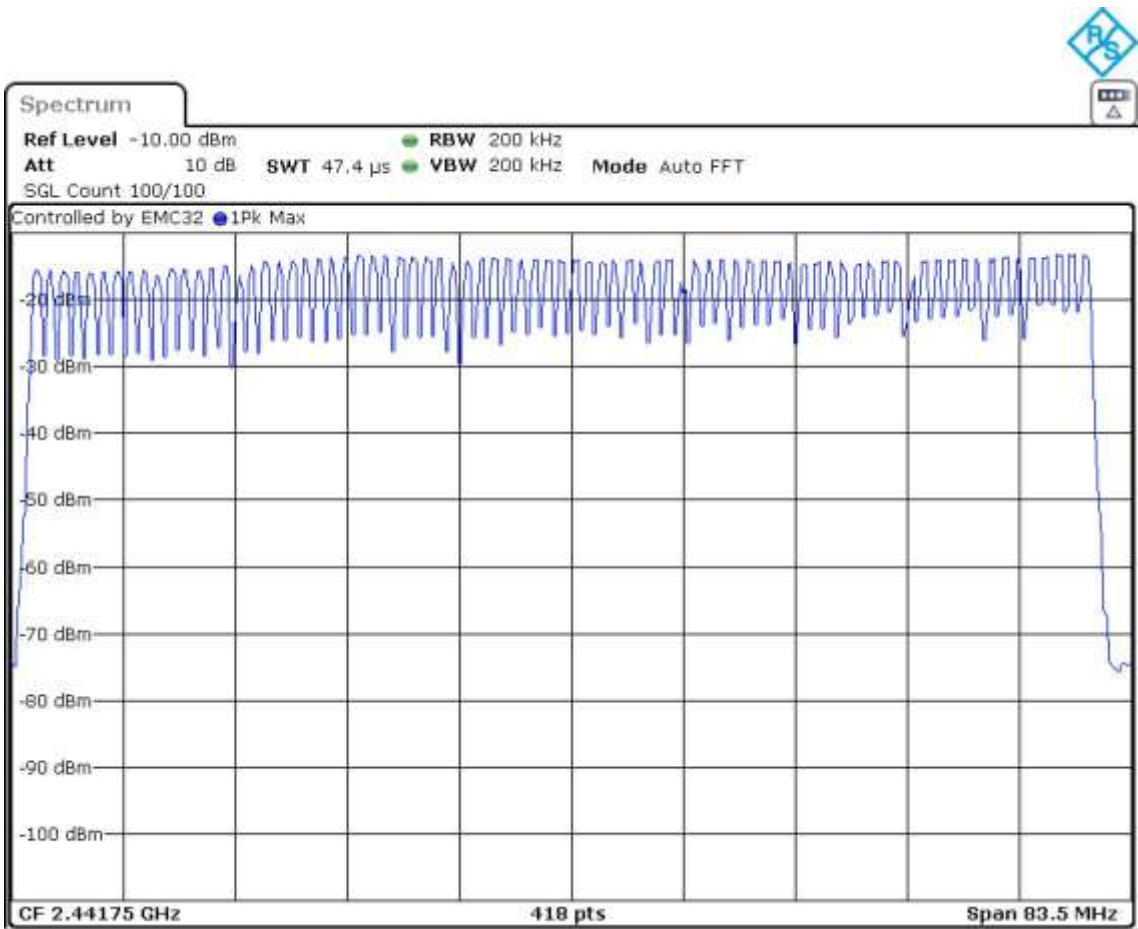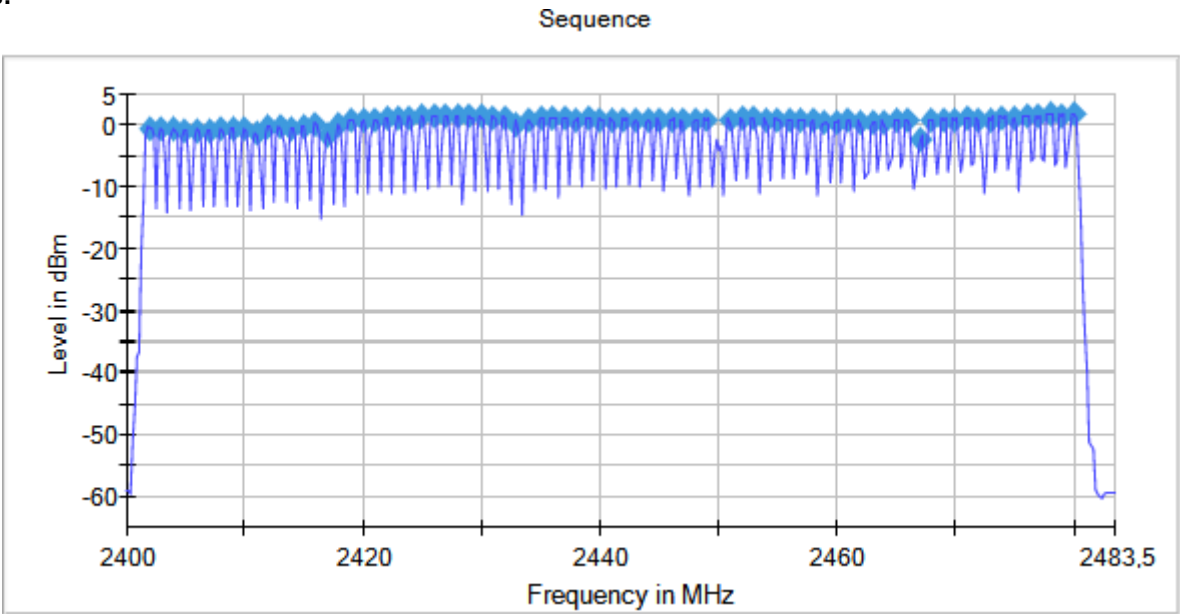

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	80



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

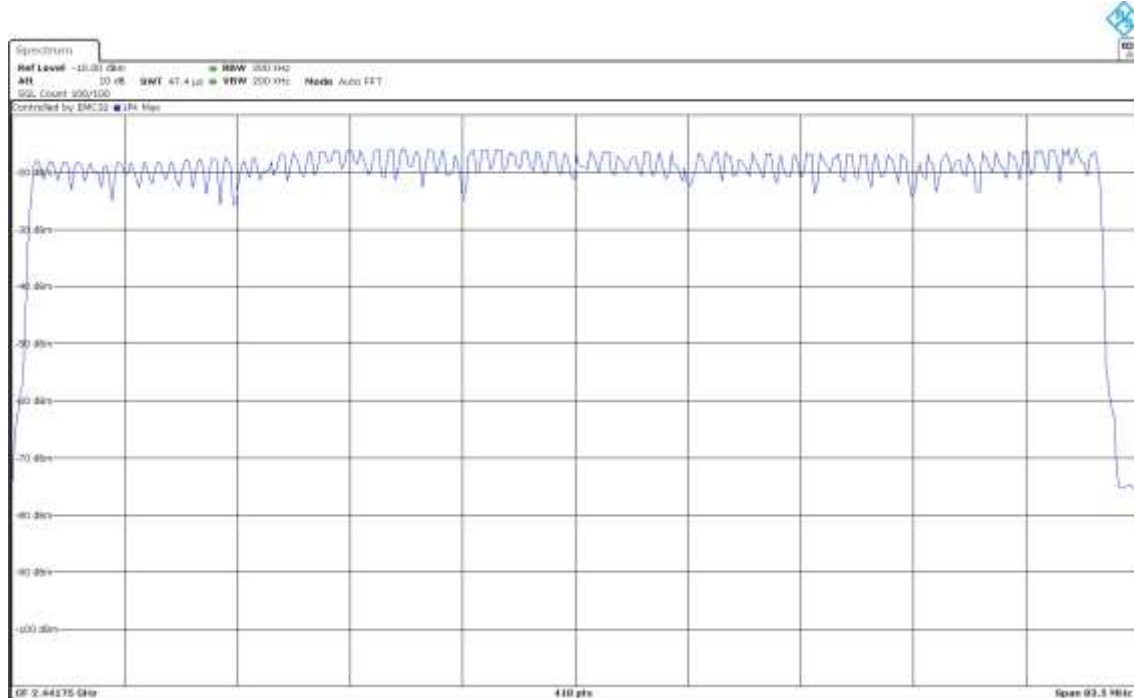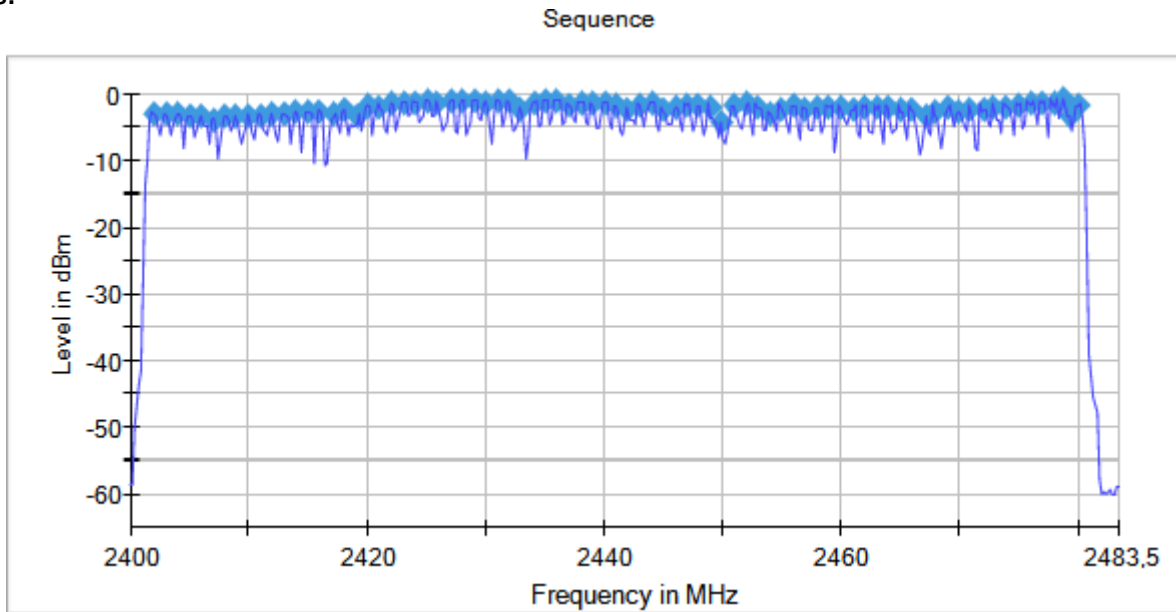

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	80



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
Active Port = 1

Images:

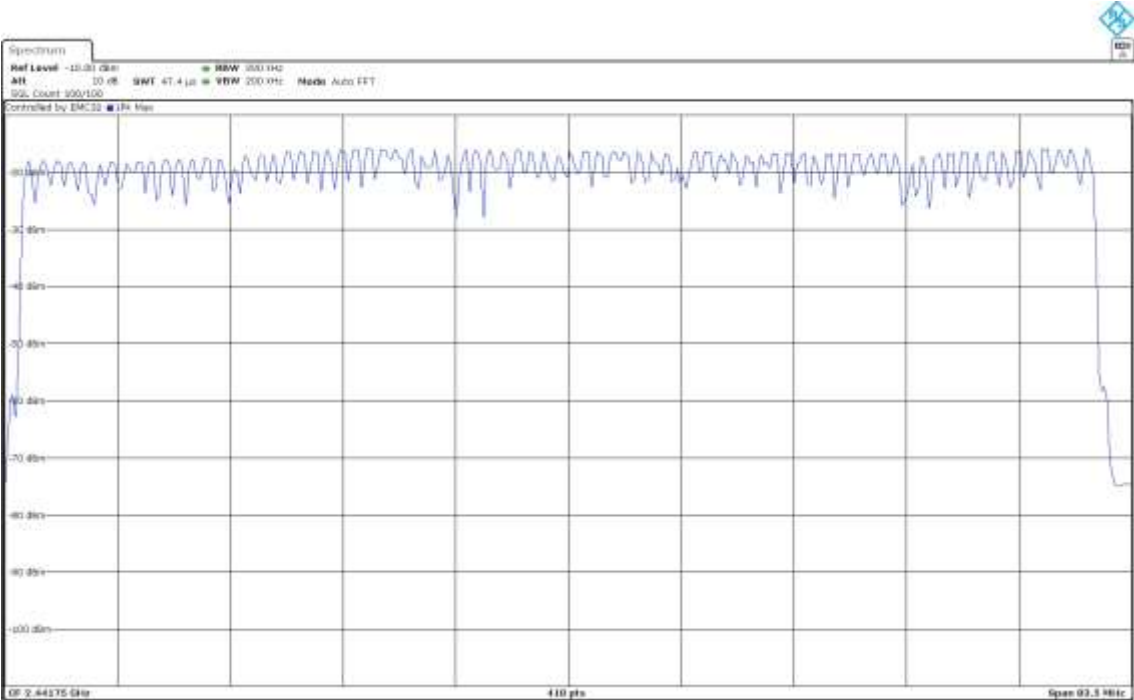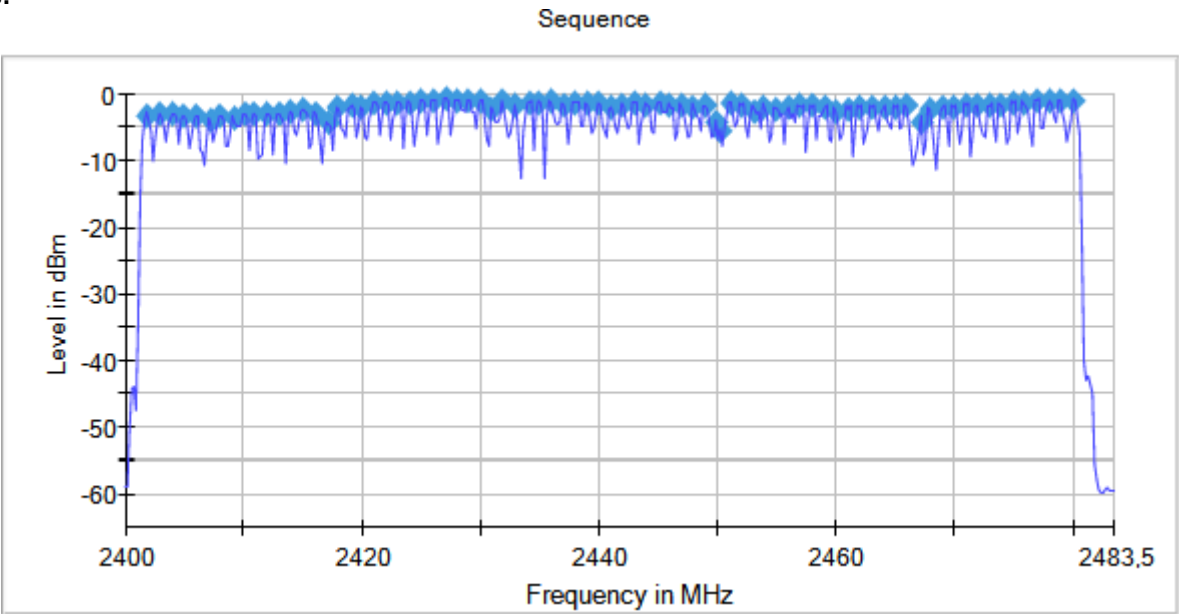

RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power

Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

RSS-247:

The e.i.r.p. shall not exceed 4 W (RSS-247).

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 “Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices” of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: 0 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Equipment	BW (MHz)	Freq (MHz)	Port	Peak Power (dBm)	EIRP Power (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	-0.3410	-0.3410
Frequency Hopping Spread Spectrum systems (DSS)	1	2441.00000	1	1.1490	1.1490
Frequency Hopping Spread Spectrum systems (DSS)	1	2480.00000	1	1.9080	1.9080



Verdict

Pass

Attachments


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

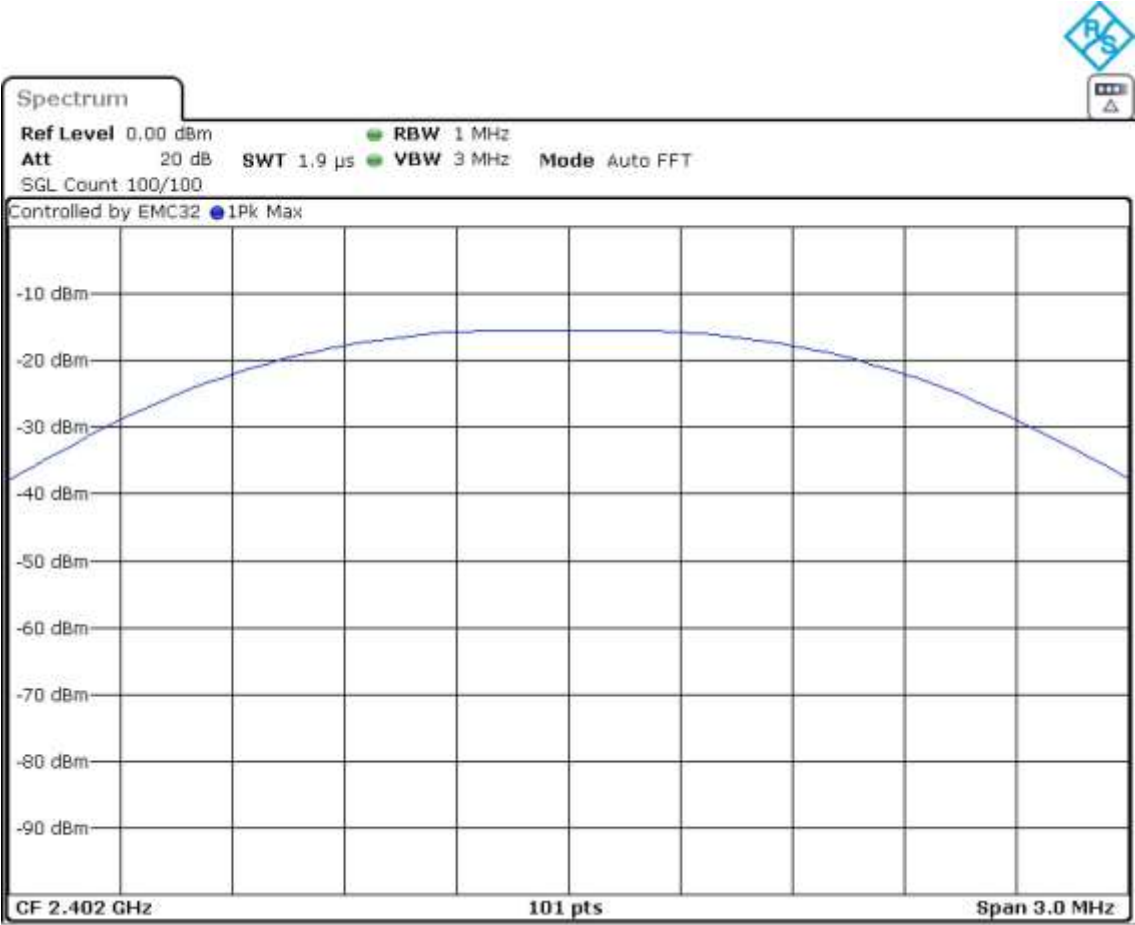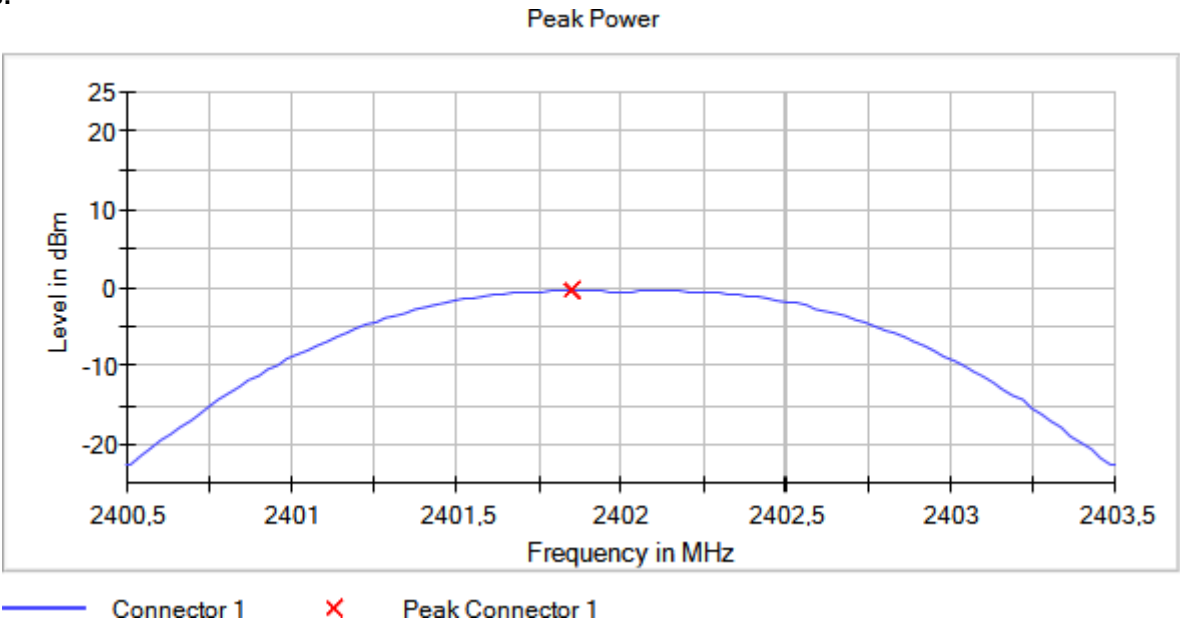


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

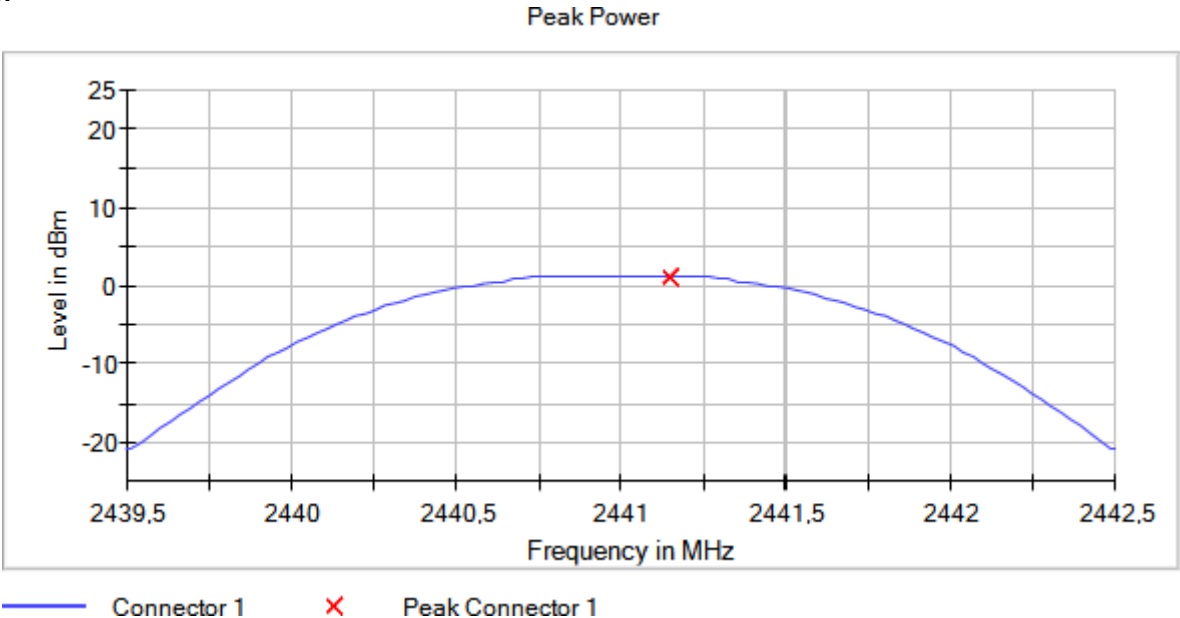

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

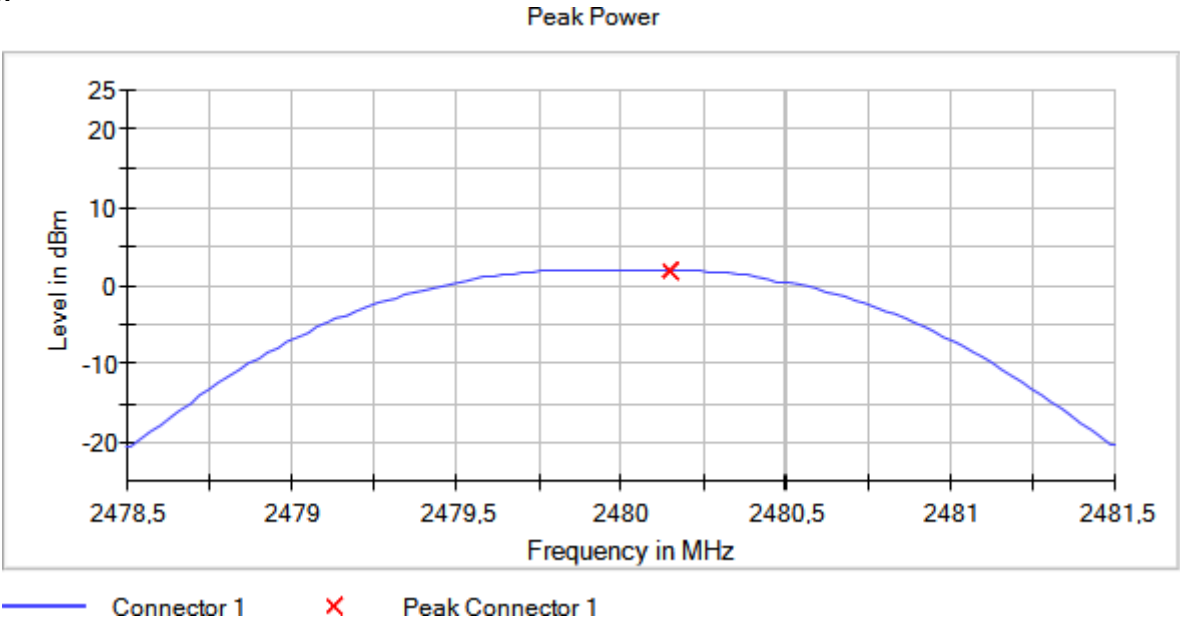

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 “Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices” of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: 0 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Equipment	BW (MHz)	Freq (MHz)	Port	Peak Power (dBm)	EIRP Power (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	-1.0580	-1.0580
Frequency Hopping Spread Spectrum systems (DSS)	1	2441.00000	1	0.3640	0.3640
Frequency Hopping Spread Spectrum systems (DSS)	1	2480.00000	1	1.1570	1.1570



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

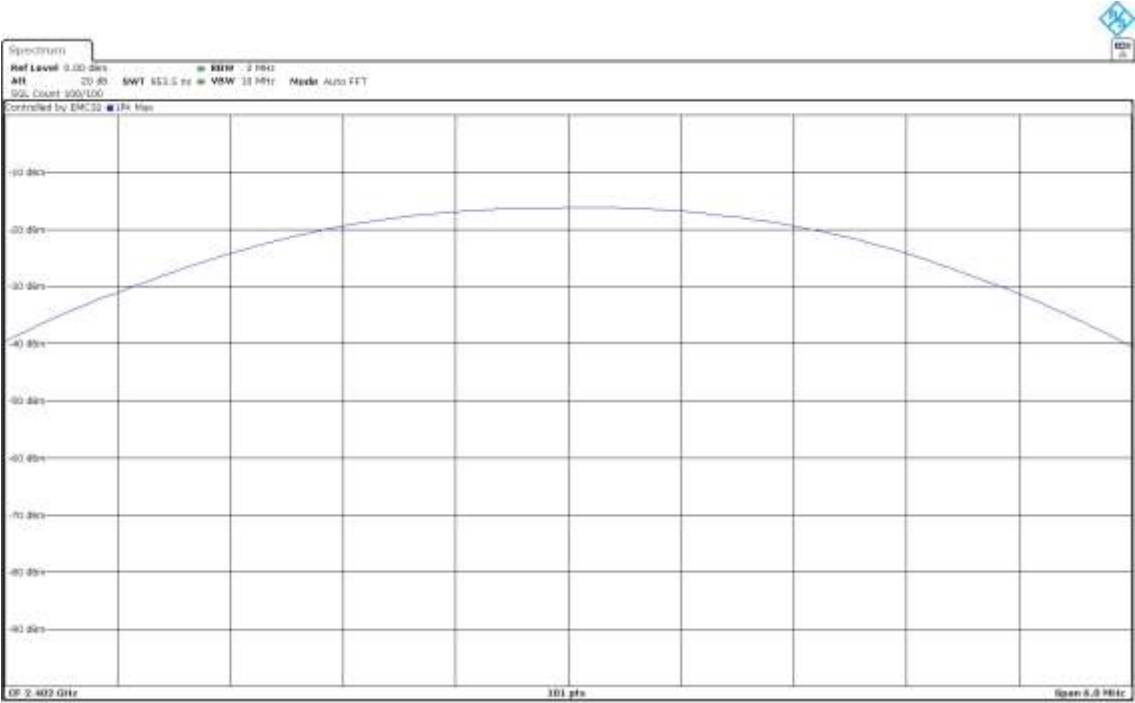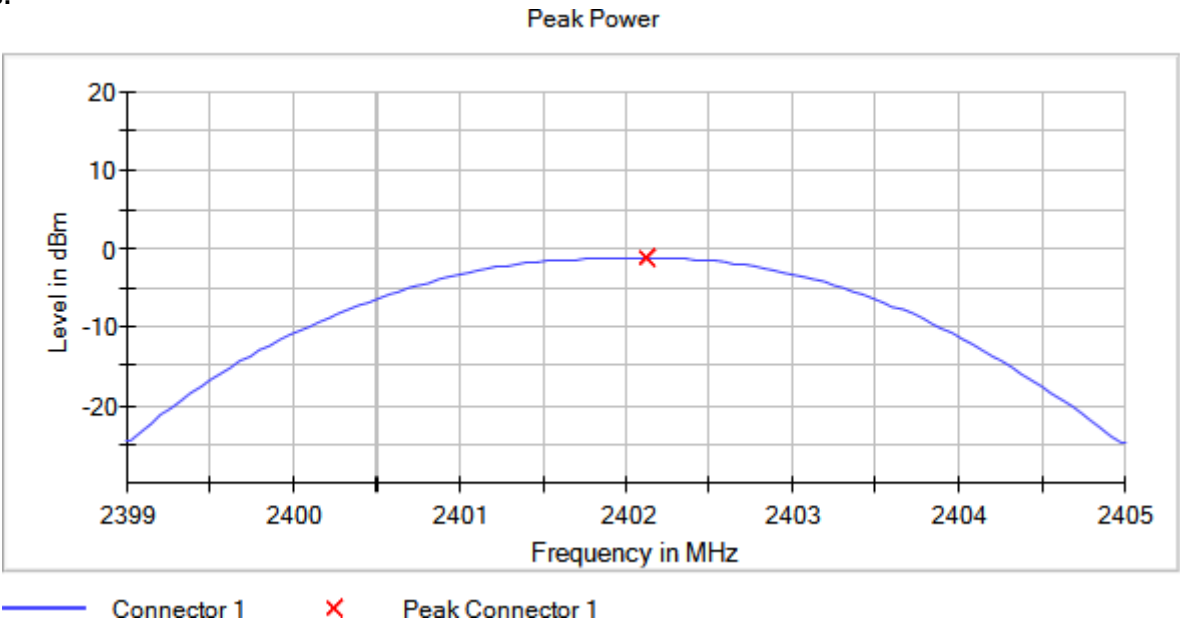

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)



MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2441.00000



Active Port = 1

Images:

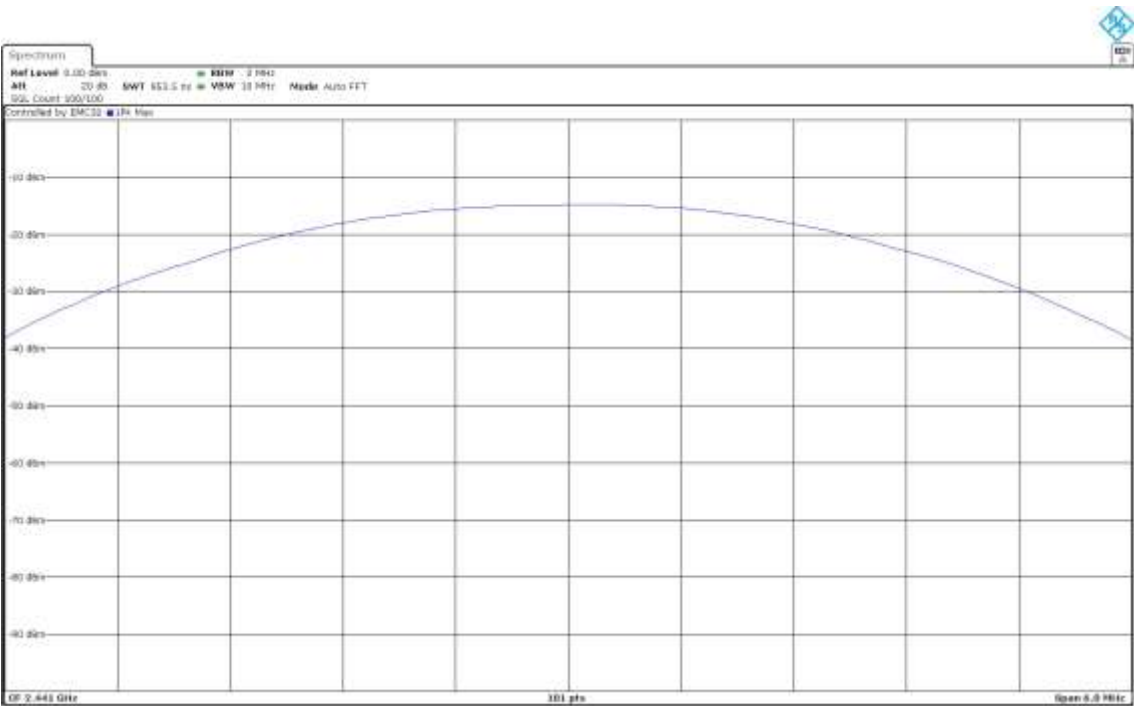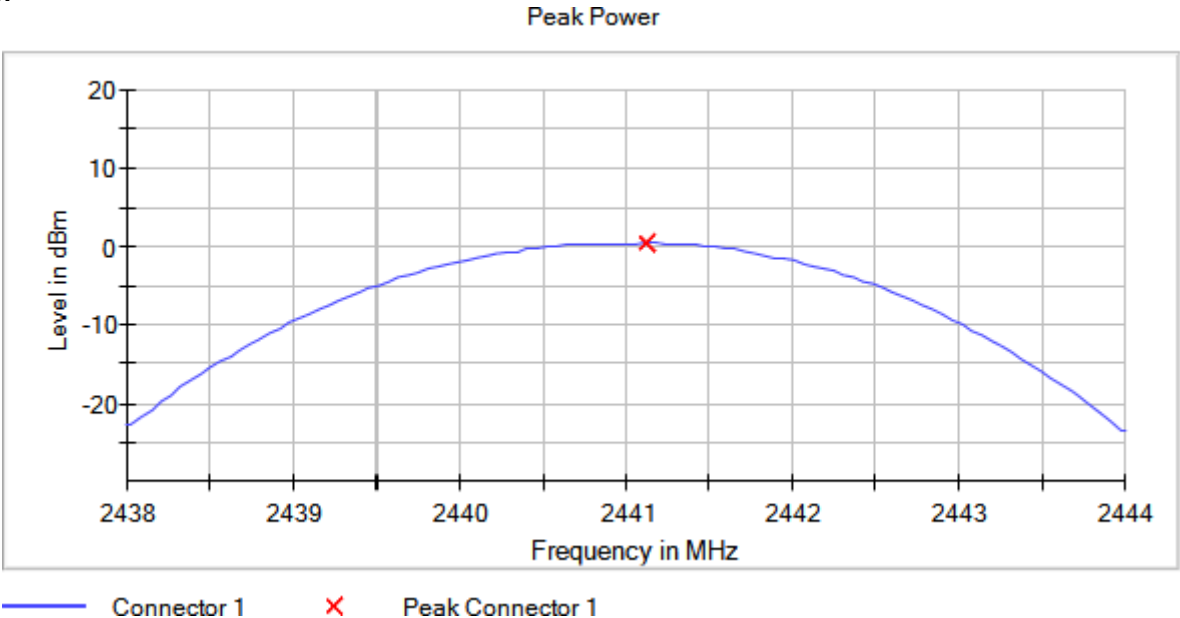

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

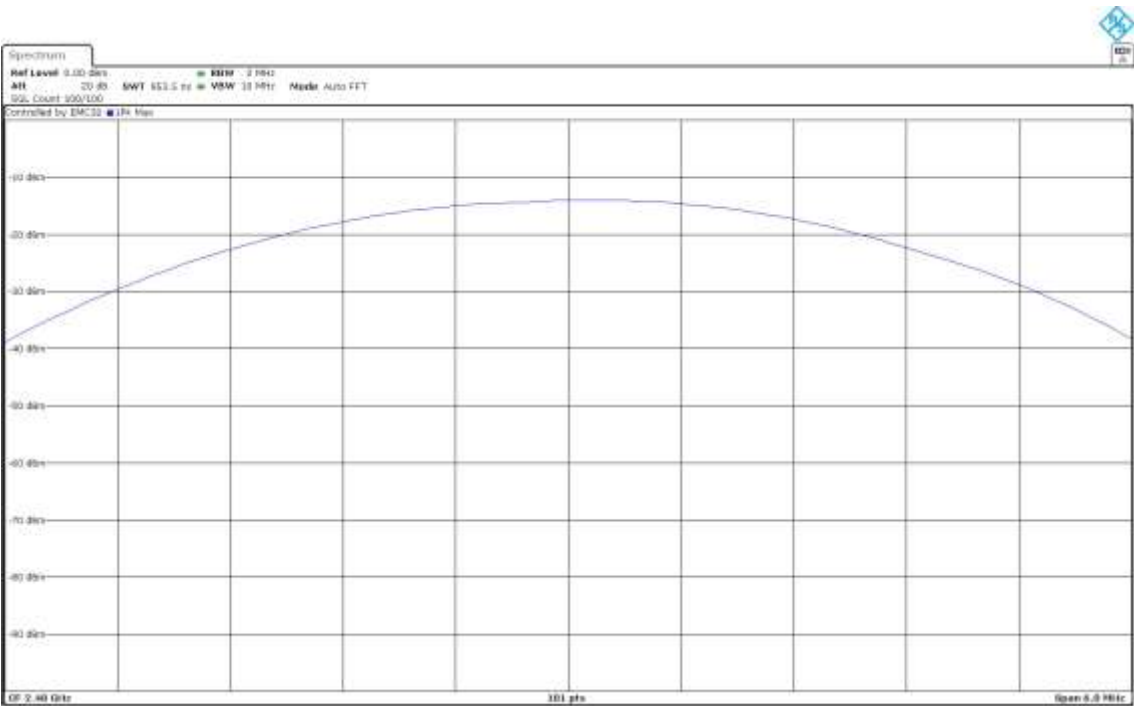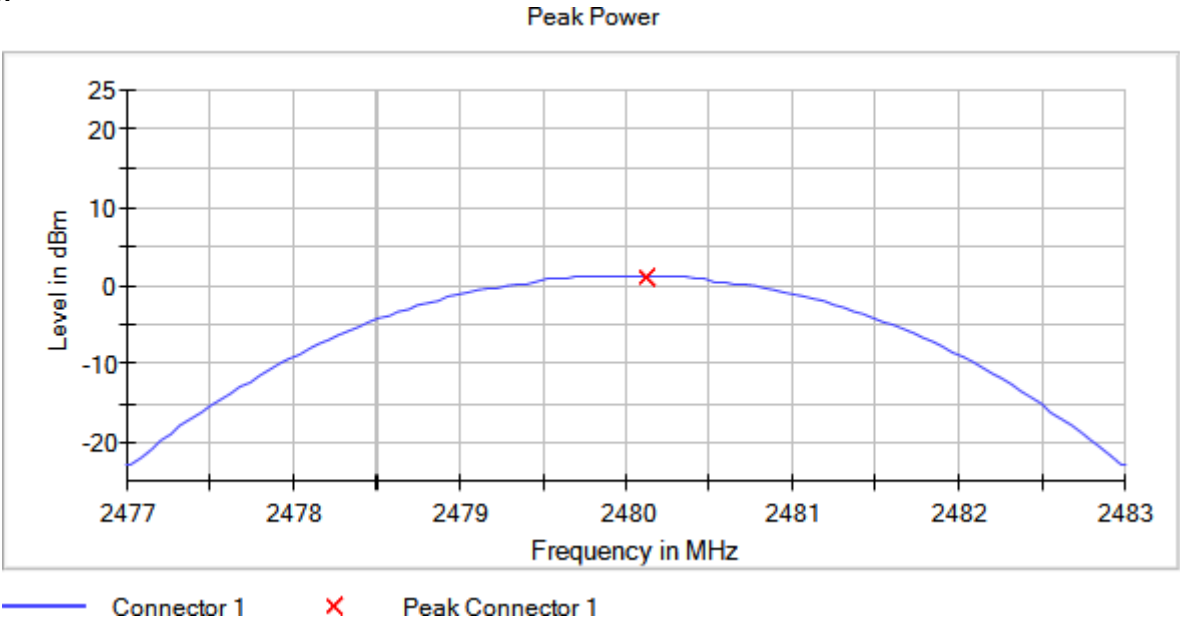

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 “Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices” of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: 0 dBi


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Equipment	BW (MHz)	Freq (MHz)	Port	Peak Power (dBm)	EIRP Power (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	-0.7580	-0.7580
Frequency Hopping Spread Spectrum systems (DSS)	1	2441.00000	1	0.5590	0.5590
Frequency Hopping Spread Spectrum systems (DSS)	1	2480.00000	1	1.4140	1.4140

Verdict



Pass

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)	Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5)	Frequency MHz = 2402.00000
MIMO Mode = SISO	Active Port = 1

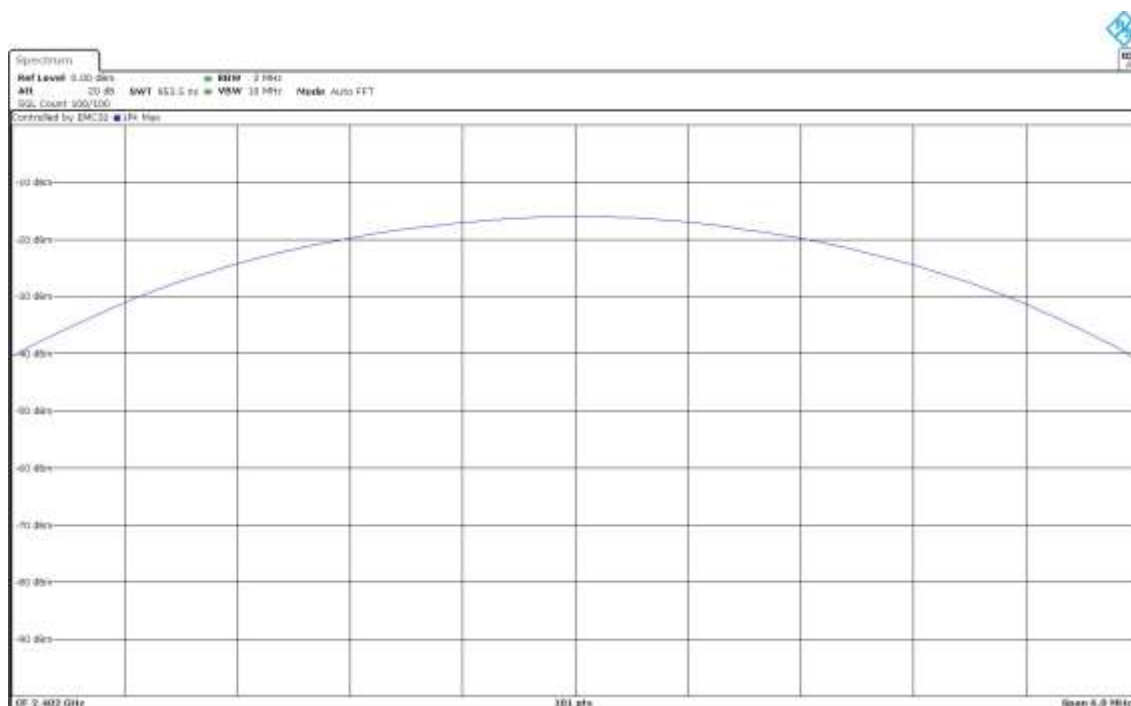



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

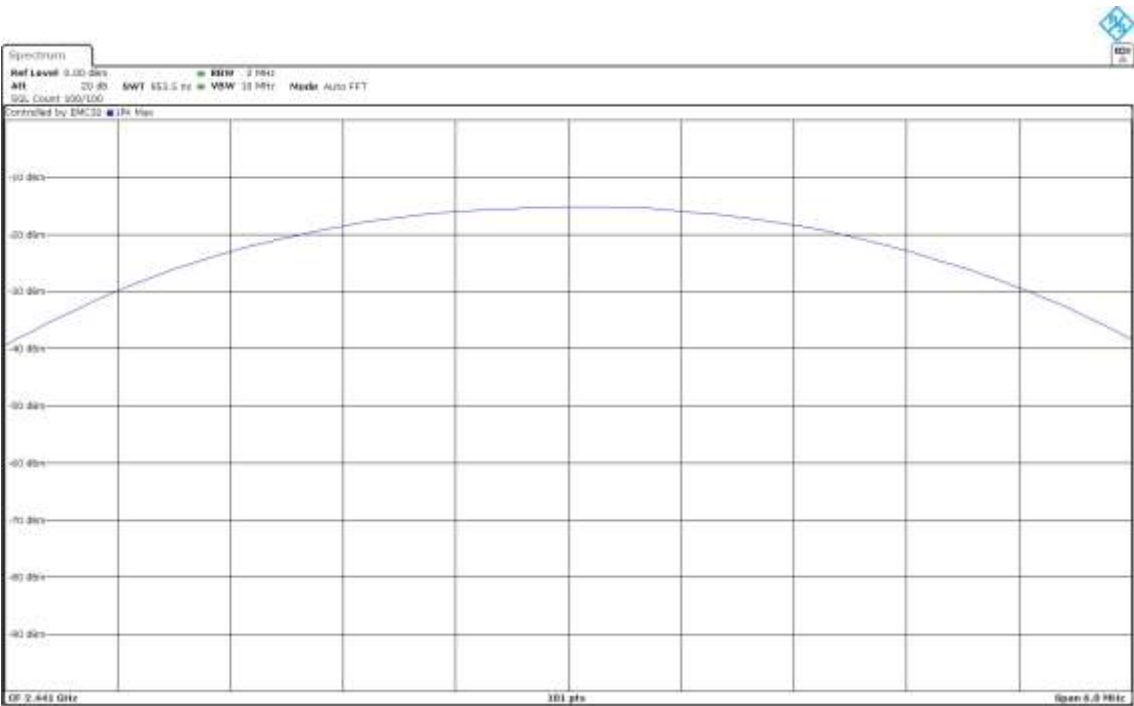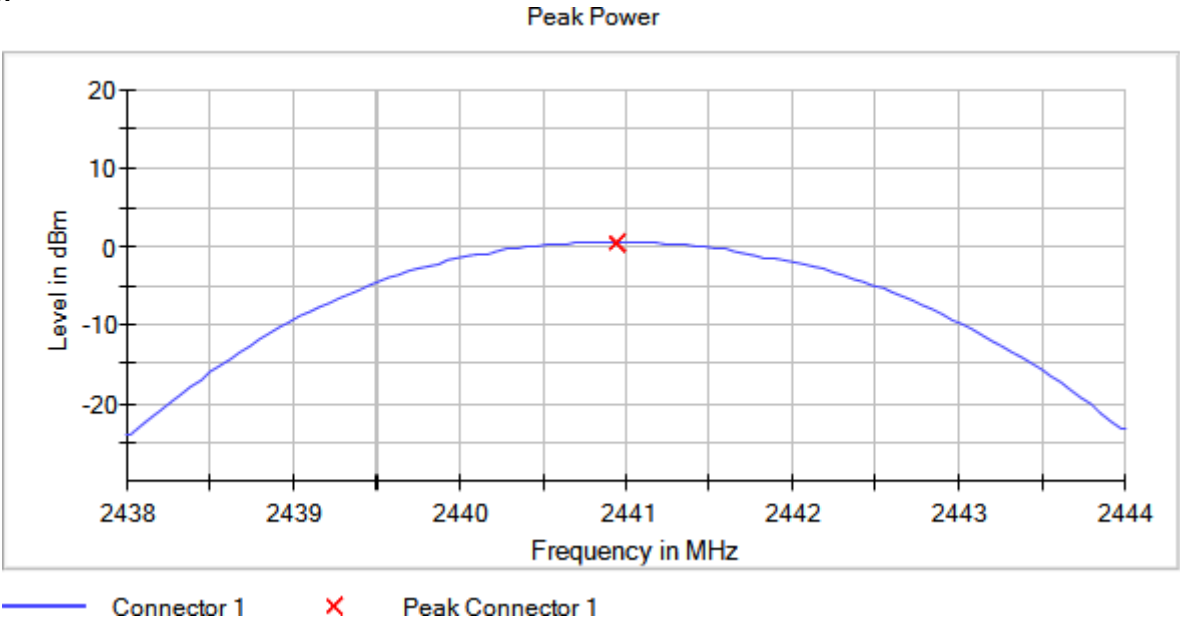

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

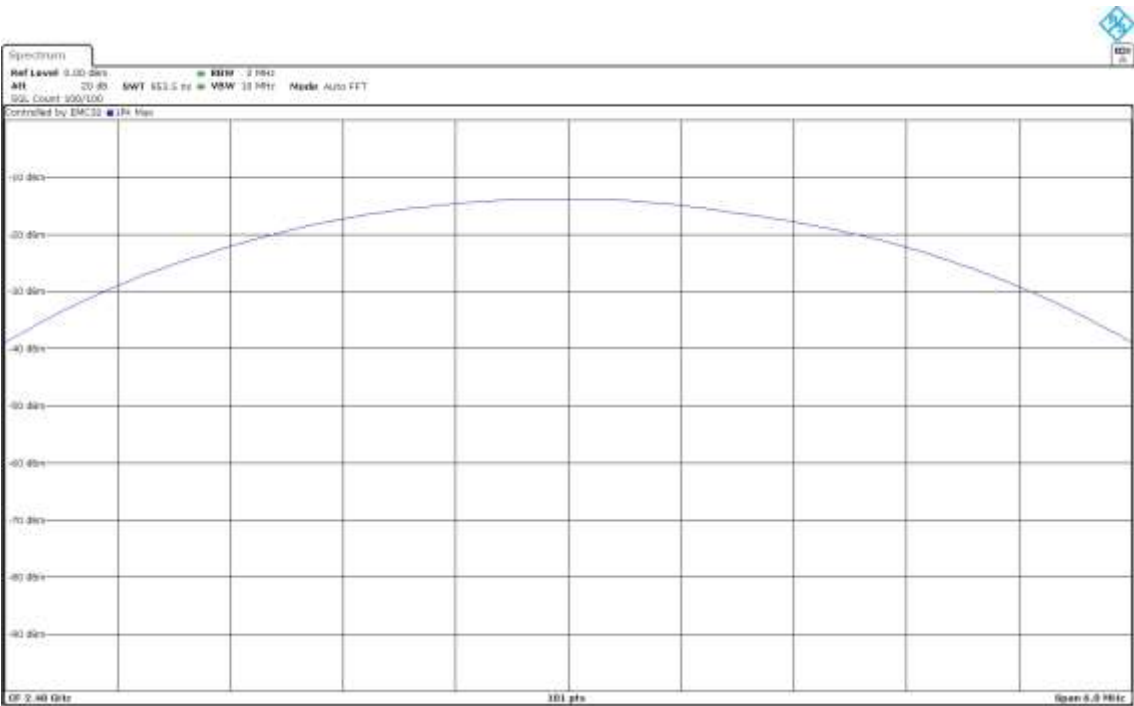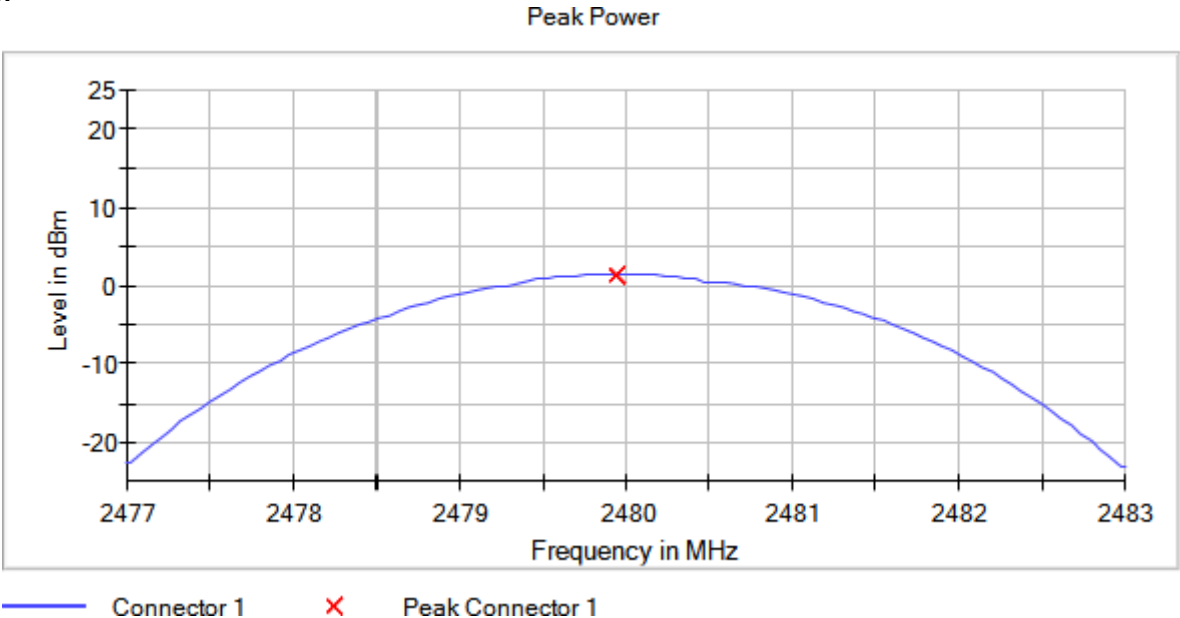

RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

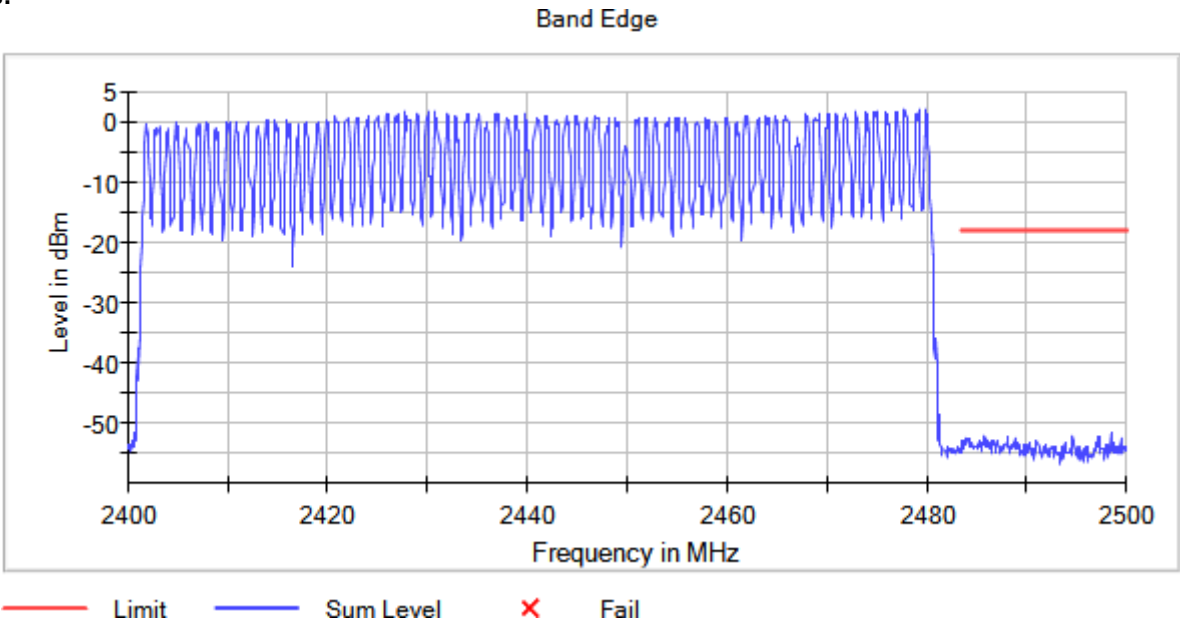

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	132 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK 1-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

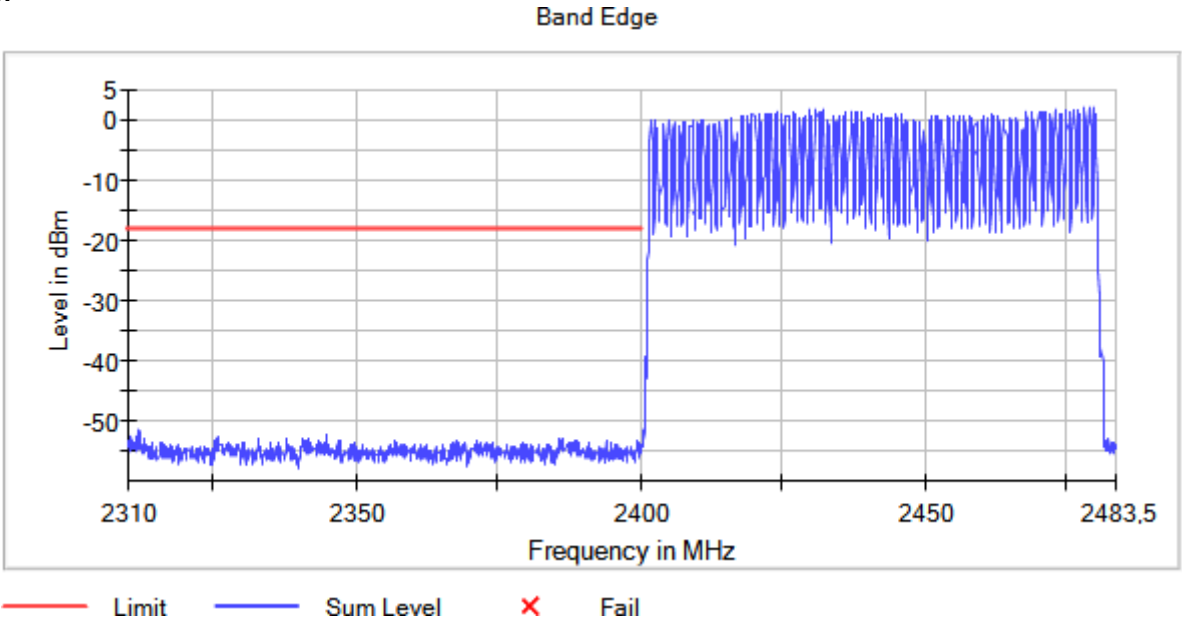

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	132 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK 1-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

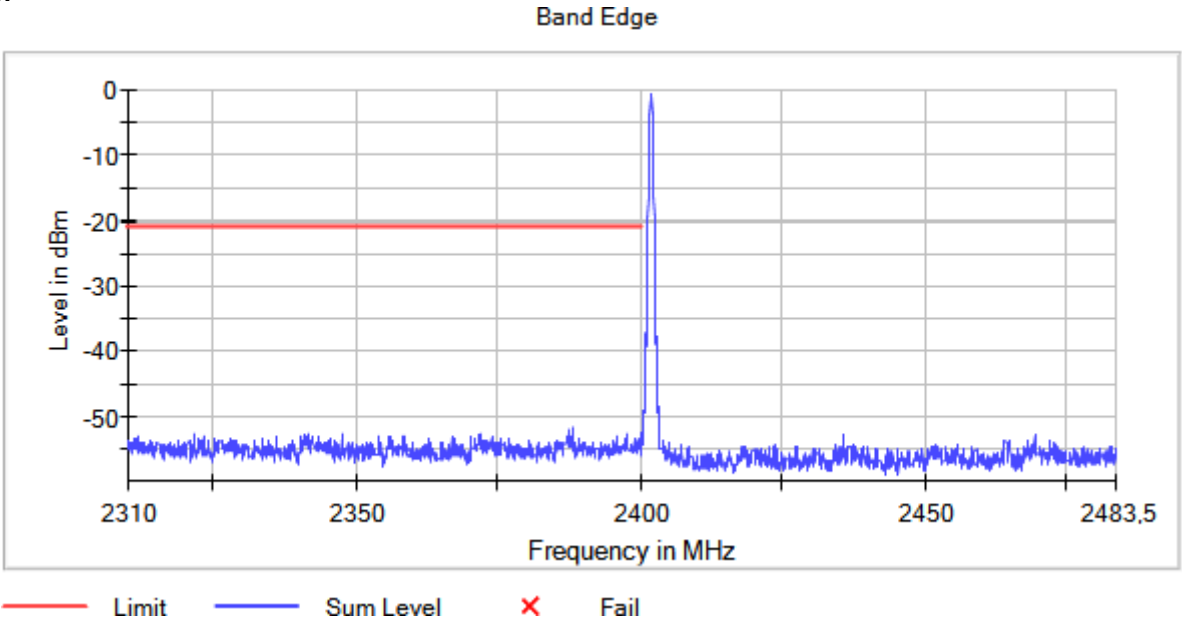

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	132 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK 1-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

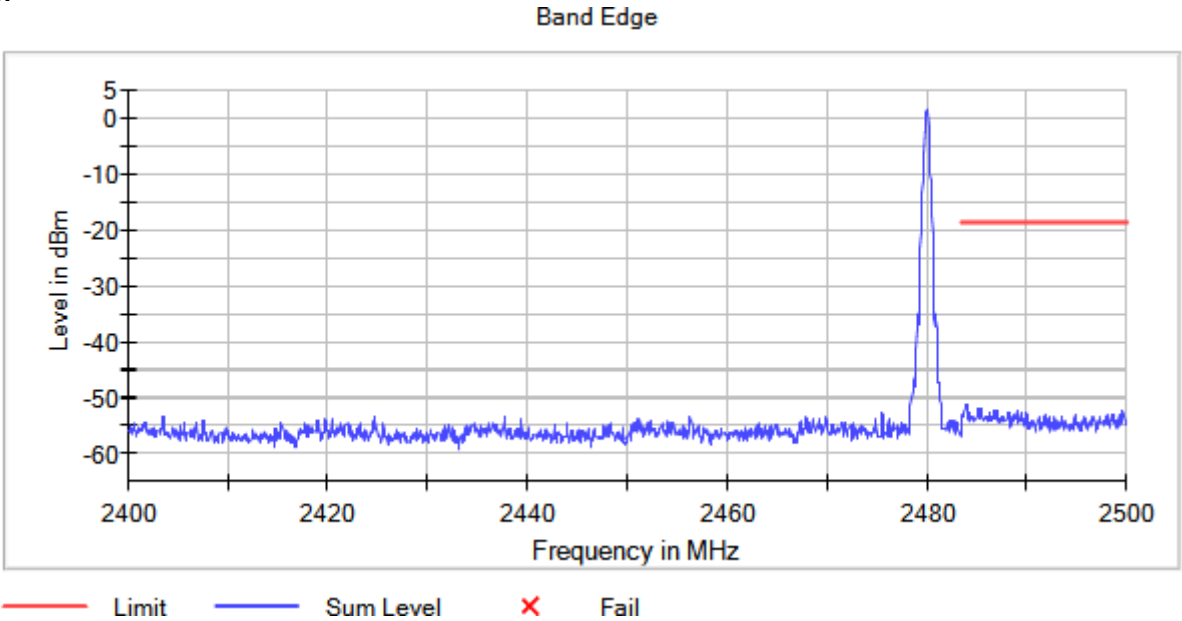

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	132 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

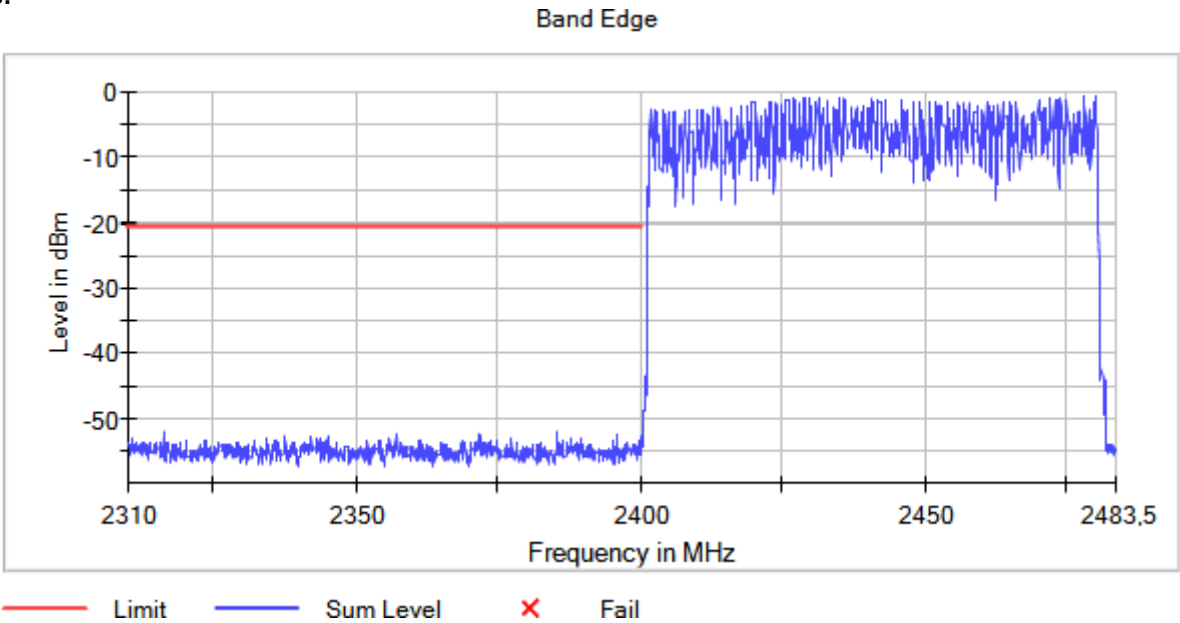

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	120 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

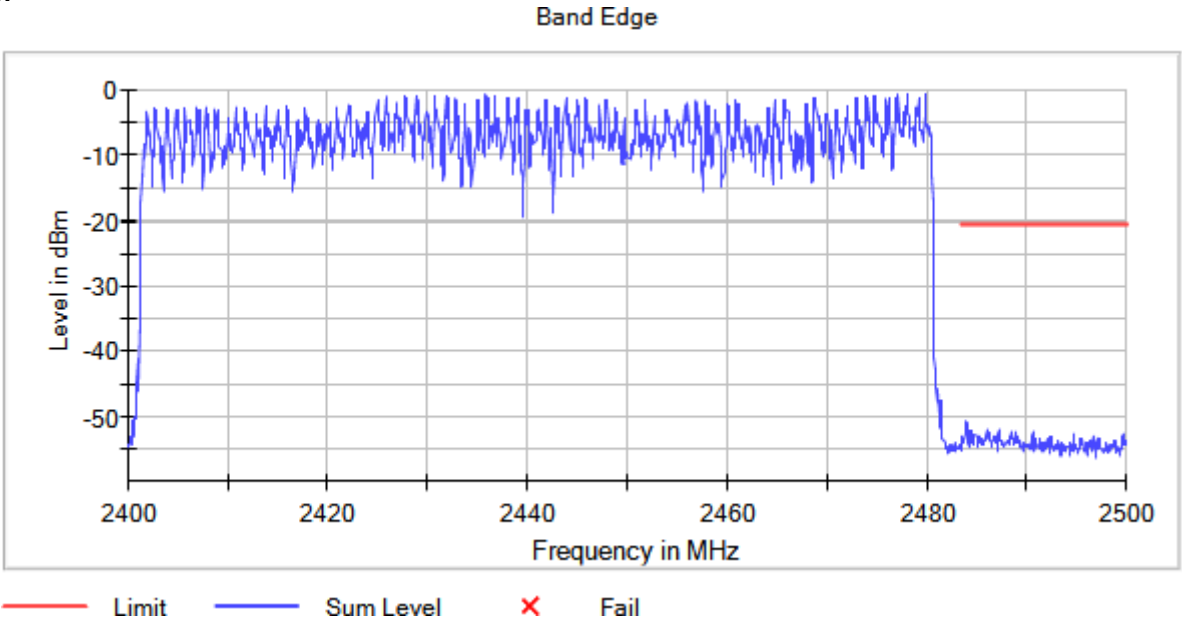

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	120 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

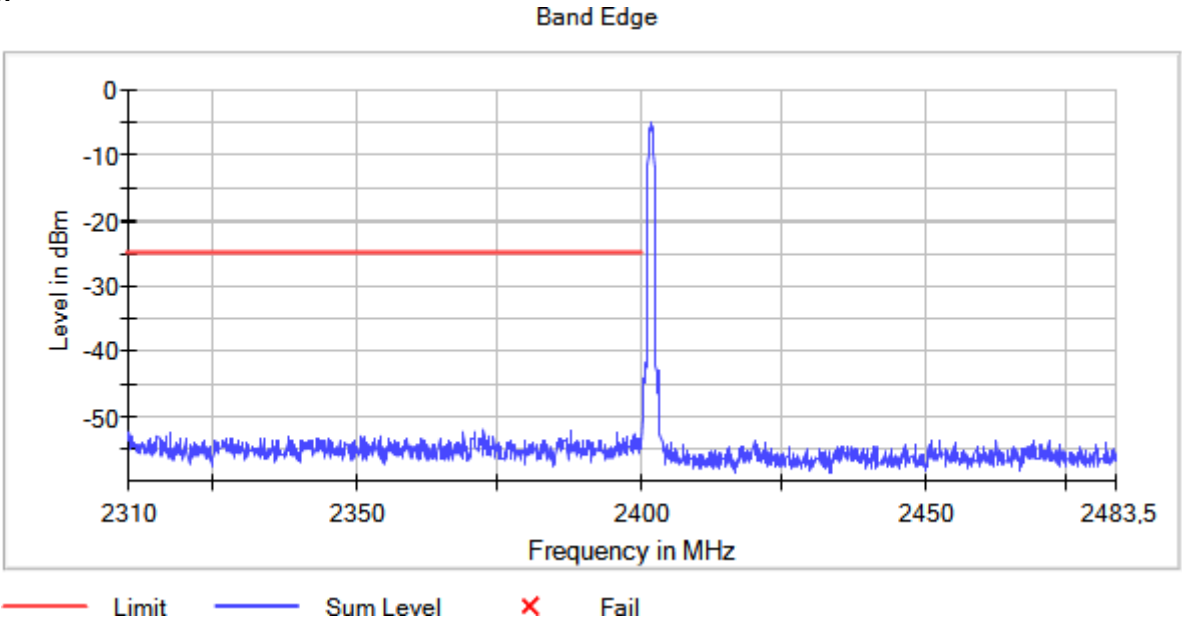

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	120 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

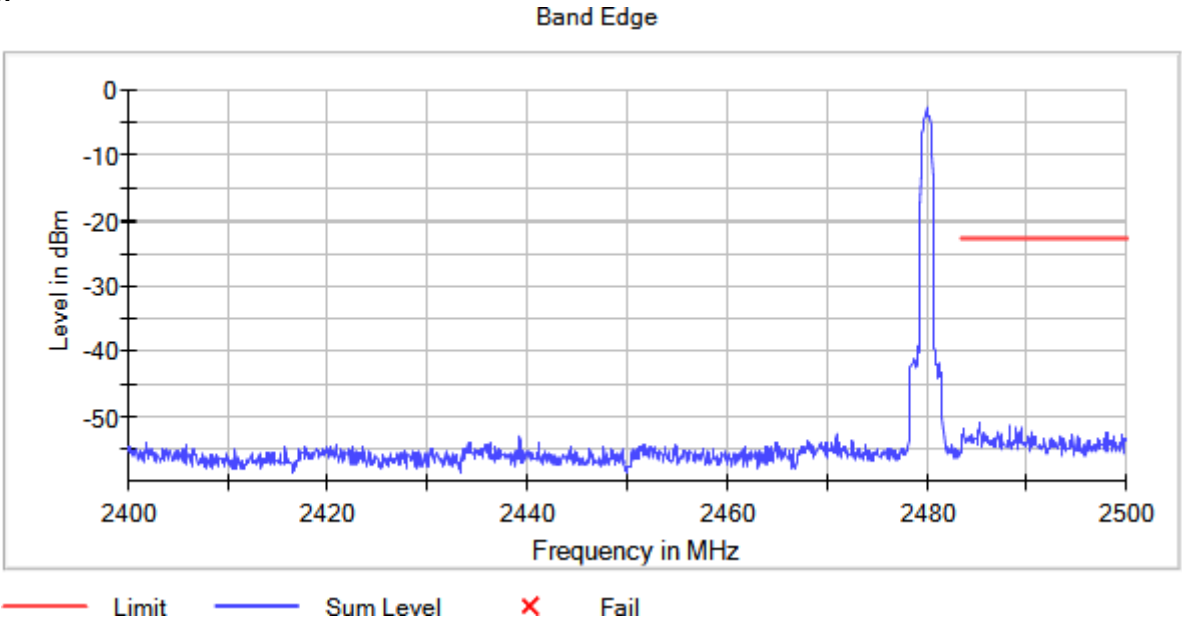

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	120 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.50 dB

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

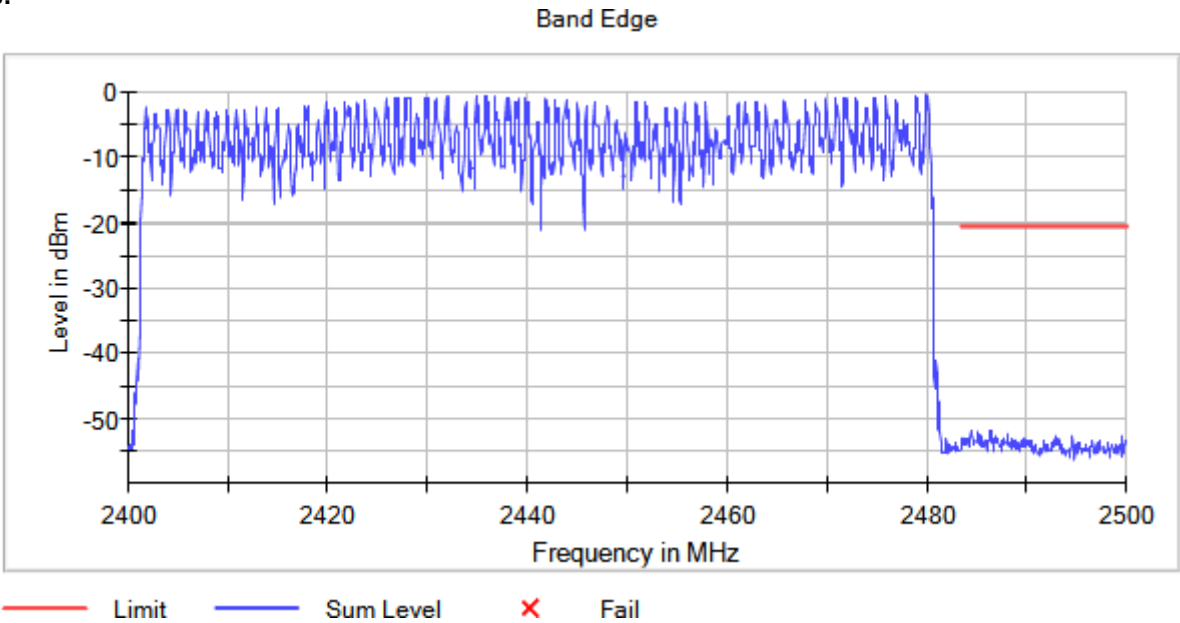

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	129 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK 3-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

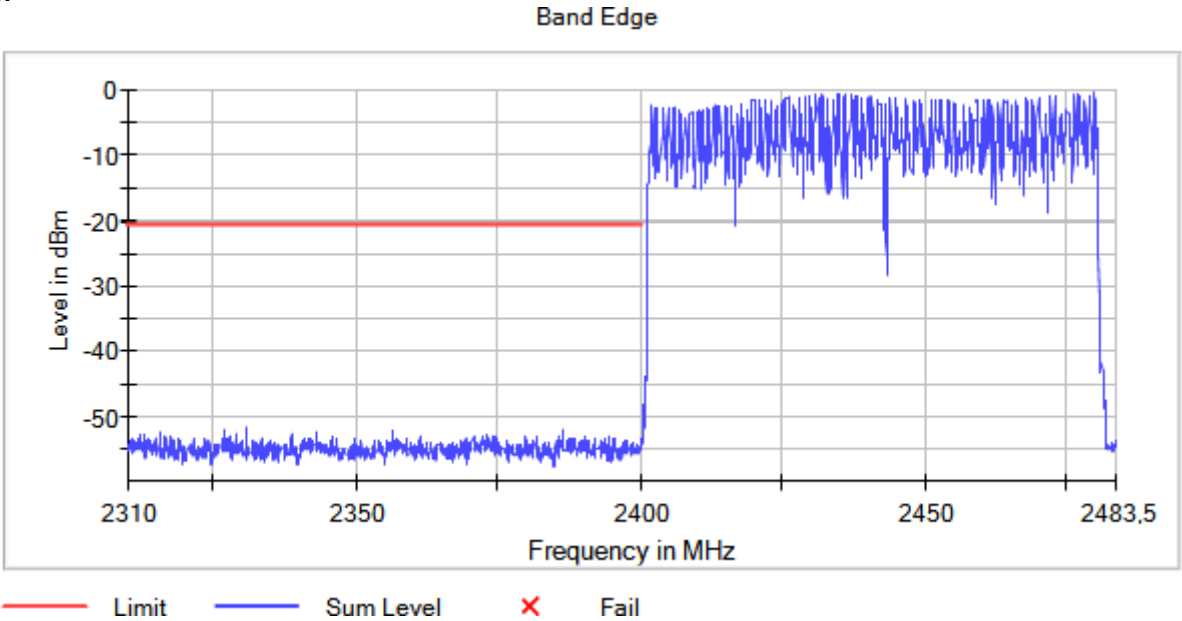

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	129 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK 3-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

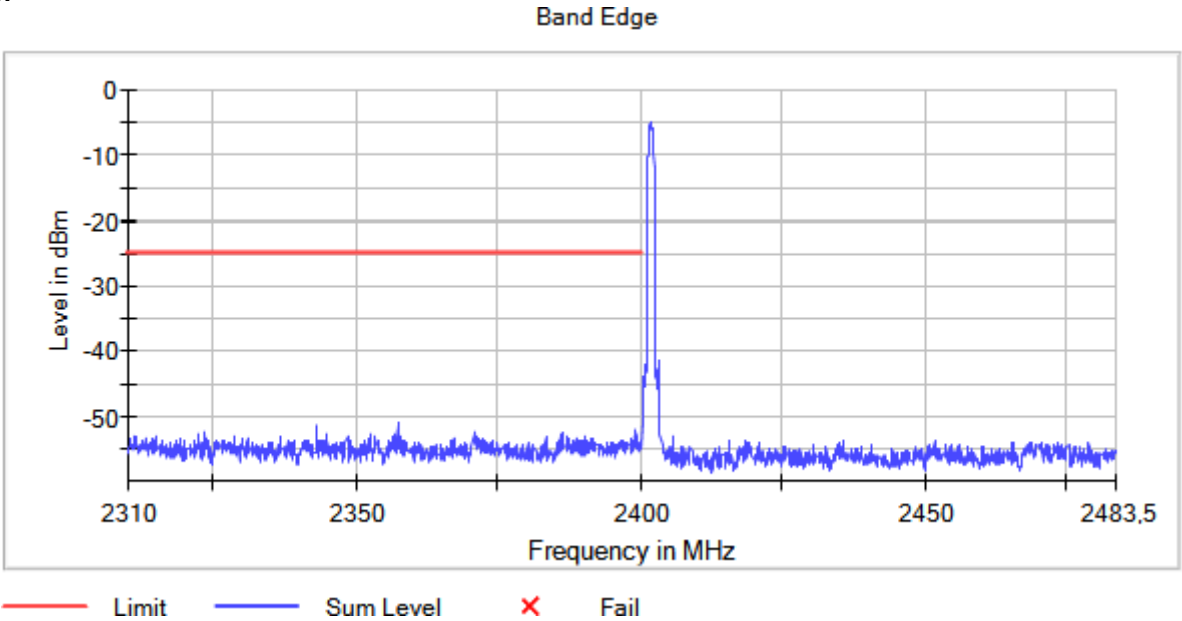

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	129 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK 3-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

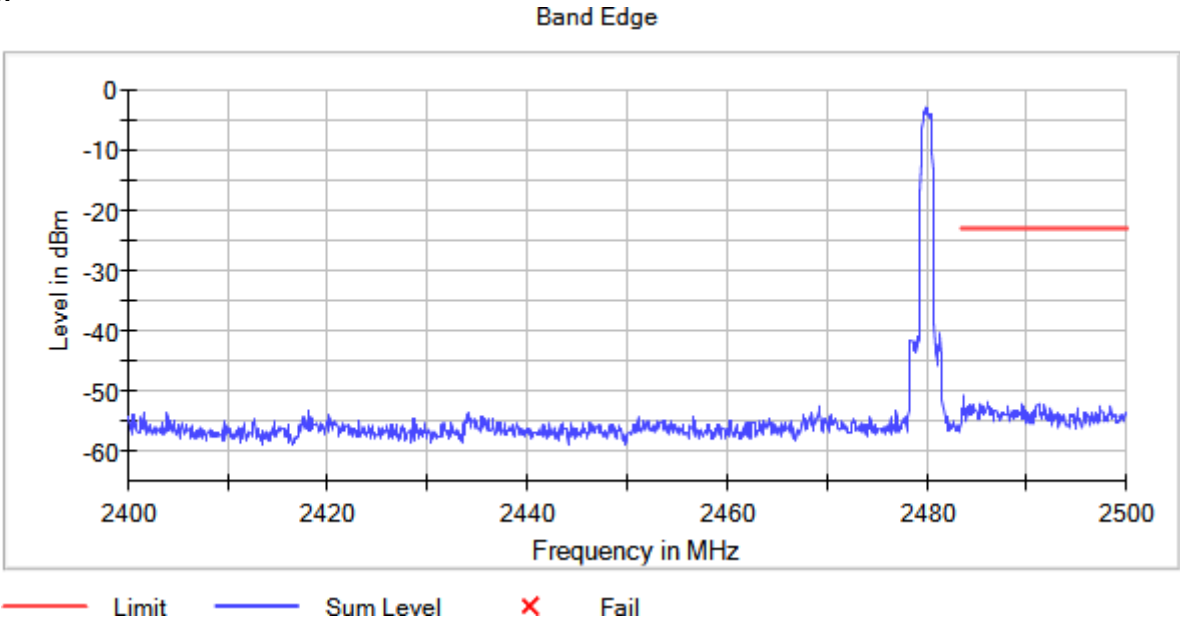

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	129 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	-	300
0.490 - 1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table, specified when measuring with peak detector function.

RSS-247:

Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range tested for Radiated emissions:

Start frequency: no radiofrequency signal generated in the device found below 10th sub-harmonic, no further investigation required.

Stop frequency: it has been performed the radiated spurious emissions until 10th harmonic.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Freq Rng (GHz)	Equipment	Freq (MHz)	Port	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector		
[0.03, 1]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	30.152	28.77	H	PK		
				30.152	23.40	H	QP		
				52.340	25.79	V	PK		
				52.340	17.05	V	QP		
				869.202	33.10	V	PK		
				869.202	29.04	V	QP		
		2441.00000		52.340	17.95	V	PK		
				52.340	12.51	V	QP		
				61.677	23.85	V	PK		
				61.677	14.33	V	QP		
				708.121	32.91	H	PK		
				708.121	26.72	H	QP		
				76.499	20.82	V	PK		
				76.499	12.99	V	QP		
				829.007	35.61	H	PK		
				829.007	29.31	H	QP		
				869.202	33.50	V	PK		
				869.202	29.90	V	QP		
		2480.00000		46.460	26.49	V	PK		
				46.460	17.18	V	QP		
				796.997	29.66	V	PK		
				796.997	24.52	V	QP		
				869.141	32.32	V	PK		
				869.141	27.57	V	QP		
[1, 3]		2402.00000		2353.877	55.91	H	PK		
2353.877				43.55	H	AVG			
[3, 17]				4649.340	42.33	V	PK		
				4804.040	41.49	V	PK		
				5399.880	42.62	V	PK		
				2441.00000	4881.180	43.45	V	PK	
2480.00000		4683.360		43.68	V	PK			
		4959.860		46.46	V	PK			


Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

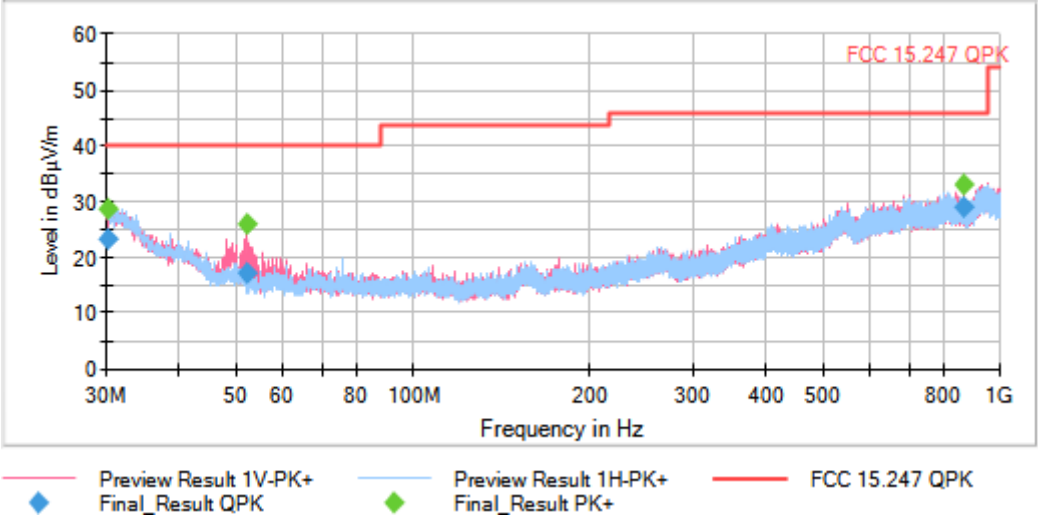


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [0.03, 1] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

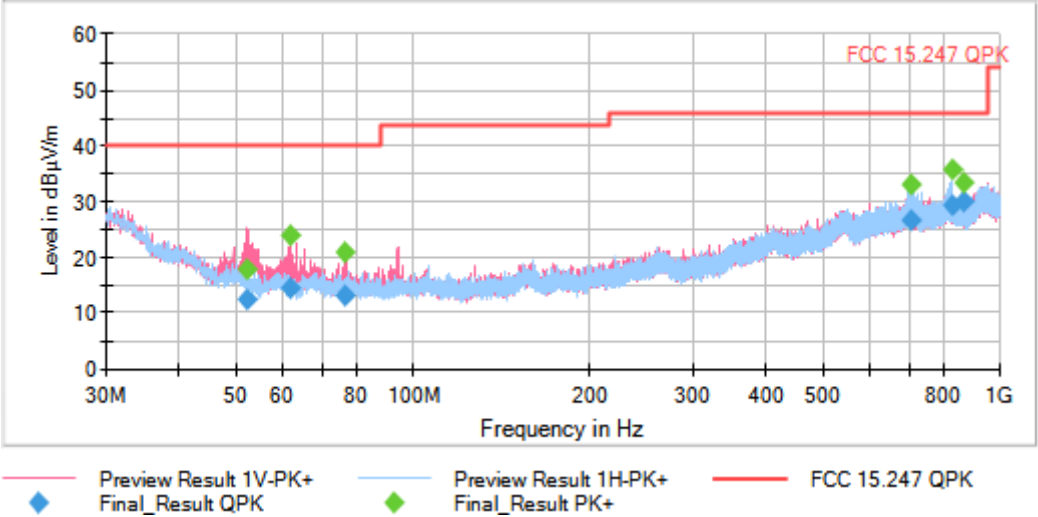


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [0.03, 1] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

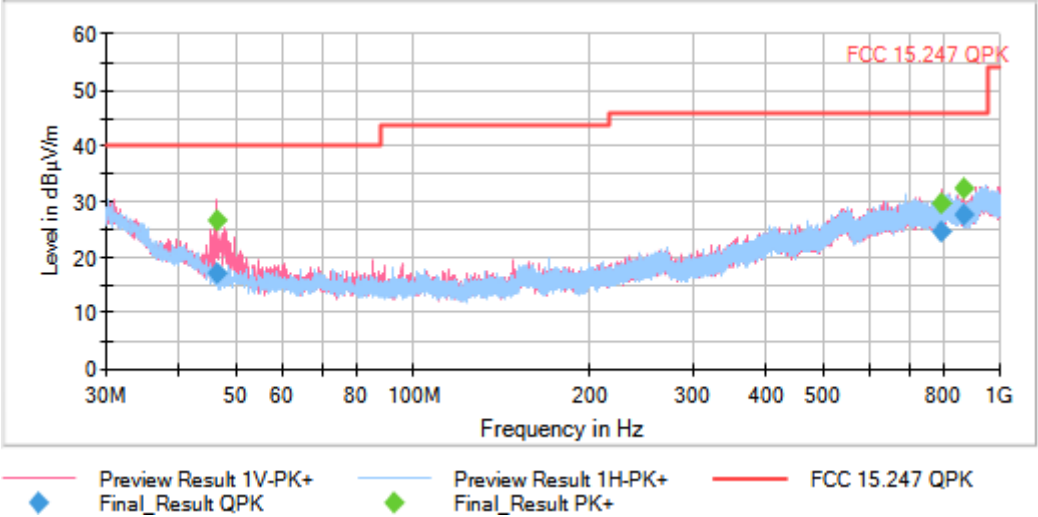


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

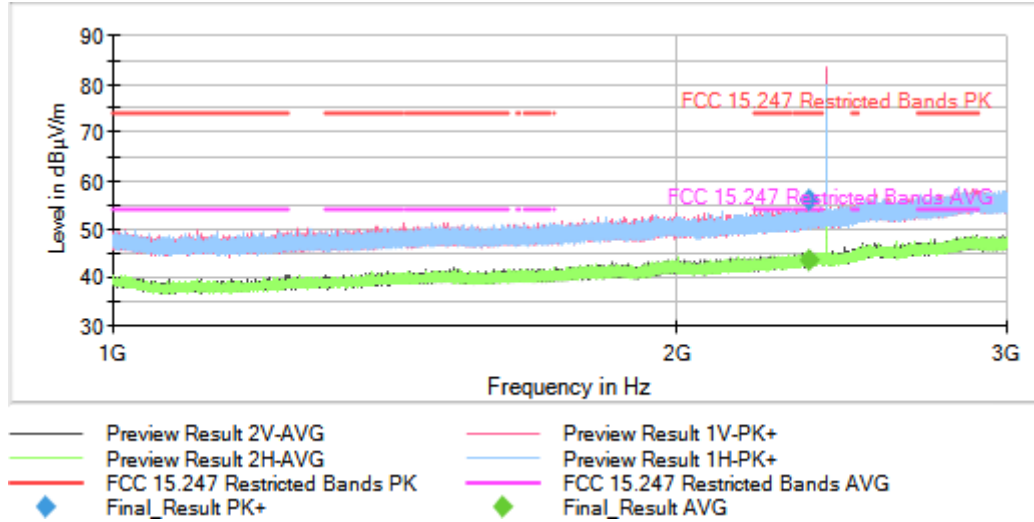

Full Spectrum

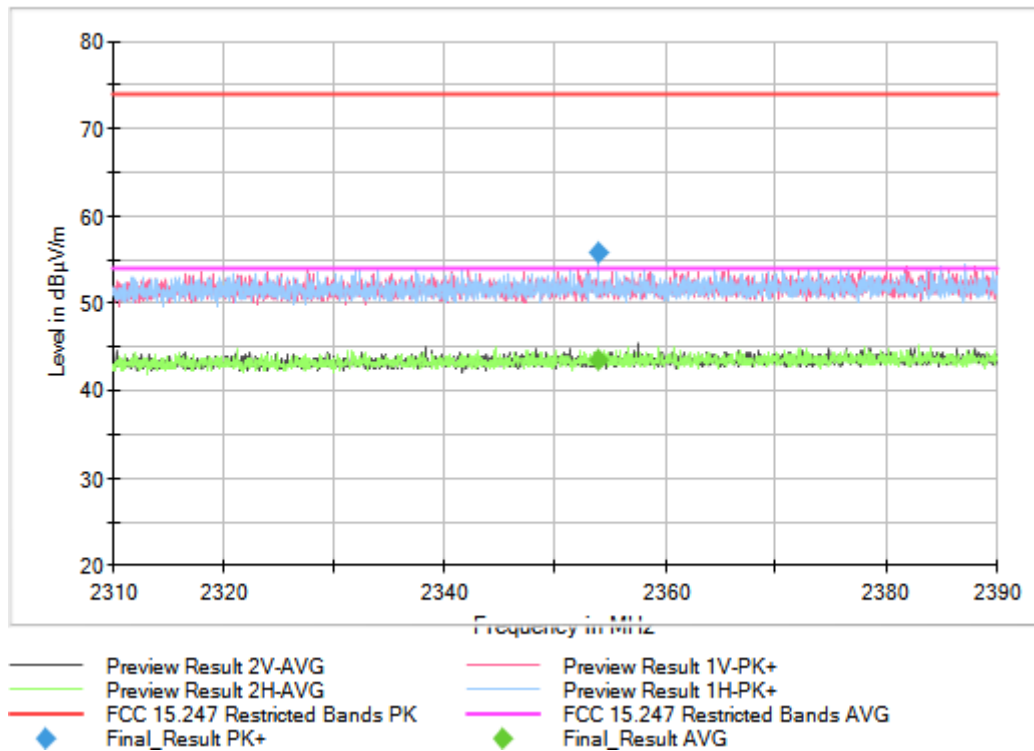

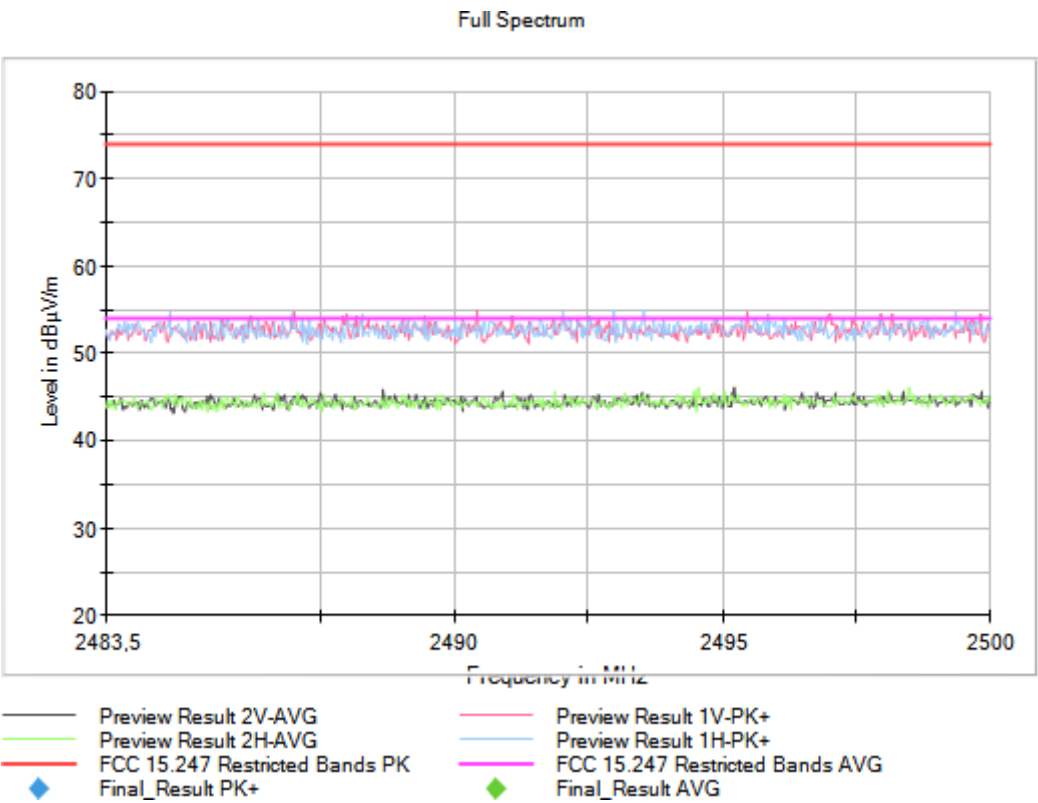


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

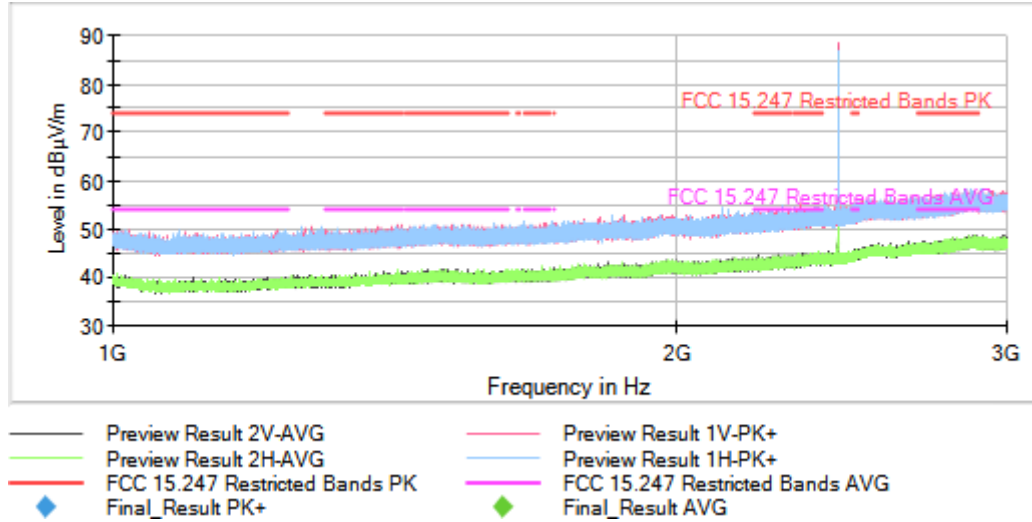

Full Spectrum

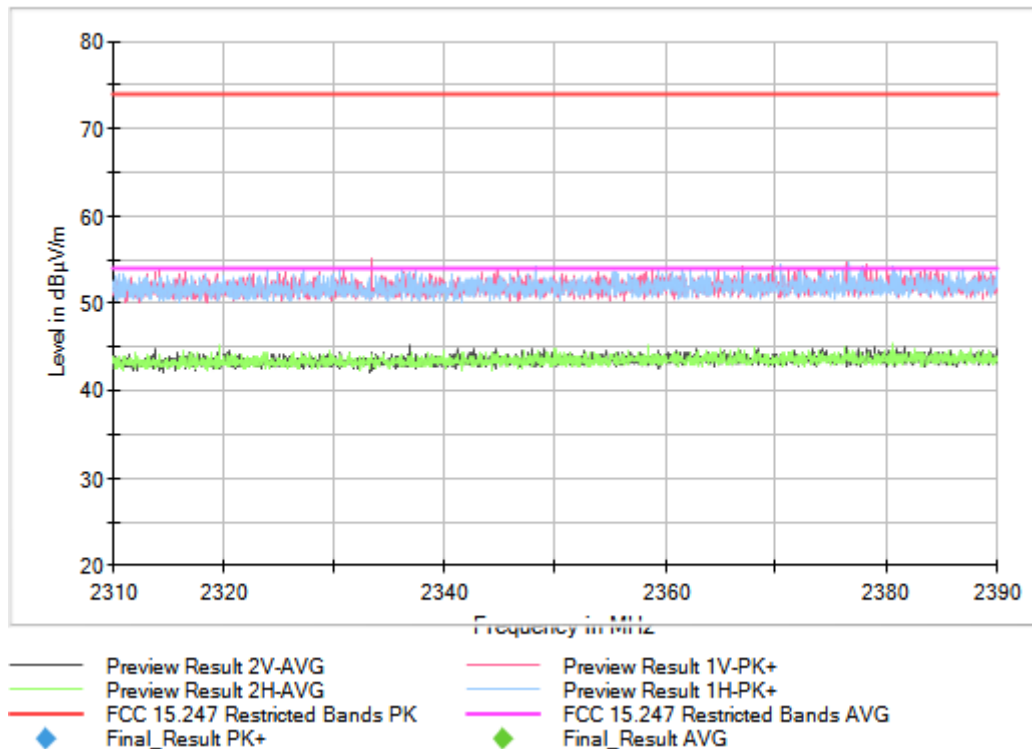

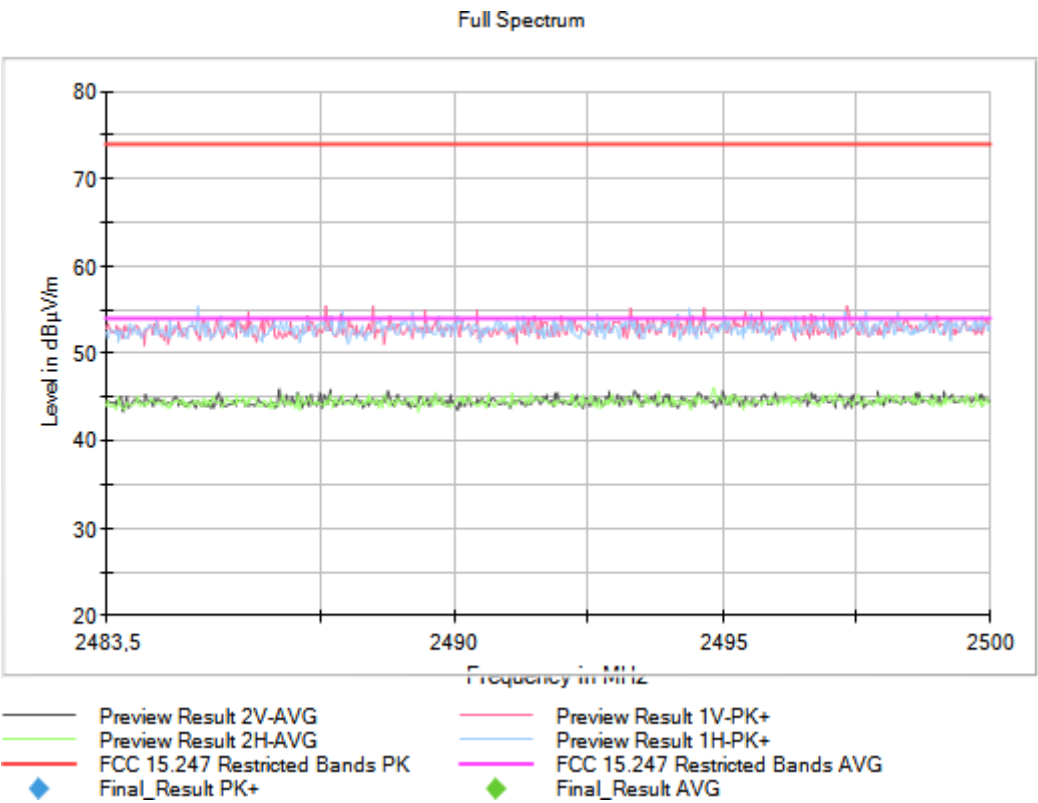


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

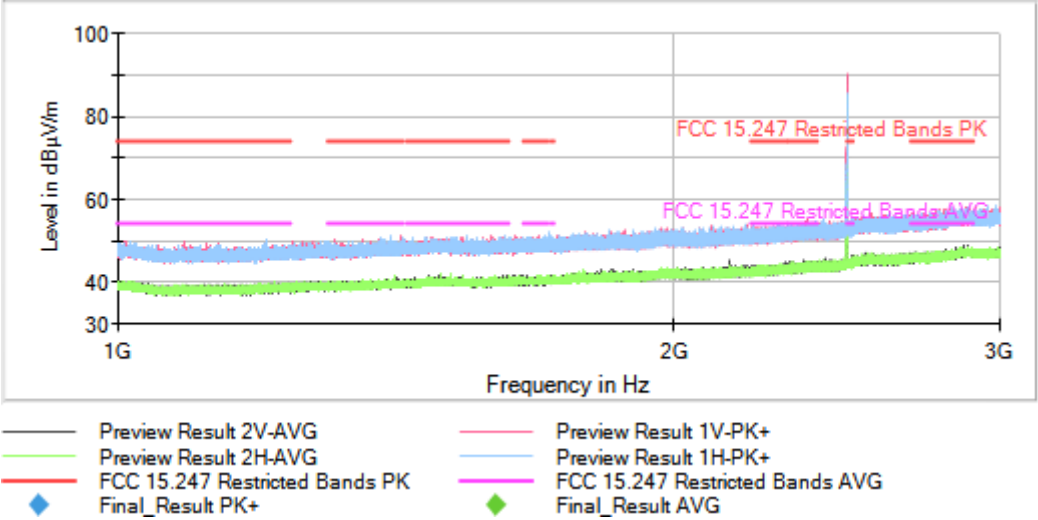

Full Spectrum

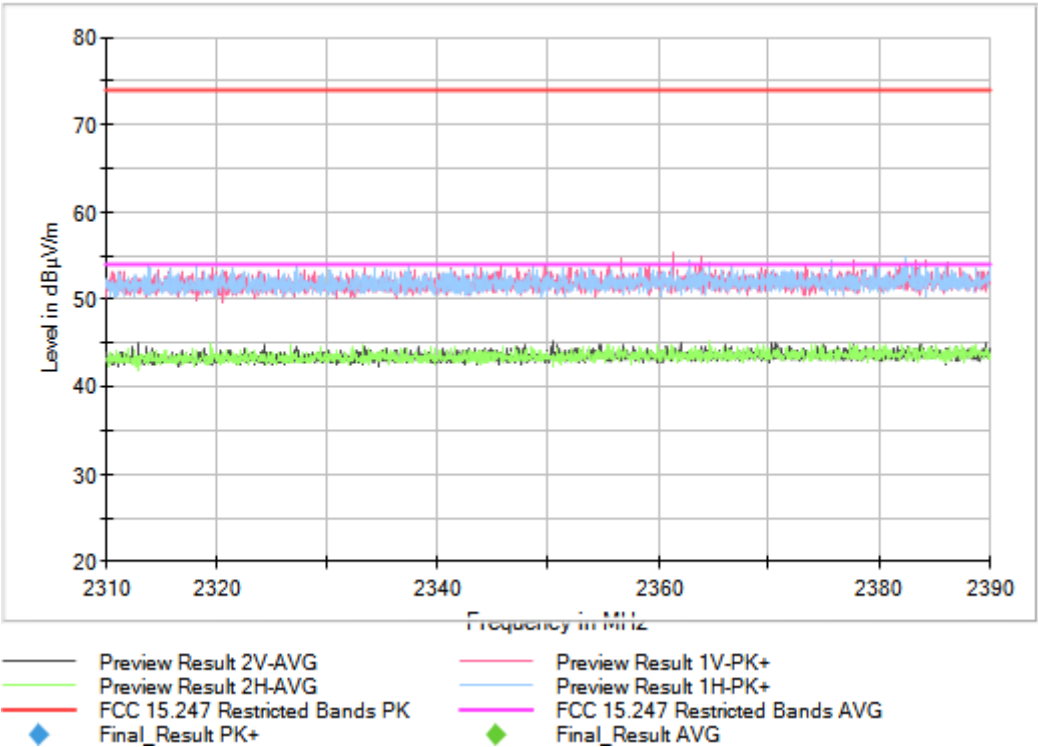

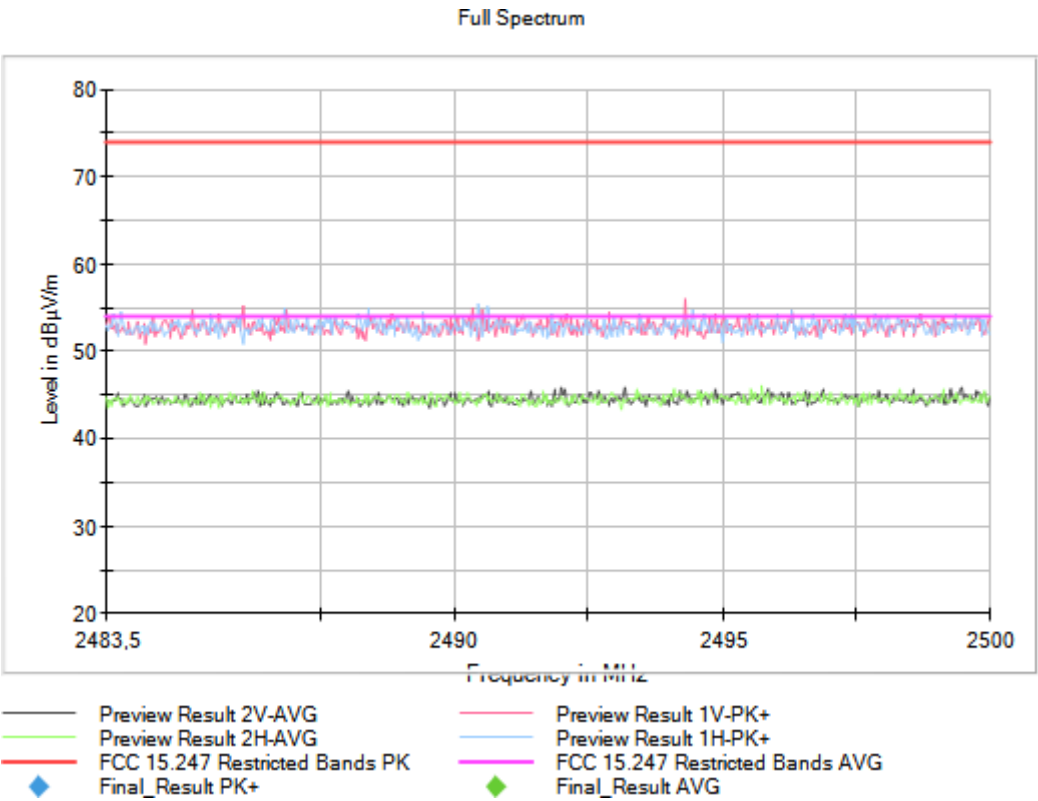


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

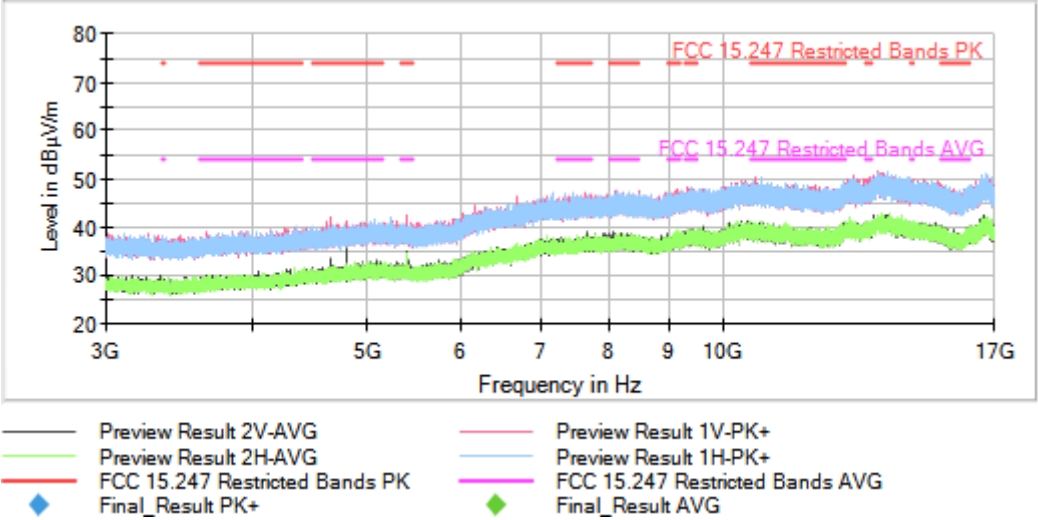


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [3, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

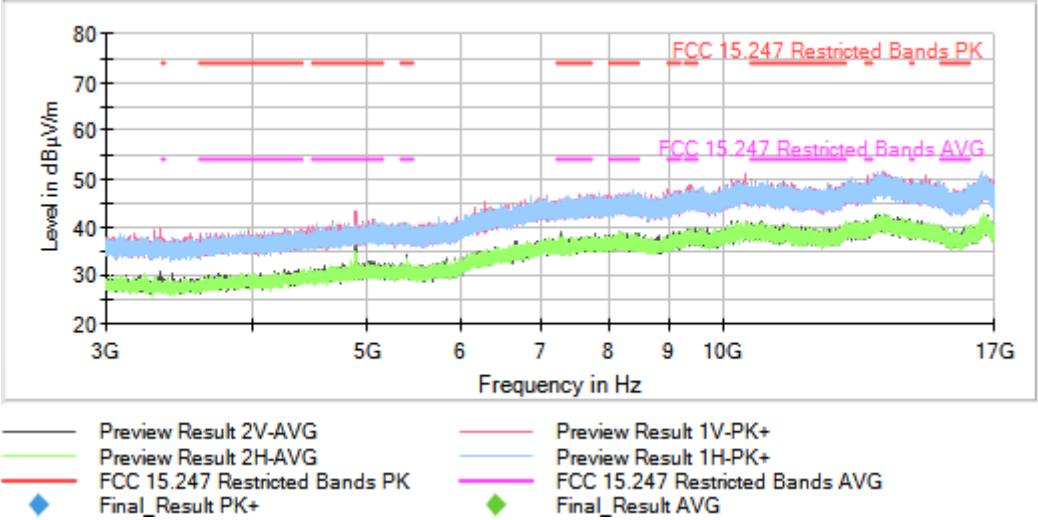


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [3, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

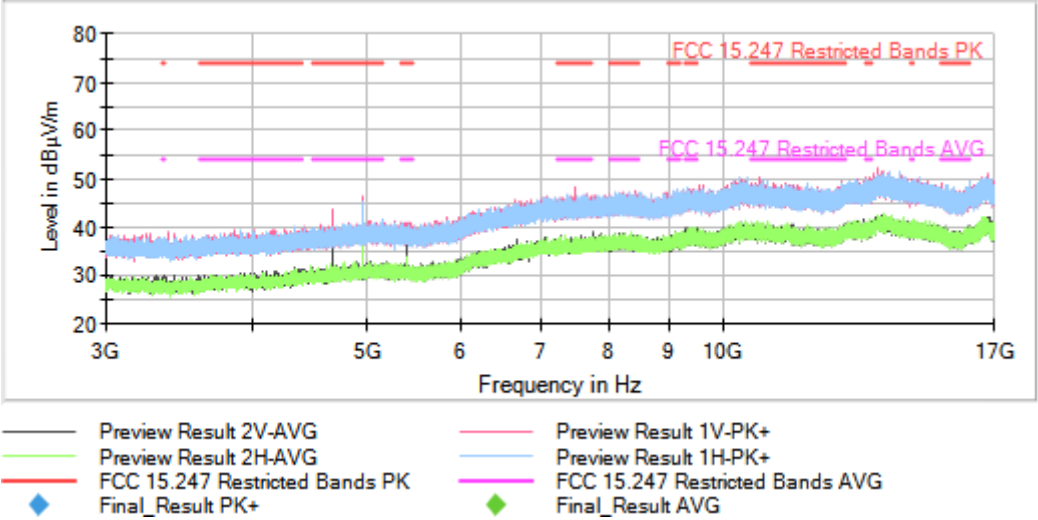


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [17, 26] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK 1-DH5) Frequency MHz = This plot is valid for all channel
MIMO Mode = SISO Active Port = 1

Images:

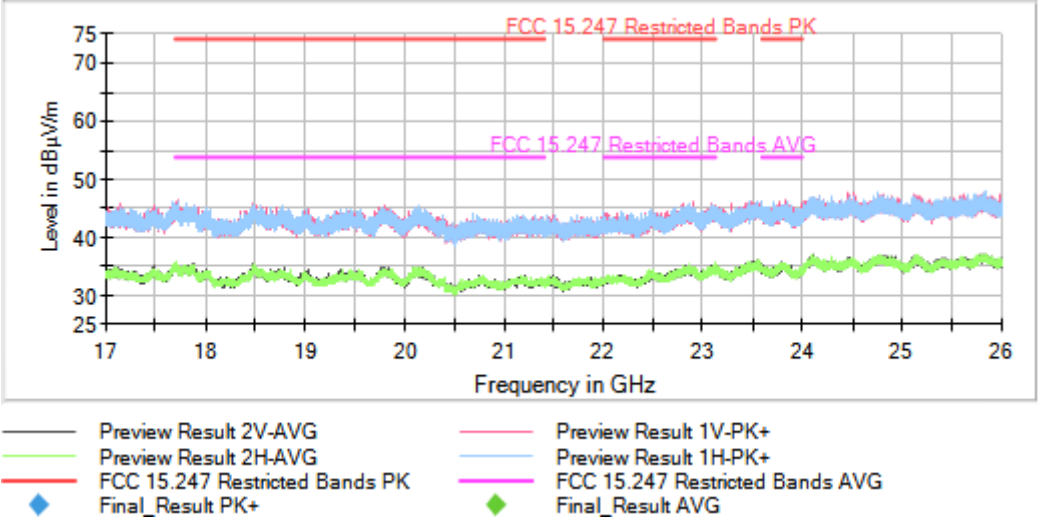

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSV 40]					
	17 GHz - 26 GHz	300 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Freq Rng (GHz)	Equipment	Freq (MHz)	Port	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector	
[0.03, 1]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	30.546	28.90	V	PK	
				30.546	23.94	V	QP	
				46.217	25.55	V	PK	
				46.217	16.26	V	QP	
				464.408	25.61	V	PK	
				464.408	19.40	V	QP	
				869.293	32.51	V	PK	
				869.293	27.49	V	QP	
		2441.00000		32.061	27.94	V	PK	
				32.061	23.03	V	QP	
				45.823	18.97	V	PK	
				45.823	13.40	V	QP	
				51.401	18.55	V	PK	
				51.401	13.15	V	QP	
				869.232	33.55	V	PK	
				869.232	28.28	V	QP	
		2480.00000		32.304	27.80	V	PK	
				32.304	22.76	V	QP	
				49.279	27.58	V	PK	
				49.279	18.14	V	QP	
				813.881	32.02	H	PK	
				813.881	26.26	H	QP	
		[1, 3]		2402.00000	2311.415	55.32	H	PK
		2311.415			43.56	H	AVG	
[3, 17]	2480.00000	10476.280	51.62	H	PK			
		4959.860	43.39	V	PK			

Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2402.00000

MIMO Mode = SISO

Active Port = 1

Images:

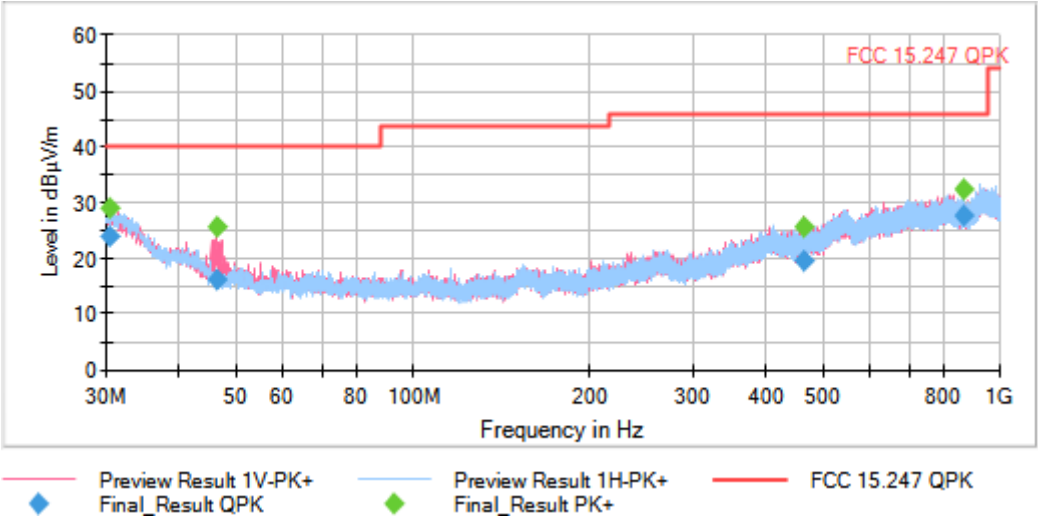

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [0.03, 1]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2441.00000

MIMO Mode = SISO

Active Port = 1

Images:

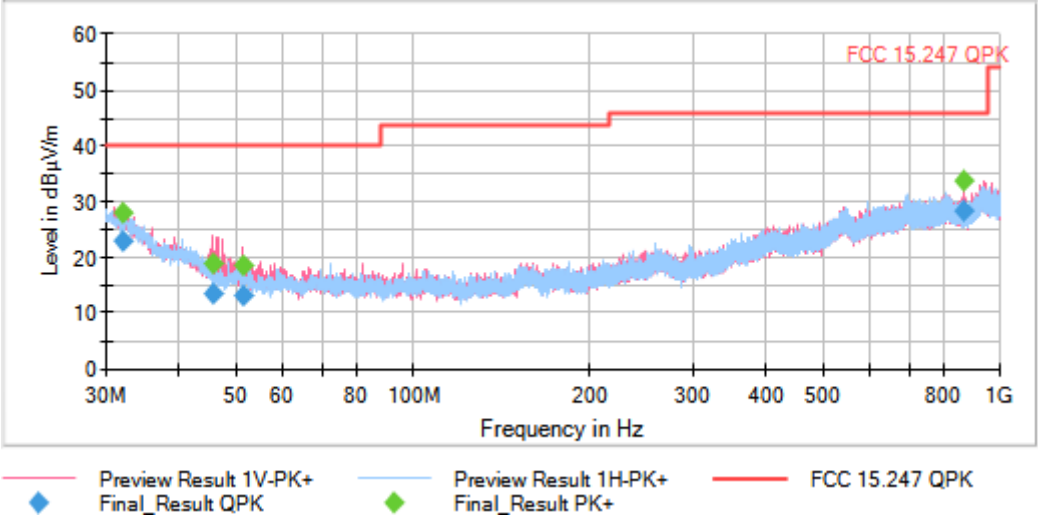

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [0.03, 1]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2480.00000

MIMO Mode = SISO

Active Port = 1

Images:

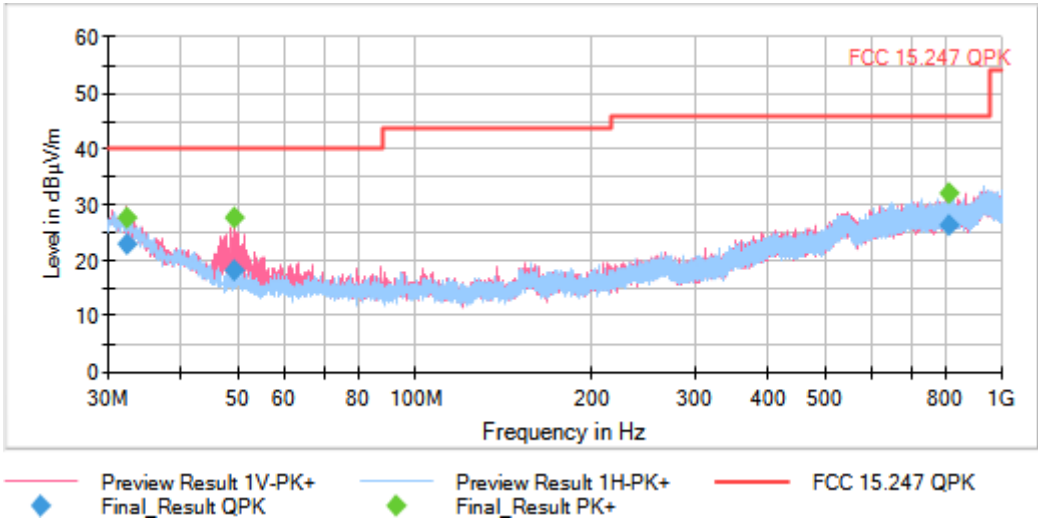

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2402.00000


MIMO Mode = SISO


Active Port = 1

Images:

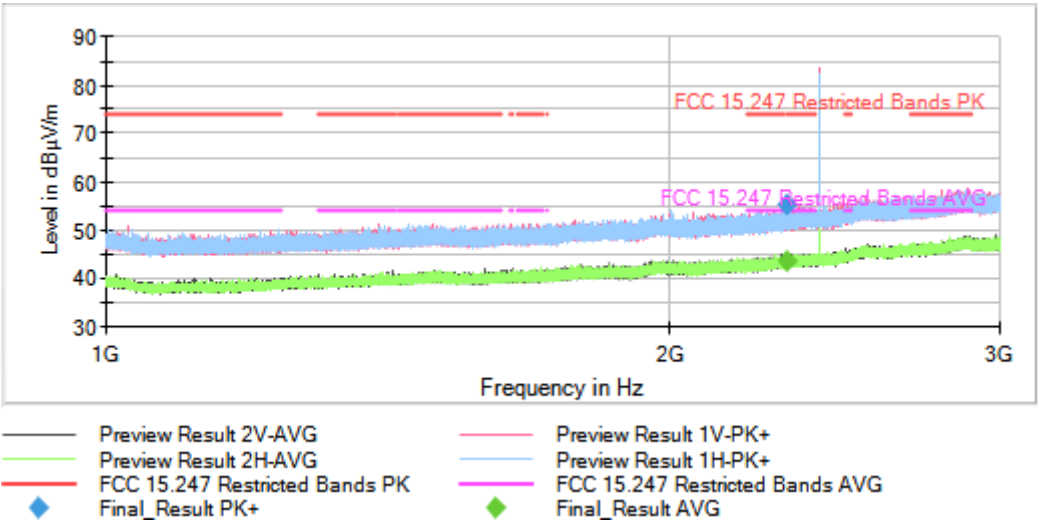

Full Spectrum

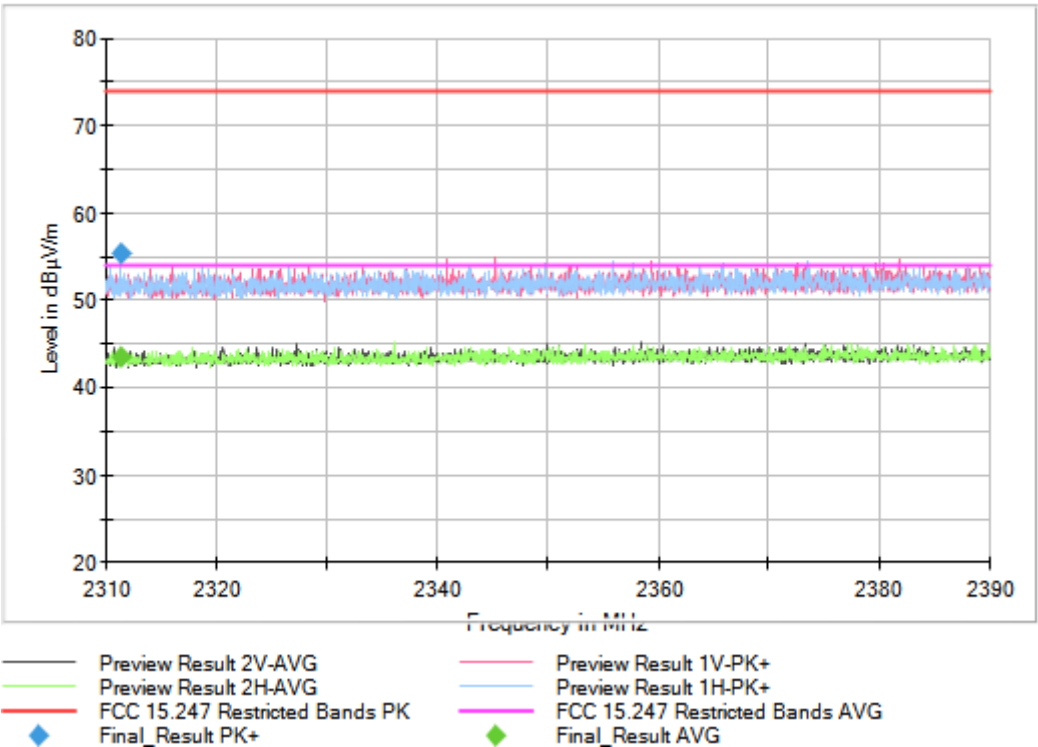

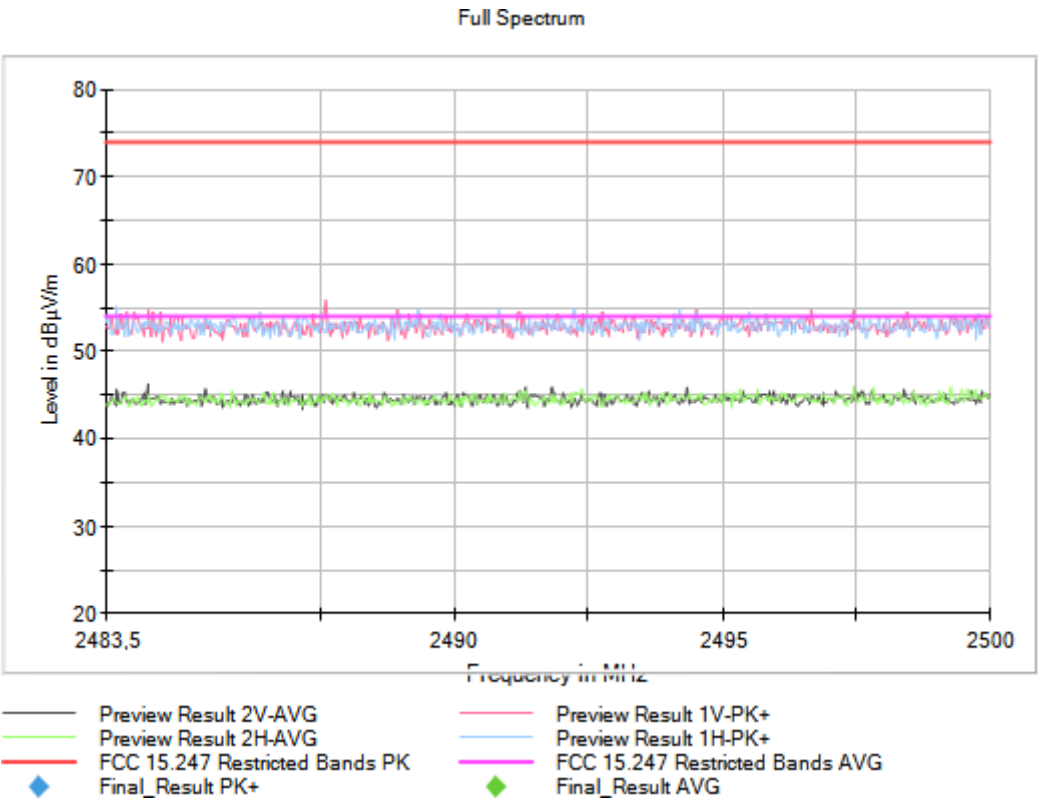

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2441.00000

MIMO Mode = SISO


Active Port = 1

Images:

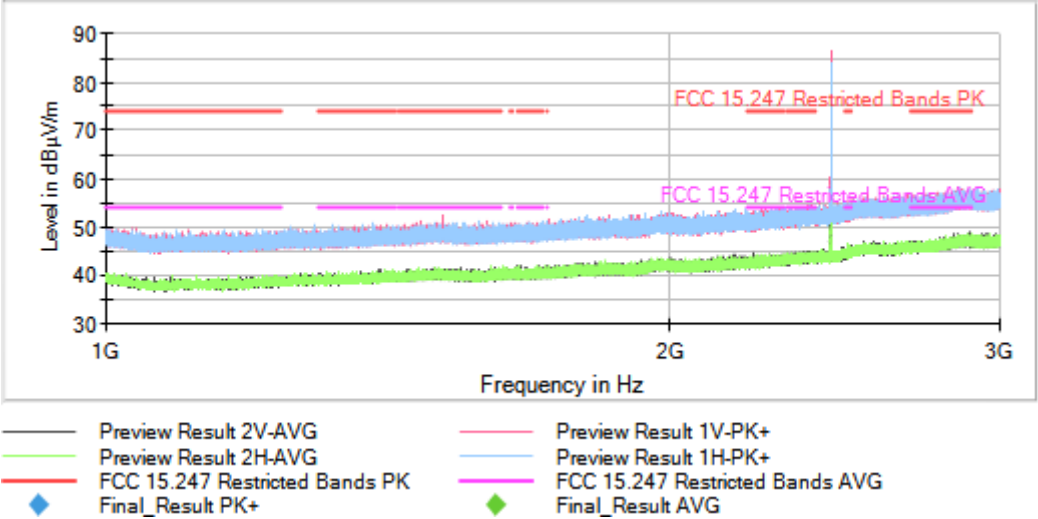

Full Spectrum



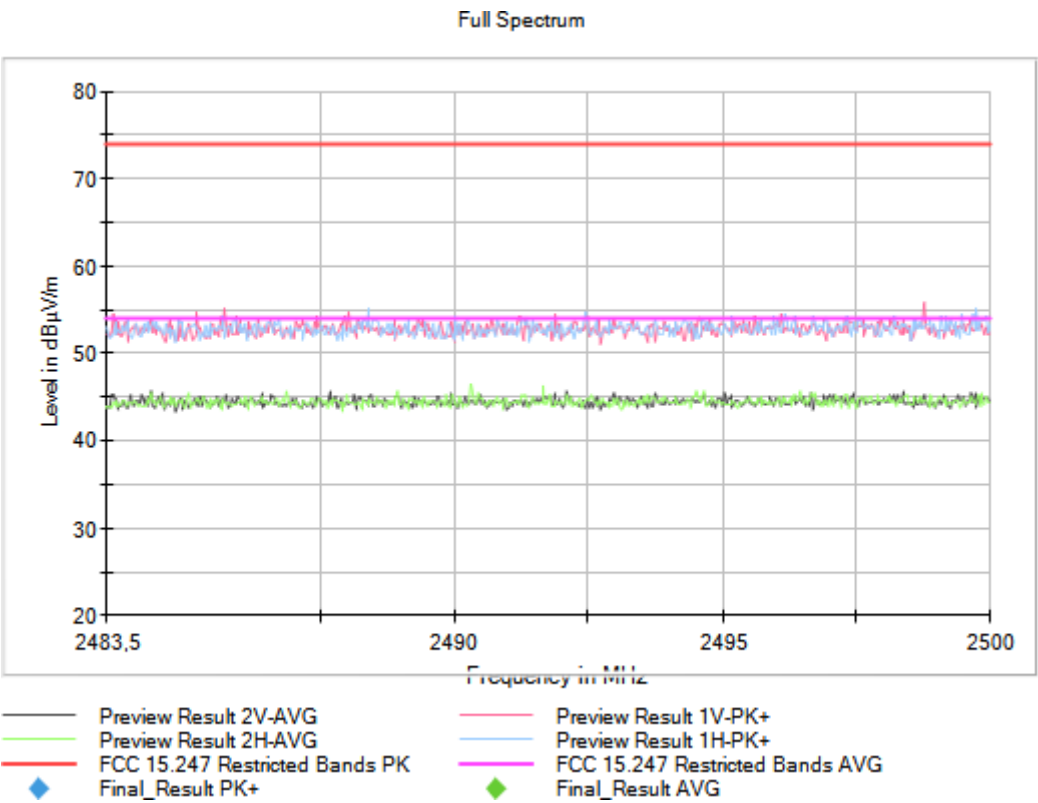

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2402.00000

MIMO Mode = SISO

Active Port = 1

Images:

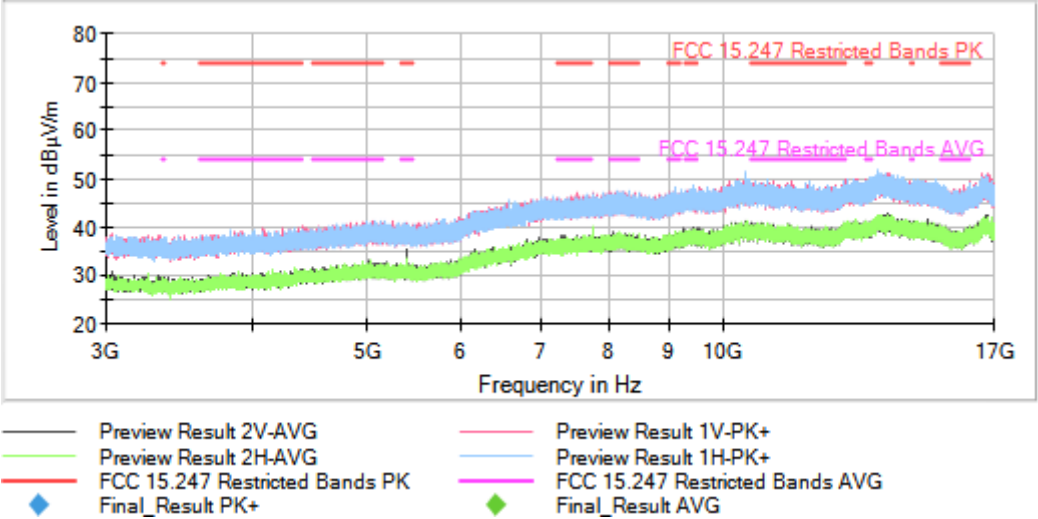

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [3, 17]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2441.00000

MIMO Mode = SISO

Active Port = 1

Images:

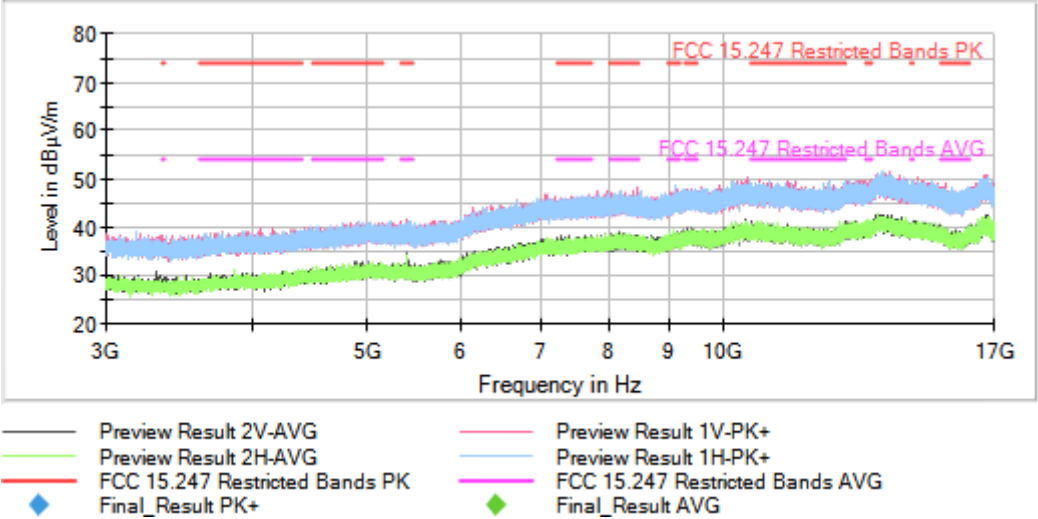

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [3, 17]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = 2480.00000

MIMO Mode = SISO

Active Port = 1

Images:

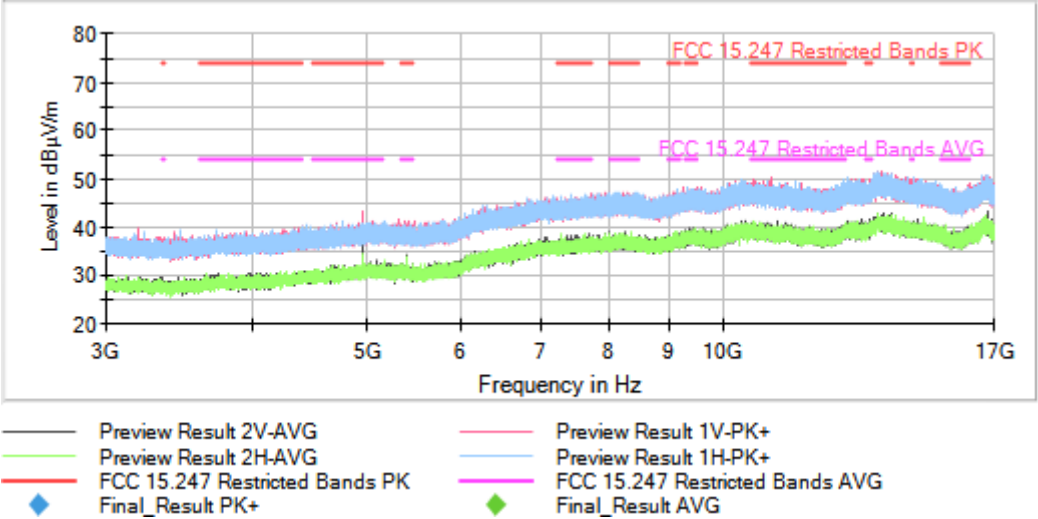

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [17, 26]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Modulation = BT (Pi/4 DQPSK 2-DH5)

Frequency MHz = This plot is valid for all channel

MIMO Mode = SISO

Active Port = 1

Images:

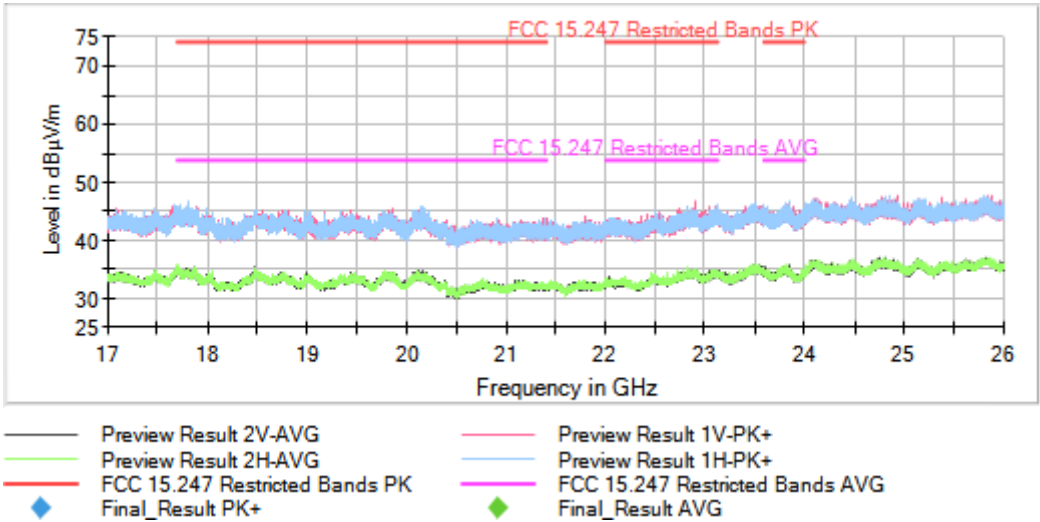

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSV 40]					
	17 GHz - 26 GHz	300 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Freq Rng (GHz)	Equipment	Freq (MHz)	Port	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector
[0.03, 1]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	48.127	29.80	V	PK
				48.127	19.64	V	QP
				51.552	22.21	V	PK
				51.552	14.38	V	QP
				53.553	21.44	V	PK
				53.553	12.62	V	QP
				651.982	32.17	H	PK
				651.982	24.88	H	QP
				830.674	33.20	H	PK
				830.674	27.49	H	QP
		2441.00000		112.632	15.80	V	PK
				112.632	10.89	V	QP
				302.964	22.54	V	PK
				302.964	15.01	V	QP
				49.036	21.65	V	PK
				49.036	14.58	V	QP
		2480.00000		47.581	27.30	V	PK
				47.581	18.20	V	QP
				48.763	29.39	V	PK
				48.763	20.74	V	QP
				53.007	17.93	V	PK
				53.007	12.30	V	QP
				54.402	26.97	V	PK
				54.402	18.61	V	QP
				56.251	25.41	V	PK
				56.251	16.77	V	QP
[1, 3]		2441.00000		2698.923	58.45	H	PK
		2480.00000		2698.923	46.85	H	AVG
				2106.462	54.34	V	PK
				2696.154	58.51	V	PK
				2696.154	46.88	V	AVG
[3, 17]		2441.00000		5400.300	42.41	V	PK
		2480.00000		4959.860	43.87	V	PK


Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

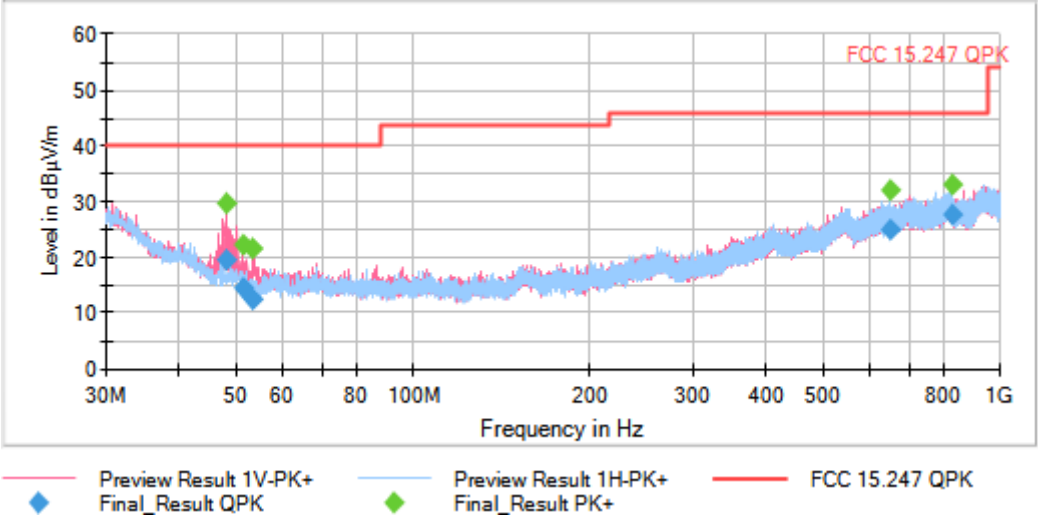


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [0.03, 1] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

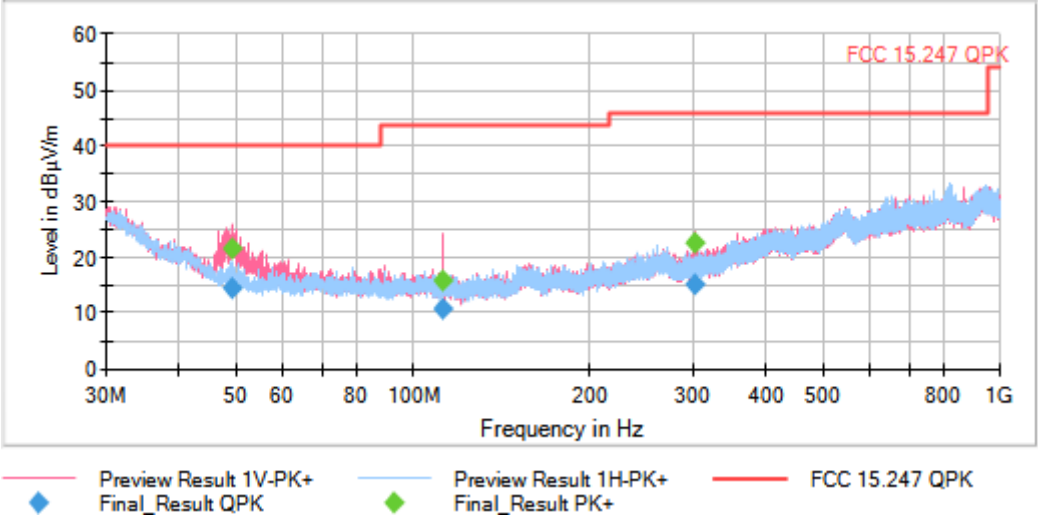


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB

Frequency Range GHz = [0.03, 1] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

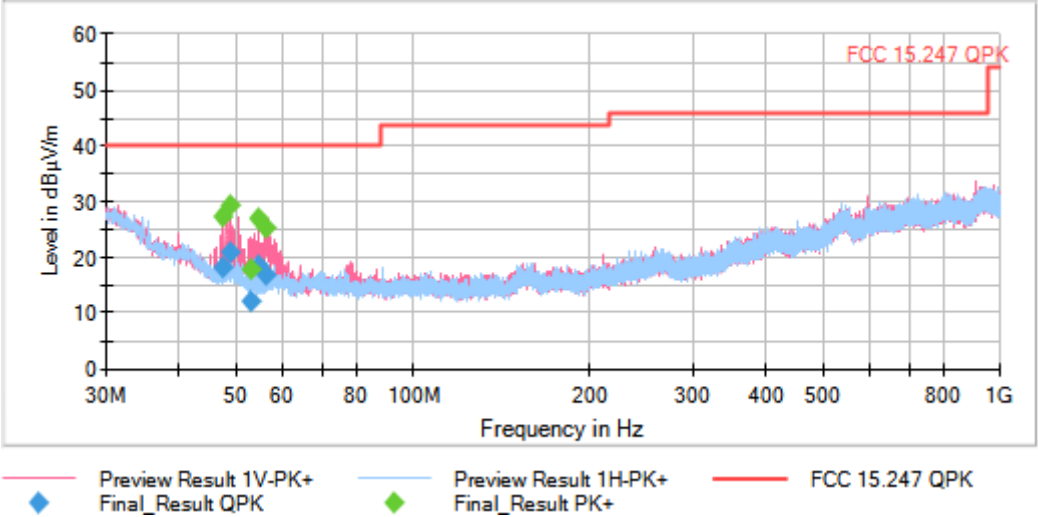


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

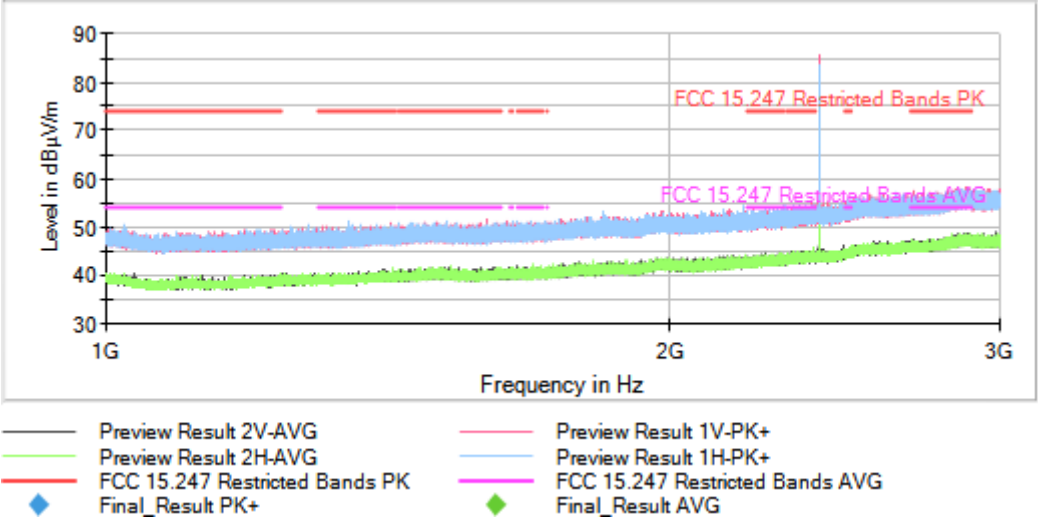

Full Spectrum

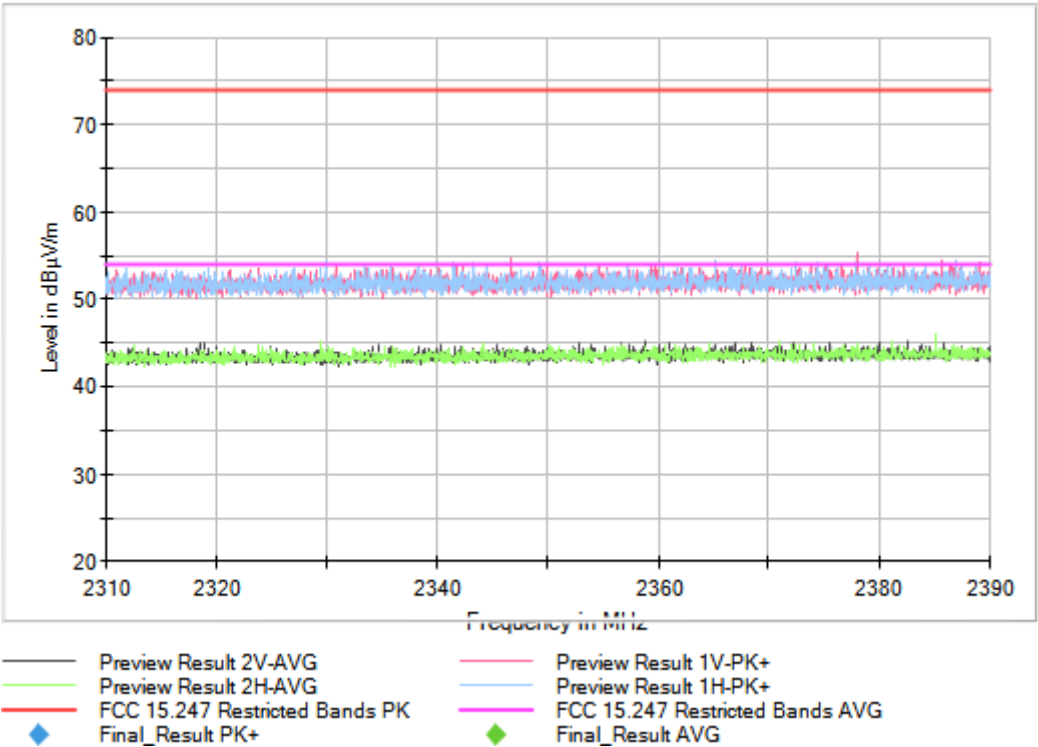

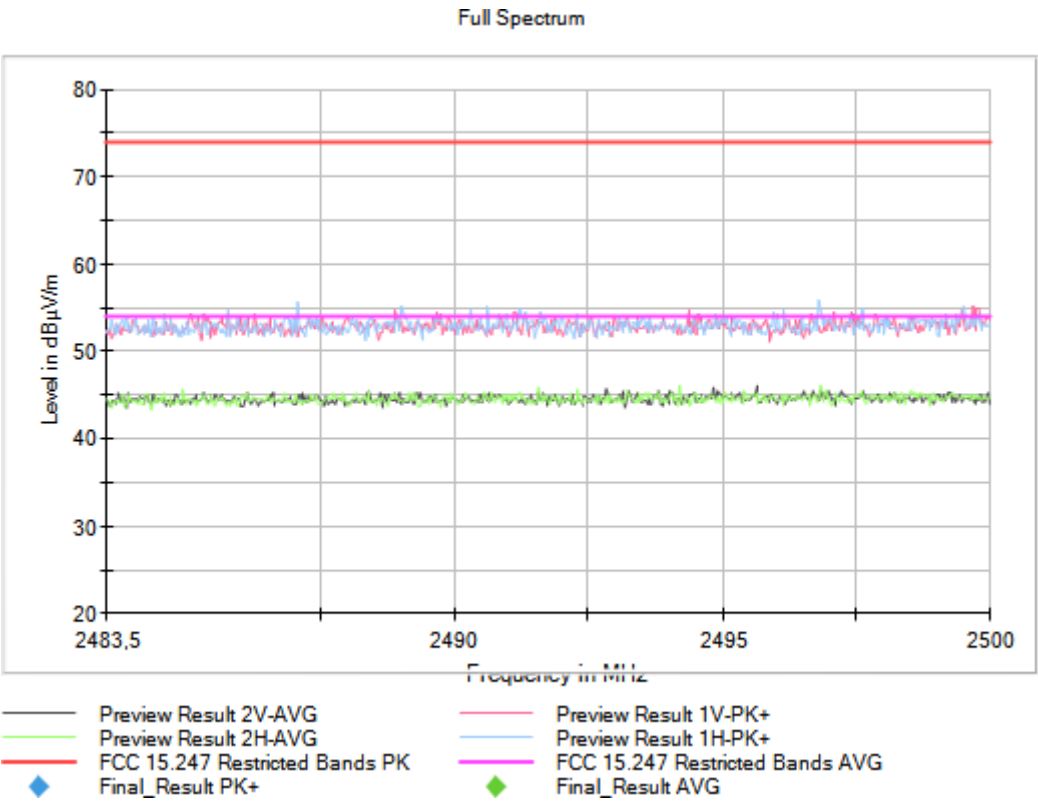


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

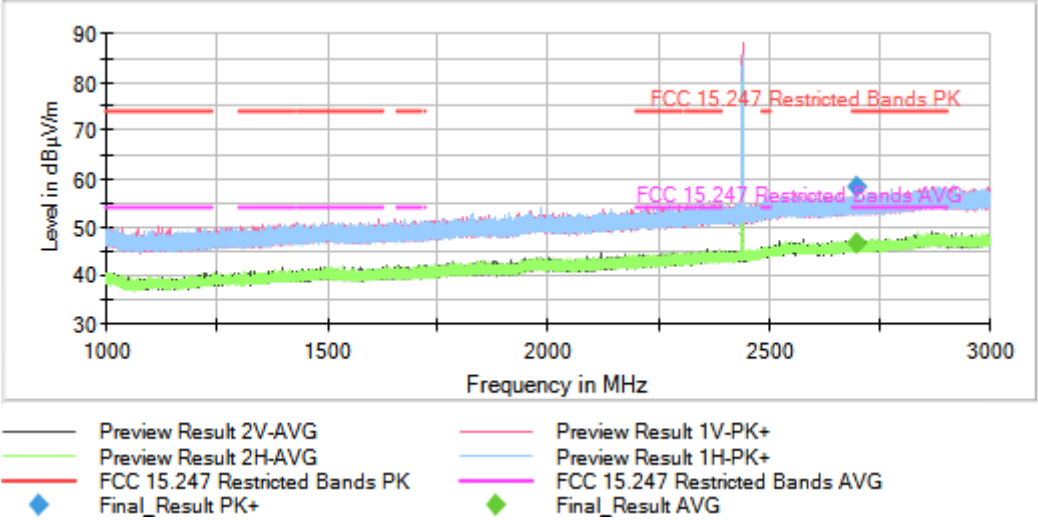

Full Spectrum

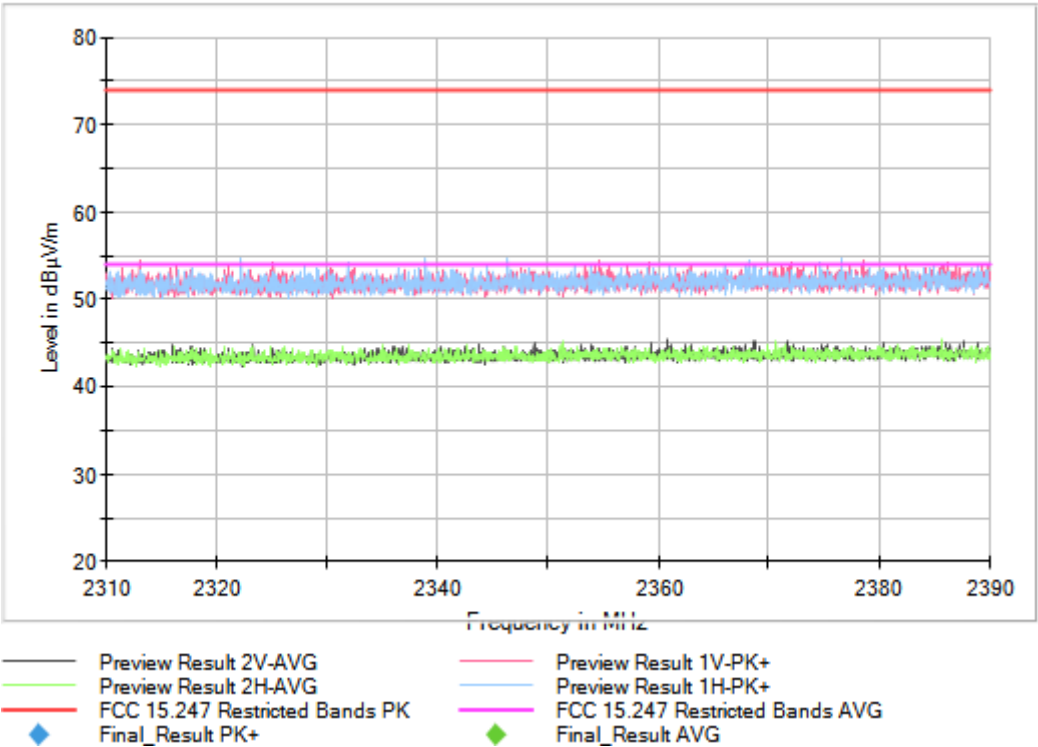

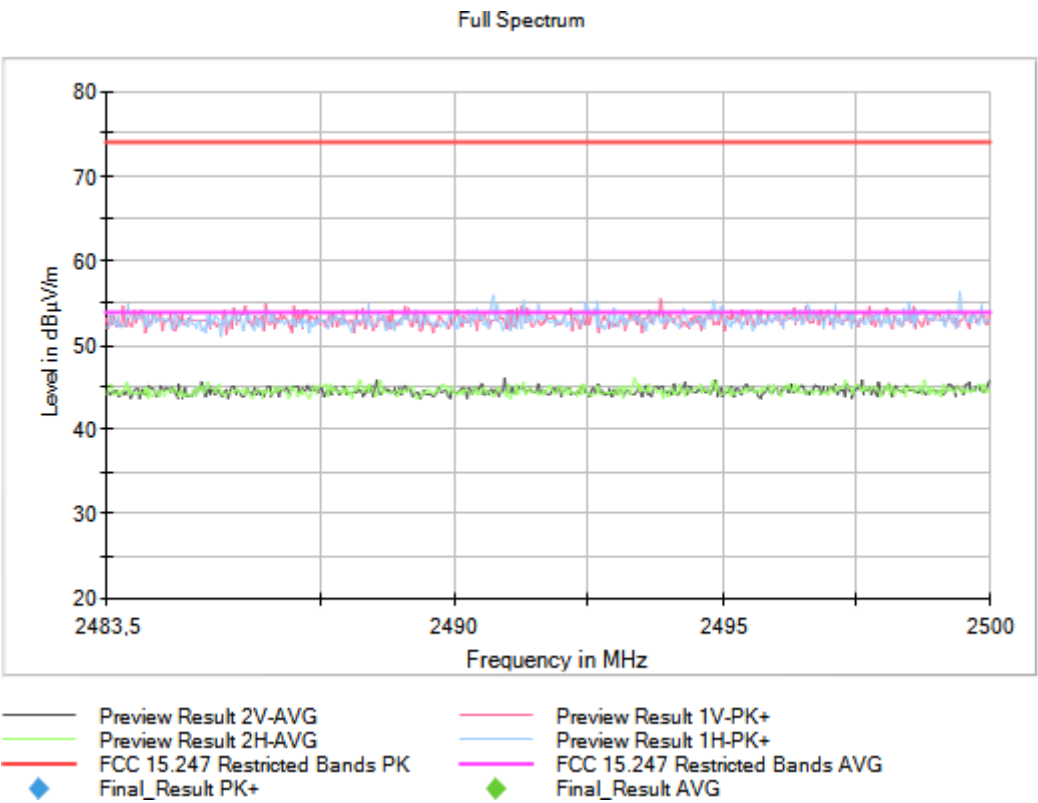


Tables:
Spectrum Analyzer Parameters


	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

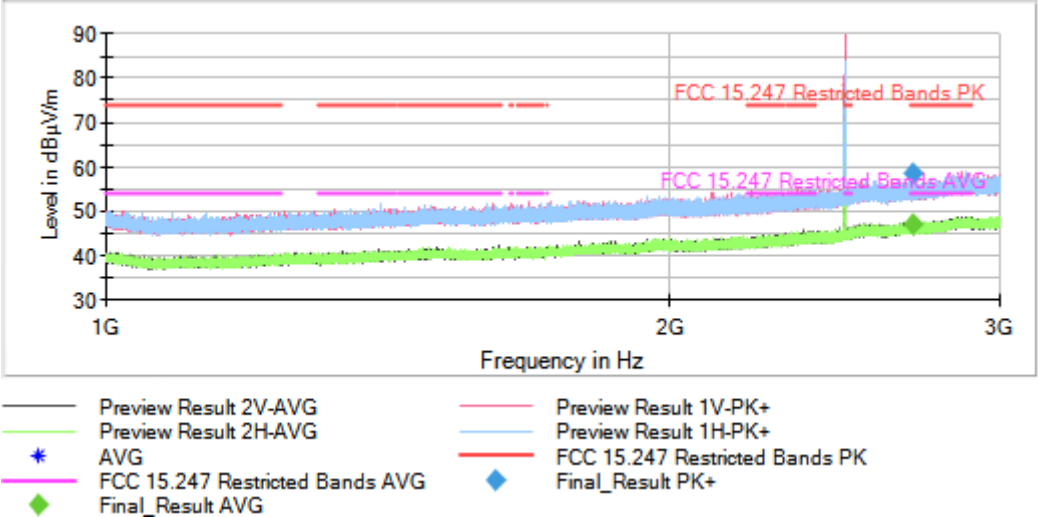

Full Spectrum

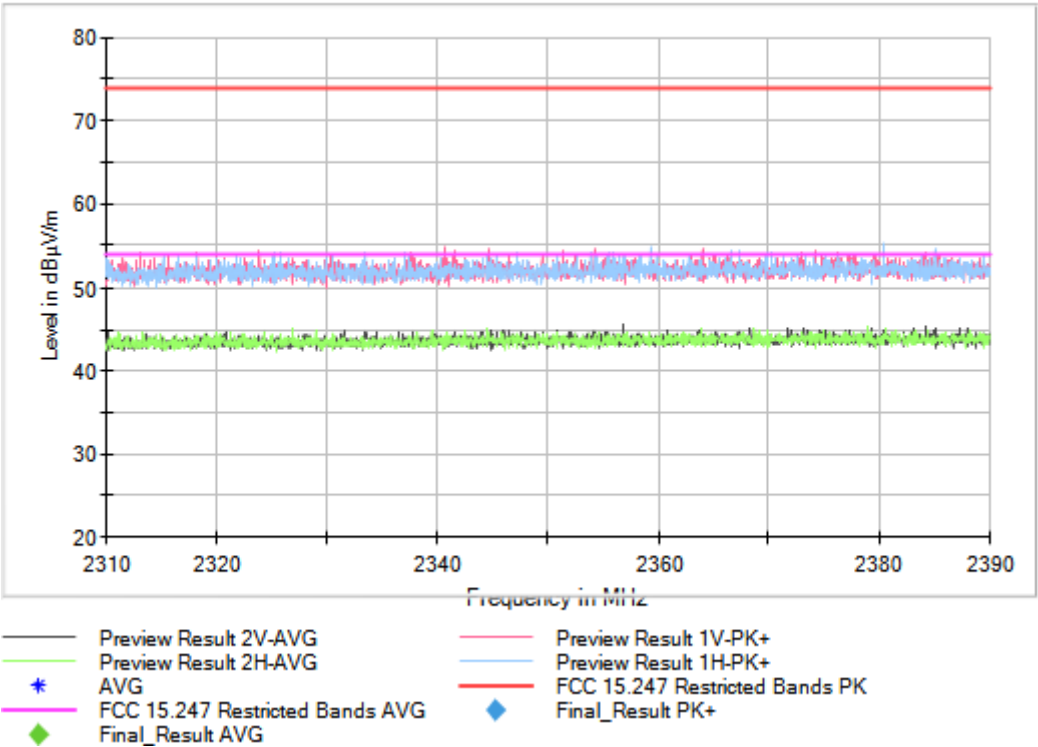

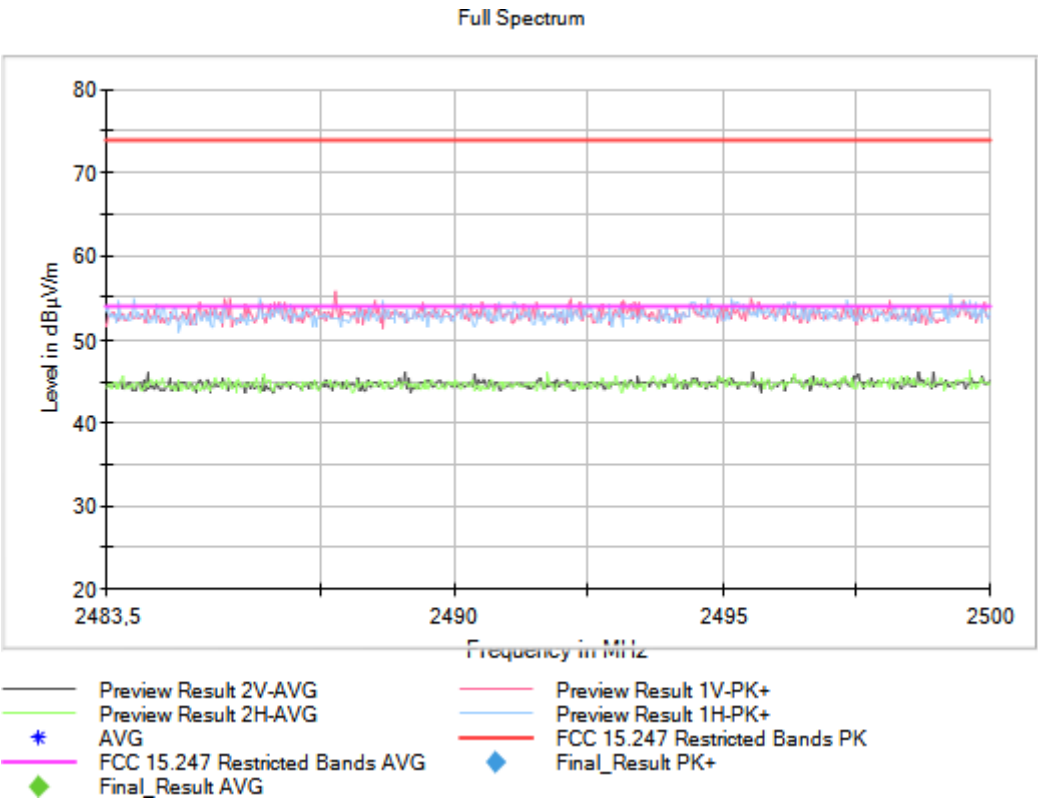


Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

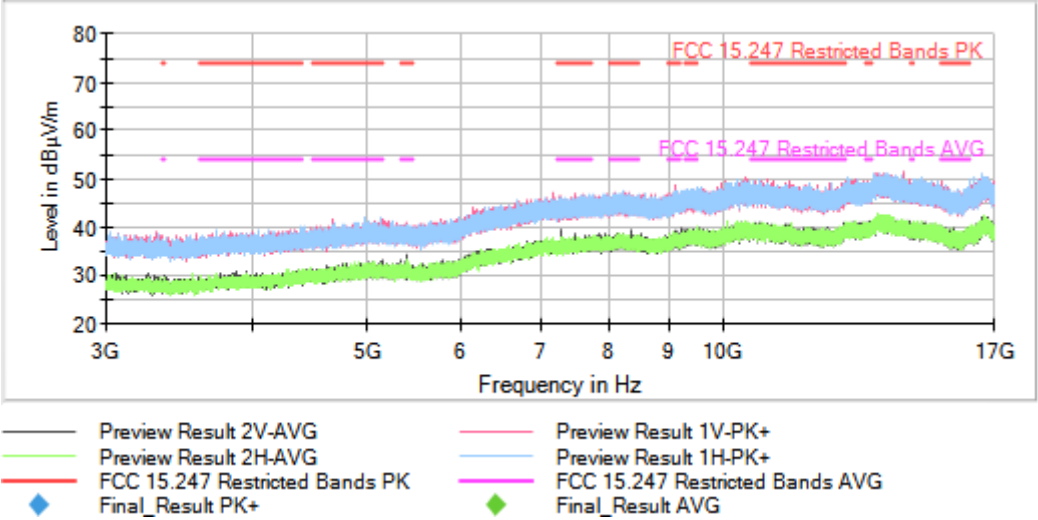


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [3, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
MIMO Mode = SISO Active Port = 1

Images:

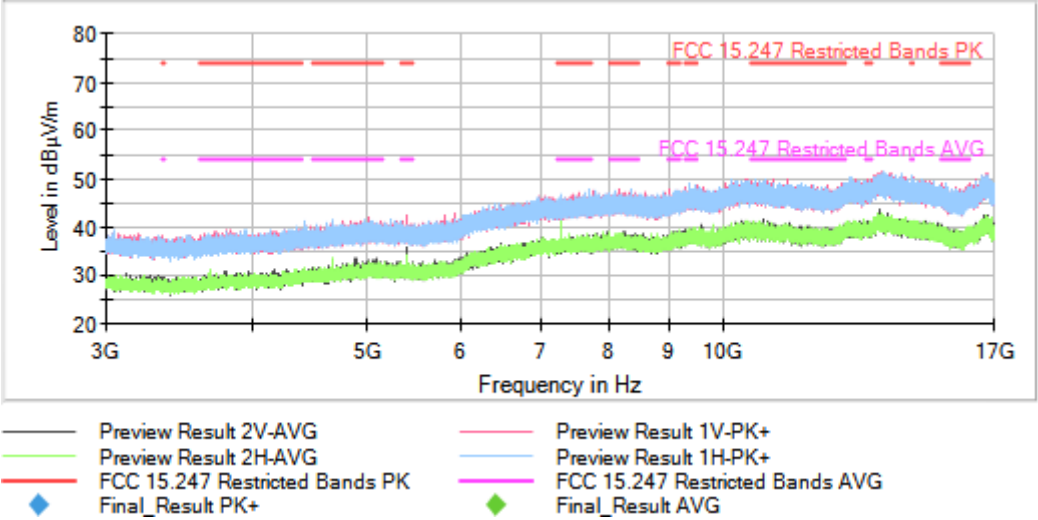


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [3, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

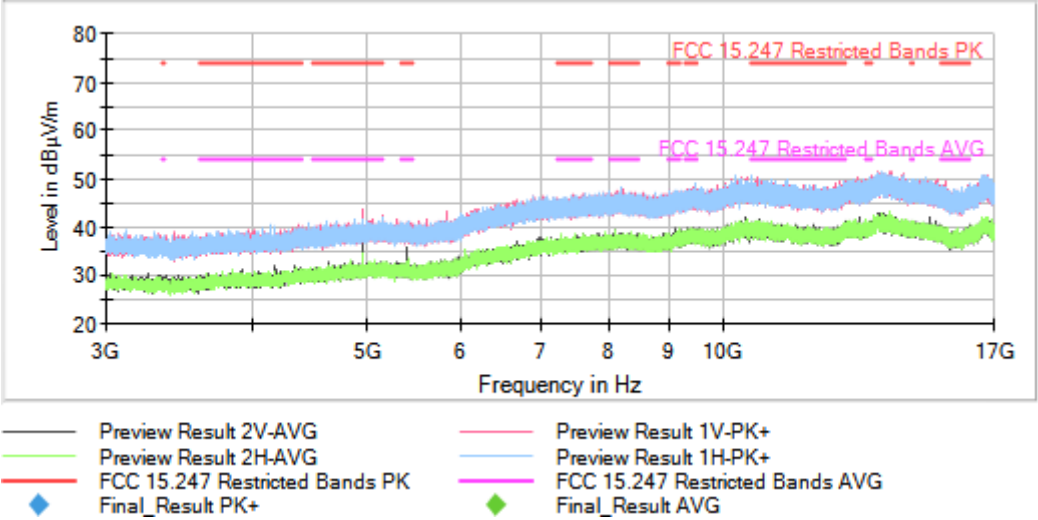


Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB

Frequency Range GHz = [17, 26] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK 3-DH5) Frequency MHz = This plot is valid for all channel
MIMO Mode = SISO Active Port = 1

Images:

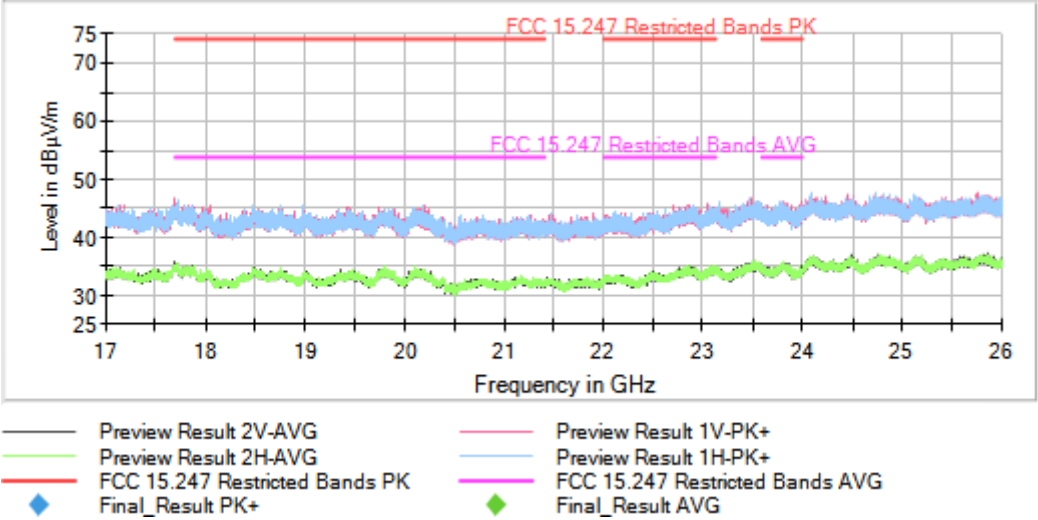

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [FSV 40]					
	17 GHz - 26 GHz	300 kHz	PK+ ; AVG	1 MHz	1 s	0 dB