

FCC Test Report

Client Name : Shenzhen Aiqingsong Technology Co.,Ltd.

Client Address : 4008B, SEG Plaza, 1002 Huaqiang North
Road,Fuqiang Community, Huaqiang North
Street, Futian District, Shenzhen, 518000,
China

Product Name : wireless charger

Report Date : Aug. 04, 2022

Shenzhen Anbotech Compliance Laboratory Limited



Shenzhen Anbotech Compliance Laboratory Limited

Address:1/F.,Building D,Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86) 0755-26066440 Fax:(86) 0755-26014772 Email:service@anbotech.com

Code:AB-RF-05-b



Hotline

400-003-0500

www.anbotech.com.cn



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Description of Test Modes	6
1.5. Description Of Test Setup	8
1.6. Test Equipment List	9
1.7. Measurement Uncertainty	10
1.8. Description of Test Facility	10
2. Summary of Test Results	11
3. Conducted Emission Test	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Radiation Spurious Emission	15
4.1. Test Standard and Limit	15
4.2. Test Setup	15
4.3. Test Procedure	16
4.4. Test Data	16
5. Antenna Requirement	21
5.1. Test Standard and Requirement	21
5.2. Antenna Connected Construction	21
APPENDIX I -- TEST SETUP PHOTOGRAPH	22
APPENDIX II -- EXTERNAL PHOTOGRAPH	22
APPENDIX III -- INTERNAL PHOTOGRAPH	22



TEST REPORT

Applicant : Shenzhen AiQingsong Technology Co.,Ltd.
Manufacturer : Shenzhen AiQingsong Technology Co.,Ltd.
Product Name : wireless charger
Model No. : FD-308, FD-304, FD-305, FD-306, FD-307, FD-309, FD-310, FD-311, FD-312, FD-313, FD-313, FD-314, FD-315, FD-316, FD-317, FD-318, FD-320, FD-322, FD-324, FD-326, FD-328, FD-330, FD-332, FD-336, FD-338, K1, K8, K18, GY-68, N708, N709, N700, N740
Trade Mark : N.A.
Input: 9V $\equiv$ 2A
Output for mobile phone: 5W/7.5W/10W/15W
Rating(s) : Output for headphone: 3W
Output for watch: 2W
Total power: 15W
Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.209
Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jul. 21, 2022

Date of Test

Jul. 21~ Aug. 02, 2022

Prepared By

Nian Xiu Chen

(Nianxiu Chen)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Aug. 04, 2022



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Aiqingsong Technology Co.,Ltd.
Address	:	4008B, SEG Plaza, 1002 Huaqiang North Road,Fuqiang Community, Huaqiang North Street, Futian District, Shenzhen, 518000, China
Manufacturer	:	Shenzhen Aiqingsong Technology Co.,Ltd.
Address	:	4008B, SEG Plaza, 1002 Huaqiang North Road,Fuqiang Community, Huaqiang North Street, Futian District, Shenzhen, 518000, China
Factory	:	Shenzhen Aiqingsong Technology Co.,Ltd.
Address	:	4008B, SEG Plaza, 1002 Huaqiang North Road,Fuqiang Community, Huaqiang North Street, Futian District, Shenzhen, 518000, China

1.2. Description of Device (EUT)

Product Name	:	wireless charger
Model No.	:	FD-308, FD-304, FD-305, FD-306, FD-307, FD-309, FD-310, FD-311, FD-312, FD-313, FD-313, FD-314, FD-315, FD-316, FD-317, FD-318, FD-320, FD-322, FD-324, FD-326, FD-328, FD-330, FD-332, FD-336, FD-338, K1, K8, K18, GY-68, N708, N709, N700, N740 (Note: All samples are the same except the model number and appearance color, so we prepare "FD-308" for test only.)
Trade Mark	:	N.A.
Test Power Supply	:	AC 120V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	110.1~205KHz
Modulation Type	:	FSK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi (Provided by customer)
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Adapter	Model: MDY-11-EX Input: 100-240V~50/60Hz, 0.7A Output: 5V=3A/ 9V=3A/ 12V=2.25A/ 20V=1.35A/ 11V=3A Max
Mobile Phone	iPhone 12
Apple AirPods	M/N: AirPods Pro
Apple Watch	M/N: WR-50M

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	WPT Mode(Phone + AirPods + Watch)
Mode 2	WPT Mode(Phone + AirPods)
Mode 3	WPT Mode(Phone + Watch)
Mode 4	WPT Mode(AirPods + Watch)
Mode 5	WPT Mode(Phone)
Mode 6	WPT Mode(AirPods)
Mode 7	WPT Mode(Watch)

For Conducted Emission	
Final Test Mode	Description
Mode 1	WPT Mode(Phone + AirPods + Watch)
Mode 2	WPT Mode(Phone + AirPods)
Mode 3	WPT Mode(Phone + Watch)
Mode 4	WPT Mode(AirPods + Watch)
Mode 5	WPT Mode(Phone)
Mode 6	WPT Mode(AirPods)
Mode 7	WPT Mode(Watch)



For Radiated Emission	
Final Test Mode	Description
Mode 1	WPT Mode(Phone + AirPods + Watch)
Mode 2	WPT Mode(Phone + AirPods)
Mode 3	WPT Mode(Phone + Watch)
Mode 4	WPT Mode(AirPods + Watch)
Mode 5	WPT Mode(Phone)
Mode 6	WPT Mode(AirPods)
Mode 7	WPT Mode(Watch)



Note:

(1) Test channel is 0.1275MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load (Mode 1: 15W)) was recorded in the report.



1.5. Description Of Test Setup

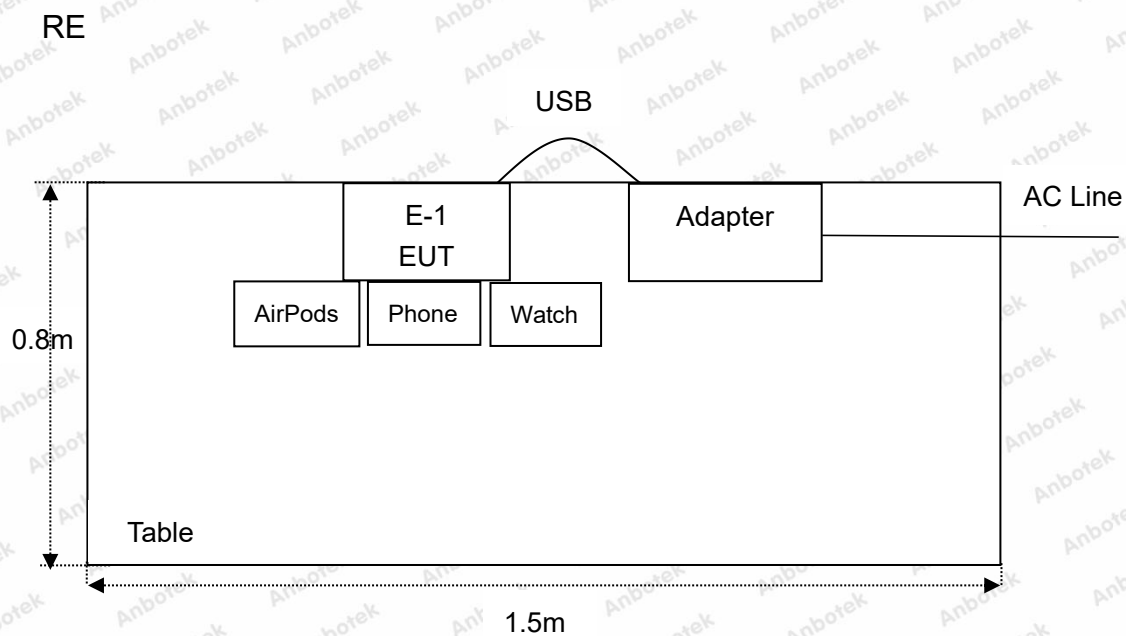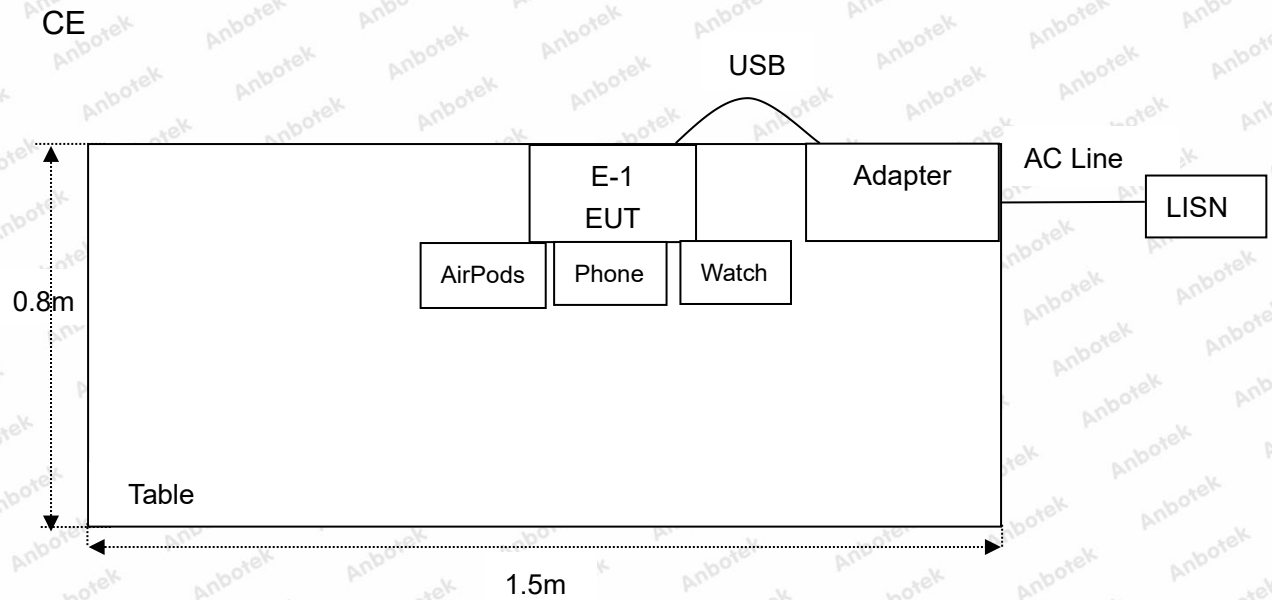

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 22, 2021	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

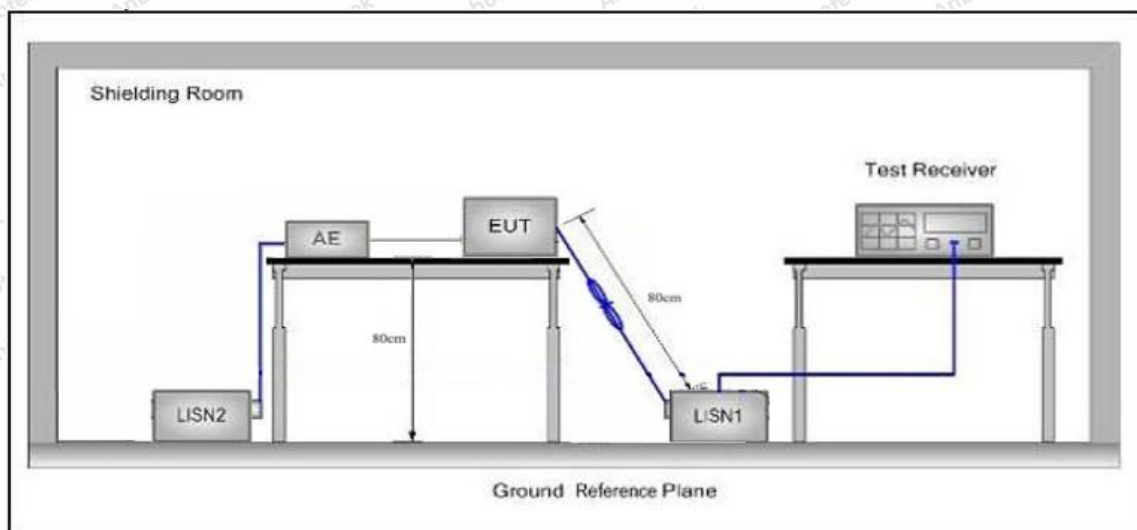

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 22.8°C Hum.: 52%

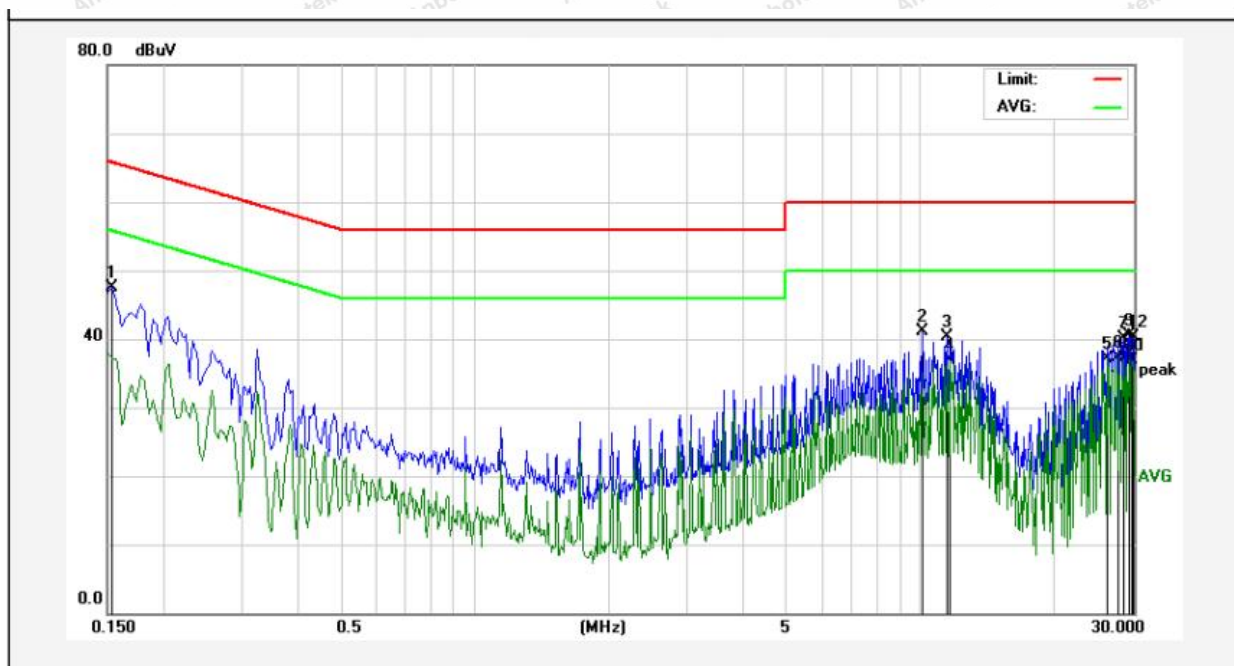


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	37.77	9.70	47.47	65.78	-18.31	QP	
2	10.1220	31.19	9.83	41.02	60.00	-18.98	QP	
3	11.4580	30.50	9.87	40.37	60.00	-19.63	QP	
4	11.6500	27.08	9.89	36.97	50.00	-13.03	AVG	
5	26.1620	27.05	10.15	37.20	50.00	-12.80	AVG	
6	27.6940	27.09	10.22	37.31	50.00	-12.69	AVG	
7	28.4580	29.90	10.25	40.15	60.00	-19.85	QP	
8	28.4580	26.81	10.25	37.06	50.00	-12.94	AVG	
9	29.2220	30.26	10.28	40.54	60.00	-19.46	QP	
10	29.2220	26.57	10.28	36.85	50.00	-13.15	AVG	
11	29.7940	26.57	10.30	36.87	50.00	-13.13	AVG	
12	29.9820	30.02	10.31	40.33	60.00	-19.67	QP	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.8°C Hum.: 52%

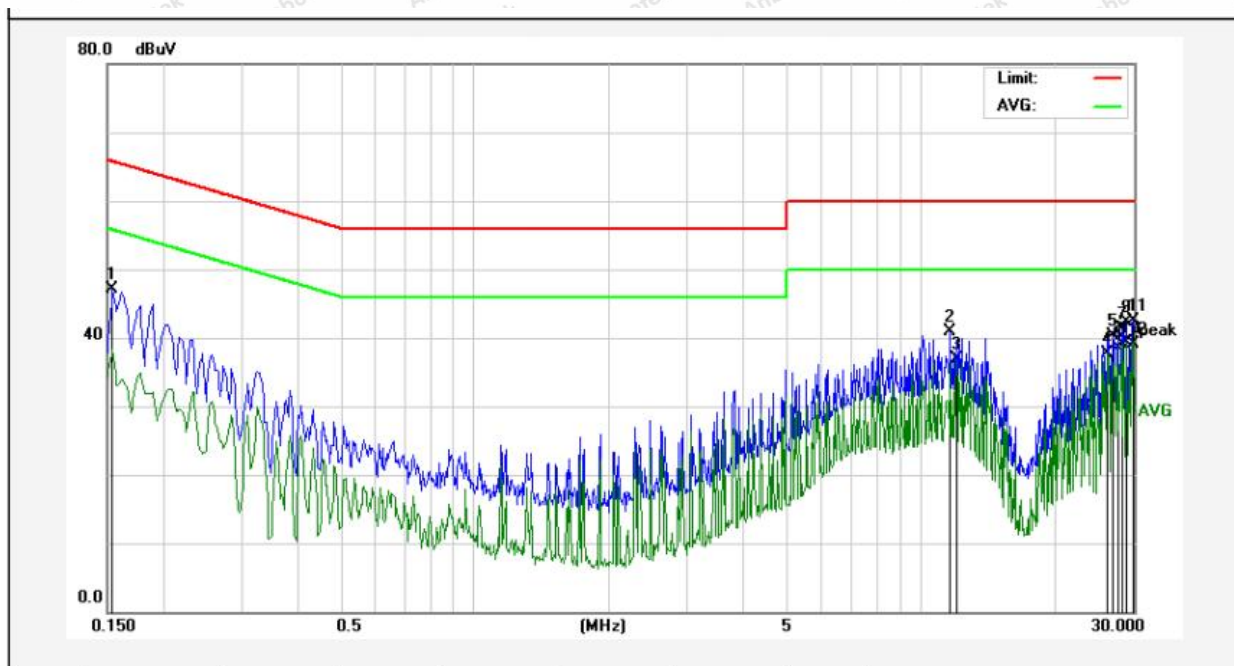

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	37.48	9.70	47.18	65.78	-18.60	QP	
2	11.6540	31.01	9.89	40.90	60.00	-19.10	QP	
3	12.0340	26.94	9.89	36.83	50.00	-13.17	AVG	
4	26.1740	27.63	10.15	37.78	50.00	-12.22	AVG	
5	26.9340	30.03	10.18	40.21	60.00	-19.79	QP	
6	27.6980	28.19	10.22	38.41	50.00	-11.59	AVG	
7	28.2740	31.10	10.24	41.34	60.00	-18.66	QP	
8	28.2740	28.85	10.24	39.09	50.00	-10.91	AVG	
9	29.0340	32.10	10.27	42.37	60.00	-17.63	QP	
10	29.0340	29.10	10.27	39.37	50.00	-10.63	AVG	
11	29.9900	32.29	10.31	42.60	60.00	-17.40	QP	
12	29.9900	28.89	10.31	39.20	50.00	-10.80	AVG	



4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

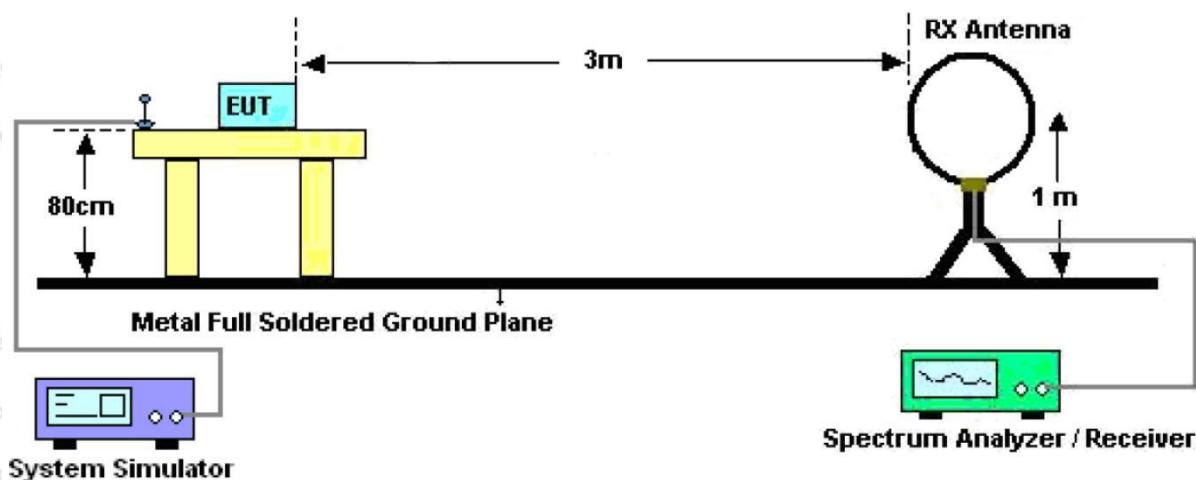


Figure 1. Below 30MHz



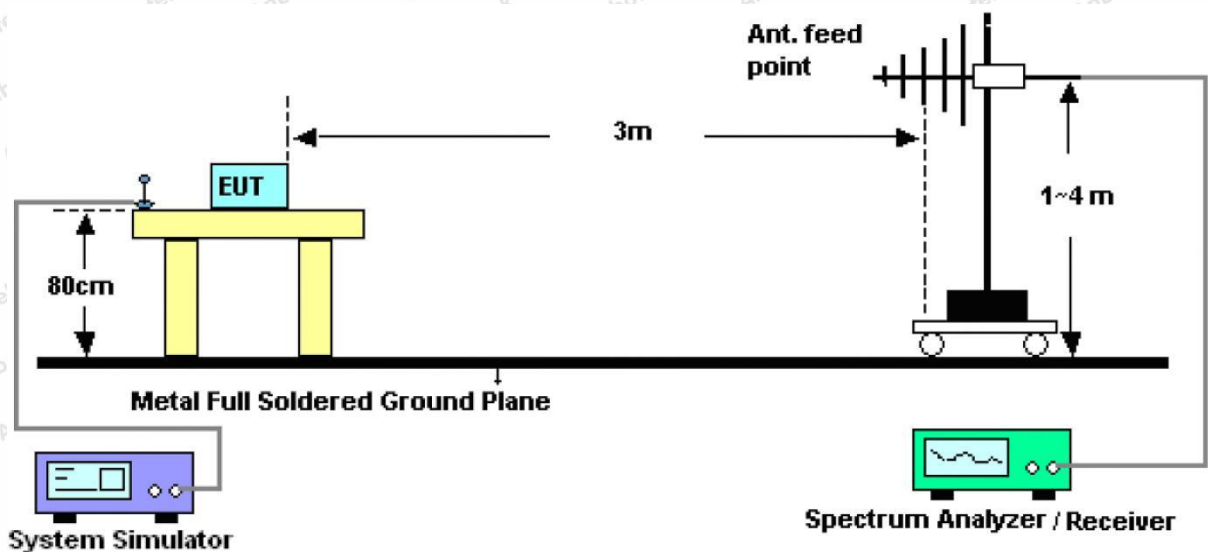


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.



Test Results (Between 9KHz – 150KHz)

Test Mode: Mode 1
Distance: 3m
Power Source: AC 120V, 60Hz for adapter
Temp.(°C)/Hum.(%RH): 23.5°C/51%RH

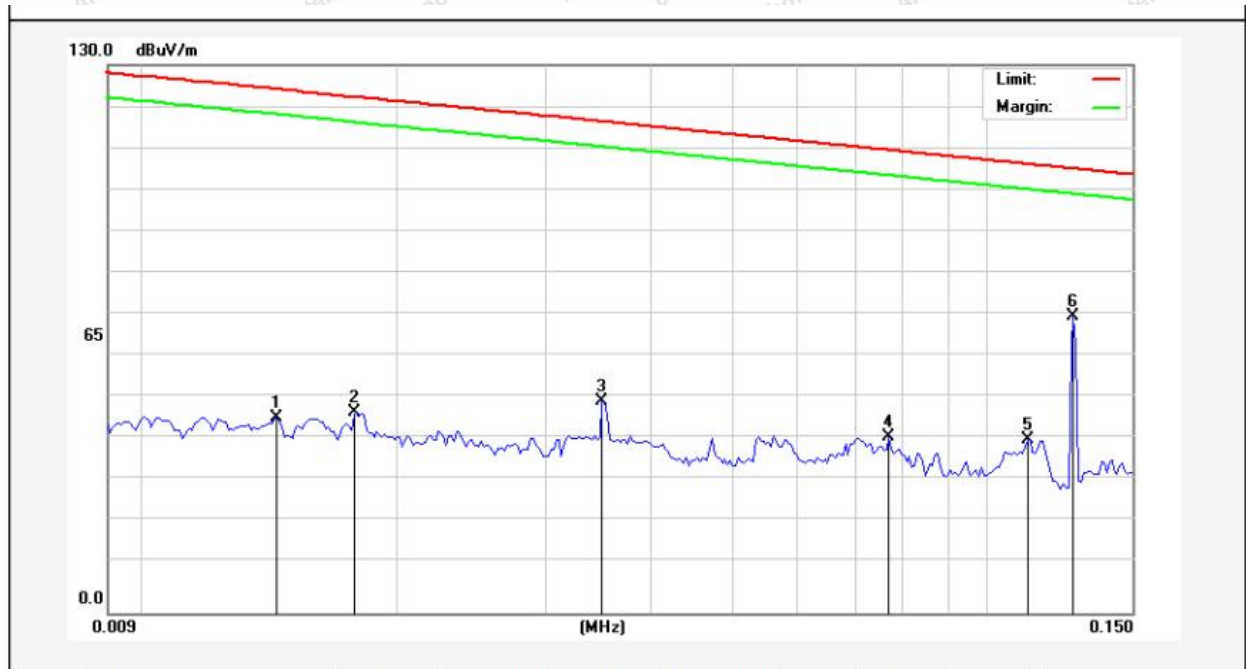


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0143	25.98	20.22	46.20	124.31	-78.11	AV			
2	0.0177	27.34	20.15	47.49	122.47	-74.98	AV			
3	0.0350	29.68	20.49	50.17	116.58	-66.41	AV			
4	0.0767	21.55	20.37	41.92	109.81	-67.89	AV			
5	0.1121	20.94	20.29	41.23	106.53	-65.30	AV			
6	0.1275	50.04	20.34	70.38	105.42	-35.04	AV			



Test Results (Between 0.15MHz – 30MHz)

Test Mode: Mode 1
Distance: 3m
Power Source: AC 120V, 60Hz for adapter
Temp.(°C)/Hum.(%RH): 23.5°C/51%RH

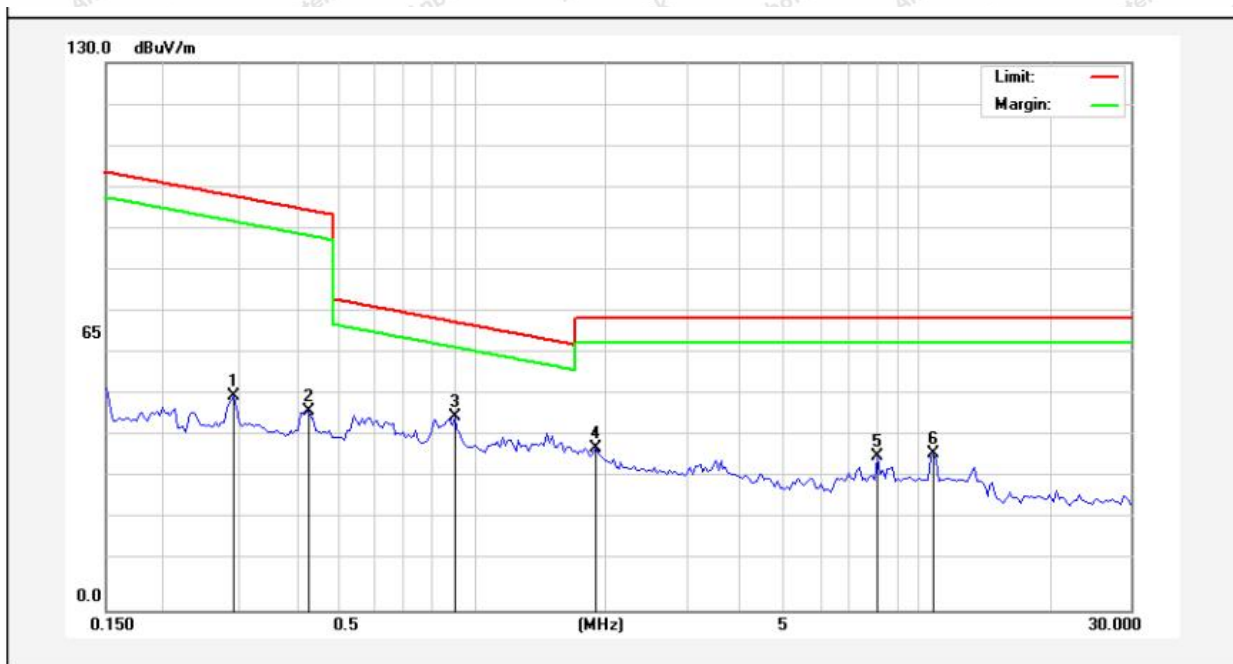

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.2908	30.68	20.30	50.98	98.30	-47.32	AV			
2	0.4269	27.07	20.27	47.34	94.99	-47.65	AV			
3	0.9084	25.62	20.26	45.88	68.45	-22.57	QP			
4	1.8829	18.26	20.28	38.54	69.50	-30.96	QP			
5	8.0838	15.92	20.50	36.42	69.50	-33.08	QP			
6	10.8185	16.77	20.52	37.29	69.50	-32.21	QP			

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.




Report No.: 18220WC20163901

FCC ID: 2A76B-FD-308

Page 19 of 22

Test Results (Between 30MHz –1000 MHz)


Test Mode: Mode 1
Distance: 3m
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.3°C/56%RH

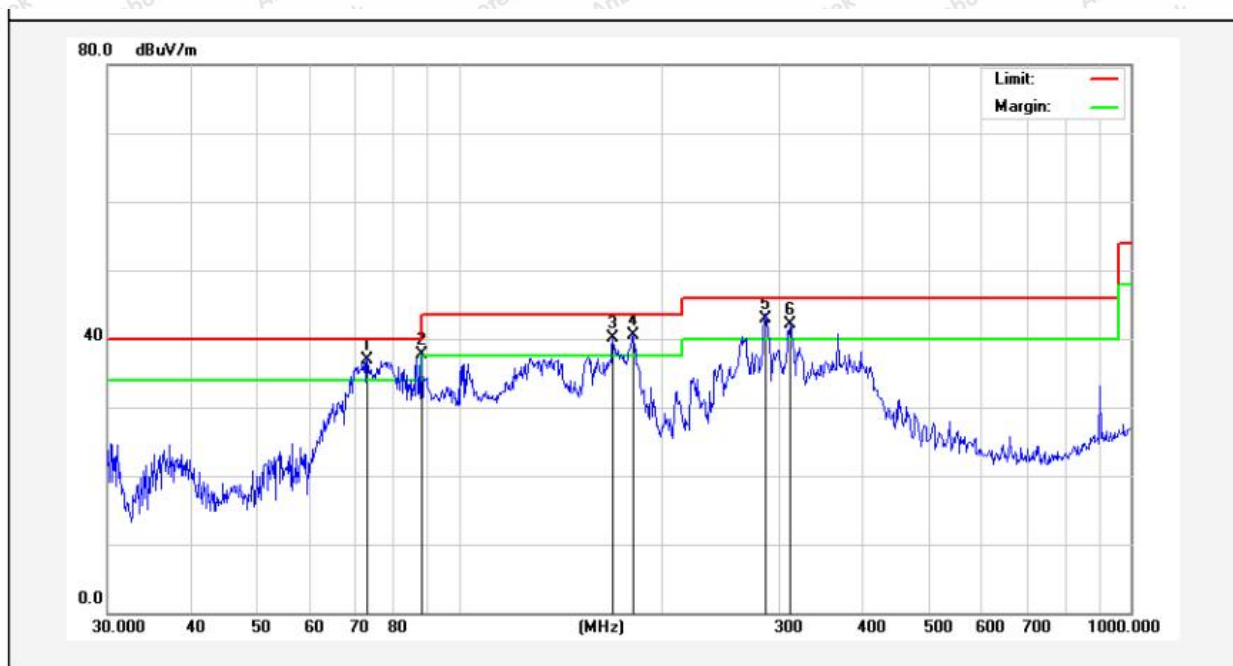

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	73.1025	58.96	-22.09	36.87	40.00	-3.13	QP			
2	88.0327	59.87	-22.26	37.61	43.50	-5.89	QP			
3	169.5988	63.67	-23.63	40.04	43.50	-3.46	QP			
4	181.9199	63.55	-23.09	40.46	43.50	-3.04	QP			
5	285.9778	61.29	-18.37	42.92	46.00	-3.08	QP			
6	311.0867	59.00	-16.90	42.10	46.00	-3.90	QP			



Test Mode: Mode 1
Distance: 3m
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.3°C/56%RH

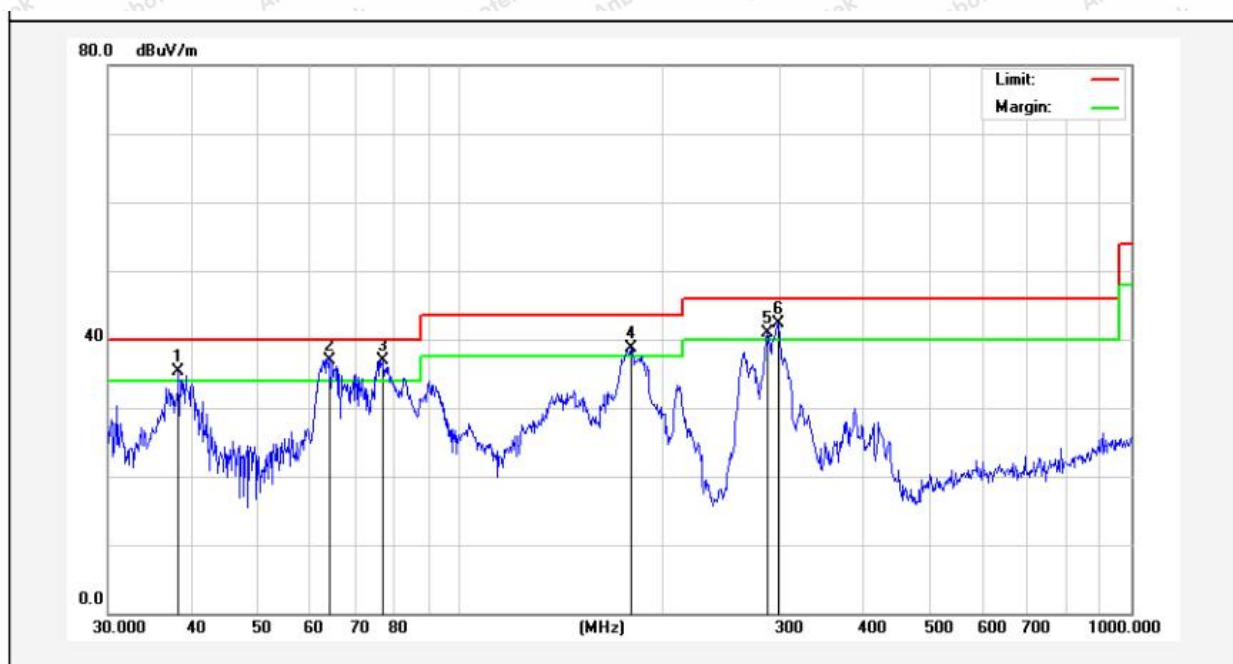

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.2120	50.82	-15.49	35.33	40.00	-4.67	QP			
2	63.9828	55.87	-18.94	36.93	40.00	-3.07	QP			
3	76.7806	56.64	-19.68	36.96	40.00	-3.04	QP			
4	180.0165	59.22	-20.60	38.62	43.50	-4.88	QP			
5	287.9904	57.59	-16.67	40.92	46.00	-5.08	QP			
6	298.2681	58.71	-16.32	42.39	46.00	-3.61	QP			



5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

