

A

B

C

D

E


1

2

3

4

white label with black lettering

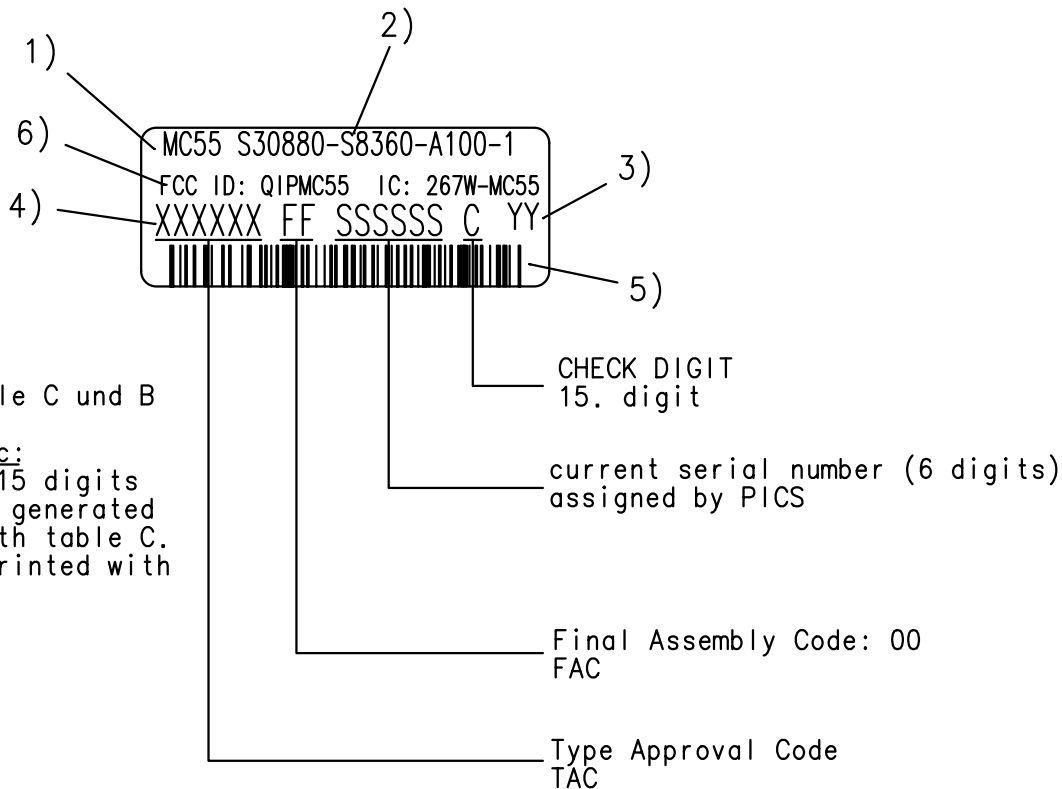

Barcode:
Type 128, table C und B

Characteristic:
IMEI-no. has 15 digits
Digit 1-14 is generated
as Barcode with table C.
Digit 15 is printed with
table B

Label: Z30880-Z9999-Z72-*

Ink ribbon: TTR-Bad Ricoh 110-A

Font: Titel blocks concentric

- | | | |
|----|--------------------------|-----------------------------------|
| 1) | Product name: | Font D size 4 |
| 2) | Product number: | Font D size 4 |
| 3) | Code of date: | Font D size 4 according to IEC 62 |
| 4) | IMEI-No. (plain writing) | Font D size 4 |
| 5) | Barcode IMEI-no. | Code 128 size:1 ratio:2 high:3mm |
| 6) | Canada and FCC | Font A2.2 high 1.2mm |

				Datum	12.08.03	MC55 cellular engine Zulassung / IMEI		
				Bearb.	Boelcke			
				Gepr.				
				Norm.				
				ICM WM RD HW3		DIS 46732		
3	11756	22.01.04	Sch	Siemens AG				Blatt
2	11213	19.12.03	Sch					1-
1	7427	25.08.03	Boe					X Bl.
Zust.	Mitteilung	Datum	Name					