ALS BETRIEBSGEHEIMNIS ANVERTRAUT. ALLE RECHTE VORBEHALTEN. PROPRIETARY DATA, COMPANY CONFIDENTIAL. ALL RIGHTS RESERVED.

White label with black lettering

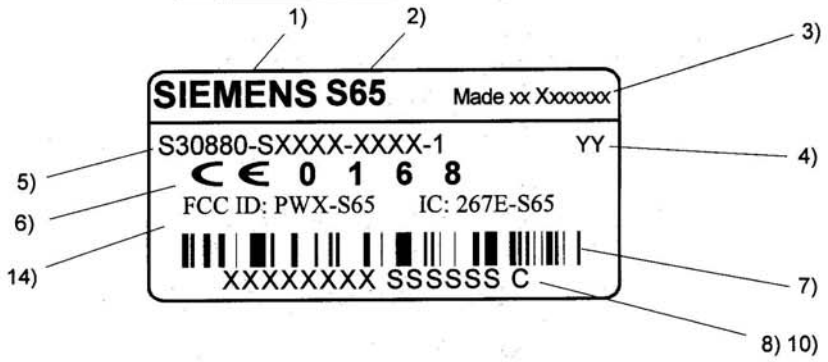

10)	XXXXXXXX	Typ-Approval Code TAC
10)	SSSSSS	Current serial number (6 digits), Assigned by PICS
10)	C	CHECK DIGIT 15. digit
		space between TAC, serial no. and 15.digit

Ink ribbon:	TTR-Band Ricoh 110-C
Font:	Title blocks concentric
1) Corporate logo:	1.5 SN 66324
2) Product name:	Internal font D, size 4
3) Made xx Xxxxxxx	Internal font B, size 3 / Depending on production location
4) Code of date:	Internal font D, size 4 e.g. F3 — March └—1995
5) Code number:	Internal font D, size 4 Corresponding to the number of the transceiver unit part list
6) CE- identification:	Height: 5 mm according to BABT-Document 556 26/93
7) Barcode IMEI-No.:	Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm Typ 128, table **C** and **B** Characteristic: IMEI-No. has 15 digits Digit 1-14 is generated as Barcode with table **C**. Digit 15 is printed with table **B.**
8) IMEI-No. (plain writing):	Internal font D, size 4, space between TAC, serial no. and 15.digit
10) Document for IMEI-No. allocation:	DIS 70344 BOM 000 xx Valid is the highest level in the system
14) Canada IC and US FCC:	Internal font B, size 3

				Date 01.04.04	Approval label Standard IMEI-Label/S65	
				Name Mazur		
				PD HW4 KLF		
1		01.04.04	Maz		LETTERING PLAN	
Version		Date	Token	SIEMENS AG	DIS 58985	Page 1 From 1

A24850-V1-A4-2 VORSTD.DOC

S65 IMEI LABEL and LABEL LOCATION