

TEST REPORT

Applicant Name & Address : Shenzhen Jumper Medical Equipment Co.,LTD
Building D, No. 71, Xintian Road, Fuyong Street, Baoan, Shenzhen, Guangdong

Sample Description

Product : pulse oximeter
FCC ID : 2ADYL-JPD500F
Model No. : JPD-500F
Electrical Rating : DC 3V

Date Received : 12 Dec, 2014
Date Test Conducted : 12 Dec, 2014 – 16 Jan 2015
Test standards : 47 CFR PART 15 Subpart C: 2014 section 15.247

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

*****End of Page*****

Prepared and Checked By:

Approved By:

John Meng
John Meng
Engineer
Intertek Guangzhou

Helen Ma Signature
Helen Ma
Sr. Project Engineer
Intertek Guangzhou
11 March 2015 Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538



Report No.: 141212001GZU-001
Issued: 11 March 2015

CONTENT

TEST REPORT	1
CONTENT	2
1.0 Summary of Test.....	3
2.0 General Description.....	4
2.1 Product Description.....	4
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology	5
2.4 Test Facility.....	5
3.0 System Test Configuration	6
3.1 Justification	6
3.2 Measurement Uncertainty	7
3.3 Equipment Modification.....	7
3.4 Support Equipment List and Description	7
4.0 Measurement Results.....	8
4.1 Antenna Requirement:.....	8
4.2 6 dB Bandwidth:.....	9
4.3 Maximum Peak Conducted Output Power	12
4.4 Peak Power Spectral Density	16
4.5 Out of Band Conducted Emissions	20
4.6 Out of Band Radiated Emissions.....	26
4.7 Radiated Emissions in Restricted Bands	27
4.8 Band Edges Requirement	39
5.0 Test Equipment List.....	42

1.0 Summary of Test

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
6 dB Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10: Clause 6.9.1	PASS
Maximum Peak Conducted Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: Clause 6.10.2.1	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10: Clause 6.11.2.3	PASS
Out of Band Conducted Emissions	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.7	PASS
Out of Band Radiated Emission	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	N/A
Radiated Emissions in Restricted Bands	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9.2	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	N/A
Remark:			
N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.			

2.0 General Description

2.1 Product Description

Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Number of Channels	40 Channels
Channel Separation:	2 MHz
Antenna Type	Integral
Antenna gain:	3 dBi
Speciality:	Bluetooth 4.0 with BLE (Bluetooth Low Energy)
Function:	pulse oximeter with BT function to transmit signal
Power Supply:	DC 3V

EUT modulation and data packet during test:

The EUT has been tested on the Modulation of GFSK with 1 Mbps data rate.

EUT channels and frequencies list:

Test frequencies are lowest channel 0: 2402 MHz, middle channel 19: 2440 MHz and highest channel 39: 2480 MHz.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/



Report No.: 141212001GZU-001
Issued: 11 March 2015

2.2 Related Submittal(s) Grants

This is an application for certification of:
DTS- Part 15 Digital Transmission Systems

Remaining portions are subject to the following procedures:

1. Receiver portion of BLE: exempt from technical requirement of this Part.
2. The Electronic oven function: exempt from FCC requirement.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10:2009. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All of the tests are performed at:
Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City,
GETDD Guangzhou, China 510663.

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. It was powered by DC 3V.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified



Report No.: 141212001GZU-001
Issued: 11 March 2015

3.2 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.3 Equipment Modification

Any modifications installed previous to testing by Shenzhen Jumper Medical Equipment Co.,LTD will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.4 Support Equipment List and Description

This product was tested with corresponding accessories as below:

Supplied by Intertek:

Description	Manufacturer	Model No.	SN/Certificate NO
NoteBook	ThinkPad	T430	PB-FR45R 13/12
Software	client	SSCOM3.2	/
Test board	client	TIE NU	/



Report No.: 141212001GZU-001
Issued: 11 March 2015

4.0 Measurement Results

4.1 Antenna Requirement:

Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 3 dBi.


4.2 6 dB Bandwidth:

Test Requirement: FCC Part 15 C section 15.247
(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method: ANSI C63.10: Clause 6.9.1

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

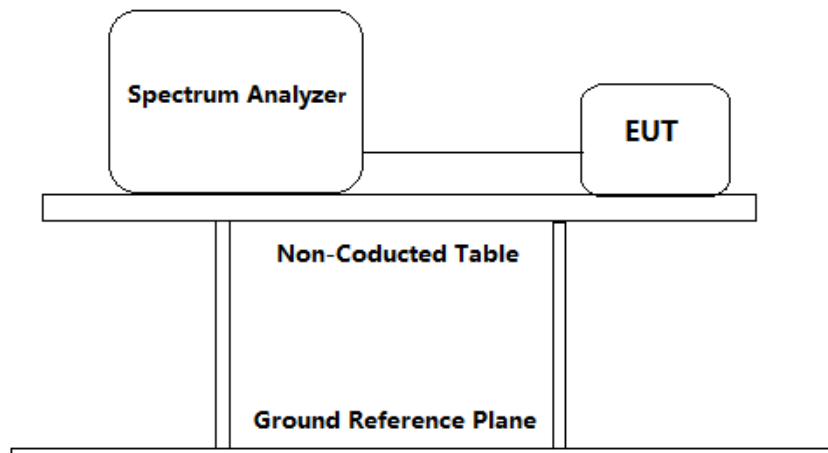

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.5 dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
Sweep = auto; Detector Function = Peak; ace = Max Hold
RBW: 1%~5% OBW ; VBW: $\geq 3 \times \text{RBW}$
Span=2*OBW~5*OBW
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Test result:

Channel No.	Frequency (MHz)	Measured 6dB bandwidth (kHz)	Limit (kHz)	Result
0	2402	670	≥ 500	Pass
19	2440	690		Pass
39	2480	690		Pass

Result plot as follows:


Lowest channel (2.402 GHz):






Report No.: 141212001GZU-001
Issued: 11 March 2015

Middle Channel (2.440 GHz):

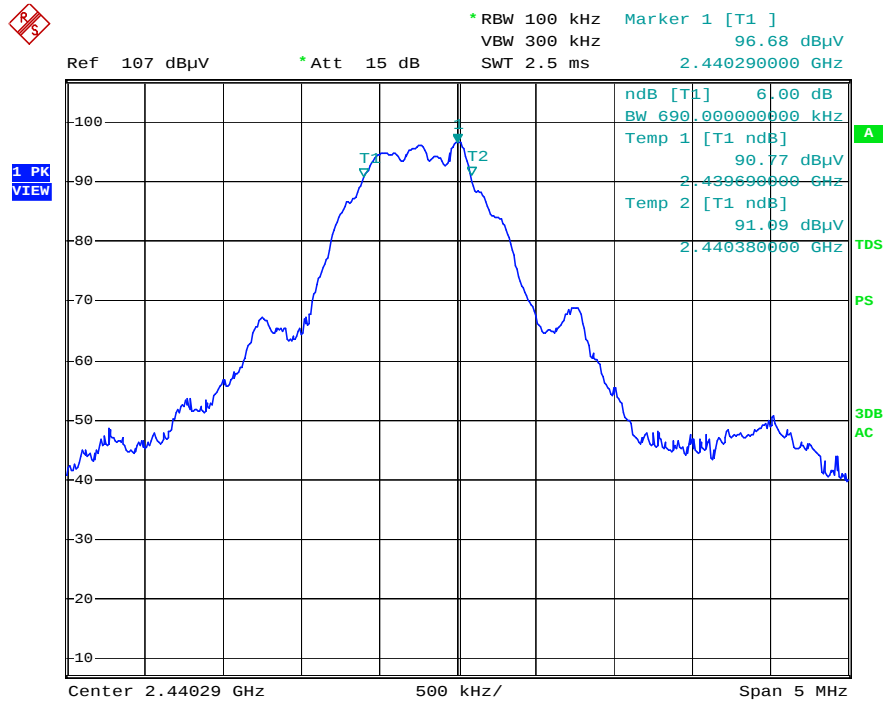


Highest Channel (2.480 GHz):

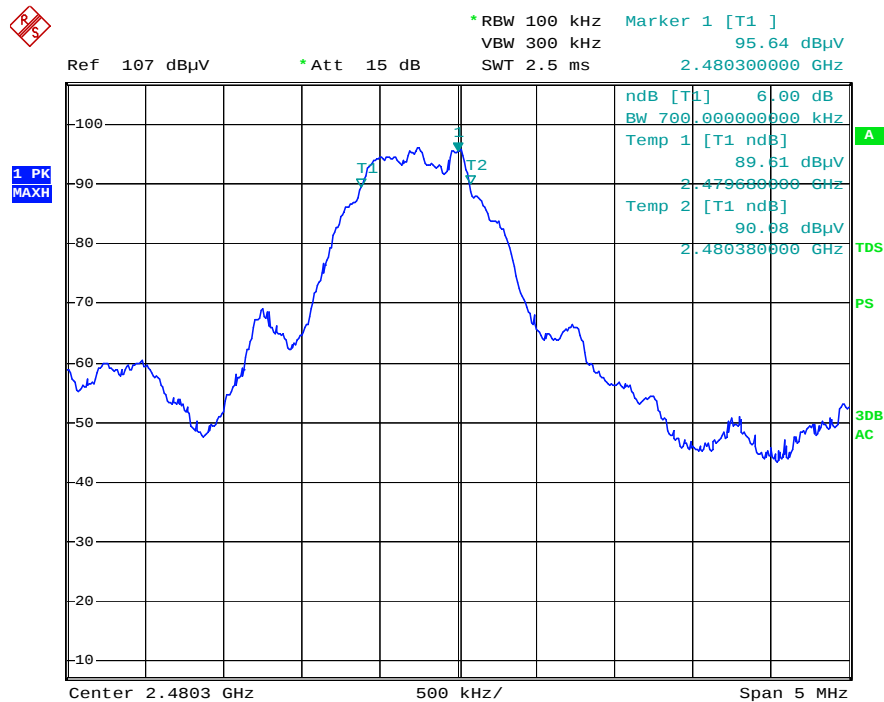

4.3 Maximum Peak Conducted Output Power

Test Requirement:	FCC Part 15 C section 15.247 (b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test Method:	ANSI C63.10: Clause 6.10.2.1(a)
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

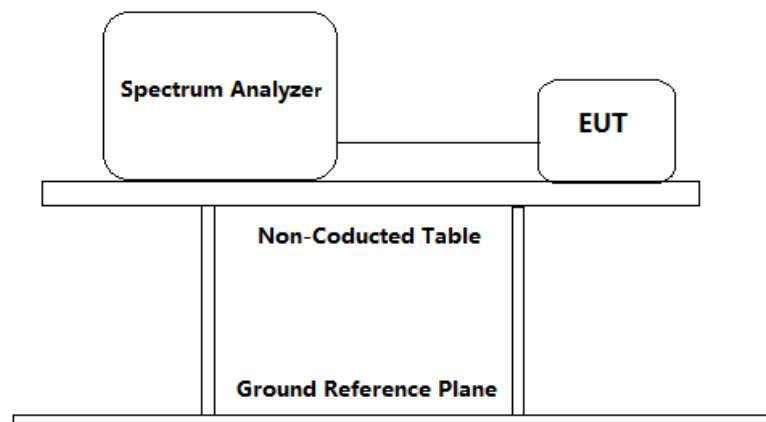

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss =1.5dB) from the antenna port to the spectrum.
2. Set the RBW ≥ 6 dB bandwidth
3. Set the VBW $\geq 3 \times$ RBW
4. Set the span $\geq 3 \times$ RBW
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Repeat until all the test status is investigated.
10. Report the worst case.


Test result:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Limit	Result
0	2402	-0.50	1W (30 dBm)	Pass
19	2440	-0.02		Pass
39	2480	-1.53		Pass


Remark: Level = Read Level + Cable Loss.

Result plot as follows: offset=10dB external attenuate

Lowest channel (2.402 GHz):

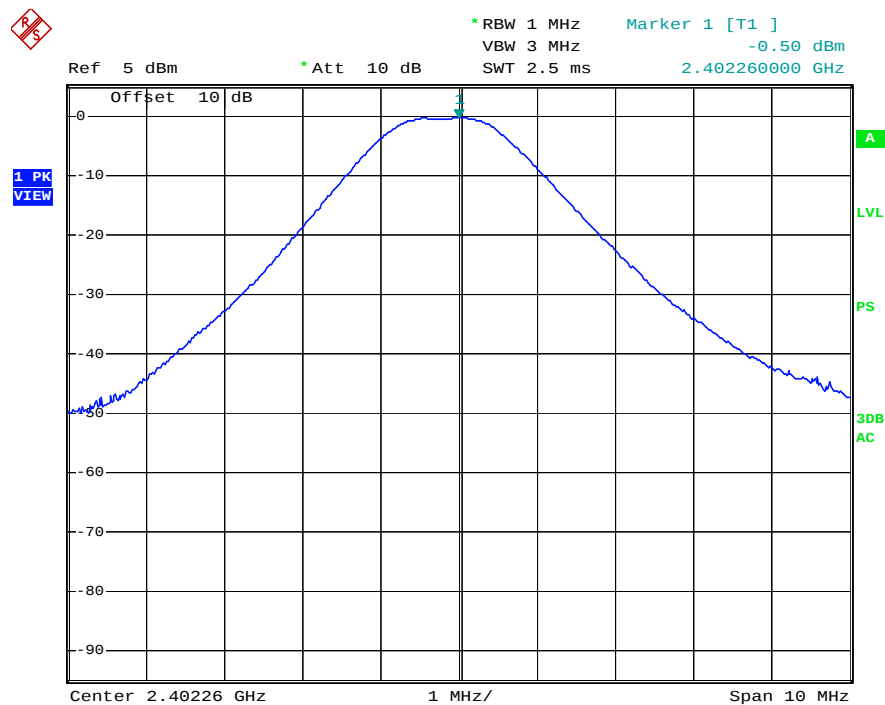


Middle Channel (2.440 GHz):

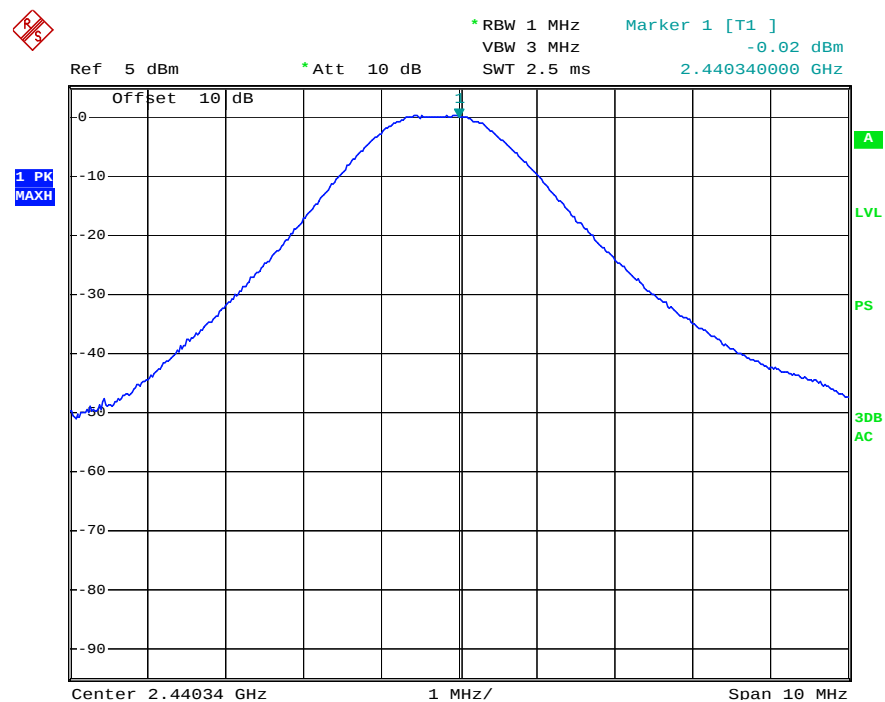




Report No.: 141212001GZU-001
Issued: 11 March 2015

Highest Channel (2.480 GHz):

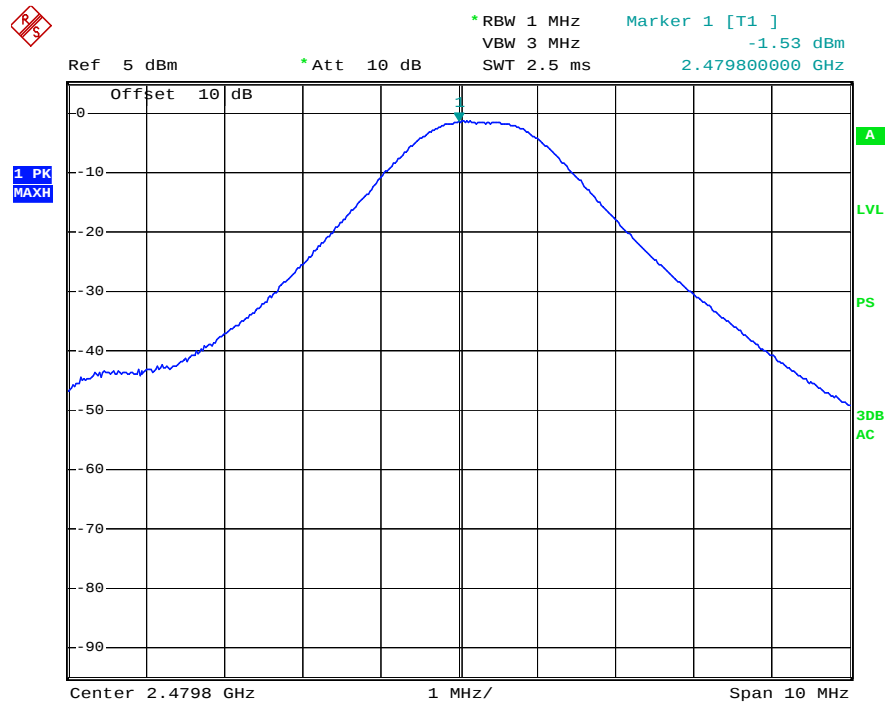

4.4 Peak Power Spectral Density

Test Requirement:	FCC Part 15 C section 15.247 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10: Clause 6.11.2.3
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

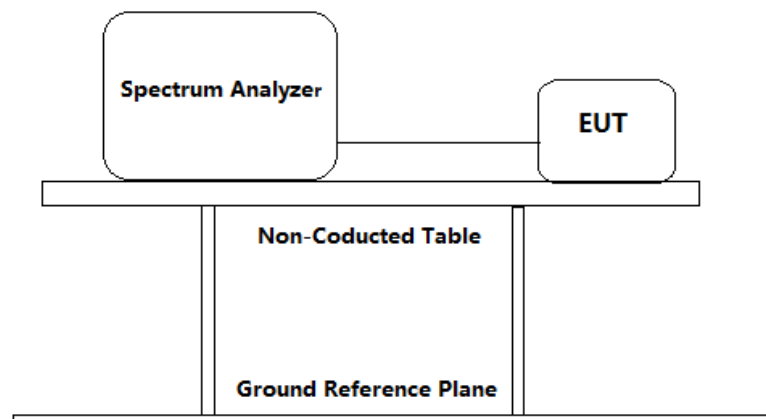

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.5dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set CENTER FREQUENCY = Frequency from Power Spectral Density Test Matrix
 - b) Set SPAN = 20 MHz (For devices with a nominal 40 MHz BW, 50 MHz span will be needed)
 - c) Set REFERENCE LEVEL = 20 dBm
 - d) Set ATTENUATION = 0 dB
 - e) Set SWEEP TIME = Coupled
 - f) Set RBW = 3 kHz
 - g) Set VBW = 10 kHz
 - h) Set DETECTOR = Peak
 - i) Set MKR = Center Frequency
 - j) Set TRACE = CLEAR WRITE

Place the radio in continuous transmit mode. Set the TRACE to MAX HOLD, and after the trace stabilizes, the TRACE to VIEW. Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency.

After viewing the EUT waveform on the spectrum analyzer, perform the following spectrum analyser functions to capture the trace:

Set SPAN = 300 kHz
Set SWEEP TIME = 100 s
Set TRACE = MAX HOLD
Set MKR = PEAK SEARCH
3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.


Test result:

Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3 kHz)	Limit	Result
0	2402	-23.19	8 dBm/3 kHz	Pass
19	2440	-19.23		Pass
39	2480	-19.97		Pass

Test result: Level = Read Level + Cable Loss.

Result plot as follows: offset=10dB external attenuate


Lowest channel (2.402 GHz):

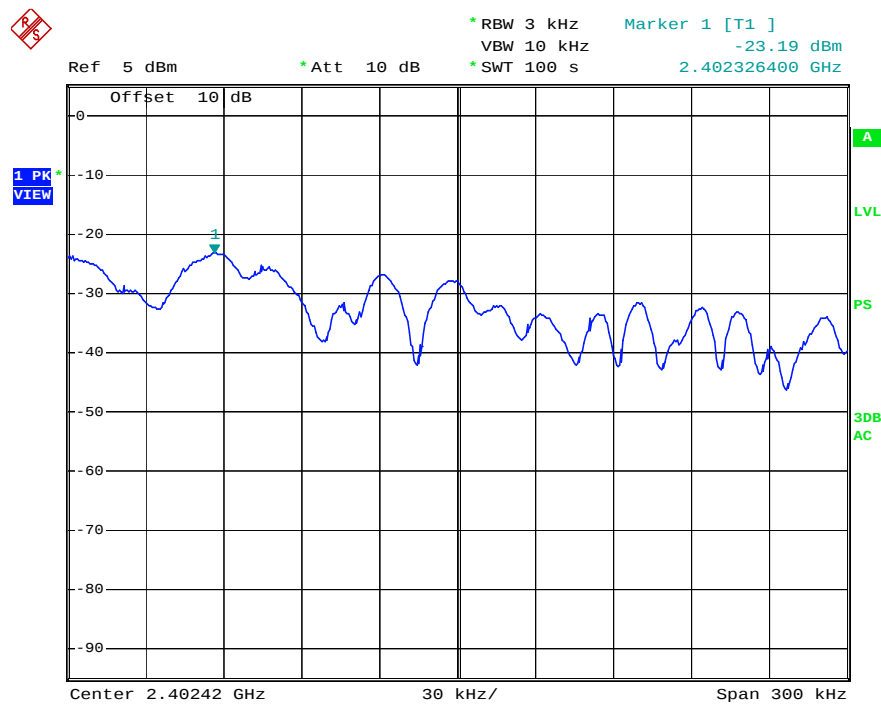




Report No.: 141212001GZU-001
Issued: 11 March 2015

Middle Channel (2.440 GHz):

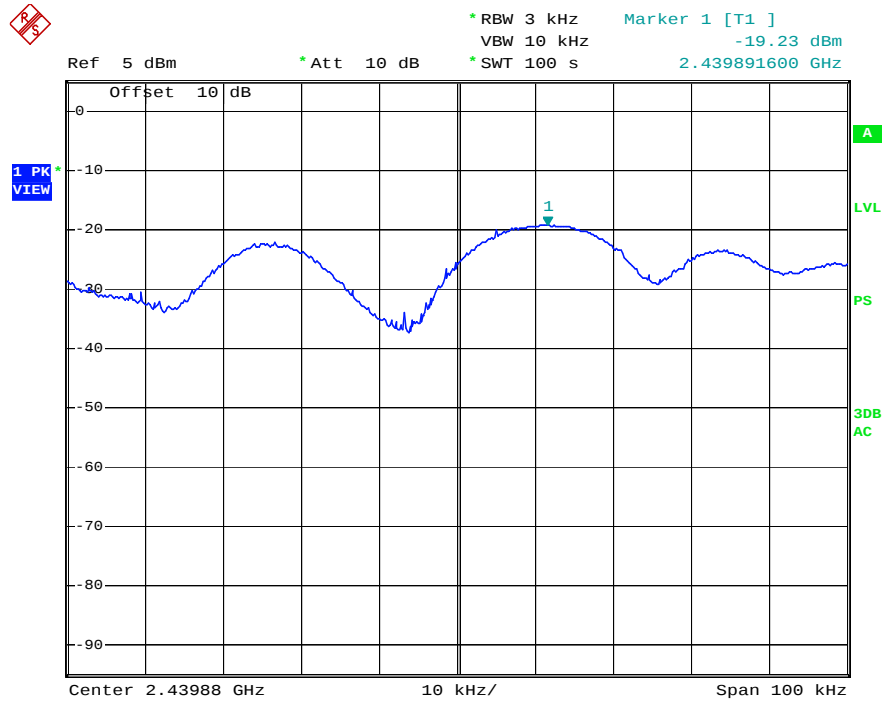

Highest Channel (2.480 GHz):

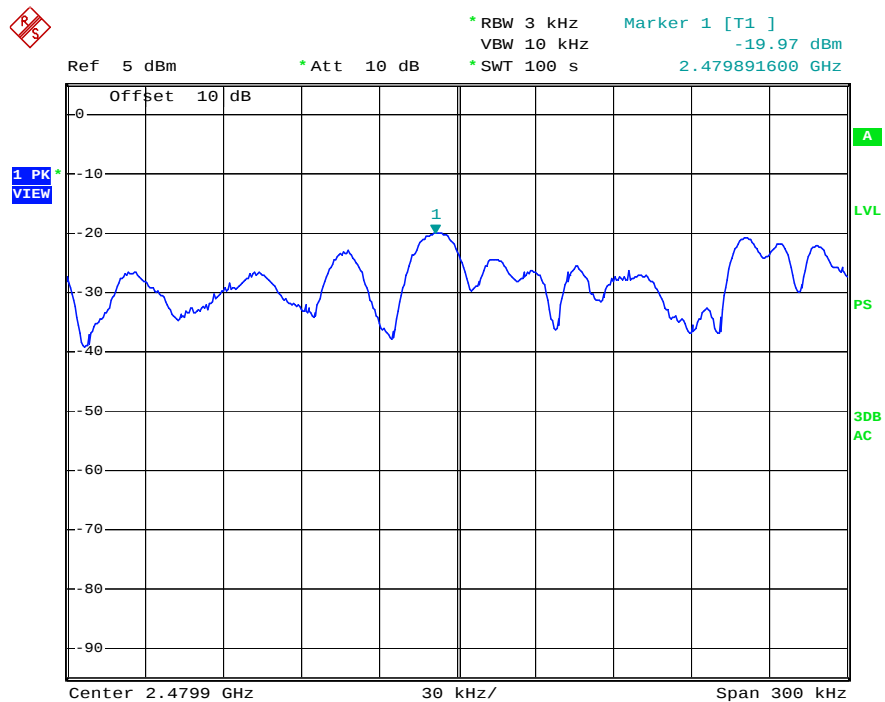

4.5 Out of Band Conducted Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10: Clause 6.7

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

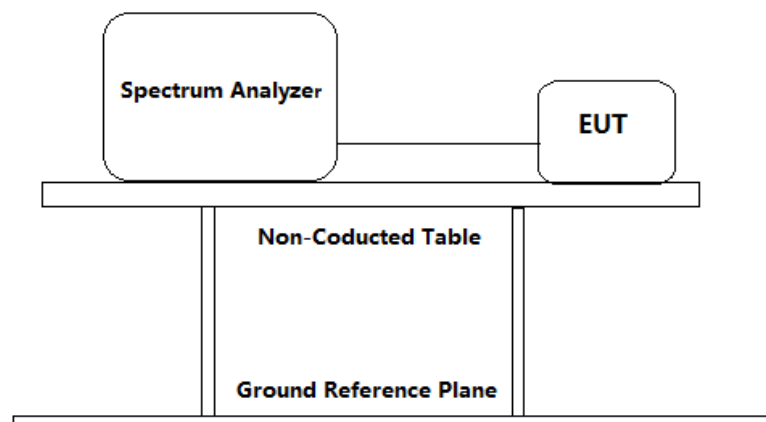


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable (cable loss = 1.5dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 kHz, VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted unwanted Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.


Result plot as follows:

Lowest channel (2.402 GHz):


30 MHz to 2 GHz:

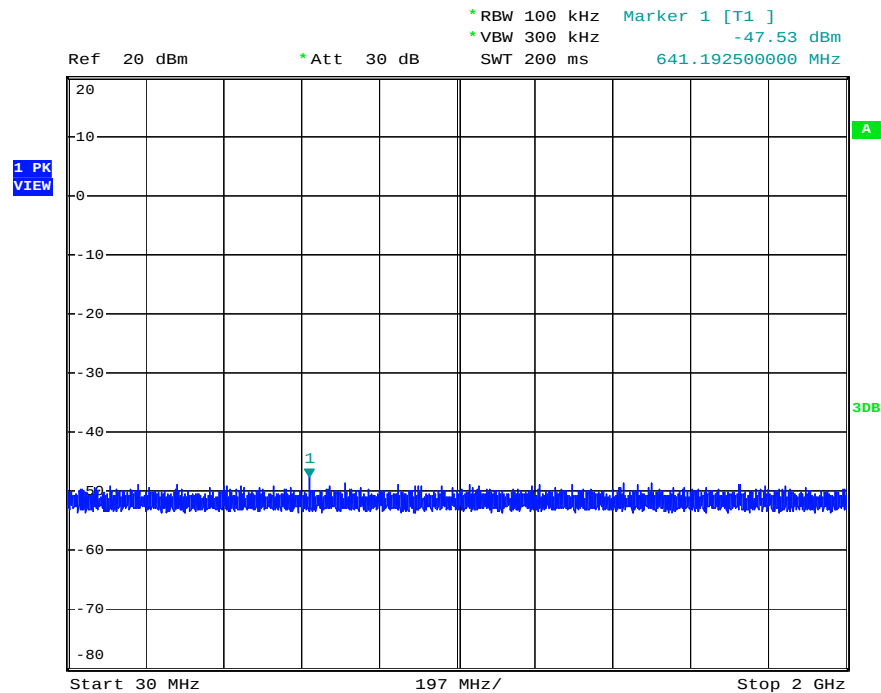

2 GHz to 10 GHz

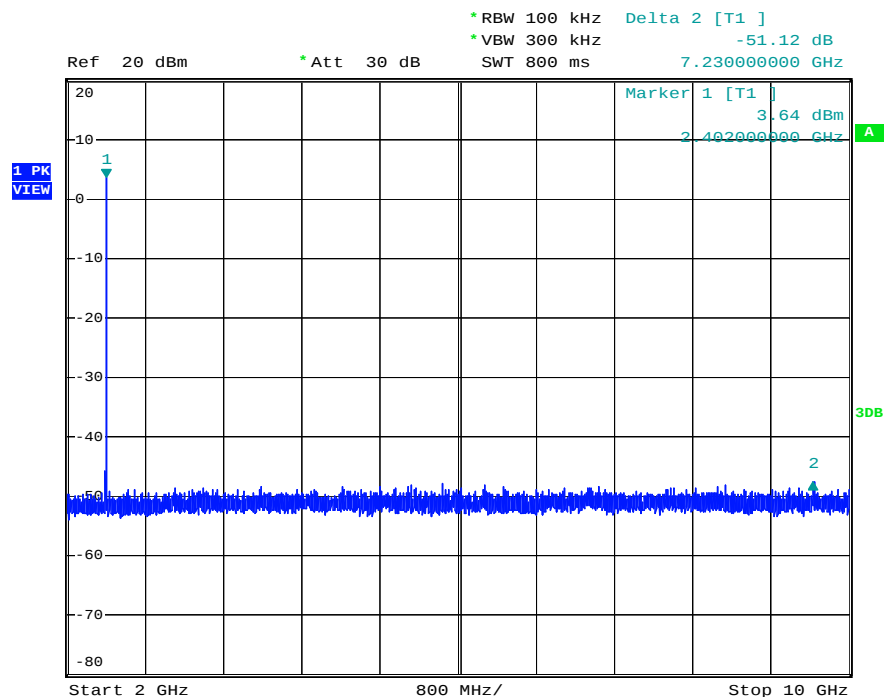


10 GHz to 25 GHz

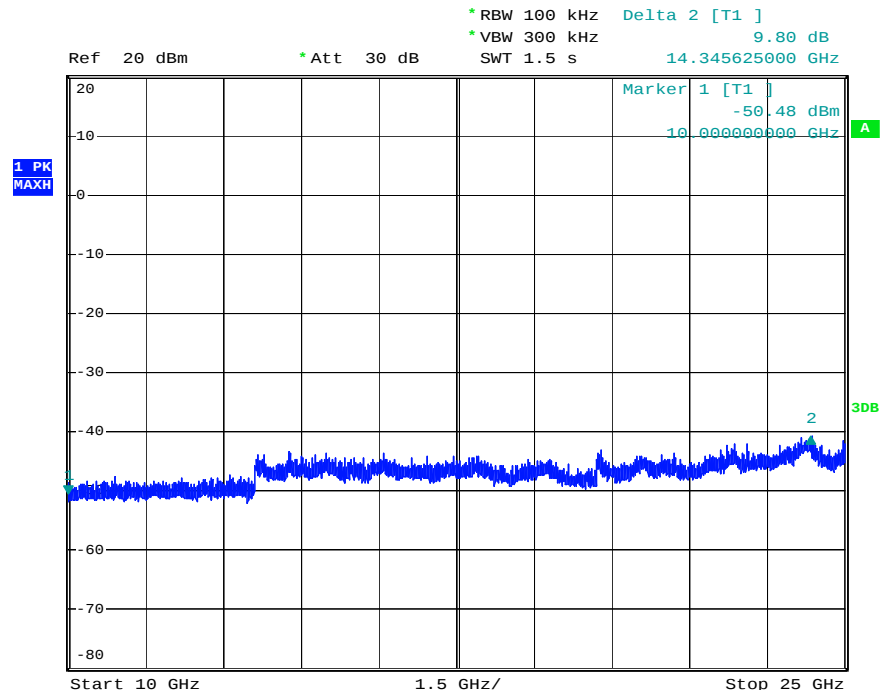

Middle Channel (2.440 GHz):


30 MHz to 2 GHz:

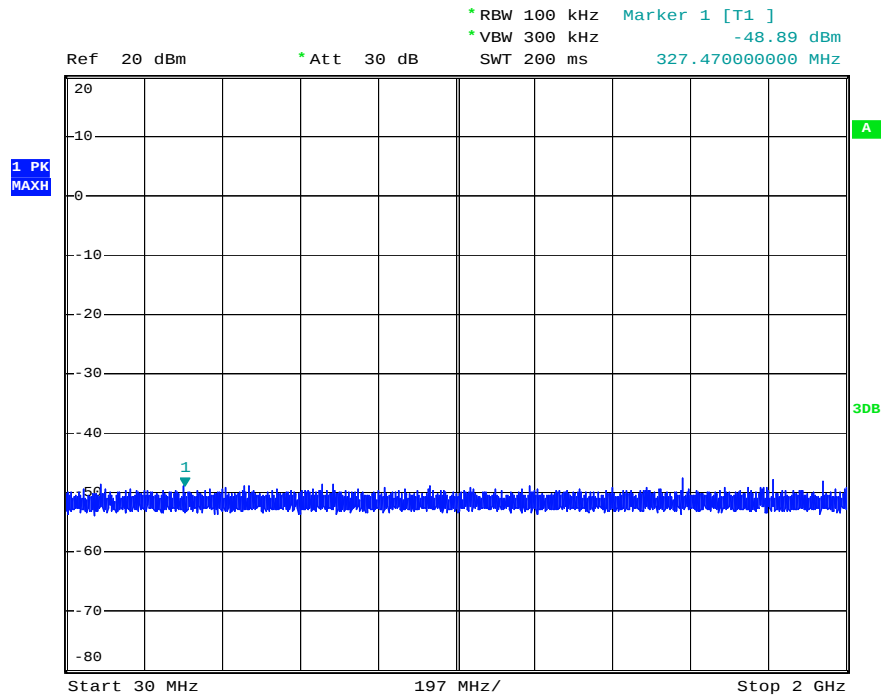




Report No.: 141212001GZU-001
Issued: 11 March 2015

2 GHz to 10 GHz

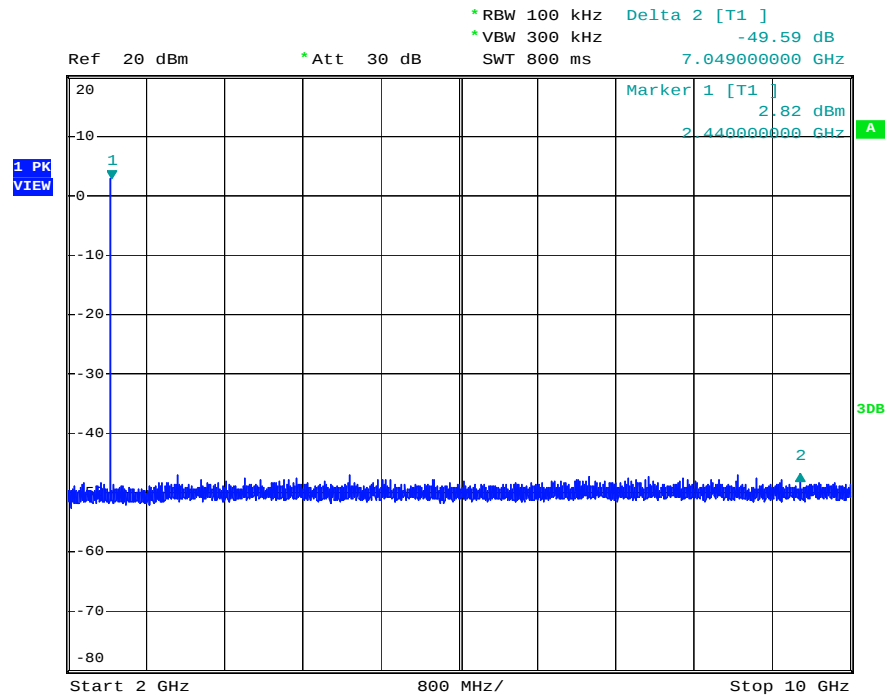


10 GHz to 25 GHz

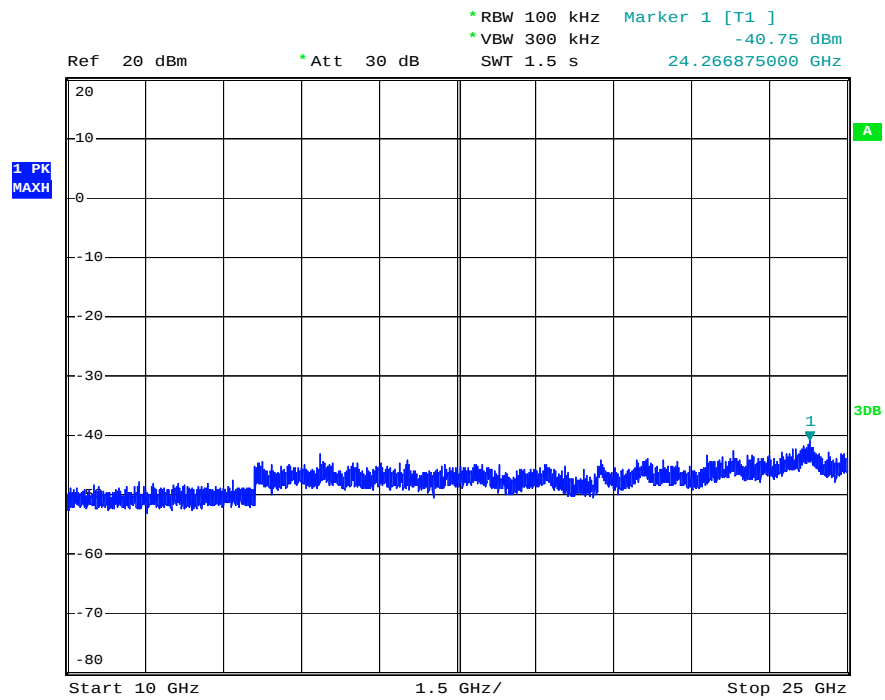


Highest Channel (2.480 GHz):

30 MHz to 2 GHz:

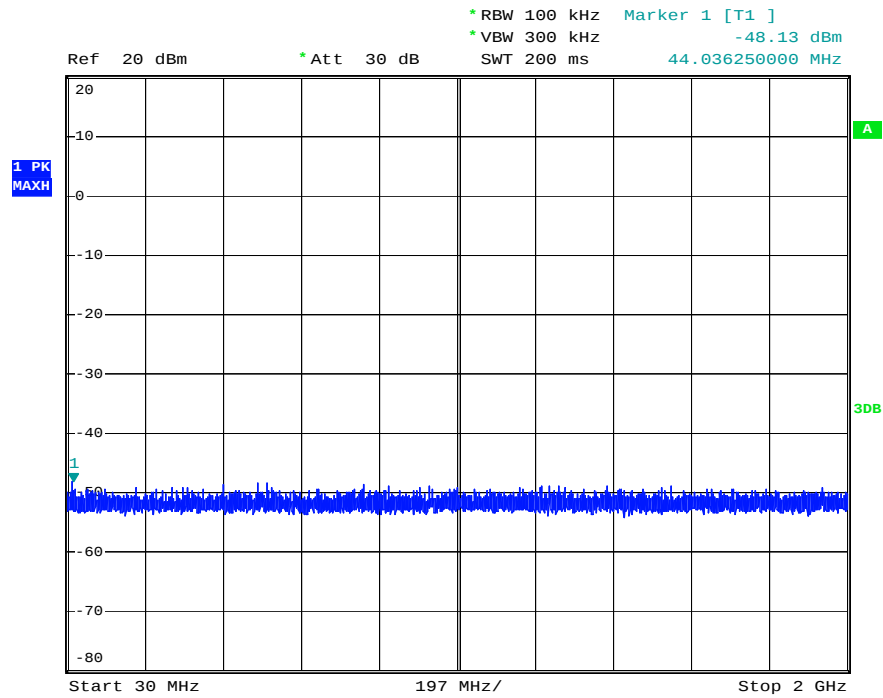


2 GHz to 10 GHz

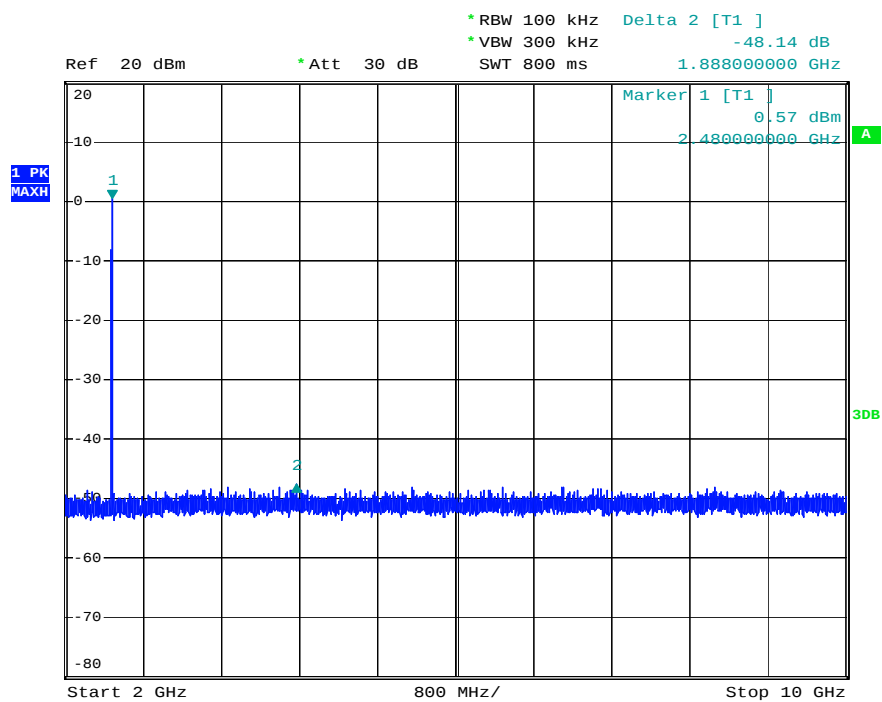



Report No.: 141212001GZU-001
Issued: 11 March 2015

10 GHz to 25 GHz

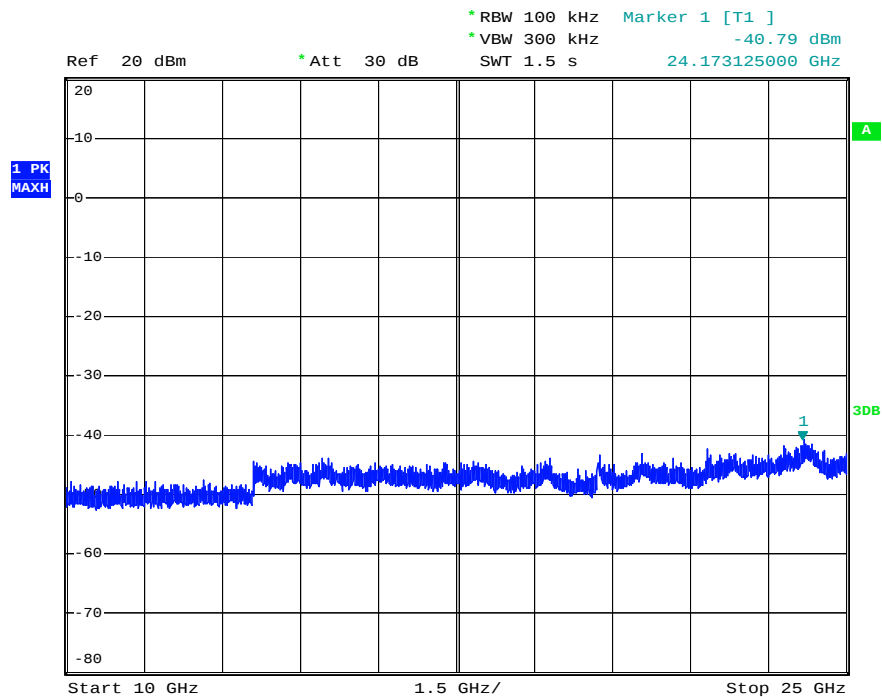



Report No.: 141212001GZU-001
Issued: 11 March 2015

4.6 Out of Band Radiated Emissions

For out of band radiated emissions into Non-Restricted Frequency Bands were performed at a 3m separation distance to determine whether these emissions complied with the 20dB attenuation requirement.

- ☒ Not required, since all emissions are more than 20dB below fundamental
- ☐ See attached data sheet

4.7 Radiated Emissions in Restricted Bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For Peak and Quasi-Peak value: RBW = 1 MHz for $f \geq 1$ GHz, 200 Hz for 9 kHz to 150 kHz 9 kHz for 150 kHz to 30 MHz 120 kHz for 30 MHz to 1GHz VBW $\geq$ RBW Sweep = auto Detector function = peak for $f \geq 1$ GHz, QP for $f < 1$ GHz Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW=10 Hz Sweep = auto Trace = max hold


Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

Test Configuration:

1) 30 MHz to 1 GHz emissions:

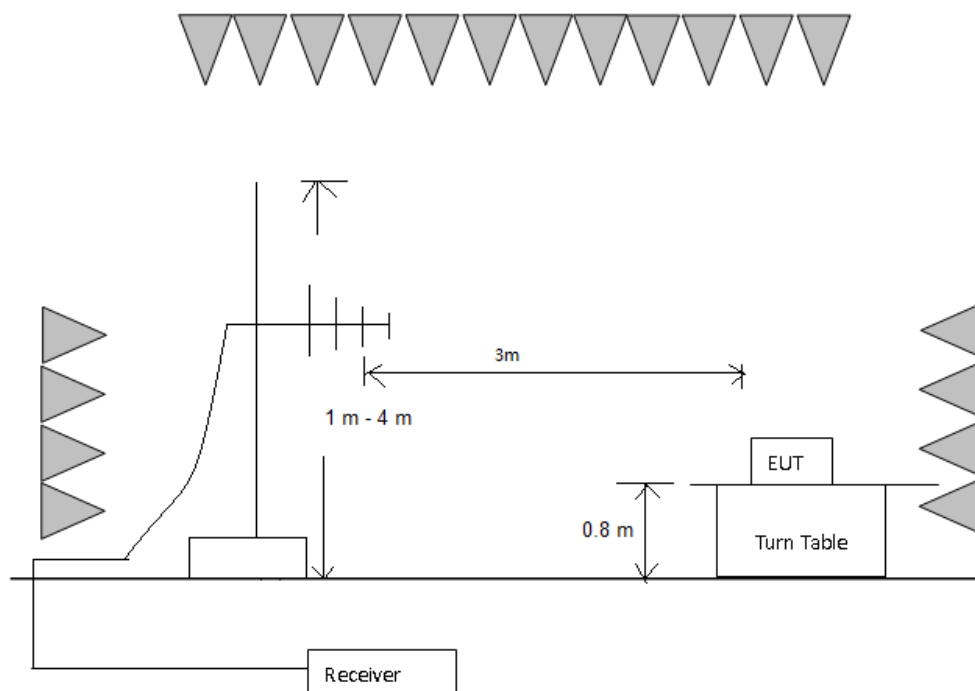

2) 1 GHz to 40 GHz emissions:

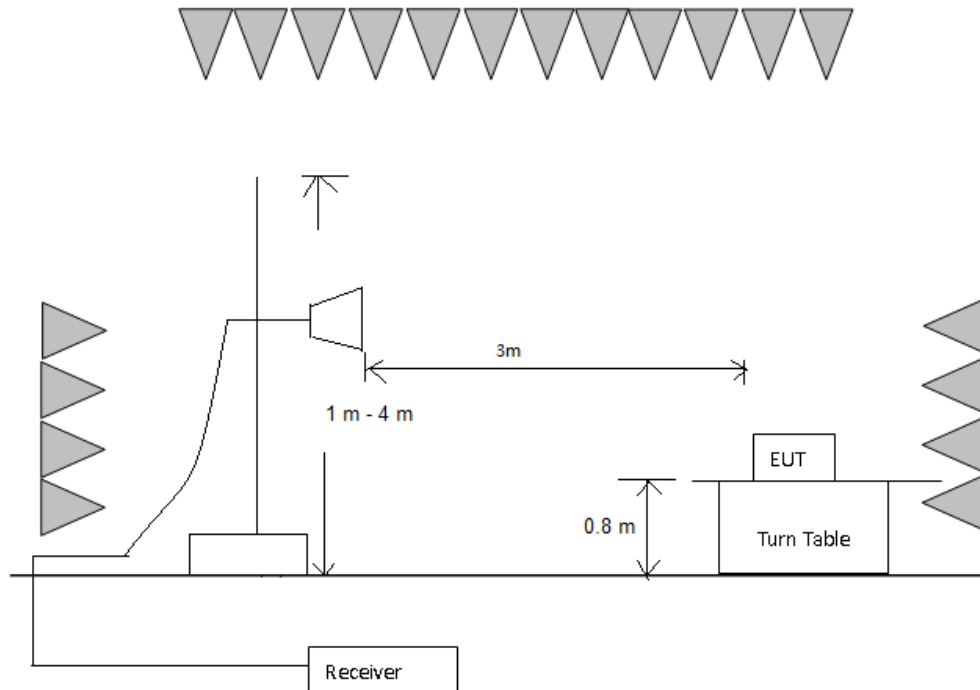

Test Procedure:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement
The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.


Test at Channel 0 (2.402 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

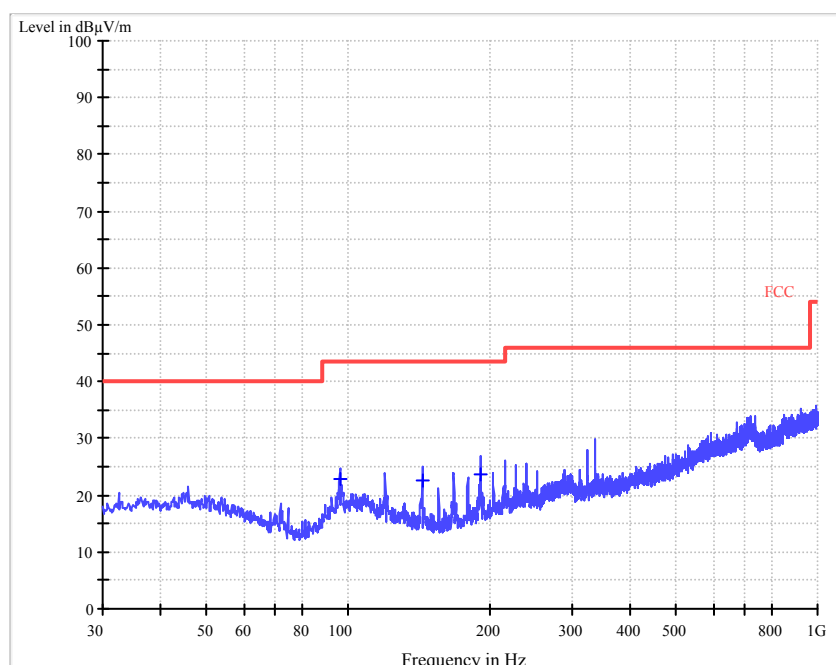


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
96.000000	22.8	120.000	V	12.2	20.7	43.5
143.920000	22.5	120.000	V	9.0	21.0	43.5
191.960000	23.7	120.000	V	10.1	19.8	43.5

Horizontal:

Peak scan

Level (dB μ V/m)

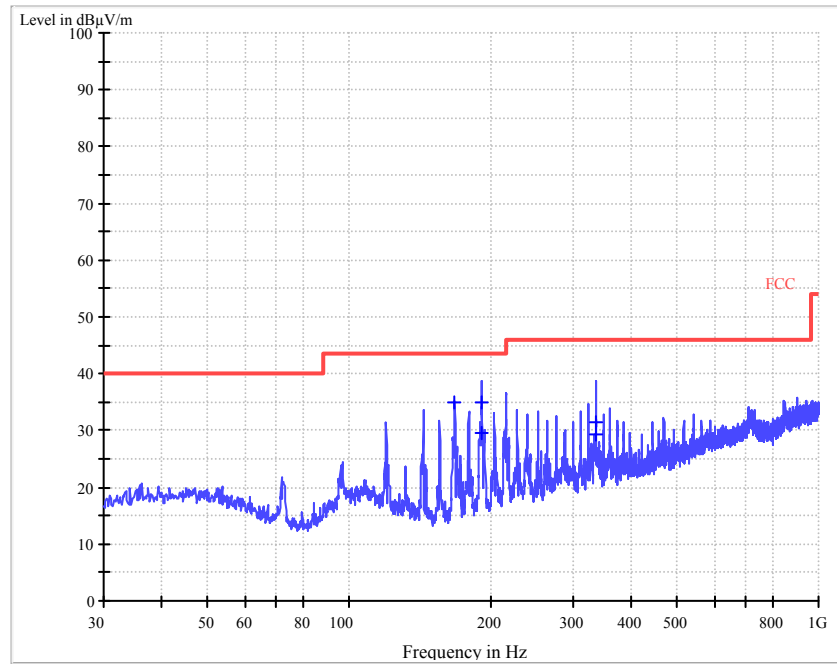

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
167.840000	35.1	120.000	H	8.8	8.4	43.5
191.960000	35.1	120.000	H	10.1	8.5	43.5
191.960000	29.5	120.000	H	10.1	14.0	43.5
336.000000	31.4	120.000	H	16.8	14.6	46.0
336.000000	31.4	120.000	H	16.8	14.6	46.0



Report No.: 141212001GZU-001
Issued: 11 March 2015

1~25 GHz Radiated Emissions. Peak Measurement & Average Measurement

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2328.4	45.5	-7.6	37.9	74.0	H
2342.8	45.3	-7.5	37.8	74.0	H
2374.4	45.7	-7.4	38.3	74.0	H
2484.0	44.8	-7.0	37.8	74.0	H
2491.2	46.4	-7.0	39.4	74.0	H
2498.0	46.6	-6.9	39.7	74.0	H
4803.8	51.7	-0.4	51.3	74.0	H
9436.3	43.8	8.2	52.0	74.0	H
2326.0	46.7	-7.6	39.1	74.0	V
2332.4	49.9	-7.5	42.4	74.0	V
2367.2	49.2	-7.4	41.8	74.0	V
2491.6	51.1	-7.0	44.1	74.0	V
2494.8	51.3	-6.9	44.4	74.0	V
2496.8	52.0	-6.9	45.1	74.0	V

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.

* Band Edges Emission


Test at Channel 19 (2.440 GHz) in transmitting status

30 MHz~1 GHz Radiated Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

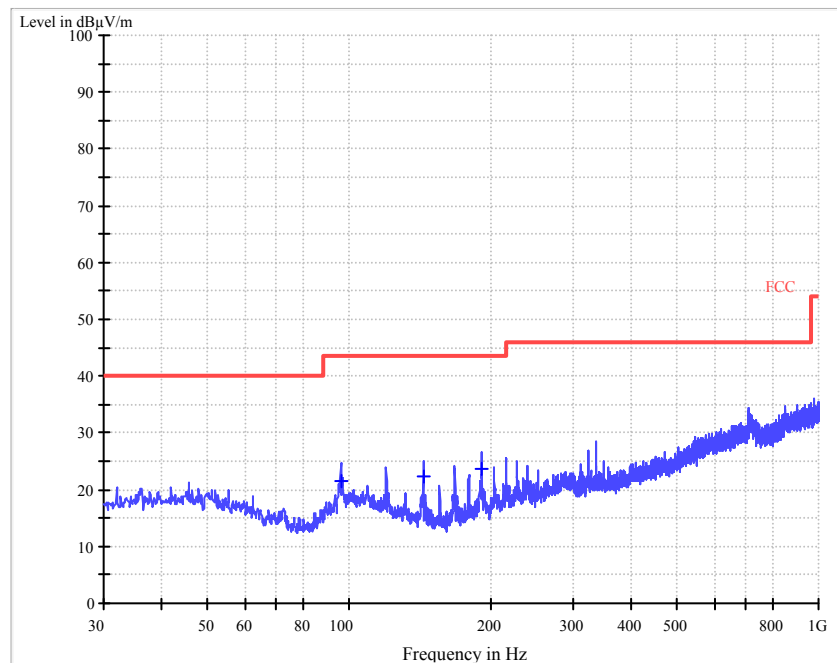


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
96.000000	21.6	120.000	V	12.2	21.9	43.5
143.920000	22.4	120.000	V	9.0	21.1	43.5
191.960000	23.5	120.000	V	10.1	20.0	43.5

Horizontal:

Peak scan

Level (dB μ V/m)

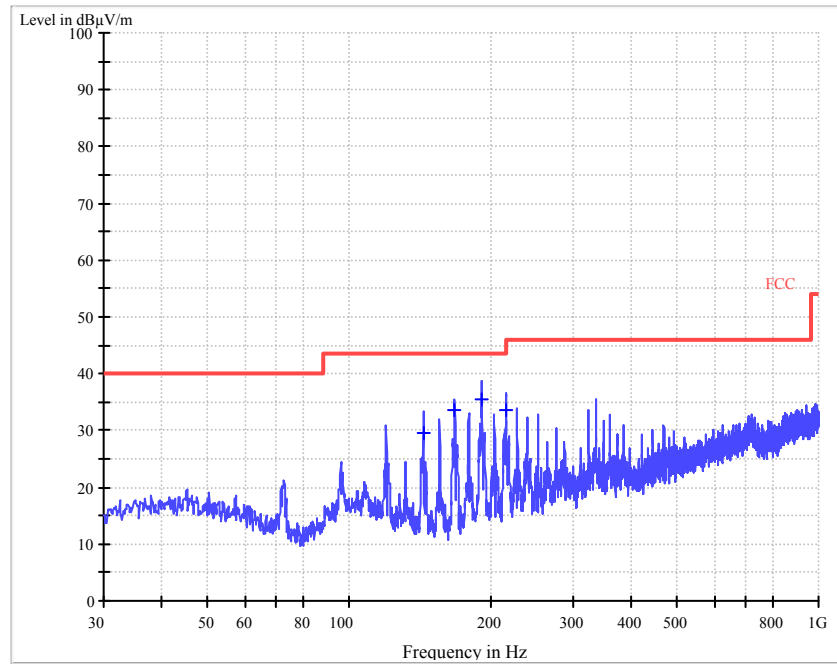

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
143.920000	29.7	120.000	H	9.0	13.8	43.5
168.000000	33.5	120.000	H	8.8	10.0	43.5
191.960000	35.5	120.000	H	10.1	8.0	43.5
215.760000	33.7	120.000	H	11.7	9.8	43.5



Report No.: 141212001GZU-001
Issued: 11 March 2015

1~25 GHz Radiated Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2334.0	44.6	-7.5	37.1	74.0	H
2358.8	45.7	-7.4	38.3	74.0	H
2376.0	47.6	-7.4	40.2	74.0	H
2483.6	45.7	-7.0	38.7	74.0	H
2495.2	44.8	-6.9	37.9	74.0	H
2498.0	45.6	-6.9	38.7	74.0	H
4880.3	53.3	-0.4	52.9	74.0	H
9459.6	39.4	8.4	47.8	74.0	H
2328.0	49.4	-7.6	41.8	70.4	V
2344.0	50.1	-7.5	42.6	70.4	V
2372.4	49.5	-7.4	42.1	70.4	V
2487.2	48.8	-7.0	41.8	70.4	V
2491.2	52.5	-7.0	45.5	70.4	V
2497.2	51.2	-6.9	44.3	70.4	V

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.


Test at Channel 39 (2.480 GHz) in transmitting status

30 MHz~1 GHz Radiated Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

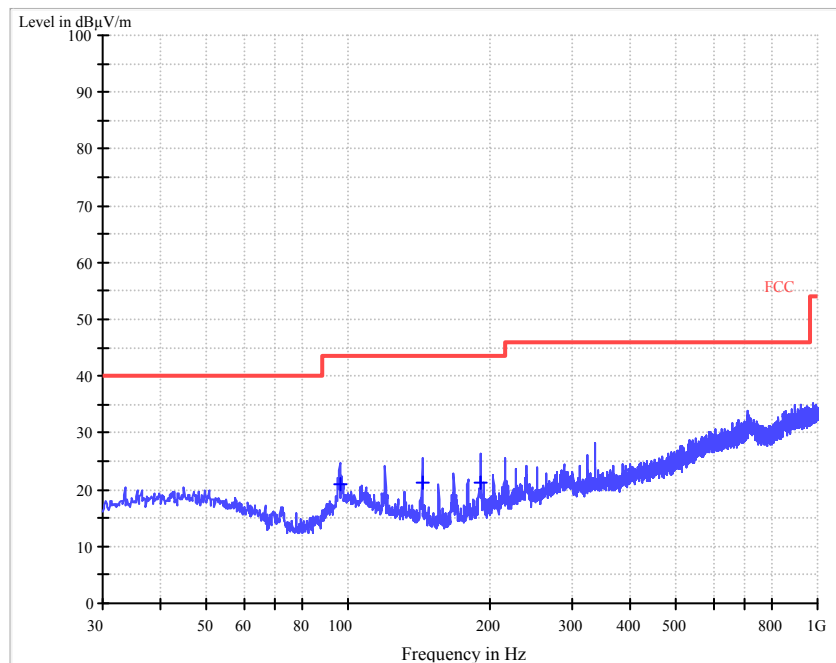


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
96.000000	21.1	120.000	V	12.2	22.4	43.5
143.920000	21.2	120.000	V	9.0	22.3	43.5
191.960000	21.1	120.000	V	9.0	22.4	43.5

Horizontal:

Peak scan

Level (dB μ V/m)

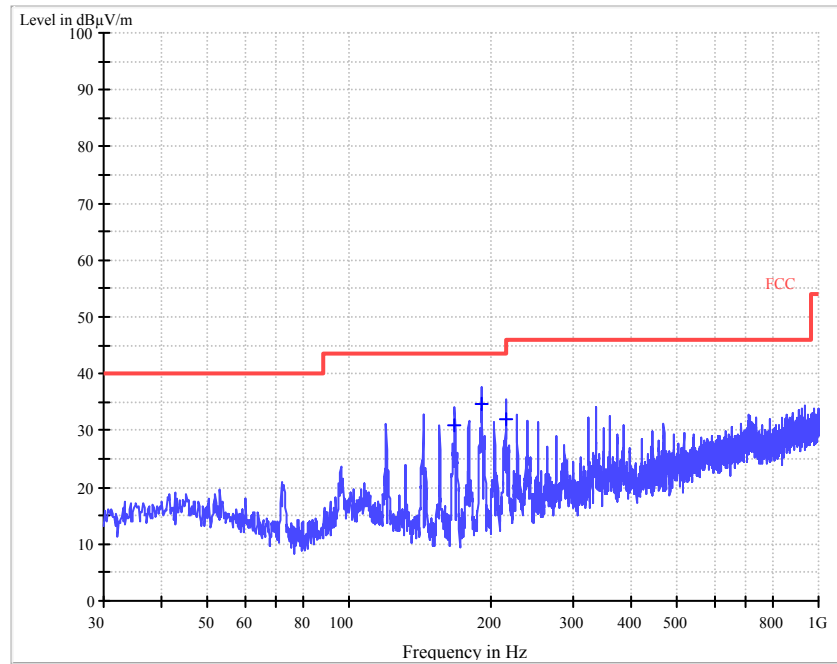

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
167.720000	31.0	120.000	H	8.8	12.5	43.5
191.960000	34.6	120.000	H	10.1	8.9	43.5
215.760000	32.1	120.000	H	8.8	11.5	43.5



Report No.: 141212001GZU-001
Issued: 11 March 2015

1~25 GHz Radiated Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2323.2	45.3	-7.6	37.7	74.0	H
2343.2	45.5	-7.5	38.0	74.0	H
2356.0	45.8	-7.4	38.4	74.0	H
2483.6	57.5	-7.0	50.5	74.0	H
2486.8	45.8	-7.0	38.8	74.0	H
2497.6	46.0	-6.9	39.1	74.0	H
2320.0	47.9	-7.6	40.3	74.0	V
2342.4	49.0	-7.5	41.5	74.0	V
2383.2	49.4	-7.3	42.1	74.0	V
2483.6	50.2	-7.0	43.2	74.0	V
2493.2	49.7	-6.9	42.8	74.0	V
2498.8	52.6	-6.9	45.7	74.0	V
8161.2	41.6	4.5	46.1	74.0	V

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.

* Band Edges Emission

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

No any other emissions level which are attenuated less than 20dB below the limit.

4.8 Band Edges Requirement

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10: Clause 6.9.2
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	For Band Edges Emission in Radiated mode, Please refer to clause 4.7

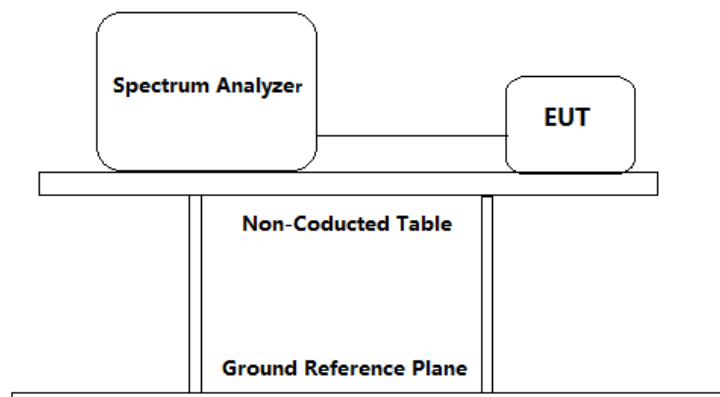

Test Procedure: For Band Edges Emission in Radiated mode, Please refer to clause 4.7

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 kHz bandwidth from band edge (minimum 50 MHz).
3. Repeat until all the test status is investigated.
4. Report the worst case.

Test result with plots as follows:

For conduct mode:

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.

Channel 0: 2.402 GHz



Channel 39: 2.480 GHz



For radiated mode:

Please refer Clause 4.7 Radiated Emissions in Restricted Bands of this test report for more details. The resultant field strength in band edges meet the general radiated emission limit in section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54dB μ V/m (Average Limit).



Report No.: 141212001GZU-001
Issued: 11 March 2015

5.0 Test Equipment List

Radiated Emission

Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (YYYY-MM-DD)	Calibration Interval
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m ³	ETS•LINDGREN	2014-04-02	1Y
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m ³	ETS•LINDGREN		
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2014-06-03	1Y
SZ056-03	Spectrum Analyzer	FSP30	R&S	2014-03-10	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2014-06-03	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2014-05-25	1Y
EM061-03	TRILOG Super Broadband test Antenna (30 MHz-1.5 GHz)	VULB 9161	SCHWARZBECK	2014-05-25	1Y
EM033-02	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)	R&S HF907	R&S	2014-05-25	1Y
EM033-03	High Frequency Antenna & preamplifier (18 GHz~26.5 GHz)	R&S SCU- 26	R&S	2014-05-25	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU- 40	R&S	2014-05-25	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	/	R&S	2014-06-03	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	/	R&S	2014-06-09	
EM033-04-02	Coaxial cable (18~40) GHz	/	R&S	2014-06-09	
EM022-03	2.45 GHz Filter	BRM 50702	Micro-Tronics	2014-05-06	1Y