



FCC RADIO TEST REPORT

FCC ID : QXO-AP560H
Equipment : 802.11ax Access Point
Brand Name : Extreme Networks
Model Name : AP560h
Applicant : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Manufacturer : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Standard : 47 CFR FCC Part 15.247

The product was received on Mar. 13, 2019, and testing was started from Mar. 22, 2019 and completed on Apr. 26, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration.....	11
2.3 EUT Operation during Test	13
2.4 Accessories	13
2.5 Support Equipment.....	14
2.6 Test Setup Diagram	16
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 DTS Bandwidth	21
3.3 Maximum Conducted Output Power	22
3.4 Power Spectral Density	25
3.5 Emissions in Non-restricted Frequency Bands	27
3.6 Emissions in Restricted Frequency Bands.....	28
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0

Page Number : 3 of 33
Issued Date : May 31, 2019
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Set	Port			Brand	Model Name	Antenna Type	Connector	Radio	Gain (dBi)				Beam width
		1TX	2TX	4TX						2.4GHz	5GHz	BT	Thread	
1	1	1	1	1	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	8.27	-	-	30/70
		-	2	2	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	8.27	-	-	30/70
	2	-	-	3	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	8.27	-	-	30/70
		-	-	4	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	8.27	-	-	30/70
	1	R2-1	R2-1	R1-4 R2-1	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	7.89	7.93	-	-	30/70
		-	R2-2	R1-3 R2-2	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	7.89	7.93	-	-	30/70
	2	-	R1-2	R1-2 R2-3	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	7.89	7.93	-	-	30/70
		R1-1	R1-1	R1-1 R2-4	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	7.89	7.93	-	-	30/70
2	1	1	1	1	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	6.16	-	-	70/70
		1	2	2	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	6.16	-	-	70/70
	2	-	-	3	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	6.16	-	-	70/70
		-	-	4	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-5GHz	-	6.16	-	-	70/70
	1	R2-1	R2-1	R1-4 R2-1	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	6.22	6.32	-	-	70/70
		-	R2-2	R1-3 R2-2	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	6.22	6.32	-	-	70/70
	2	-	R1-2	R1-2 R2-3	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	6.22	6.32	-	-	70/70
		R1-1	R1-1	R1-1 R2-4	WNC	Seahawk 560h	Panel Antenna	I-PEX	R1-2.4GHz R2-5GHz	6.22	6.32	-	-	70/70
3	-	1	-	-	WNC	Seahawk 560h	Panel Antenna	I-PEX	R3	-	-	2.61	2.61	-

Note1: The above information was declared by manufacturer.

Note2: Both Ant.1 and Ant. 2 support transmit and receive functions, but only one of them will be used at one time.

Note3:

For 2.4GHz function:

For IEEE 802.11b/g/n/lax mode (1TX, 2TX, 4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX



Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For Bluetooth and Thread mode (1TX/1RX):

Only Port 1 can be use as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.64	1.938	400u	3k

**1.1.4 EUT Operational Condition**

EUT Power Type	From PoE			
Function	☒	Point-to-multipoint	☐	Point-to-point
Test Software Version	accessMtool 3.0.0.6			
Support Mode	☒	LE 1M PHY: 1 Mb/s		
	☐	LE Coded PHY (S=2): 500 Kb/s		
	☐	LE Coded PHY (S=8): 125 Kb/s		
	☐	LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

1.The EUT has three radios, the information as following table:

Radio	Function		
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth/Thread
1	V	V	-
2	-	V	-
3	-	-	V

2.Table for EUT support function

Function	Support Type	Support Band
AP	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1~4
Client	Slave without Radar Detection (Sensor Mode)	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Bridge	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Mesh	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4

Note: 1.The above information was declared by manufacturer.

2.Only the AP mode was tested and recorded in this test report that is designated by the manufacturer.



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05r02

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	TEL : 886-3-327-3456	FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Eddie Weng	21~23.5°C / 51~56%	Mar. 25, 2019 ~ Apr. 17, 2019
Radiated <1GHz	03CH01-CB	Bruce Yang	22~24°C / 50~60%	Mar. 22, 2019
Radiated >1GHz	03CH01-CB	Justin Lin	22~24°C / 50~60%	Mar. 22, 2019 ~ Apr. 26, 2019
AC Conduction	CO01-CB	Wei Li	23.23~24.84°C / 58.12~58.75%	Mar. 25, 2019

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74 x10 ⁻⁸	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	PowerSetting
BT-LE(1Mbps)_1TX	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests									
Tests Item	AC power-line conducted emissions								
Condition	AC power-line conducted measurement for line and neutral								
Operating Mode	Normal Link								
	Radio 1 with 2.4GHz function	Radio 1 with 5GHz function	Radio 2 with 5GHz function	Radio 3 with Bluetooth	Radio 3 with Thread	EUT GE1	EUT GE2	PoE connect with EUT GE1	PoE connect with EUT GE2
1	● (Ant.1)	-	● (Ant.1)	● (Ant.3)	-	●	●	●	-
2	● (Ant.2)	-	● (Ant.2)	● (Ant.3)	-	●	●	●	-
3	-	● (Ant.1)	● (Ant.1)	● (Ant.3)	-	●	●	●	-
4	-	● (Ant.2)	● (Ant.2)	● (Ant.3)	-	●	●	●	-
Mode 2 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~6 of Thread function will follow this same test mode.									
5	● (Ant.2)	-	● (Ant.2)	-	● (Ant.3)	●	●	●	-
6	-	● (Ant.2)	● (Ant.2)	-	● (Ant.3)	●	●	●	-
Mode 2 has been evaluated to be the worst case among Mode 1~6, thus measurement for Mode 7 for another PoE port will follow this same test mode.									
7	● (Ant.2)	-	● (Ant.2)	● (Ant.3)	-	●	●	-	●
Mode 2 generated the worst test result, so it was recorded in this report.									

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests									
Tests Item	Emissions in Restricted Frequency Bands								
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.								
Operating Mode < 1GHz	Normal Link								
	Radio 1 with 2.4GHz function	Radio 1 with 5GHz function	Radio 2 with 5GHz function	Radio 3 with Bluetooth	Radio 3 with Thread	EUT GE1	EUT GE2	PoE connect with EUT GE1	PoE connect with EUT GE2
	1	● (Ant.1)	-	● (Ant.1)	● (Ant.3)	-	●	●	●
	2	● (Ant.2)	-	● (Ant.2)	● (Ant.3)	-	●	●	●
	3	-	● (Ant.1)	● (Ant.1)	● (Ant.3)	-	●	●	●
	4	-	● (Ant.2)	● (Ant.2)	● (Ant.3)	-	●	●	●
Mode 4 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~6 of Thread function will follow this same test mode.									
5	● (Ant.2)	-	● (Ant.2)	-	● (Ant.3)	●	●	●	-
6	-	● (Ant.2)	● (Ant.2)	-	● (Ant.3)	●	●	●	-
Mode 4 has been evaluated to be the worst case among Mode 1~6, thus measurement for Mode 7 for another PoE port will follow this same test mode.									
7	-	● (Ant.2)	● (Ant.2)	● (Ant.3)	-	●	●	-	●
For operating mode 4 is the worst case and it was record in this test report.									
Operating Mode > 1GHz	CTX								
1	EUT in Y axis								



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2) + Bluetooth (Radio 3)
2	WLAN 5GHz (Radio 1) + WLAN 5GHz (Radio 2) + Bluetooth (Radio 3)
3	WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2) + Thread (Radio 3)
4	WLAN 5GHz (Radio 1) + WLAN 5GHz (Radio 2) + Thread (Radio 3)
Refer to Sporton Test Report No.: FA8O1739-09 for Co-location RF Exposure Evaluation.	

Note 1:The EUT can only be used at Y axis.

Note 2:The PoE is for measurement only, would not be marketed.

The detail information as below:

Support Unit	Brand	Model
PoE	Microsemi	PD-9001GR/AT/AC

2.3 EUT Operation during Test

For Normal Link:

During the test, the EUT operation to normal function.

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

N/A



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Microsemi	PD-9001GR/AT/AC	N/A
B	GE1 PC	DELL	T3400	N/A
C	GE2 NB	DELL	E6430	N/A
D	WLAN2.4G NB	DELL	E6430	N/A
E	WLAN5G NB	DELL	E6430	N/A
F	802.11ax Access Point (Device)	Extreme Networks	AP505i	QXO-AP505I
G	Device NB	DELL	E6430	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	GE1 PC	DELL	T3400	N/A
B	WLAN2.4G NB	Apple	Mac Book	N/A
C	WLAN5G NB	Apple	Mac Book	N/A
D	Device NB	DELL	E4300	N/A
E	GE2 NB	DELL	E4300	N/A
F	802.11ax Access Point (Device)	Extreme Networks	AP505i	QXO-AP505I
G	PoE	Microsemi	PD-9001GR/AT/AC	N/A


**For Radiated (above 1GHz):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
E	PoE	Microsemi	PD-9001GR/AT/AC	N/A

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	Microsemi	PD-9001GR/AT/AC	N/A

2.6 Test Setup Diagram

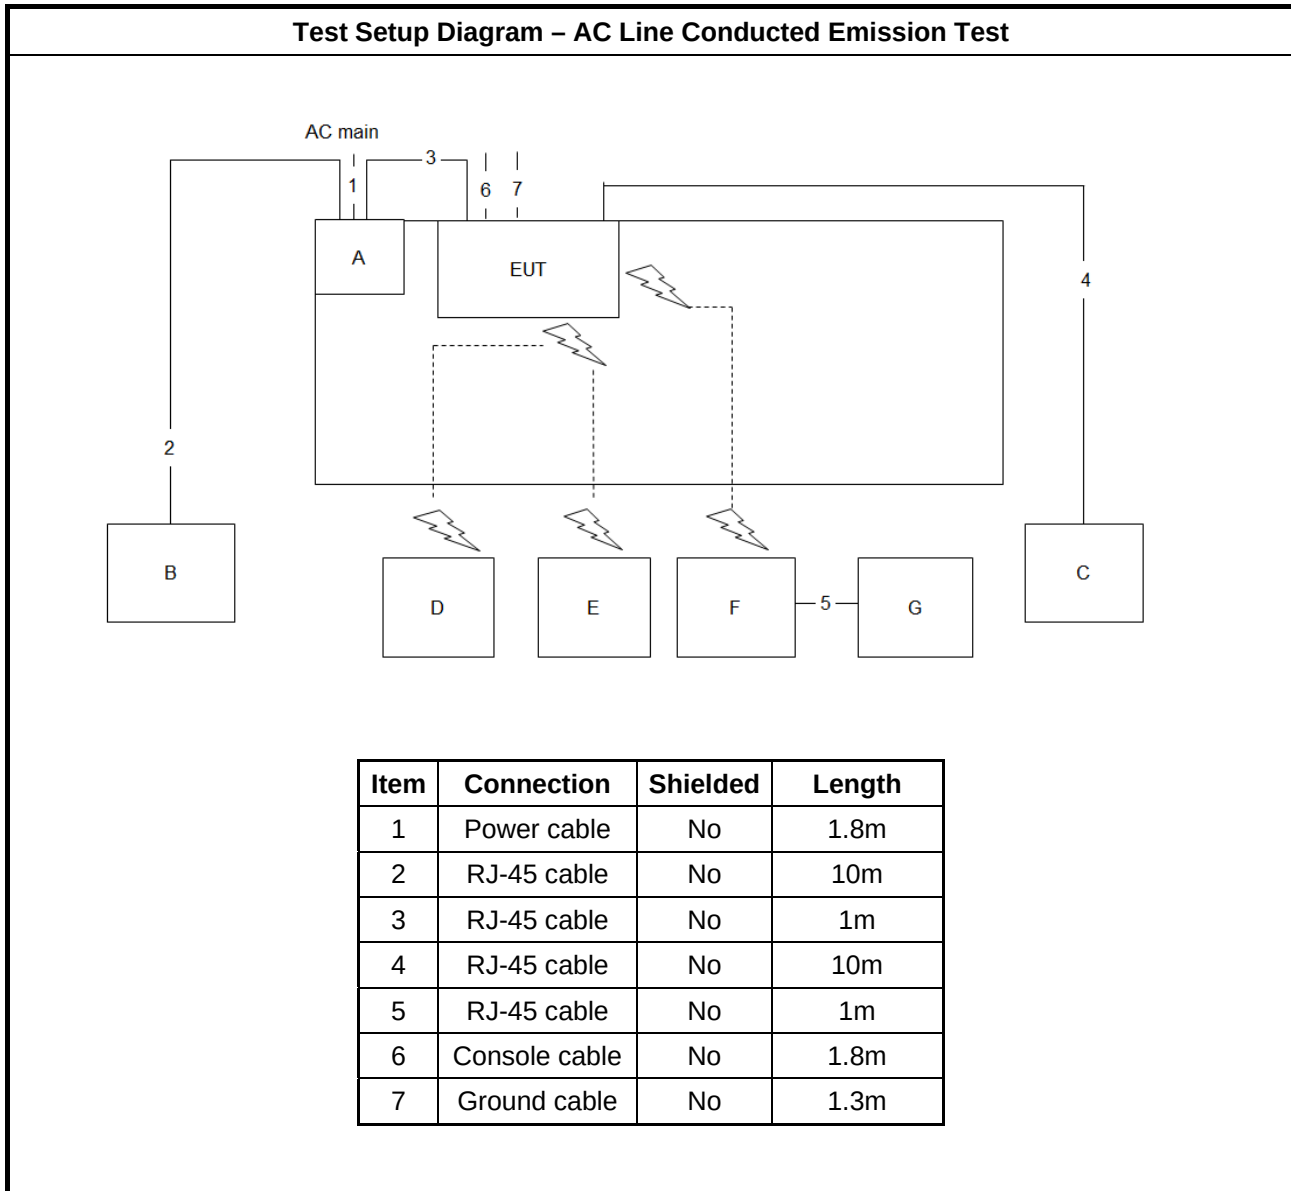

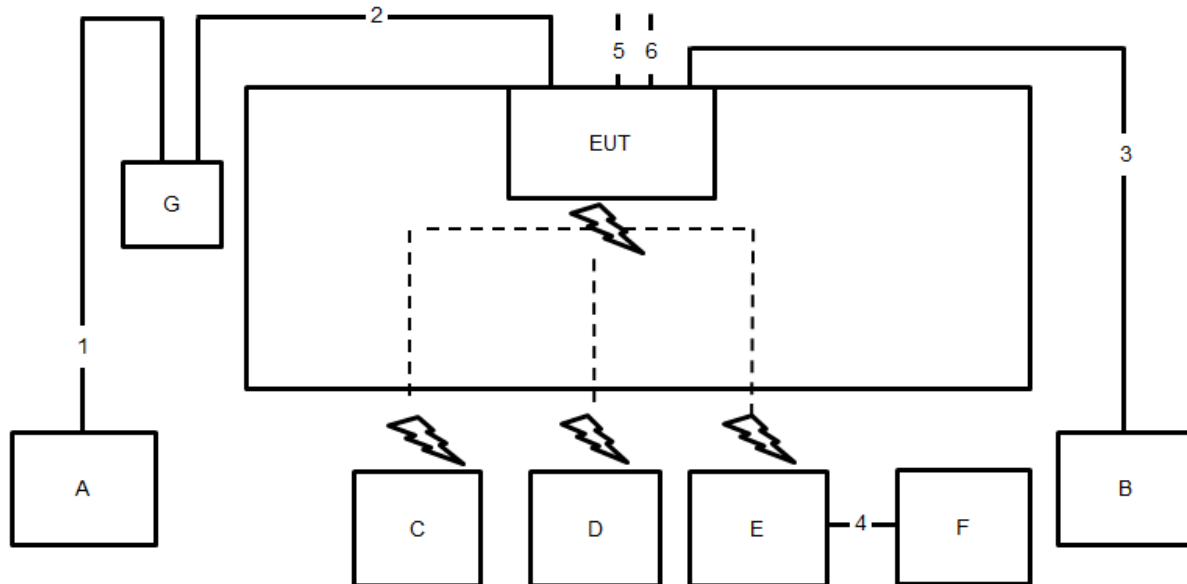Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	Console cable	No	1.5m
6	Ground cable	No	1.5m

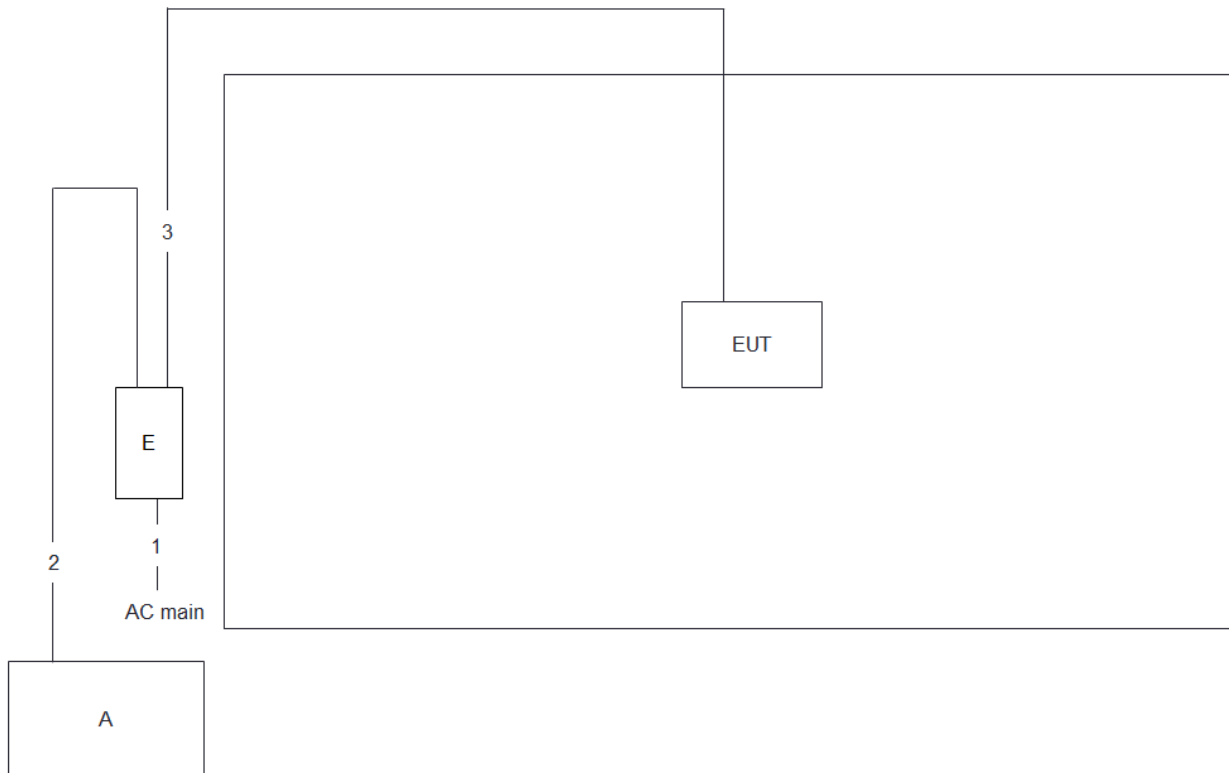Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

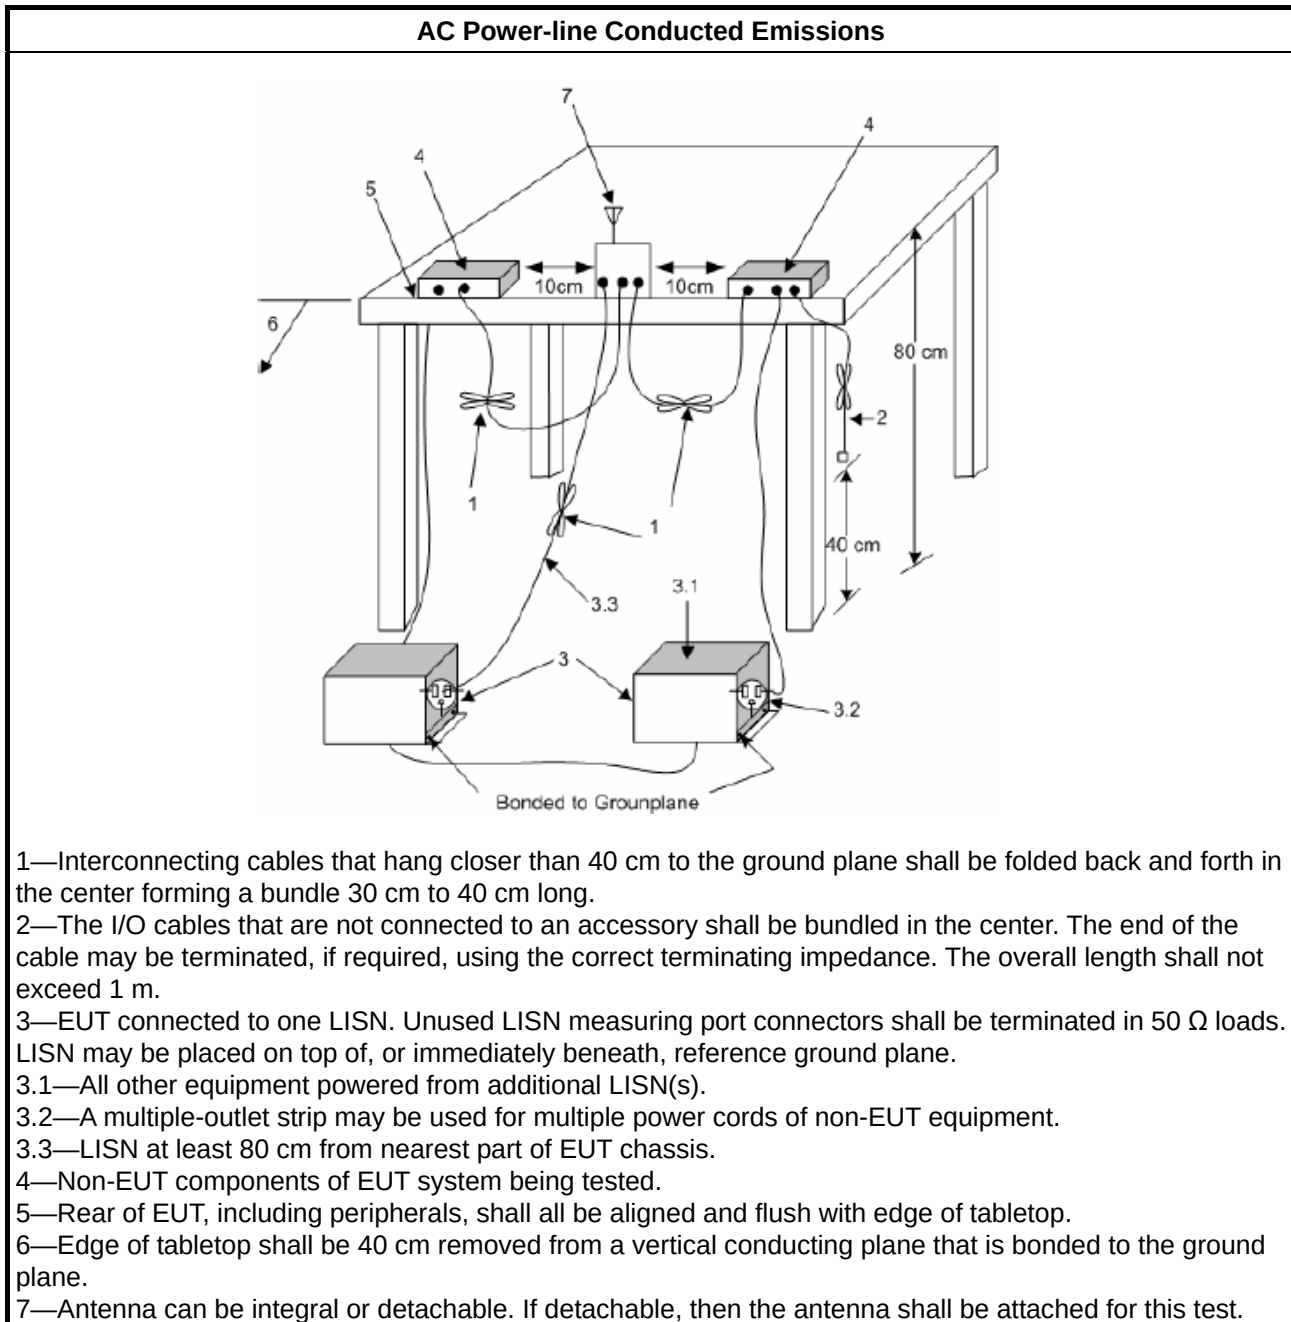

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

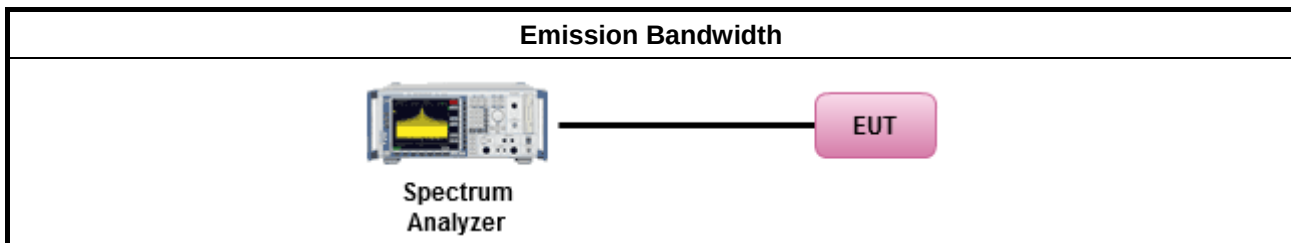

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

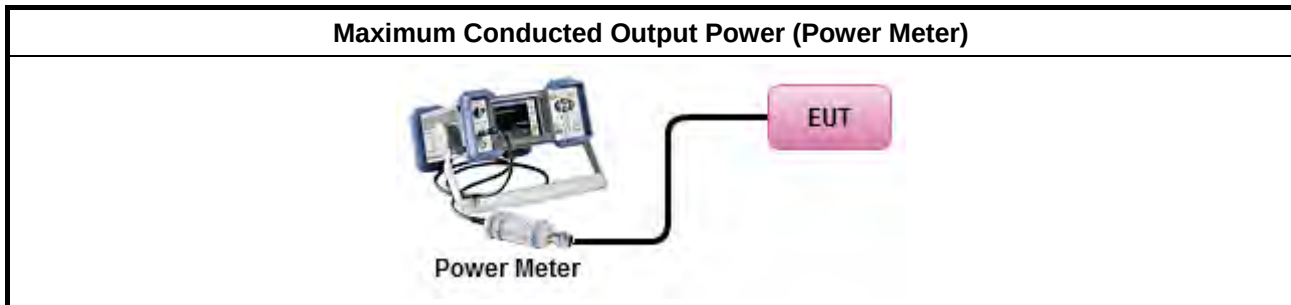

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.2 Method PKPSD. [duty cycle $\geq 98\%$ or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.3 Method AVGPS-1.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.5 Method AVGPS-2.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.7 Method AVGPS-3.
duty cycle $< 98\%$ and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.4 Method AVGPS-1A. (alternative).
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.6 Method AVGPS-2A. (alternative)
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.8 Method AVGPS-3A. (alternative)
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,

- | | |
|--|--|
| | ☐ Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit. |
|--|--|

3.4.4 Test Setup

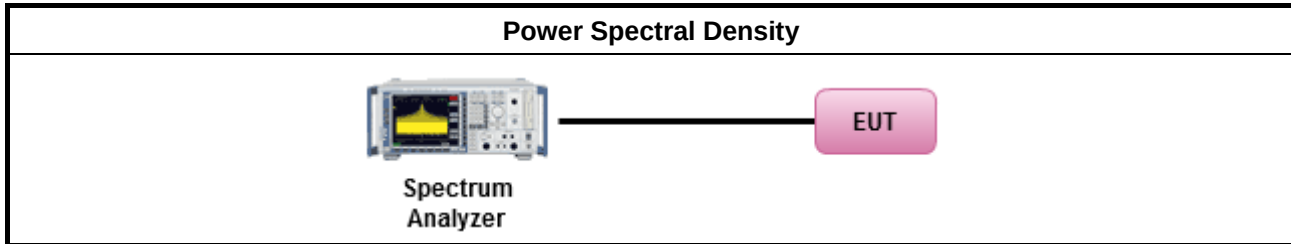

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

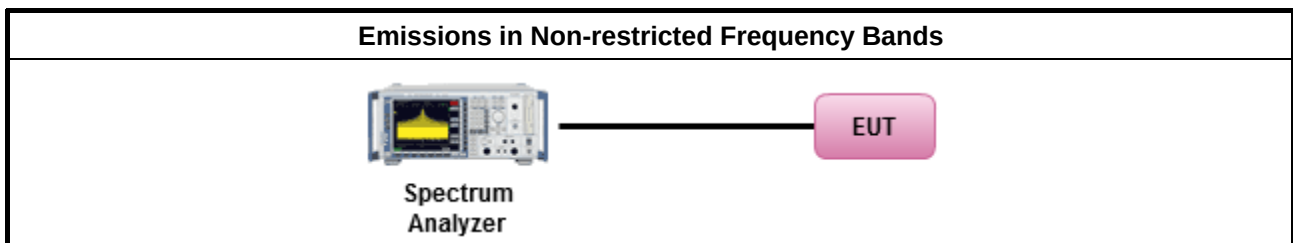

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
☐	Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

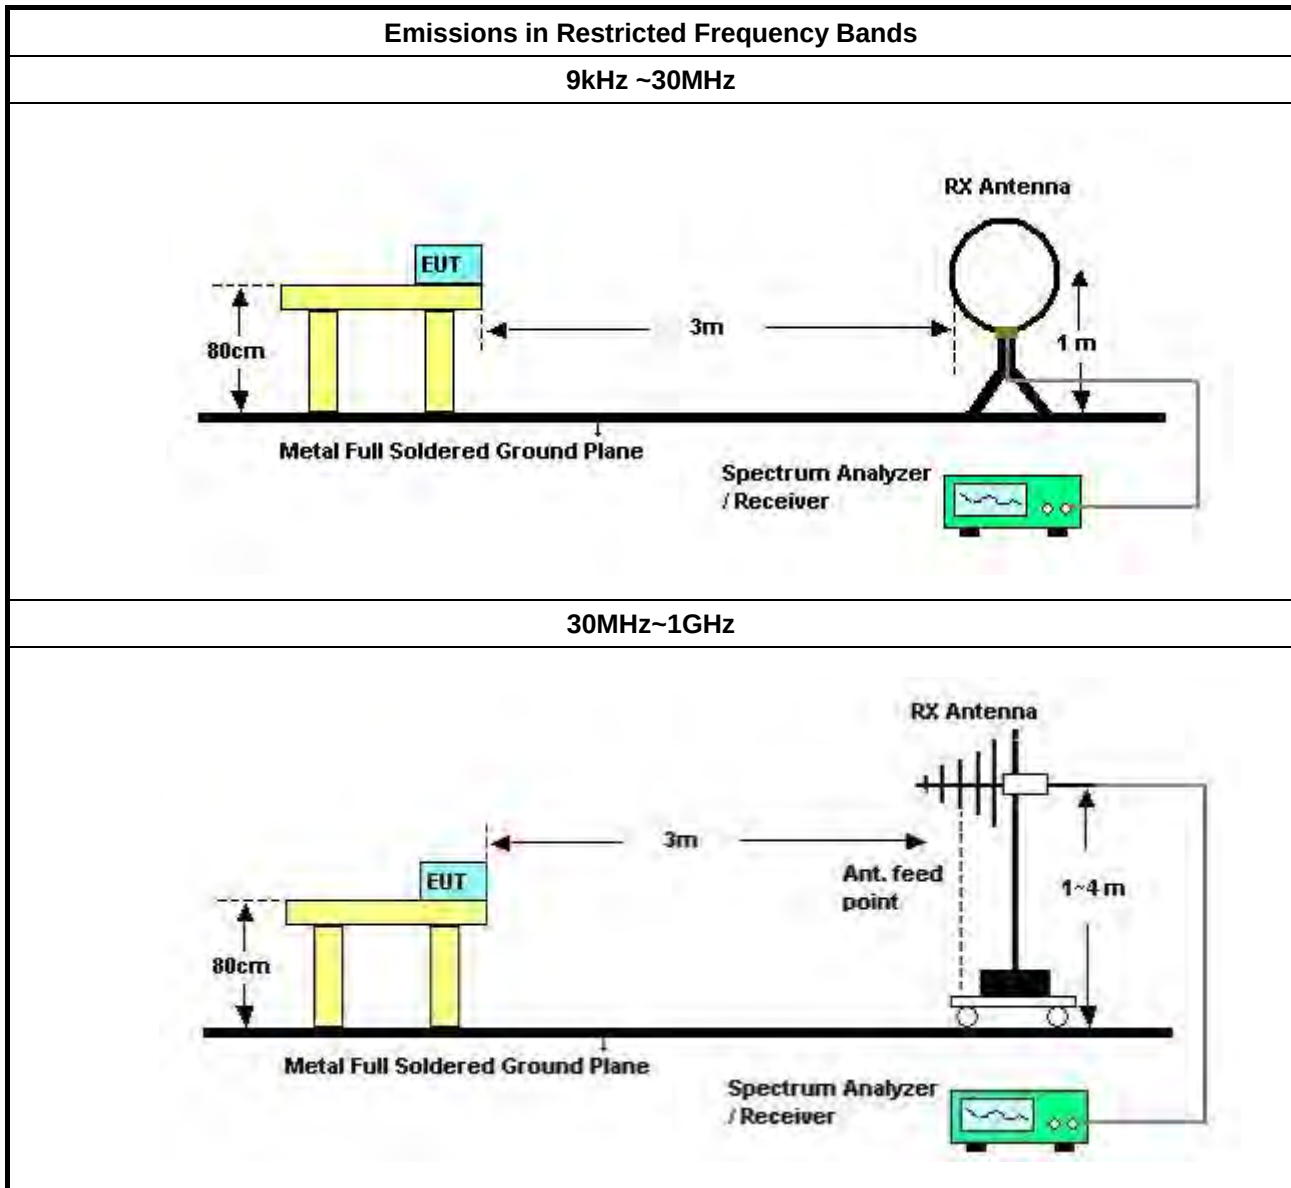

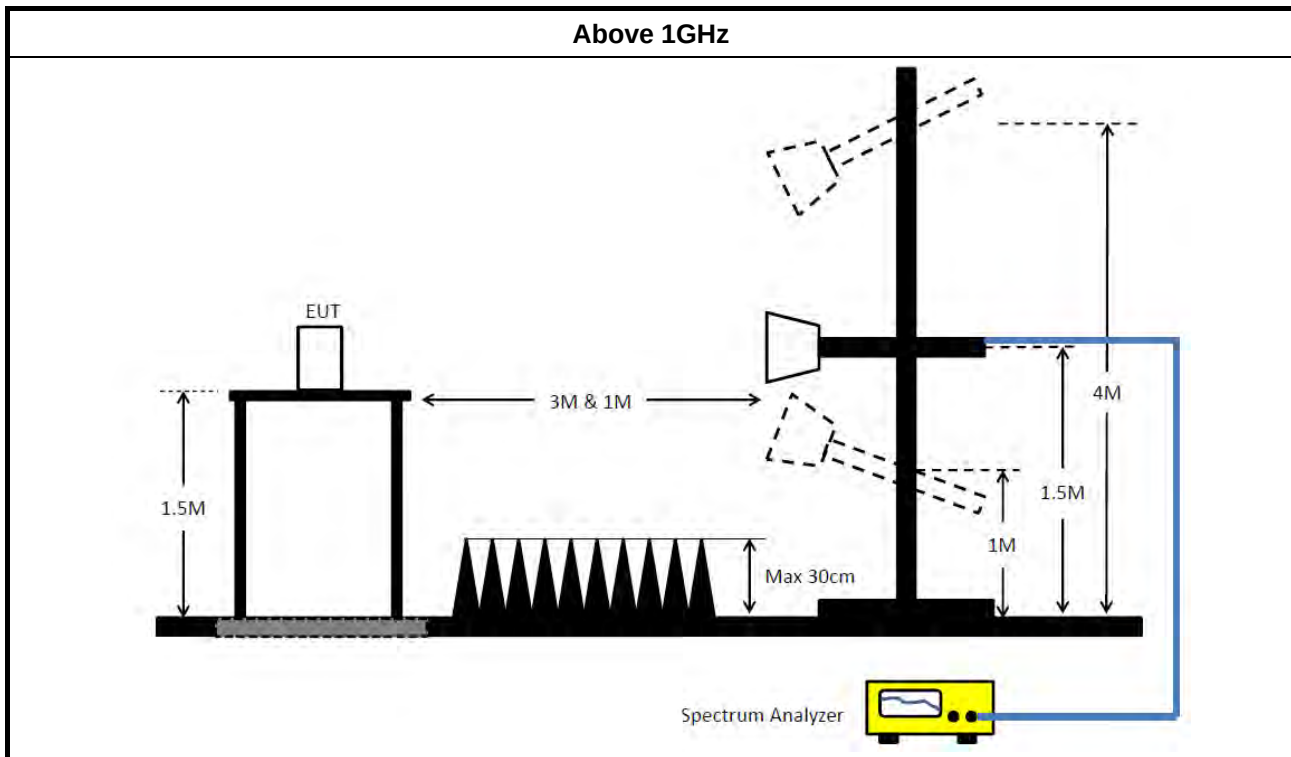

3.6.5 Emissions in Restricted Frequency Bands (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 28, 2019	Jan. 29, 2020	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 24, 2018	Dec. 23, 2019	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Jan. 11, 2019	Jan. 10, 2020	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	150kHz ~ 30MHz	May 22, 2018	May 21, 2019	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	31244	9kHz - 30 MHz	Mar. 15, 2019	Mar. 14, 2020	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Jan. 31, 2019	Jan. 30, 2020	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Feb. 25, 2019	Feb. 24, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz ~26.5 GHz	Nov. 19, 2018	Nov. 18, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 05, 2018	Nov. 04, 2019	Conducted (TH01-CB)


Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Test Mode	Mode 2	Frequency Range	0.15 MHz to 30 MHz
-----------	--------	-----------------	--------------------

Mode 2

25/03/2019

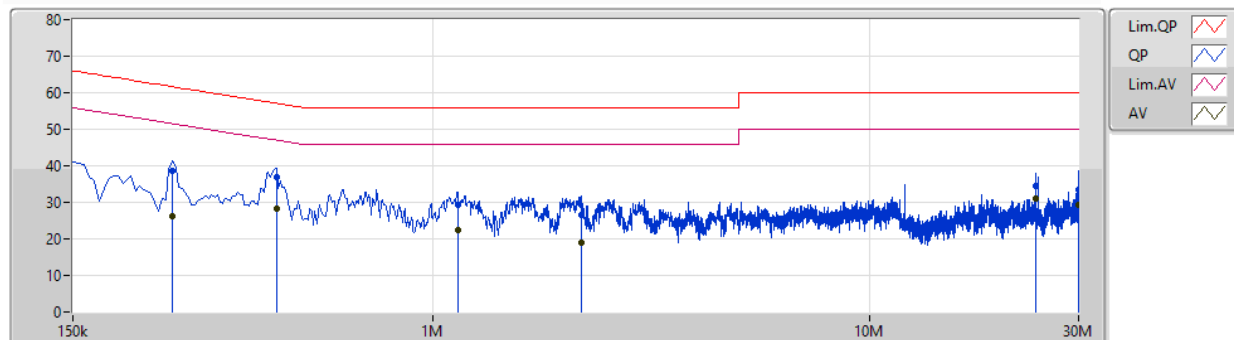


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	253.5k	38.46	61.64	-23.18	9.99	Line	-	28.47	0.06	0.13	9.80
AV	253.5k	26.10	51.64	-25.54	9.99	Line	-	16.11	0.06	0.13	9.80
QP	438k	37.00	57.11	-20.11	10.00	Line	-	27.00	0.06	0.13	9.81
AV	438k	28.25	47.11	-18.86	10.00	Line	"Worst"	18.25	0.06	0.13	9.81
QP	1.14M	29.41	56.00	-26.59	10.09	Line	-	19.32	0.07	0.20	9.82
AV	1.14M	22.25	46.00	-23.75	10.09	Line	-	12.16	0.07	0.20	9.82
QP	2.18M	26.67	56.00	-29.33	10.14	Line	-	16.53	0.09	0.22	9.83
AV	2.18M	18.91	46.00	-27.09	10.14	Line	-	8.77	0.09	0.22	9.83
QP	24.009M	34.36	60.00	-25.64	10.59	Line	-	23.77	0.32	0.26	10.01
AV	24.009M	30.93	50.00	-19.07	10.59	Line	-	20.34	0.32	0.26	10.01
QP	30M	33.55	60.00	-26.45	10.70	Line	-	22.85	0.36	0.29	10.05
AV	30M	29.32	50.00	-20.68	10.70	Line	-	18.62	0.36	0.29	10.05

Test Mode	Mode 2	Frequency Range	0.15 MHz to 30 MHz
-----------	--------	-----------------	--------------------

Mode 2

25/03/2019

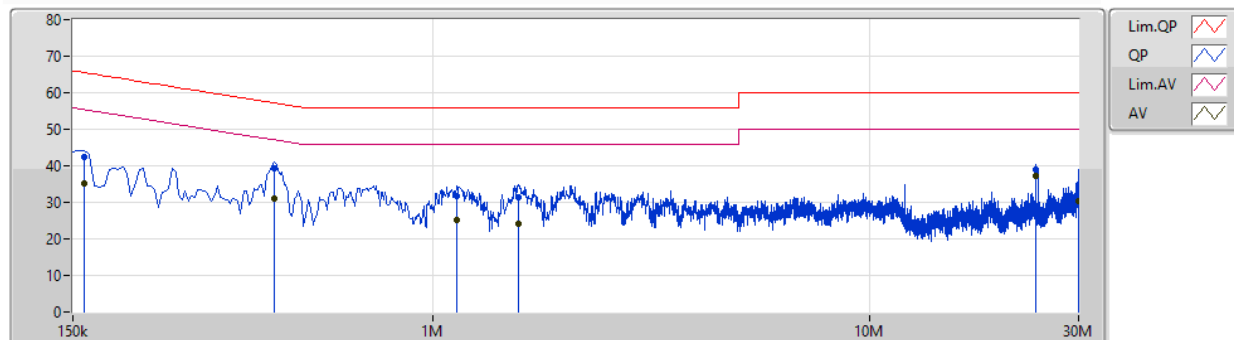

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	159k	42.25	65.52	-23.27	9.99	Neutral	-	32.26	0.04	0.16	9.79			
AV	159k	35.11	55.52	-20.41	9.99	Neutral	-	25.12	0.04	0.16	9.79			
QP	433.5k	39.23	57.19	-17.96	9.98	Neutral	-	29.25	0.04	0.13	9.81			
AV	433.5k	30.91	47.19	-16.28	9.98	Neutral	-	20.93	0.04	0.13	9.81			
QP	1.131M	31.73	56.00	-24.27	10.08	Neutral	-	21.65	0.06	0.20	9.82			
AV	1.131M	25.11	46.00	-20.89	10.08	Neutral	-	15.03	0.06	0.20	9.82			
QP	1.568M	31.42	56.00	-24.58	10.12	Neutral	-	21.30	0.07	0.22	9.83			
AV	1.568M	24.07	46.00	-21.93	10.12	Neutral	-	13.95	0.07	0.22	9.83			
QP	24.005M	39.04	60.00	-20.96	10.58	Neutral	-	28.46	0.31	0.26	10.01			
AV	24.005M	37.10	50.00	-12.90	10.58	Neutral	"Worst"	26.52	0.31	0.26	10.01			
QP	30M	34.80	60.00	-25.20	10.72	Neutral	-	24.08	0.38	0.29	10.05			
AV	30M	30.21	50.00	-19.79	10.72	Neutral	-	19.49	0.38	0.29	10.05			

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)_1TX	692.5k	1.031M	1M03F1D	677.5k	1.022M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)_1TX	-	-	-	-
2402MHz	Pass	500k	677.5k	1.022M
2440MHz	Pass	500k	683.75k	1.029M
2480MHz	Pass	500k	692.5k	1.031M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)_1TX
EBW
2402MHz


28/03/2019

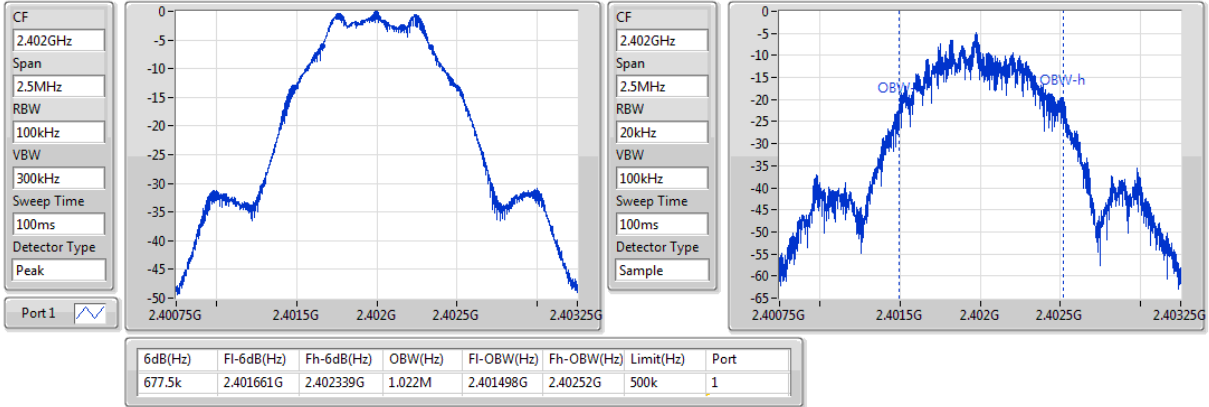
BT-LE(1Mbps)_1TX
EBW
2440MHz

28/03/2019

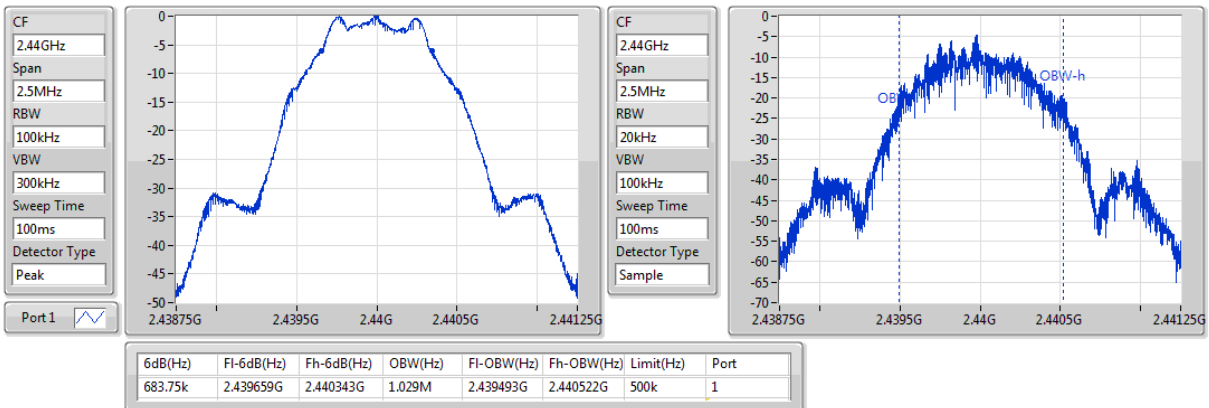
BT-LE(1Mbps)_1TX
EBW
2480MHz

28/03/2019

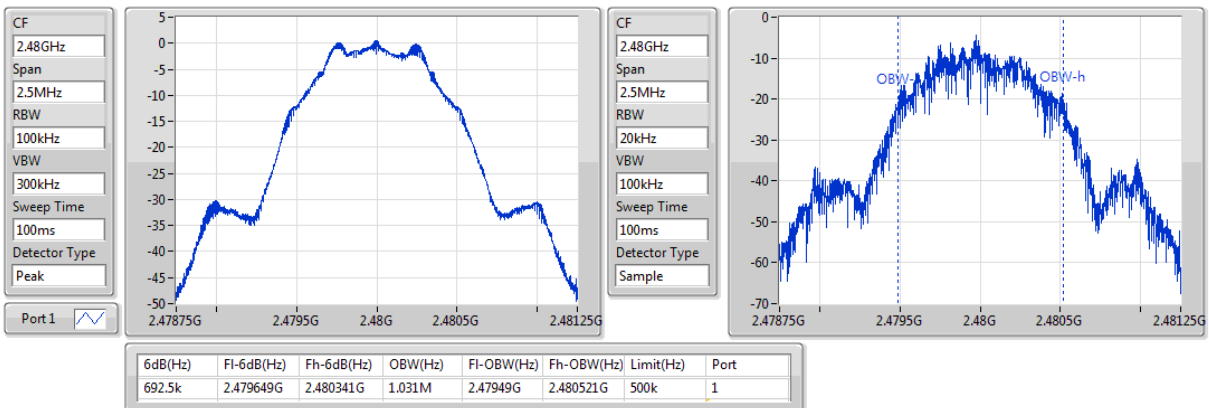

**Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)_1TX	-0.93	0.00081

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)_1TX	-	-	-	-	-
2402MHz	Pass	2.61	-1.05	-1.05	30.00
2440MHz	Pass	2.61	-0.93	-0.93	30.00
2480MHz	Pass	2.61	-1.28	-1.28	30.00

DG = Directional Gain; Port X = Port X output power.

Note : Conducted average output power is for reference only.

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)_1TX	-13.84

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)_1TX	-	-	-	-	-
2402MHz	Pass	2.61	-15.58	-15.58	8.00
2440MHz	Pass	2.61	-13.84	-13.84	8.00
2480MHz	Pass	2.61	-14.08	-14.08	8.00


DG = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

BT-LE(1Mbps)_1TX

PSD

2402MHz

28/03/2019

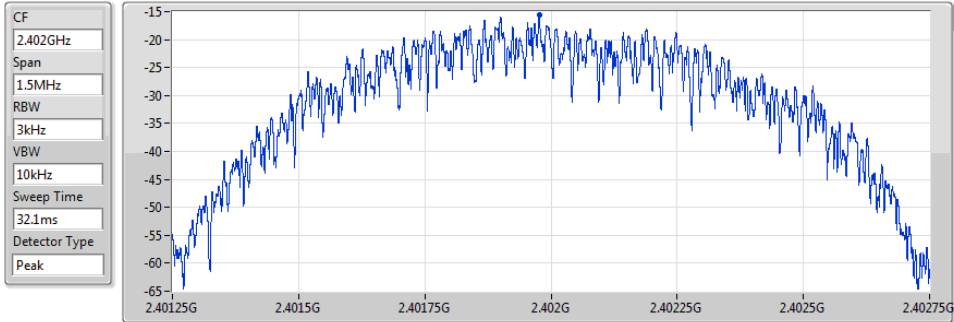


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-15.58	-15.58	-15.58

BT-LE(1Mbps)_1TX

PSD

2440MHz

28/03/2019

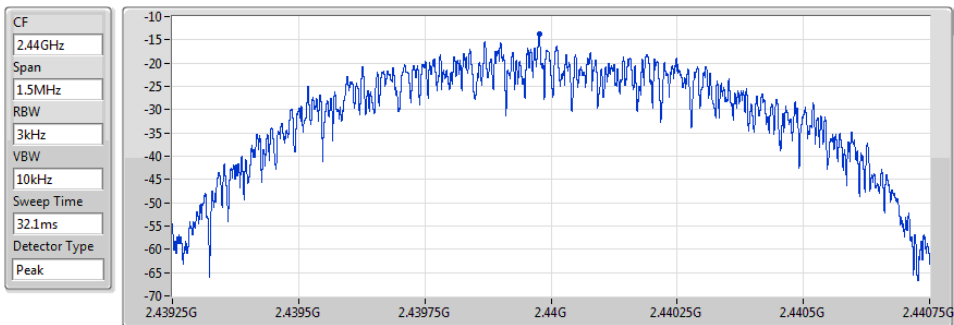


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.84	-13.84	-13.84

BT-LE(1Mbps)_1TX

PSD

2480MHz

28/03/2019

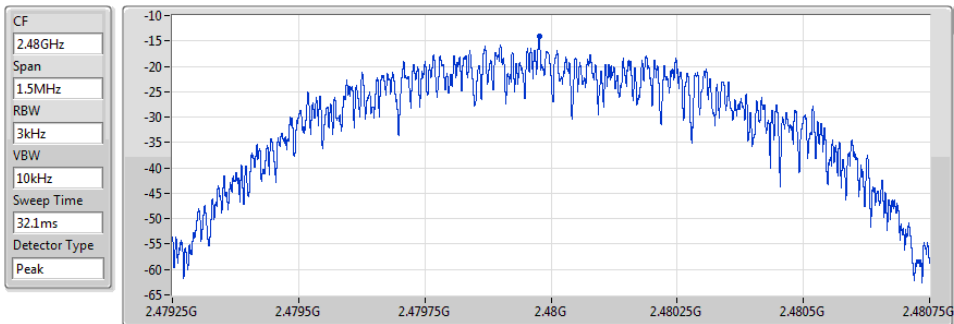

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.08	-14.08	-14.08



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)_1TX	Pass	2.43995G	-15.80	-45.80	1.88503G	-58.48	2.39804G	-58.08	2.48501G	-57.94	16.3094G	-50.03	1


Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.43995G	-15.80	-45.80	1.88503G	-58.48	2.39804G	-58.08	2.48501G	-57.94	16.3094G	-50.03	1
2440MHz	Pass	2.43995G	-15.80	-45.80	2.15469G	-59.75	2.39935G	-59.02	2.48377G	-58.48	24.27954G	-50.16	1
2480MHz	Pass	2.43995G	-15.80	-45.80	750.76M	-59.86	2.39865G	-59.62	2.48368G	-56.55	15.29344G	-50.66	1

BT-LE(1Mbps)_1TX

CSE NdB


2402MHz

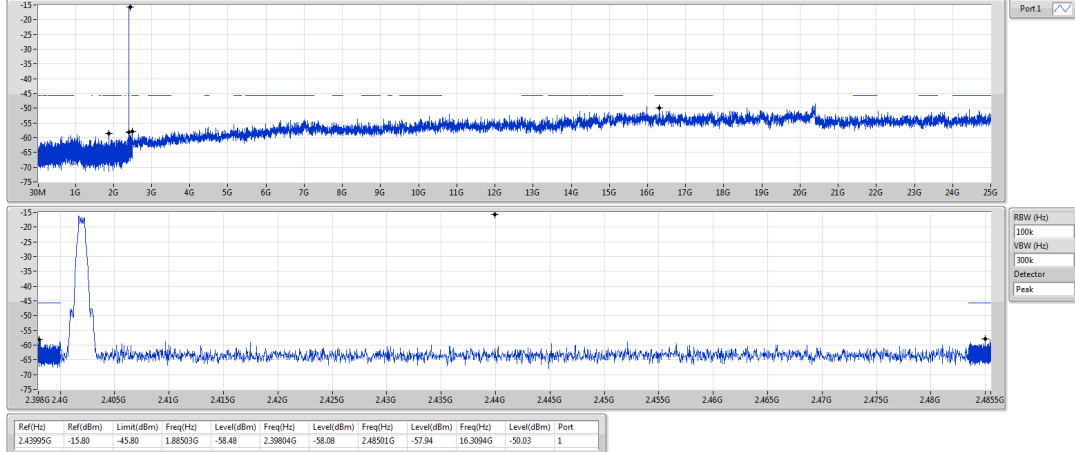

BT-LE(1Mbps)_1TX

CSE NdB


2440MHz

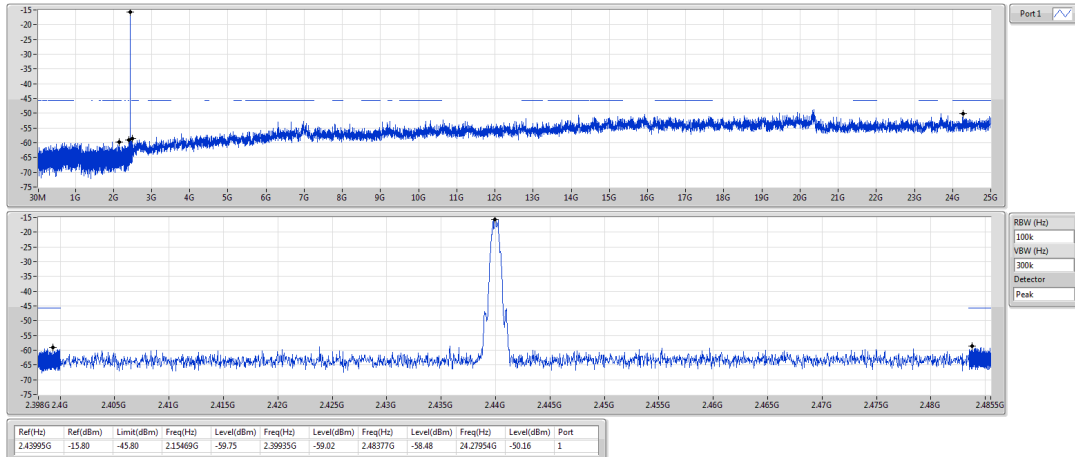

BT-LE(1Mbps)_1TX

CSE NdB

2480MHz

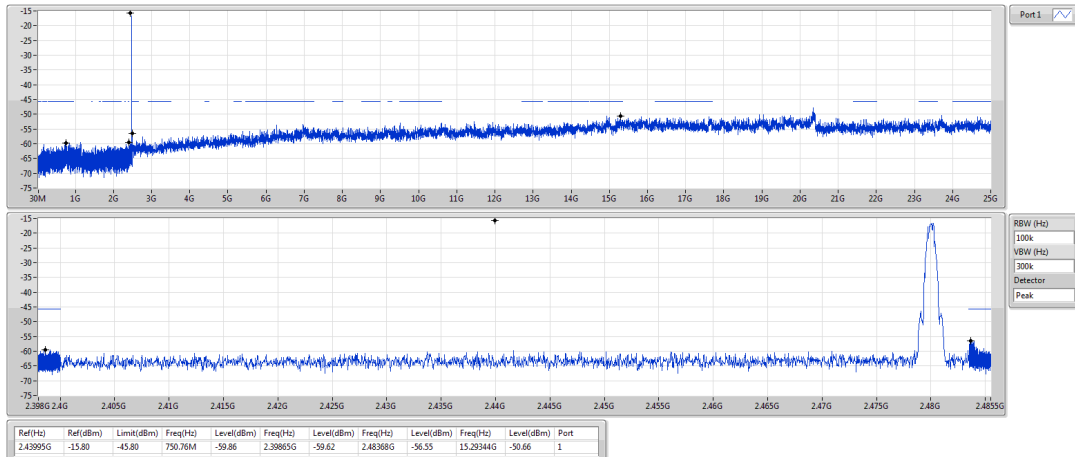




Radiated Emission below 1GHz Result

Appendix F.1


Test Mode	Mode 4	Frequency Range	30 MHz to 1,000 MHz
-----------	--------	-----------------	---------------------

Vertical 30 MHz to 1,000 MHz

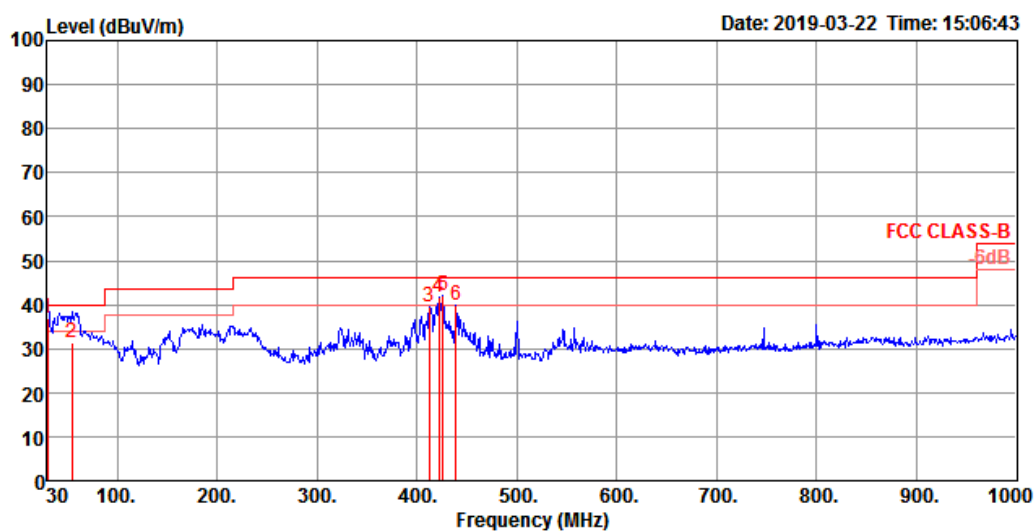

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.00	36.86	40.00	-3.14	44.70	0.49	24.10	32.43	100	312	QP	VERTICAL
2	54.25	31.34	40.00	-8.66	50.30	0.75	12.70	32.41	125	212	QP	VERTICAL
3	412.18	39.60	46.00	-6.40	47.54	2.19	22.16	32.29	125	359	Peak	VERTICAL
4	421.88	41.82	46.00	-4.18	49.33	2.23	22.55	32.29	150	29	Peak	VERTICAL
5	425.76	42.01	46.00	-3.99	49.49	2.24	22.58	32.30	150	322	Peak	VERTICAL
6	439.34	39.95	46.00	-6.05	47.29	2.28	22.69	32.31	150	347	Peak	VERTICAL

Horizontal 30 MHz to 1,000 MHz

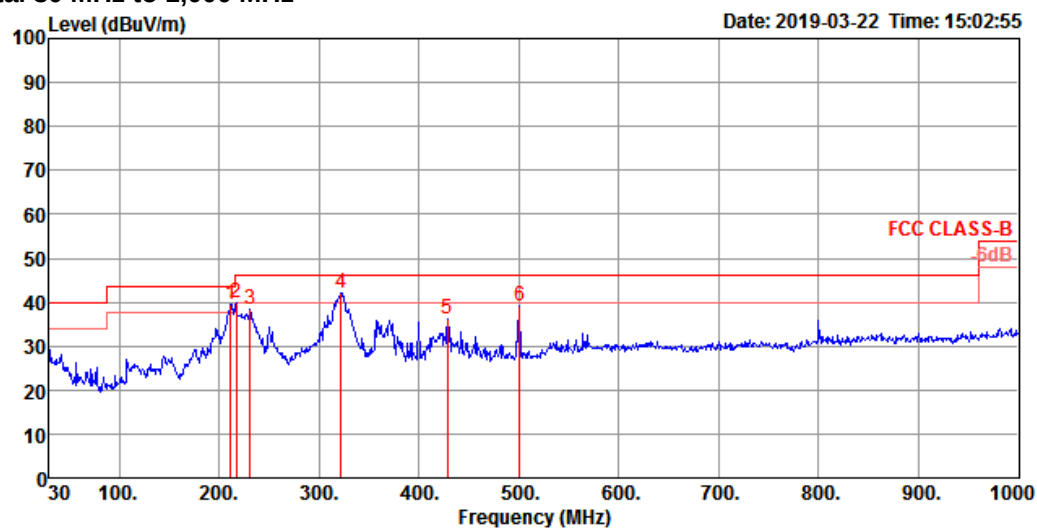

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	211.39	39.55	43.50	-3.95	55.10	1.51	15.23	32.29	150	152 Peak	HORIZONTAL
2	217.21	39.73	46.00	-6.27	55.28	1.53	15.21	32.29	125	185 Peak	HORIZONTAL
3	230.79	38.26	46.00	-7.74	52.67	1.57	16.31	32.29	100	183 Peak	HORIZONTAL
4	321.97	42.00	46.00	-4.00	52.81	1.93	19.52	32.26	100	167 Peak	HORIZONTAL
5	428.67	36.18	46.00	-9.82	43.63	2.25	22.60	32.30	300	221 Peak	HORIZONTAL
6	500.45	38.96	46.00	-7.04	45.51	2.38	23.42	32.35	150	173 Peak	HORIZONTAL


**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)_1TX	Pass	PK	2.4838G	68.02	74.00	-5.98	30.96	3	Horizontal	205	1.48	-

BT-LE(1Mbps)_1TX

2402MHz_TX

27/03/2019

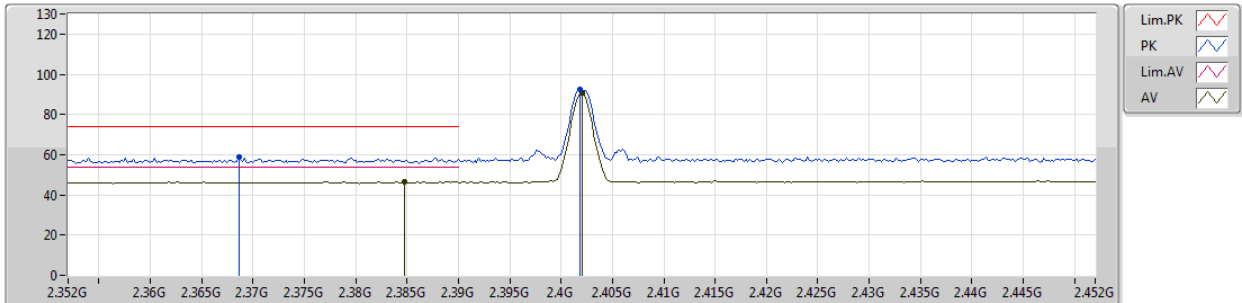


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.3686G	59.11	74.00	-14.89	30.72	3	Vertical	300	2.44	-						
AV	2.3848G	46.46	54.00	-7.54	30.78	3	Vertical	300	2.44	-						
PK	2.4018G	92.26	Inf	-Inf	30.84	3	Vertical	300	2.44	-						
AV	2.402G	90.84	Inf	-Inf	30.84	3	Vertical	300	2.44	-						

BT-LE(1Mbps)_1TX

27/03/2019

2402MHz_TX

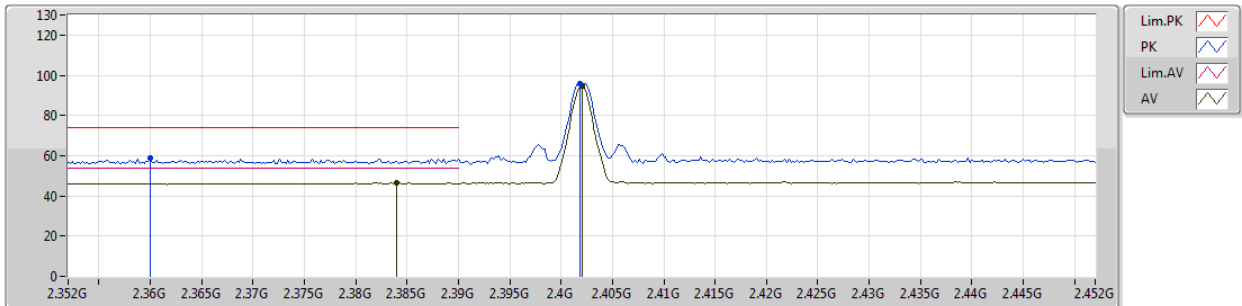


EUT V_1TX
Setting Default
01-E-4
FSU

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.36G	58.82	74.00	-15.18	30.69	3	Horizontal	182	1.94	-
AV	2.384G	46.43	54.00	-7.57	30.78	3	Horizontal	182	1.94	-
PK	2.4018G	96.03	Inf	-Inf	30.84	3	Horizontal	182	1.94	-
AV	2.402G	94.62	Inf	-Inf	30.84	3	Horizontal	182	1.94	-

BT-LE(1Mbps)_1TX

27/03/2019

2402MHz_TX

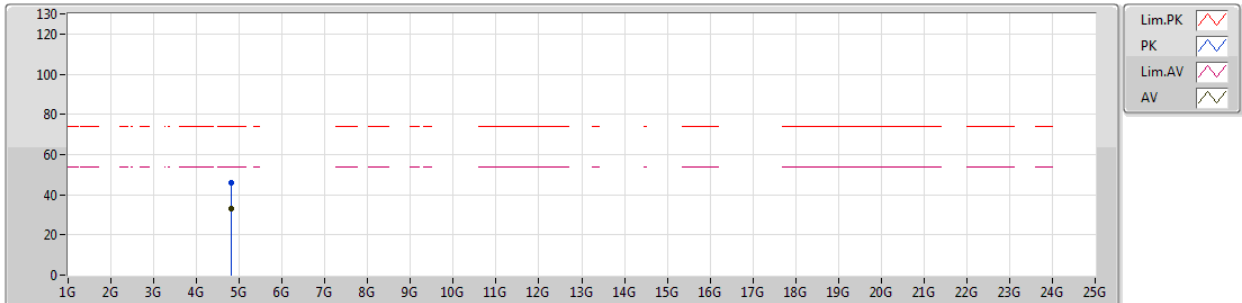


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	4.80764G	45.70	74.00	-28.30	3.51	3	Vertical	290	1.50	-						
AV	4.80336G	33.02	54.00	-20.98	3.49	3	Vertical	290	1.50	-						

BT-LE(1Mbps)_1TX

27/03/2019

2402MHz_TX

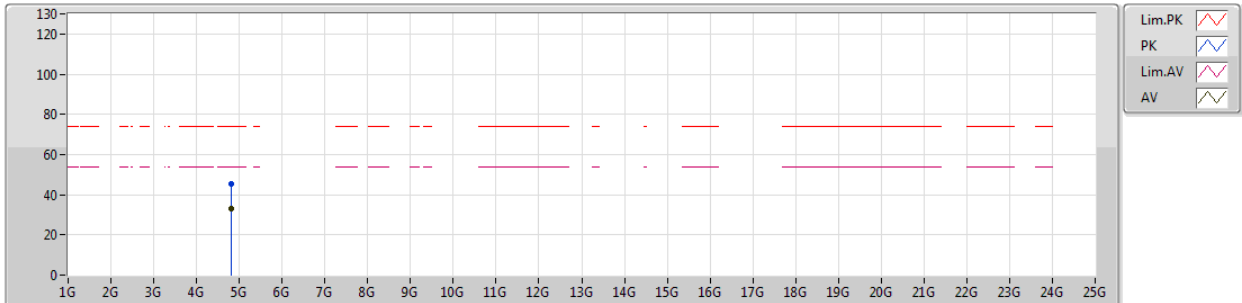


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.80732G	45.48	74.00	-28.52	3.51	3	Horizontal	330	2.10	-						
AV	4.80878G	32.87	54.00	-21.13	3.52	3	Horizontal	330	2.10	-						

BT-LE(1Mbps)_1TX

27/03/2019

2440MHz_TX

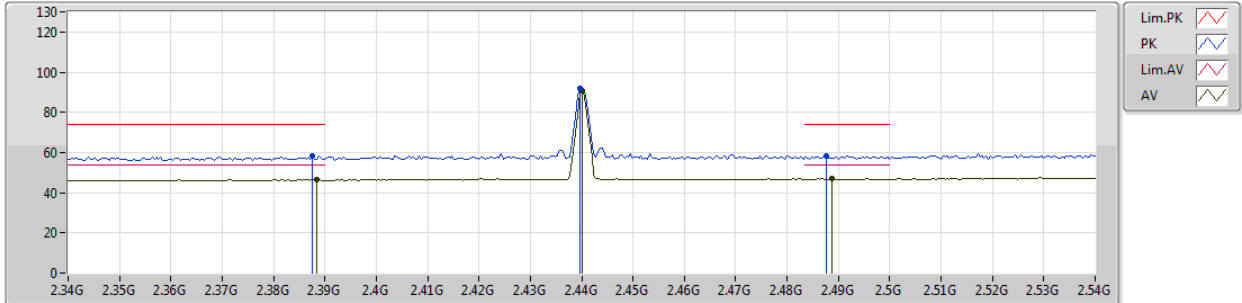


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3876G	58.37	74.00	-15.63	30.79	3	Vertical	264	1.53	-
AV	2.3884G	46.50	54.00	-7.50	30.80	3	Vertical	264	1.53	-
PK	2.4396G	91.98	Inf	-Inf	30.90	3	Vertical	264	1.53	-
AV	2.44G	90.59	Inf	-Inf	30.90	3	Vertical	264	1.53	-
PK	2.4876G	58.49	74.00	-15.51	30.97	3	Vertical	264	1.53	-
AV	2.4888G	46.98	54.00	-7.02	30.97	3	Vertical	264	1.53	-

BT-LE(1Mbps)_1TX

27/03/2019

2440MHz_TX

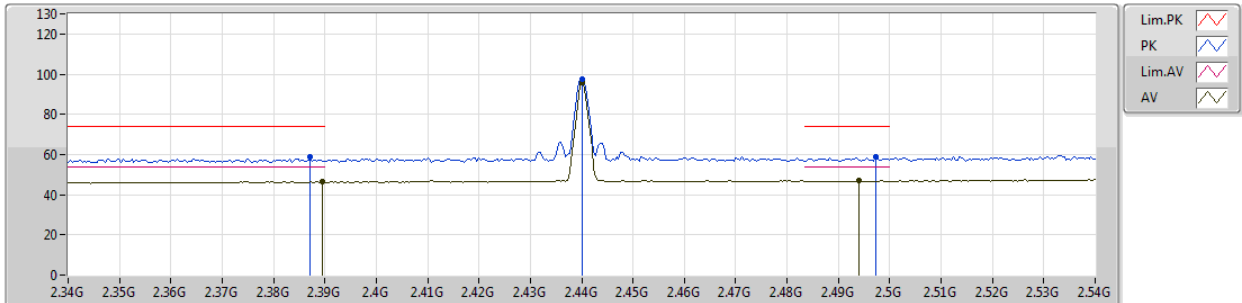


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3872G	58.65	74.00	-15.35	30.79	3	Horizontal	242	2.13	-
AV	2.3896G	46.48	54.00	-7.52	30.80	3	Horizontal	242	2.13	-
PK	2.44G	97.33	Inf	-Inf	30.90	3	Horizontal	242	2.13	-
AV	2.44G	95.99	Inf	-Inf	30.90	3	Horizontal	242	2.13	-
PK	2.4972G	58.59	74.00	-15.41	30.99	3	Horizontal	242	2.13	-
AV	2.494G	46.88	54.00	-7.12	30.98	3	Horizontal	242	2.13	-

BT-LE(1Mbps)_1TX

27/03/2019

2440MHz_TX

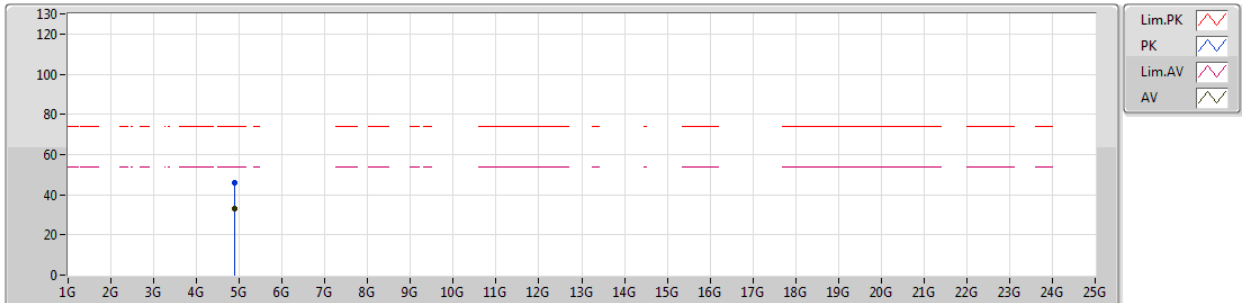


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	4.88254G	46.22	74.00	-27.78	3.85	3	Vertical	211	1.59	-						
AV	4.87888G	33.17	54.00	-20.83	3.83	3	Vertical	211	1.59	-						

BT-LE(1Mbps)_1TX

27/03/2019

2440MHz_TX

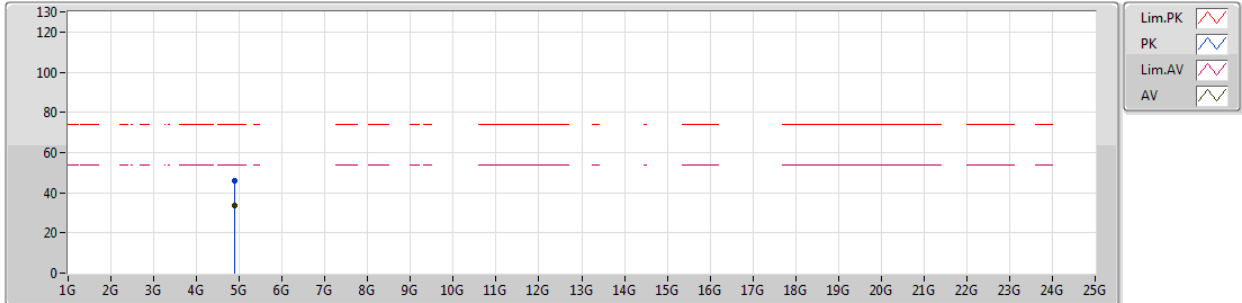


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	4.88216G	45.99	74.00	-28.01	3.85	3	Horizontal	190	1.16	-
AV	4.87856G	33.58	54.00	-20.42	3.83	3	Horizontal	190	1.16	-

BT-LE(1Mbps)_1TX

27/03/2019

2480MHz_TX

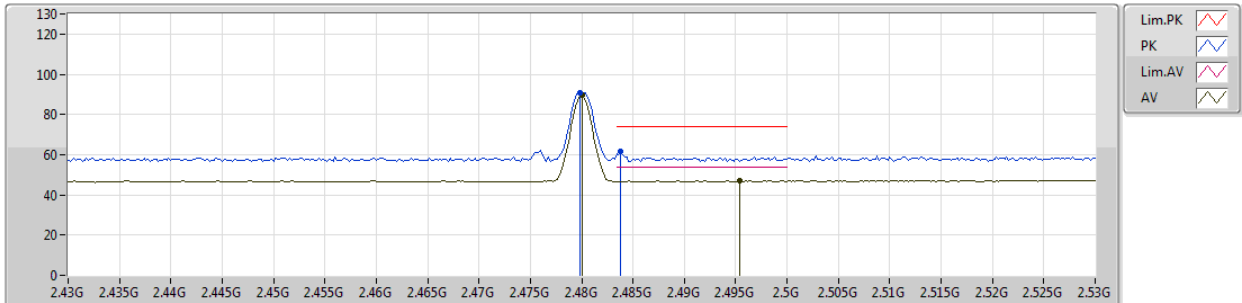


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.4798G	90.83	Inf	-Inf	30.96	3	Vertical	185	2.14	-						
AV	2.48G	89.42	Inf	-Inf	30.96	3	Vertical	185	2.14	-						
PK	2.4838G	61.54	74.00	-12.46	30.96	3	Vertical	185	2.14	-						
AV	2.4954G	46.95	54.00	-7.05	30.99	3	Vertical	185	2.14	-						

BT-LE(1Mbps)_1TX

27/03/2019

2480MHz_TX

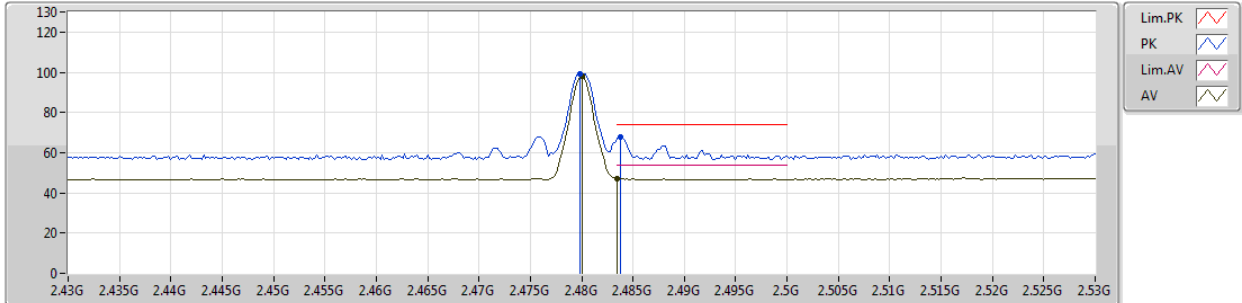


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.4798G	99.40	Inf	-Inf	30.96	3	Horizontal	205	1.48	-						
AV	2.48G	97.93	Inf	-Inf	30.96	3	Horizontal	205	1.48	-						
PK	2.4838G	68.02	74.00	-5.98	30.96	3	Horizontal	205	1.48	-						
AV	2.4835G	47.15	54.00	-6.85	30.96	3	Horizontal	205	1.48	-						

BT-LE(1Mbps)_1TX

27/03/2019

2480MHz_TX

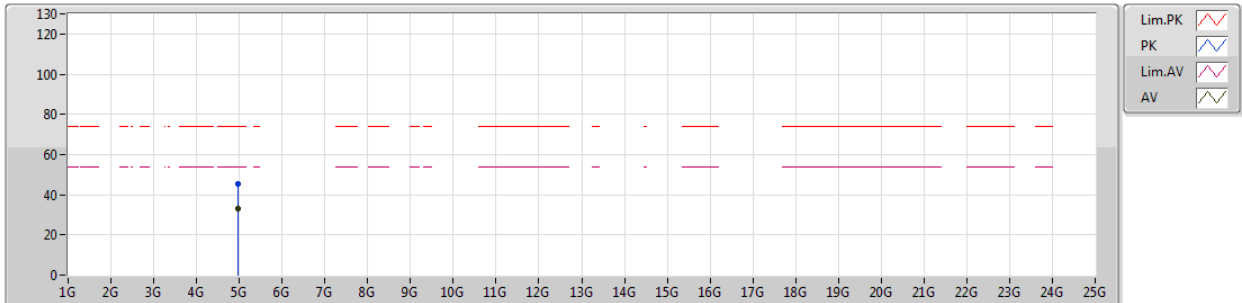


EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	4.9599G	45.29	74.00	-28.71	4.20	3	Vertical	135	1.55	-						
AV	4.96008G	32.97	54.00	-21.03	4.20	3	Vertical	135	1.55	-						

BT-LE(1Mbps)_1TX

27/03/2019

2480MHz_TX

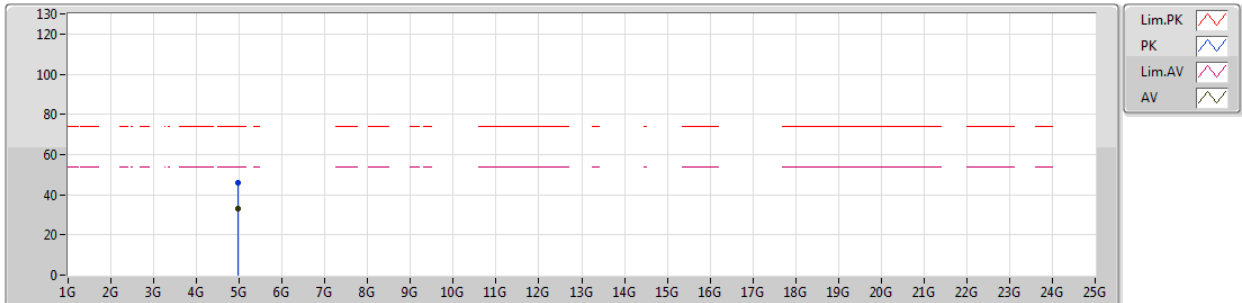

EUT Y_1TX
Setting Default
01-E-4
FSU

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.96234G	45.85	74.00	-28.15	4.21	3	Horizontal	227	1.85	-						
AV	4.96236G	32.92	54.00	-21.08	4.21	3	Horizontal	227	1.85	-						