

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : 1M Phoneline Network, 10/100 Fast Ethernet PC Card

Model No. : HF1000 rev. A1

FCC ID : MQ4HF1KA

Filing Type : Certification

**Applicant : AboCom Systems, Inc.
1F, No. 21, R&D Road II,
Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C**

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	7
3. Test Software	8
4. General Information of Test	9
4.1. Test Facility	9
4.2. Standard for Methods of Measurement	9
4.3. Test in Compliance with	9
4.4. Frequency Range Investigated	9
4.5. Test Distance	9
5. Test of Conducted Powerline	10
5.1. Major Measuring Instruments	10
5.2. Test Procedures	11
5.3. Typical Test Setup Layout of Conducted Powerline	12
5.4. Test Result of AC Powerline Conducted Emission	13
5.5. Photographs of Conducted Powerline Test Configuration	16
6. Test of Radiated Emission	18
6.1. Major Measuring Instruments	18
6.2. Test Procedures	19
6.3. Typical Test Setup Layout of Radiated Emission	20
6.4. Test Result of Radiated Emission	21
6.5. Photographs of Radiated Emission Test Configuration	24
7. Antenna Factor & Cable Loss	25
8. List of Measuring Equipments Used	26

CERTIFICATE OF COMPLIANCE

for

CISPR PUB. 22 Class B

Equipment : 1M Phoneline Network, 10/100 Fast Ethernet PC Card


Model No. : HF1000 rev. A1

FCC ID : MQ4HF1KA

Applicant : **AboCom Systems, Inc.**
1F, No. 21, R&D Road II,
Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Aug. 10, 1999 at **SPORTON International Inc.** LAB. in Lin Kou.


Lenore Chang
President

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

AboCom Systems, Inc.
1F, No. 21, R&D Road II,
Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment : 1M Phoneline Network, 10/100 Fast Ethernet PC Card
Model No. : HF1000 rev. A1
FCC ID : MQ4HF1KA
Trade Name : AboCom
Telephone DATA CABLE : Non-Shielded, 10m
UTP DATA CABLE : Non-Shielded, 10m
Power Supply Type : From Notebook PC
Power Cord : N/A

1.4. Feature of Equipment under Test

- Standard : IEEE 802.3 10BaseT Ethernet, IEEE 802.3u 100BaseTX Ethernet
- 10/100M Auto-Negotiation supported
- Full Duplex Support
- Phone Line Network Specification
 - Standard : HomePNA 1.0, 1.1 compliant
- PC Card Standard, 16 bit PC Card interface
- Media Coupler with dual RJ11 and Single RJ45 Connectors and 12cm cable length.

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The DELL PS/2 Keyboard, HP Printer, ACEEX Modem, TRANBON Telephone and IBM Notebook PC were connected to the EUT for EMI test.
- c. The phone port of EUT was connected to the TRANBON telephone, the line port of EUT was connected to Public telephone Network and the TP port of EUT was connected to the remote workstation.
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

2.2. Description of Test System

Support Unit 1. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101(DE8M)
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells, 1.9m

Support Unit 2. -- Printer (HP)

FCC ID	: B94C2642X
Model No.	: DeskJet 400
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Braided-Shielded, 360 degree via metal backshells, 1.35m

Support Unit 3. -- Modem (ACEEX)

FCC ID	: IFAXDM1414
Model No.	: DM1414
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0015
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m

FCC TEST REPORT

Report No. : F972113


Support Unit 4. -- Telephone (TRANBON)

FCC ID : N/A
Model No. : TE-003
Serial No. : SP0051
Data Cable : Non-Shielded, 2.1m

Support Unit 5. -- Notebook PC (IBM)

FCC ID : N/A
Model No. : THINKPPAD 560X
Serial No. : SP0095
Data Cable : Shielded, 360 degree via metal backshells
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System

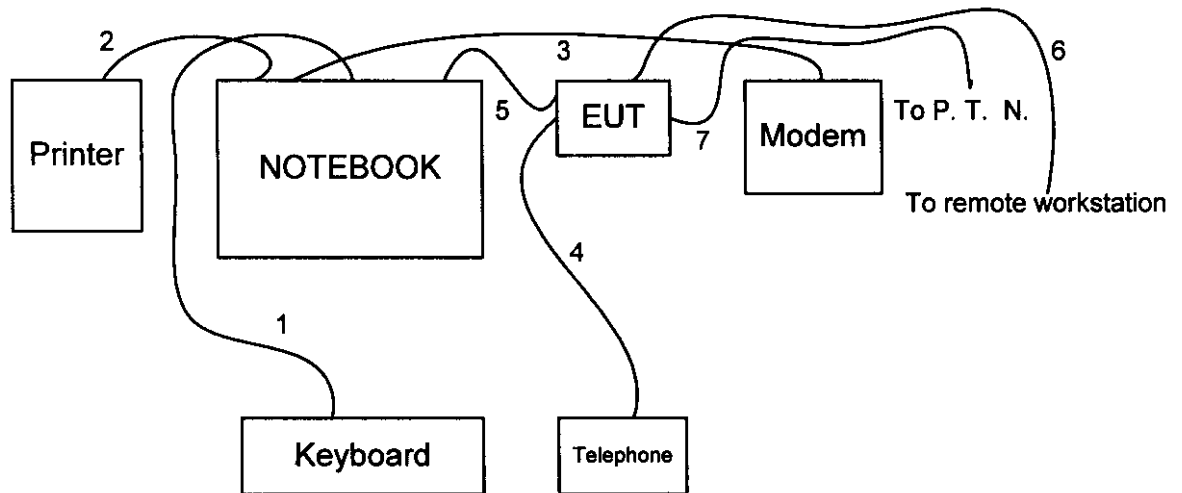

1. The I/O cable is connected to the support unit 1.
2. The I/O cable is connected to the support unit 2.
3. The I/O cable is connected to the support unit 3.
4. The I/O cable is connected to the support unit 4.
5. The I/O cable is connected from EUT to the support unit 5.
6. The I/O cable is connected from EUT to the remote workstation.
7. The I/O cable is connected from EUT to the P. T. N.

Remark : P. T. N. = Public Telephone Network

3. Test Software

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the LCD monitor, and the LCD monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

During testing the local workstation was connected to one remote workstation via EUT to transmit data.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc. in an openarea test site.

Openarea Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,

Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

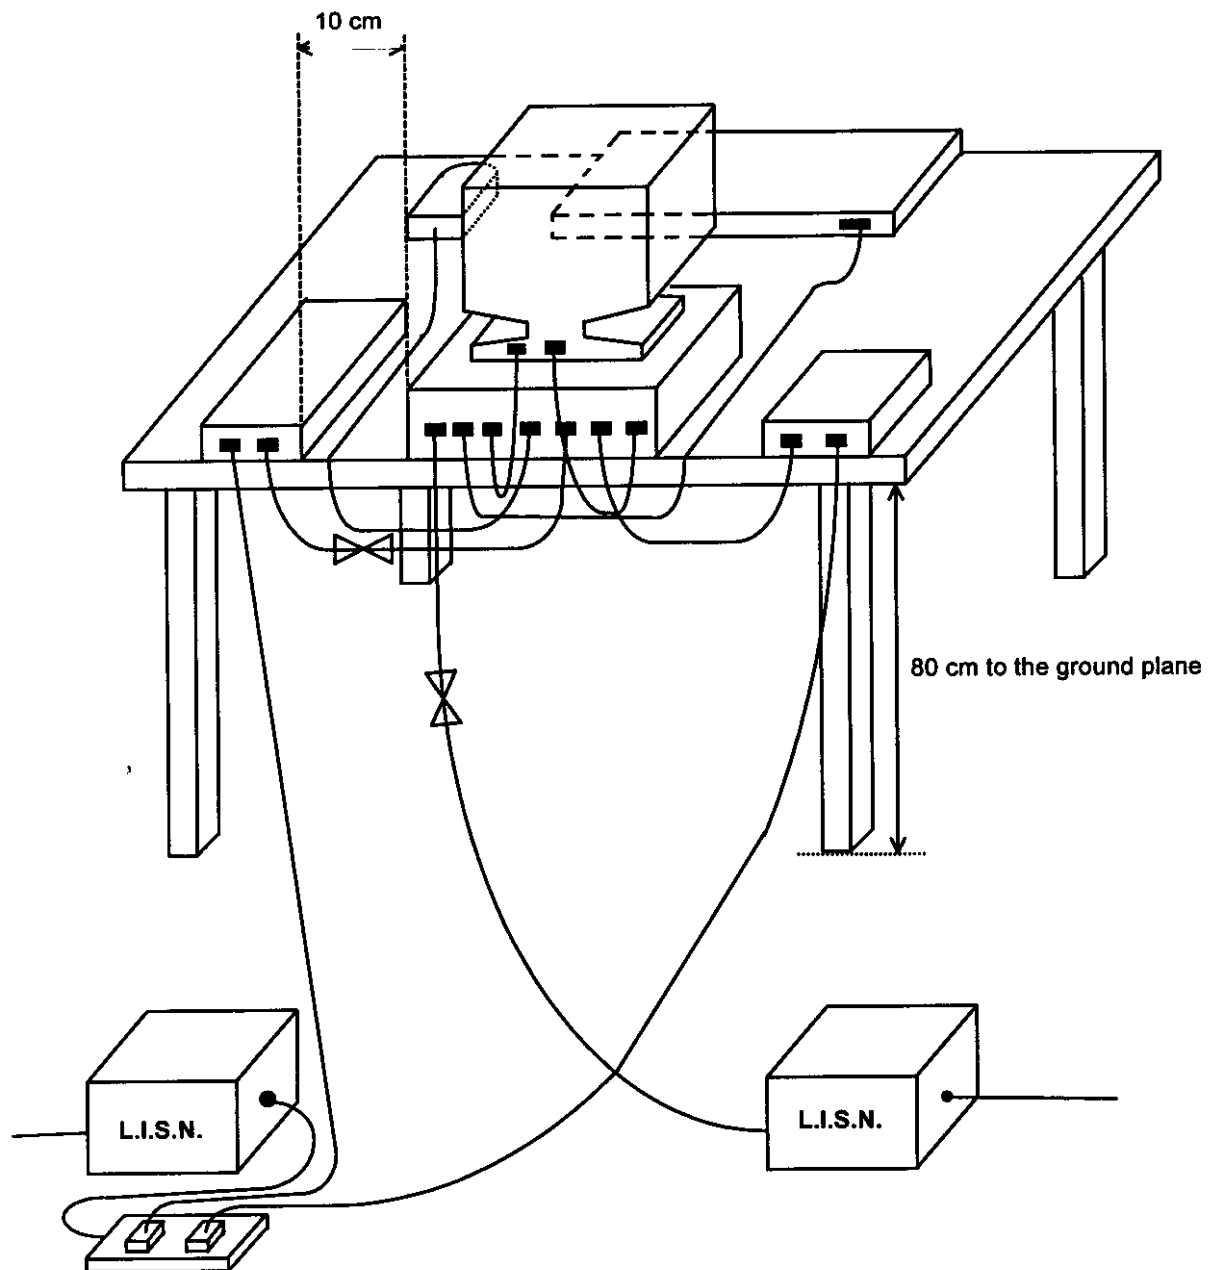

5.4. Test Result of AC Powerline Conducted Emission**5.4.1. Test mode : 100MHz**

- Temperature : 25°C
- Relative Humidity : 62 %
- Test Date : Aug. 9, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.154 MHz / 45.70 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.154	L	45.20	36.90	181.97	69.98	65.78	55.78	1945.68	615.28	-20.58	-18.88
11.263	L	38.20	30.50	81.28	33.50	60.00	50.00	1000.00	316.23	-21.80	-19.50
13.490	L	39.50	32.80	94.41	43.65	60.00	50.00	1000.00	316.23	-20.50	-17.20
0.154	N	45.70	35.60	192.75	60.26	65.78	55.78	1945.68	615.28	-20.08	-20.18
11.263	N	38.50	31.00	84.14	35.48	60.00	50.00	1000.00	316.23	-21.50	-19.00
13.490	N	39.70	33.20	96.61	45.71	60.00	50.00	1000.00	316.23	-20.30	-16.80

Test Engineer : Peter Wang
PETER WANG

5.4.2. Test mode : 10MHz

- Temperature : 25°C
- Relative Humidity : 62 %
- Test Date : Aug. 9, 1999

The Conducted Emission test was passed at minimum margin

LINE 20.001 MHz / 48.60 dBuV.

Frequency (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
		(dBuV)	(dBuV)	(uV)	(uV)	(dBuV)	(dBuV)	(uV)	(uV)	(dB)	(dB)
0.158	L	45.30	39.80	184.08	97.72	65.58	55.58	1901.71	601.37	-20.28	-15.78
20.001	L	48.60	41.40	269.15	117.49	60.00	50.00	1000.00	316.23	-11.40	-8.60
0.158	N	45.30	37.90	184.08	78.52	65.58	55.58	1901.70	601.37	-20.28	-17.68
3.295	N	36.30	27.50	65.31	23.71	56.00	46.00	630.96	199.53	-19.70	-18.50
13.498	N	39.60	32.90	95.50	44.16	60.00	50.00	1000.00	316.23	-20.40	-17.10
20.001	N	48.60	41.40	269.15	117.49	60.00	50.00	1000.00	316.23	-11.40	-8.60

Test Engineer : Peter Wang
PETER WANG

5.4.3. Test mode : 1MHz

- Temperature : 25°C
- Relative Humidity : 62 %
- Test Date : Aug. 10, 1999

The Conducted Emission test was passed at minimum margin

LINE 0.156 MHz / 40.00 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.156	L	46.20	40.00	204.17	100.00	65.67	55.67	1921.82	607.73	-19.47	-15.67
9.995	L	37.60	30.00	75.86	31.62	60.00	50.00	1000.00	316.23	-22.40	-20.00
0.156	N	46.70	37.80	216.27	77.62	65.67	55.67	1921.82	607.73	-18.97	-17.87
0.200	N	41.30	21.50	116.14	11.89	63.61	53.61	1515.40	479.21	-22.31	-32.11
9.995	N	38.70	30.90	86.10	35.08	60.00	50.00	1000.00	316.23	-21.30	-19.10
14.412	N	37.80	31.00	77.62	35.48	60.00	50.00	1000.00	316.23	-22.20	-19.00

Test Engineer : Peter Wang
PETER WANG

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 25 dB
 - Signal Input 10 MHz to 3 GHz


- Spectrum Analyzer (HP 8560E)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 30 Hz to 2.9 GHz

- Test Receiver (R&S ESCS30)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 30 MHz to 2.75 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

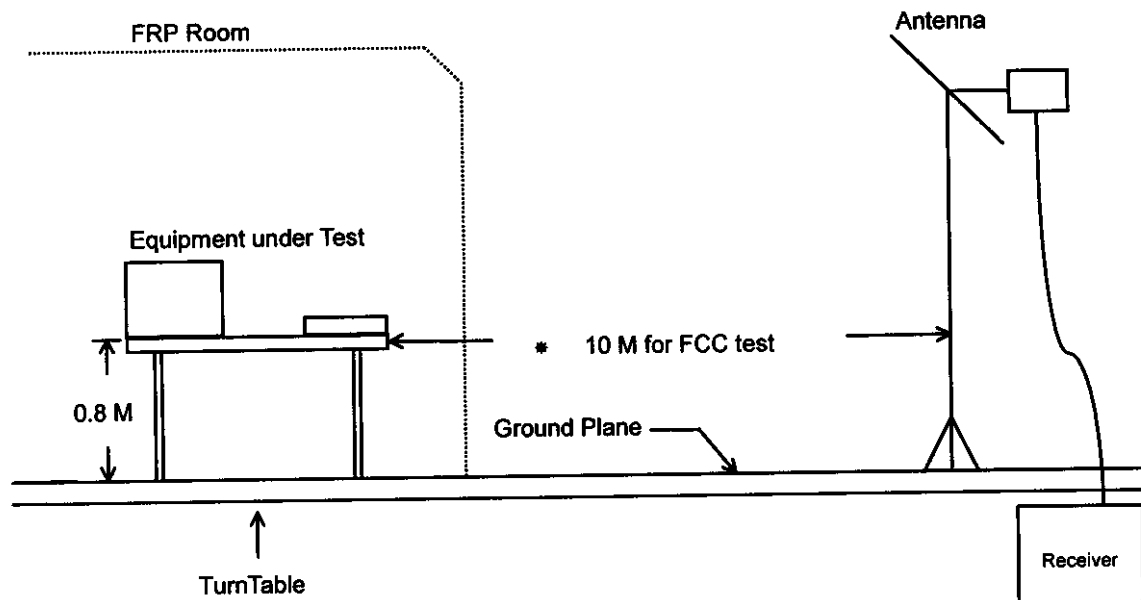

6.4. Test Result of Radiated Emission

6.4.1. Test mode : 100MHz


- Test Distance : 10 M
- Temperature : 29°C
- Relative Humidity : 64 %
- Test Date : Jul. 15, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

47.431 MHz / 26.91 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 141 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
47.431	V	10.77	1.50	14.64	30.00	31.62	26.91	22.16	-3.09
69.727	V	6.79	1.83	17.97	30.00	31.62	26.59	21.36	-3.41
66.330	H	6.67	1.67	18.14	30.00	31.62	26.48	21.09	-3.52
111.483	H	11.60	2.00	12.75	30.00	31.62	26.35	20.77	-3.65
168.054	H	9.74	2.64	13.90	30.00	31.62	26.28	20.61	-3.72
197.470	H	9.53	2.97	14.24	30.00	31.62	26.74	21.73	-3.26

Test Engineer :


PETER WANG

6.4.2. Test mode : 10MHz

- Test Distance : 10 M
- Temperature : 29°C
- Relative Humidity : 64 %
- Test Date : Jul. 15, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

131.758 MHz / 26.12 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 164 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
47.992	V	10.24	1.50	12.82	30.00	31.62	24.56	16.90	-5.44
119.095	V	11.91	2.13	10.83	30.00	31.62	24.87	17.52	-5.13
131.758	V	11.20	2.36	12.56	30.00	31.62	26.12	20.23	-3.88
133.167	H	11.18	2.36	11.66	30.00	31.62	25.20	18.20	-4.80
179.967	H	9.63	2.84	12.94	30.00	31.62	25.41	18.64	-4.59
250.400	H	11.61	3.25	16.57	37.00	70.79	31.43	37.28	-5.57

Test Engineer :

Peter Wang
PETER WANG

6.4.3. Test mode : 1MHz

- Test Distance : 10 M
- Temperature : 29°C
- Relative Humidity : 64 %
- Test Date : Jul. 15, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

40.034 MHz / 26.01 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 164 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)
192.101	H	9.52	2.87	14.08	30.00 32	26.47	21.06	-3.53
40.034	V	15.09	1.33	9.59	30.00 32	26.01	19.98	-3.99
47.992	V	10.24	1.50	13.74	30.00 32	25.48	18.79	-4.52
56.469	V	7.56	1.50	15.58	30.00 32	24.64	17.06	-5.36
133.158	V	11.18	2.36	11.02	30.00 32	24.56	16.90	-5.44
197.810	V	9.53	2.97	12.49	30.00 32	24.99	17.76	-5.01

Test Engineer : Peter Wang
PETER WANG

7. Antenna Factor & Cable Loss

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	18.6	1.3
35	16.6	1.3
40	15.1	1.3
45	11.9	1.5
50	9.2	1.5
55	7.8	1.5
60	6.5	1.7
65	6.6	1.7
70	6.8	1.8
75	7.0	1.7
80	7.3	1.7
85	8.5	1.8
90	9.7	1.9
95	10.4	2.0
100	11.1	2.0
110	11.6	2.0
120	11.9	2.2
130	11.3	2.3
140	11.0	2.5
150	10.4	2.5
160	10.4	2.5
170	9.5	2.7
180	9.6	2.8
190	9.6	2.8
200	9.5	3.0
220	10.4	3.0
240	11.2	3.2
260	12.0	3.3
280	13.0	3.3
300	13.8	3.7
320	14.4	3.7
340	14.9	3.8
360	15.5	3.9
380	16.0	4.0
400	16.6	4.0
450	17.0	4.3
500	17.5	4.8
550	18.3	5.0
600	19.0	5.2
650	18.1	5.3
700	17.2	5.8
750	17.3	6.0
800	17.5	6.0
850	20.1	6.3
900	22.7	6.7
950	22.5	7.3
1000	22.2	7.2

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 1)	HP	8591EM	3536A00672	9 KHz - 1.8 GHz	Aug. 28, 1998	Conduction
LISN (EUT) (site 1)	EMCO	3850/2	9510-1035	50 ohm / 50 uH	Oct. 23, 1998	Conduction
LISN (Support Unit) (site 1)	KYORITSU	KNW-407	8-693-10	50 ohm / 50 uH	Oct. 23, 1998	Conduction
EMI Filter (site 1)	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	Conduction
Amplifier (Site 1)	HP	87405A	3207A01431	10MHz - 3.0GHz	Jun. 24, 1999	Radiation
Spectrum Analyzer (site 1)	HP	8560E	3728A03186	30Hz - 2.9GHz	Sep. 18, 1998	Radiation
Receiver (Site 1)	R&S	ESCS30	70-213-4258	9KHz - 2.75GHz	Dec. 18, 1998	Radiation
Bilog Antenna (Site 1)	CHASE	CBL6112A	2288	30MHz - 2GHz	Jul. 12, 1999	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	9705-1285	28 M - 1GHz	May 18, 1999	Radiation
Turn Table (site 1)	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 1)	EMCO	2075	9806-2160	1 m - 4 m	N/A	Radiation