Test Laboratory: BTL Date: 2024/1/4

#### System Check\_H3500

Frequency: 3500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used: f = 3500 MHz;  $\sigma$  = 2.833 S/m;  $\epsilon_r$  = 36.494;  $\rho$  = 1000 kg/m³ DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 SN7369; ConvF(6.91, 6.91, 6.91) @ 3500 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

# Configuration/Pin=100Mw/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 11.5 W/kg

# Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 67.36 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 20.7 W/kg

SAR(1 g) = 7.02 W/kg; SAR(10 g) = 2.58 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 14.7 W/kg

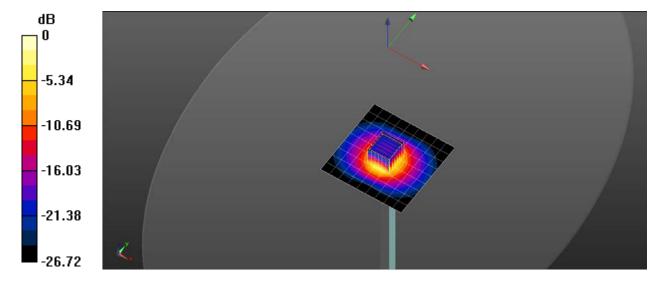

0 dB = 14.7 W/kg = 11.67 dBW/kg

Test Laboratory: BTL Date: 2024/1/4

#### System Check\_H3700

Frequency: 3700 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used: f = 3700 MHz;  $\sigma$  = 3.063 S/m;  $\epsilon_r$  = 35.901;  $\rho$  = 1000 kg/m<sup>3</sup> DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg

- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16

- Probe: EX3DV4 - SN7369; ConvF(6.86, 6.86, 6.86) @ 3700 MHz; Calibrated: 2023/5/22

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### Configuration/Pin=100mW/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 12.0 W/kg

#### Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 59.38 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 6.57 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 12.9 W/kg

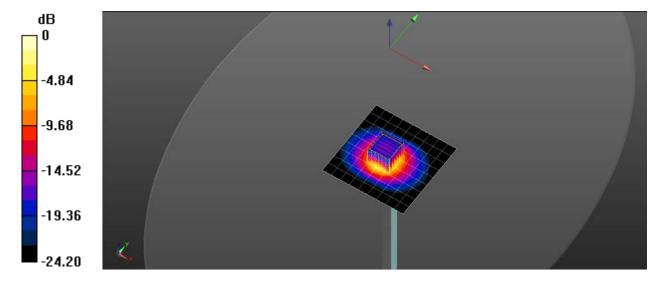

0 dB = 12.9 W/kg = 11.11 dBW/kg