



Technical Description

Siemens Bluetooth™ Module

SieMo-S50037

S50037-Q5-*

Issued by
Program and System Engineering
Product and Solutions
Radio Communication Devices
Erdberger Laende 26, A-1031 Vienna, Austria

Copyright © Siemens AG 2002

All Rights Reserved.

SIEMENS AKTIENGESELLSCHAFT

Author	Part of this Document	Department
Canbolant D.	Regulatory Statements, Bluetooth™ Trademark	PSE PRO RCD 3
Jatschka T.	Technical Clauses	PSE PRO RCD 3

0 General Information	5
0.1 History.....	5
0.2 References.....	5
1 Introduction	6
1.1 KEY Features.....	6
1.2 Description Summary	6
2 Electrical Characteristics.....	8
2.1 Absolute Maximum Ratings.....	8
2.2 Recommended Operating Conditions.....	8
2.3 I/O Terminal Characteristics	8
2.4 Power Consumption	9
2.5 Radio Characteristics	9
2.6 Output Spectrum	10
2.6.1 Modulation Spectrum	10
2.6.2 Output spectrum in the whole 2,4 GHz ISM band (Max Hold)	10
2.6.3 Flatness of output power vs time	11
2.6.4 Spurious emissions on the antenna port	11
VCO Settling.....	11
2.6.6 S-Parameter of the Antenna port	12
3 Pin Description.....	13
3.1 Pinout Diagram	13
3.2 Pin description table.....	13
4 Interface Description	15
4.1 PCM Interface	15
4.1.1 Overview.....	15
4.1.2 Description.....	15
4.1.3 Generic PCM Interface	15
4.1.4 PCM Timing.....	16
Timing graphs.....	17
4.2 UART Interface	18
4.2.1 Overview.....	18
4.2.2 UART Settings.....	18
4.2.3 Timing graphs.....	19
4.4 USB Interface.....	20
4.4.1 Overview.....	20
4.4.2 Disconnect and Resume Signalling.....	20
4.4.3 Power Modes.....	20
4.4.4 USB Timing	21
4.5 Serial Peripheral Interface.....	21
4.5.1 Overview.....	21
4.5.2 Instruction Cycle	21
4.5.3 Single-Cycle Operation	22
4.5.4 Multi-Slave Operation	22
4.5.5 Writing to SieMo	22
4.5.6 SPI Timing.....	22
4.5.7 Reading from SieMo	23
4.5.8 Auto-Increment Operation.....	24
5 Functional Description	25

6 Regulatory Statements	26
6.1 General	26
6.2 European Union (EU) and EFTA Member States	26
6.3 United States of America (USA)	27
7 <i>Bluetooth</i> Trademark	29

0 General Information

0.1 History


Issue	Date	Reason for Changes
01	2002-02-12	Initial issue
02	2002-02-25	Redesign of document structure, inserting of the Clause Regulatory Statements

Table 1: History

0.2 References

[1] <http://www.bluetooth.com>

1 Introduction

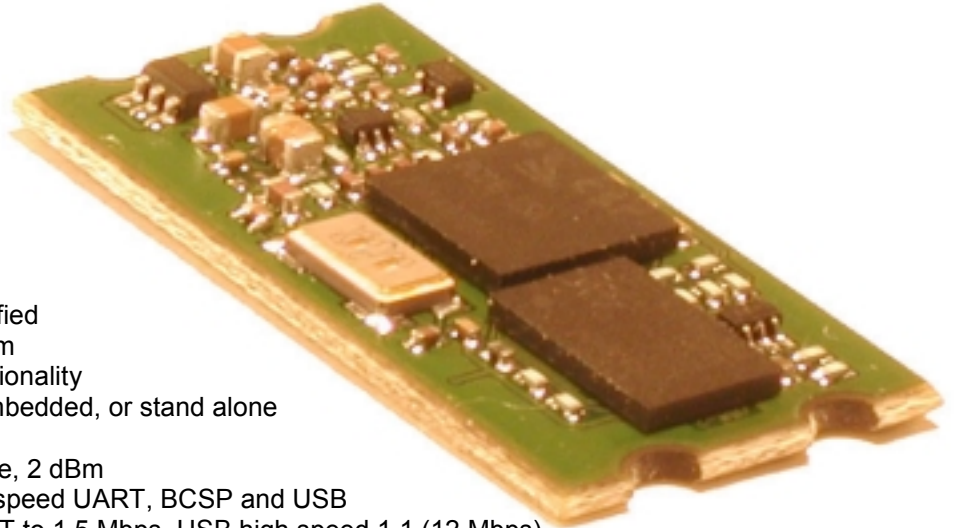

1.1 KEY Features

- Bluetooth V1.1 prequalified
- Input sensitivity –85 dBm
- Point-to-multipoint functionality
- Firmware below HCI embedded, or stand alone operation
- Class 2 Bluetooth device, 2 dBm
- HCI optionally via high-speed UART, BCSP and USB
- Interface data rate UART to 1.5 Mbps, USB high speed 1.1 (12 Mbps)
- Frequency range 2.402 – 2.480 GHz
- Temperature range 0-40 centigrades
- Mechanical outline 32.8 x 16.8 x 2.6 mm³
- Power supply 3.25V-6V, Max. 70 mA
- GFSK modulation, frequency hopping, 79 channels spaced by 1 MHz
- Internal Crystal oscillator

1.2 Description Summary

The SieMo-S50037 is a Class2 Bluetooth Module which can be integrated into various electronic devices to give them Bluetooth functionality.

The connections to the environment consist of a single positive power supply, a 50 Ω Antenna connector, UART, SPI, BCSP USB and PCM Interface, 6 PIO lines, control signals for an external Power Amplifier and one Pin which allows to switch between two different firmware versions. SieMo is shipped as an HCI Module, which means that the lower Bluetooth stack up to HCI is included in the Firmware and it can be changed into a stand-alone Module with the complete BT-stack and some simple applications running on the module via a firmware upgrade.

The module supports synchronous voice transmission as well as asynchronous data transfer.

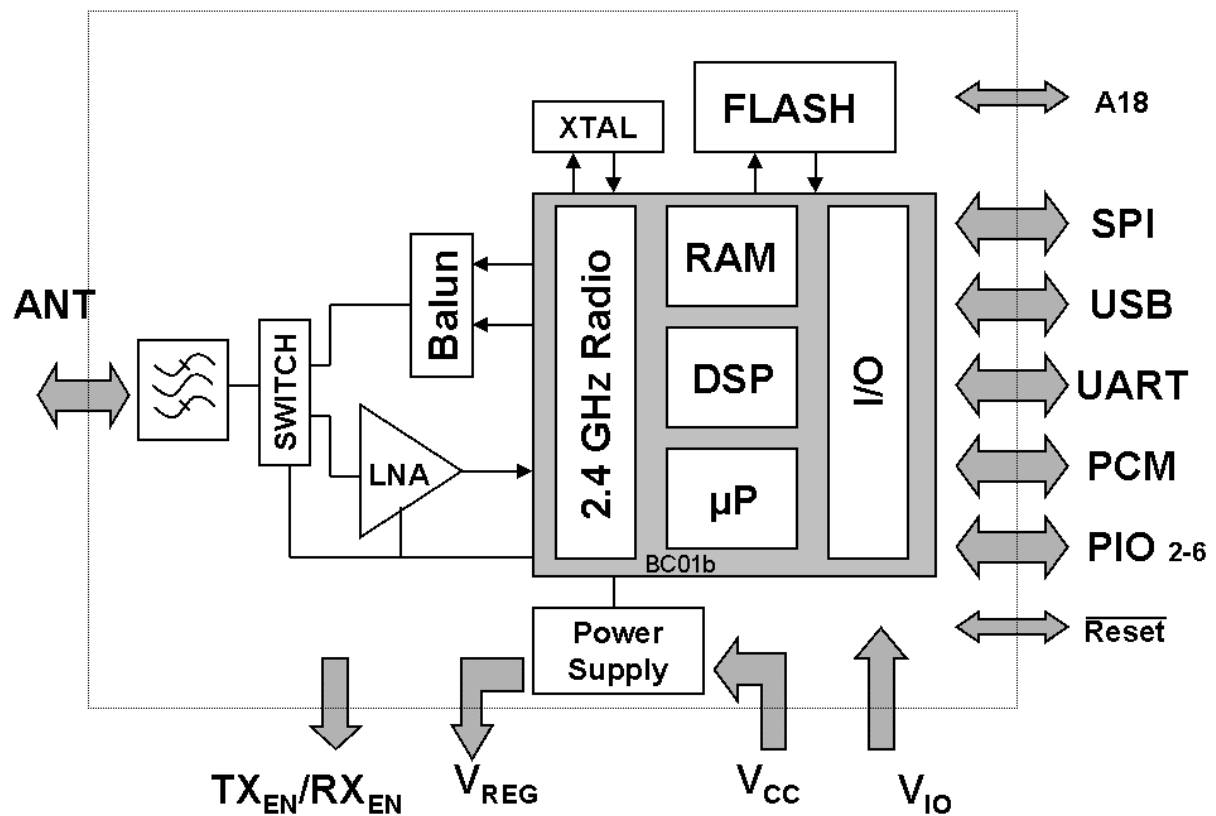


figure 1 Block Diagram

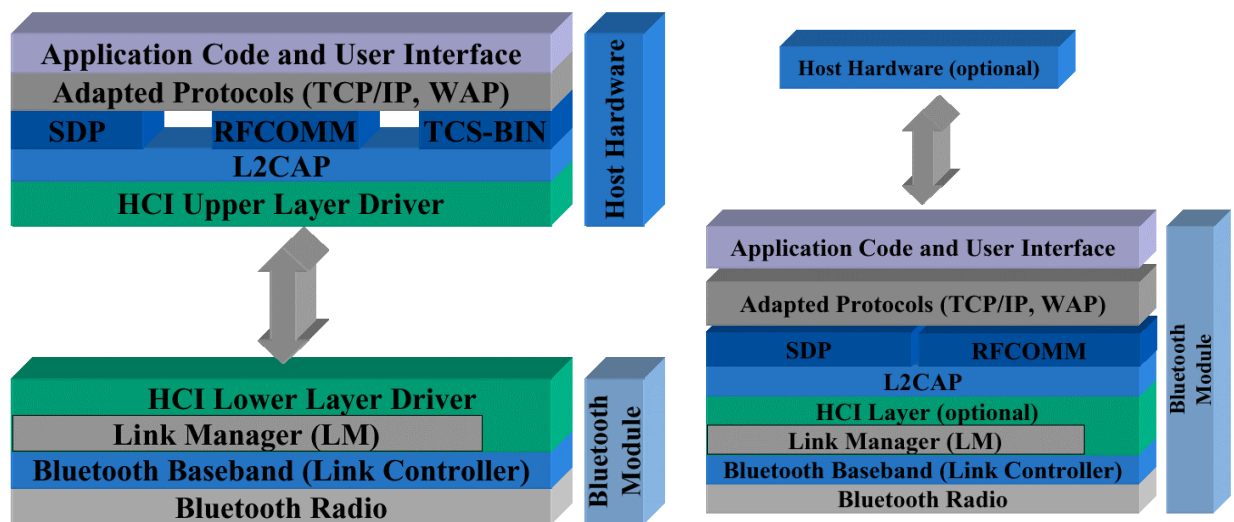


figure 2 Default HCI- FW Stack

optional FW stack for standalone operation

2 Electrical Characteristics

2.1 Absolute Maximum Ratings

Rating	Min.	Max.
Storage Temperature	-30°C	+85°C
Supply Voltage Vcc (no damage)	-7V	+7V
Supply Voltage Vcc-IO	0V	+3.6V
5V Tolerant Terminals	-0.4V	+5.5V
Other Terminals	-0.4V	+3.55V
Input Rf Power, in band		5dBm

2.2 Recommended Operating Conditions

Operating Condition	Min.	Max.
Ambient Temperature Range ¹	0°C	+40°C
Supply Voltage, Vcc	+3.2V	+6V
Supply Voltage, Vcc -IO	3V	3.4V

2.3 I/O Terminal Characteristics

Vcc = 3.3V unless otherwise stated:

Digital Terminals	Min.	Typ.	Max.	Unit
Input Voltage:				
V _{IL} input logic level low	-0.4	-	0.3 Vcc	V
V _{IH} input logic level high	0.7 Vcc	-	Vcc + 0.4	V
Input Current:				
CMOS input (V _I = 3.3V or 0V)	-1	-	1	μA
CMOS input + pull-up (V _I = 3.3V or 0V)	-20	-	-125	μA
CMOS input + pull-down (V _I = 3.3V or 0V)	20 / 2 ⁽¹⁾²	-	125	μA
Output Voltage:				
V _{OL} output logic level low (I _O = 4.0mA)	-	-	0.2	V
V _{OH} output logic level high (I _O = -4.0mA)	Vcc-0.2	-	-	V
Tri-state Leakage Current:				
I _{OZL} (V _I = 0V)	-1	-	1	μA
I _{OZH} (V _I = 3.3V)	-1	-	1	μA
C _I Input Capacitance	2.5	-	10	pF
Power-on Reset	Min.	Typ.	Max.	Unit
Vcc falling threshold	2.35	2.45	2.55	V
Vcc rising threshold	2.50	2.60	2.70	V
Hysteresis	130	150	170	mV
USB Terminals				
Input thresholds:				
V _{IL} input logic level low	-	-	0.3 Vcc_IO	V
V _{IH} input logic level high	0.7 Vcc_IO	-	-	V
Input leakage current	-1	-	1	μA
C _I Input Capacitance	2.5	-	10	pF

¹ The module is qualified for this temperature range. Functionality has been tested form -20 to +70° with a small number of samples. Radio performance decreases wiht rising temperature.

² PIO terminals have weak pull-down resistors (1/10th current of standard pull-down resistors).

Output levels (to correctly terminated USB)	0	-	0.2	V
V _{OL} output logic level low	2.8	-	V _{CC_IO}	V
V _{OH} output logic level high				
PIO Port				
Output voltage	V _{CC-IO-0.4}	-	V _{CC-IO}	V
Output (source/sink) current	-	-	8	mA

2.4 Power Consumption

V_{CC} = 3.3V, T_a = 20°C unless otherwise stated:

Mode	Min.	Typ.	Max.	Unit
SCO connection HV3 (1s interval sniff mode)	-	44	-	mA
SCO connection HV1 (1s interval sniff mode)	-	74	-	mA
ACL data transfer 720kbps USB	-	85	-	mA
Peak current during RF burst	-	-	120	mA
Leakage current (all off)	-	120	-	μA
Idle (after reset or power up)		3		mA
ACL data transfer 115.2kbps UART MASTER, transmit data	30		43	mA
ACL data transfer 115.2kbps UART SLAVE, transmit data		71		mA
ACL data transfer 115.2kbps UART MASTER, receive data	28		38	mA
ACL data transfer 115.2kbps UART SLAVE, receive data		77		mA
Connected, no data transfer, MASTER		12		mA
Connected, no data transfer, SLAVE		61		mA
Inquiry	82		93	mA

2.5 Radio Characteristics

V_{CC} = 3.3V, f = 2.45GHz, T_a = 20°C unless otherwise stated:

Receiver	Min.	Typ.	Max.	BT-Spec	Unit
Sensitivity at 0.1% BER ³	-	-85	-82	-70	dBm
Sensitivity at 0.1% BER ⁴ T _a = 40°C	-	-80	-77	-70	dBm
Sensitivity at 0.1% BER T _a = 0°C	-	-90	-85	-70	dBm
Maximum received signal ⁵	-	13	-	-20	dBm
C/I Co-channel ⁶	-	9	-	11	dB
Adjacent channel selectivity C/I 1MHz ³	-	-2	-	0	dB
2 nd adjacent channel selectivity C/I 2MHz ³	-	-34	-	-30	dB
3 rd adjacent channel selectivity C/I >3MHz ^{3, 4}	-	-45	-	-40	dB
Image rejection C/I ^{3, 5}	-	-14	-	-9	dB
Maximum level of intermodulation interferers ^{3, 6}	-	-30	-	-39	dBm

³ Measured according to the Bluetooth specification 1.1

⁴ Up to five spurious responses within Bluetooth limits are allowed

⁵ At carrier -3MHz

⁶ Measured at f₁-f₂ = 5MHz

1dB compression point at 1.9 GHz	-30			-	dBm
Transmitter	Min.	Typ.	Max.	BT-Spec	Unit
RF transmit power ³	-2	0	2	-6 to +4	dBm
RF transmit power ³ Ta = 40°C	-4	-1	1	-6 to +4	dBm
RF transmit power ³ Ta = 0°C	+1	+2	+3	-6 to +4	dBm
RF power control range ³	-	30	-	16	dB
RF power control range resolution	-	4	-	-	dB
20 dB bandwidth for modulated carrier	-	930	-	<1000	kHz
2 nd adjacent Channel transmit power ³	-	-47	-25	<-20	dBc
3 rd adjacent Channel transmit power ³	-	-52	-45	<-40	dBc

2.6 Output Spectrum

2.6.1 Modulation Spectrum

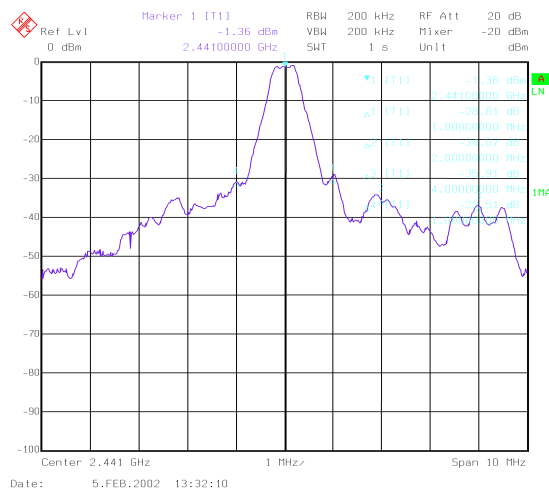


figure 3 Modulation spectrum on single channel with PRBS9 Payload, DH1 packet Cable loss (approx. 3dB not corrected)

2.6.2 Output spectrum in the whole 2,4 GHz ISM band (Max Hold)

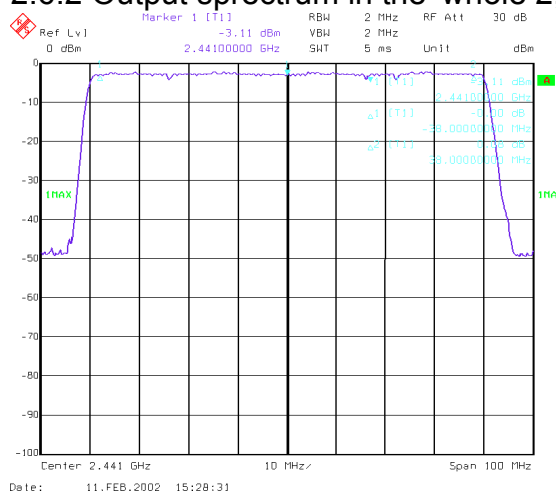


figure 4 Output spectrum with Frequency Hopping measured with Maxhold Cable loss (approx. 3dB not corrected)

2.6.3 Flatness of output power vs time

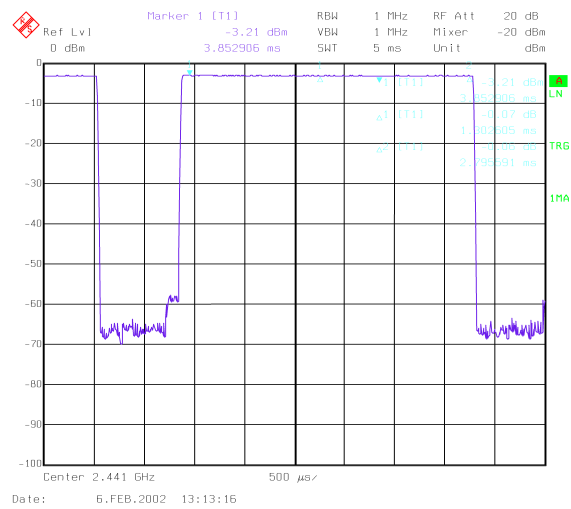


figure 5 output power during a DH5 packet

2.6.4 Spurious emissions on the antenna port

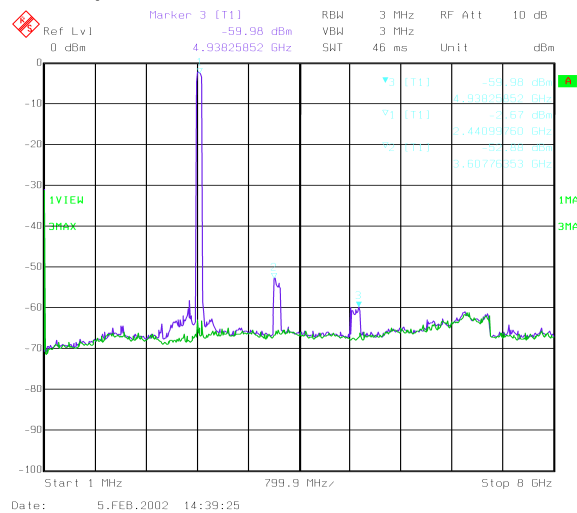


figure 6 Spurious emission up to 8GHz, green line is with DUT offline. Cable loss not corrected.

2.6.5 VCO Settling

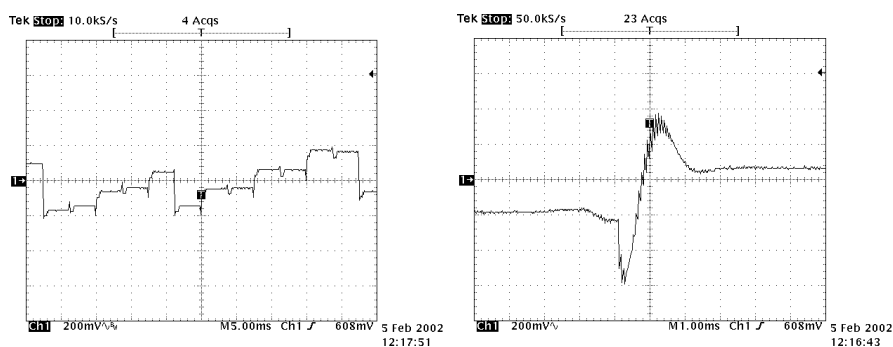


figure 7 VCO settling during FH operation in two different timescales

2.6.6 S-Parameter of the Antenna port

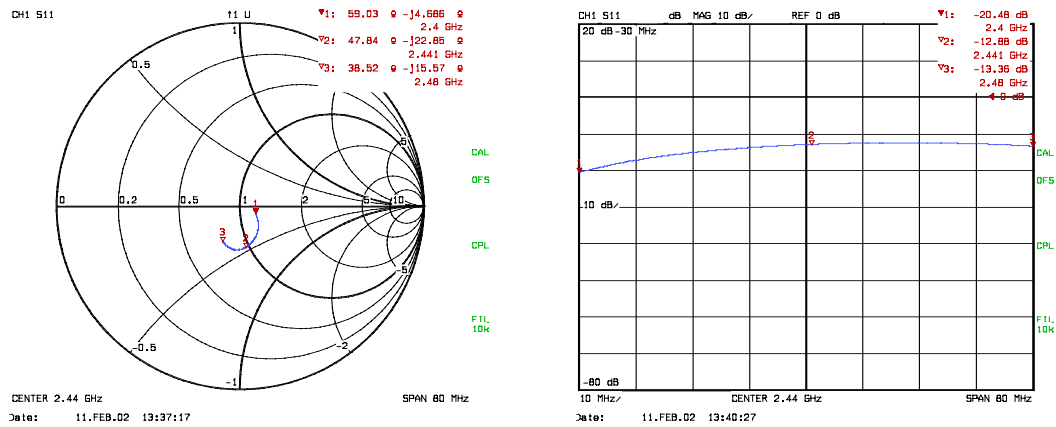


figure 8 S11 on the antenna port in transmit mode

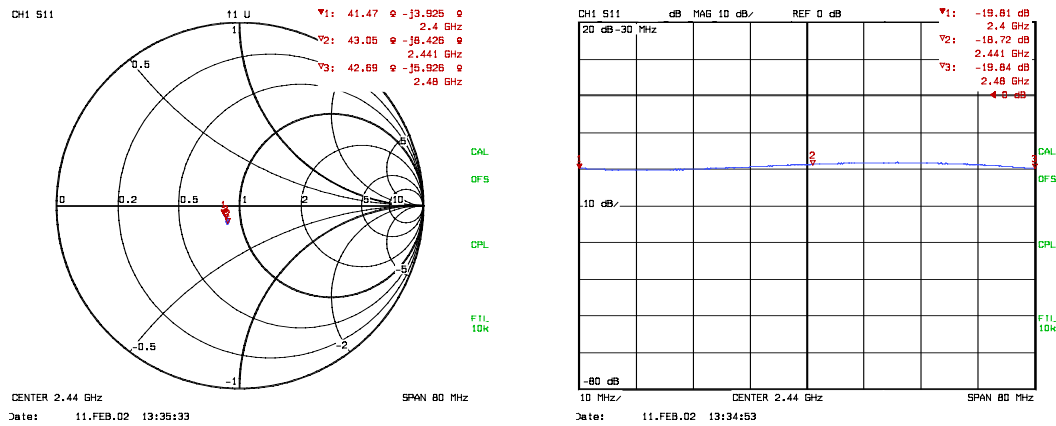


figure 9 S11 on the antenna port in receive mode

3 Pin Description

3.1 Pinout Diagram

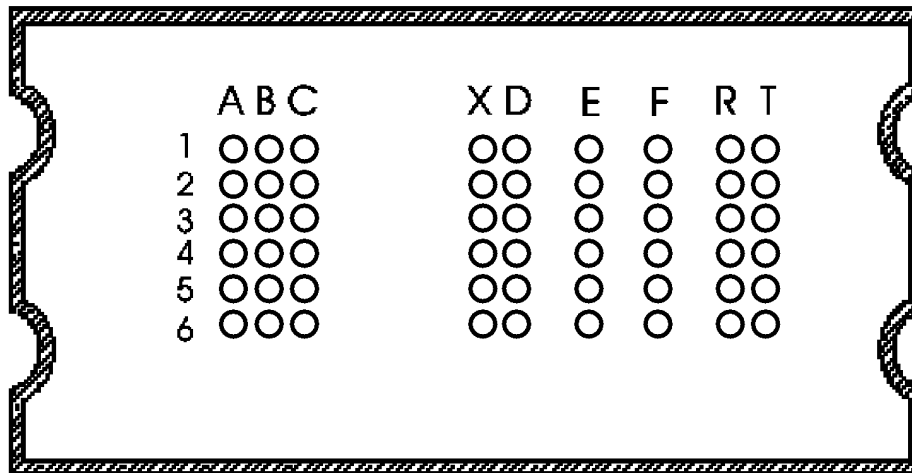


figure 10 SieMo Pinout, bottom view

3.2 Pin description table

Pin Name	Type	Pin	Description
RF			
ANT	Rf in/out	T2	Antenna output, 50Ω; unconditionally stable; DC path to GND
TX-EN	CMOS output, pulled down	F5	Control output for external switch or PA
RX-EN	CMOS output pulled down	F4	Control output for external switch or LNA
TX-PWR	Analog output	F6	Ramping control output for external PA, need not be used, ramping is done on the module.
Power			
Vcc	Power	C6	Power Supply 3,25-6V
Vcc-IO	Power	C4	Power Supply for all IO-Pins, 3.0-3.4V
UART-Interface			
TxD	CMOS output, 5V tolerant, pulled down	B5	UART data output
RxD	CMOS input, 5V tolerant, pulled down	A5	UART data input
RTS	CMOS output	A6	UART Ready To Send
CTS	CMOS input	B6	UART Clear To Send
USB-Interface			
D+	CMOS bidirectional	B1	USB D+
D-	CMOS bidirectional	B2	USB D-
USB_PULL_UP /PIO[2]	CMOS bidirectional, pulled down	D1	USB Pull-up, internally attached to D+, only used with corresponding USB-settings.
USB_WAKE_U P/PIO[3]	CMOS bidirectional, pulled down	B4	Output goes high to wake up PC when in USB mode, only used with corresponding USB-settings.
USB_ON/PIO[4]	CMOS bidirectional, pulled down	D2	USB On (Input. Senses when VBUS is high wakes SieMo), only used with corresponding USB-

			settings.
USB_DETACH/ PIO[5]	CMOS bidirectional, pulled down	C1	Chip detaches from USB when this line is high, only used with corresponding USB-settings.
PCM-Interface			
PCM_IN	CMOS input pulled down	A1	Synchronous 8kss^{-1} data input
PCM_OUT	CMOS output pulled down	A2	Synchronous 8kss^{-1} data output
PCM_SYNC	CMOS bidirectional, pulled down	A3	Synchronous data strobe
PCM_CLK	CMOS bidirectional, pulled down	A4	Synchronous data clock
SPI-Interface			
SPI-CSB	CMOS input, 5V tolerant, pulled up	E1	SPI Chip Select
SPI-CLK	CMOS input, 5V tolerant, pulled down	E2	SPI Clock
SPI-MOSI	CMOS input, 5V tolerant, pulled up	E3	SPI Data Input
SPI-MISO	CMOS output, tristate	E4	SPI Data Output

PIO-Interface			
PIO[2]/USB_PULL UP	CMOS bidirectional, pulled down	D1	Programmable IO line
PIO[3]/USB_WAK E_UP	CMOS bidirectional, pulled down	B4	Programmable IO line
PIO[4]/USB_ON	CMOS bidirectional, pulled down	D2	Programmable IO line
PIO[5]/USB_DETACH	CMOS bidirectional, pulled down	C1	Programmable IO line
PIO[6]/	CMOS bidirectional, pulled down	D5	Programmable IO line
PIO[7]/	CMOS bidirectional, pulled down	D6	Programmable IO line
Special Functions			
RESET#	CMOS input pulled up	R3	Reset# input
SCAN_ENABLE	CMOS input pulled down	F1	For Test only, do not connect
MODE	CMOS input pulled down	D3	Selects second Firmware, if programmed

4 Interface Description

4.1 PCM Interface

4.1.1 Overview

- PCM Pulse Code Modulation is a standard method used to digitise human voice
- Four-wire, full duplex serial interface used to transfer a single voice channel to an external audio codec
- Maximum of one SCO connection is possible using the PCM interface
- Further SCO channels must use the HCI protocol layer
- Data format is 13 bit linear PCM

4.1.2 Description

Pulse Code Modulation (PCM) is the standard method used to digitise human voice patterns for transmission over digital communication channels. Through its PCM interface, SieMo provides hardware support for continual transmission and reception of PCM data, thus reducing processor overhead for wireless headset applications.

SieMo offers a bi-directional digital audio interface that routes directly into the baseband layer of the on-chip firmware (it does not pass through the HCI protocol layer). Hardware on SieMo allows the data to be sent to and received from a SCO connection. Only one SCO connection can be supported by the PCM interface at any one time. Any additional SCO connections must receive and transmit their data over the HCI protocol layer. The data format is 13-bit linear PCM. SieMo can operate either as a master (with an output clock of 256kHz) or as a slave (with the input clock varying between 128kHz and 512kHz). When in slave mode and using higher clock rates SieMo can support Motorola's Synchronous Serial Interface (SSI) standard that allows multiple bi-directional

audio channels to be multiplexed onto a single physical connection.

4.1.3 Generic PCM Interface

For a generic PCM interface there is one master and one slave device. The master generates the clock and synchronisation signals. The sync signal identifies the start of the sample data and has an 8kHz period. There are two types of frame sync: long and short. In long frame sync mode PCM_SYNC going high indicates the first (and most significant) bit of the sample. It must remain high for at least two clock cycles, but this can be longer. In short frame sync MSB start is signalled by sync going low (normally it only goes high for one clock cycle).

The clock runs at a higher rate than sync: at least 8 x bits_per_sample MHz, although higher rates are common. The sample resolution is 13 bits/sample, uncompressed. Several Motorola CODECs allow their output gain to be controlled via the addition of three extra data bits after the audio data. SieMo supports this feature, effectively raising the bits per sample to 16. Data from both the master and slave is clocked out on the rising clock edge and sampled on the falling edge. Master mode is the default setting. In master mode SieMo generates a 256kHz clock signal (PCM_CLK) and the 8kHz, long format synchronisation signal (PCM_SYNC). Short frame sync is not supported. See PCM Timing Diagrams for more information.

Slave mode is selected by setting a Persistent Store value. In slave mode SieMo clocks output data on the rising edge of the received clock signal and samples incoming data on the falling edge. The incoming clock frequency should be between 128kHz and 512kHz. (Note that 128kHz is 8 x 16 kHz, therefore the absolute minimum possible frequency for the 8ksamples/sec and 16bits/sample (13 audio data plus three gain data). The frame sync must be long format. Short format is not supported (see SSI Mode and Timing Diagrams in this section for more information).

4.1.4 PCM Timing

Symbol	Parameter	Min	Typ	Max	Unit
f_{CLK}	PCM clock frequency		256		kHz
(1)	Clock duty cycle		50		%
$t_{sy:hd}$	Hold time from CLK low to SYNC high		1.95		us
$t_{sy:su}$	Set-up time for SYNC high to CLK low		1.95		us
$t_{sdat:dt}$	Delay time from CLK to valid MSB data			50	ns
$t_{dat:dt}$	Delay time from CLK high to PCM_OUT valid data			50	ns
$t_{fdat:dt}$	Delay time from SYNC or CLK, whichever is later, to PCM_OUT data line high impedance			300 ⁷	ns
$t_{sy:low}$	Hold time from 2nd CLK to SYNC low			300 ¹	ns
$t_{dr:su}$	Set-up time for PCM_IN valid to CLK low	300 ¹			ns
$t_{dr:hd}$	Hold time for CLK low to PCM_IN invalid	300 ¹			ns

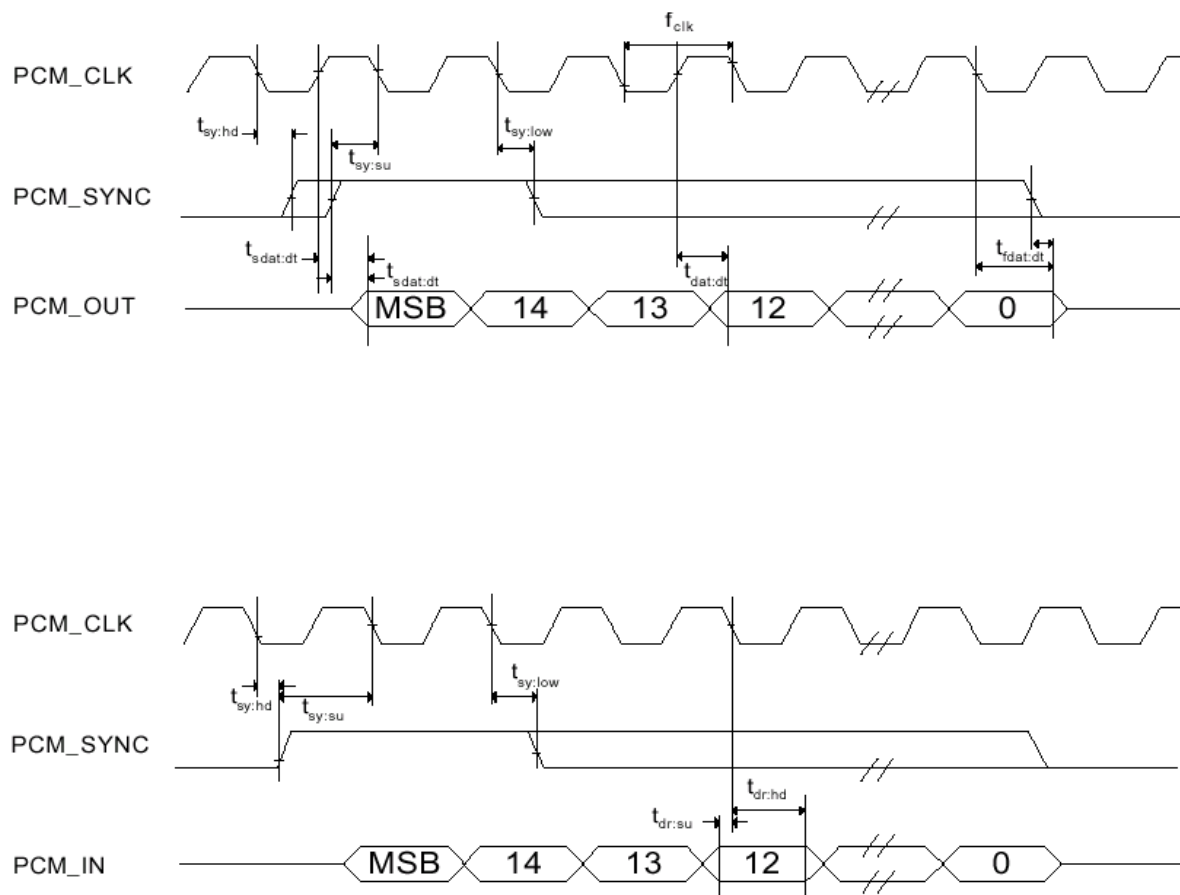


figure 11 PCM Master Timing

⁷ Assumes normal system clock operation. Figures may vary during low power modes when system clock speeds are reduced.

4.1.5 Timing graphs

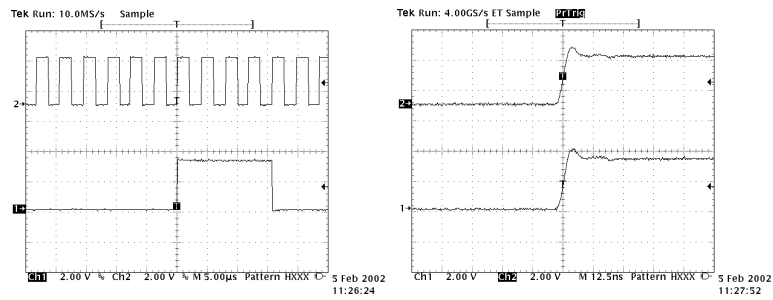


figure 14 PCM clock (upper) vs PCM sync in 2 different Timescales

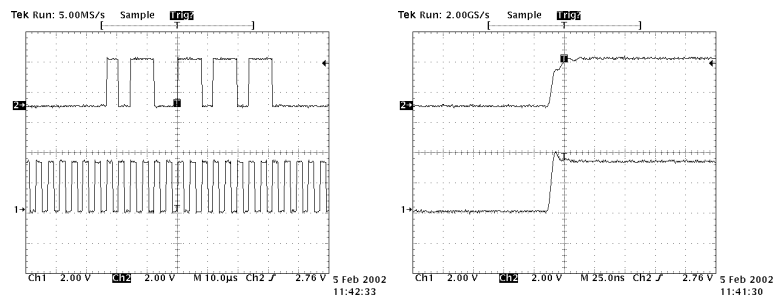


figure 14 PCM OUT vs PCM CLOCK in two different timescales

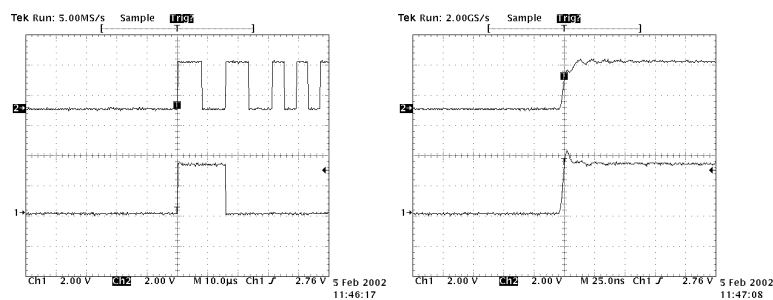


figure 14 PCM OUT vs PCM SYNC in two different timescales

4.2 UART Interface

4.2.1 Overview

- Universal Asynchronous Receiver Transmitter
- Standard 16550 compatible UART interface
- Min 9600Baud, Max 1.5MBaud
- UART_TX and UART_RX used to transmit data
- UART_CTS and UART_RTS used to implement RS232 hardware flow control

The UART (Universal Asynchronous Receiver Transmitter) provides a simple mechanism to communicate with other devices. The UART uses 4 (or 2 if HW – Handshake is not in use)) lines for serial data transmission.

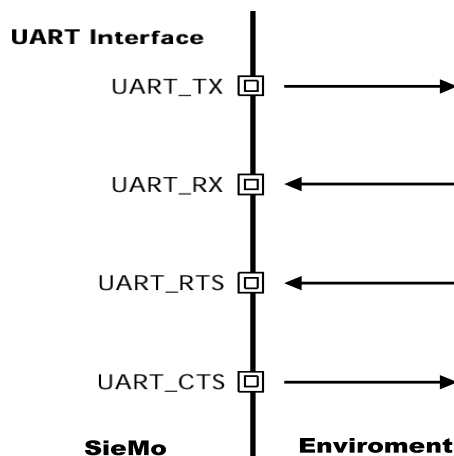


figure 15 UART Directions

4.2.2 UART Settings

Property	Possible Values	Default Setting
Baud Rate	Max 1.536 Mbaud Min 9600 baud	115.2 kBaud
Flow Control	RTS/CTS or None	RTS/CTS
Parity	On or Off	Off
Number of Stop Bits	1 or 2	1

Note: To communicate with a standart PC a levelconverter is required. SieMo uses 0V and 3V levels. Standart PC usually provide baudrates up to 115.2 kBit/s, if SieMo shall communicate with a PC at higher data rates an accelerated serial port adapter and a appropriate level converter card is required. See Application below.

Application: SiMo connected as DCE

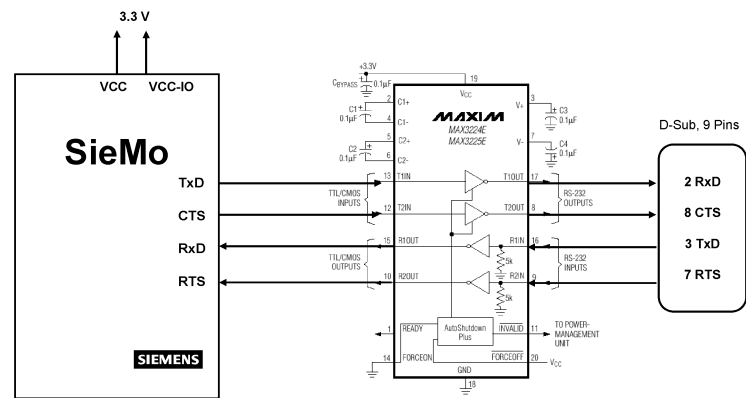


figure 16 Connection to PC via level converter

4.2.3 Timing graphs

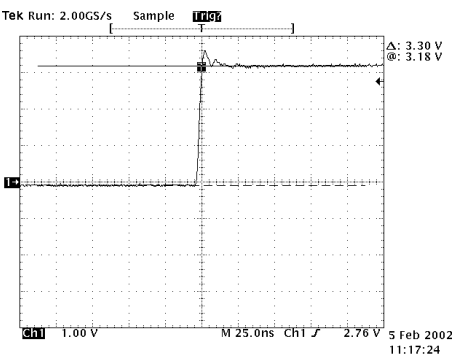


figure 17 UART TxD signal

4.3

4.4 USB Interface

4.4.1 Overview

- 12Mbps/s bit rate
- BC01 operates as a peripheral USB device
- Two modes, bus powered and self powered
- Careful product design is required for product to remain USB1.1 compliant
- 4 USB lines are required
- Minimum voltage on all VCC terminals is 3.0V for USB operation

The SieMo contains its own full-speed (12Mbps/s) USB interface. To get a product USB 1.1 certified, please visit www.usb.org for further information. The voltage on Vcc-IO must be between 3.0 and 3.4 V for USB operation. It is possible to connect the Vcc-IO to the Vreg output of the module, which provides a regulated voltage of 3.15V.

Although SieMo is capable of meeting the USB 1.1 specification, Siemens cannot guarantee that an application circuit designed around the IC is USB compliant. The choice of application circuit, component choice and PCB layout all affect USB signal quality and electrical characteristics. The information in this document is intended as a guide and should be read in association with the USB 1.1 specification, with particular attention being given to Chapter 7. Independent USB qualification must be sought before an application is deemed USB compliant and can bear the USB logo. Such qualification can be obtained from a USB plugfest or from an independent USB test house.

4.4.2 Disconnect and Resume Signalling

SieMo provides some signalling lines for USB operation. These functions are disabled by default but can be activated via firmware settings.

The USB_DETACH and USB_WAKE_UP terminals provide extra signalling alongside the normal USB data lines. They are not part of the USB specification and full USB functionality can be attained without their use. The Disconnect message may be useful on its own, but it is hard to see an application for USB_RESUME in isolation.

USB_DETACH (Disconnect Signalling)
USB_DETACH is an input, when asserted high, causes SieMo to put USB_PULL_UP, USB_D- and USB_D+ in a high-impedance state. This detaches the device from the bus and is logically equivalent to unplugging the module. When USB_DETACH is taken low, SieMo will connect back to USB and await enumeration by the USB host.

USB_RESUME

USB_WAKE_UP is an active high output used only when USB_DETACH is active to wake-up the host and allow USB communication to recommence. It replaces the function of the USB Resume message, which cannot be sent while SieMo is effectively disconnected from the bus.

4.4.3 Power Modes

SieMo is by default set to be powered from the Bus. It can be set to a self powered Device by changing firmware settings. In this case the USB_ON must be connected to the Vbus line via a 47k/22k

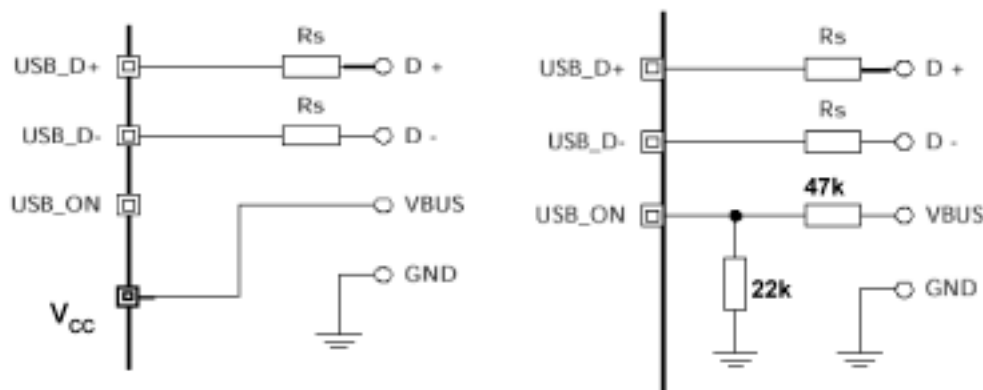


figure 18 USB Power Modes- Applications

4.4.4 USB Timing

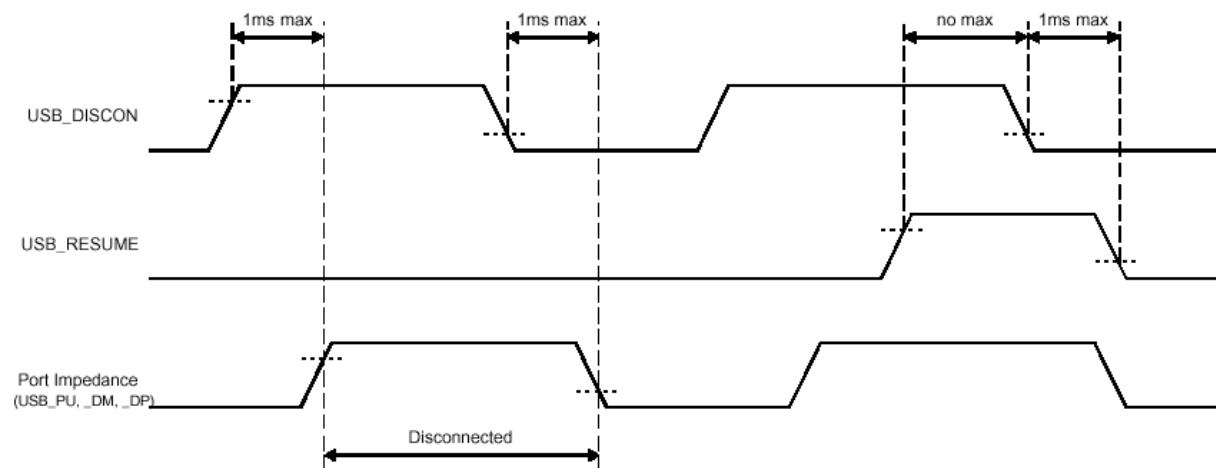


figure 19 USB Disconnect and Resume Signal Timing

4.5 Serial Peripheral Interface

4.5.1 Overview

- Consistent with the Motorola SPI standard
- SieMo always acts in slave mode
- SPI_CLK is always generated by the host

SieMo uses 16-bit addresses and 16-bit data during serial peripheral interface transactions. Such transactions will operate regardless of whether the internal processor is running or is stopped. This section details the considerations required when interfacing to SieMo via the four dedicated Serial peripheral interface terminals.

4.5.2 Instruction Cycle

Before SieMo can be addressed, SPI_CSB must be taken low (SPI_CSB = 0). Data on SPI_MOSI is then clocked into the SieMo on the rising edge of the clockline SPI_CLK. When reading, SieMo will reply to the master on MISO, the data being valid on the falling edge of the SPI_CLK. The master provides the clocking.

4.5.3 Single-Cycle Operation

After a serial peripheral interface transaction finishes, the master toggles SPI_CLK with SPI_CSB high to initiate a new transaction. SPI_CSB must be high for at least two SPI_CLK cycles.

4.5.4 Multi-Slave Operation

SieMo should not be connected in a multi-slave arrangement by simple parallel connection of slave MISO lines. When SieMo is deselected (SPI_CSB = 1), the SPI_MISO line does not float. Instead, SieMo outputs 0 if the processor is running or 1 if it is stopped.

4.5.5 Writing to SieMo

To write to the SieMo, the 8-bit write command (00000010) is sent first (C[7:0]) followed by a 16-bit address (A[15:0]). 16 bits of data (D[15:0]) are sent.

Terminal	Type	Description	Device Terminal	PC Parallel Connector
SPI_CSB	CMOS input	Serial Peripheral Interface Chip Select	E1	2
SPI_CLK	CMOS input	Serial Peripheral Interface SPI Clock	E2	9
SPI_MOSI	CMOS input	Serial Peripheral Interface SPI Data Input	E3	8
SPI_MISO	CMOS output	Serial Peripheral Interface SPI Data Output	E4	10
GND			B3	19

4.5.6 SPI Timing

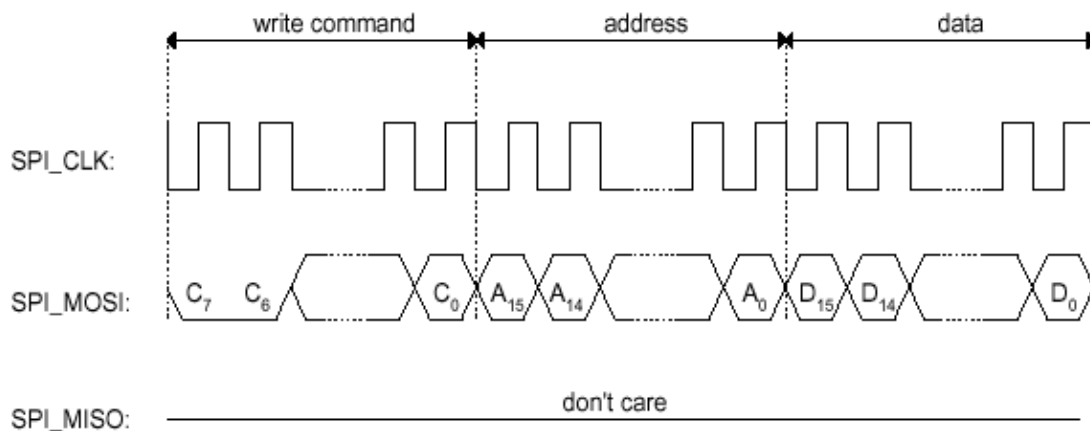


figure 20 SPI write operation a

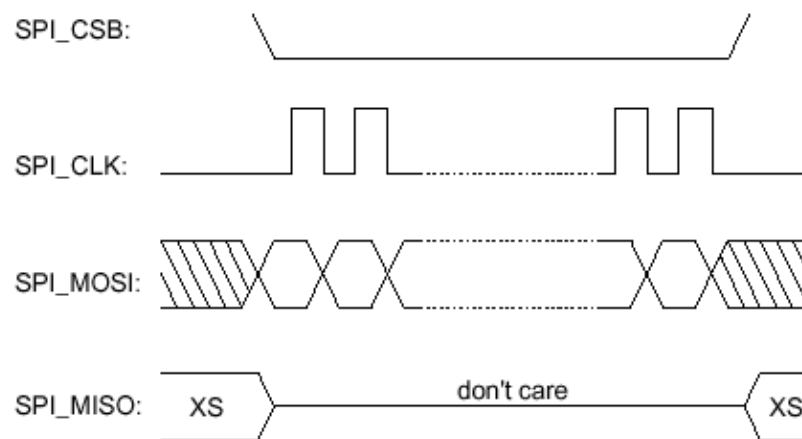


figure 21 SPI write operation b

4.5.7 Reading from SieMo

Reading is similar to writing, in that an 8-bit read command (00000011) is sent first, followed by the address of the location to be read. The SieMo then outputs the 16-bit contents of the location on MISO during bits D[15:0] and a check-word during T[15:0]. The check-word is composed of {command, address [15:8]}. The check-word may be used to 'sanity-check' a read operation to a memory location. This overcomes the problem encountered with typical serial peripheral interface slaves, whereby it is impossible to determine whether the data returned by a read operation is valid data, or the result of the slave device not responding.

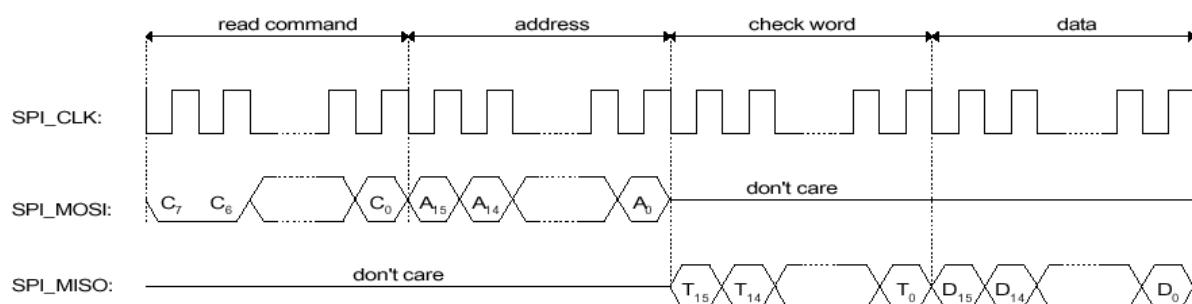


figure 22 SPI read timing a

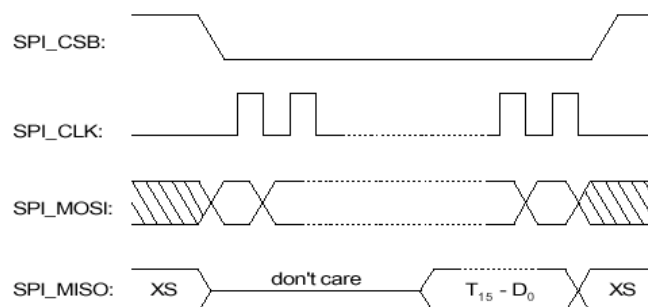


figure 23 SPI read timing b

4.5.8 Auto-Increment Operation

Sending a command word and the address of a register every time it is to be read or written can be a significant overhead, especially when large amounts of data are to be transferred. SieMo offers increased data transfer efficiency via its auto-increment operation. During operation, SieMo increments the address automatically. Only the data is transmitted or received over the serial peripheral interface bus. SieMo keeps the previous command word.

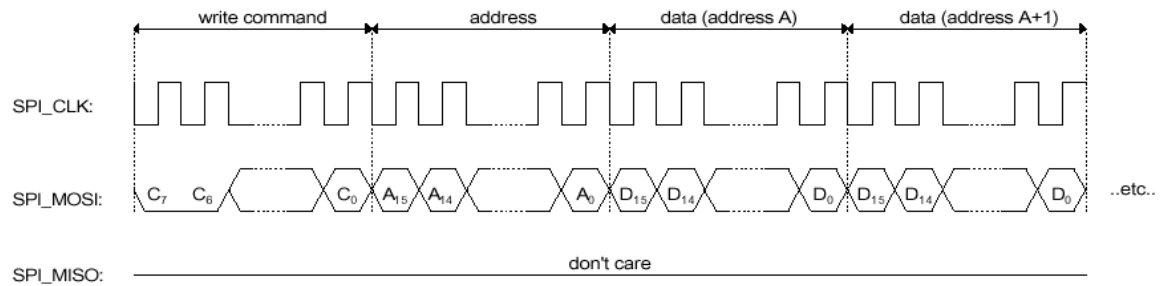


figure 24 Example Auto-Increment Operation

5 Functional Description

SieMo S50037 is a Bluetooth module which is consistent with Bluetooth specification 1.1. The modules implementation is based on the BC01b single chip by CSR Cambridge Silicon Radio.

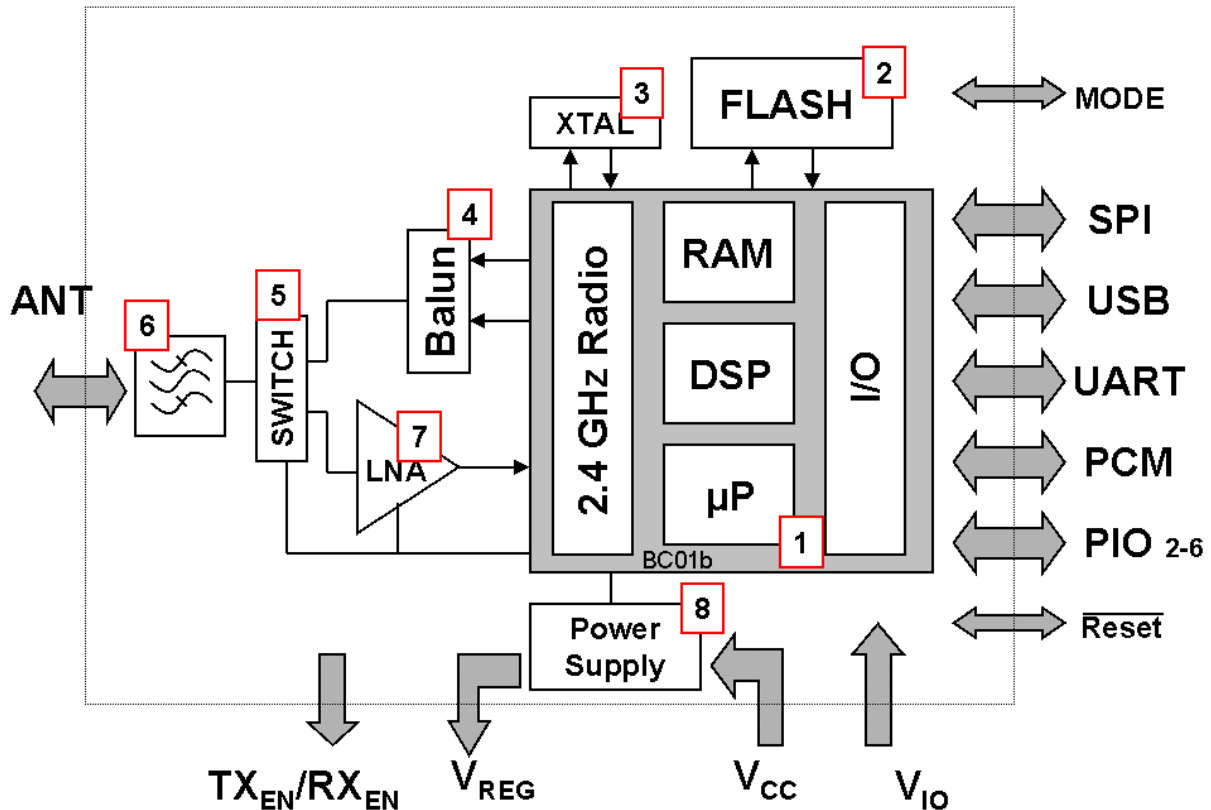


figure 25 block diagram

Functional Blocks:

1. BlueCore 01b (BC01b) CMOS-single chip bc Cambridge Silicon Radio (CSR)
2. 8 MBit Flash Memory
3. 13 MHz XTAL with asymmetric trimming capacitors, digitally trimmed during production. Initial Tolerance <0.5 ppm, <20 ppm over age and temperature.
4. BALUN (BALanced to UNbalanced) performs transformation from symmetrical output to asymmetrical lines and biasing of the output stage.
5. Antenna switch switches between input and output direction to transmit or receive a signal with TDM (Time Division Multiplex).
6. Output/Input Filter removes (out-of-band) spurious emissions and increases (out-of-band) blocking performance.
7. LNA Low Noise Amplifier increases sensitivity of receiver and isolation between transmit and receive path during transmission.
8. Power supply ensures that all rf-parameters fulfill the Bluetooth specification with an input voltage range from 3.25 to 6V.

6 Regulatory Statements

6.1 General

- This *Bluetooth* radio module has to be installed and used in accordance with the technical description/installation instructions provided by the manufacturer.
- This *Bluetooth* radio module is intended to be placed on the market in all States, where the Bluetooth™ technologie and the used frequency band is released.
- For detail information concerning type approval of this module (eg. where this module is already pre-approved) please contact the authorised local distributor or the manufacturer.

6.2 European Union (EU) and EFTA Member States

This *Bluetooth* module is an assessed radio module in conformity with the R&TTE directive 1999/5/EC and has been provided with the CE mark accordingly.

It is conform to the following specifications/Standards*) :

Applied specifications/Standards	Essential Requirement (Corresponding article of R&TTE)
EN 300 328 (ETS 300 328): Part 1, V1.1.1 and Part 2, V1.2.2 (2000-07) EN 301 489-17 (ETS 300 826): V1.1.1 (2000-09)	Electromagnetic Compatibility (Art. 3.1b)
EN 300 328 (ETS 300 328): Part 1, V1.1.1 and Part 2, V1.2.2 (2000-07)	Radio Frequency Spectrum Efficiency (Art. 3.2)

Note that the radio frequency band used by this equipment is not harmonized throughout the European Community. According to the R&TTE directive 1999/5/EC is this equipment a 'Class 2' equipment and marked accordingly with the assigned Class Identifier.

CE Conformity Marking:



*) Safety requirement according to the article 3.1a of R&TTE Directive are not applicable on this *Bluetooth* radio module, since it is intended to be integrated in final products/applications.

Because this Bluetooth™ radio module is very small and intended to be integrated/installed in final products (OEM products/applications) it is not practicable to place the label including the CE conformity marking on it. Therefore the required labeling information is placed in this technical description/installation manual of this radio module. However the CE conformity marking referred to in R&TTE Directive, Article 12 is displayed on the packaging of the radio module in an appropriate form.

OEM products/applications, where this Bluetooth™ radio module is integrated/installed in, has to be labeled in accordance with R&TTE Directive, Article 12.

An auxiliary label is included in the packaging of this radio module, which can be used for that purpose and has to be permanently affixed to the OEM product/application or to its data plate and to its packaging and to accompanying documents. The label has to be affixed visibly (label data must be visible from the outside of the equipment enclosure) legibly and indelibly.

Note that in case of using the provided auxiliary label, additionally following statement has to be included in the users manual of the final product (OEM product/application):

Note that the radio frequency band used by this equipment is not harmonized throughout the European Community. According to the R&TTE directive 1999/5/EC is this equipment a 'Class 2' equipment and marked accordingly with the assigned Class Identifier.

6.3 United States of America (USA)

This *Bluetooth* radio module complies with part 15 of the Federal Communications Commission (FCC) Rules and labeled in accordance with the FCC Rules.

FCC ID: P6L-SieMo-S50037

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note that any changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Because this Bluetooth™ radio module is very small and intended to be integrated/installed in OEM products/applications it is not practicable to place the label including the FCC statement on it. Therefore the required labeling information is placed in this chapter of the technical description/installation manual of this radio module. However the FCC identifier is displayed on the packaging of the radio module in an appropriate form.

OEM products/applications, where this Bluetooth™ radio module is integrated/installed in, has to be labeled in accordance with FCC Rules (section 15.19 and 47 CFR Ch. I: §2.925, §2.926).

An auxiliary label is included in the packaging of this radio module, which can be used for that purpose and has to be permanently affixed to the OEM product/application in a readily visible (label data must be visible from the outside of the equipment enclosure) manner (eg. on an exterior surface of the equipment).

Note that in case of using the provided auxiliary label, additionally following statement has to be included in the users manual of the final product (OEM product/application):

This device complies with part 15 of the Federal Communications Commission (FCC) Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note that any changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Manufacturer information concerning antenna:

The only antenna(s) approved for use with this Bluetooth™ radio module are those documented in this construction file, and must be installed in the manner specified therein. In all other cases, where the second manufacturer/installer desires to use an antenna with this module that has not been previously approved for use with it, then one of the following procedures has to be followed in order to ensure the compliance of the new antenna:

1. The Manufacturer of this *Bluetooth* radio module files a Class II permissive change to approve the new antenna with the module.
2. The second manufacturer/installer obtains a separate FCC equipment authorization for the module and the new antenna.

7 Bluetooth Trademark

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A, and licensed to Siemens AG.

This product is a qualified Bluetooth[™] product and compliant to the Bluetooth[™] specifications version 1.1.