

FCC Sub6 REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: November 13, 2023
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-2311-FC035

FCC ID:	A3LSMG556B
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-G556B
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n71 (5)	665.5 - 695.5	4M51G7D	PI/2 BPSK	0.070	18.43
		4M49G7D	QPSK	0.068	18.34
		4M49W7D	16QAM	0.056	17.46
		4M49W7D	64QAM	0.039	15.91
		4M51W7D	256QAM	0.024	13.78
Sub6 n71 (10)	668.0 - 693.0	8M97G7D	PI/2 BPSK	0.071	18.50
		9M00G7D	QPSK	0.070	18.46
		8M95W7D	16QAM	0.056	17.46
		8M96W7D	64QAM	0.039	15.95
		8M99W7D	256QAM	0.025	13.91
Sub6 n71 (15)	670.5 - 690.5	13M5G7D	PI/2 BPSK	0.074	18.67
		13M4G7D	QPSK	0.073	18.64
		13M5W7D	16QAM	0.058	17.67
		13M5W7D	64QAM	0.042	16.19
		13M5W7D	256QAM	0.026	14.16
Sub6 n71 (20)	673.0 - 688.0	17M9G7D	PI/2 BPSK	0.076	18.81
		18M0G7D	QPSK	0.074	18.71
		17M9W7D	16QAM	0.061	17.87
		17M9W7D	64QAM	0.042	16.28
		17M9W7D	256QAM	0.026	14.21

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2311-FC035

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2311-FC035	November 13, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(RADIATED TEST)	16
3.10 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EFFECTIVE RADIATED POWER.....	23
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS	30
8.6 BAND EDGE	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	31
9. TEST PLOTS.....	35
10. ANNEX A_ TEST SETUP PHOTO.....	120

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG556B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27
EUT Type:	Mobile phone
Model(s):	SM-G556B
SCS(kHz):	15
Bandwidth(MHz):	5, 10, 15, 20
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	665.5 MHz – 695.5 MHz (Sub6 n71(5 MHz)) 668.0 MHz – 693.0 MHz (Sub6 n71(10 MHz)) 670.5 MHz – 690.5 MHz (Sub6 n71(15 MHz)) 673.0 MHz – 688.0 MHz (Sub6 n71(20 MHz))
Date(s) of Tests:	September 27, 2023 ~ November 13, 2023
Serial number:	Radiated: R3CW908NFEN Conducted: R3CW908NHWB

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth, BT LE, NFC, AIT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven
by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = \text{Pg}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: Pg is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

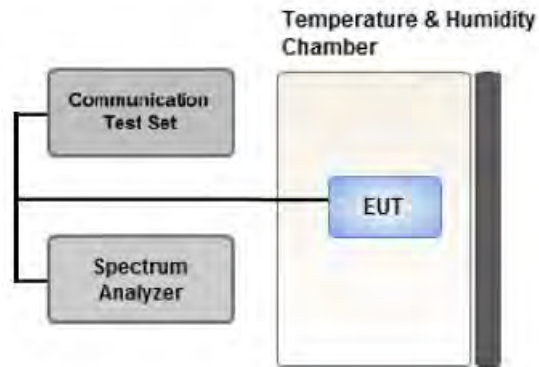

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

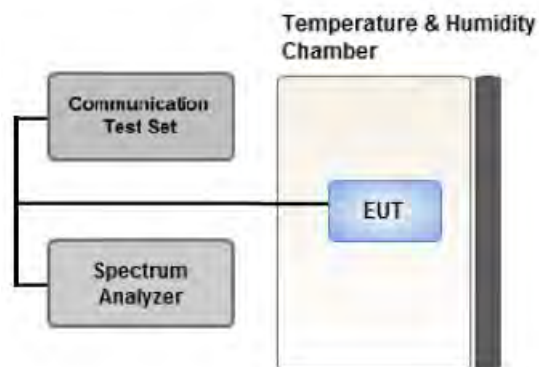

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

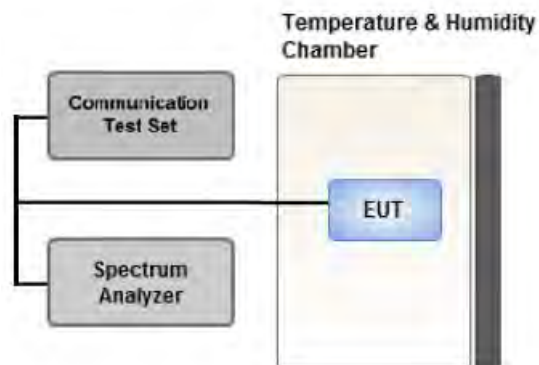

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 BAND EDGE

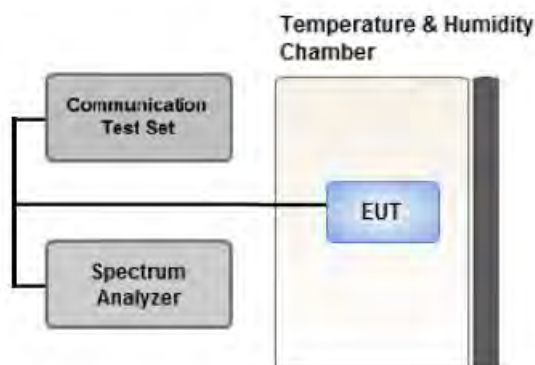

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

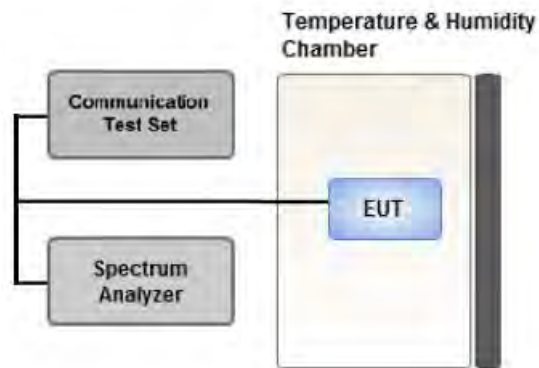

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: SA, NSA

Worst case: SA

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).

All EN-DC mode of operation (=anchor) were investigated and the test results were measured No Peak Found.

The test results which are attenuated more than 20 dB below the permissible value, so it was not reported.

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case : 20 MHz)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	PI/2 BPSK,	See Section 8.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.
(Worst case: PI/2 BPSK)
- All modes of operation were investigated and the worst case configuration results are reported.
Mode: SA, NSA
Worst case: SA
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth Peak- to- Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5,10,15,20	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	51
		15	Low	1	0
			High	1	78
		20	Low	1	0
			High	1	105
		5,10,15,20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5,10,15,20	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/27/2024	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/27/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	03/21/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	04/27/2025	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	01/16/2025	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
RF Switching System	FBSR-06B (1G HPF + LNA)	T&M SYSTEM	F3L1	05/22/2024	Annual
RF Switching System	FBSR-06B (3G HPF + LNA)	T&M SYSTEM	F3L2	05/22/2024	Annual
RF Switching System	FBSR-06B (6G HPF + LNA)	T&M SYSTEM	F3L3	05/22/2024	Annual
RF Switching System	FBSR-06B (LNA)	T&M SYSTEM	F3L4	05/22/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	08/25/2024	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	03/02/2024	Annual
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/11/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/22/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/22/2024	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/23/2024	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/19/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. Conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
665.5	Sub6 n71/ 5 MHz [15 kHz]	PI/2 BPSK	-31.41	27.48	-9.75	1.26	H	< 3.00	0.044	16.47	1	23
		QPSK	-31.42	27.47	-9.75	1.26	H		0.044	16.46		
		16-QAM	-32.49	26.40	-9.75	1.26	H		0.035	15.39		
		64-QAM	-33.94	24.95	-9.75	1.26	H		0.025	13.94		
		256-QAM	-36.02	22.87	-9.75	1.26	H		0.015	11.86		
680.5		PI/2 BPSK	-30.33	29.36	-9.65	1.28	H		0.070	18.43	1	23
		QPSK	-30.42	29.27	-9.65	1.28	H		0.068	18.34		
		16-QAM	-31.30	28.39	-9.65	1.28	H		0.056	17.46		
		64-QAM	-32.85	26.84	-9.65	1.28	H		0.039	15.91		
		256-QAM	-34.98	24.71	-9.65	1.28	H		0.024	13.78		
695.5		PI/2 BPSK	-29.91	29.02	-9.65	1.28	H		0.064	18.09	1	1
		QPSK	-30.04	28.89	-9.65	1.28	H		0.063	17.96		
		16-QAM	-31.08	27.85	-9.65	1.28	H		0.049	16.92		
		64-QAM	-32.51	26.42	-9.65	1.28	H		0.035	15.49		
		256-QAM	-34.54	24.39	-9.65	1.28	H		0.022	13.46		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
668.0	Sub6 n71/ 10 MHz [15 kHz]	PI/2 BPSK	-31.18	28.02	-9.75	1.26	H	< 3.00	0.050	17.01	1	50
		QPSK	-31.19	28.01	-9.75	1.26	H		0.050	17.00		
		16-QAM	-32.10	27.10	-9.75	1.26	H		0.041	16.09		
		64-QAM	-33.63	25.57	-9.75	1.26	H		0.029	14.56		
		256-QAM	-35.69	23.51	-9.75	1.26	H		0.018	12.50		
680.5		PI/2 BPSK	-30.26	29.43	-9.65	1.28	H		0.071	18.50	1	50
		QPSK	-30.30	29.39	-9.65	1.28	H		0.070	18.46		
		16-QAM	-31.30	28.39	-9.65	1.28	H		0.056	17.46		
		64-QAM	-32.81	26.88	-9.65	1.28	H		0.039	15.95		
		256-QAM	-34.85	24.84	-9.65	1.28	H		0.025	13.91		
693.0		PI/2 BPSK	-30.08	29.07	-9.65	1.27	H		0.065	18.15	1	25
		QPSK	-30.12	29.03	-9.65	1.27	H		0.065	18.11		
		16-QAM	-31.06	28.09	-9.65	1.27	H		0.052	17.17		
		64-QAM	-32.60	26.55	-9.65	1.27	H		0.037	15.63		
		256-QAM	-34.68	24.47	-9.65	1.27	H		0.023	13.55		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
670.5	Sub6 n71/ 15 MHz [15 kHz]	PI/2 BPSK	-30.75	28.58	-9.75	1.26	H	< 3.00	0.057	17.57	1	77
		QPSK	-30.79	28.54	-9.75	1.26	H		0.057	17.53		
		16-QAM	-31.68	27.65	-9.75	1.26	H		0.046	16.64		
		64-QAM	-33.25	26.08	-9.75	1.26	H		0.032	15.07		
		256-QAM	-35.35	23.98	-9.75	1.26	H		0.020	12.97		
680.5		PI/2 BPSK	-30.09	29.60	-9.65	1.28	H		0.074	18.67	1	77
		QPSK	-30.12	29.57	-9.65	1.28	H		0.073	18.64		
		16-QAM	-31.09	28.60	-9.65	1.28	H		0.058	17.67		
		64-QAM	-32.57	27.12	-9.65	1.28	H		0.042	16.19		
		256-QAM	-34.60	25.09	-9.65	1.28	H		0.026	14.16		
690.5		PI/2 BPSK	-30.01	29.36	-9.65	1.27	H		0.070	18.44	1	39
		QPSK	-30.03	29.34	-9.65	1.27	H		0.070	18.42		
		16-QAM	-30.96	28.41	-9.65	1.27	H		0.056	17.49		
		64-QAM	-32.49	26.88	-9.65	1.27	H		0.039	15.96		
		256-QAM	-34.62	24.75	-9.65	1.27	H		0.024	13.83		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
673.0	Sub6 n71/ 20 MHz [15 kHz]	PI/2 BPSK	-30.43	28.95	-9.75	1.26	H	< 3.00	0.062	17.94	1	104
		QPSK	-30.45	28.93	-9.75	1.26	H		0.062	17.92		
		16-QAM	-31.38	28.00	-9.75	1.26	H		0.050	16.99		
		64-QAM	-32.83	26.55	-9.75	1.26	H		0.036	15.54		
		256-QAM	-34.94	24.44	-9.75	1.26	H		0.022	13.43		
680.5		PI/2 BPSK	-29.95	29.74	-9.65	1.28	H		0.076	18.81	1	104
		QPSK	-30.05	29.64	-9.65	1.28	H		0.074	18.71		
		16-QAM	-30.89	28.80	-9.65	1.28	H		0.061	17.87		
		64-QAM	-32.48	27.21	-9.65	1.28	H		0.042	16.28		
		256-QAM	-34.55	25.14	-9.65	1.28	H		0.026	14.21		
688.0		PI/2 BPSK	-30.02	29.43	-9.65	1.27	H		0.071	18.51	1	53
		QPSK	-30.05	29.40	-9.65	1.27	H		0.070	18.48		
		16-QAM	-31.01	28.44	-9.65	1.27	H		0.056	17.52		
		64-QAM	-32.48	26.97	-9.65	1.27	H		0.040	16.05		
		256-QAM	-34.60	24.85	-9.65	1.27	H		0.025	13.93		

8.2 RADIATED SPURIOUS EMISSIONS

■ NR Band:	<u>N71</u>
■ Bandwidth:	<u>20 MHz</u>
■ Modulation:	<u>PI/2 BPSK</u>
■ Distance:	<u>3 meters</u>
■ SCS:	<u>15 kHz</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Size
134600 (673.0)	1 346.00	-54.92	6.75	-60.98	1.74	H	-55.97	-13.00	1	104
	2 019.00	-58.46	9.40	-64.73	2.15	H	-57.48	-13.00		
	2 692.00	-57.52	10.25	-61.61	2.59	H	-53.95	-13.00		
	3 365.00	-49.67	11.00	-51.96	2.94	H	-43.90	-13.00		
	4 038.00	-56.61	11.00	-55.44	3.20	H	-47.64	-13.00		
136100 (680.5)	1 361.00	-55.58	7.00	-61.79	1.80	V	-56.59	-13.00	1	104
	2 041.50	-58.16	9.40	-64.28	2.23	V	-57.11	-13.00		
	2 722.00	-57.68	10.40	-62.02	2.63	V	-54.25	-13.00		
	3 402.50	-48.48	11.10	-51.53	2.91	H	-43.34	-13.00		
	4 083.00	-53.88	11.20	-53.33	3.27	H	-45.40	-13.00		
137600 (688.0)	1 376.00	-55.28	7.00	-61.27	1.82	H	-56.09	-13.00	1	53
	2 064.00	-57.70	9.20	-63.44	2.27	V	-56.51	-13.00		
	2 752.00	-58.89	10.30	-62.53	2.66	V	-54.89	-13.00		
	3 440.00	-49.35	11.10	-51.63	2.97	H	-43.50	-13.00		
	4 128.00	-57.47	11.30	-57.06	3.23	V	-48.99	-13.00		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n71	5 MHz	680.5	BPSK	25	0	5.72
			QPSK			6.09
			16-QAM			6.78
			64-QAM			6.98
			256-QAM			7.19
	10 MHz		BPSK	50		5.38
			QPSK			5.82
			16-QAM			6.47
			64-QAM			6.76
			256-QAM			7.14
	15 MHz		BPSK	75		4.59
			QPSK			5.72
			16-QAM			6.62
			64-QAM			7.00
			256-QAM			7.17
	20 MHz		BPSK	100		5.10
			QPSK			5.78
			16-QAM			6.51
			64-QAM			6.77
			256-QAM			7.02

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 56 ~ 75.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n71	5 MHz	680.5	BPSK	25	0	4.5065
			QPSK			4.4866
			16-QAM			4.4917
			64-QAM			4.4904
			256-QAM			4.5092
	10 MHz		BPSK	50		8.9655
			QPSK			8.9966
			16-QAM			8.9534
			64-QAM			8.9613
			256-QAM			8.9891
	15 MHz		BPSK	75		13.487
			QPSK			13.437
			16-QAM			13.473
			64-QAM			13.490
			256-QAM			13.486
	20 MHz		BPSK	100		17.929
			QPSK			18.038
			16-QAM			17.925
			64-QAM			17.894
			256-QAM			17.905

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 36 ~ 55.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n71	5	665.5	4.0200	30.200	-74.270	-44.070	-13.00
		680.5	6.9272	30.815	-75.175	-44.360	
		695.5	9.6934	30.815	-75.205	-44.390	
	10	668.0	9.4013	30.815	-74.718	-43.903	
		680.5	7.9955	30.815	-74.648	-43.833	
		693.0	6.0145	30.815	-74.768	-43.953	
	15	670.5	4.5529	30.200	-75.116	-44.916	
		680.5	9.1565	30.815	-75.174	-44.359	
		690.5	9.9506	30.815	-74.705	-43.890	
	20	673.0	8.3066	30.815	-74.779	-43.964	
		680.5	9.0997	30.815	-75.149	-44.334	
		688.0	7.4721	30.815	-75.036	-44.221	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 108 ~ 119.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 76 ~ 107.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.850 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
665.5	100 %	+20(Ref)	665 499 998	0.0	0.000 000	0.000
	100 %	-30	665 499 996	-1.8	0.000 000	-0.003
	100 %	-20	665 499 996	-2.0	0.000 000	-0.003
	100 %	-10	665 499 996	-2.2	0.000 000	-0.003
	100 %	0	665 499 996	-2.1	0.000 000	-0.003
	100 %	+10	665 499 996	-2.0	0.000 000	-0.003
	100 %	+30	665 499 996	-2.5	0.000 000	-0.004
	100 %	+40	665 499 995	-2.7	0.000 000	-0.004
	100 %	+50	665 499 996	-2.4	0.000 000	-0.004
	Batt. Endpoint	+20	665 499 995	-2.7	0.000 000	-0.004
695.5	100 %	+20(Ref)	695 499 998	0.0	0.000 000	0.000
	100 %	-30	695 499 996	-1.7	0.000 000	-0.002
	100 %	-20	695 499 997	-1.3	0.000 000	-0.002
	100 %	-10	695 499 997	-1.3	0.000 000	-0.002
	100 %	0	695 499 997	-1.3	0.000 000	-0.002
	100 %	+10	695 499 997	-1.0	0.000 000	-0.001
	100 %	+30	695 499 998	-0.5	0.000 000	-0.001
	100 %	+40	695 499 997	-0.9	0.000 000	-0.001
	100 %	+50	695 499 997	-1.0	0.000 000	-0.001
	Batt. Endpoint	+20	695 499 997	-1.1	0.000 000	-0.002

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.850 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
668.0	100 %	+20(Ref)	667 999 997	0.0	0.000 000	0.000
	100 %	-30	667 999 993	-3.8	-0.000 001	-0.006
	100 %	-20	667 999 993	-3.6	-0.000 001	-0.005
	100 %	-10	667 999 993	-4.0	-0.000 001	-0.006
	100 %	0	667 999 993	-4.0	-0.000 001	-0.006
	100 %	+10	667 999 995	-1.8	0.000 000	-0.003
	100 %	+30	667 999 996	-0.1	0.000 000	0.000
	100 %	+40	667 999 996	-0.7	0.000 000	-0.001
	100 %	+50	667 999 996	-0.7	0.000 000	-0.001
	Batt. Endpoint	+20	667 999 996	-0.8	0.000 000	-0.001
693.0	100 %	+20(Ref)	692 999 998	0.0	0.000 000	0.000
	100 %	-30	692 999 998	-0.6	0.000 000	-0.001
	100 %	-20	692 999 997	-1.1	0.000 000	-0.002
	100 %	-10	692 999 997	-1.8	0.000 000	-0.003
	100 %	0	692 999 996	-2.0	0.000 000	-0.003
	100 %	+10	692 999 996	-2.9	0.000 000	-0.004
	100 %	+30	692 999 996	-2.4	0.000 000	-0.003
	100 %	+40	692 999 998	-0.4	0.000 000	-0.001
	100 %	+50	692 999 997	-1.2	0.000 000	-0.002
	Batt. Endpoint	+20	692 999 997	-1.3	0.000 000	-0.002

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.850 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
670.5	100 %	+20(Ref)	670 499 997	0.0	0.000 000	0.000
	100 %	-30	670 499 994	-2.9	0.000 000	-0.004
	100 %	-20	670 499 994	-3.3	0.000 000	-0.005
	100 %	-10	670 499 994	-3.4	-0.000 001	-0.005
	100 %	0	670 499 997	-0.4	0.000 000	-0.001
	100 %	+10	670 499 994	-2.5	0.000 000	-0.004
	100 %	+30	670 499 995	-2.1	0.000 000	-0.003
	100 %	+40	670 499 994	-2.6	0.000 000	-0.004
	100 %	+50	670 499 996	-1.3	0.000 000	-0.002
	Batt. Endpoint	+20	670 499 997	-0.4	0.000 000	-0.001
690.5	100 %	+20(Ref)	690 499 996	0.0	0.000 000	0.000
	100 %	-30	690 499 991	-4.9	-0.000 001	-0.007
	100 %	-20	690 499 992	-4.1	-0.000 001	-0.006
	100 %	-10	690 499 994	-2.3	0.000 000	-0.003
	100 %	0	690 499 993	-2.9	0.000 000	-0.004
	100 %	+10	690 499 992	-4.1	-0.000 001	-0.006
	100 %	+30	690 499 993	-2.9	0.000 000	-0.004
	100 %	+40	690 499 993	-2.8	0.000 000	-0.004
	100 %	+50	690 499 993	-3.3	0.000 000	-0.005
	Batt. Endpoint	+20	690 499 991	-4.8	-0.000 001	-0.007

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 3.850 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
673.0	100 %	+20(Ref)	672 999 998	0.0	0.000 000	0.000
	100 %	-30	672 999 995	-2.5	0.000 000	-0.004
	100 %	-20	672 999 995	-2.3	0.000 000	-0.003
	100 %	-10	672 999 995	-2.5	0.000 000	-0.004
	100 %	0	672 999 995	-2.5	0.000 000	-0.004
	100 %	+10	672 999 995	-2.9	0.000 000	-0.004
	100 %	+30	672 999 995	-2.3	0.000 000	-0.003
	100 %	+40	672 999 995	-2.9	0.000 000	-0.004
	100 %	+50	672 999 995	-2.9	0.000 000	-0.004
	Batt. Endpoint	+20	672 999 995	-2.9	0.000 000	-0.004
688.0	100 %	+20(Ref)	687 999 999	0.0	0.000 000	0.000
	100 %	-30	687 999 999	0.0	0.000 000	0.000
	100 %	-20	687 999 999	-0.5	0.000 000	-0.001
	100 %	-10	688 000 000	0.9	0.000 000	0.001
	100 %	0	688 000 001	1.2	0.000 000	0.002
	100 %	+10	688 000 000	0.3	0.000 000	0.000
	100 %	+30	687 999 998	-1.1	0.000 000	-0.002
	100 %	+40	687 999 998	-1.1	0.000 000	-0.002
	100 %	+50	687 999 998	-1.5	0.000 000	-0.002
	Batt. Endpoint	+20	687 999 997	-2.1	0.000 000	-0.003

9. TEST PLOTS

Sub6 n71. Occupied Bandwidth Plot (5 M BW Ch.136100 BPSK_Full RB)




Sub6 n71. Occupied Bandwidth Plot (5 M BW Ch.136100 QPSK_ Full RB)




Sub6 n71. Occupied Bandwidth Plot (5 M BW Ch.136100 16QAM_ Full RB)



Sub6 n71. Occupied Bandwidth Plot (5 M BW Ch.136100 64QAM_ Full RB)

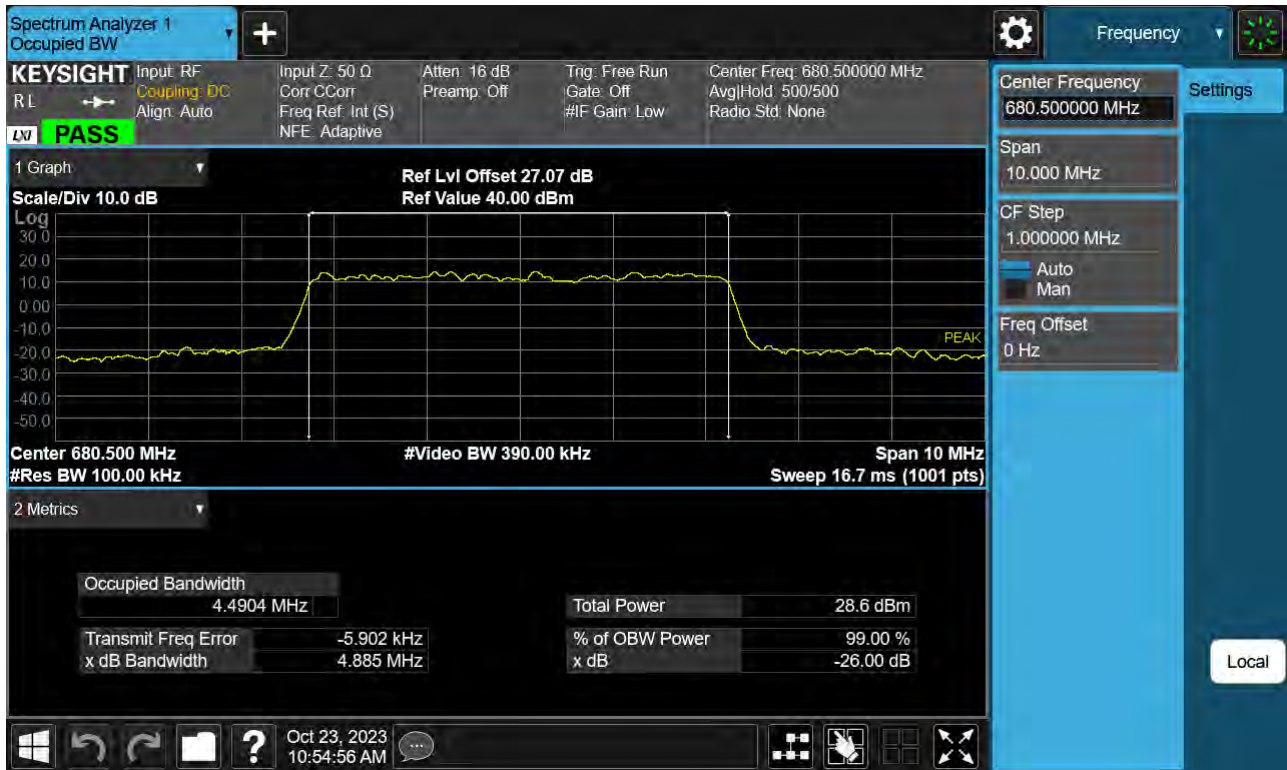


Sub6 n71. Occupied Bandwidth Plot (5 M BW Ch.136100 256QAM_ Full RB)

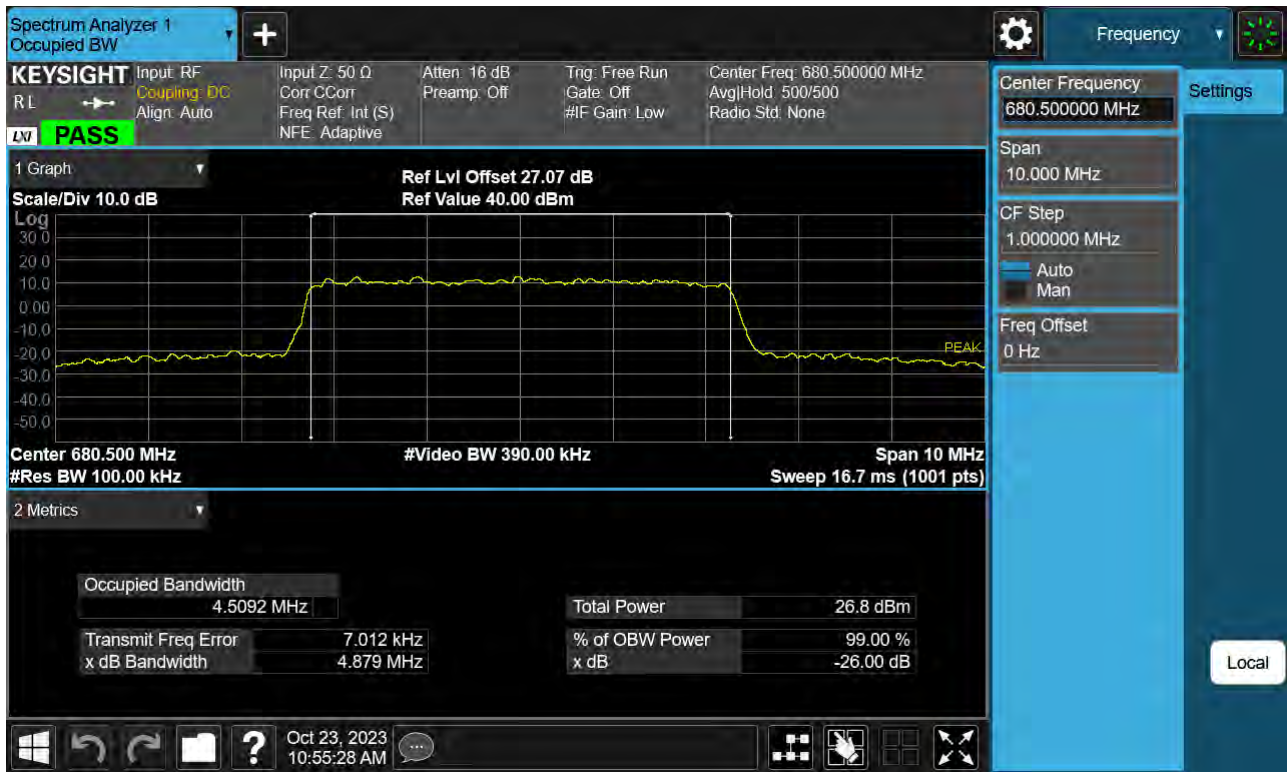

Sub6 n71. Occupied Bandwidth Plot (10 M BW Ch.136100 BPSK_ Full RB)



Sub6 n71. Occupied Bandwidth Plot (10 M BW Ch.136100 QPSK_ Full RB)

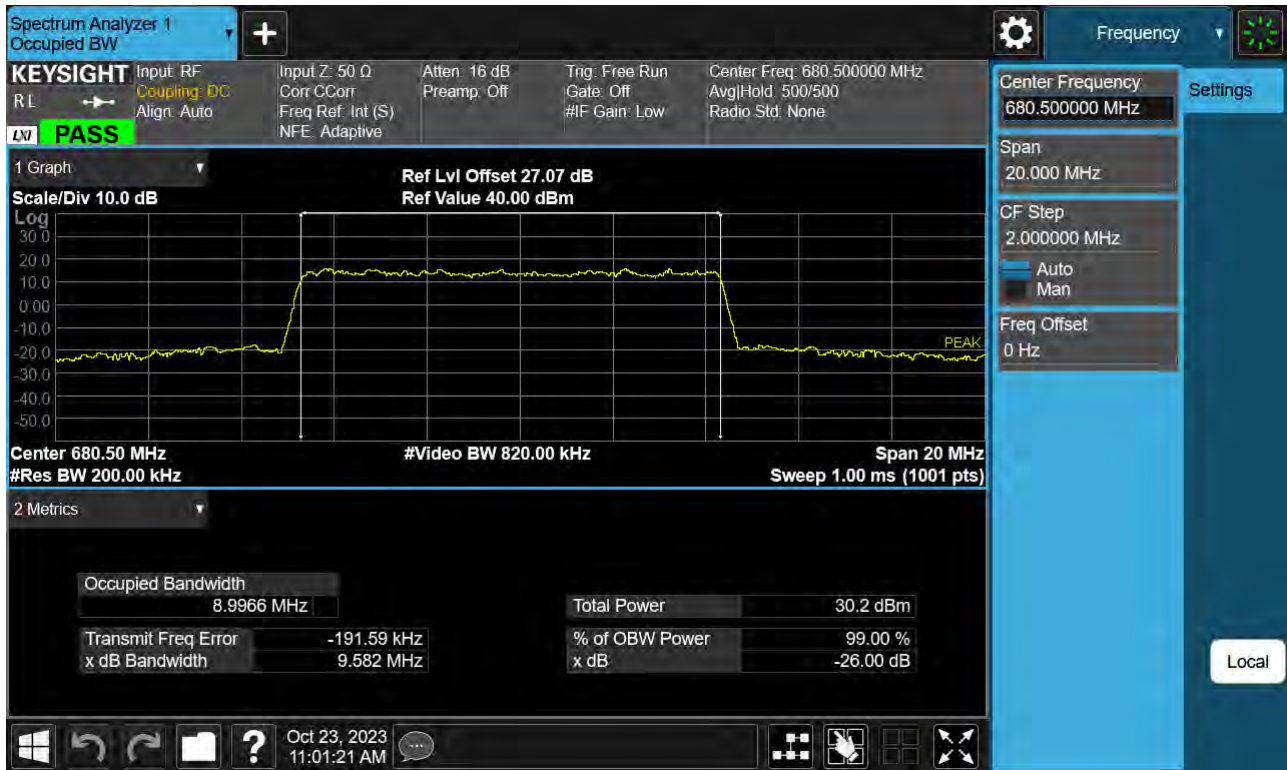


Sub6 n71. Occupied Bandwidth Plot (10 M BW Ch.136100 16QAM_ Full RB)



Sub6 n71. Occupied Bandwidth Plot (10 M BW Ch.136100 64QAM_ Full RB)




Sub6 n71. Occupied Bandwidth Plot (10 M BW Ch.136100 256QAM_ Full RB)

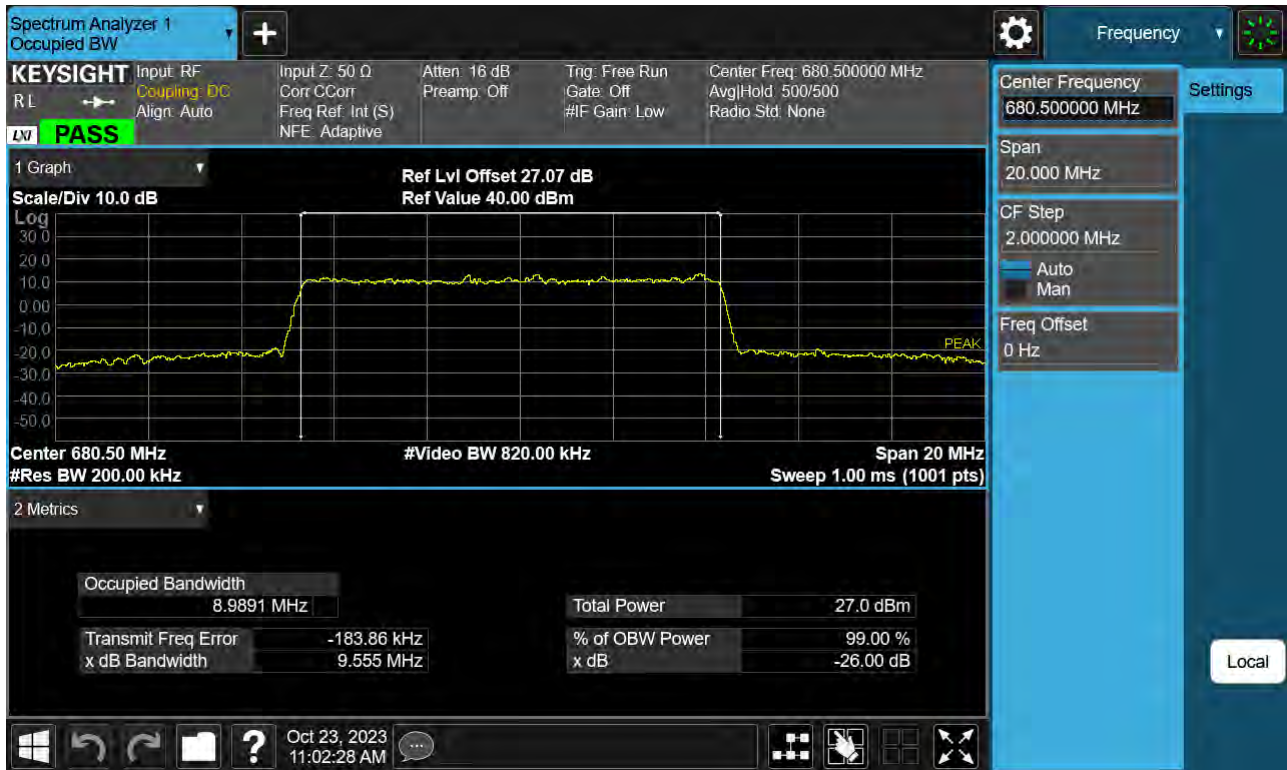


Sub6 n71. Occupied Bandwidth Plot (15 M BW Ch.136100 BPSK_ Full RB




Sub6 n71. Occupied Bandwidth Plot (15 M BW Ch.136100 QPSK_ Full RB

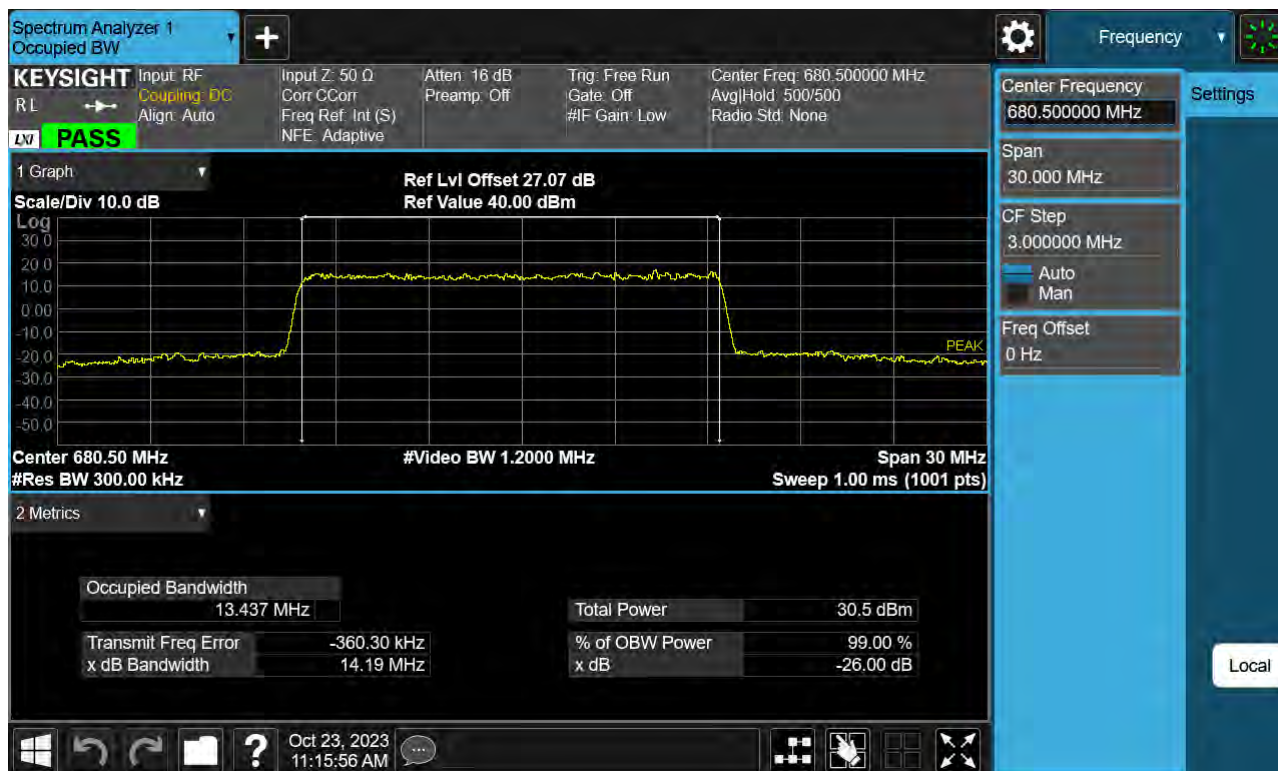

Sub6 n71. Occupied Bandwidth Plot (15 M BW Ch.136100 16QAM_ Full RB)

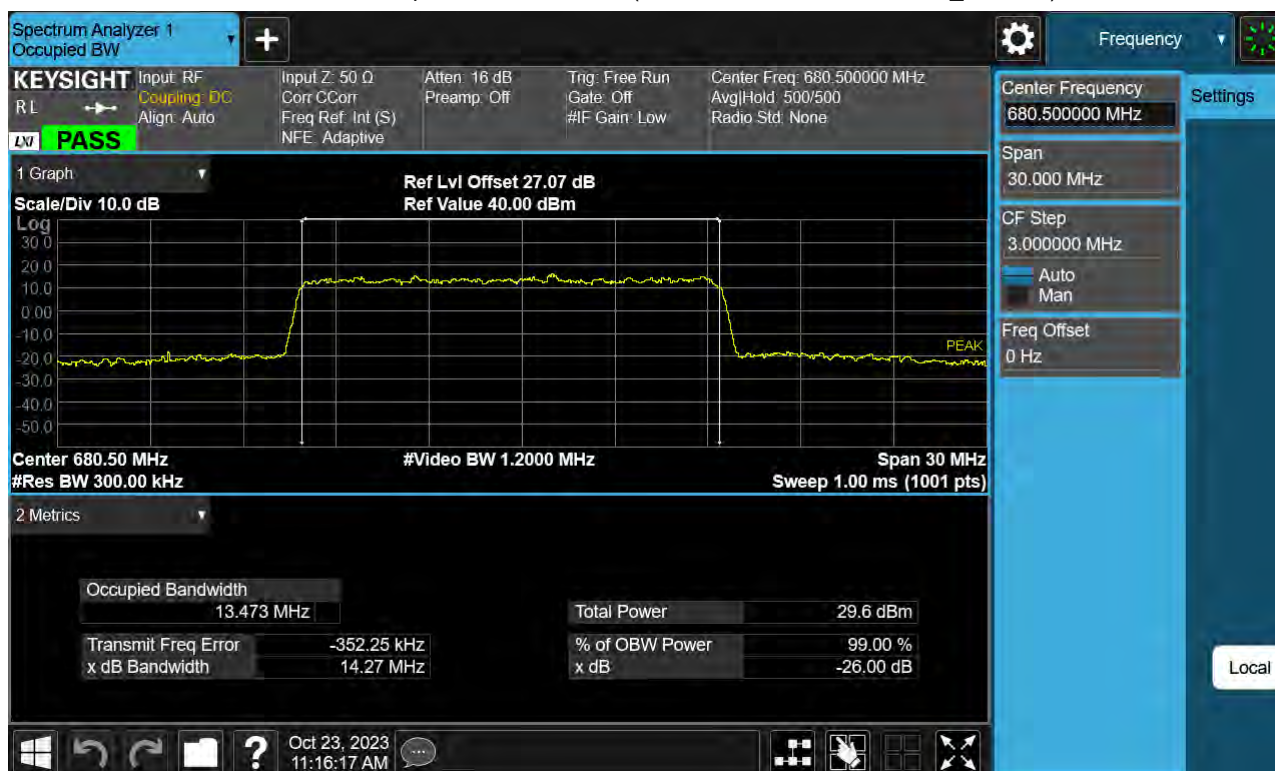

Sub6 n71. Occupied Bandwidth Plot (15 M BW Ch.136100 64QAM_ Full RB)

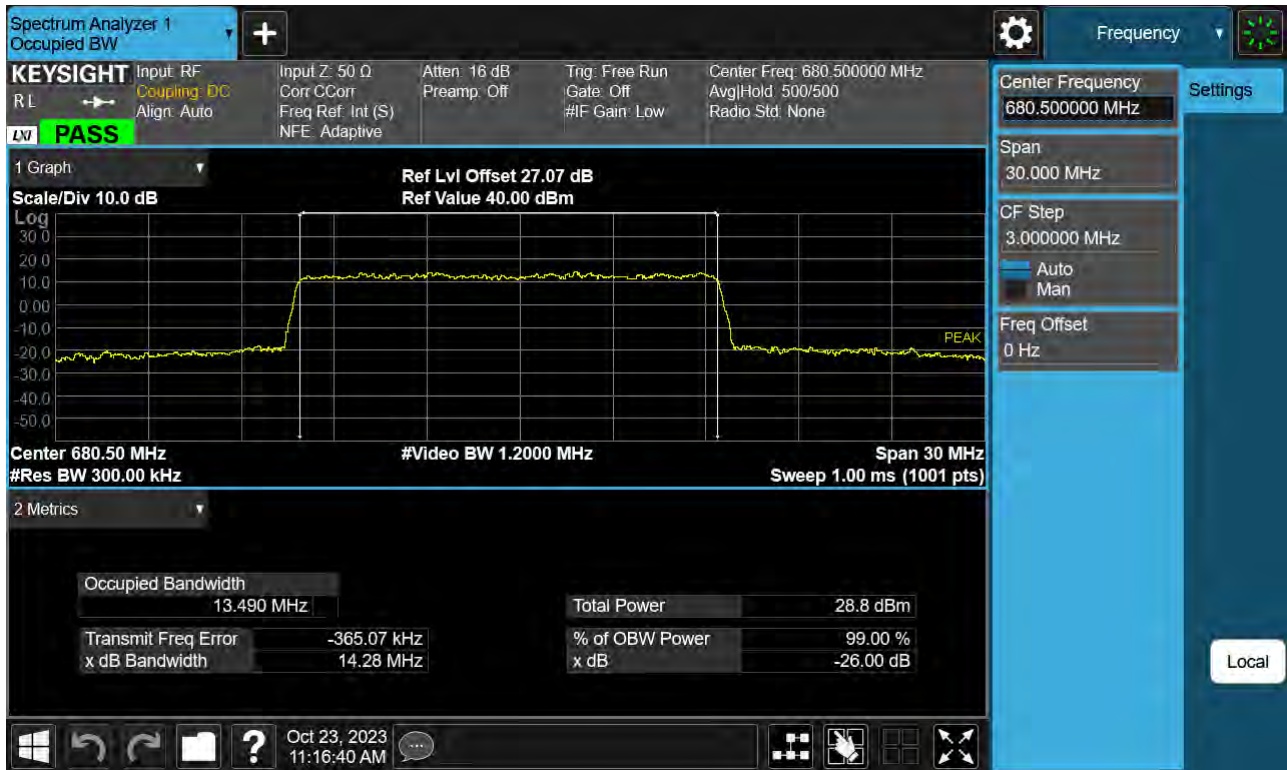

Sub6 n71. Occupied Bandwidth Plot (15 M BW Ch.136100 256QAM_ Full RB)




Sub6 n71. Occupied Bandwidth Plot (20 M BW Ch.136100 BPSK_ Full RB)




Sub6 n71. Occupied Bandwidth Plot (20 M BW Ch.136100 QPSK_ Full RB)




Sub6 n71. Occupied Bandwidth Plot (20 M BW Ch.136100 16QAM_ Full RB)

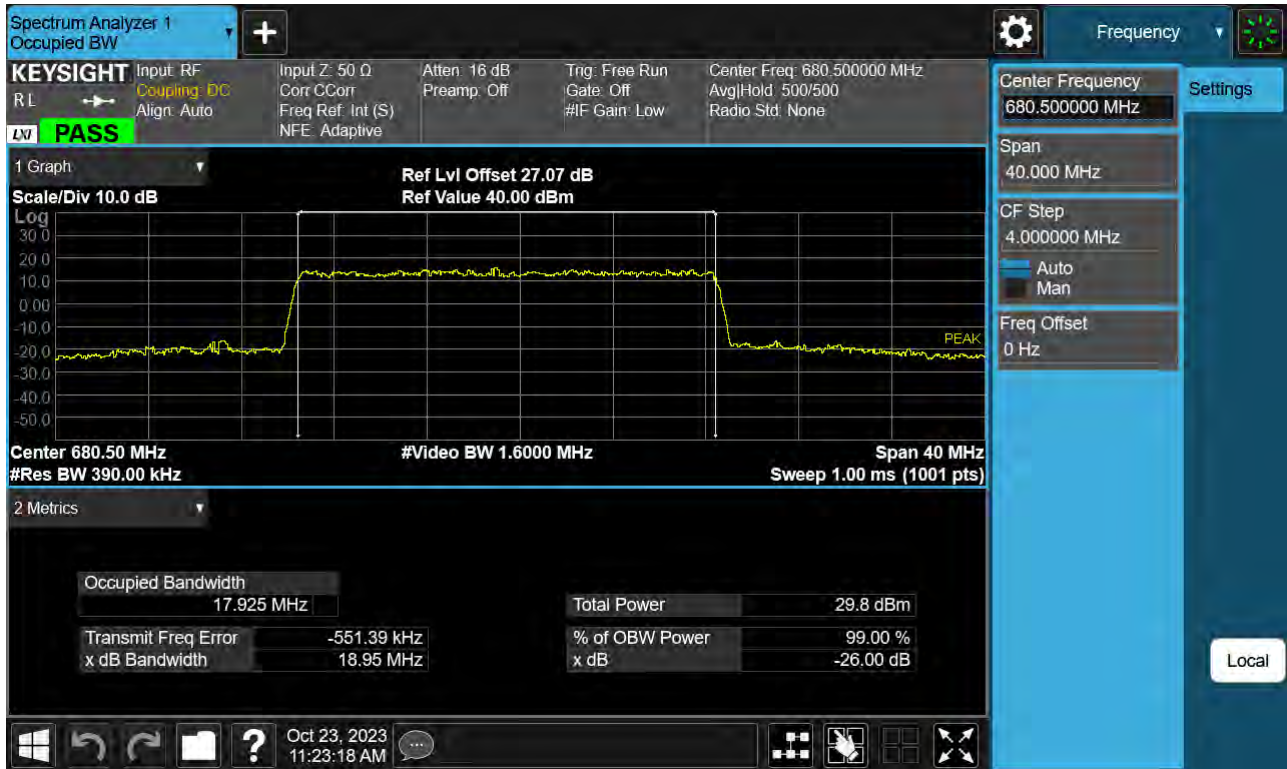

Sub6 n71. Occupied Bandwidth Plot (20 M BW Ch.136100 64QAM_ Full RB)

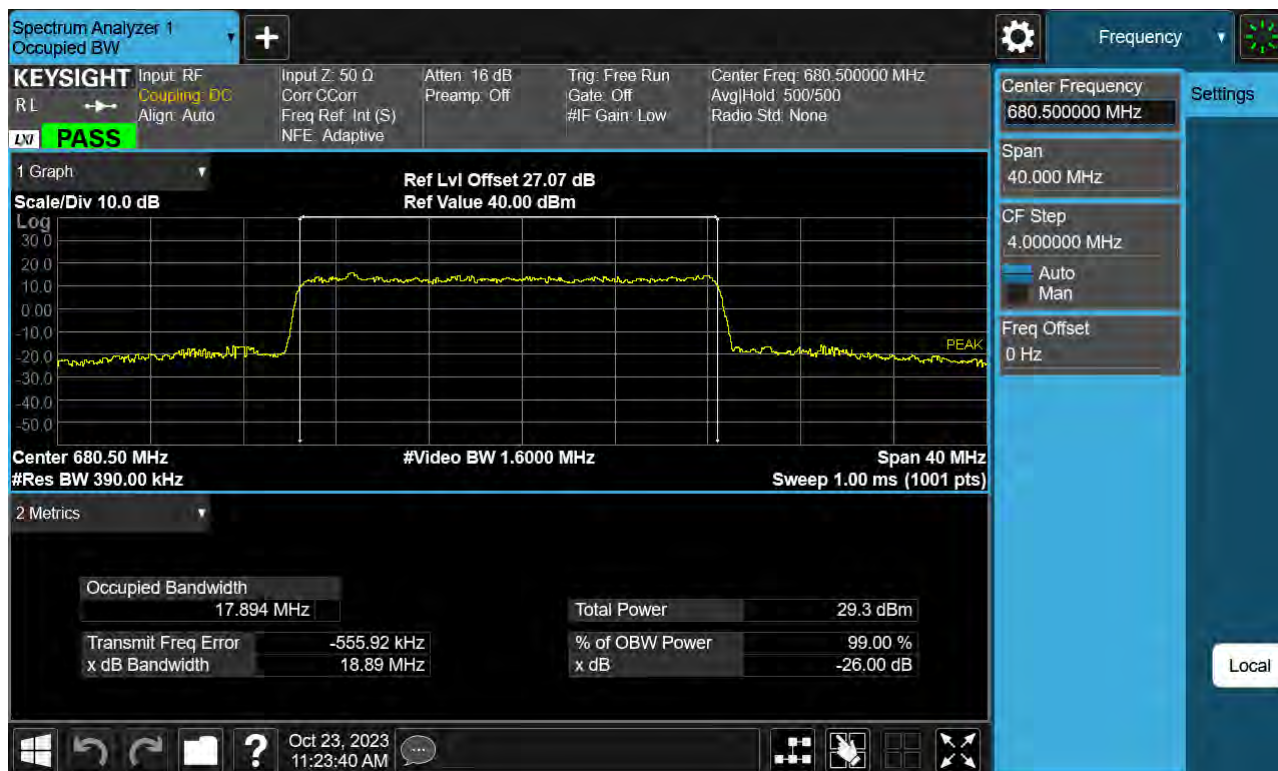

Sub6 n71. Occupied Bandwidth Plot (20 M BW Ch.136100 256QAM_ Full RB)

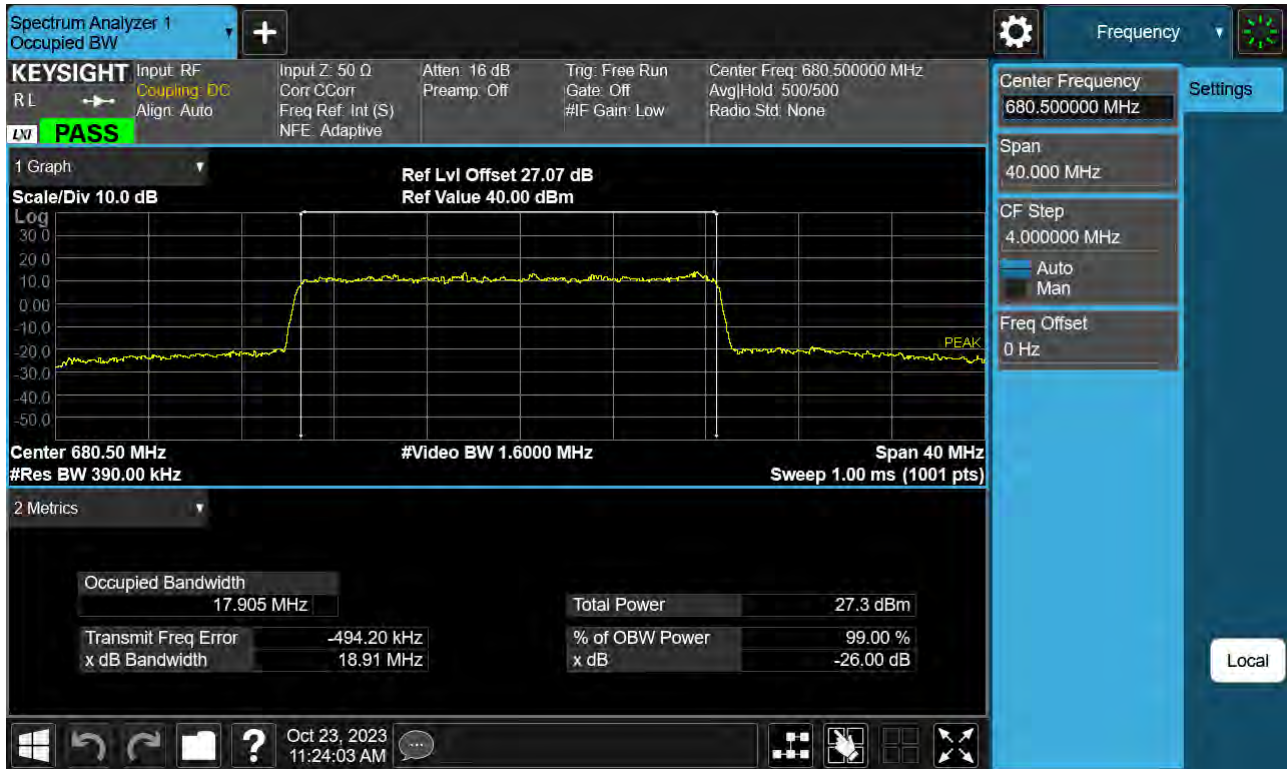

Sub6 n71. PAR Plot (5 M BW_Ch.349000_ BPSK_ Full RB)



Sub6 n71. PAR Plot (5 M BW_Ch.349000_QPSK_Full RB)




Sub6 n71. PAR Plot (5 M BW_Ch.349000_16QAM_Full RB)




Sub6 n71. PAR Plot (5 M BW_Ch.349000_64QAM_Full RB)



Sub6 n71. PAR Plot (5 M BW_Ch.349000_256QAM_Full RB)

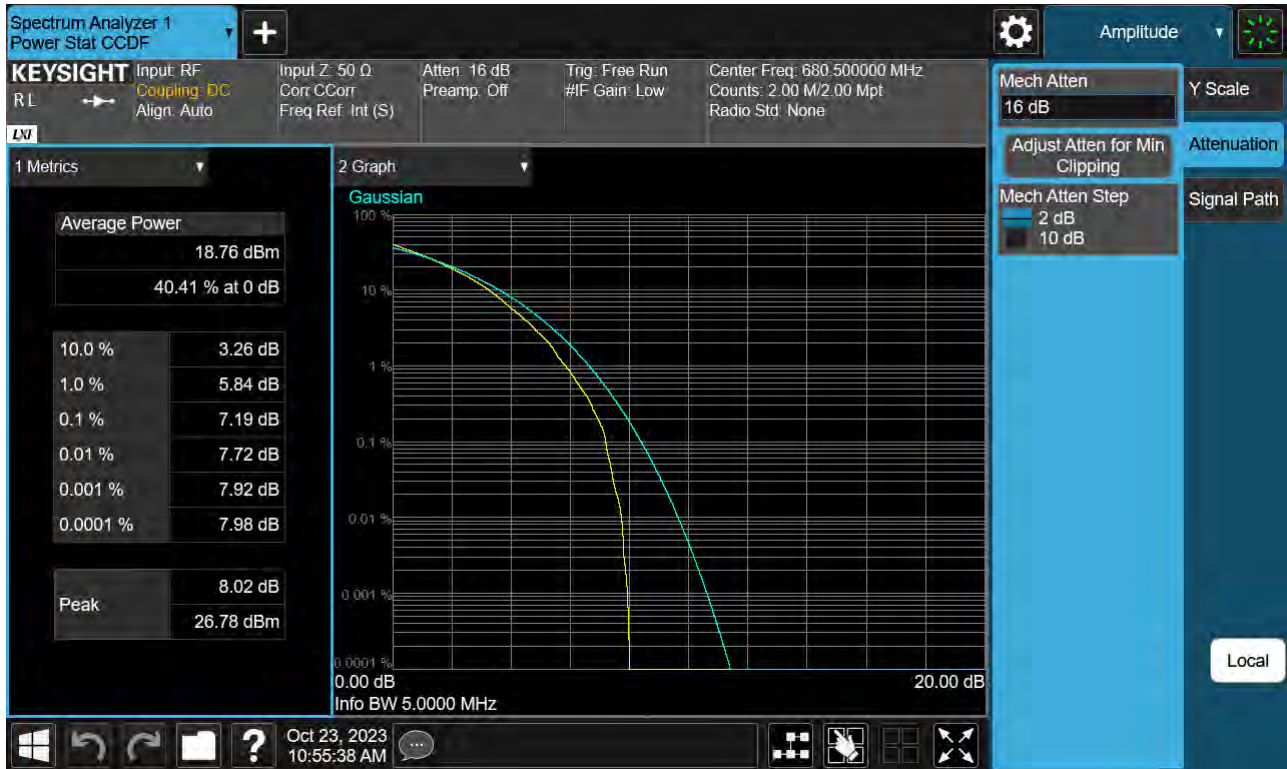

Sub6 n71. PAR Plot (10 M BW_Ch.349000_ BPSK_ Full RB)

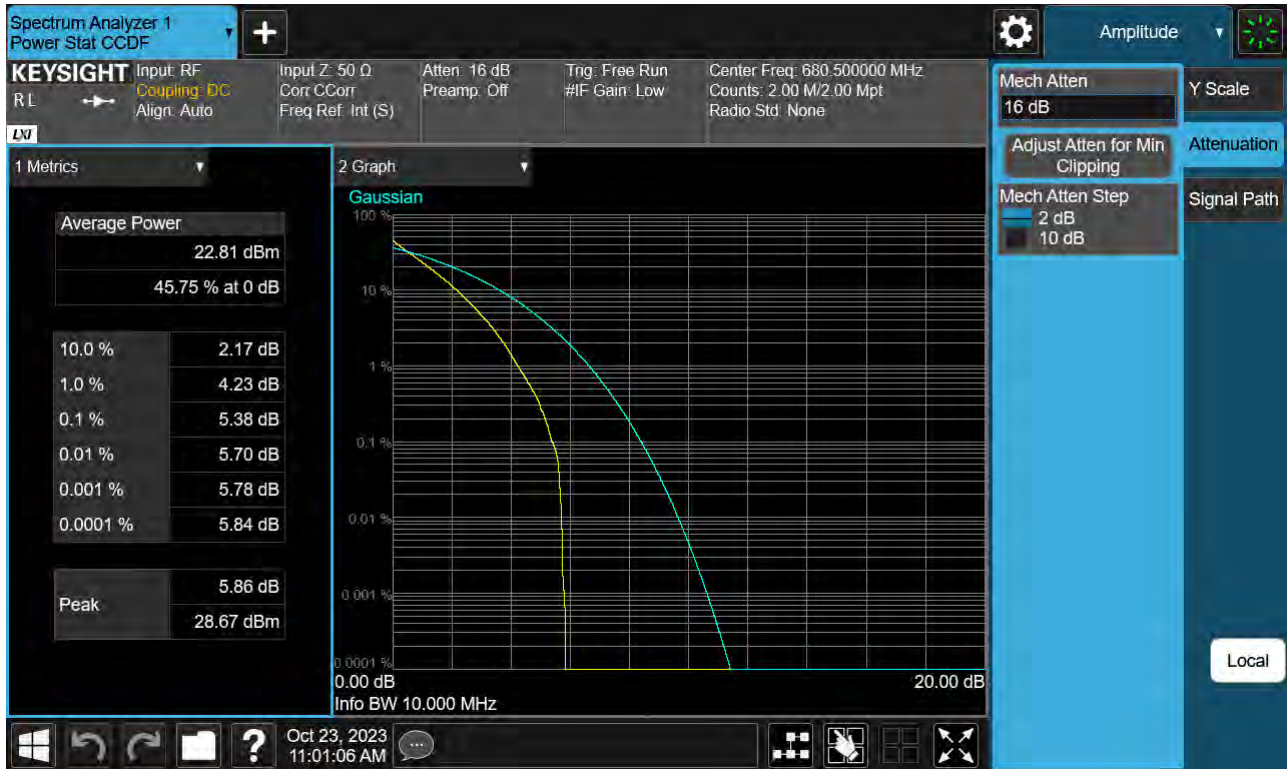

Sub6 n71. PAR Plot (10 M BW_Ch.349000_QPSK_Full RB)



Sub6 n71. PAR Plot (10 M BW_Ch.349000_16QAM_Full RB)



Sub6 n71. PAR Plot (10 M BW_Ch.349000_64QAM_Full RB)




Sub6 n71. PAR Plot (10 M BW_Ch.349000_256QAM_Full RB)



Sub6 n71. PAR Plot (15 M BW_Ch.349000_ BPSK_ Full RB)



Sub6 n71. PAR Plot (15 M BW_Ch.349000_QPSK_Full RB)

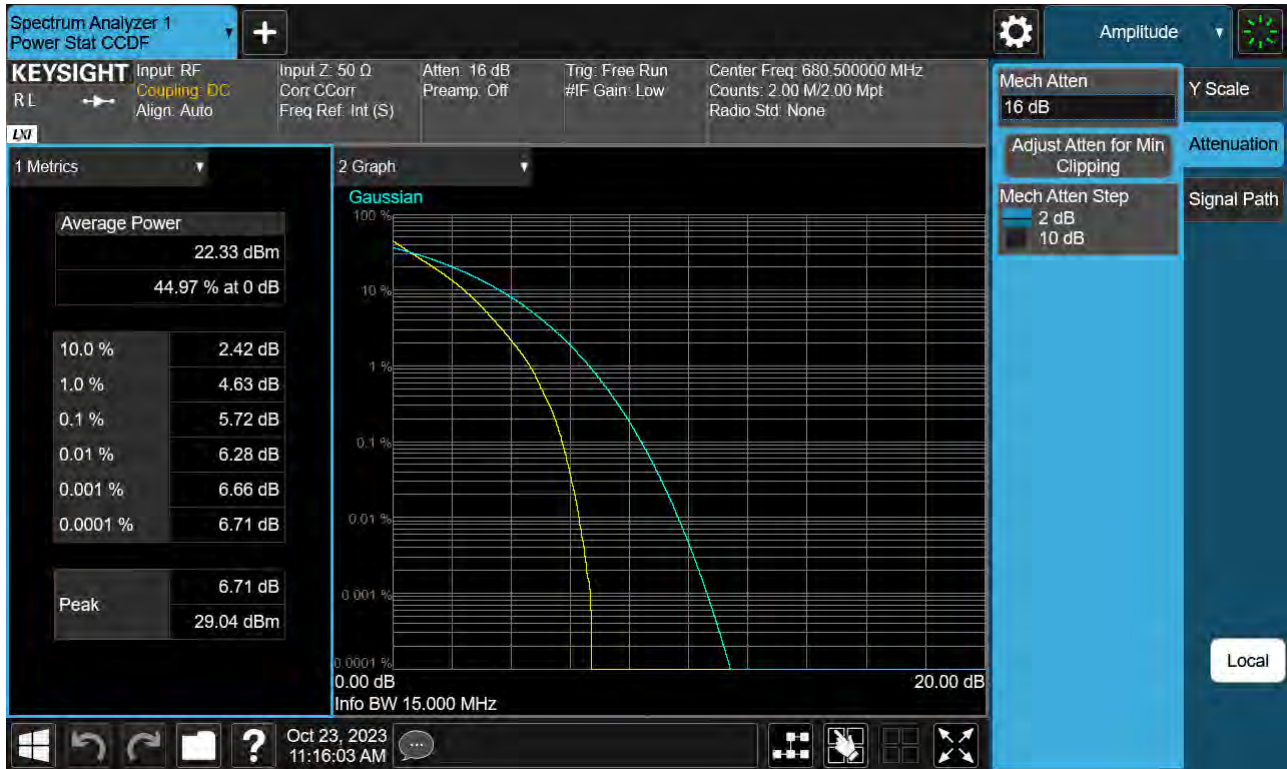

Sub6 n71. PAR Plot (15 M BW_Ch.349000_16QAM_Full RB)




Sub6 n71. PAR Plot (15 M BW_Ch.349000_64QAM_Full RB)



Sub6 n71. PAR Plot (15 M BW_Ch.349000_256QAM_Full RB)




Sub6 n71. PAR Plot (20 M BW_Ch.349000_ BPSK_ Full RB)

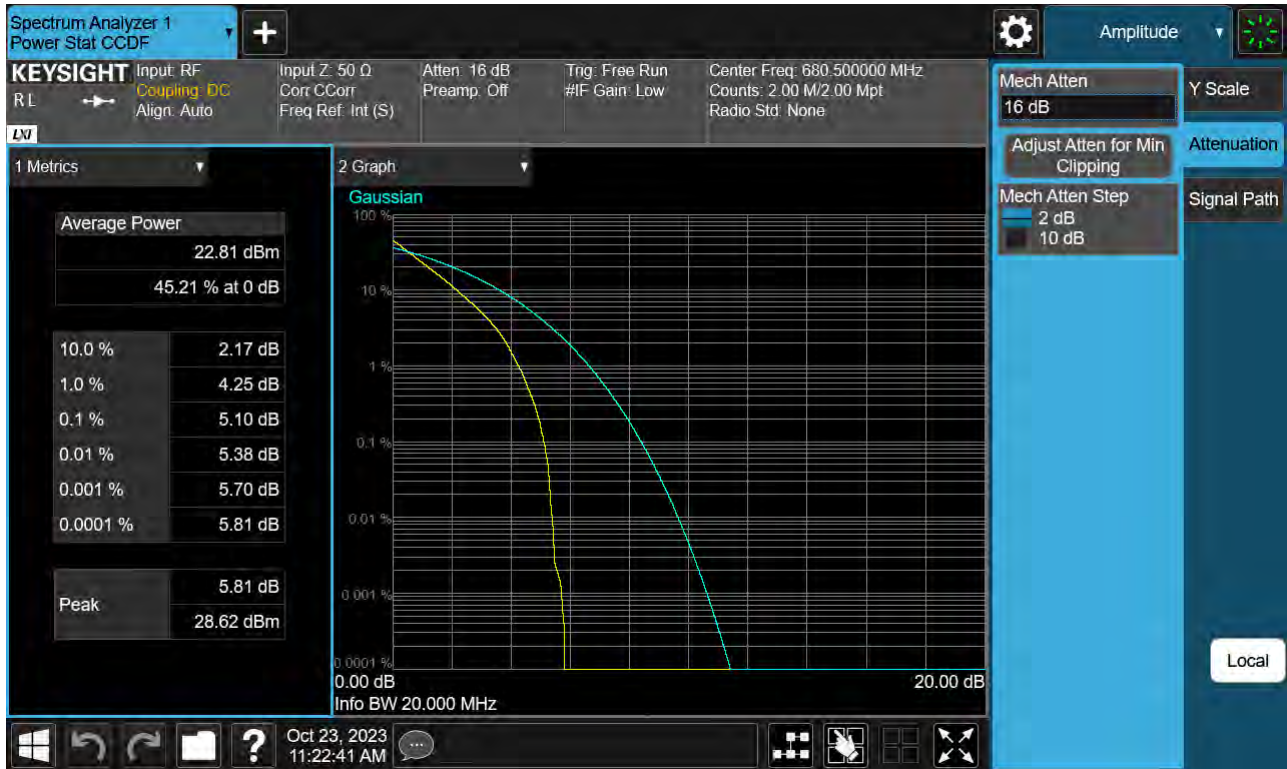

Sub6 n71. PAR Plot (20 M BW_Ch.349000_QPSK_Full RB)



Sub6 n71. PAR Plot (20 M BW_Ch.349000_16QAM_Full RB)

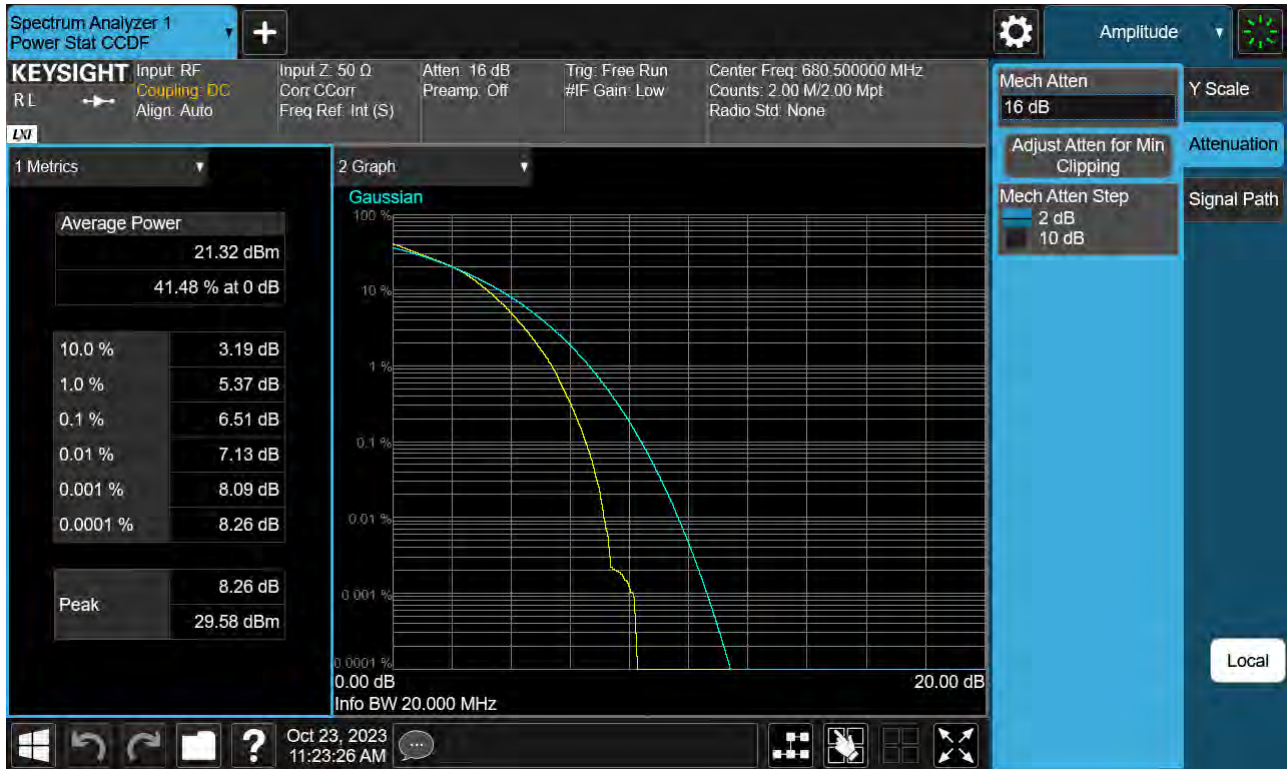


Sub6 n71. PAR Plot (20 M BW_Ch.349000_64QAM_Full RB)




Sub6 n71. PAR Plot (20 M BW_Ch.349000_256QAM_Full RB)



Sub6 n71. Lower Band Edge Plot (5 M BW Ch.133100 BPSK_RB1_Offset 0)_1

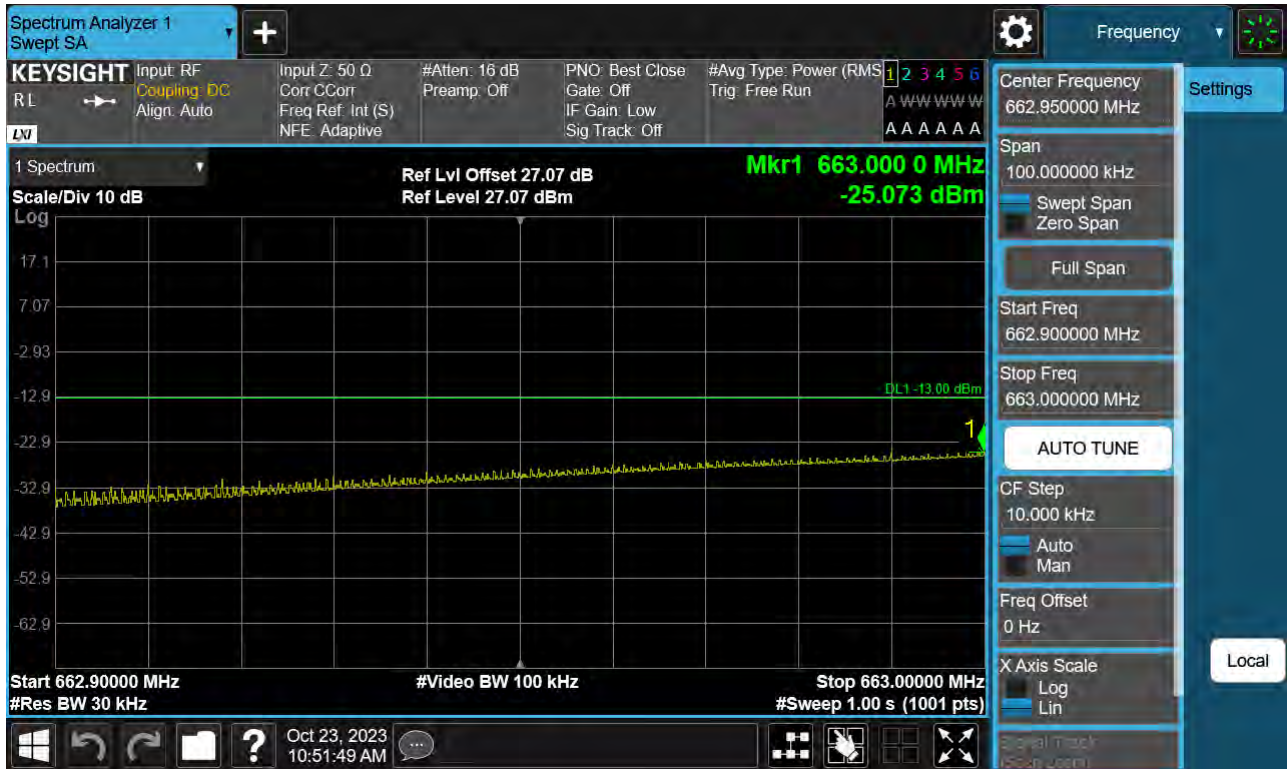

Sub6 n71. Lower Band Edge Plot (5 M BW Ch.133100 BPSK_RB1_Offset 0)_2

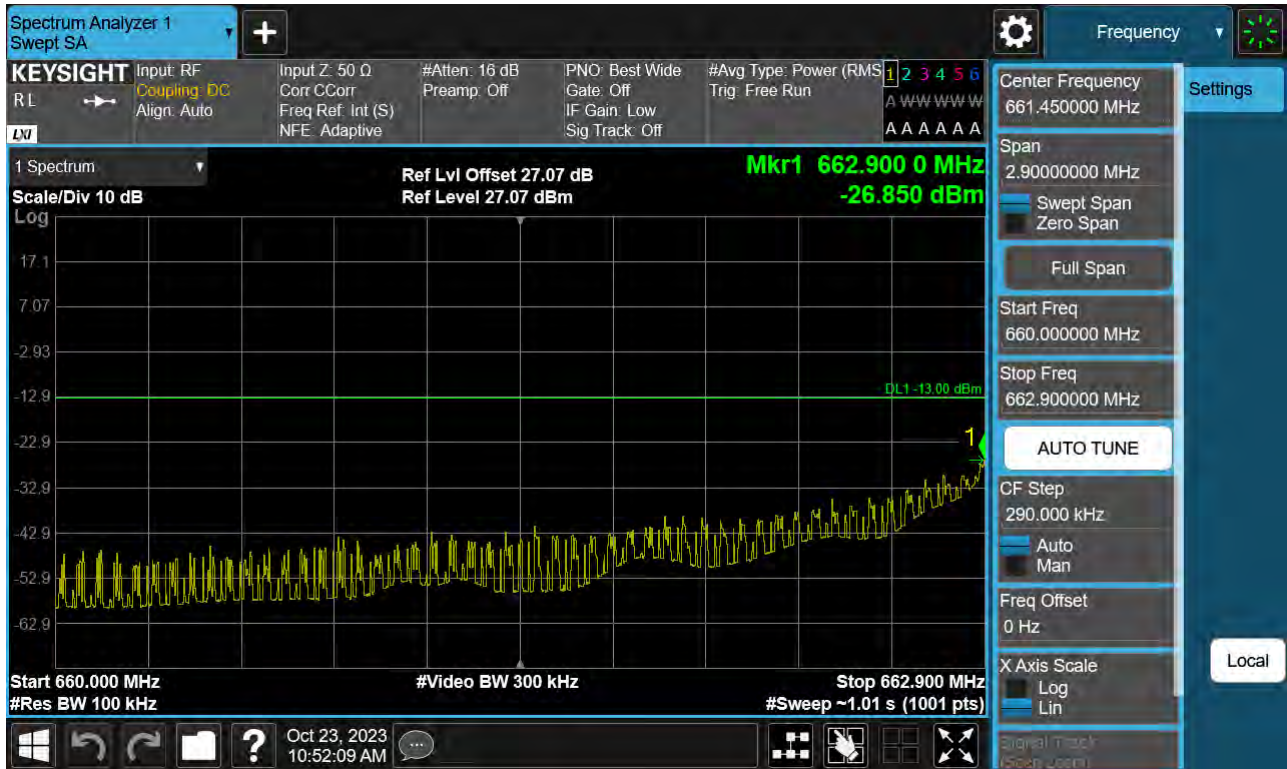

Sub6 n71. Lower Band Edge Plot (5 M BW Ch.133100 BPSK_ Full RB)



Sub6 n71. Lower Extended Band Edge Plot (5 M BW Ch.133100 BPSK_ Full RB)



Sub6 n71. Lower Band Edge Plot (10 M BW Ch.133600 BPSK_RB1_Offset 0)_1



Sub6 n71. Lower Band Edge Plot (10 M BW Ch.133600 BPSK_RB1_Offset 0)_2



Sub6 n71. Lower Band Edge Plot (10 M BW Ch.133600 BPSK_ Full RB)



Sub6 n71. Lower Extended Band Edge Plot (10 M BW Ch.133600 BPSK_ Full RB)



Sub6 n71. Lower Band Edge Plot (15 M BW Ch.134100 BPSK_RB1_Offset 0)_1



Sub6 n71. Lower Band Edge Plot (15 M BW Ch.134100 BPSK_RB1_Offset 0)_2




Sub6 n71. Lower Band Edge Plot (15 M BW Ch.134100 BPSK_ Full RB)



Sub6 n71. Lower Extended Band Edge Plot (15 M BW Ch.134100 BPSK_ Full RB)



Sub6 n71. Lower Band Edge Plot (20 M BW Ch.134600 BPSK_RB1_Offset 0)_1

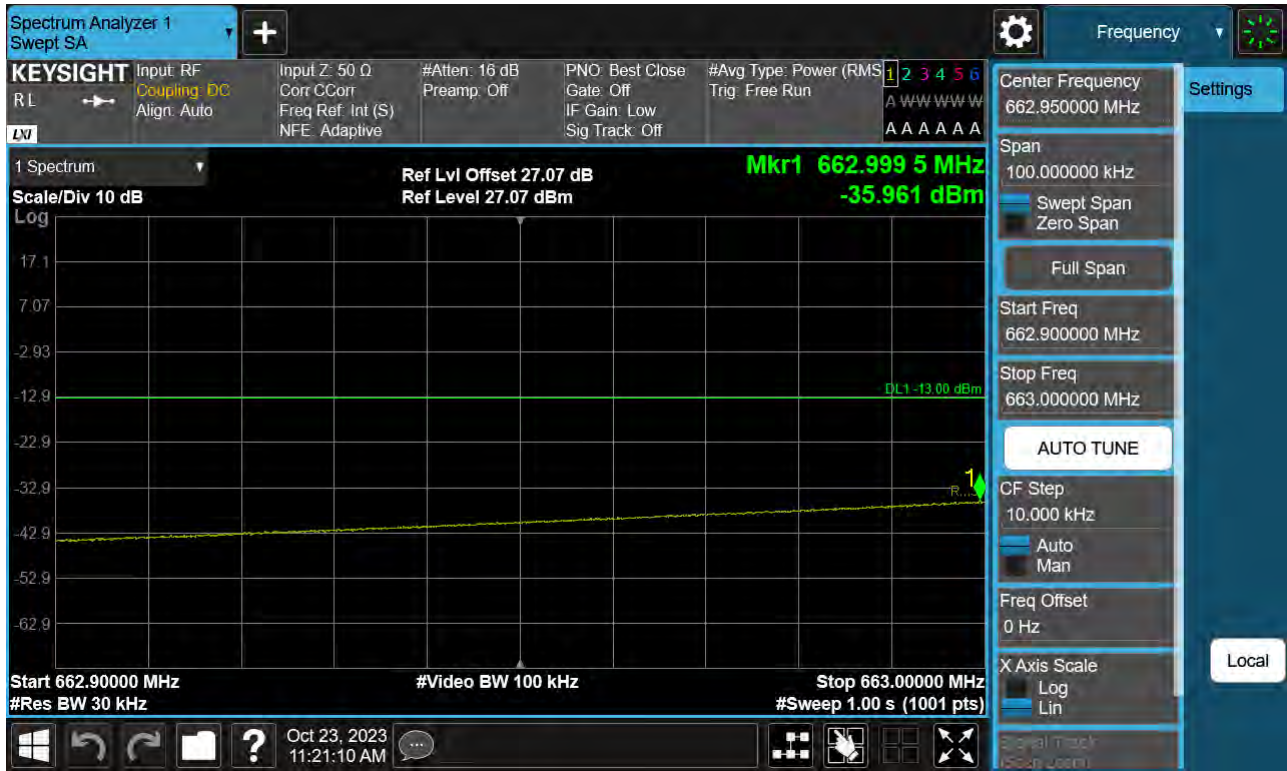

Sub6 n71. Lower Band Edge Plot (20 M BW Ch.134600 BPSK_RB1_Offset 0)_2




Sub6 n71. Lower Band Edge Plot (20 M BW Ch.134600 BPSK_ Full RB)



Sub6 n71. Lower Extended Band Edge Plot (20 M BW Ch.134600 BPSK_ Full RB)



Sub6 n71. Upper Band Edge Plot (5 M BW Ch.139100 BPSK_RB1_Offset 24)_1

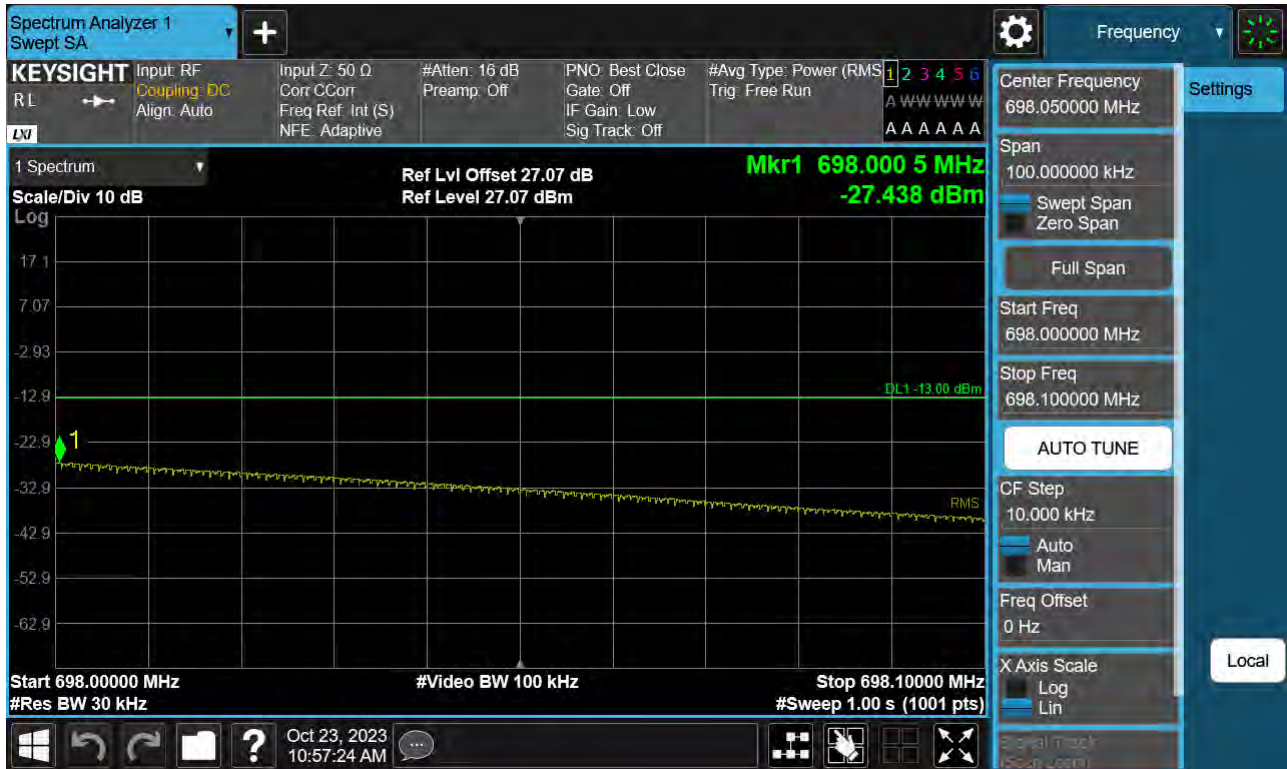

Sub6 n71. Upper Band Edge Plot (5 M BW Ch.139100 BPSK_RB1_Offset 24)_2



Sub6 n71. Upper Band Edge Plot (5 M BW Ch.139100 BPSK_ Full RB)



Sub6 n71. Upper Extended Band Edge Plot (5 M BW Ch.139100 BPSK_ Full RB)



Sub6 n71. Upper Band Edge Plot (10 M BW Ch.138600 BPSK_RB1_Offset 51)-1



Sub6 n71. Upper Band Edge Plot (10 M BW Ch.138600 BPSK_RB1_Offset 51)-2



Sub6 n71. Upper Band Edge Plot (10 M BW Ch.138600 BPSK_ Full RB)



Keysight Spectrum Analyzer 1
Swept SA

KEYSIGHT Input RF
RL Coupling: DC
Align. Auto

Input Z: 50 Ω
Corr: CCorr
Freq Ref: Int (S)
NFE: Adaptive

#Atten: 16 dB
Preamp: Off

PNO: Best Wide
Gate: Off
IF Gain: Low
Sig Track: Off

#Avg Type: Power (RMS)
Trig: Free Run

1 2 3 4 5 6
A W W W W W
A A A A A A

Center Frequency
704.000000 MHz

Span
8.00000000 MHz

Swept Span
Zero Span

Full Span

Start Freq
700.000000 MHz

Stop Freq
708.000000 MHz

AUTO TUNE

CF Step
800.000 kHz

Auto
Man

Freq Offset
0 Hz

X Axis Scale
Log
Lin

Local

1 Spectrum
Scale/Div 10 dB
Log

Ref Lvl Offset 27.07 dB
Ref Level 10.00 dBm

Mkr1 701.744 MHz
-31.662 dBm

0.00
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0

Start 700.000 MHz
#Res BW 100 kHz

#Video BW 300 kHz

Stop 708.000 MHz
#Sweep ~1.01 s (1001 pts)

Sub6 n71. Upper Band Edge Plot (15 M BW Ch.138100 BPSK_RB1_Offset 78)_1



Sub6 n71. Upper Band Edge Plot (15 M BW Ch.138100 BPSK_RB1_Offset 78)_2



Sub6 n71. Upper Band Edge Plot (15 M BW Ch.138100 BPSK_ Full RB)



Sub6 n71. Upper Extended Band Edge Plot (15 M BW Ch.138100 BPSK_ Full RB)



Sub6 n71. Upper Band Edge Plot (20 M BW Ch.137600 BPSK_RB1_Offset 105)_1



Sub6 n71. Upper Band Edge Plot (20 M BW Ch.137600 BPSK_RB1_Offset 105)_2




Sub6 n71. Upper Band Edge Plot (20 M BW Ch.137600 BPSK_ Full RB)




Sub6 n71. Upper Extended Band Edge Plot (20 M BW Ch.137600 BPSK_ Full RB)




Sub6 n71. Conducted Spurious Plot _ (133100ch_5 MHz_BPSK_RB 1_1)

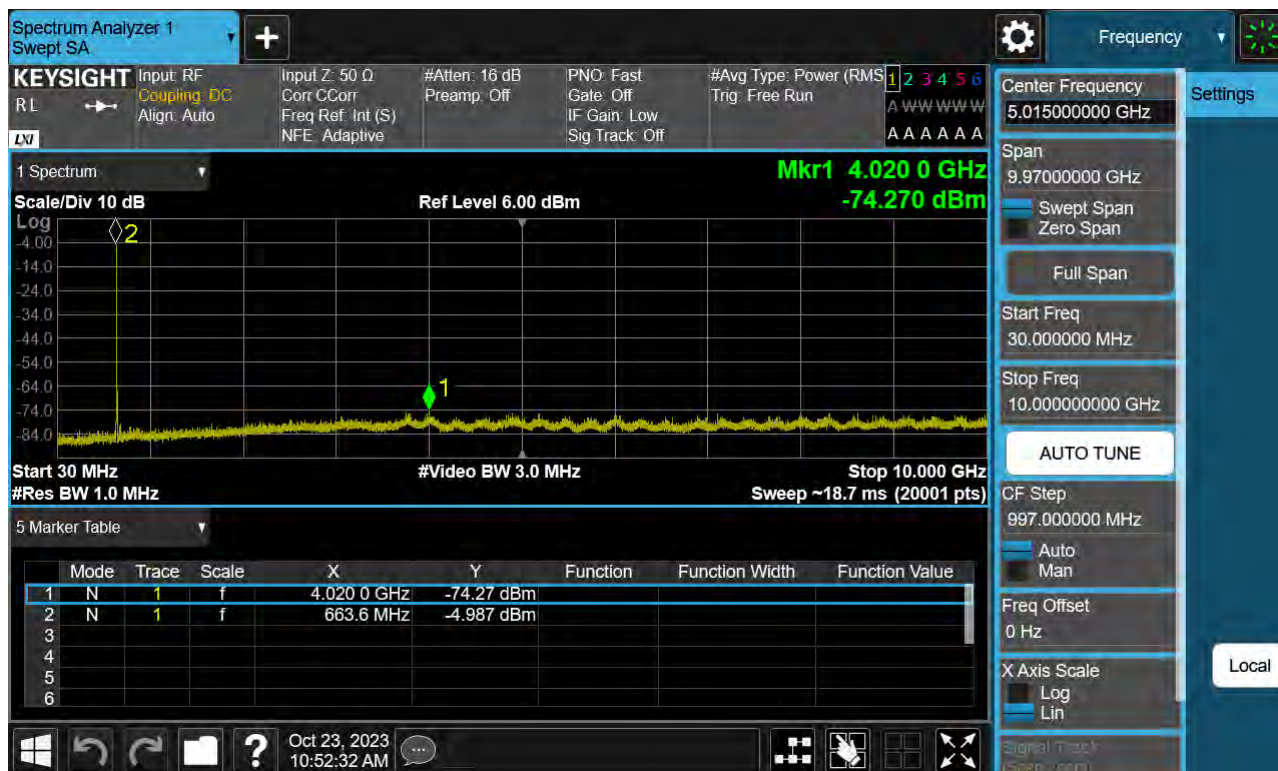


Sub6 n71. Conducted Spurious Plot _ (136100ch_5 MHz_BPSK_RB 1_1)

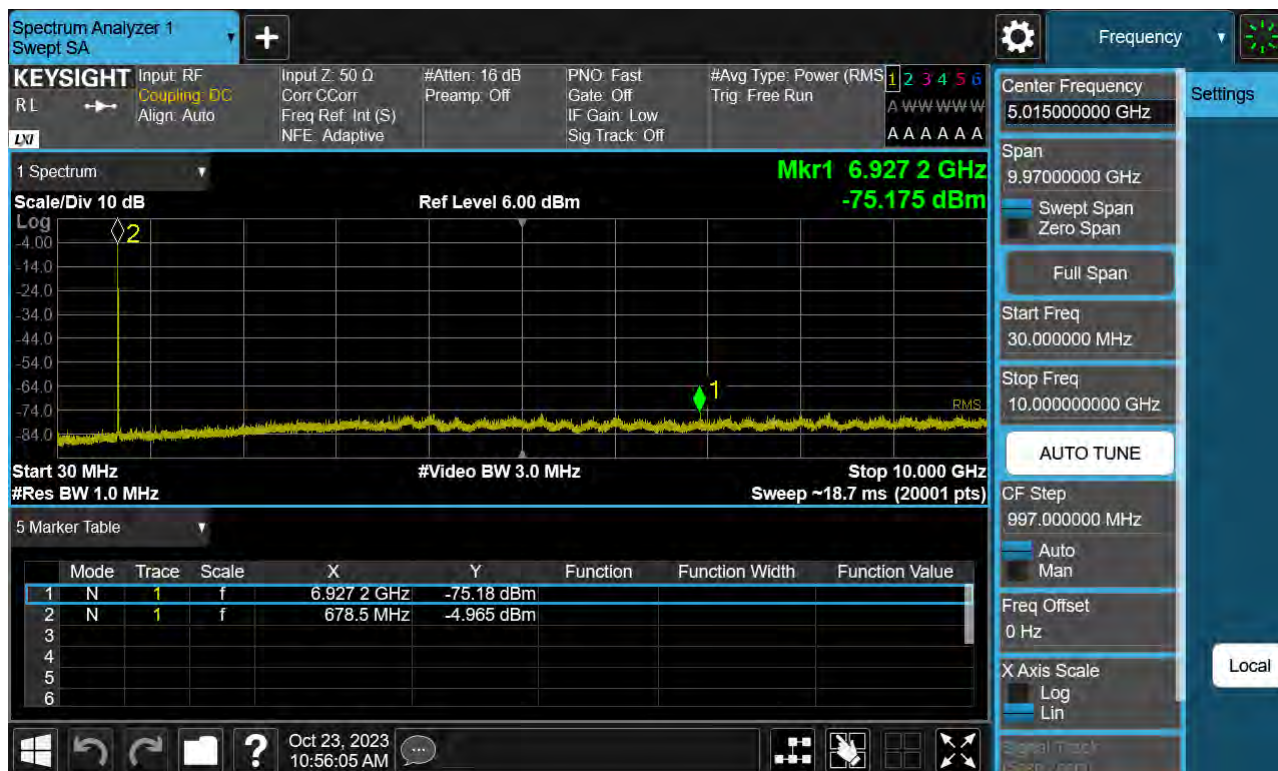


Sub6 n71. Conducted Spurious Plot _ (139100ch_5 MHz_BPSK_RB 1_1)

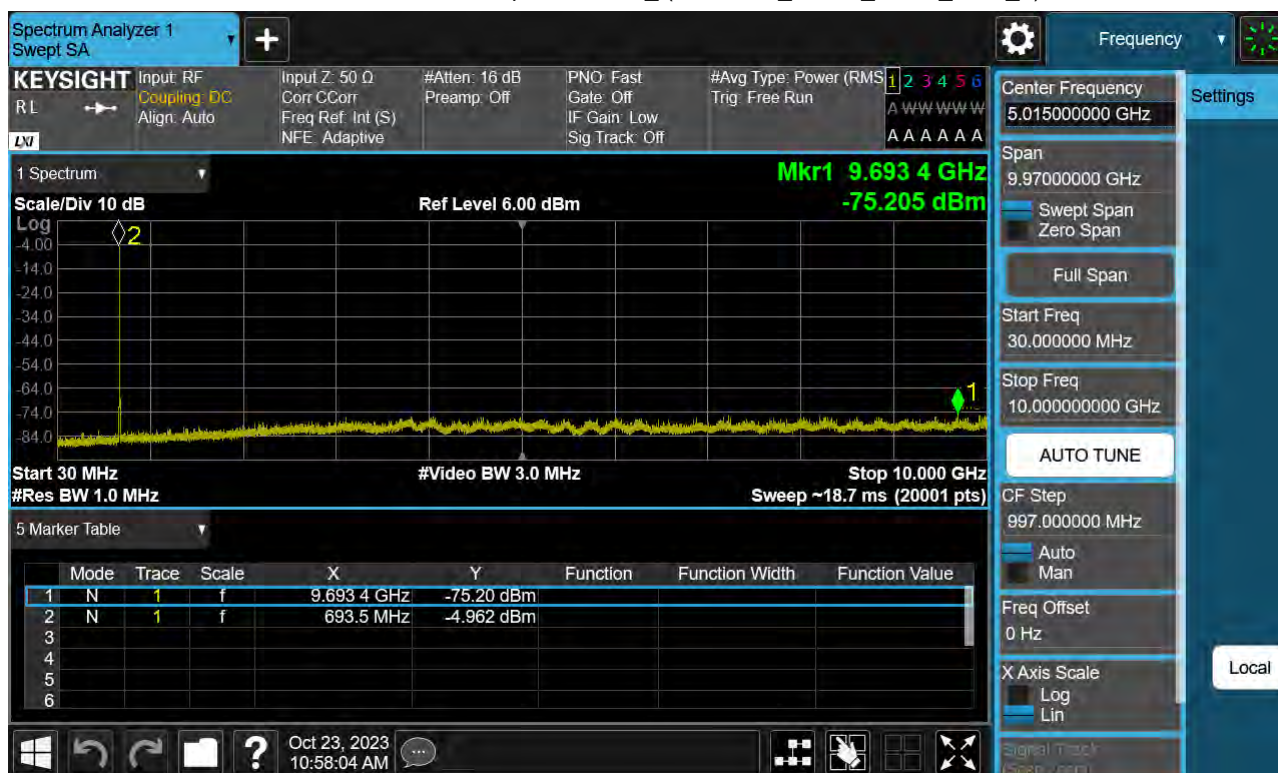


Sub6 n71. Conducted Spurious Plot _ (133600ch_10 MHz_BPSK_RB 1_1)

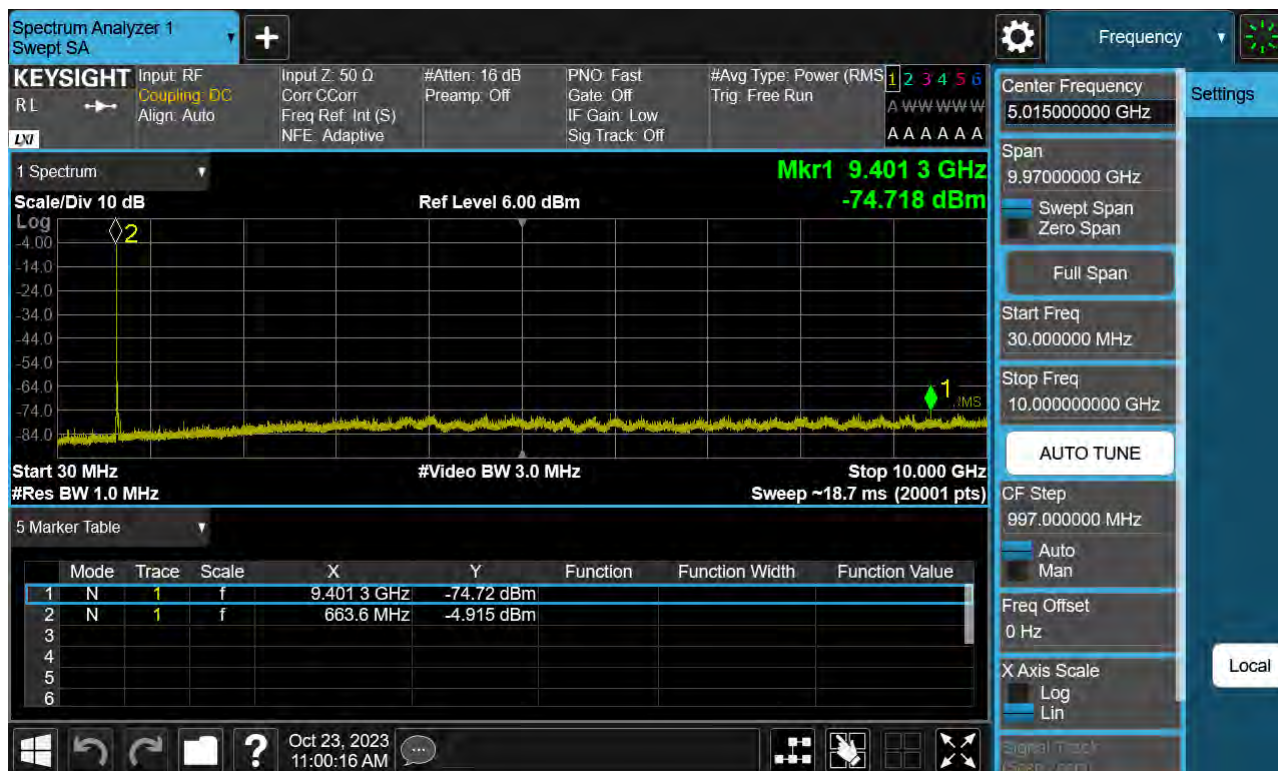


Sub6 n71. Conducted Spurious Plot _ (136100ch_10 MHz_BPSK_RB 1_1)

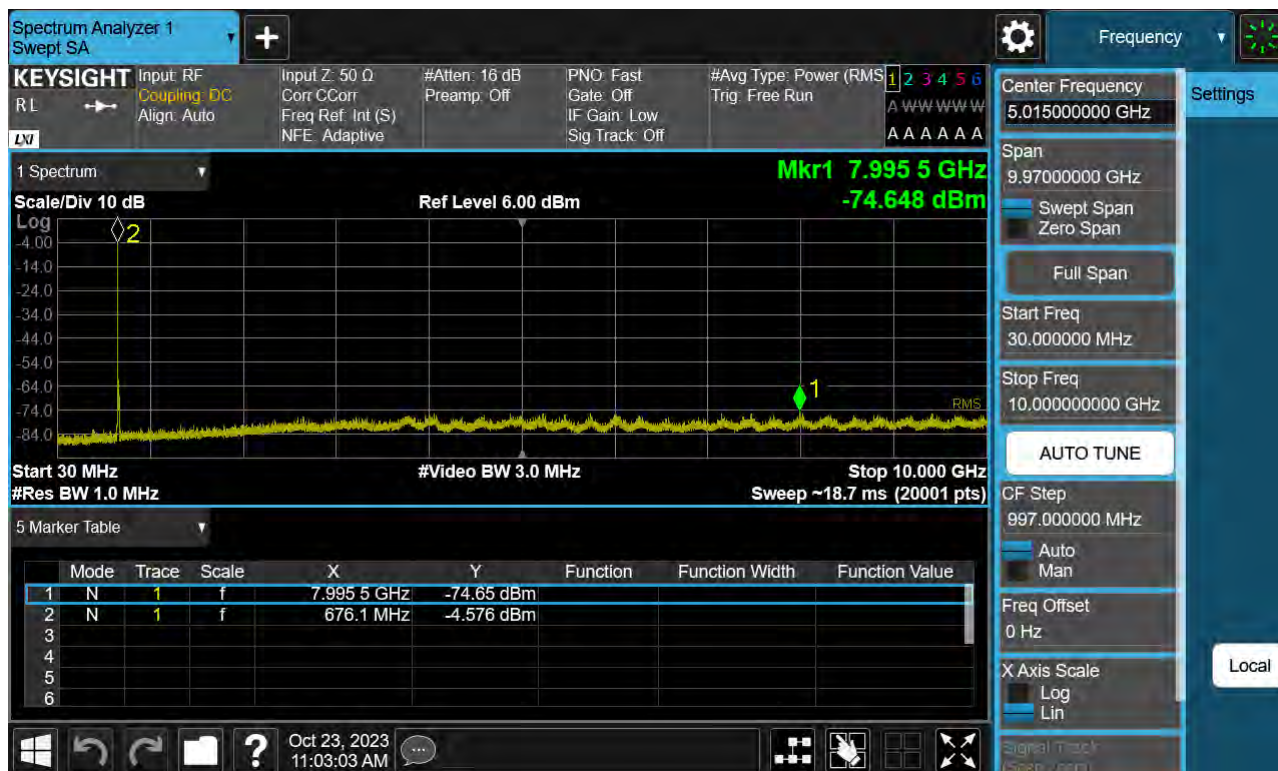


Sub6 n71. Conducted Spurious Plot _ (138600ch_10 MHz_BPSK_RB 1_1)

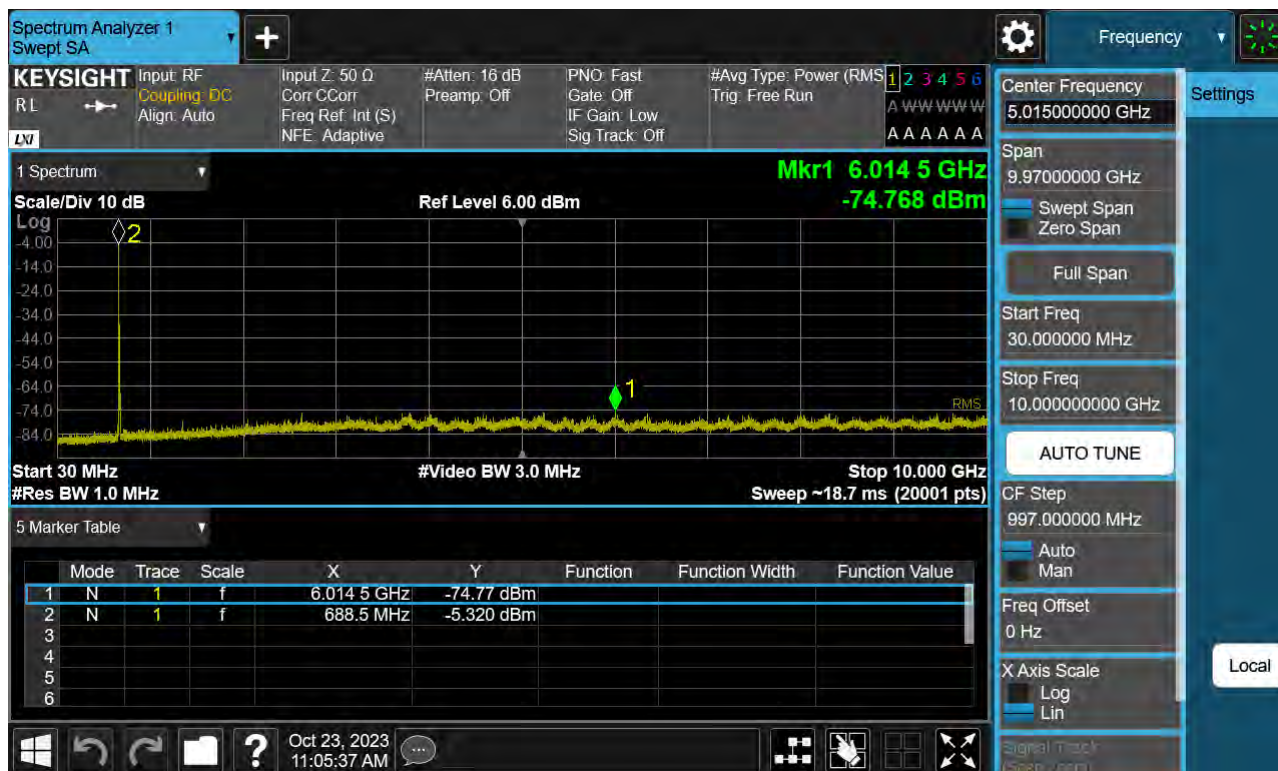


Sub6 n71. Conducted Spurious Plot _ (134100ch_15 MHz_BPSK_RB 1_1)

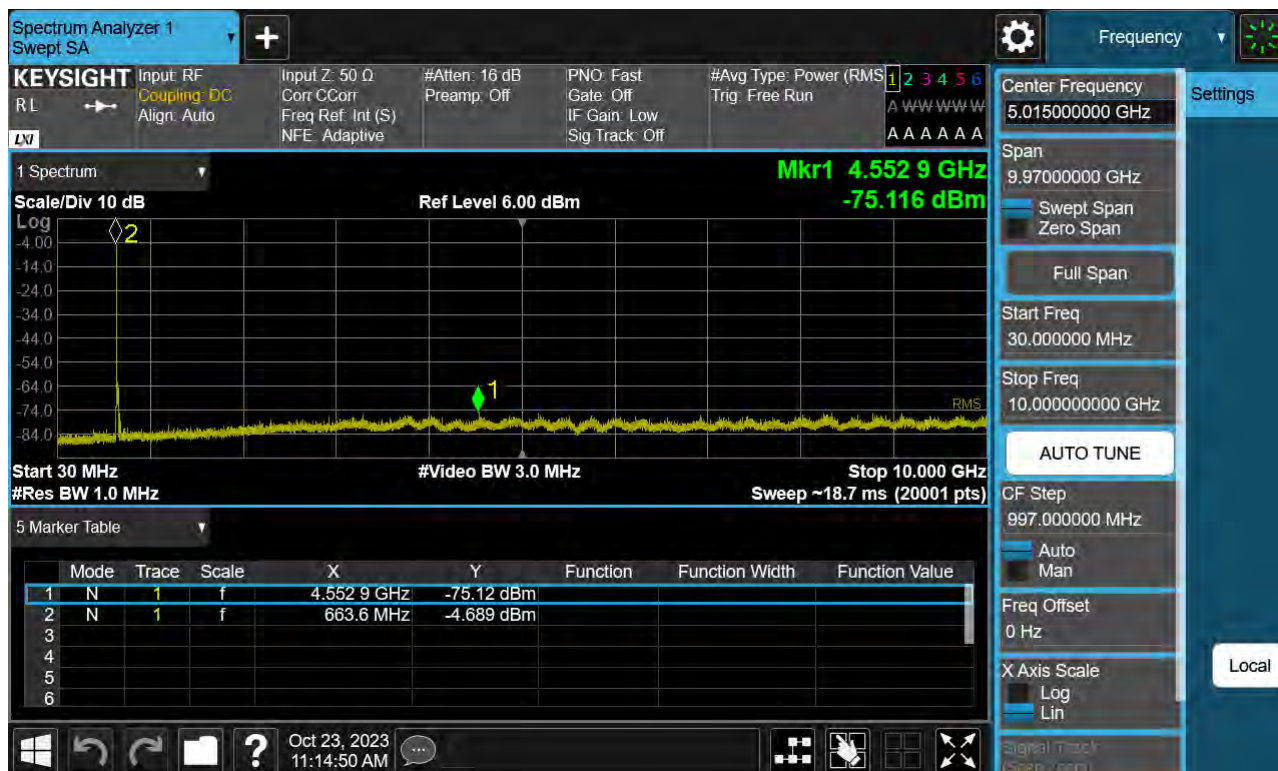


Sub6 n71. Conducted Spurious Plot _ (136100ch_15 MHz_BPSK_RB 1_1)

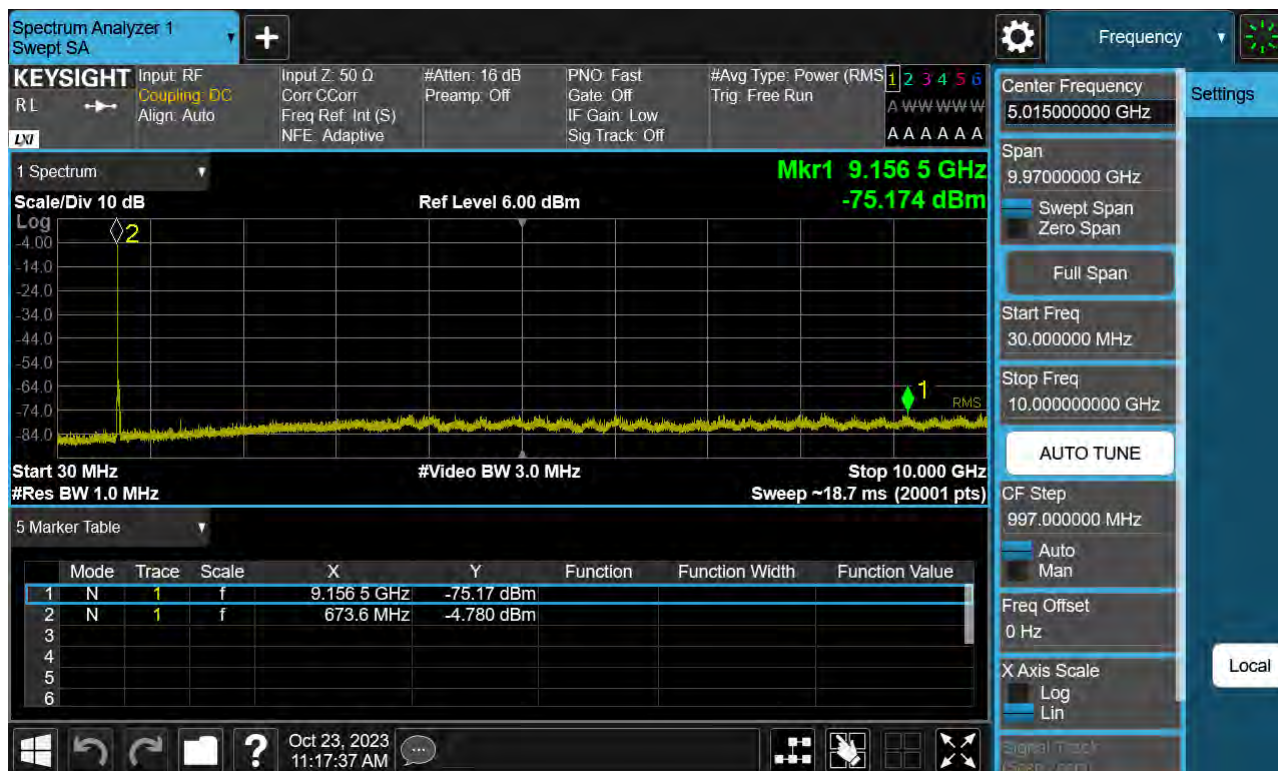


Sub6 n71. Conducted Spurious Plot _ (138100ch_15 MHz_BPSK_RB 1_1)

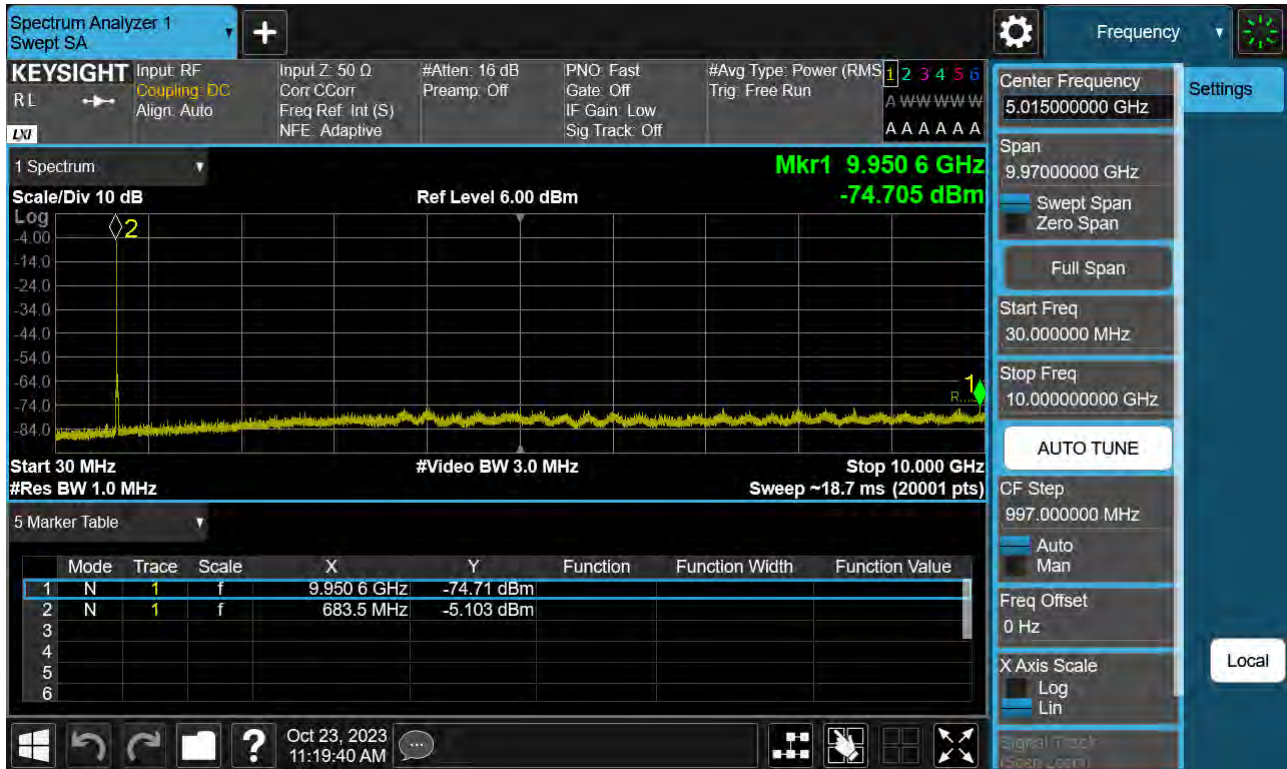


Sub6 n71. Conducted Spurious Plot _ (134600ch_20 MHz_BPSK_RB 1_1)

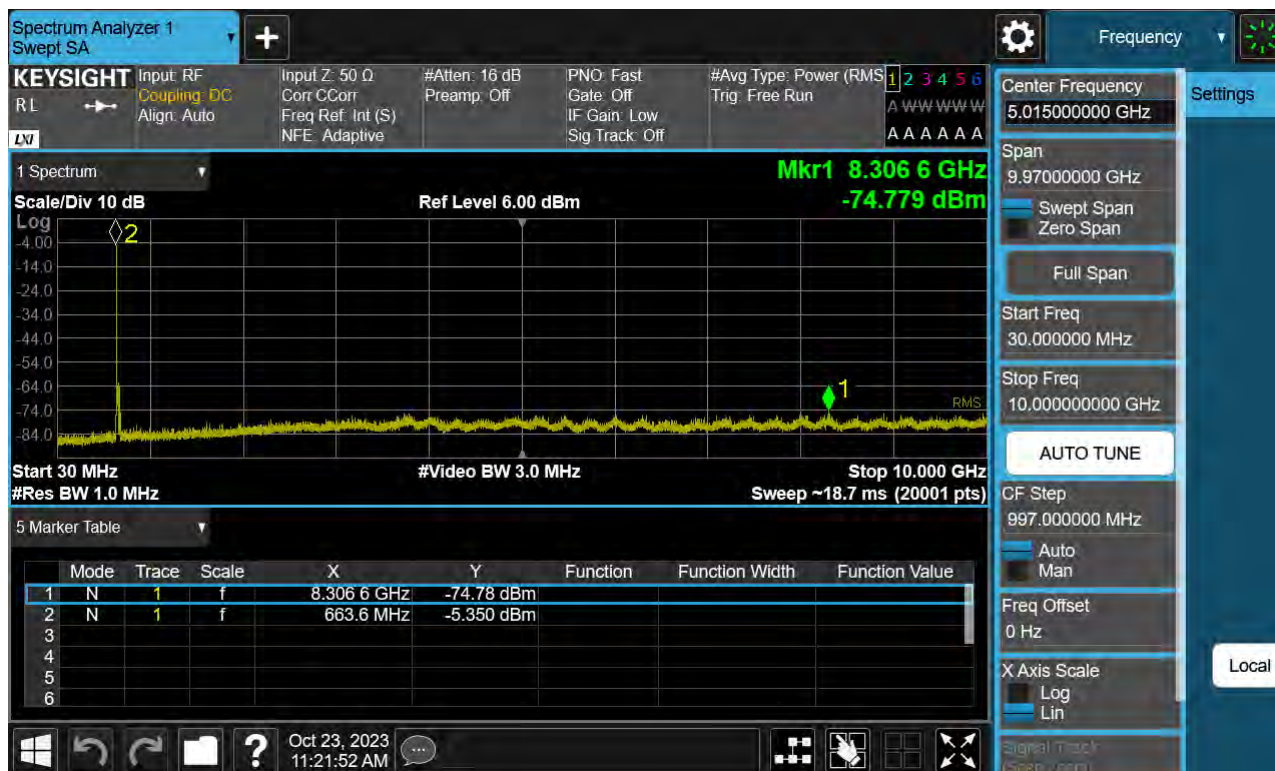

Sub6 n71. Conducted Spurious Plot _ (136100ch_20 MHz_BPSK_RB 1_1)

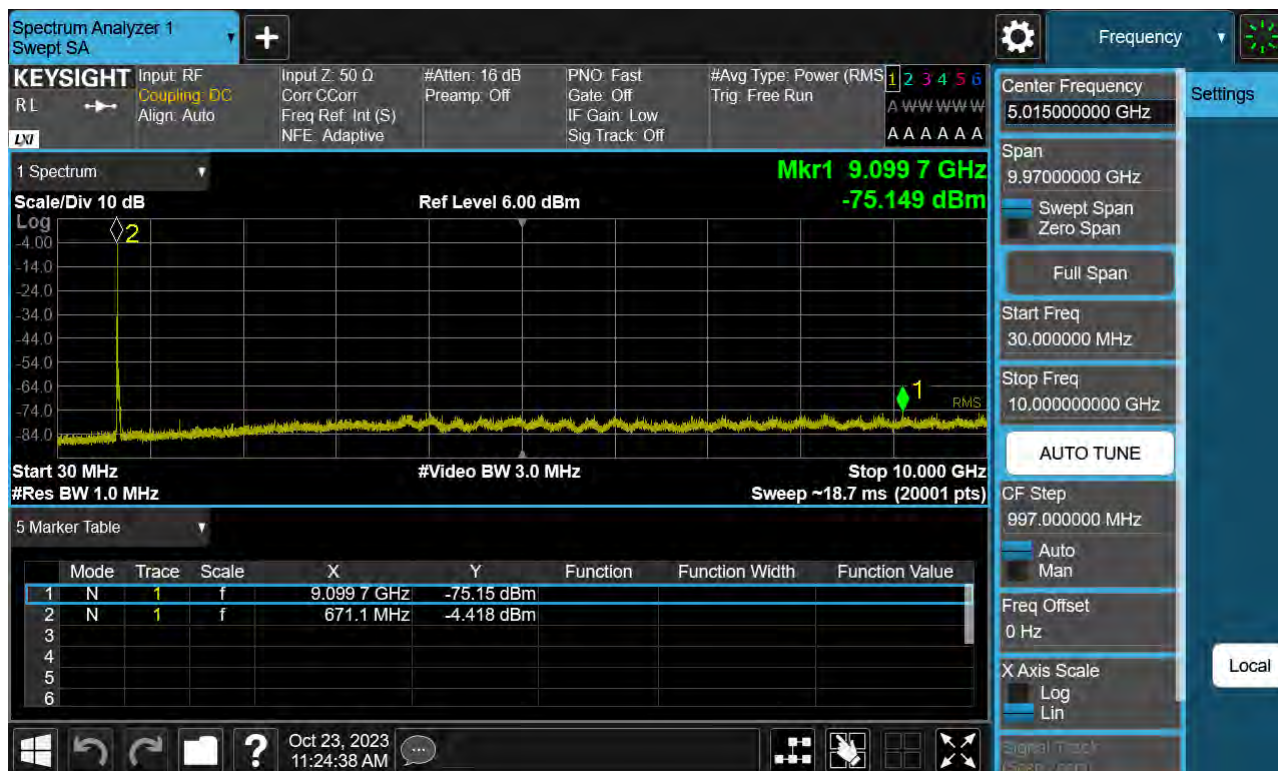

Sub6 n71. Conducted Spurious Plot _ (137600ch_20 MHz_BPSK_RB 1_1)

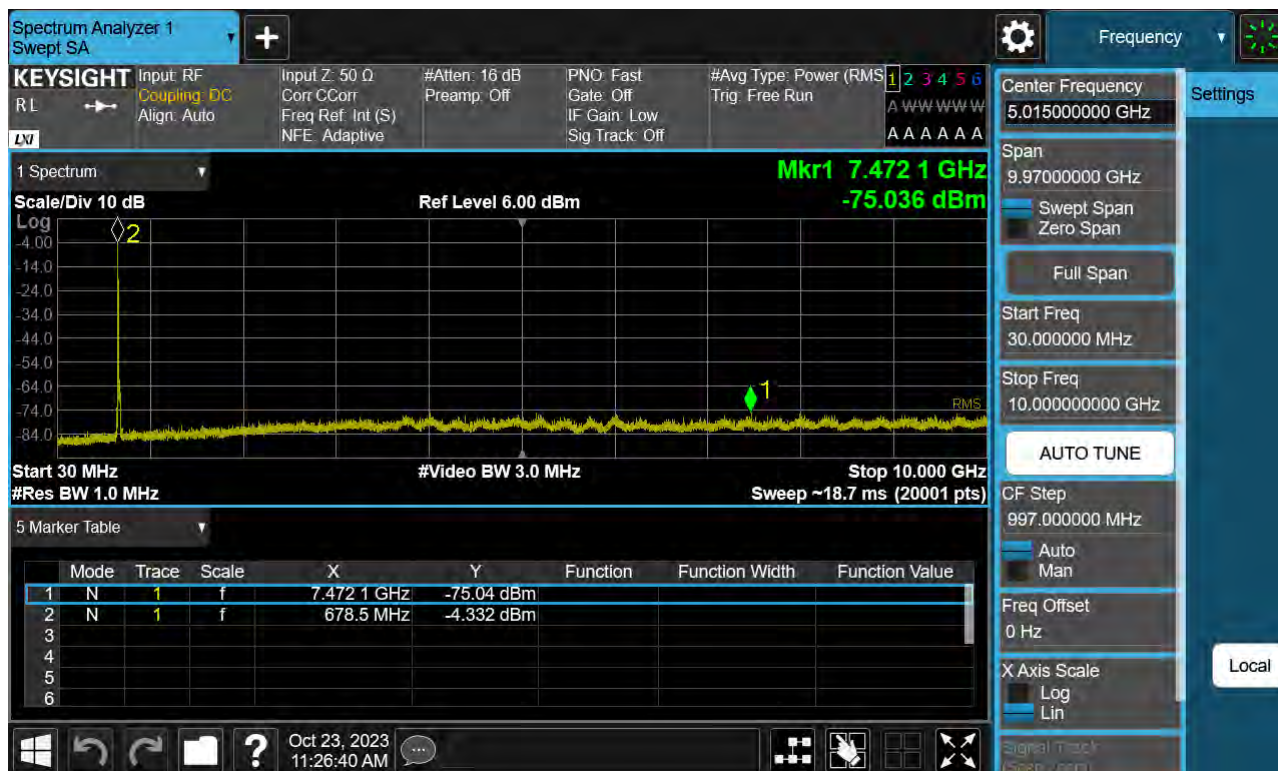

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2311-FC035-P