

**APPLICANT**

X-10 (USA), Inc.  
400 Forge Way, Suite 412  
Rockaway, NJ 07866-2033

**MANUFACTURER**

X-10 Electronics Shenzhen Co. Ltd.  
X-10 Building  
Labour Industrial District  
Shenzhen, Xixiang, Bao An  
Guang Dong, China, 518102

TEST SPECIFICATION: FCC Rules and Regulations Part 15, Subpart C, Para. 15.231

TEST PROCEDURE: ANSI C63.4:1992

**TEST SAMPLE DESCRIPTION**

BRANDNAME: X-10 (USA), Inc. MODEL: UR86A

TYPE: Pulsed Transmitter

POWER REQUIREMENTS: 6 VDC derived from (4) new "AAA" Batteries

FREQUENCY OF OPERATION: 310 MHz

**TESTS PERFORMED**

Para. 15.231(b)(1), Radiated Emissions, Fundamental and Harmonics

Para. 15.231(b)(3), Radiated Emissions, Spurious Case

Para. 15.231(c), Occupied Bandwidth

Para. 15.35, Duty Cycle Determination

**REPORT OF MEASUREMENTS**

Applicant: X-10 (USA), Inc.

Device: Pulsed Transmitter

FCC ID: B4SUR86A

Power Requirements: 6 VDC derived from (4) new "AAA" Batteries

Applicable Rule Section: Part 15, Subpart C, Section 15.231

**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A



**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

## REPORT OF MEASUREMENTS (continued)

### TEST RESULTS

- 15.231 (a): This device is used as a remote control transmitter.
- 15.231 (a)(1) & 15.231(a)(2): The transmitter is manually operated and ceases transmission within 5 seconds after deactivation.
- 15.231 (a)(3): The transmitter does not perform periodic transmissions.
- 15.231 (b): The fundamental field strength did not exceed 5833  $\mu\text{V/M}$  (Average) at a test distance of 3 meters. In addition, the requirements of section 15.35 for averaging pulsed emissions and for limiting peak emissions were met.
- The field strength of harmonic and spurious emissions did not exceed 583  $\mu\text{V/M}$  (AVERAGE).

### DETERMINATION OF FIELD STRENGTH LIMITS

The field strength limits shown below are found in Section 15.231.

Frequency			Limit		
F1	=	260	3750	=	L1
Fo	=	310			Lo
F2	=	470	12500	=	L2

The formula below was utilized to determine the limits:

$$\text{Limit} = L1 + [(Fo-F1)(L2-L1)/(F2-F1)]$$

Solving yields:

$$\text{Fundamental Limit} = 5833 \mu\text{V/M (AVERAGE) @ 3 Meters}$$

$$\text{Harmonic Limit} = 583 \mu\text{V/M (AVERAGE) @ 3 Meters}$$



**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

## REPORT OF MEASUREMENTS (continued)

### DUTY CYCLE DETERMINATION

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information)

Transmitter On Time	=	17.4 milliseconds (maximum- per cycle)
Transmitter Cycle Time	=	48 milliseconds
Transmitter Duty Cycle	=	36.3 %

#### CALCULATION:

1 Large Pulse	=	4.3 milliseconds
21 x 625 $\mu$ s (small pulse)	=	13.1 milliseconds
4.3 + 13.1	=	17.4 milliseconds
Cycle Time	=	48 milliseconds
Duty Cycle	=	$17.4/48 = 36.3 \%$
Correction Factor = $20 \log(0.363)$	=	-8.8

### SPECTRUM ANALYZER DESENSITIZATION CONSIDERATIONS

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 625 $\mu$ s yields a minimum required bandwidth of 1.067 kHz. FCC specified bandwidths of 100kHz and 1MHz were utilized below and above 1GHz, respectively.



**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

## GENERAL NOTES

1. All readings were taken utilizing a peak detector function at a test distance of 3 meters.
2. The duty cycle was applied to the peak readings in order to determine the average value of the emissions.
3. The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not reported were more than 20 dB below the specified limit.



**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

## EQUIPMENT LIST

### FCC15.231 Compliance testing

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due Date
067	Open Area Test Site	Retlif	3 Meter	RNY	09/20/2000	09/20/2003
128C	Double Ridge Guide	Eaton Corporation	1 GHz - 18 GHz	96001	09/21/2001	09/21/2002
133	Broadband Pre-Amplifier	Electro-Metrics	10 kHz - 1 GHz, 26dB	BPA-1000	06/13/2001	06/13/2002
141	Spectrum Analyzer	Hewlett Packard	100 Hz - 40 GHz	8566B	07/02/2001	01/02/2002
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	03/05/2001	03/05/2002
141B	Quasi-Peak Adaptor	Hewlett Packard	100 Hz - 1 GHz	85650A	02/20/2001	01/02/2002
206B	6.0 dB Attenuator	Texscan	0 - 1.0 GHz	FP-50 - 6 dB	06/13/2001	06/13/2002
543	Preamplifier	Hewlett Packard	1.0 GHz - 26.5 GHz	8449B	06/27/2001	06/27/2002
767	Biconilog	EMCO	26 - 2000 MHz	3142B	08/28/2001	08/28/2002



**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

FCC 15.231(b)

RADIATED EMISSIONS, FUNDAMENTAL & SPURIOUS CASE

See separate e-file attachment named REfundharm.pdf and REspur.pdf



**Retlif Testing Laboratories**


Test Report No. R-9234-1

FCC ID: B4SUR86A

FCC 15.231(c)

OCCUPIED BANDWIDTH

Please refer to separate electronic file named Occbw.pdf



**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A



FCC 15.35

DUTY CYCLE

Please refer to separate electronic file named Dutycycle.pdf




**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

## Test Setup Photograph

### Radiated Emissions

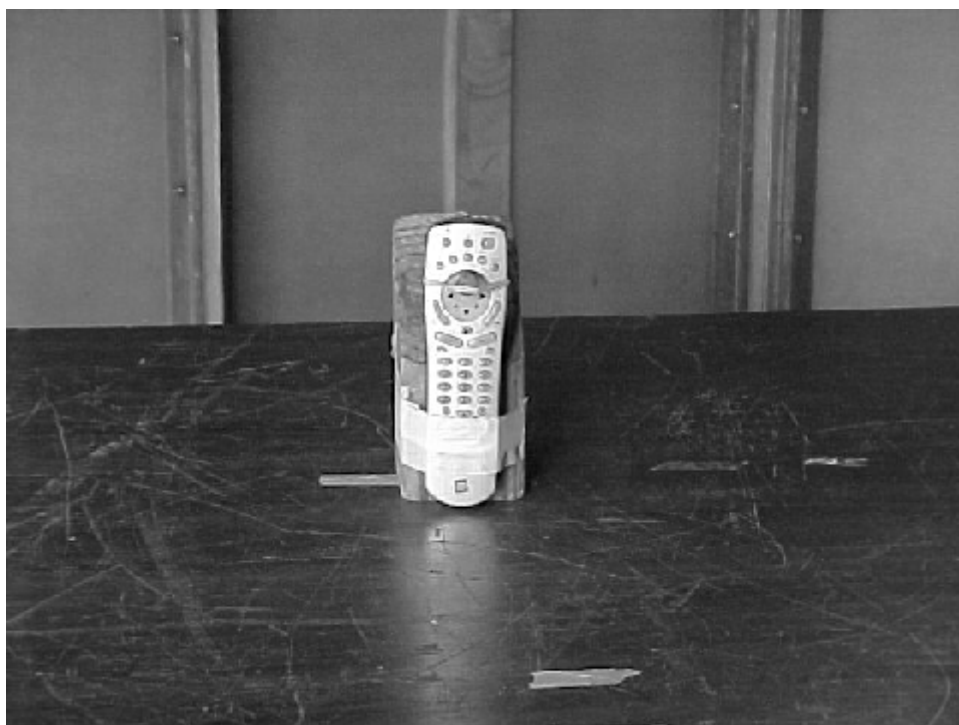

**Retlif Testing Laboratories**

Test Report No. R-9234-1

FCC ID: B4SUR86A

Test Method:		FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions					
Customer:		X-10 (USA)			Job No.		R-9234-1
Test Sample:		RF remote			Paragraph:		15.231
Model No.:		UR86A			FCC ID:		B4SUR86A
Operating Mode:		Continuously Transmitting a 310 MHz Signal					
Technician:		Peter Lananna			Date:		November 5, 2001
Notes:		Test Distance: 3 Meters Detector: Peak, Unless otherwise specified					
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	uV/m
310	H / 2.3	X	65.9	-3.8	62.1	1273.5	58300
	H / 1.0	Y	78.1	-3.8	74.3	5188.0	
	H / 2.3	Z	69.8	-3.8	66.0	1995.3	
	V / 1.8	X	77.2	-3.8	73.4	4677.4	
	V / 3.0	Y	68.4	-3.8	64.6	1698.2	
310	V / 2.3	Z	72.3	-3.8	68.5	2660.7	58300
620	H / 1.0	X	45.2	3.9	49.1	285.1	5830
	H / 1.3	Y	52.8	3.9	56.7	683.9	
	H / 1.3	Z	53.6	3.9	57.5	749.9	
	V / 2.0	X	53.0	3.9	56.9	699.8	
	V / 1.0	Y	49.8	3.9	53.7	484.2	
620	V / 1.0	Z	47.7	3.9	51.6	380.2	5830
930	H / 2.0	X	36.0	8.5	44.5	167.9	5830
	H / 2.0	Y	41.3	8.5	49.8	309.0	
	H / 1.5	Z	34.1	8.5	42.6	134.9	
	V / 1.0	X	44.4	8.5	52.9	441.6	
	V / 2.3	Y	38.21	8.5	46.7	216.5	
930	V / 2.8	Z	38.3	8.5	46.8	218.8	5830
1240	H / 1.8	X	49.2	-3.0	46.2	204.2	5000
	H / 2.0	Y	48.7	-3.0	45.7	192.8	
	H / 1.8	Z	46.7	-3.0	43.7	153.1	
	V / 1.3	X	50.5	-3.0	47.5	237.1	
	V / 1.8	Y	47.9	-3.0	44.9	175.8	
1240	V / 1.0	Z	48.7	-3.0	45.7	192.8	5000
1550	H / 1.0	X	41.7	1.0	42.7	136.5*	5000
	H / 1.0	Y	41.7	1.0	42.7	136.5*	
	H / 1.0	Z	41.7	1.0	42.7	136.5*	
	V / 1.0	X	41.7	1.0	42.7	136.5*	
	V / 1.0	Y	41.7	1.0	42.7	136.5*	
1550	V / 1.0	Z	41.7	1.0	42.7	136.5*	5000
	The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more						
	Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*=Noise Floor Measurements (Minimum system sensitivity)						



**Retlif Testing Laboratories**

Retlif Job Number R-9234-1

Test Method:		FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
Customer:		X-10 (USA)			Job No.		R-9234-1	
Test Sample:		RF remote			Paragraph:		15.231	
Model No.:		UR86A			FCC ID:		B4SUR86A	
Operating Mode:		Continuously Transmitting a 310 MHz Signal						
Technician:		Peter Lananna			Date:		November 5, 2001	
Notes:		Test Distance: 3 Meters Detector: Peak, unless otherwise specified						
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit	
MHz	(V/H)-Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	uV/m	
1860	H / 1.0	X	42.7	3.6	46.3	206.5*	5830	
	H / 1.0	Y	42.7	3.6	46.3	206.5*		
	H / 1.0	Z	42.7	3.6	46.3	206.5*		
	V / 1.0	X	42.7	3.6	46.3	206.5*		
	V / 1.0	Y	42.7	3.6	46.3	206.5*		
1860	V / 1.0	Z	42.7	3.6	46.3	206.5*	5830	
2170	H / 1.0	X	42.7	1.2	43.9	156.7*	5830	
	H / 1.0	Y	42.7	1.2	43.9	156.7*		
	H / 1.0	Z	42.7	1.2	43.9	156.7*		
	V / 1.0	X	42.7	1.2	43.9	156.7*		
	V / 1.0	Y	42.7	1.2	43.9	156.7*		
2170	V / 1.0	Z	42.7	1.2	43.9	156.7*	5830	
2480	H / 1.0	X	41.5	3.8	45.3	184.1*	5830	
	H / 1.0	Y	41.5	3.8	45.3	184.1*		
	H / 1.0	Z	41.5	3.8	45.3	184.1*		
	V / 1.0	X	41.5	3.8	45.3	184.1*		
	V / 1.0	Y	41.5	3.8	45.3	184.1*		
2480	V / 1.0	Z	41.5	3.8	45.3	184.1*	5830	
2790	H / 1.0	X	40.6	6.2	46.8	218.8*	5000	
	H / 1.0	Y	40.6	6.2	46.8	218.8*		
	H / 1.0	Z	40.6	6.2	46.8	218.8*		
	V / 1.0	X	40.6	6.2	46.8	218.8*		
	V / 1.0	Y	40.6	6.2	46.8	218.8*		
2790	V / 1.0	Z	40.6	6.2	46.8	218.8*	5000	
3100	H / 1.0	X	42.0	6.8	48.8	275.4*	5830	
	H / 1.0	Y	42.0	6.8	48.8	275.4*		
	H / 1.0	Z	42.0	6.8	48.8	275.4*		
	V / 1.0	X	42.0	6.8	48.8	275.4*		
	V / 1.0	Y	42.0	6.8	48.8	275.4*		
3100	V / 1.0	Z	42.0	6.8	48.8	275.4*	5830	
	The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more							
	Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							
	*=Noise Floor Measurements ( Minimum system sensitivity)							



**Retlif Testing Laboratories**

Retlif Job Number R-9234-1

Test Method:		FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
Customer:		X-10 (USA)			Job No.		R-9234-1	
Test Sample:		RF remote			Paragraph:		15.231	
Model No.:		UR86A			FCC ID:		B4SUR86A	
Operating Mode:		Continuously Transmitting a 310 MHz Signal						
Technician:		Peter Lananna			Date:		November 5, 2001	
Notes:		Test Distance: 3 Meters			Duty Cycle:36.3 %			
		Detector: Peak, unless otherwise specified			Duty Cycle Correction: -8.8dB			
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Correction Factor	Corrected Reading	Converted Reading	Avg. Limit	
MHz	(V/H)-Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	uV/m	
310	H / 2.3	X	62.1	-8.8	53.3	462.4	5830	
	H / 1.0	Y	74.3	-8.8	65.5	1883.6		
	H / 2.3	Z	66.0	-8.8	57.2	724.4		
	V / 1.8	X	73.4	-8.8	64.6	1698.2		
	V / 3.0	Y	64.6	-8.8	55.8	616.6		
310	V / 2.3	Z	68.5	-8.8	59.7	966.1	5830	
620	H / 1.0	X	49.1	-8.8	40.3	103.5	583	
	H / 1.3	Y	56.7	-8.8	47.9	248.3		
	H / 1.3	Z	57.5	-8.8	48.7	272.3		
	V / 2.0	X	56.9	-8.8	48.1	254.1		
	V / 1.0	Y	53.7	-8.8	44.9	175.8		
620	V / 1.0	Z	51.6	-8.8	42.8	138.0	583	
930	H / 2.0	X	44.5	-8.8	35.7	61.0	583	
	H / 2.0	Y	49.8	-8.8	41.0	112.2		
	H / 1.5	Z	42.6	-8.8	33.8	49.0		
	V / 1.0	X	52.9	-8.8	44.1	160.3		
	V / 2.3	Y	46.7	-8.8	37.9	78.5		
930	V / 2.8	Z	46.8	-8.8	38.0	79.4	583	
1240	H / 1.8	X	46.2	-8.8	37.4	74.1	500	
	H / 2.0	Y	45.7	-8.8	36.9	70.0		
	H / 1.8	Z	43.7	-8.8	34.9	55.6		
	V / 1.3	X	47.5	-8.8	38.7	86.1		
	V / 1.8	Y	44.9	-8.8	36.1	63.8		
1240	V / 1.0	Z	45.7	-8.8	36.9	70.0	500	
1550	H / 1.0	X	42.7	-8.8	33.9	49.5*	500	
	H / 1.0	Y	42.7	-8.8	33.9	49.5*		
	H / 1.0	Z	42.7	-8.8	33.9	49.5*		
	V / 1.0	X	42.7	-8.8	33.9	49.5*		
	V / 1.0	Y	42.7	-8.8	33.9	49.5*		
1550	V / 1.0	Z	42.7	-8.8	33.9	49.5*	500	
	The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more							
	Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							
	*=Noise Floor Measurements ( Minimum system sensitivity)							



**Retlif Testing Laboratories**

Retlif Job Number R-9234-1

<b>Test Method:</b>		FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
<b>Customer:</b>		X-10 (USA)			<b>Job No.</b>		R-9234-1	
<b>Test Sample:</b>		RF remote			<b>Paragraph:</b>		15.231	
<b>Model No.:</b>		UR86A			<b>FCC ID:</b>		B4SUR86A	
<b>Operating Mode:</b>		Continuously Transmitting a 310 MHz Signal						
<b>Technician:</b>		Peter Lananna			<b>Date:</b>		November 5, 2001	
<b>Notes:</b>		Test Distance: 3 Meters			Duty Cycle: 36.3%			
		Detector: Peak, unless otherwise specified			Duty Cycle Correction: -8.8dB			
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Correction Factor	Corrected Reading	Converted Reading	Avg. Limit	
MHz	(V/H)-Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	uV/m	
1860	H / 1.0	X	46.3	-8.8	37.5	75.0*	583	
	H / 1.0	Y	46.3	-8.8	37.5	75.0*		
	H / 1.0	Z	46.3	-8.8	37.5	75.0*		
	V / 1.0	X	46.3	-8.8	37.5	75.0*		
	V / 1.0	Y	46.3	-8.8	37.5	75.0*		
1860	V / 1.0	Z	46.3	-8.8	37.5	75.0*	583	
2170	H / 1.0	X	43.9	-8.8	35.1	56.9*	583	
	H / 1.0	Y	43.9	-8.8	35.1	56.9*		
	H / 1.0	Z	43.9	-8.8	35.1	56.9*		
	V / 1.0	X	43.9	-8.8	35.1	56.9*		
	V / 1.0	Y	43.9	-8.8	35.1	56.9*		
2170	V / 1.0	Z	43.9	-8.8	35.1	56.9*	583	
2480	H / 1.0	X	45.3	-8.8	36.5	66.8*	583	
	H / 1.0	Y	45.3	-8.8	36.5	66.8*		
	H / 1.0	Z	45.3	-8.8	36.5	66.8*		
	V / 1.0	X	45.3	-8.8	36.5	66.8*		
	V / 1.0	Y	45.3	-8.8	36.5	66.8*		
2480	V / 1.0	Z	45.3	-8.8	36.5	66.8*	583	
2790	H / 1.0	X	46.8	-8.8	38.0	79.4*	500	
	H / 1.0	Y	46.8	-8.8	38.0	79.4*		
	H / 1.0	Z	46.8	-8.8	38.0	79.4*		
	V / 1.0	X	46.8	-8.8	38.0	79.4*		
	V / 1.0	Y	46.8	-8.8	38.0	79.4*		
2790	V / 1.0	Z	46.8	-8.8	38.0	79.4*	500	
3100	H / 1.0	X	48.8	-8.8	40.0	100.0*	583	
	H / 1.0	Y	48.8	-8.8	40.0	100.0*		
	H / 1.0	Z	48.8	-8.8	40.0	100.0*		
	V / 1.0	X	48.8	-8.8	40.0	100.0*		
	V / 1.0	Y	48.8	-8.8	40.0	100.0*		
3100	V / 1.0	Z	48.8	-8.8	40.0	100.0*	583	
	The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more							
	Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							
	*=Noise Floor Measurements ( Minimum system sensitivity)							



**Retlif Testing Laboratories**

Retlif Job Number R-9234-1

<b>Test Method:</b>	FCC Part 15 Subpart C, Spurious Case Radiated Emissions, Paragraph 15.209(a)						
<b>Customer:</b>	X-10 (USA)				<b>Job No.</b>	R-9234-1	
<b>Test Sample:</b>	RF Remote				<b>FCC ID.</b>	B4SUR86A	
<b>Model No.:</b>	UR86A				<b>Serial No.</b>	N/A	
<b>Operating Mode:</b>	Continuously Transmitting a Pulsed 310MHz Signal.						
<b>Technician:</b>	Peter Lananna				<b>Date:</b>	November 5, 2001	
<b>Notes:</b>	Test Distance: 3 Meters      Temp:17C      Humidity:27% Detector: Quasi-Peak Below 30 MHz to 1 GHz, Peak above 1 GHz						
Test Freq.	Antenna Position	EUT Orientation	Meter Readings	Correction Factor	Corrected Reading	Converted Reading	<b>LIMIT</b>
MHz	(V/H) / Meters	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
30.00							100
88.00							100
88.00							150
No emissions detected at specified test distance							
216.00							150
216.00							200
960.00							200
960.00							500
3100.0							500
The EUT was scanned from 30 MHz to 3.1 GHz							
The emissions observed from the EUT do not exceed the specified limits. Emissions not recorded were more than 10dB under the specified limit							




**Retlif Testing Laboratories**

Retlif Job Number R-9234-1

MKR  $\Delta$  53.4 kHz  
0.10 dB

R-9234 X-10 UR86A Occ. Bw. 11/2/01 PL  
REF 74.4 dB $\mu$ V ATTN 10 dB

10 dB/  
DL  
54.4  
dB $\mu$ V

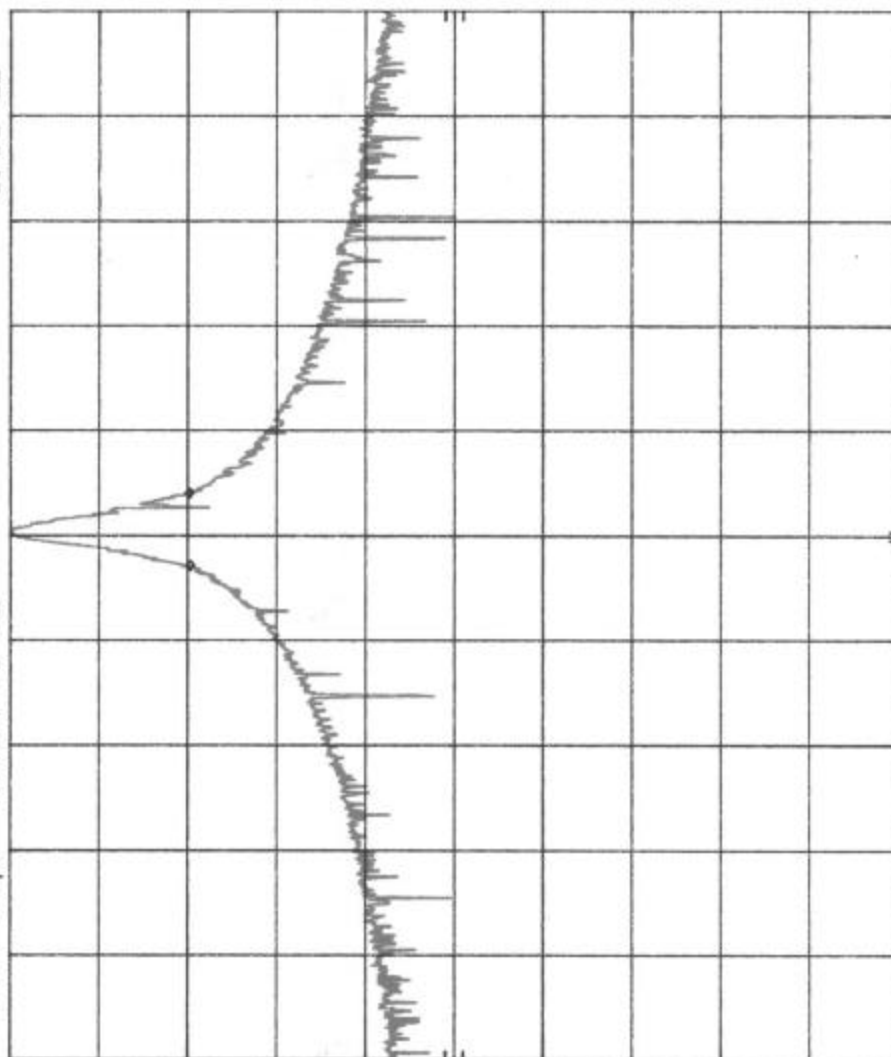

SPAN 775 kHz  
SWP 30.0 msec

VBW 30 kHz

CENTER 309.511 MHz  
RES BW 10 kHz

Customer:	X-10 (USA)
Test Sample:	RF Remote
Model No.:	UR86A
Test Method:	FCC ID B45UR86A
Notes:	FCC 15.231(c) Occupied Bandwidth Bandwidth of emission is less than 0.25% of the center frequency. 510MHz $\pm$ 0.25% = 775kHz Bandwidth = 53.4kHz
Date:	November 5, 2001
Tech:	Peter Lanius
Sheet:	1 of 1



**Retlif Testing Laboratories**


Report No. R-9234-1



R-9234 X-10 UR86A DCD 11/2/01 PL  
 REF 89.0 dBμV ATTEN 10 dB MKR Δ 4.300 msec  
 50.10 dB

hp

10 dB/

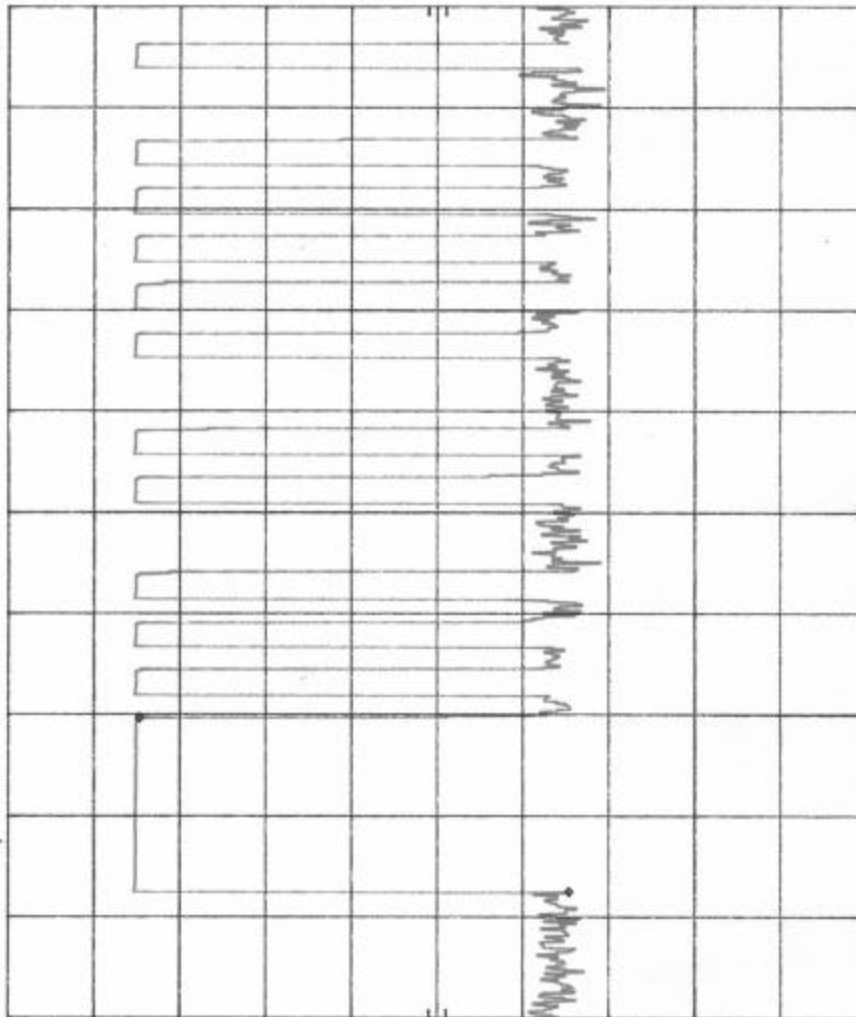

CENTER 309.429 967 MHz SPAN 0 Hz  
 RES BW 100 kHz SWP 25.0 msec  
 VBW 300 kHz

Customer:	X-10 (USA)
Test Sample:	RF Remote
Model No.:	UR86A FCC ID B4SUR86A
Test Method:	FCC 15.35 Duty Cycle Determination
Notes:	Large Pulse=4.3msec
Date:	November 5, 2001
Tech:	Peter Lianina
Sheet:	1 of 3




**Retlif Testing Laboratories**

Report No. R-9234-1

Customer:	X-10 (USA)		
Test Sample:	RF Remote		
Model No:	UR86A	FCC ID	B4SUR86A
Test Method:	FCC15.35 Duty Cycle Determination		
Notes:	Small Pulse=625µsec Small Pulses=625µsec*21=13.125msecconds		
Date:	November 5, 2001	Tech:	Peter Liananna
	Sheet	7	of 3

R-9234 X-10 UR86A DCD 11/2/01 PL  
 REF 89.0 dBµV ATTEN 10 dB  
 MKR Δ 625.0 µsec  
 47.60 dB

hp  
 10 dB/

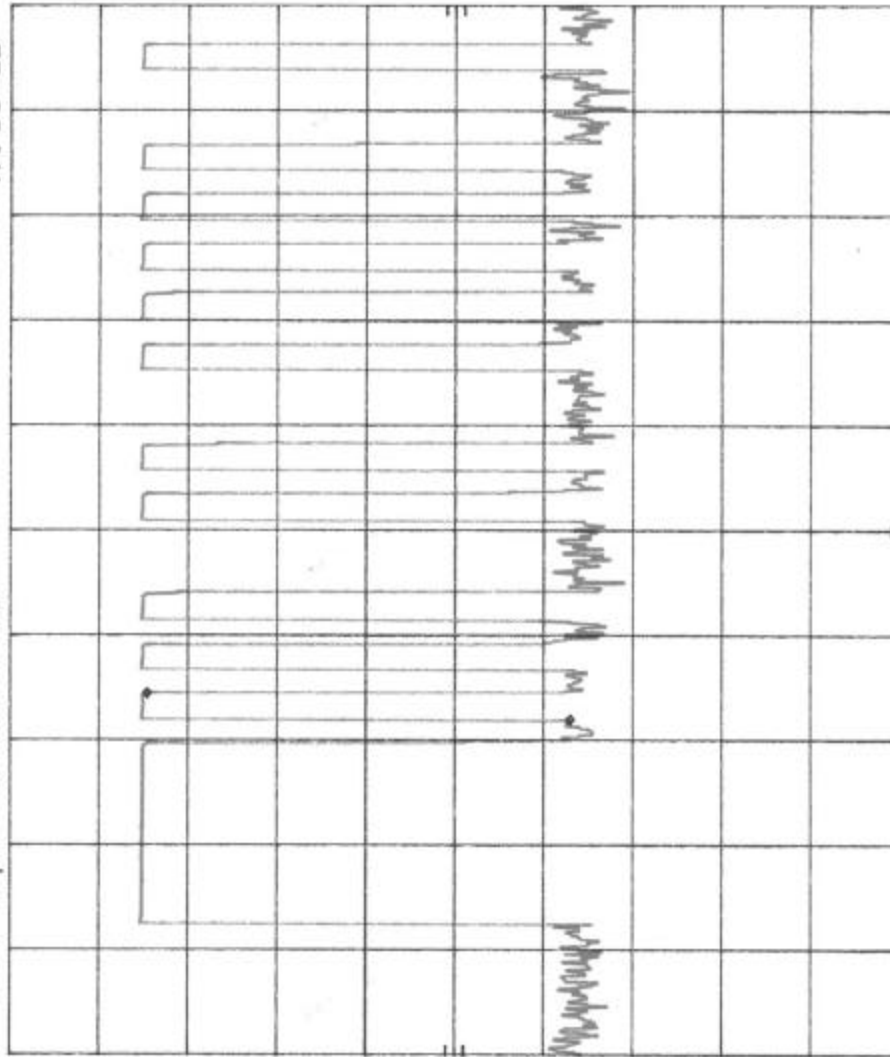

CENTER 309.429 967 MHz  
 RES BW 100 kHz  
 VBW 300 kHz  
 SWP 25.0 msec  
 SPAN 0 Hz




**Retlif Testing Laboratories**

Report No. R-9234-1

MKR  $\Delta$  48.00 msec  
-0.10 dB

R-9234 X-10 UR86A DCD 11/2/01 PL  
REF 89.0 dB $\mu$ V ATTN 10 dB

hp  
10 dB/

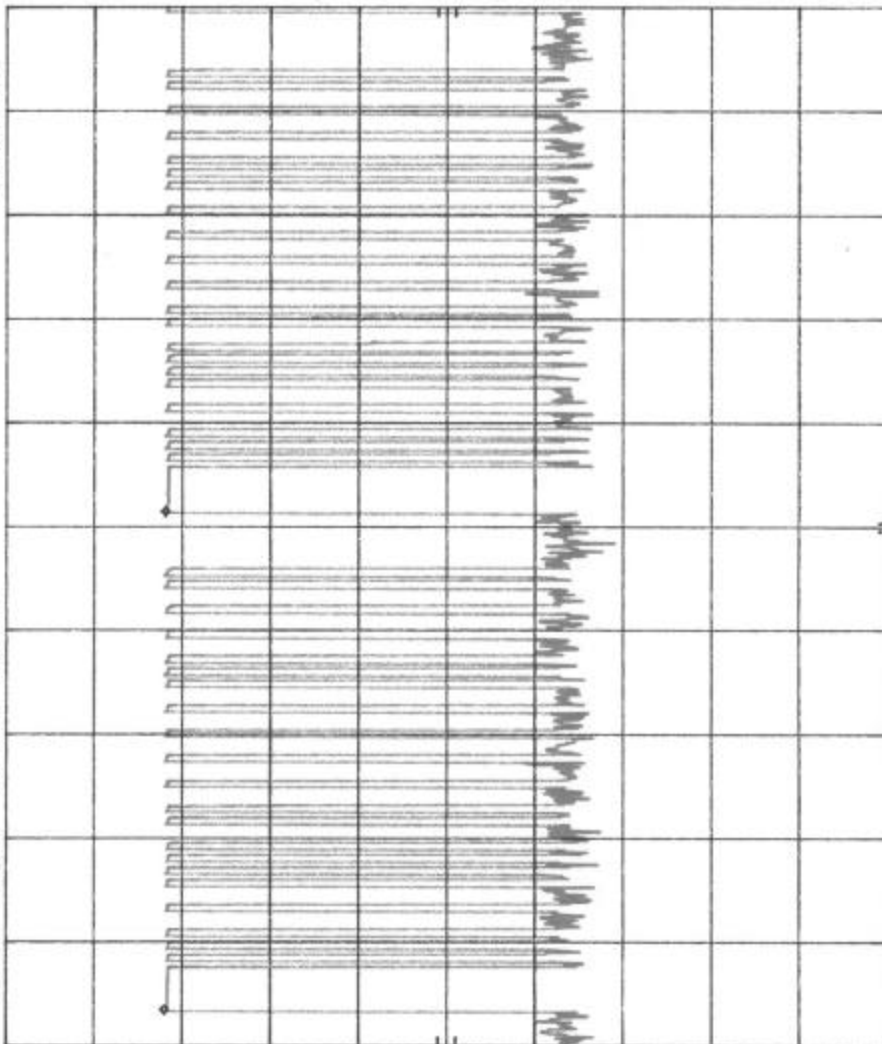

SPAN 0 Hz  
SWP 100 msec

VBW 300 kHz

CENTER 309.429 967 MHz  
RES BW 100 kHz

Customer:	X-10 (USA)
Test Sample:	RF Remote
Model No:	UR86A FCC ID B45UR86A
Test Method:	FCC15.35 Duty Cycle Determination
Notes:	Cycle time=48msec Transmit on time=4.3msec +13.125msec on=17.425msec Duty Cycle=17.425msec/48msec=36.3%, 20log(36.3%)=-8.8 Correction Factor
Date:	November 5, 2001
Test:	Patric Larrea
Sheet:	3 of 3



Retlif Testing Laboratories

Report No. R-9234-1