



RADIO TEST REPORT

Test Report No. : 11294468S-R2

Applicant : Canon Inc.
Type of Equipment : Wireless Module
Model No. : RF400
FCC ID : AZD400
Test regulation : FCC Part 15 Subpart E: 2016
W58 (5745 MHz - 5825 MHz Band) only
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11294468S-R1. 11294468S-R1 is replaced with this report.

Date of test: May 27 to June 23, 2016

Representative test engineer:

H. Morikawa

Hiroyuki Morikawa
Engineer
Consumer Technology Division

Approved by:

T. Imamura

Toyokazu Imamura
Leader
Consumer Technology Division



JAB
Testing
RTL02610

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 11294468S

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission.....	9
SECTION 6: Radiated Spurious Emission and Band Edge Compliance	10
SECTION 7: Antenna Terminal Conducted Tests.....	12
APPENDIX 1: Test data	13
Conducted Emission	13
99 % Occupied Bandwidth.....	14
6 dB Bandwidth	17
Maximum Conducted Output Power	20
Maximum Power Spectral Density	23
Radiated Spurious Emission	26
Conducted Spurious Emission	41
APPENDIX 2: Test instruments	42
APPENDIX 3: Photographs of test setup	44
Conducted Emission	44
Radiated Spurious Emission	45
Worst Case Position	46

SECTION 1: Customer information

Company Name	:	Canon Inc.
Address	:	30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 146-8501 Japan
Telephone Number	:	+81-3-5482-8070
Facsimile Number	:	+81-3-3757-8431
Contact Person	:	Yasushi Sasaki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Wireless Module
Model No.	:	RF400
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	DC3.3V
Receipt Date of Sample	:	May 26, 2016
Country of Mass-production	:	China
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: RF400 (referred to as the EUT in this report) is a Wireless Module.

General Specification

Clock frequency(ies) in the system : 32.768KHz, 38.4MHz

Radio Specification

Equipment type	:	Transceiver
Frequency of operation *1)	:	2.4GHz: 2412-2462MHz (IEEE 802.11b, 11g, 11n (20HT)) 2422-2452MHz (IEEE 802.11n (40HT)) W53: 5280-5320MHz (IEEE 802.11a, 11n (20HT)) 5310MHz (IEEE 802.11n (40HT)) W58: 5745-5805MHz (IEEE 802.11a, 11n (20HT)) 5755-5795MHz (IEEE 802.11n (40HT))
Bandwidth	:	20MHz (IEEE 802.11a, b, 11g, 11n (20HT)), 40MHz (IEEE 802.11n (40HT))
Channel spacing	:	5MHz (2.4GHz), 20MHz (11a, 11n (20HT, 5GHz)), 40MHz (11n (40HT, 5GHz))
Type of modulation	:	DSSS, OFDM
Antenna type	:	Monopole type chip antenna
Antenna connector type	:	None
Antenna gain	:	2.1dBi (2.4GHz), 2.4dBi (5GHz)
ITU code	:	D1D, G1D
Operation temperature range	:	-20 to +80 deg.C

* The EUT does not perform simultaneous transmission of 2.4GHz and 5GHz Wireless LAN.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart E.
FCC part 15 final revised on April 6, 2016.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart E
Unlicensed National Information Infrastructure Devices
Section 15.407 General technical requirements

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 IC: RSS-Gen 8.8	FCC: 15.407 (b) (6) / 15.207 IC: RSS-Gen 8.8	13.4 dB, 0.17399 MHz, L1 AV	Complied	-
26 dB Emission Bandwidth	FCC: KDB Publication Number 789033 IC: -	FCC: 15.407 (a) (1) (2) (3) IC: -	See data	N/A	Conducted
Maximum Conducted Output Power	FCC: KDB Publication Number 789033 IC: -	FCC: 15.407 (a) (1) (2) (3) IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)		Complied	Conducted
Maximum Power Spectral Density	FCC: KDB Publication Number 789033 IC: -	FCC : 15.407 (a) (1) (2) (3) IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)		Complied	Conducted
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033 IC: -	FCC: 15.407 (b), 15.205 and 15.209 IC: RSS-247 6.2.1 (2) 6.2.2 (2) 6.2.3 (2) 6.2.4 (2)	2.3 dB 624.0 MHz, QP, Vertical Tx 11n-20 5805 MHz	Complied	Conducted (< 30 MHz) / Radiated (> 30 MHz) *1)
6 dB Emission Bandwidth	FCC: ANSI C63.10-2013 IC: -	FCC: 15.407 (e) IC: RSS-247 6.2.4 (1)	See data	Complied	Conducted

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The module is constantly provided the stable voltage from the host device regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203/ 212 Antenna requirement

It is impossible for end users to replace the antenna, because it is soldered on the circuit board. Therefore the equipment complies with the requirement of 15.203/212.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Band Width	RSS-Gen 6.6	IC: -	N/A	N/A	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4 SAC / SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.1 dB	2.1 dB	2.6 dB	2.2 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	2.7 dB	2.7 dB	3.1 dB	-
	30 MHz-300 MHz	4.4 dB	4.4 dB	4.6 dB	-
	300 MHz-1 GHz	5.6 dB	5.5 dB	5.3 dB	-
	1 GHz-13 GHz	5.2 dB	5.2 dB	5.2 dB	-
Radiated emission (Measurement distance: 1 m)	13 GHz-18 GHz	4.9 dB	4.9 dB	4.9 dB	-
	18 GHz-40 GHz	4.9 dB	4.9 dB	4.9 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	0.76 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	0.79 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.74 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.08 dB
Spurious emission (Conducted) below 1GHz	1.5 dB
Spurious emission (Conducted) 1 GHz-3 GHz	1.7 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.4 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.5 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.5 dB
Bandwidth Measurement	0.66 %
Duty cycle and Time Measurement	0.012 %

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN
Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401
JAB Accreditation No. RTL02610

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.


SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test item	Mode	Tested frequency	Power setting *1)	Worst data rate *2)
Conducted emission Radiated emission (below 1GHz) *2)	Transmitting (Tx) IEEE 802.11n (20HT)	5805 MHz	12 dBm	MCS6, PN9
Other items	Transmitting (Tx) IEEE 802.11a	5745 MHz, 5785 MHz, 5805 MHz	12 dBm	18 Mbps, PN9
	Transmitting (Tx) IEEE 802.11n (20HT)	5745 MHz, 5785 MHz, 5805 MHz	12 dBm	MCS6, PN9
	Transmitting (Tx) IEEE 802.11n (40HT)	5755 MHz, 5795 MHz	12 dBm	MCS6, PN9
*1) Software used for the test: RFTTEST ver. 14.0.11.p51				
*2) The worst condition was determined based on the test result of Maximum Conducted Output Power.				

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

4.2 Configuration and peripherals

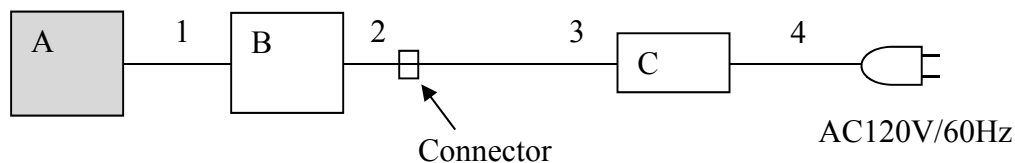

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless Module	RF400	#8	Canon	EUT
B	Digital Camera	PC1739	431030032124	Canon	-
C	Compact Power Adapter	CA-DC10 N	1147	Canon	-

List of cables used

No.	Cable Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Jig	0.15	Unshielded	Unshielded	-
2	DC	0.15	Unshielded	Unshielded	-
3	DC	1.9	Unshielded	Unshielded	-
4	AC	1.9	Unshielded	Unshielded	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN / (AMN) to the input power source.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector	: QP and CISPR Average
Measurement range	: 0.15 MHz-30 MHz
Test data	: APPENDIX
Test result	: Pass

SECTION 6: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p. ^{*}) in the Section 15.407 (b) (1) (2) (3).

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p. ^{*}) or

78.2 dBuV/m, 3 m (-17 dBm e.i.r.p. ^{*}) in the Section 15.407 (b).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad : P \text{ is the e.i.r.p. (Watts)}$$

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method VB *1) RBW: 1 MHz VBW: 10 Hz Detector: Peak Trace: Maxhold
Test Distance	3 m	3 m*2) (1 GHz – 13GHz), 1 m*2) (13 GHz – 40 GHz),	

*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on April 8, 2016)".

*2) Distance Factor: Refer to the data.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz-40 GHz

Test data : APPENDIX

Test result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used and Test method
26 dB Bandwidth	Enough to capture the emission	Close to 1 % of EBW	> RBW	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
6 dB Bandwidth	Enough to capture the emission	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Conducted Output Power	-	-	-	Auto	Average	-	Power Meter (Sensor: 160 MHz BW) (Method PM-G)
Maximum Power Spectral Density	Encompass the entire EBW	100 kHz *2)	≥ 3 RBW	Auto	RMS Power Averaging (100 times)	Clear Write	Spectrum Analyzer
Conducted Spurious Emission*3)	9 kHz – 150 kHz 150 kHz – 30 MHz	200 Hz 10 kHz	620 Hz 30 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

* The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on April 8, 2016)".

*1) Peak hold was applied as Worst-case measurement.

*2) KDB 789033 D02 says that RBW is set to be 500 kHz for 5.725 GHz-5.850 GHz, but it is not possible with spectrum analyzer, so RBW Correction Factor ($10 \log(500 \text{ kHz} / 100 \text{ kHz})$) was added to the test result.

*3) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz-150 kHz: RBW = 200 Hz, 150 kHz-30 MHz: RBW = 10 kHz)

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX

Test result : Pass

APPENDIX 1: Test data

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.3 Semi-Anechoic Chamber
Date : 2016/06/03

Mode : Tx 11n (20HT) 5805MHz
Report No. : 11294468S
Temp./Humi. : 24 deg.C / 41 %RH

Remarks : -

Limit1 : FCC 15C (15.207) QP
Limit2 : FCC 15C (15.207) AV

Engineer : Hiroyuki Morikawa

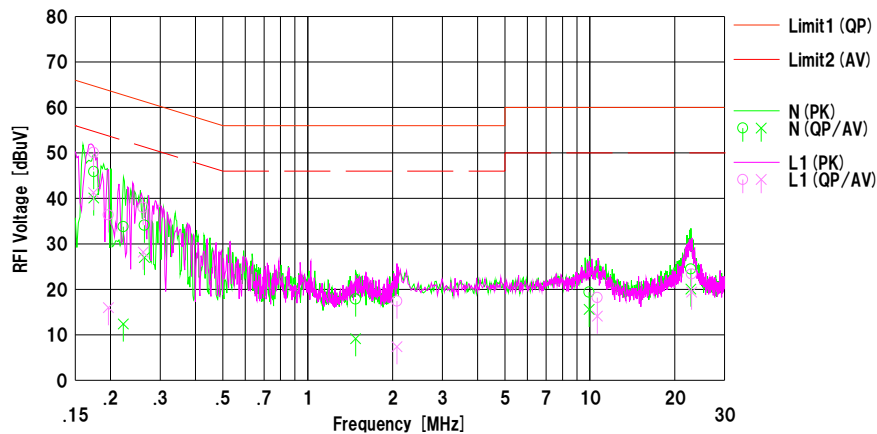

No.	Freq. [MHz]	Reading		C.Fac	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]		<QP> [dBuV]	<AV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.17436	33.50	27.70	12.40	45.90	40.10	64.75	54.75	18.8	14.6	N	
2	0.22200	21.40	0.00	12.39	33.79	12.39	62.74	52.74	28.9	40.3	N	
3	0.26374	21.70	14.60	12.40	34.10	27.00	61.31	51.31	27.2	24.3	N	
4	1.47800	5.40	-3.30	12.47	17.87	9.17	56.00	46.00	38.1	36.8	N	
5	9.94062	6.50	2.70	12.88	19.38	15.58	60.00	50.00	40.6	34.4	N	
6	22.80716	11.10	6.70	13.38	24.48	20.08	60.00	50.00	35.5	29.9	N	
7	0.17399	37.70	28.90	12.40	50.10	41.30	64.77	54.77	14.6	13.4	L1	
8	0.19656	24.00	3.60	12.38	36.38	15.98	63.75	53.75	27.3	37.7	L1	
9	0.26109	25.60	15.80	12.40	38.00	28.20	61.40	51.40	23.4	23.2	L1	
10	2.07081	4.90	-5.10	12.50	17.40	7.40	56.00	46.00	38.6	38.6	L1	
11	10.63161	5.30	1.20	12.90	18.20	14.10	60.00	50.00	41.8	35.9	L1	
12	22.94933	10.00	6.00	13.38	23.38	19.38	60.00	50.00	36.6	30.6	L1	


Calculation: Result [dBuV] = Reading [dBuV] + C.Fac (LISN+ATT+Cable) [dB]
LISN: SLS-05

99 % Occupied Bandwidth

Test place Shonan EMC Lab. No.5 Shielded Room
Report No. 11294468S-R2
Date May 27, 2016
Temperature / Humidity 24 deg. C / 54 % RH
Engineer Wataru Kojima
Mode Tx

Mode	Tested Frequency [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
11a	5745	16.944	-
	5785	16.933	-
	5805	16.938	-
11n-20	5745	18.060	-
	5785	18.019	-
	5805	18.054	-
11n-40	5755	36.663	-
	-	-	-
	5795	36.654	-


99 % Occupied Bandwidth

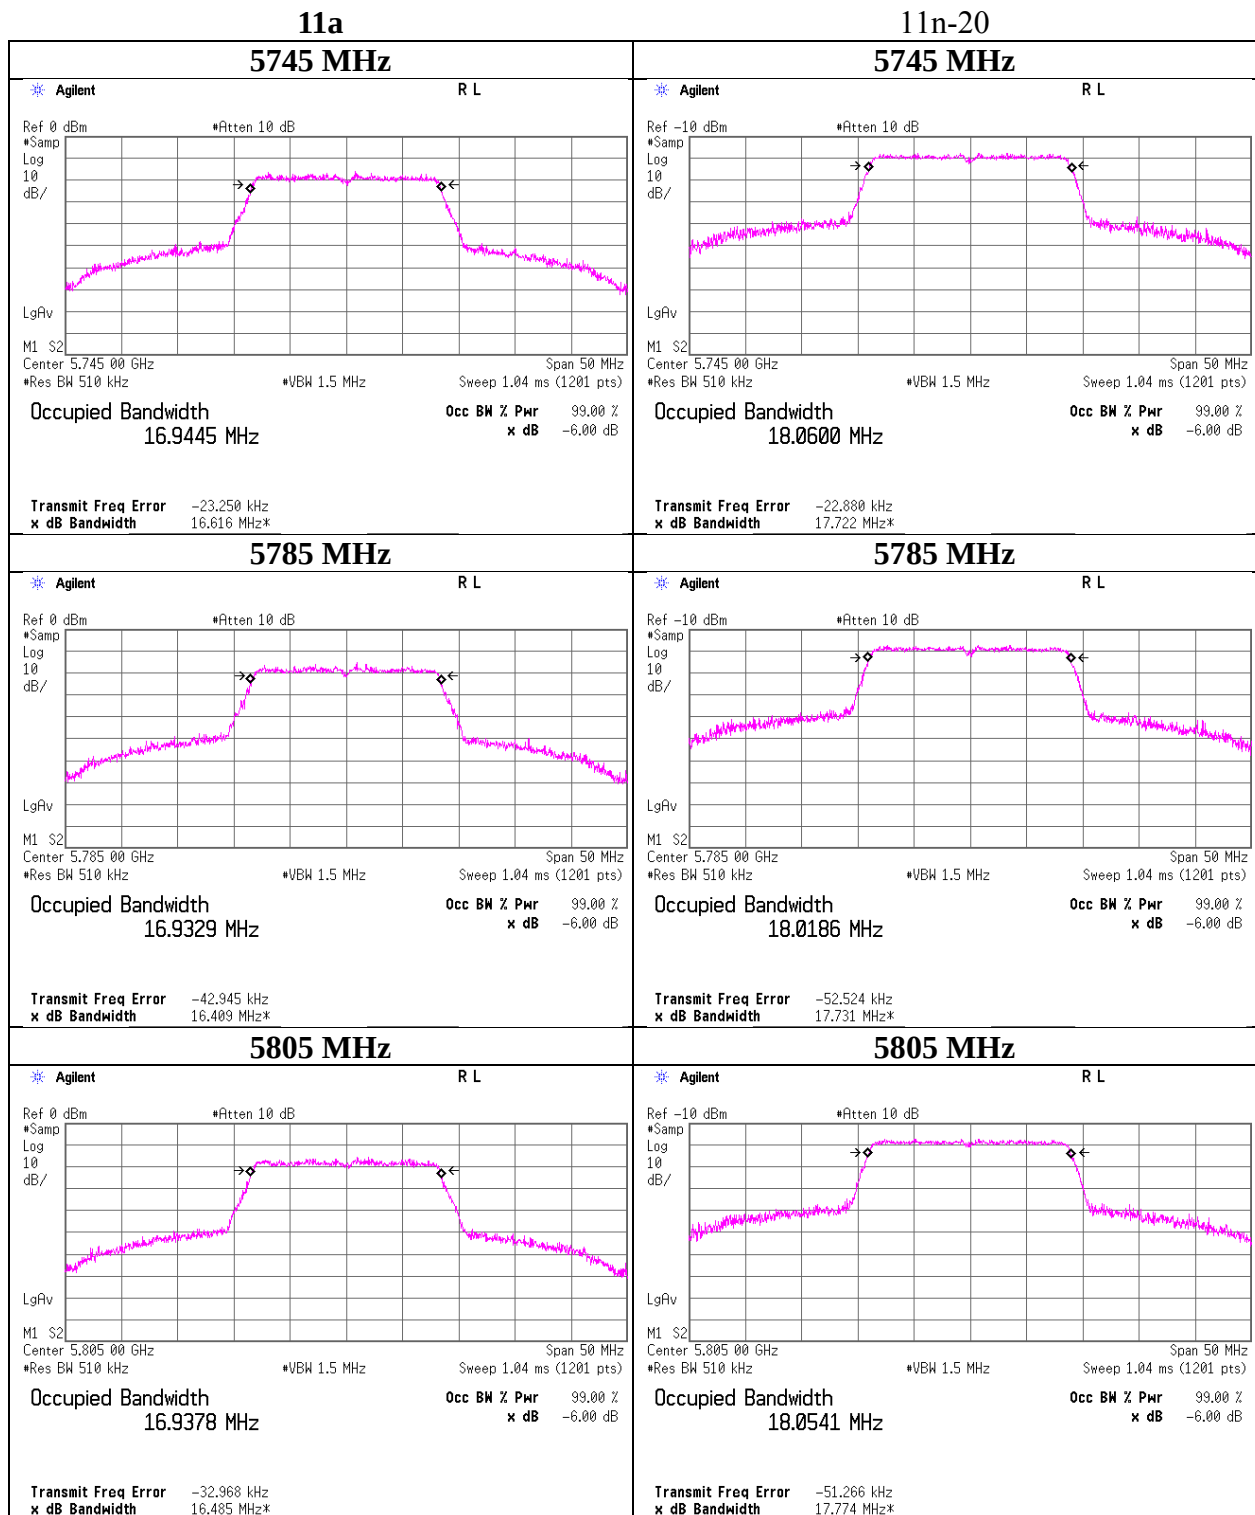


99 % Occupied Bandwidth

11n-40

5755 MHz

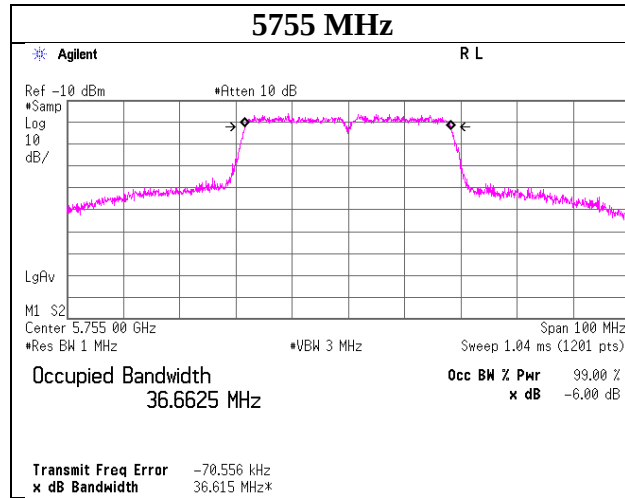

5795 MHz

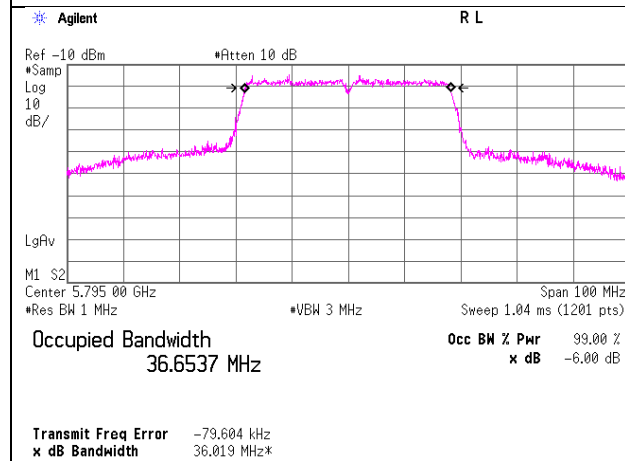


6 dB Bandwidth

Test place Shonan EMC Lab. No.5 Shielded Room
Report No. 11294468S-R2
Date May 27, 2016
Temperature / Humidity 24 deg. C / 54 % RH
Engineer Wataru Kojima
Mode Tx

Tested Frequency [MHz]	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
11a	5745	16.566	> 500
	5785	16.572	> 500
	5805	16.561	> 500
11n-20	5745	17.773	> 500
	5785	17.801	> 500
	5805	17.862	> 500
11n-40	5755	36.602	> 500
	-		> 500
	5795	36.596	> 500


6 dB Bandwidth

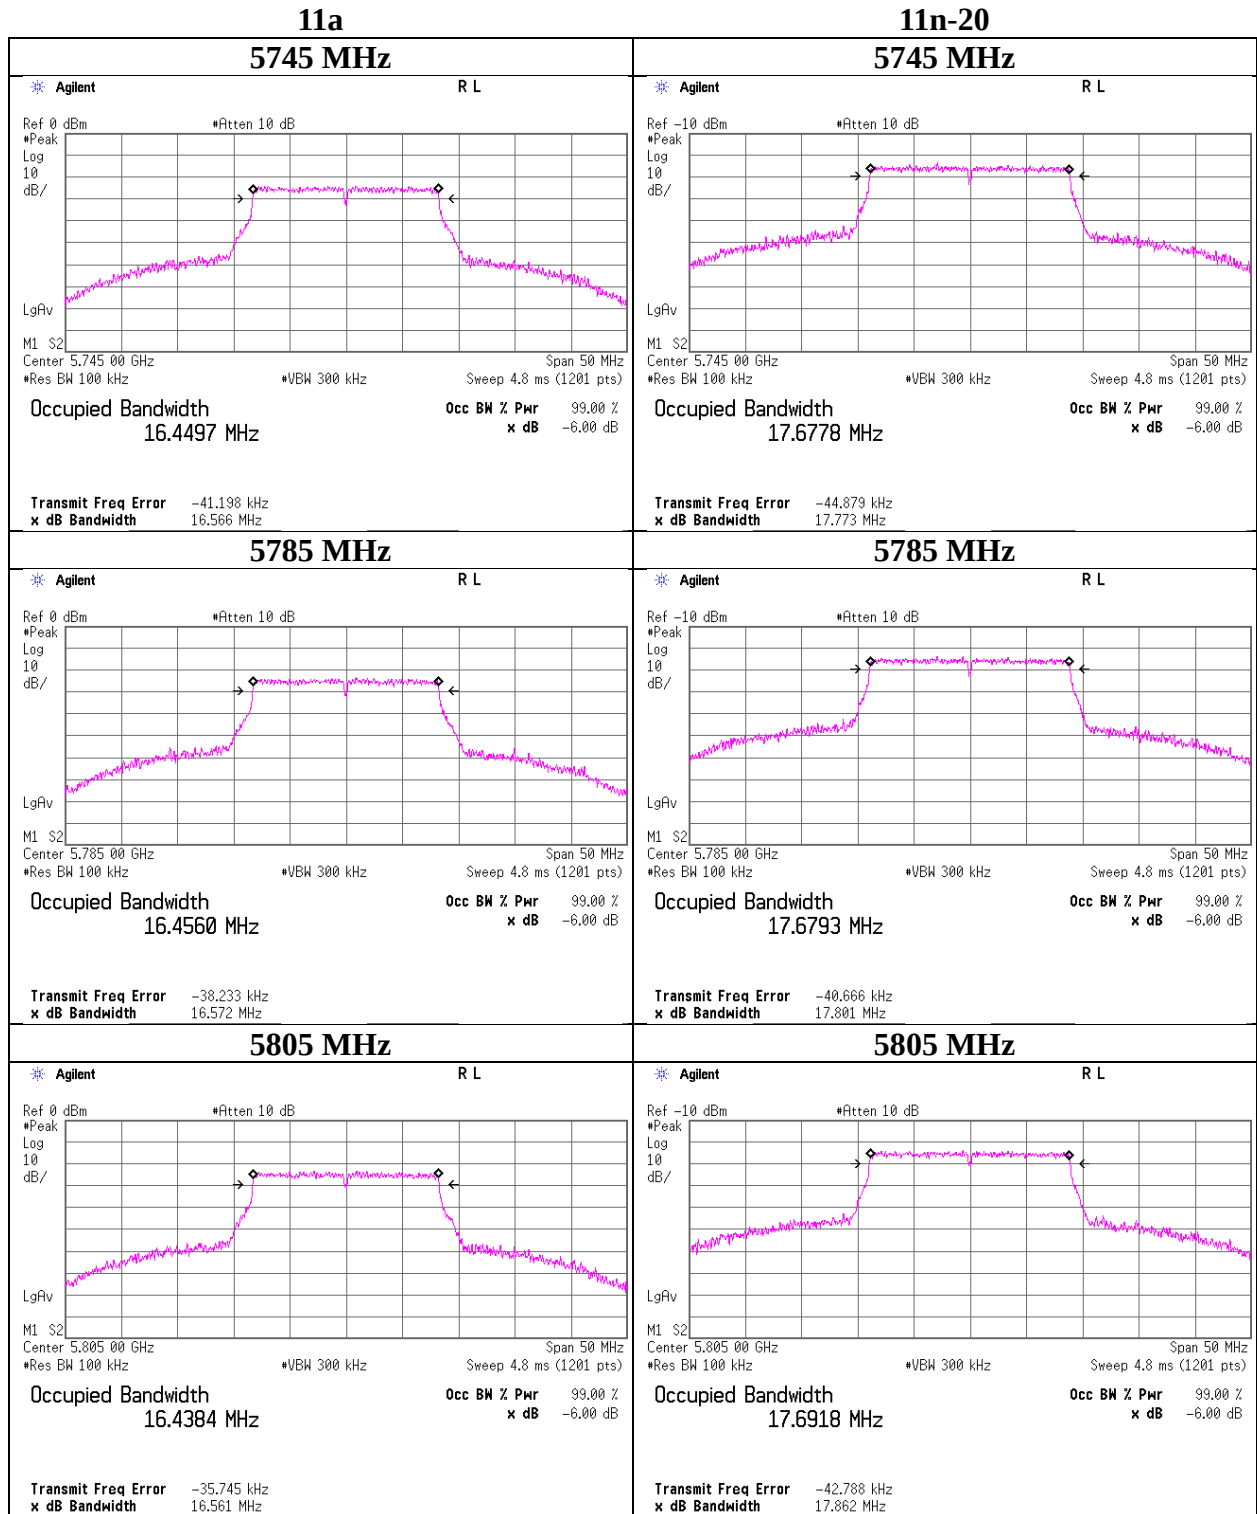


6 dB Bandwidth

11n-40

5755 MHz

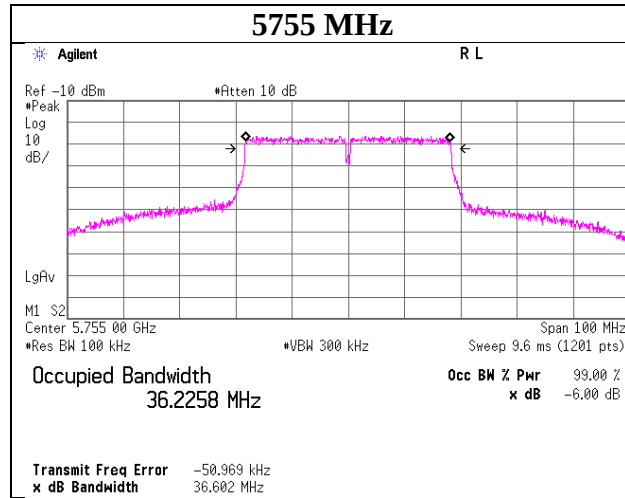

5795 MHz

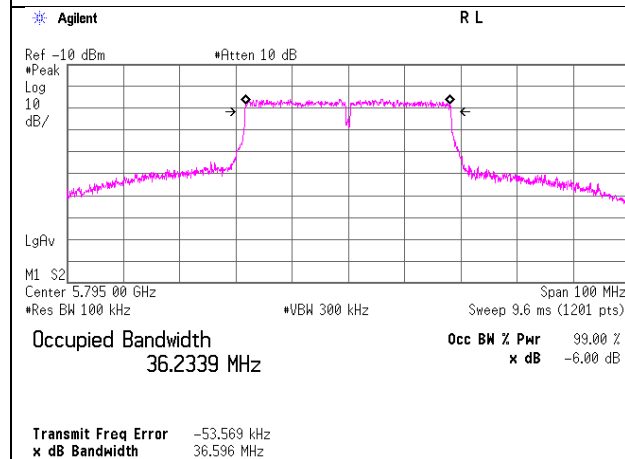

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.1 Shielded Room
Report No. 11294468S-R2
Date May 27, 2016
Temperature / Humidity 24 deg. C / 54 % RH
Engineer Wataru Kojima
Mode Tx

11a

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	26 dB EBW (B for FCC)	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
								Result		Limit	Margin	Result		Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5745	-10.17	2.57	19.86	0.00	2.4	-	-	12.26	16.84	30.00	17.74	14.66	29.27	36.00	21.34
5785	-9.75	2.66	19.87	0.00	2.4	-	-	12.78	18.97	30.00	17.22	15.18	32.97	36.00	20.82
5805	-9.51	2.69	19.87	0.00	2.4	-	-	13.05	20.21	30.00	16.95	15.45	35.11	36.00	20.55

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

11n-20

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	26 dB EBW (B for FCC)	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
								Result		Limit	Margin	Result		Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5745	-10.16	2.57	19.86	0.00	2.4	-	-	12.27	16.88	30.00	17.73	14.67	29.33	36.00	21.33
5785	-9.74	2.66	19.87	0.00	2.4	-	-	12.79	19.02	30.00	17.21	15.19	33.05	36.00	20.81
5805	-9.50	2.69	19.87	0.00	2.4	-	-	13.06	20.25	30.00	16.94	15.46	35.20	36.00	20.54

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

11n-40

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	26 dB EBW (B for FCC)	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
								Result		Limit	Margin	Result		Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5755	-10.12	2.59	19.87	0.00	2.4	-	-	12.34	17.14	30.00	17.66	14.74	29.79	36.00	21.26
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5795	-9.81	2.68	19.87	0.00	2.4	-	-	12.74	18.78	30.00	17.26	15.14	32.64	36.00	20.86

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24 deg. C / 54 % RH
Engineer	Wataru Kojima
Mode	Tx

5745 MHz

Mode	Rate Mbps	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11a	6	12.26	0.00	12.26	
	9	12.29	0.00	12.29	
	12	12.33	0.00	12.33	
	18	12.36	0.00	12.36	*
	24	12.25	0.00	12.25	
	36	12.05	0.00	12.05	
	48	12.22	0.00	12.22	
	54	12.13	0.00	12.13	

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

5745 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n-20	0	12.28	0.00	12.28	
	1	12.31	0.00	12.31	
	2	12.30	0.00	12.30	
	3	12.33	0.00	12.33	
	4	12.32	0.00	12.32	
	5	12.31	0.00	12.31	
	6	12.37	0.00	12.37	*
	7	12.35	0.00	12.35	

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

5755 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n-40	0	12.18	0.00	12.18	
	1	12.08	0.00	12.08	
	2	12.11	0.00	12.11	
	3	12.30	0.00	12.30	
	4	12.06	0.00	12.06	
	5	12.19	0.00	12.19	
	6	12.34	0.00	12.34	*
	7	12.16	0.00	12.16	

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Burst rate confirmation

Test place	Shonan EMC Lab. No.5 Shielded Room
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24 deg. C / 54 % RH
Engineer	Wataru Kojima
Mode	Tx

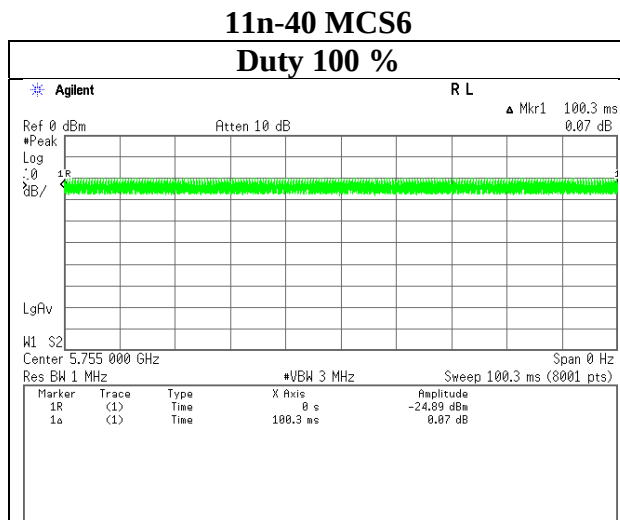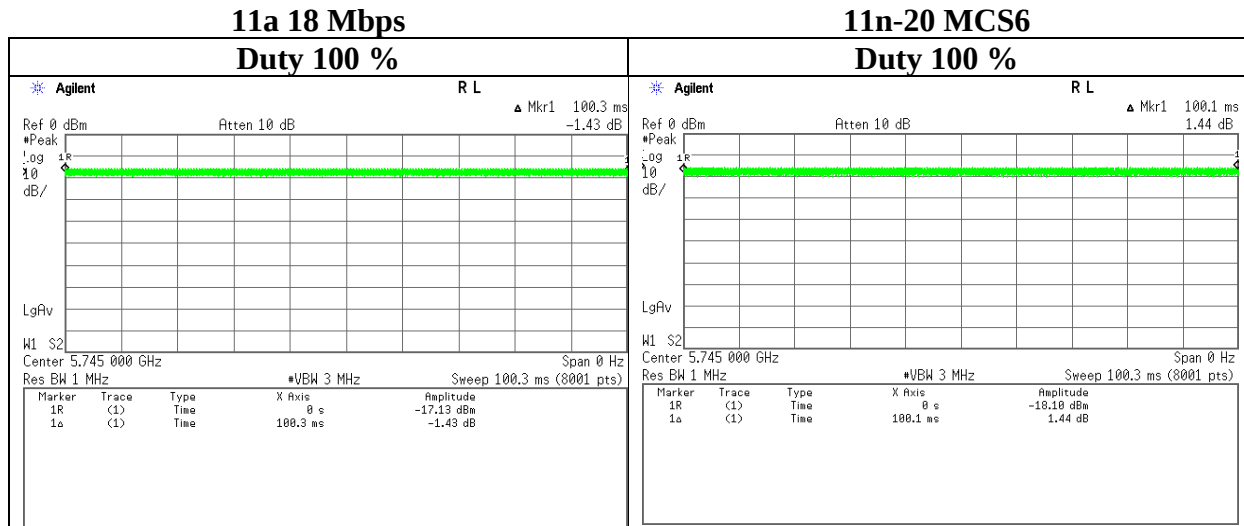

Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.5 Shielded Room
Report No. : 11294468S-R2
Date : May 27, 2016
Temperature / Humidity : 24 deg. C / 54 % RH
Engineer : Wataru Kojima
Mode : Tx

11a

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5745	-30.05	2.57	19.86	0.00	2.4	6.99	-0.62	30.00	30.62	1.78	36.00	34.22
5785	-29.55	2.66	19.87	0.00	2.4	6.99	-0.02	30.00	30.02	2.38	36.00	33.62
5805	-29.15	2.69	19.87	0.00	2.4	6.99	0.40	30.00	29.60	2.80	36.00	33.20

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

11n-20

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5745	-29.82	2.57	19.86	0.00	2.4	6.99	-0.39	30.00	30.39	2.01	36.00	33.99
5785	-30.46	2.66	19.87	0.00	2.4	6.99	-0.94	30.00	30.94	1.46	36.00	34.54
5805	-29.77	2.69	19.87	0.00	2.4	6.99	-0.21	30.00	30.21	2.19	36.00	33.81

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

11n-40

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5755	-33.47	2.59	19.87	0.00	2.4	6.99	-4.02	30.00	34.02	-1.62	36.00	37.62
-	-	-	-	-	-	-	-	-	-	-	-	-
5795	-32.93	2.68	19.87	0.00	2.4	6.99	-3.40	30.00	33.40	-1.00	36.00	37.00

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.


RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain


Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Report No. 11294468S-R2
Date May 27, 2016
Temperature / Humidity 24 deg. C / 54 % RH
Engineer Wataru Kojima
Mode Tx

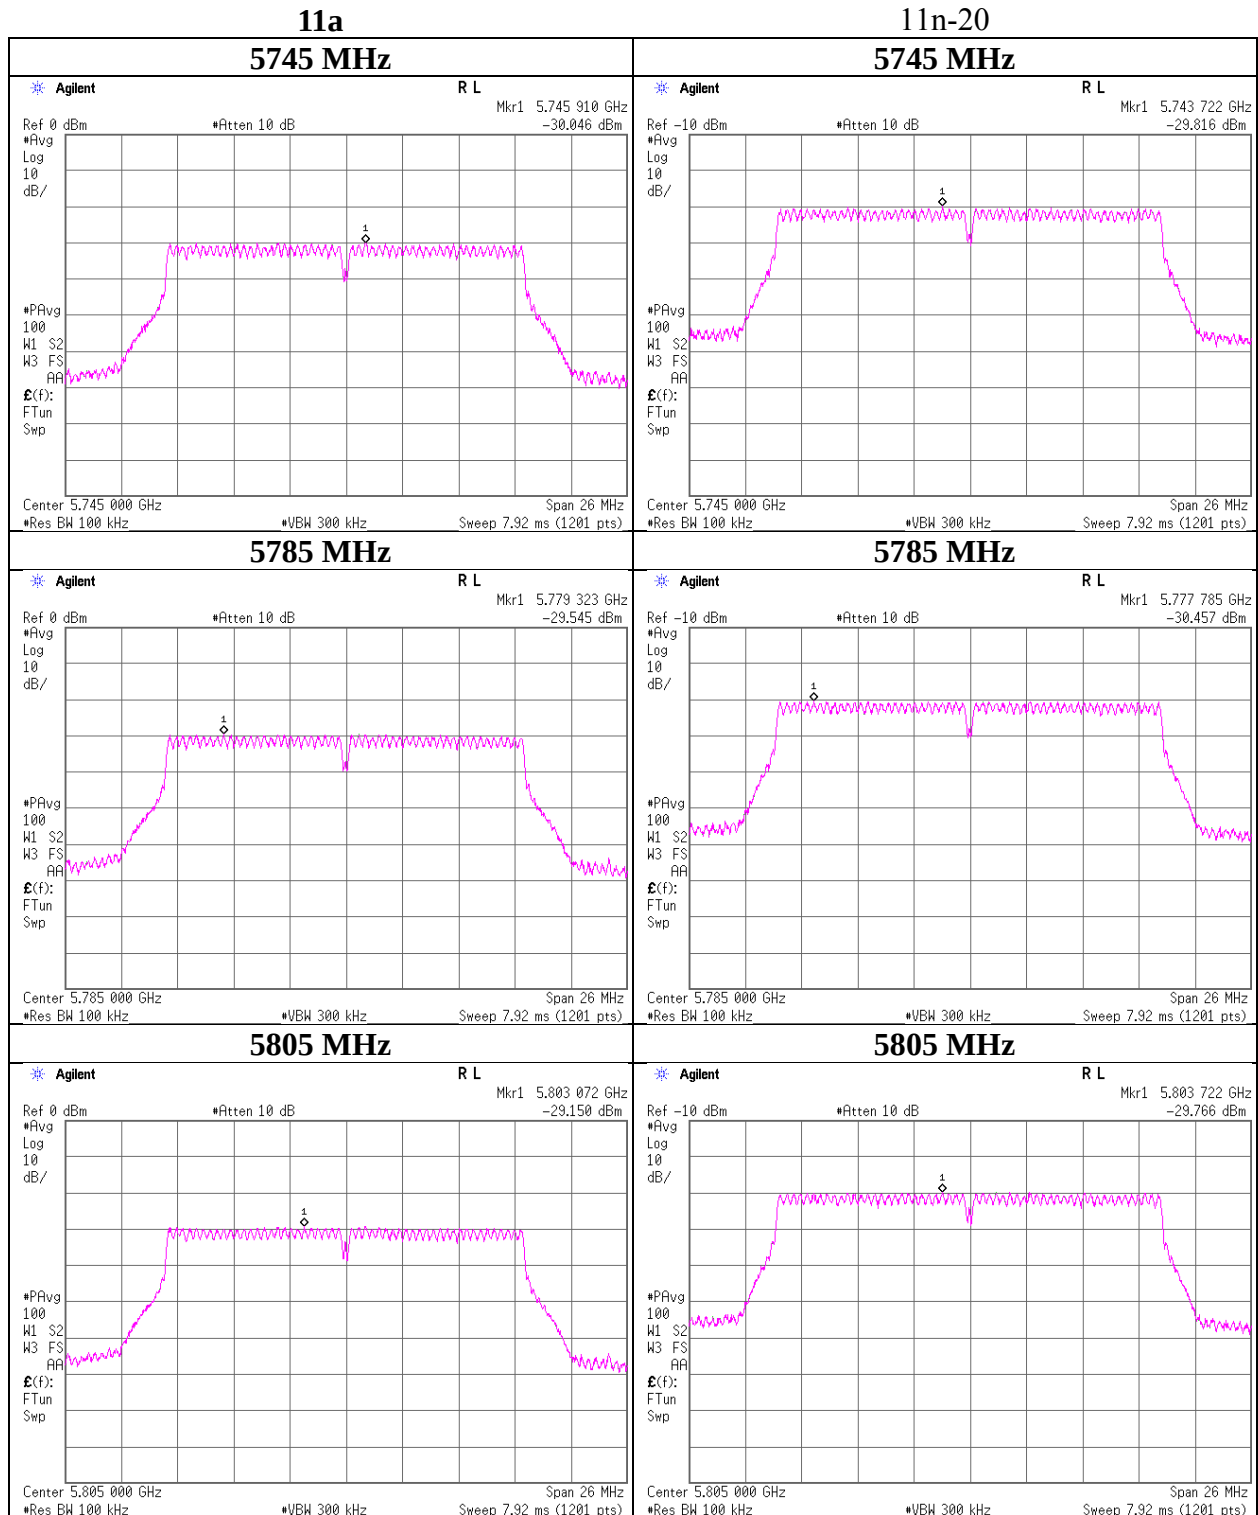

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24 deg. C / 54 % RH
Engineer	Wataru Kojima
Mode	Tx

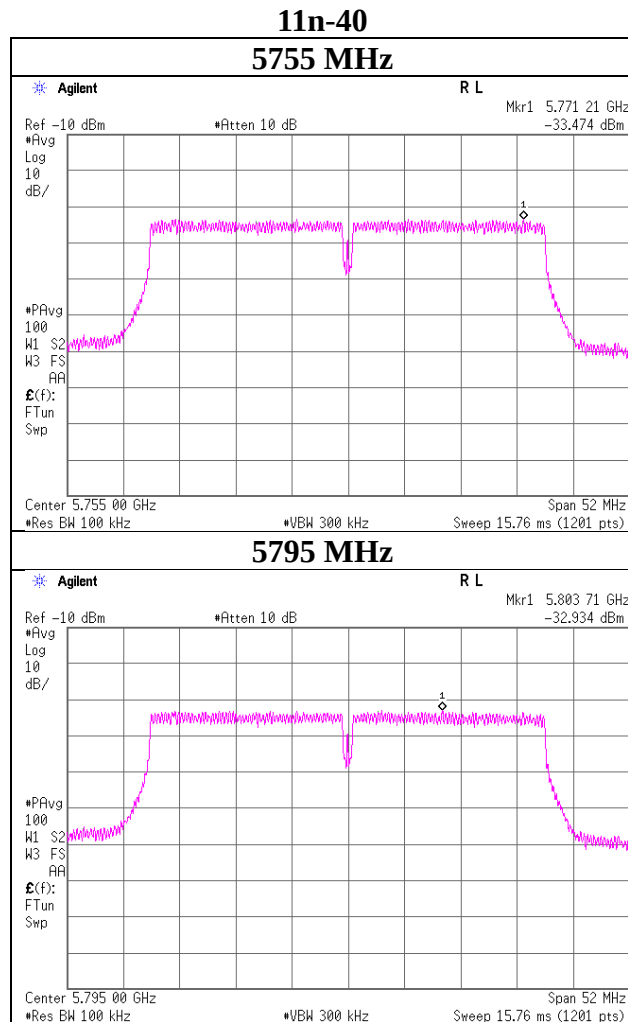

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber			
Report No.	11294468S-R2			
Date	May 27, 2016	May 28, 2016	May 31, 2016	June 23, 2016
Temperature / Humidity	24deg. C / 52 % RH	24deg. C / 52 % RH	25deg. C / 51 % RH	20deg. C / 55 % RH
Engineer	Hikaru Shirasawa (1 GHz-6.4 GHz) (3AC)	Kazutaka Takeyama (6.4 GHz-18 GHz) (3AC)	Hiroyuki Morikawa (18 GHz-40 GHz) (3AC)	Hiroyuki Morikawa (1 GHz-6.4 GHz) (1AC)
Mode	Tx 11a 5745 MHz			

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7660.3	PK	48.1	37.2	7.2	41.5	3.5	54.5	73.9	19.4	140.0	150.0	
Hori.	11490.0	PK	44.8	40.0	8.6	40.3	3.5	56.6	73.9	17.3	100.0	0.0	
Hori.	17235.0	PK	44.4	42.0	10.9	34.2	-9.5	53.6	73.9	20.3	100.0	0.0	
Hori.	7660.3	AV	38.1	37.2	7.2	41.5	3.5	44.5	53.9	9.4	140.0	150.0	VBW:10Hz
Hori.	11490.0	AV	34.5	40.0	8.6	40.3	3.5	46.3	53.9	7.6	100.0	0.0	VBW:10Hz
Hori.	17235.0	AV	34.2	42.0	10.9	34.2	-9.5	43.4	53.9	10.5	100.0	0.0	VBW:10Hz
Vert.	7660.3	PK	48.0	37.2	7.2	41.5	3.5	54.4	73.9	19.5	125.0	137.0	
Vert.	11490.0	PK	44.4	40.0	8.6	40.3	3.5	56.2	73.9	17.7	100.0	0.0	
Vert.	17235.0	PK	44.5	42.0	10.9	34.2	-9.5	53.7	73.9	20.2	100.0	0.0	
Vert.	7660.3	AV	37.4	37.2	7.2	41.5	3.5	43.8	53.9	10.1	125.0	137.0	VBW:10Hz
Vert.	11490.0	AV	34.9	40.0	8.6	40.3	3.5	46.7	53.9	7.2	100.0	0.0	VBW:10Hz
Vert.	17235.0	AV	34.7	42.0	10.9	34.2	-9.5	43.9	53.9	10.0	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

(Calculation) (above 1GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.0	PK	47.9	32.4	16.0	40.7	2.5	58.1	-37.1	-27.0	10.1			
Hori.	5700.0	PK	47.6	32.5	16.0	40.6	2.5	58.0	-37.2	10.0	47.2			
Hori.	5720.0	PK	50.9	32.6	16.0	40.6	2.5	61.4	-33.8	15.6	49.4			
Hori.	5725.0	PK	57.9	32.6	16.0	40.6	2.5	68.4	-26.8	27.0	53.8			
Vert.	5650.0	PK	47.8	32.4	16.0	40.7	2.5	58.0	-37.2	-27.0	10.2			
Vert.	5700.0	PK	48.9	32.5	16.0	40.6	2.5	59.3	-35.9	10.0	45.9			
Vert.	5720.0	PK	49.3	32.6	16.0	40.6	2.5	59.8	-35.4	15.6	51.0			
Vert.	5725.0	PK	56.4	32.6	16.0	40.6	2.5	66.9	-28.3	27.0	55.3			

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10*LOG (({ 10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance:3[m] } ^ 2) / 30) *10^3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24deg. C / 52 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11a 5745 MHz

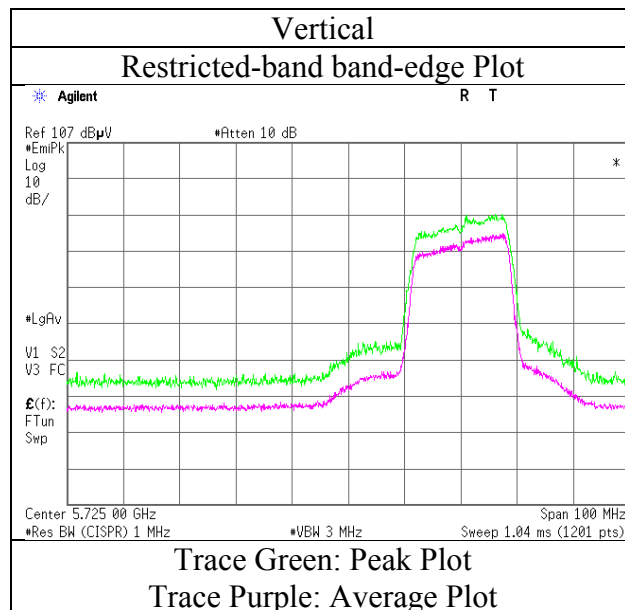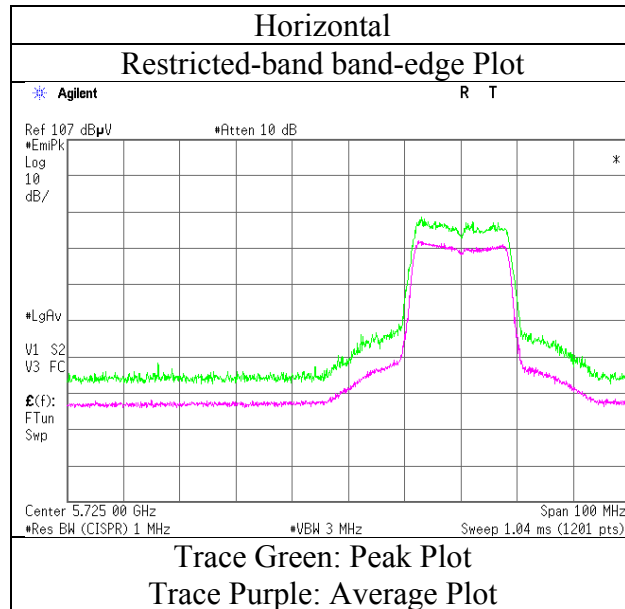

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber		
Report No.	11294468S-R2		
Date	May 27, 2016	May 28, 2016	May 31, 2016
Temperature / Humidity	24deg. C / 52 % RH	24deg. C / 52 % RH	25deg. C / 51 % RH
Engineer	Hikaru Shirasawa (1 GHz-6.4 GHz)	Kazutaka Takeyama (6.4 GHz-18 GHz)	Hiroyuki Morikawa (18 GHz-40 GHz)
Mode	Tx 11a 5785 MHz		

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7713.7	PK	50.0	37.3	7.1	41.5	3.5	56.4	73.9	17.5	147.0	146.0	
Hori.	11570.0	PK	46.0	39.9	8.6	40.3	3.5	57.7	73.9	16.2	100.0	0.0	
Hori.	17355.0	PK	44.9	42.4	10.9	34.3	-9.5	54.4	73.9	19.5	100.0	0.0	
Hori.	7713.7	AV	37.7	37.3	7.1	41.5	3.5	44.1	53.9	9.8	147.0	146.0	VBW:10Hz
Hori.	11570.0	AV	35.0	39.9	8.6	40.3	3.5	46.7	53.9	7.2	100.0	0.0	VBW:10Hz
Hori.	17355.0	AV	34.0	42.4	10.9	34.3	-9.5	43.5	53.9	10.4	100.0	0.0	VBW:10Hz
Vert.	7713.7	PK	47.8	37.3	7.1	41.5	3.5	54.2	73.9	19.7	130.0	140.0	
Vert.	11570.0	PK	42.0	39.9	8.6	40.3	3.5	53.7	73.9	20.2	100.0	0.0	
Vert.	17355.0	PK	46.0	42.4	10.9	34.3	-9.5	55.5	73.9	18.4	100.0	0.0	
Vert.	7713.7	AV	37.4	37.3	7.1	41.5	3.5	43.8	53.9	10.1	130.0	140.0	VBW:10Hz
Vert.	11570.0	AV	35.8	39.9	8.6	40.3	3.5	47.5	53.9	6.4	100.0	0.0	VBW:10Hz
Vert.	17355.0	AV	33.6	42.4	10.9	34.3	-9.5	43.1	53.9	10.8	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.5\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber
Report No. 11294468S-R2
Date May 27, 2016 May 28, 2016 May 31, 2016 June 23, 2016
Temperature / Humidity 24deg. C / 52 % RH 24deg. C / 52 % RH 25deg. C / 51 % RH 20deg. C / 55 % RH
Engineer Hikaru Shirasawa Kazutaka Takeyama Hiroyuki Morikawa Hiroyuki Morikawa
(1 GHz-6.4 GHz) (6.4 GHz-18 GHz) (18 GHz-40 GHz) (1 GHz-6.4 GHz)
(3AC) (3AC) (3AC) (1AC)
Mode Tx 11a 5805 MHz

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7740.4	PK	47.3	37.4	7.1	41.5	3.5	53.8	73.9	20.1	140.0	221.0	
Hori.	11610.0	PK	45.0	39.9	8.7	40.2	3.5	56.9	73.9	17.0	100.0	0.0	
Hori.	17415.0	PK	45.5	42.6	10.9	34.3	-9.5	55.2	73.9	18.7	100.0	0.0	
Hori.	7740.4	AV	38.0	37.4	7.1	41.5	3.5	44.5	53.9	9.4	140.0	221.0	VBW:10Hz
Hori.	11610.0	AV	35.9	39.9	8.7	40.2	3.5	47.8	53.9	6.1	100.0	0.0	VBW:10Hz
Hori.	17415.0	AV	34.1	42.6	10.9	34.3	-9.5	43.8	53.9	10.1	100.0	0.0	VBW:10Hz
Vert.	7740.4	PK	46.1	37.4	7.1	41.5	3.5	52.6	73.9	21.3	140.0	180.0	
Vert.	11610.0	PK	47.4	39.9	8.7	40.2	3.5	59.3	73.9	14.6	100.0	0.0	
Vert.	17415.0	PK	47.0	42.6	10.9	34.3	-9.5	56.7	73.9	17.2	100.0	0.0	
Vert.	7740.4	AV	37.6	37.4	7.1	41.5	3.5	44.1	53.9	9.8	140.0	180.0	VBW:10Hz
Vert.	11610.0	AV	35.3	39.9	8.7	40.2	3.5	47.2	53.9	6.7	100.0	0.0	VBW:10Hz
Vert.	17415.0	AV	34.0	42.6	10.9	34.3	-9.5	43.7	53.9	10.2	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

(Calculation) (above 1GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.0	PK	47.5	32.8	16.1	40.6	2.5	58.3	-36.9	27.0	63.9			
Hori.	5855.0	PK	46.4	32.8	16.1	40.6	2.5	57.2	-38.0	15.6	53.6			
Hori.	5875.0	PK	46.4	32.9	16.1	40.6	2.5	57.3	-37.9	10.0	47.9			
Hori.	5925.0	PK	46.9	33.0	16.2	40.6	2.5	58.0	-37.2	-27.0	10.2			
Vert.	5850.0	PK	46.5	32.8	16.1	40.6	2.5	57.3	-37.9	27.0	64.9			
Vert.	5855.0	PK	46.5	32.8	16.1	40.6	2.5	57.3	-37.9	15.6	53.5			
Vert.	5875.0	PK	46.3	32.9	16.1	40.6	2.5	57.2	-38.0	10.0	48.0			
Vert.	5925.0	PK	46.4	33.0	16.2	40.6	2.5	57.5	-37.7	-27.0	10.7			

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10*LOG (({ 10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance:3[m]) ^ 2 } / 30) *10^3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24deg. C / 52 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11a 5805 MHz

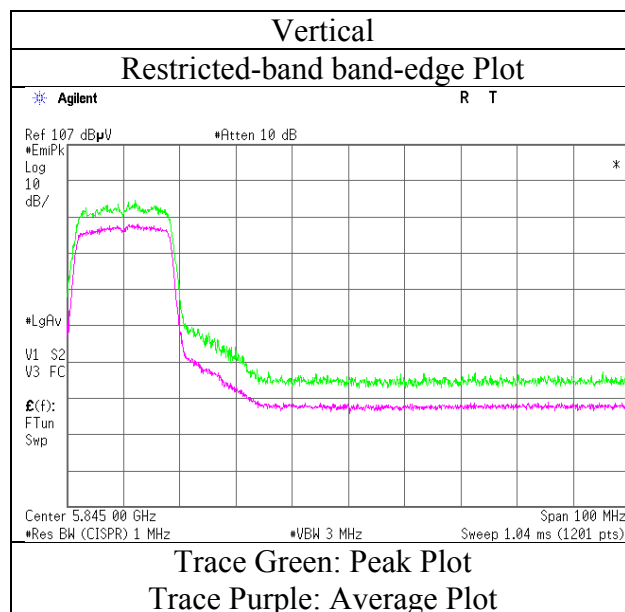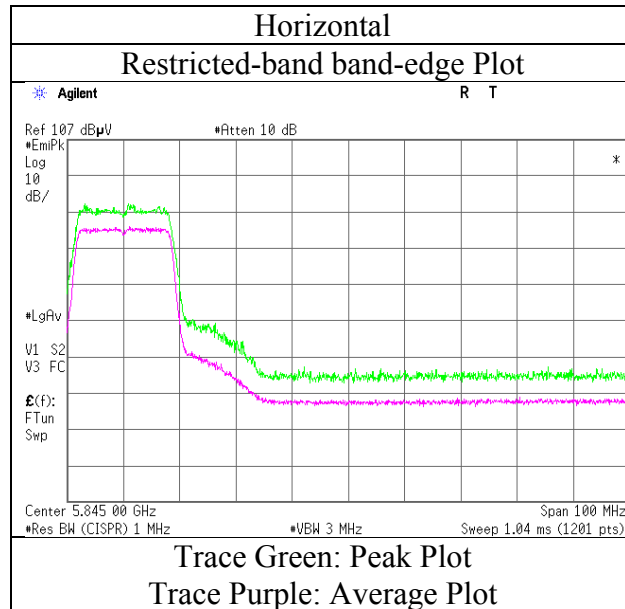

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber
Report No. 11294468S-R2
Date May 27, 2016 May 28, 2016 May 31, 2016 June 23, 2016
Temperature / Humidity 24deg. C / 52 % RH 24deg. C / 52 % RH 25deg. C / 51 % RH 20deg. C / 55 % RH
Engineer Hikaru Shirasawa Kazutaka Takeyama Hiroyuki Morikawa Hiroyuki Morikawa
(1 GHz-6.4 GHz) (6.4 GHz-18 GHz) (18 GHz-40 GHz) (1 GHz-6.4 GHz)
(3AC) (3AC) (3AC) (1AC)
Mode Tx 11n-20 5745 MHz

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7660.4	PK	49.5	37.2	7.2	41.5	3.5	55.9	73.9	18.0	147.0	143.0	
Hori.	11490.0	PK	47.1	40.0	8.6	40.3	3.5	58.9	73.9	15.0	100.0	0.0	
Hori.	17235.0	PK	44.8	42.0	10.9	34.2	-9.5	54.0	73.9	19.9	100.0	0.0	
Hori.	7660.4	AV	39.0	37.2	7.2	41.5	3.5	45.4	53.9	8.5	147.0	143.0	VBW:10Hz
Hori.	11490.0	AV	35.4	40.0	8.6	40.3	3.5	47.2	53.9	6.7	100.0	0.0	VBW:10Hz
Hori.	17235.0	AV	34.2	42.0	10.9	34.2	-9.5	43.4	53.9	10.5	100.0	0.0	VBW:10Hz
Vert.	7660.4	PK	47.3	37.2	7.2	41.5	3.5	53.7	73.9	20.2	120.0	143.0	
Vert.	11490.0	PK	45.8	40.0	8.6	40.3	3.5	57.6	73.9	16.3	100.0	0.0	
Vert.	17235.0	PK	45.2	42.0	10.9	34.2	-9.5	54.4	73.9	19.5	100.0	0.0	
Vert.	7660.4	AV	38.0	37.2	7.2	41.5	3.5	44.4	53.9	9.5	120.0	143.0	VBW:10Hz
Vert.	11490.0	AV	35.6	40.0	8.6	40.3	3.5	47.4	53.9	6.5	100.0	0.0	VBW:10Hz
Vert.	17235.0	AV	34.7	42.0	10.9	34.2	-9.5	43.9	53.9	10.0	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

(Calculation) (above 1GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.0	PK	48.6	32.4	16.0	40.7	2.5	58.8	-36.4	-27.0	9.4			
Hori.	5700.0	PK	48.7	32.5	16.0	40.6	2.5	59.1	-36.1	10.0	46.1			
Hori.	5720.0	PK	56.7	32.6	16.0	40.6	2.5	67.2	-28.0	15.6	43.6			
Hori.	5725.0	PK	62.2	32.6	16.0	40.6	2.5	72.7	-22.5	27.0	49.5			
Vert.	5650.0	PK	49.7	32.4	16.0	40.7	2.5	59.9	-35.3	-27.0	8.3			
Vert.	5700.0	PK	48.8	32.5	16.0	40.6	2.5	59.2	-36.0	10.0	46.0			
Vert.	5720.0	PK	54.8	32.6	16.0	40.6	2.5	65.3	-29.9	15.6	45.5			
Vert.	5725.0	PK	60.7	32.6	16.0	40.6	2.5	71.2	-24.0	27.0	51.0			

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10*LOG (({ 10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance:3[m]) ^ 2 } / 30) *10^3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24deg. C / 52 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-20 5745 MHz

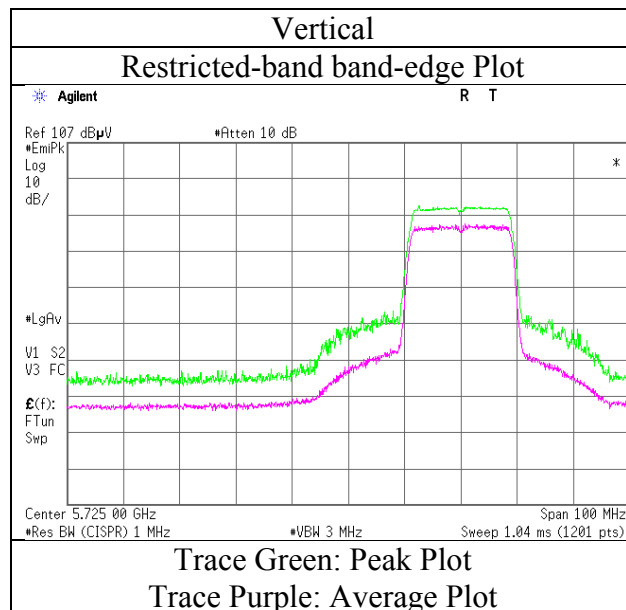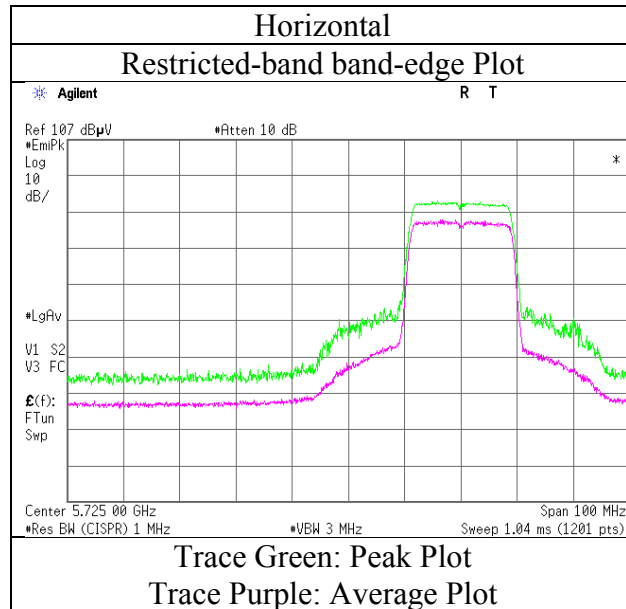

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber		
Report No.	11294468S-R2		
Date	May 27, 2016	May 28, 2016	May 31, 2016
Temperature / Humidity	24deg. C / 52 % RH	24deg. C / 52 % RH	25deg. C / 51 % RH
Engineer	Hikaru Shirasawa (1 GHz-6.4 GHz)	Kazutaka Takeyama (6.4 GHz-18 GHz)	Hiroyuki Morikawa (18 GHz-40 GHz)
Mode	Tx 11n-20 5785 MHz		

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7713.7	PK	48.9	37.3	7.1	41.5	3.5	55.3	73.9	18.6	120.0	114.0	
Hori.	11570.0	PK	47.0	39.9	8.6	40.3	3.5	58.7	73.9	15.2	100.0	0.0	
Hori.	17355.0	PK	44.7	42.4	10.9	34.3	-9.5	54.2	73.9	19.7	100.0	0.0	
Hori.	7713.7	AV	37.7	37.3	7.1	41.5	3.5	44.1	53.9	9.8	120.0	114.0	VBW:10Hz
Hori.	11570.0	AV	35.9	39.9	8.6	40.3	3.5	47.6	53.9	6.3	100.0	0.0	VBW:10Hz
Hori.	17355.0	AV	34.4	42.4	10.9	34.3	-9.5	43.9	53.9	10.0	100.0	0.0	VBW:10Hz
Vert.	7713.7	PK	47.2	37.3	7.1	41.5	3.5	53.6	73.9	20.3	100.0	155.0	
Vert.	11570.0	PK	45.5	39.9	8.6	40.3	3.5	57.2	73.9	16.7	100.0	0.0	
Vert.	17355.0	PK	44.9	42.4	10.9	34.3	-9.5	54.4	73.9	19.5	100.0	0.0	
Vert.	7713.7	AV	38.0	37.3	7.1	41.5	3.5	44.4	53.9	9.5	100.0	155.0	VBW:10Hz
Vert.	11570.0	AV	35.2	39.9	8.6	40.3	3.5	46.9	53.9	7.0	100.0	0.0	VBW:10Hz
Vert.	17355.0	AV	34.3	42.4	10.9	34.3	-9.5	43.8	53.9	10.1	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.5\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber
Report No. 11294468S-R2
Date May 27, 2016 May 28, 2016 May 31, 2016 June 3, 2016
Temperature / Humidity 24deg. C / 52 % RH 24deg. C / 52 % RH 25deg. C / 51 % RH 24deg. C / 41 % RH
Engineer Hikaru Shirasawa Kazutaka Takeyama Hiroyuki Morikawa Hiroyuki Morikawa
(1 GHz-6.4 GHz) (6.4 GHz-18 GHz) (18 GHz-40 GHz) (30 MHz-1 GHz)
(3AC) (3AC) (3AC) (3AC)

June 23, 2016
20deg. C / 55 % RH
Hiroyuki Morikawa
(1 GHz-6.4 GHz)
(1AC)
Mode Tx 11n-20 5805 MHz

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	48.0	QP	39.3	10.9	6.9	32.2	0.0	24.9	40.0	15.1	400.0	243.0	
Hori.	144.0	QP	45.5	14.3	7.8	32.1	0.0	35.5	43.5	8.0	230.0	236.0	
Hori.	240.0	QP	45.9	16.9	8.4	32.0	0.0	39.2	46.0	6.8	136.0	266.0	
Hori.	336.0	QP	47.2	14.7	8.9	31.9	0.0	38.9	46.0	7.1	100.0	258.0	
Hori.	624.0	QP	37.3	19.3	10.1	31.9	0.0	34.8	46.0	11.2	100.0	20.0	
Hori.	7740.3	PK	47.6	37.4	7.1	41.5	3.5	54.1	73.9	19.8	190.0	156.0	
Hori.	11610.0	PK	45.5	39.9	8.7	40.2	3.5	57.4	73.9	16.5	100.0	0.0	
Hori.	17415.0	PK	45.0	42.6	10.9	34.3	-9.5	54.7	73.9	19.2	100.0	0.0	
Hori.	7740.3	AV	38.0	37.4	7.1	41.5	3.5	44.5	53.9	9.4	190.0	156.0	VBW:10Hz
Hori.	11610.0	AV	36.0	39.9	8.7	40.2	3.5	47.9	53.9	6.0	100.0	0.0	VBW:10Hz
Hori.	17415.0	AV	34.1	42.6	10.9	34.3	-9.5	43.8	53.9	10.1	100.0	0.0	VBW:10Hz
Vert.	48.0	QP	50.8	10.9	6.9	32.2	0.0	36.4	40.0	3.6	100.0	165.0	
Vert.	144.0	QP	49.3	14.3	7.8	32.1	0.0	39.3	43.5	4.2	100.0	187.0	
Vert.	240.0	QP	43.5	16.9	8.4	32.0	0.0	36.8	46.0	9.2	100.0	305.0	
Vert.	576.0	QP	46.5	18.6	9.9	31.9	0.0	43.1	46.0	2.9	106.0	259.0	
Vert.	624.0	QP	46.2	19.3	10.1	31.9	0.0	43.7	46.0	2.3	100.0	124.0	
Vert.	7740.3	PK	47.2	37.4	7.1	41.5	3.5	53.7	73.9	20.2	127.0	231.0	
Vert.	11610.0	PK	46.0	39.9	8.7	40.2	3.5	57.9	73.9	16.0	100.0	0.0	
Vert.	17415.0	PK	45.2	42.6	10.9	34.3	-9.5	54.9	73.9	19.0	100.0	0.0	
Vert.	7740.3	AV	37.1	37.4	7.1	41.5	3.5	43.6	53.9	10.3	127.0	231.0	VBW:10Hz
Vert.	11610.0	AV	35.4	39.9	8.7	40.2	3.5	47.3	53.9	6.6	100.0	0.0	VBW:10Hz
Vert.	17415.0	AV	34.4	42.6	10.9	34.3	-9.5	44.1	53.9	9.8	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

(Calculation) (above 1GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.0	PK	46.5	32.8	16.1	40.6	2.5	57.3	-37.9	27.0	64.9			
Hori.	5855.0	PK	46.4	32.8	16.1	40.6	2.5	57.2	-38.0	15.6	53.6			
Hori.	5875.0	PK	46.7	32.9	16.1	40.6	2.5	57.6	-37.6	10.0	47.6			
Hori.	5925.0	PK	46.8	33.0	16.2	40.6	2.5	57.9	-37.3	-27.0	10.3			
Vert.	5850.0	PK	46.0	32.8	16.1	40.6	2.5	56.8	-38.4	27.0	65.4			
Vert.	5855.0	PK	46.2	32.8	16.1	40.6	2.5	57.0	-38.2	15.6	53.8			
Vert.	5875.0	PK	46.2	32.9	16.1	40.6	2.5	57.1	-38.1	10.0	48.1			
Vert.	5925.0	PK	46.8	33.0	16.2	40.6	2.5	57.9	-37.3	-27.0	10.3			

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10*LOG (({ 10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance:3[m]) ^ 2 } / 30) * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No. 11294468S-R2
Date May 27, 2016
Temperature / Humidity 24deg. C / 52 % RH
Engineer Hikaru Shirasawa
Mode Tx 11n-20 5805 MHz

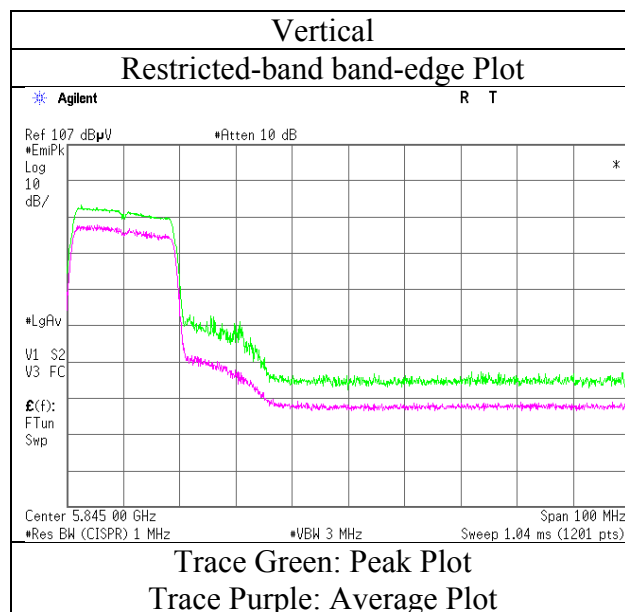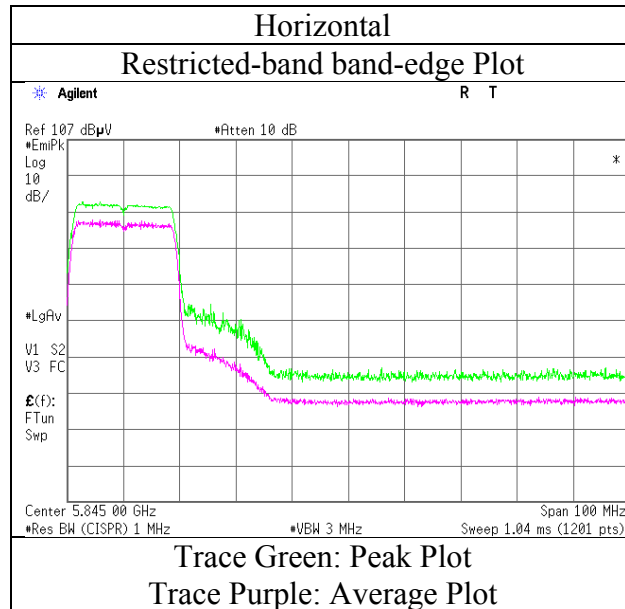

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber
Report No. 11294468S-R2
Date May 27, 2016 May 28, 2016 May 31, 2016 June 23, 2016
Temperature / Humidity 24deg. C / 52 % RH 24deg. C / 52 % RH 25deg. C / 51 % RH 20deg. C / 55 % RH
Engineer Hikaru Shirasawa Kazutaka Takeyama Hiroyuki Morikawa Hiroyuki Morikawa
(1 GHz-6.4 GHz) (6.4 GHz-18 GHz) (18 GHz-40 GHz) (1 GHz-6.4 GHz)
(3AC) (3AC) (3AC) (1AC)
Mode Tx 11n-40 5755 MHz

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7673.7	PK	49.7	37.3	7.2	41.5	3.5	56.2	73.9	17.7	195.0	157.0	
Hori.	11510.0	PK	47.8	40.0	8.6	40.3	3.5	59.6	73.9	14.3	100.0	0.0	
Hori.	17265.8	PK	45.3	42.1	10.9	34.2	-9.5	54.6	73.9	19.3	100.0	0.0	
Hori.	7673.7	AV	38.3	37.3	7.2	41.5	3.5	44.8	53.9	9.1	195.0	157.0	VBW:10Hz
Hori.	11510.0	AV	35.9	40.0	8.6	40.3	3.5	47.7	53.9	6.2	100.0	0.0	VBW:10Hz
Hori.	17265.8	AV	34.5	42.1	10.9	34.2	-9.5	43.8	53.9	10.1	100.0	0.0	VBW:10Hz
Vert.	7673.7	PK	48.0	37.3	7.2	41.5	3.5	54.5	73.9	19.4	100.0	137.0	
Vert.	11510.0	PK	45.6	40.0	8.6	40.3	3.5	57.4	73.9	16.5	100.0	0.0	
Vert.	17265.8	PK	44.8	42.1	10.9	34.2	-9.5	54.1	73.9	19.8	100.0	0.0	
Vert.	7673.7	AV	38.1	37.3	7.2	41.5	3.5	44.6	53.9	9.3	100.0	137.0	VBW:10Hz
Vert.	11510.0	AV	35.7	40.0	8.6	40.3	3.5	47.5	53.9	6.4	100.0	0.0	VBW:10Hz
Vert.	17265.8	AV	34.3	42.1	10.9	34.2	-9.5	43.6	53.9	10.3	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

(Calculation) (above 1GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.0	PK	47.7	32.4	16.0	40.7	2.5	57.9	-37.3	-27.0	10.3			
Hori.	5700.0	PK	50.5	32.5	16.0	40.6	2.5	60.9	-34.3	10.0	44.3			
Hori.	5720.0	PK	60.8	32.6	16.0	40.6	2.5	71.3	-23.9	15.6	39.5			
Hori.	5725.0	PK	60.7	32.6	16.0	40.6	2.5	71.2	-24.0	27.0	51.0			
Vert.	5650.0	PK	47.2	32.4	16.0	40.7	2.5	57.4	-37.8	-27.0	10.8			
Vert.	5700.0	PK	49.2	32.5	16.0	40.6	2.5	59.6	-35.6	10.0	45.6			
Vert.	5720.0	PK	59.8	32.6	16.0	40.6	2.5	70.3	-24.9	15.6	40.5			
Vert.	5725.0	PK	59.6	32.6	16.0	40.6	2.5	70.1	-25.1	27.0	52.1			

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10*LOG (({ 10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance:3[m]) ^ 2 } / 30) *10^3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24deg. C / 52 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-40 5755 MHz

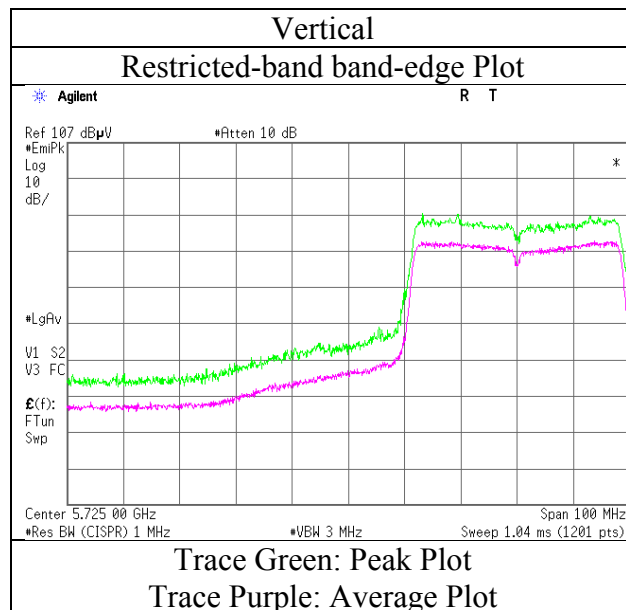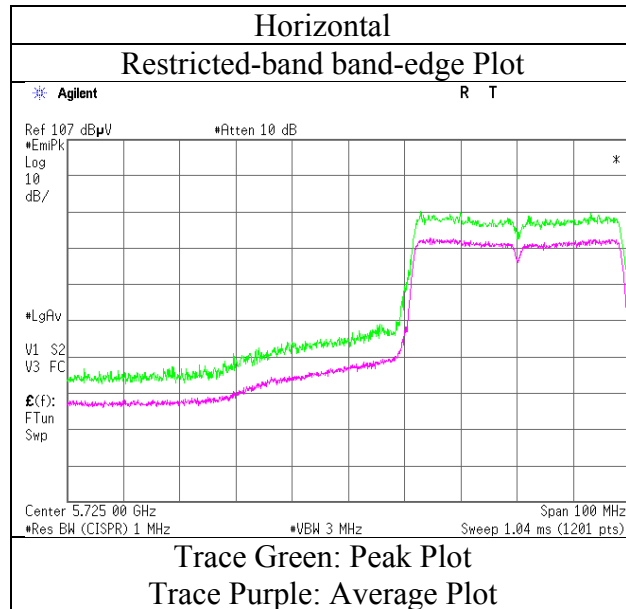

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber
Report No. 11294468S-R2
Date May 27, 2016 May 28, 2016 May 31, 2016 June 23, 2016
Temperature / Humidity 24deg. C / 52 % RH 24deg. C / 52 % RH 25deg. C / 51 % RH 20deg. C / 55 % RH
Engineer Hikaru Shirasawa Kazutaka Takeyama Hiroyuki Morikawa Hiroyuki Morikawa
(1 GHz-6.4 GHz) (6.4 GHz-18 GHz) (18 GHz-40 GHz) (1 GHz-6.4 GHz)
(3AC) (3AC) (3AC) (1AC)
Mode Tx 11n-40 5795 MHz

(below 1GHz and above 1GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7727.1	PK	49.7	37.3	7.1	41.5	3.5	56.1	73.9	17.8	155.0	213.0	
Hori.	11590.0	PK	48.3	39.9	8.6	40.3	3.5	60.0	73.9	13.9	100.0	0.0	
Hori.	17385.0	PK	45.3	42.5	10.9	34.3	-9.5	54.9	73.9	19.0	100.0	0.0	
Hori.	7727.1	AV	38.7	37.3	7.1	41.5	3.5	45.1	53.9	8.8	155.0	213.0	VBW:10Hz
Hori.	11590.0	AV	36.0	39.9	8.6	40.3	3.5	47.7	53.9	6.2	100.0	0.0	VBW:10Hz
Hori.	17385.0	AV	34.1	42.5	10.9	34.3	-9.5	43.7	53.9	10.2	100.0	0.0	VBW:10Hz
Vert.	7727.1	PK	48.3	37.3	7.1	41.5	3.5	54.7	73.9	19.2	100.0	165.0	
Vert.	11590.0	PK	46.7	39.9	8.6	40.3	3.5	58.4	73.9	15.5	100.0	0.0	
Vert.	17385.0	PK	44.5	42.5	10.9	34.3	-9.5	54.1	73.9	19.8	100.0	0.0	
Vert.	7727.1	AV	37.1	37.3	7.1	41.5	3.5	43.5	53.9	10.4	100.0	165.0	VBW:10Hz
Vert.	11590.0	AV	35.4	39.9	8.6	40.3	3.5	47.1	53.9	6.8	100.0	0.0	VBW:10Hz
Vert.	17385.0	AV	34.2	42.5	10.9	34.3	-9.5	43.8	53.9	10.1	100.0	0.0	VBW:10Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

(Calculation) (above 1GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.0	PK	47.0	32.8	16.1	40.6	2.5	57.8	-37.4	27.0	64.4			
Hori.	5855.0	PK	47.2	32.8	16.1	40.6	2.5	58.0	-37.2	15.6	52.8			
Hori.	5875.0	PK	47.2	32.9	16.1	40.6	2.5	58.1	-37.1	10.0	47.1			
Hori.	5925.0	PK	45.7	33.0	16.2	40.6	2.5	56.8	-38.4	-27.0	11.4			
Vert.	5850.0	PK	46.9	32.8	16.1	40.6	2.5	57.7	-37.5	27.0	64.5			
Vert.	5855.0	PK	46.5	32.8	16.1	40.6	2.5	57.3	-37.9	15.6	53.5			
Vert.	5875.0	PK	46.3	32.9	16.1	40.6	2.5	57.2	-38.0	10.0	48.0			
Vert.	5925.0	PK	46.2	33.0	16.2	40.6	2.5	57.3	-37.9	-27.0	10.9			

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10*LOG (({ 10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance:3[m] } ^ 2) / 30) *10^3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (4.5 m / 3.0 m) = 3.5 dB (3AC), 20log (4.0 m / 3.0 m) = 2.5 dB (1AC)

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission


Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24deg. C / 52 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-40 5795 MHz

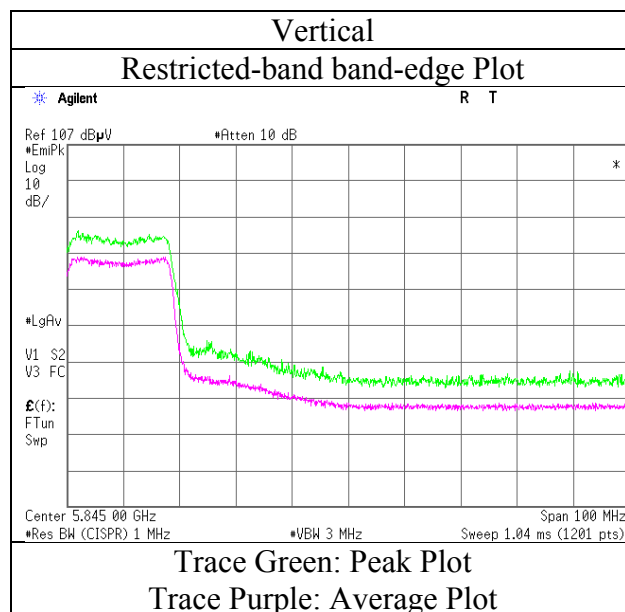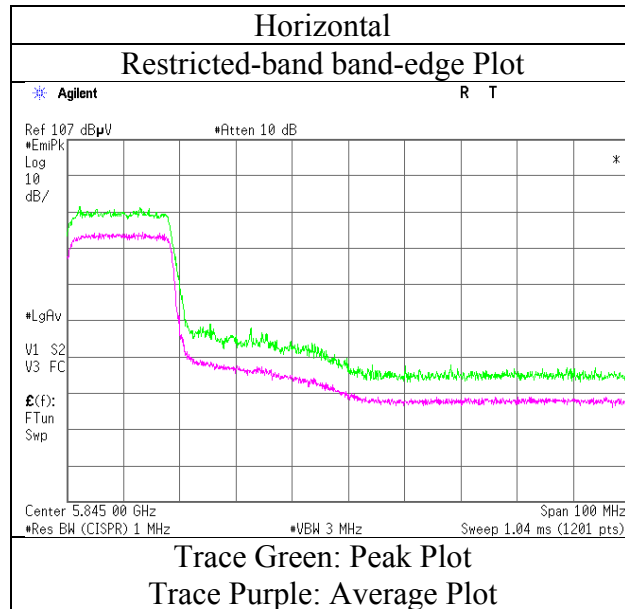

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case)


Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber				
Report No.	11294468S-R2				
Date	May 27, 2016	May 28, 2016	May 31, 2016	June 3, 2016	
Temperature / Humidity	24deg. C / 52 % RH	24deg. C / 52 % RH	25deg. C / 51 % RH	24deg. C / 41 % RH	
Engineer	Hikaru Shirasawa (1 GHz-6.4 GHz) (3AC)	Kazutaka Takeyama (6.4 GHz-18 GHz) (3AC)	Hiroyuki Morikawa (18 GHz-40 GHz) (3AC)	Hiroyuki Morikawa (30 MHz-1 GHz) (3AC)	
	June 23, 2016 20deg. C / 55 % RH Hiroyuki Morikawa (1 GHz-6.4 GHz) (1AC)				
Mode	Tx 11n-20 5805 MHz				

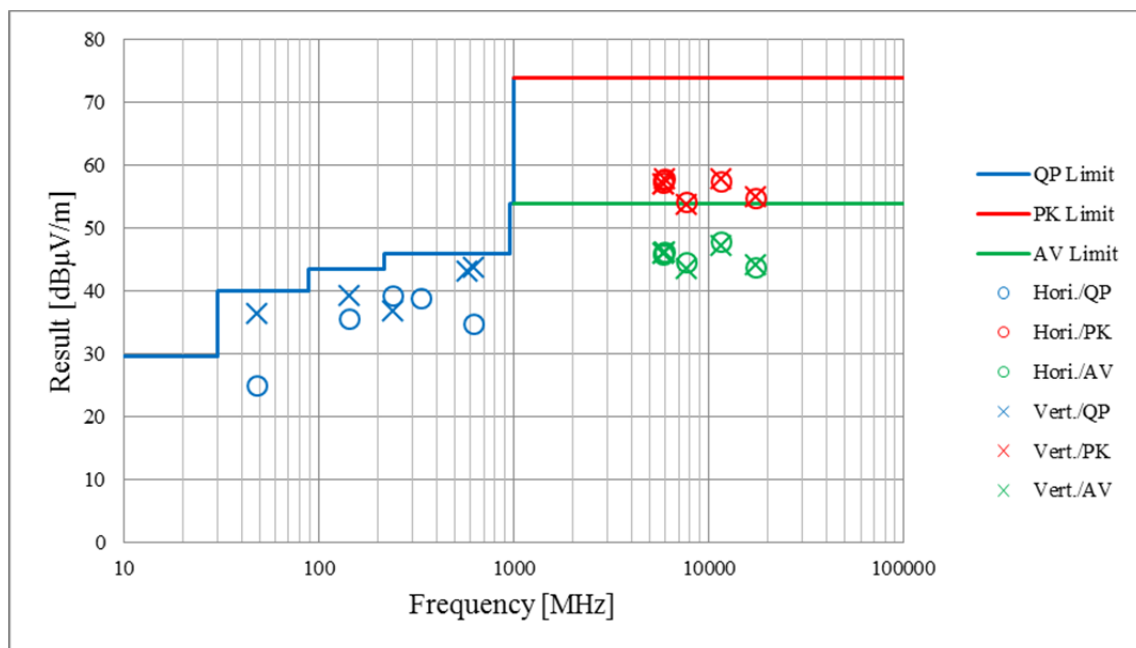

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Shielded Room
Report No.	11294468S-R2
Date	May 27, 2016
Temperature / Humidity	24 deg. C / 54 % RH
Engineer	Wataru Kojima
Mode	Tx 11n-20 5805 MHz

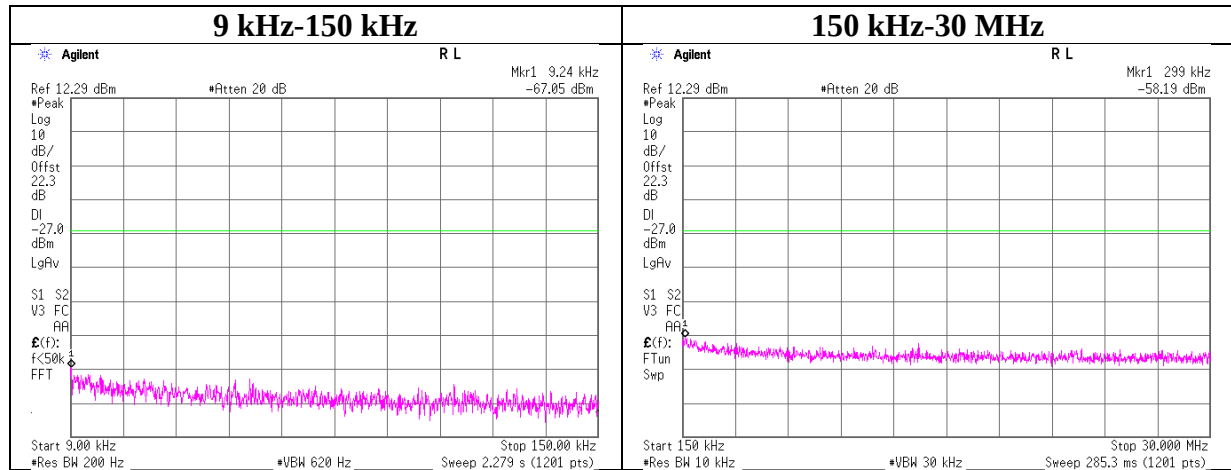

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 2: Test instruments

Test equipment Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SSA-03	Spectrum Analyzer	Agilent	E4448A	MY48250152	AT, RE	2015/09/16 * 12
SAT20-06	Attenuator	Weinschel Corp.	54A-20	31506	AT	2016/04/18 * 12
SCC-G14	Coaxial Cable	Suhner	SUCOFLEX 102	31600/2	AT	2016/03/23 * 12
SPM-07	Power Meter	Agilent	8990B	MY5100272	AT	2016/04/04 * 12
SPSS-04	Power sensor	Agilent	N1923A	MY5326009	AT	2016/04/04 * 12
KTS-07	Digital Tester	SANWA	PC500	7019232	AT	2015/11/18 * 12
SOS-09	Humidity Indicator	A&D	AD-5681	4061484	AT	2015/12/07 * 12
MOTS-MATM	Antenna Terminal Measurement Software	UL Japan	-	-	AT	-
KAF-02	Pre Amplifier	Hewlett Packard	8449B	3008A01268	RE	2016/04/22 * 12
SCC-G04	Coaxial Cable	Junkosha	J12J102207-00	JUN-12-14-018	RE	2015/06/08 * 12
SCC-G23	Coaxial Cable	Suhner	SUCOFLEX 104	297342/4	RE	2016/05/11 * 12
SHA-03	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-739	RE	2015/08/11 * 12
SOS-05	Humidity Indicator	A&D	AD-5681	4062518	RE	2015/10/22 * 12
KSA-08	Spectrum Analyzer	Agilent	E4446A	MY46180525	RE	2016/03/28 * 12
SJM-15	Measure	ASKUL	-	-	RE	-
SAEC-03(SVS WR)	Semi-Anechoic Chamber	TDK	SAEC-03(SVS WR)	3	RE	2015/08/28 * 12
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE,RFI,MF)	-	RE, CE	-
STS-03	Digital Hitester	Hioki	3805-50	080997823	RE, CE	2015/11/18 * 12
SAT10-05	Attenuator(above1GHz)	Agilent	8493C-010	74864	RE	2015/11/04 * 12
SFL-03	Highpass Filter	MICRO-TRONICS	HPM50112	028	RE	2015/11/16 * 12
SAF-06	Pre Amplifier	TOYO Corporation	TPA0118-36	1440491	RE	2015/05/27 * 12
SSA-01	Spectrum Analyzer	Agilent	N9010A-526	MY48031482	RE	2016/04/28 * 12
SHA-04	Horn Antenna	ETS LINDGREN	3160-09	LM3640	RE	2016/03/15 * 12
SAF-08	Pre Amplifier	TOYO Corporation	HAP18-26W	00000019	RE	2016/03/23 * 12
SCC-G15	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	RE	2016/03/08 * 12
SCC-G19	Coaxial Cable	Suhner	SUCOFLEX 102A	1188/2A	RE	2016/03/08 * 12
SHA-06	Horn Antenna	ETS LINDGREN	3160-10	LM3459	RE	2016/03/24 * 12
SAF-10	Pre Amplifier	TOYO Corporation	HAP26-40W	00000010	RE	2016/03/23 * 12
SAEC-03(NSA)	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	RE	2015/07/16 * 12
SBA-03	Biconical Antenna	Schwarzbeck	BBA9106	91032666	RE	2015/10/11 * 12
SLA-03	Logperiodic Antenna	Schwarzbeck	UHALP9108A	UHALP 9108-A 0901	RE	2015/10/11 * 12
SAT6-08	Attenuator	HIROSE ELECTRIC CO.,LTD.	AT-406(40)	-	RE	2015/08/31 * 12
SCC-C1/C2/C3/C4/C5/C10/SRS E-03	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-271(RF Selector)	RE	2016/04/22 * 12
SAF-03	Pre Amplifier	SONOMA	310N	290213	RE	2016/02/25 * 12
STR-06	Test Receiver	Rohde & Schwarz	ESCI	101259	RE, CE	2016/03/28 * 12

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SJM-02	Measure	KOMELON	KMC-36	-	RE, CE	-
SCC-C9/C10/S RSE-03	Coaxial Cable&RF Selector	Suhner/Suhner/TOYO	RG223U/141P E/NS4906	-/0901-271(RF Selector)	CE	2016/04/22 * 12
SLS-05	LISN	Rohde & Schwarz	ENV216	100516	CE	2016/02/09 * 12
SAT3-07	Attenuator	JFW	50HF-003N	-	CE	2015/09/18 * 12
SOS-06	Humidity Indicator	A&D	AD-5681	4062118	CE	2015/12/07 * 12
SAF-04	Pre Amplifier	TOYO Corporation	TPA0118-36	1440489	RE	2016/03/22 * 12
SCC-G06	Coaxial Cable	Junkosha	J12J102207-00	MAY-23-16- 091	RE	2016/06/14 * 12
SCC-G21	Coaxial Cable	Suhner	SUCOFLEX 104	296169/4	RE	2016/05/11 * 12
SHA-01	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-725	RE	2015/08/10 * 12
SOS-01	Humidity Indicator	A&D	AD-5681	4062555	RE	2015/10/22 * 12
SJM-16	Measure	ASKUL	-	-	RE	-
SAEC-01(SVS WR)	Semi-Anechoic Chamber	TDK	SAEC-01(SVS WR)	1	RE	2015/07/08 * 12
STS-01	Digital Hitester	Hioki	3805-50	080997812	RE	2015/11/18 * 12
SSA-03	Spectrum Analyzer	Agilent	E4448A	MY4825015 2	RE	2015/09/16 * 12
SAT10-06	Attenuator	Agilent	8493C-010	74865	RE	2015/11/04 * 12
SAF-04	Pre Amplifier	TOYO Corporation	TPA0118-36	1440489	RE	2016/03/22 * 12
SCC-G06	Coaxial Cable	Junkosha	J12J102207-00	MAY-23-16- 091	RE	2016/06/14 * 12
SCC-G21	Coaxial Cable	Suhner	SUCOFLEX 104	296169/4	RE	2016/05/11 * 12
SHA-01	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-725	RE	2015/08/10 * 12
SOS-01	Humidity Indicator	A&D	AD-5681	4062555	RE	2015/10/22 * 12
SJM-16	Measure	ASKUL	-	-	RE	-

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: CE: Conducted Emission
RE: Radiated Emission
AT: Antenna Terminal Conducted test

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401