



RF TEST REPORT

Report No.: SET2018-09078

Product Name: Handheld Data Terminal

FCC ID: HLEEA602BTNFL

Model No. : EA600, EA602

Applicant: Unitech Electronics Co., Ltd.

Address: 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan.

Dates of Testing: 07/10/2018 — 08/02/2018

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 26 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Compliance Certification Service (Shenzhen) Inc. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Compliance Certification Service (Shenzhen) Inc. within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : Handheld Data Terminal

Brand Name : unitech

Trade Name : N.A

Applicant : Unitech Electronics Co., Ltd.

Applicant Address : 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist.,
New Taipei City, Taiwan.

Manufacturer : Unitech Electronics Co., Ltd.

Manufacturer Address : 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist.,
New Taipei City, Taiwan.

Test Standards : 47 CFR Part 15 Subpart E 15.407

Test Result : PASS

Tested by :

2018.08.02

Sunday.Hu, Test Engineer

Reviewed by :

2018.08.02

Zhu Qi, Senior Engineer

Approved by :

2018.08.02

Smart Li, Manager

TABLE OF CONTENTS

RF TEST REPORT	1
1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Test Standards and Results	5
1.3. Test Facility	5
2. U-NII DFS RULE REQUIREMENTS	6
2.1. Working modes and required test items	6
2.2. Test limits and radar signal parameters	7
3. TEST PROCEDURE.....	10
3.1. DFS Test Setup configuration	10
3.2. BVADT DFS Measurement system:	11
4. TEST RESULTS	21
5. LIST OF MEASURING EQUIPMENT	26

Change History		
Issue	Date	Reason for change
1.0	2018.08.02	First edition

1. General Information

1.1. EUT Description

EUT Type	Handheld Data Terminal
Hardware Version	SQ51CW_V1.1
Software Version	SQ51CW_P1_XX_D_0_180706_02
EUT supports Radios application	WLAN5.0GHz 802.11a/n (HT20/40)/ac(VHT20/40/80)
Operation	☐ Master device
	☐ Slaver device with radar detection function
	☒ Slaver device without radar detection function
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n : up to 135 Mbps 802.11ac: up to V9
Frequency Range	Band UNII-2A: 5250 ~ 5350MHz Band UNII-2C: 5470 ~ 5725MHz
Channel Bandwidth	802.11a: 20MHz 802.11n: 20MHz/40MHz 802.11ac: 20MHz/40MHz/80MHz
Channel Number	5250 MHz ~ 5350MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5470 MHz ~ 5725MHz: 11 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 5 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
Antenna Type	PFA Antenna

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E for the EUT FCC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E § 15.407	Radio Frequency Devices
2	KDB Publication 905462 D02v02	UNII DFS Compliance Procedures New Rules
3	KDB Publication 905462 D03v01	UNII Clients Without Radar Detection New Rules

Test detailed items/section required by FCC rules results are as below:

No.	FCC Rule	Description	Result
1	15.407	Channel Move Time	PASS
2	15.407	Channel Closing Transmission Time	PASS
3	15.407	Non- Occupancy Period	PASS

1.3. Test Facility

NVLAP Lab Code: 201008-0

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

FCC- Designation Number: CN5031

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2018.

ISED Registration: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019

2. U-NII DFS Rule Requirements

2.1. Working modes and required test items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements prior to use a channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	Not required	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Table 2: Applicability of DFS Requirements during normal operation

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

2.2. Test limits and radar signal parameters

DFS Detection thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Note 1 and 2)
≥ 200 millwatt	-64 dBm
< 200 millwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	100% of the UNII transmission power bandwidth. See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



Parameters of DFS test signals

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short pluse radar test waveforms

Radar Type	Pulse width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Long pulse radar test waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


Frequency hopping radar test waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

3. Test Procedure

3.1. DFS Test Setup configuration


Client without Radar Detection Mode

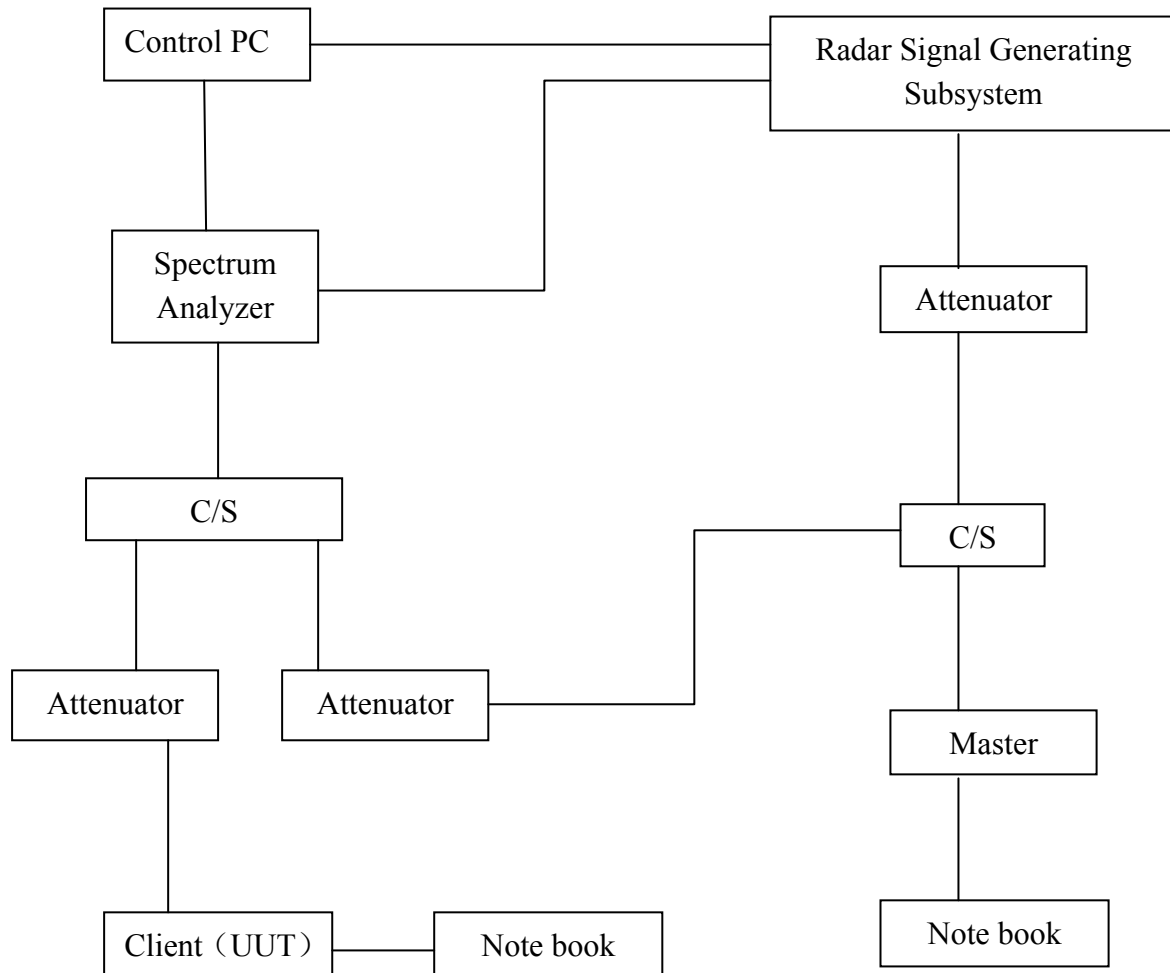

The UUT is a UNII device operating in client mode without radar detection. The radar test signals are injected into the master device.

3.2. BVADT DFS Measurement system:

A complete BVADT DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating Subsystem and (2) the Traffic Monitoring Subsystem. The control PC is necessary for generating the Radar waveforms in Table 1, 2. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

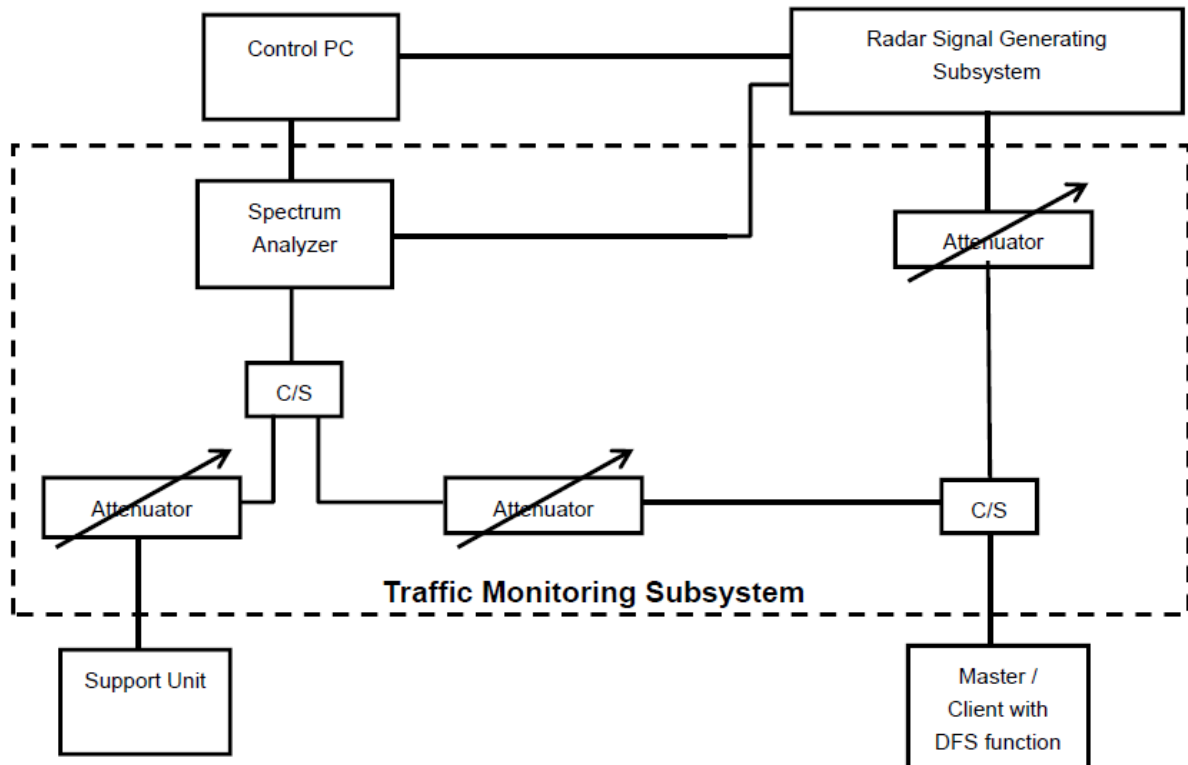


The test transmission will always be from the Master Device to the Client Device. While the Client device is set up to associate with the Master device and play the MPEG file (6 1/2 Magic Hours) from Master device, the designated MPEG test file and instructions are located at:

<http://ntiacsd.ntia.doc.gov/dfs/>.

Calibration of DFS detection threshold level:


The measured channel is 5290 MHz and 5530MHz in 80MHz Bandwidth. The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted setup configuration of calibration of DFS detection threshold level

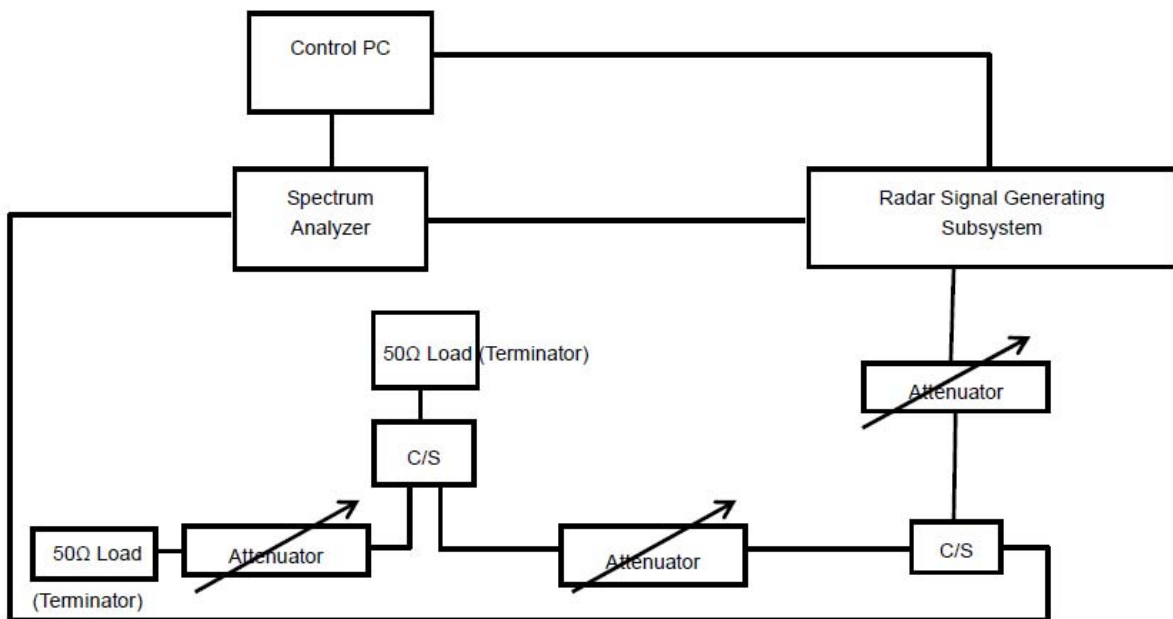


Calibration plots for each of the required radar waveforms

Radar type 0

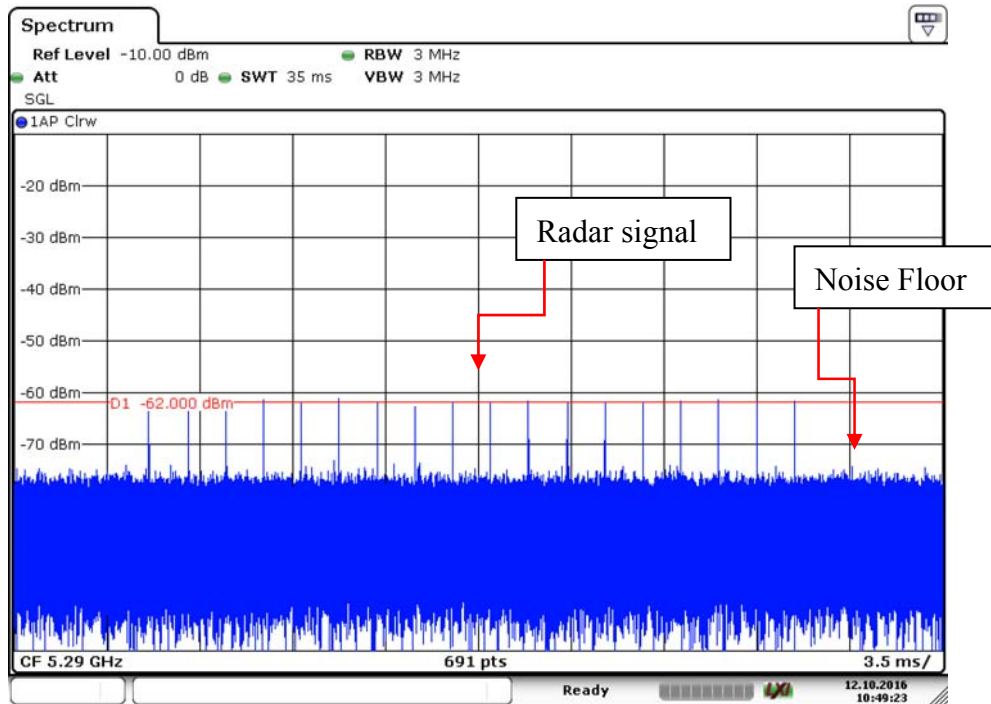


Radar Type 0 – 5290MHz

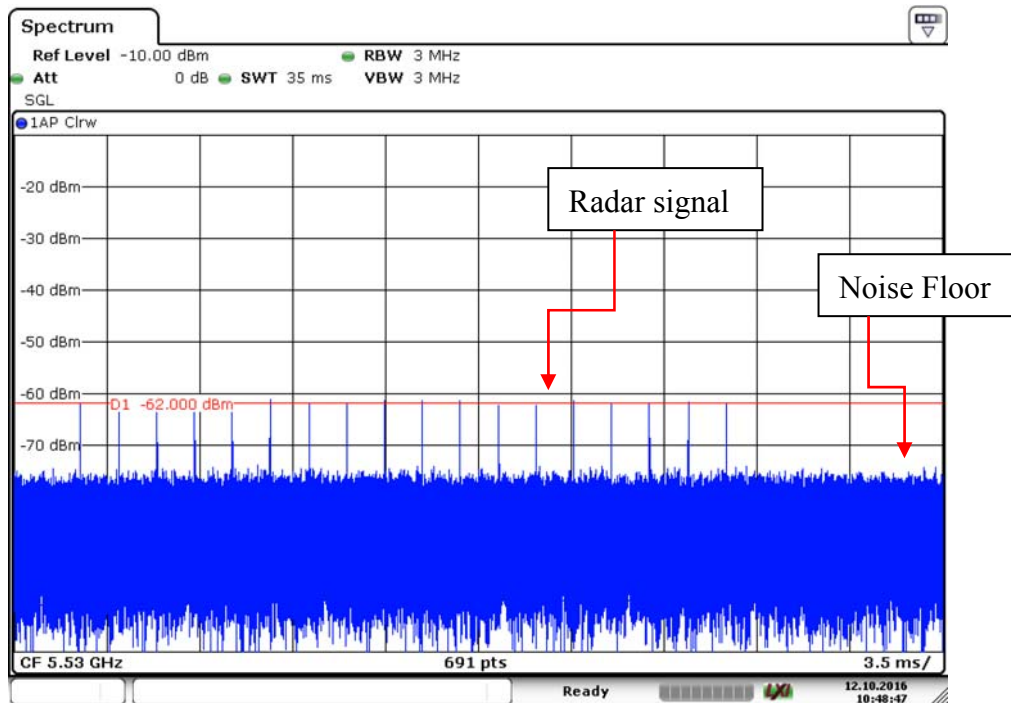


Radar Type 0 – 5530MHz

Radar type 1-A

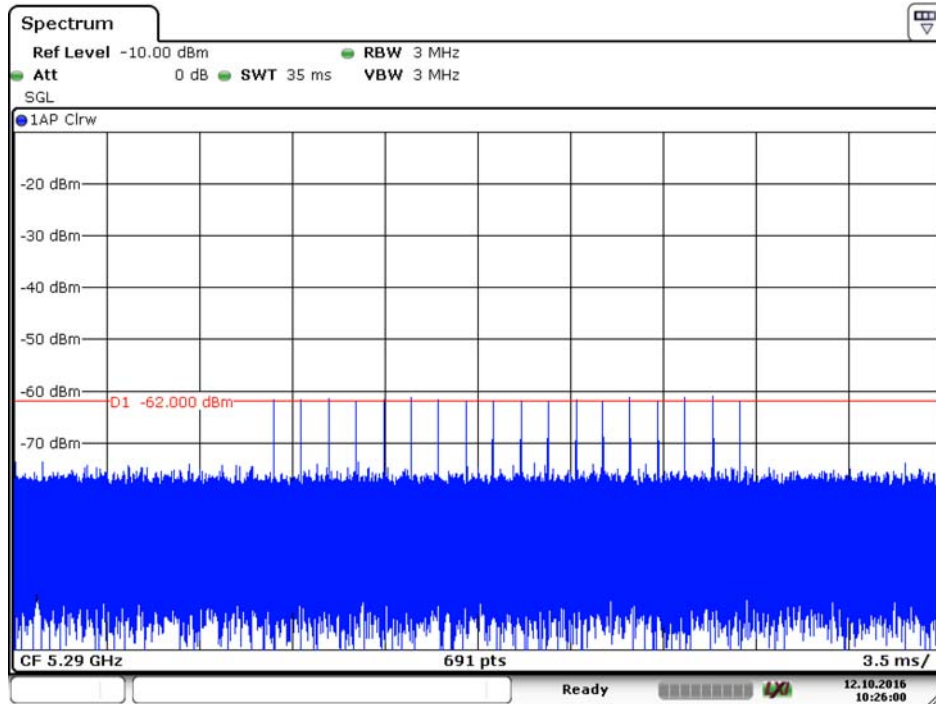


Radar Type 1A – 5290MHz

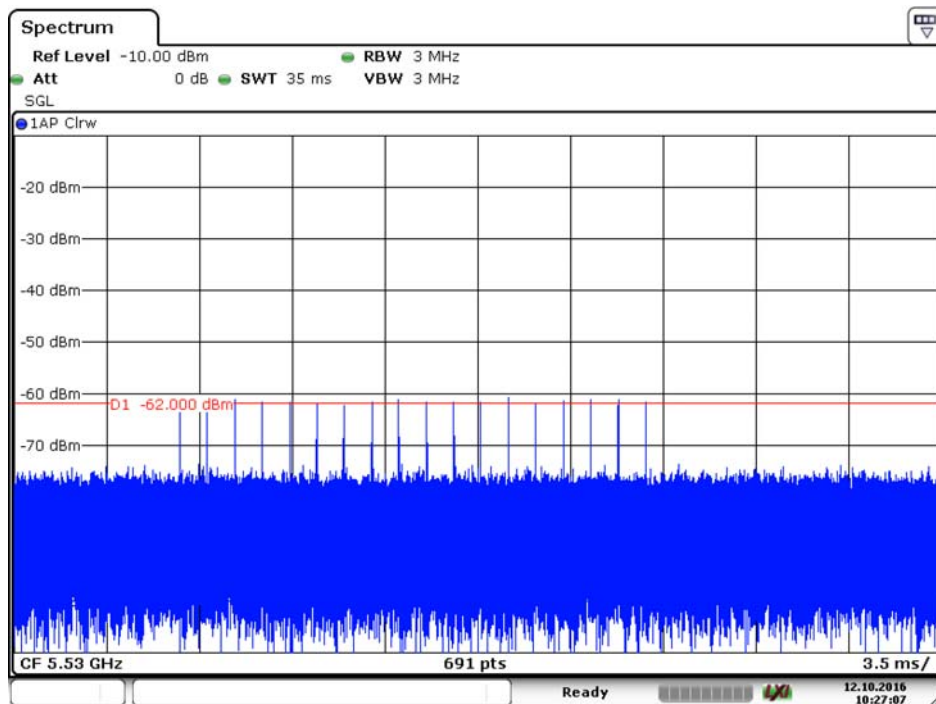


Radar Type 1A – 5530MHz

Radar type 1-B

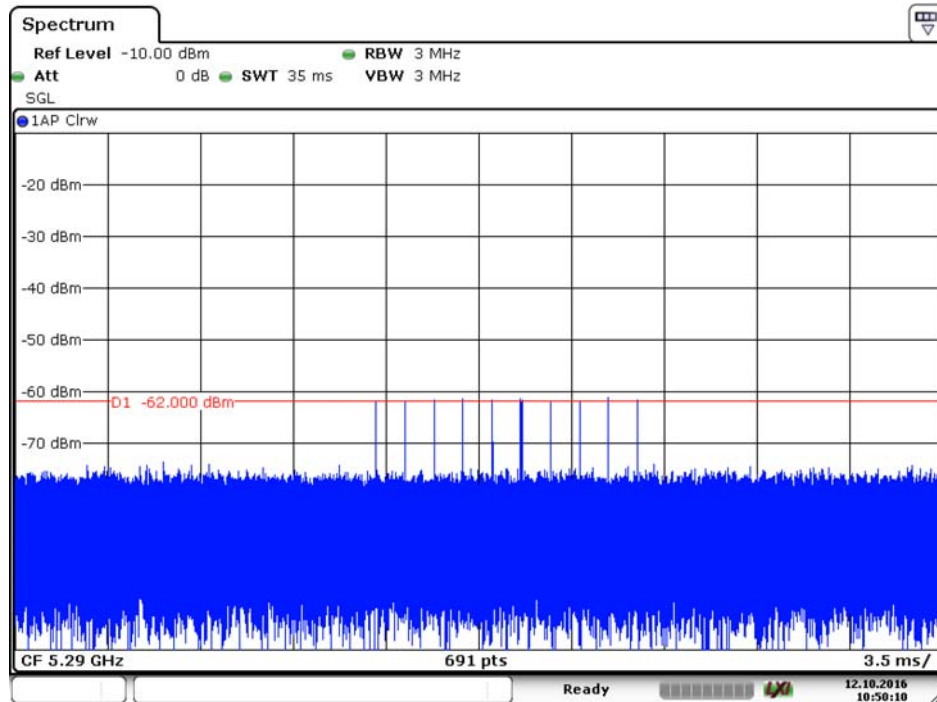


Radar Type 1B – 5290MHz

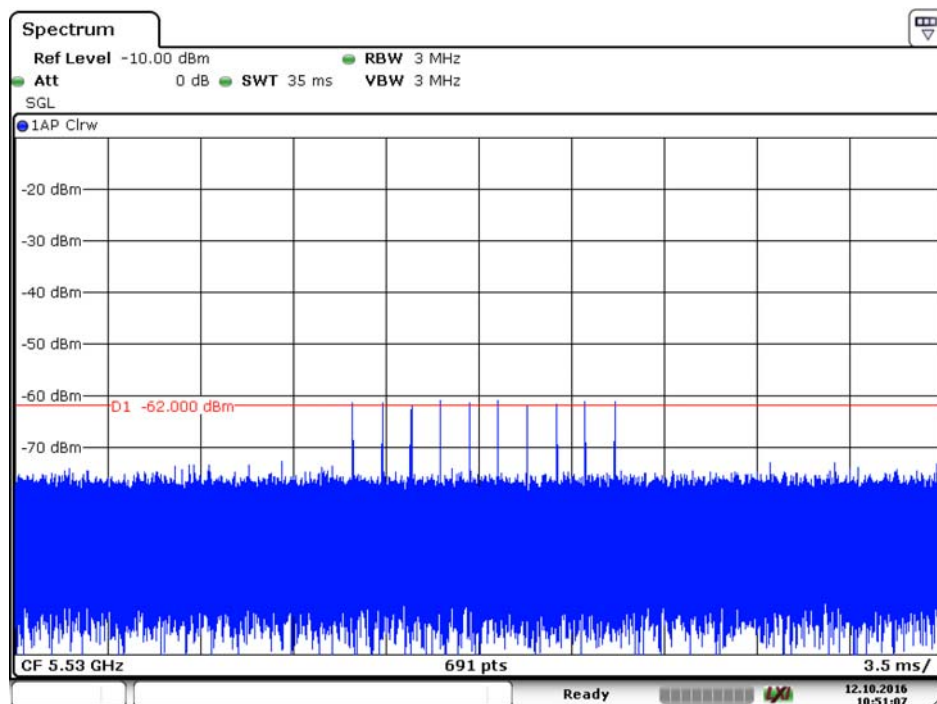


Radar Type 1B – 5530MHz

Radar type 2

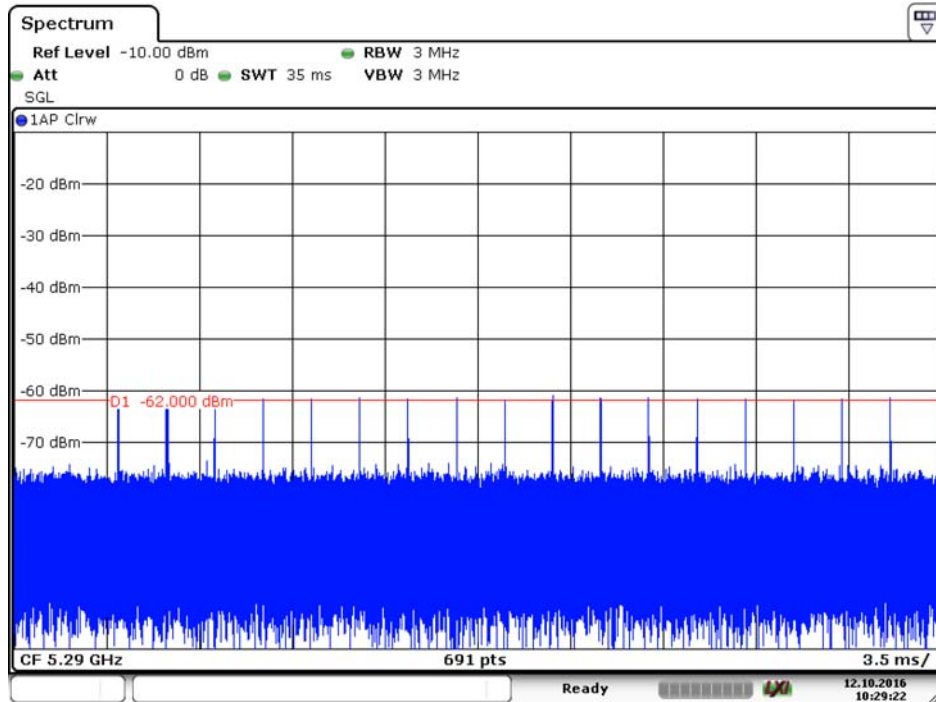


Radar Type 2 – 5290MHz

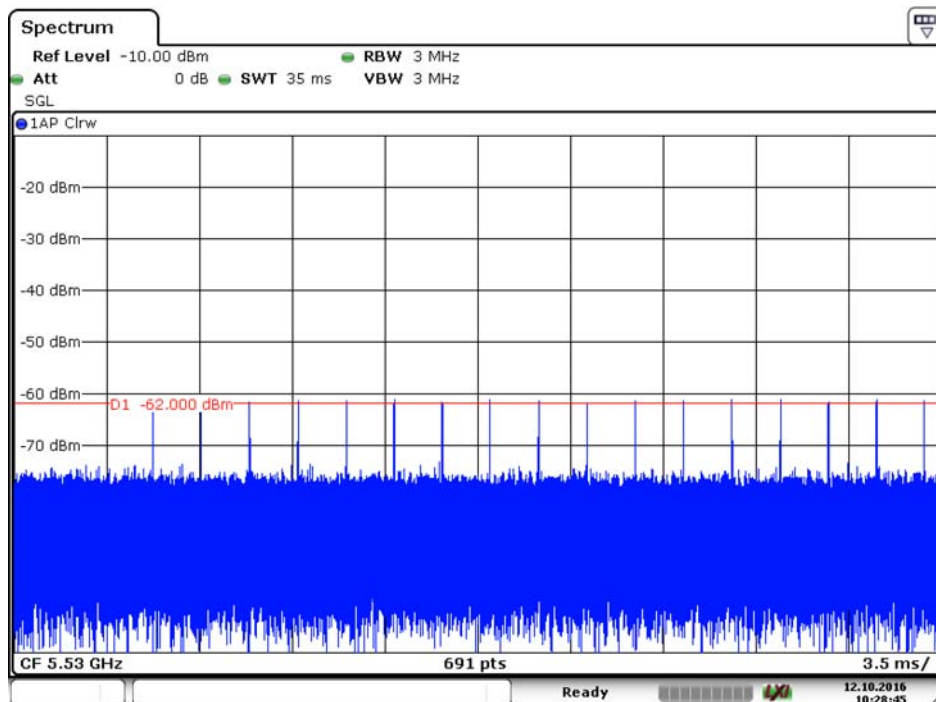


Radar Type 2 – 5530MHz

Radar type 3

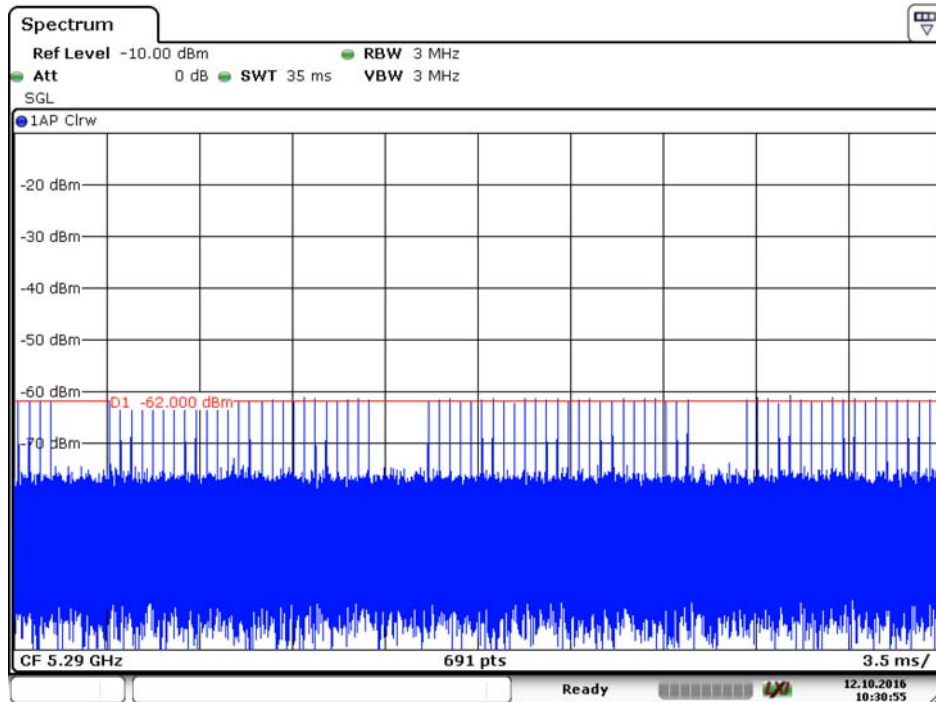


Radar Type 3 – 5290MHz

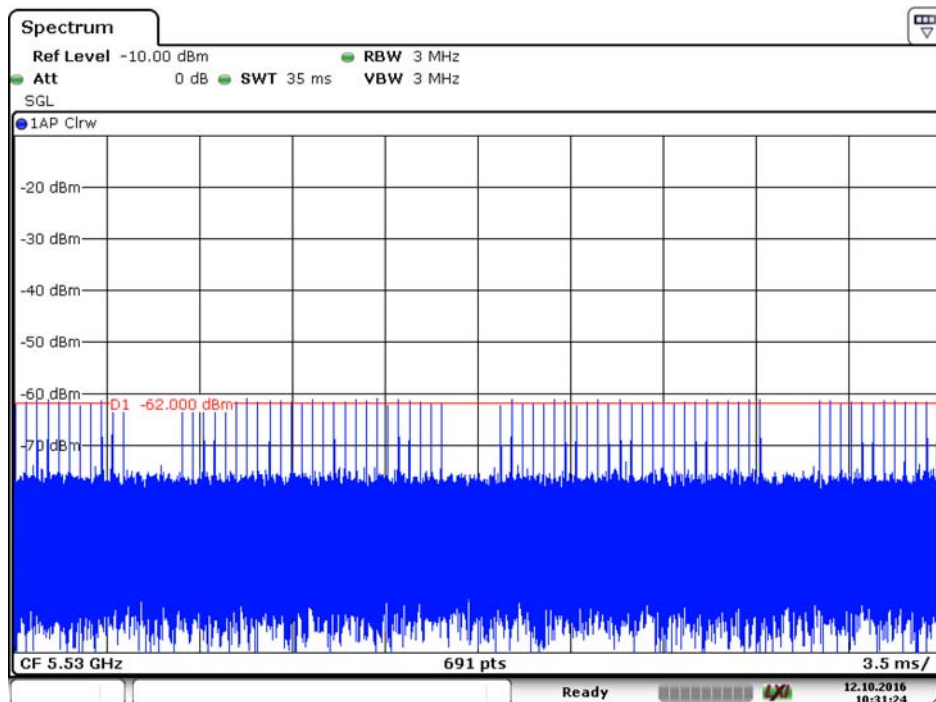


Radar Type 3 – 5530MHz

Radar type 4

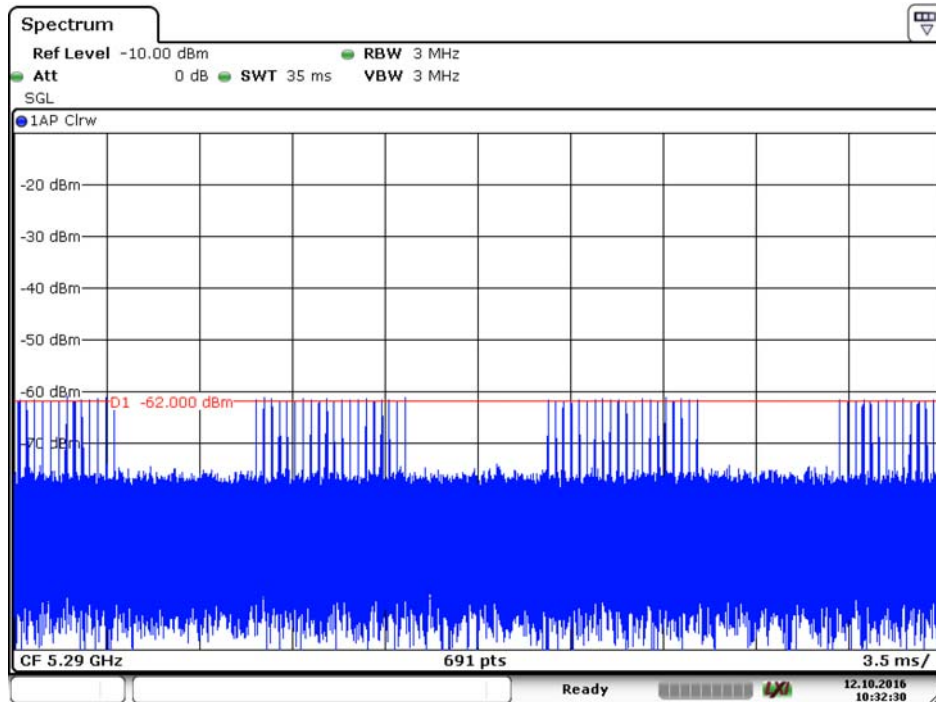


Radar Type 4 – 5290MHz

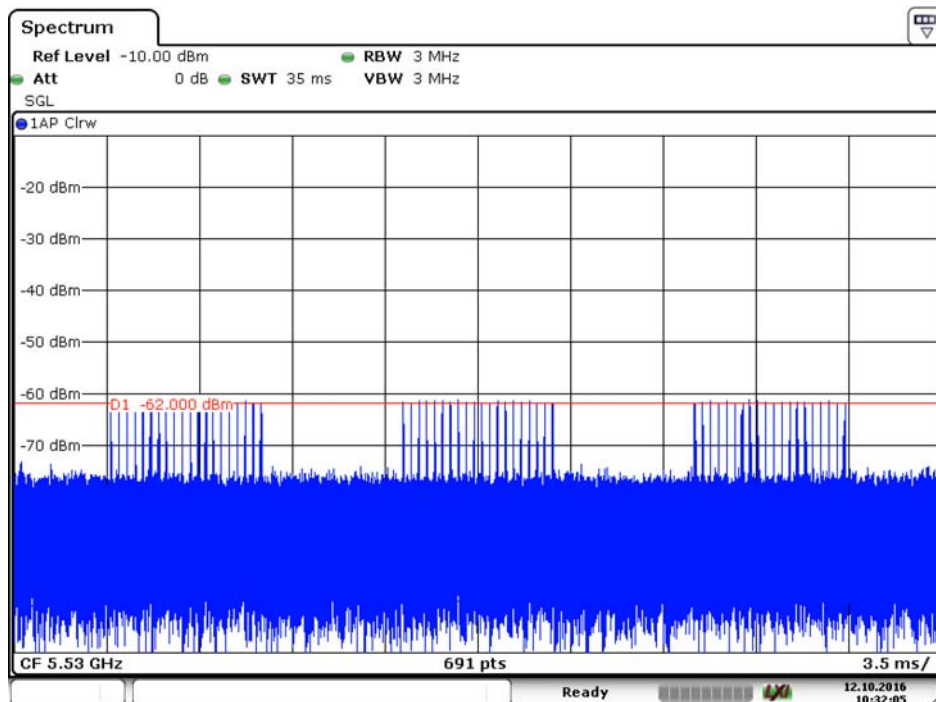


Radar Type 4 – 5530MHz

Radar type 5

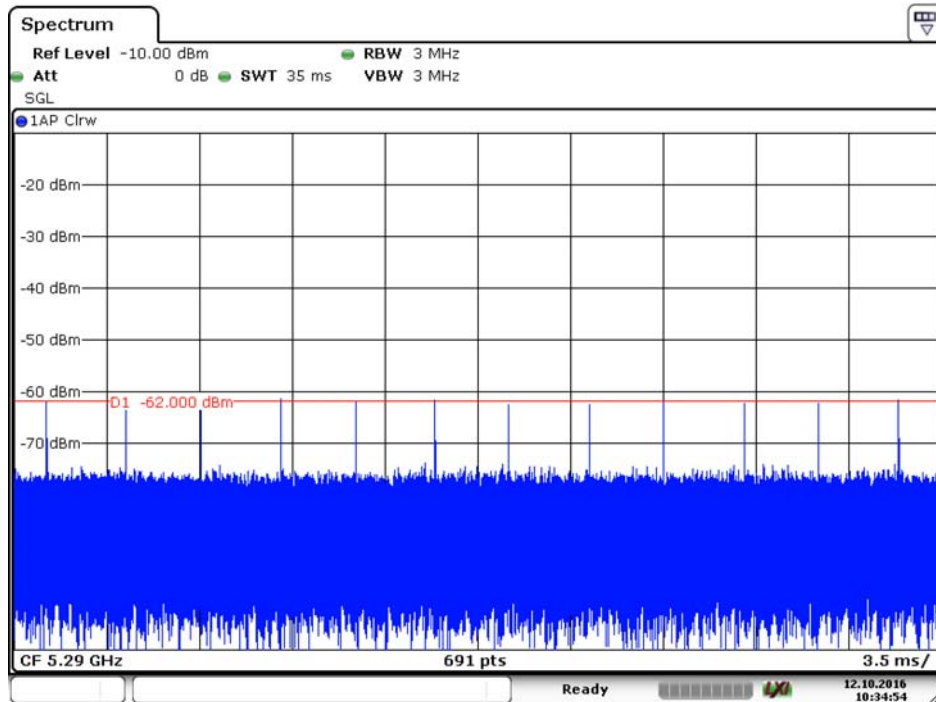


Radar Type 5 – 5290MHz

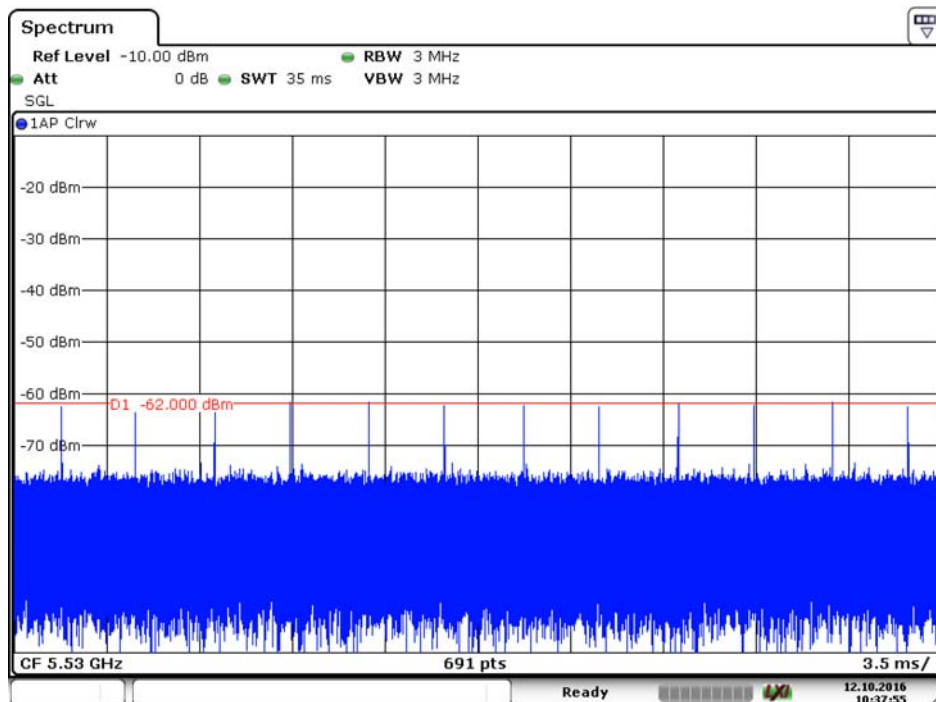


Radar Type 5 – 5530MHz

Radar type 6

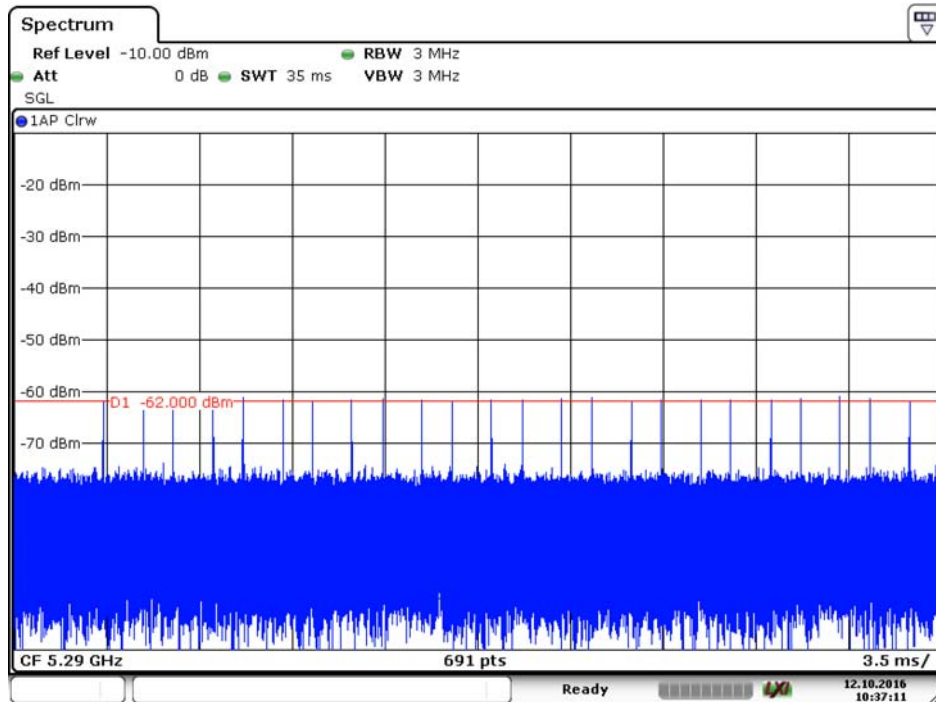

Radar Type 6 – 5290MHz

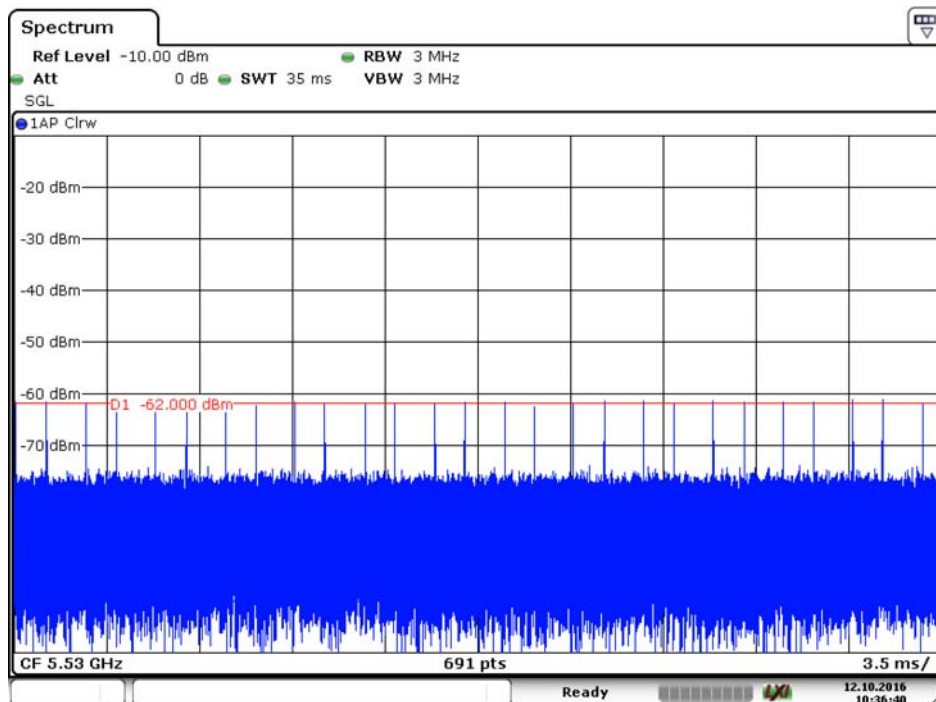


Radar Type 6 – 5530MHz

4. Test Results

Channel closing transmission and channel move time and Non-Occupancy period


Test Item	Operation Channel	Test Result	Limit	Pass / Fail
Channel Move Time	58	0.492s	<10s	Pass
Channel Closing Transmission Time		207ms	<260ms	Pass
Non-Occupancy period		≥ 30	$\geq 30\text{min}$	Pass
Channel Move Time	106	0.490s	<10s	Pass
Channel Closing Transmission Time		207ms	<260ms	Pass
Non-Occupancy period		≥ 30	$\geq 30\text{min}$	Pass

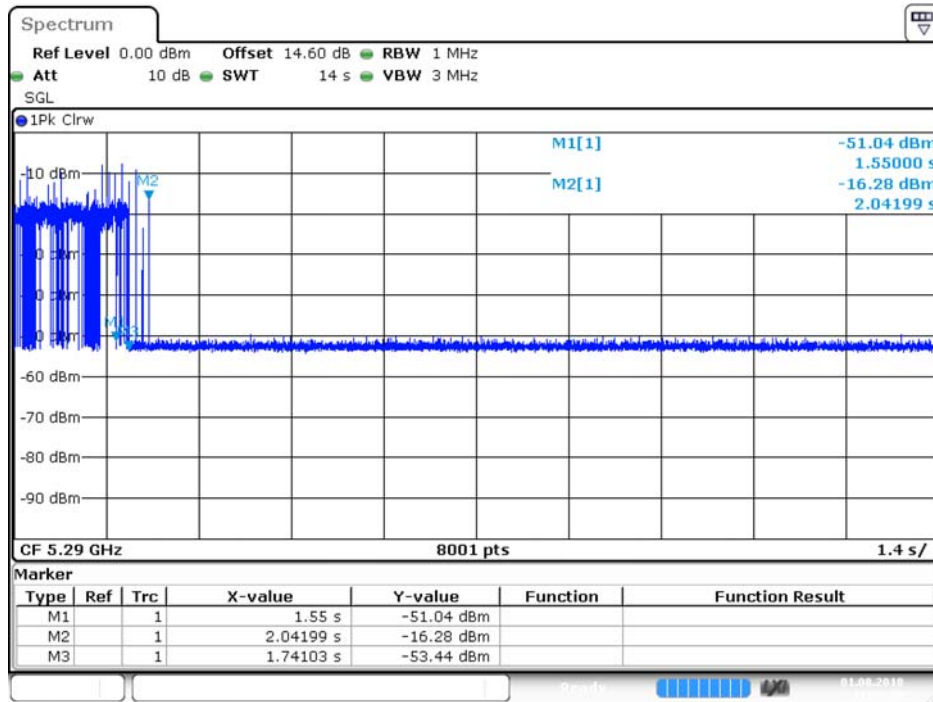

Date: 1.AUG.2018 17:50:49

80MHz / 5290 MHz Closing Transmission Time and Channel Move Time

- Note: 1. The whole time was 14s, the software of this paragraph of time recording points is 8001, each point represents the time is 1.75ms
2. Channel Closing transmission time $(200+7\text{ms})=200+\text{Number}(4)*\text{Dwell}(1.75\text{ms}) < 260\text{ms}$
- Channel Move time $= M2 - M1 = 2.04199 - 1.55 = 0.492\text{s}$

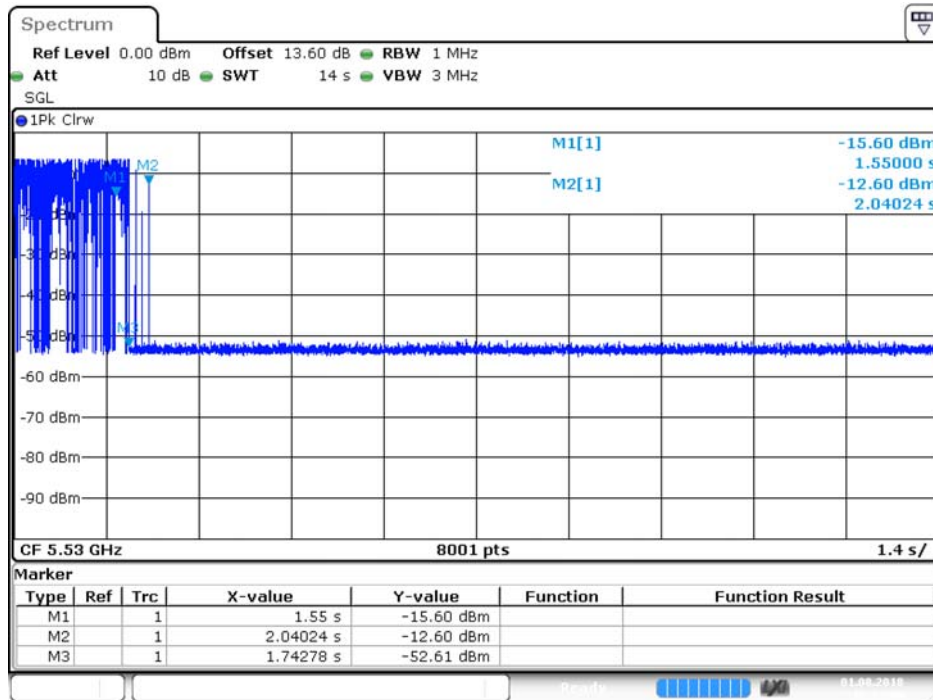


Date: 1.AUG.2018 19:12:06

80MHz / 5530 MHz Channel Move Time and Channel Move Time


- Note: 1. The whole time was 14s, the software of this paragraph of time recording points is 8001, each point represents the time is 1.75ms
2. Channel Closing transmission time $(200+7ms)=200+Number(4)*Dwell(1.75ms)<260ms$
- Channel Move time $=M2-M1=2.04024-1.550=0.49s$

Non-Occupancy period

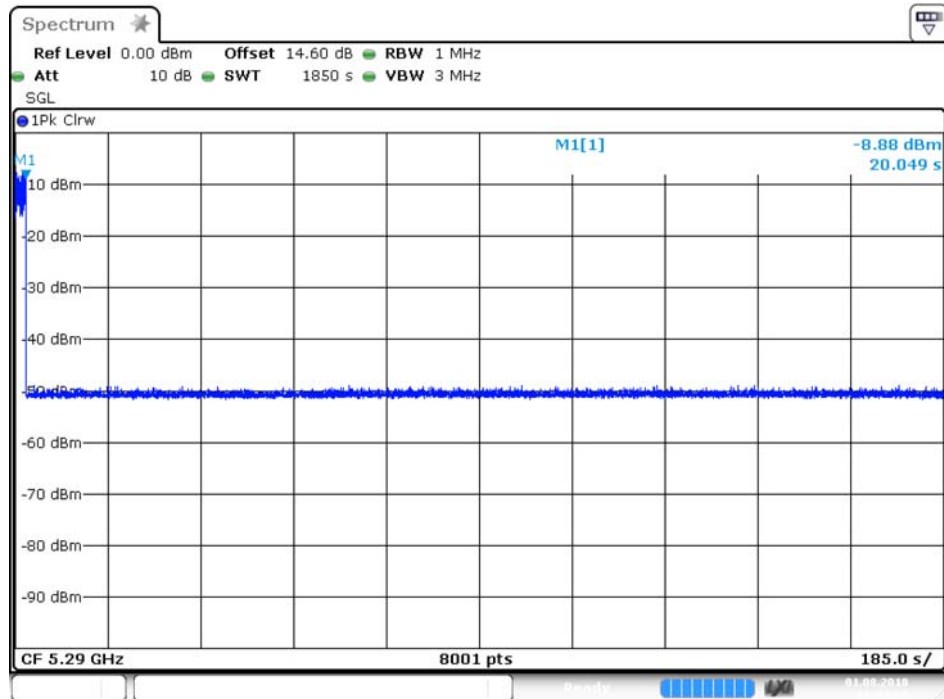

Date: 1.AUG.2018 18:30:15

80MHz / 5290 MHz Non-Occupancy period

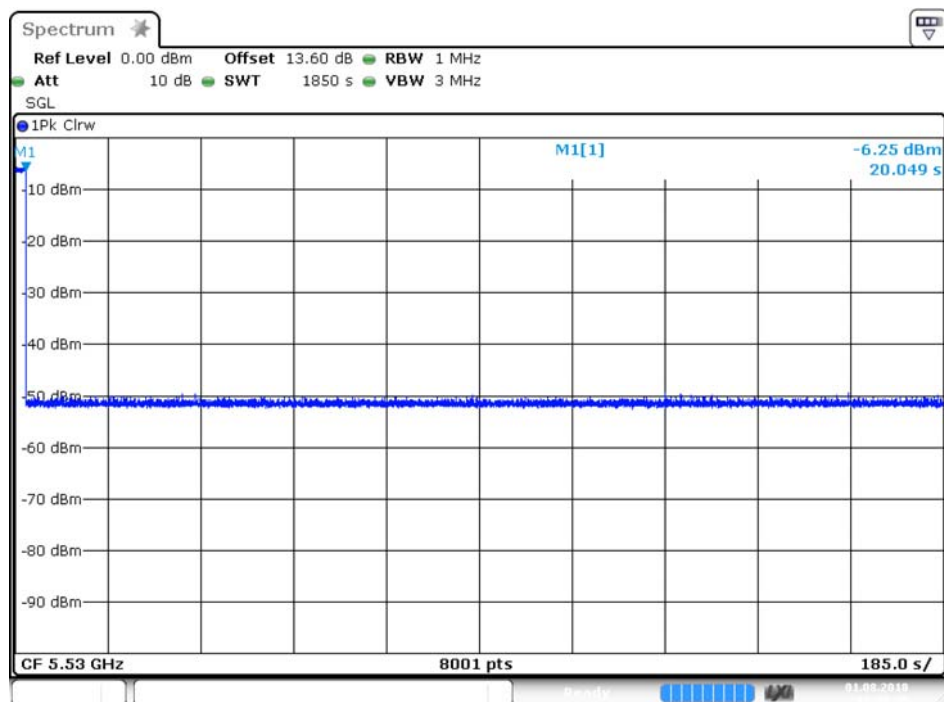


Date: 1.AUG.2018 19:48:45

80MHz / 5530 MHz Non-Occupancy period


Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS

band after UUT power up.

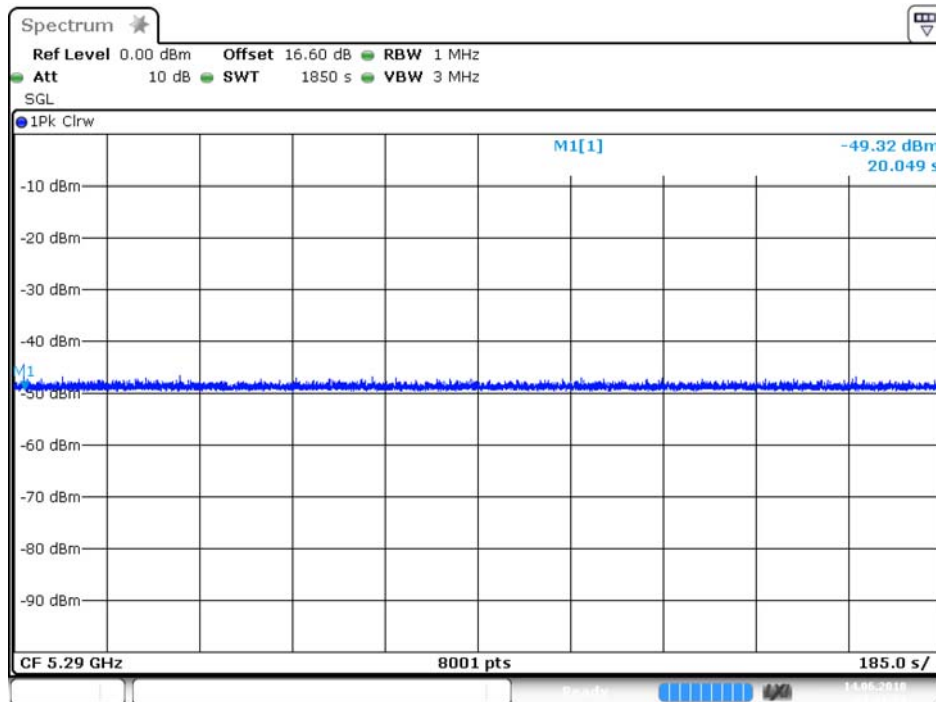

80MHz / 5290 MHz Non-Occupancy period(Master was off)

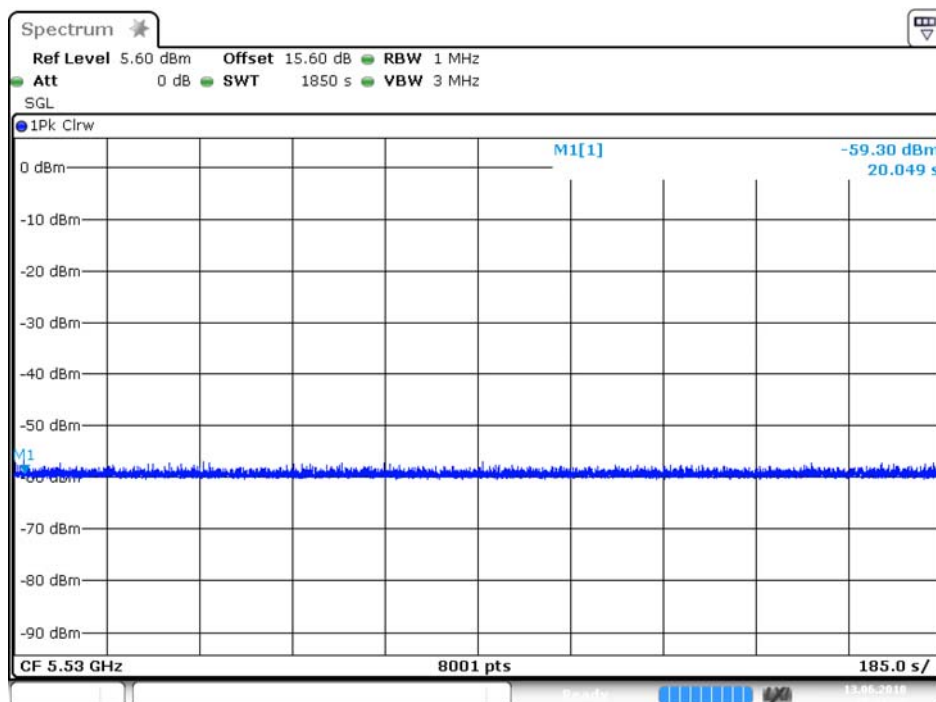

80MHz / 5530 MHz Non-Occupancy period(Master was off)

5. List of measuring equipment

DFS Test System						
No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal Date	Due Date
1	Spectrum Analyzer	101008	FSV-40	R&S	2018.05.03	2019.05.02
2	Vector Signal Generator	105328	SMU200A	R&S	2018.05.03	2019.05.02
3	30dB Attenuator	272.4410.50	30	MCE/Weinschel	2018.05.25	2019.05.24
4	20dB Attenuator	04702	779	narda	2018.05.25	2019.05.24
5	6dB Attenuator	BM8173	2	MCE/Weinschel	2018.05.25	2019.05.24

Support Unit used in test configuration and system				
Equipment	Trade Name	Model Name	FCC ID	Serial No.
WLAN AP	D-Link	DIR-826	KA2IR826LMO1	QBQ91C6000056
Notebook	Lenovo	E40	\	TP00005A

**** END OF REPORT ****