



Annex for BLE

Test Report No.: CTL2406047082-WF

TABLE OF CONTENTS

1. Bandwidth.....	3
1.1 Test Result	3
1.1.1 OBW	3
1.1.2 6dB BW	3
1.2 Test Graph.....	4
1.2.1 OBW	4
1.2.2 6dB BW	7
2. Maximum Conducted Output Power	10
2.1 Test Result	10
2.1.1 Power	10
2.2 Test Graph.....	11
2.2.1 Power	11
3. Maximum Power Spectral Density	14
3.1 Test Result	14
3.1.1 PSD	14
3.2 Test Graph.....	15
3.2.1 PSD	15
4. Unwanted Emissions In Non-restricted Frequency Bands.....	18
4.1 Test Result	18
4.1.1 Ref.....	18



4.1.2 CSE 18

4.2 Test Graph..... 19

4.2.1 Ref..... 19

4.2.2 CSE 22

FCCID: 2AC9N-1686200-MIC

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.014	/	Pass
		2440	1	1.014	/	Pass
		2480	1	1.013	/	Pass
2M	SISO	2402	1	2.011	/	Pass
		2440	1	2.008	/	Pass
		2480	1	2.008	/	Pass


1.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.662	≥ 0.5	Pass
		2440	1	0.665	≥ 0.5	Pass
		2480	1	0.664	≥ 0.5	Pass
2M	SISO	2402	1	1.139	≥ 0.5	Pass
		2440	1	1.138	≥ 0.5	Pass
		2480	1	1.137	≥ 0.5	Pass


FCCID: 2AC9N-1686200-MIC

1.2 Test Graph


1.2.1 OBW

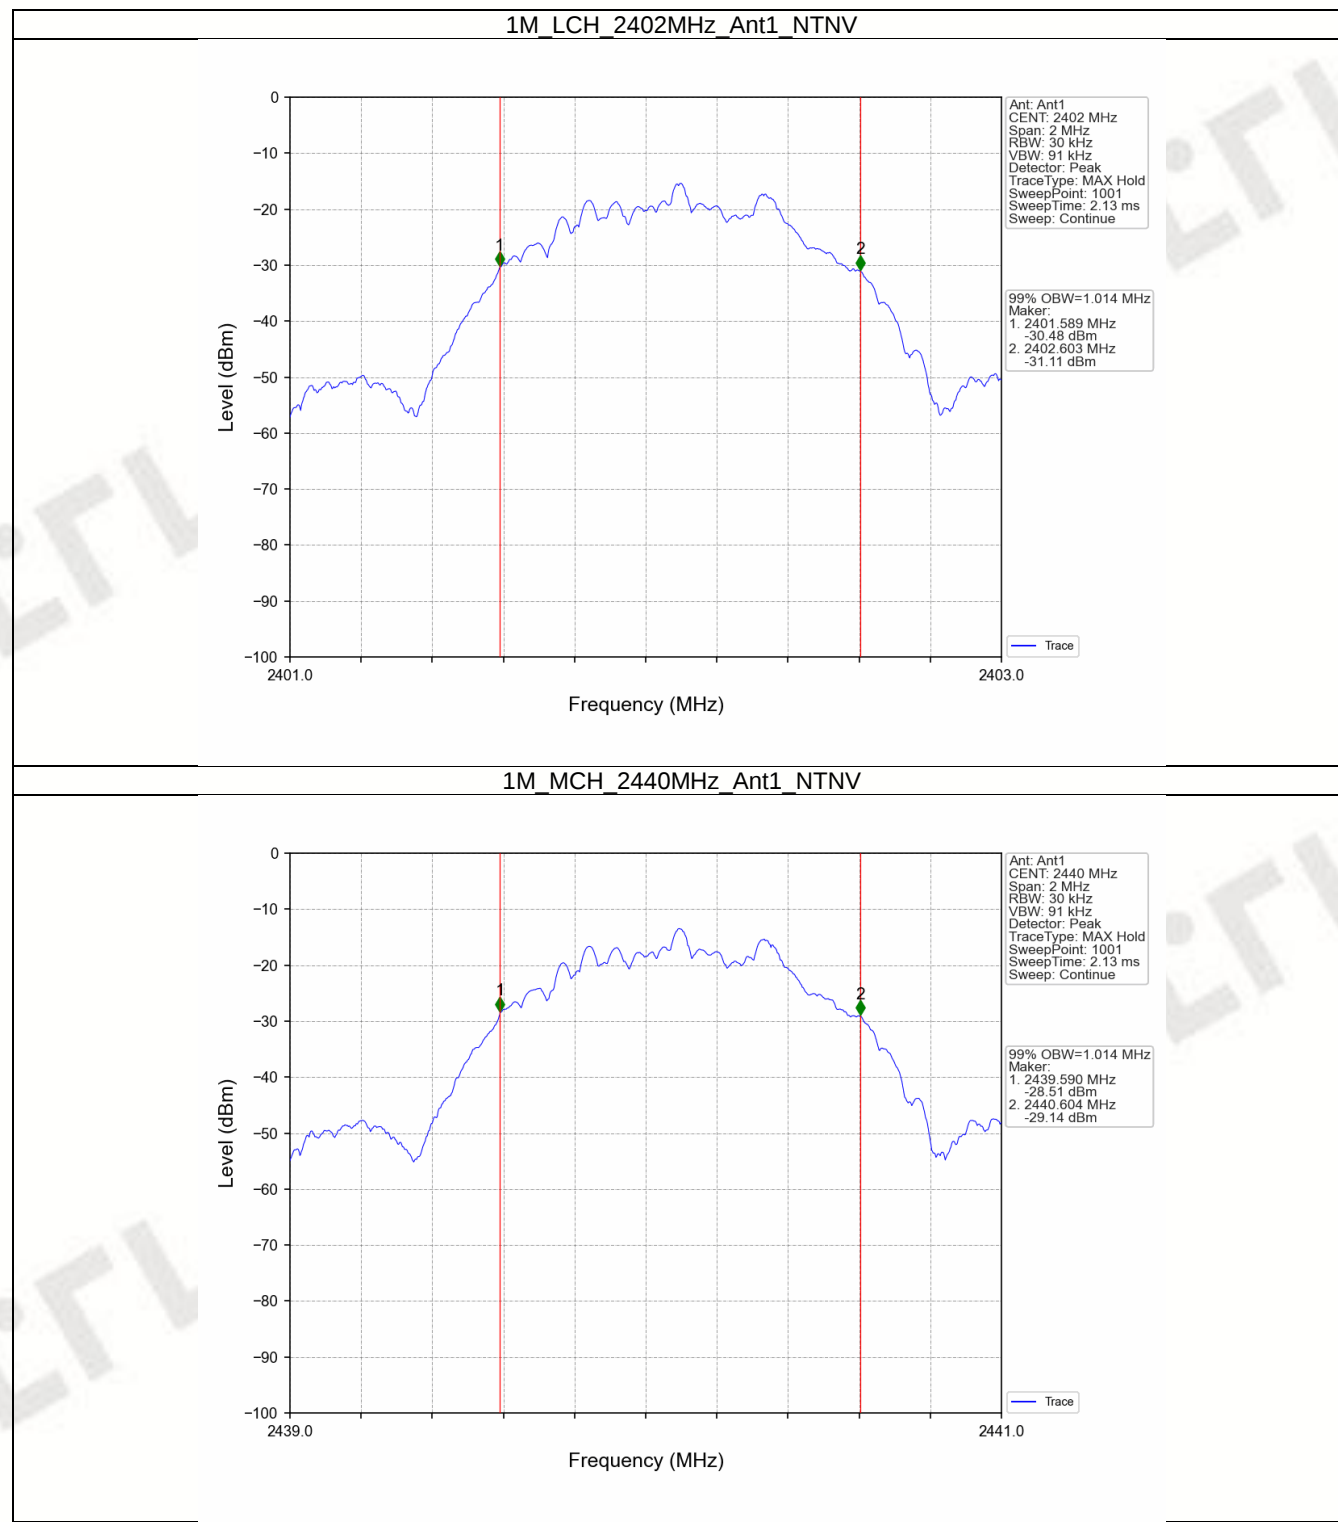

FCCID: 2AC9N-1686200-MIC

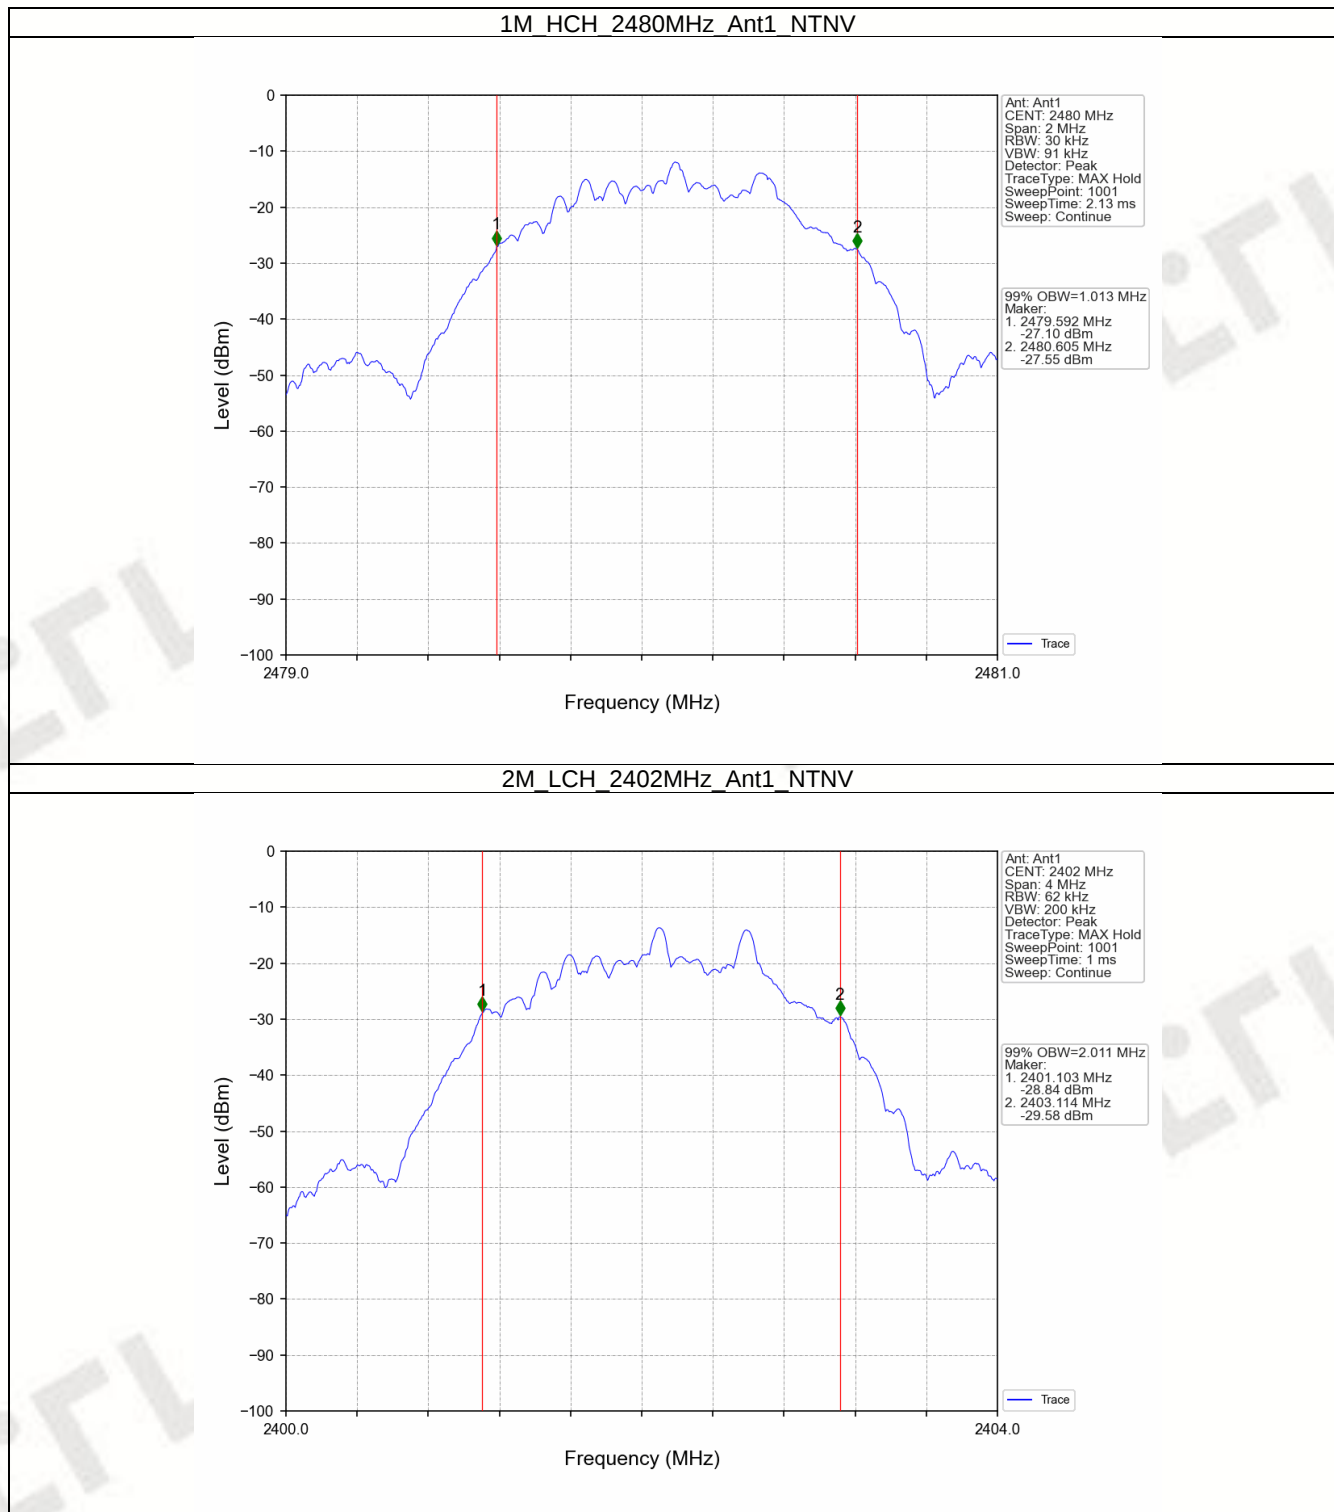

FCCID: 2AC9N-1686200-MIC

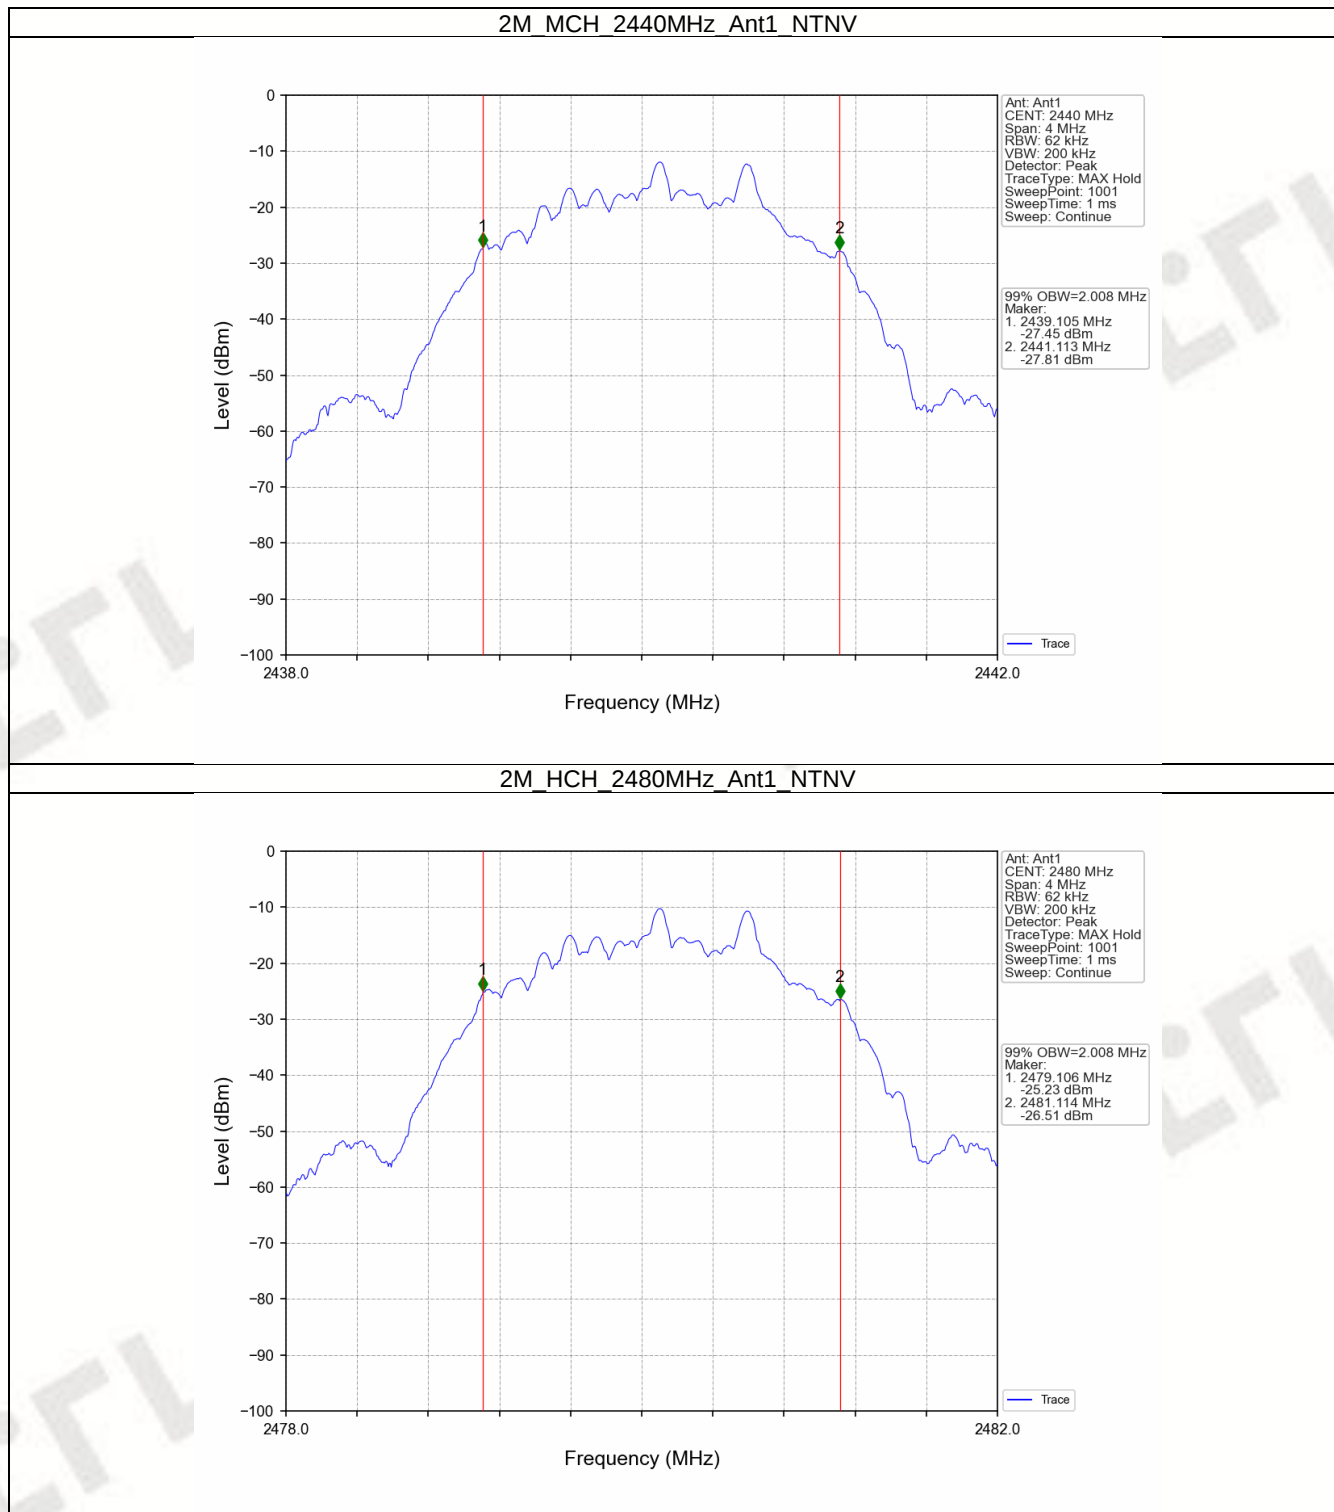


FCCID: 2AC9N-1686200-MIC

1.2.2 6dB BW




FCCID: 2AC9N-1686200-MIC

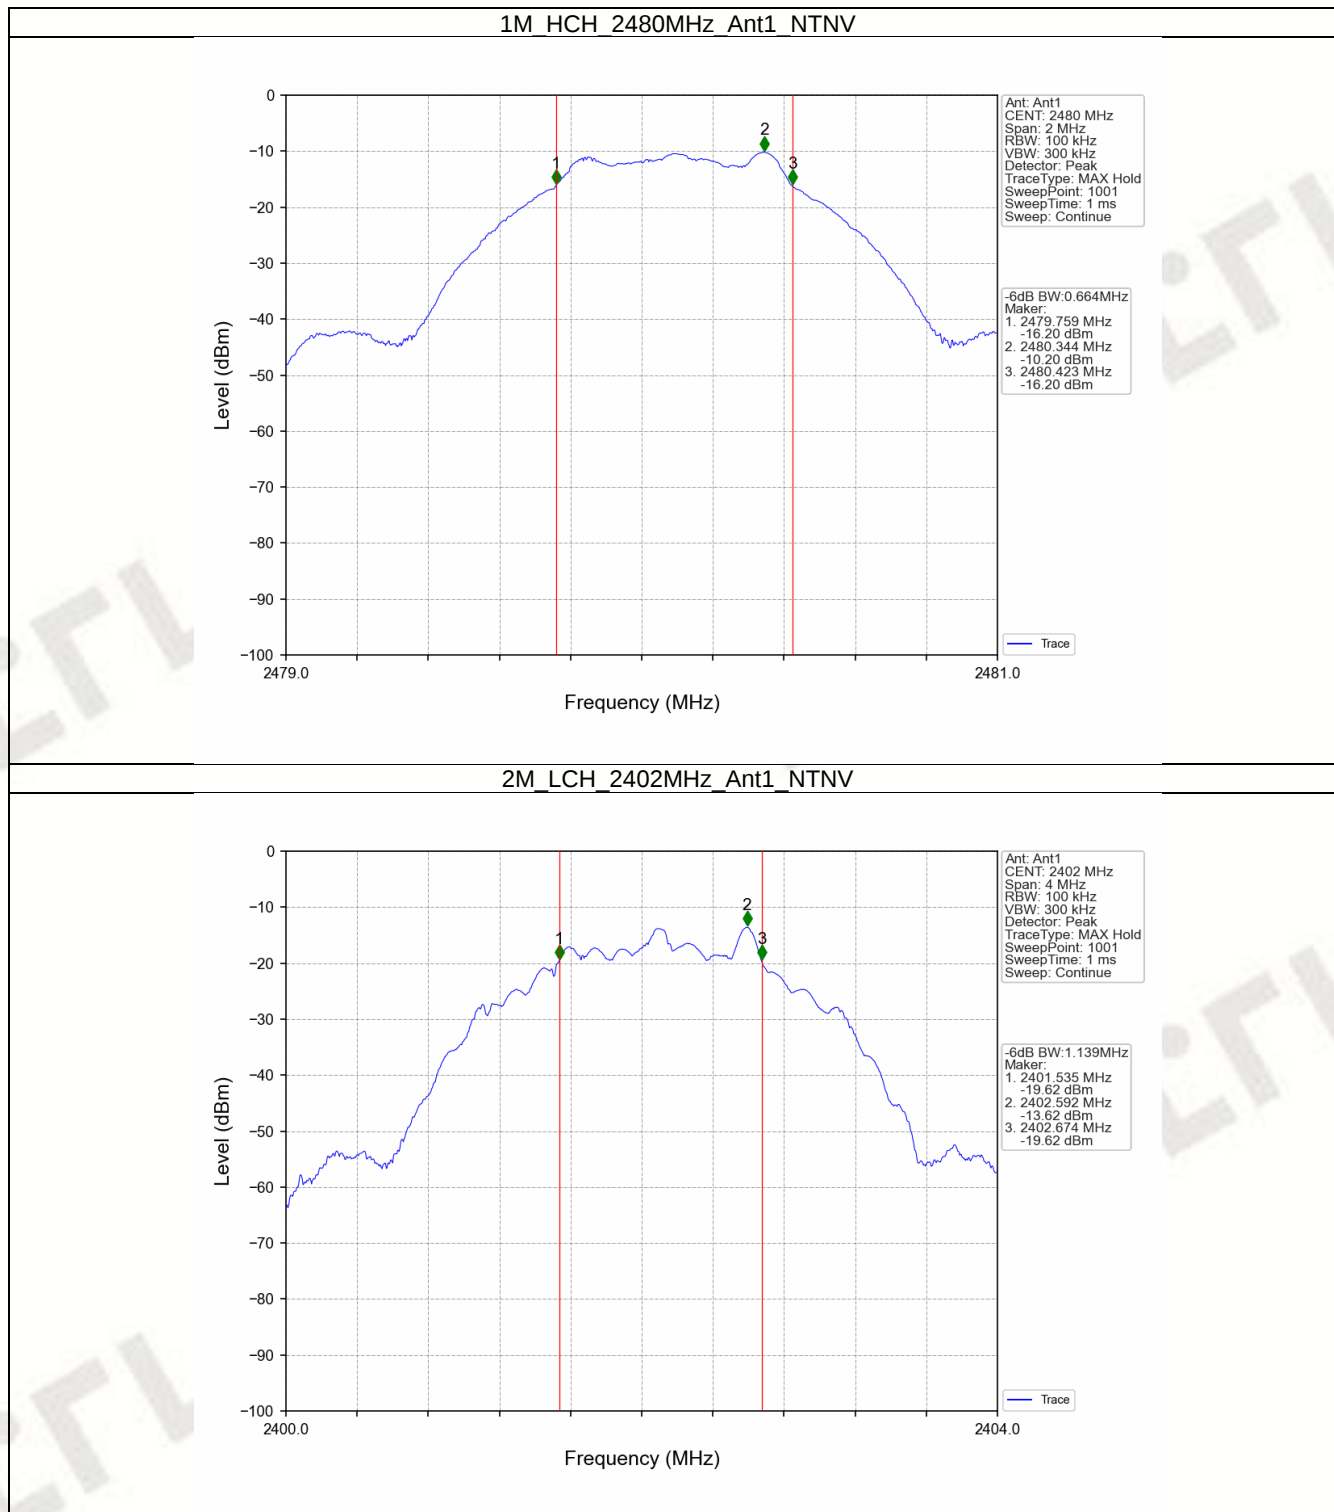


FCCID: 2AC9N-1686200-MIC

2M MCH 2440MHz Ant1 NTN

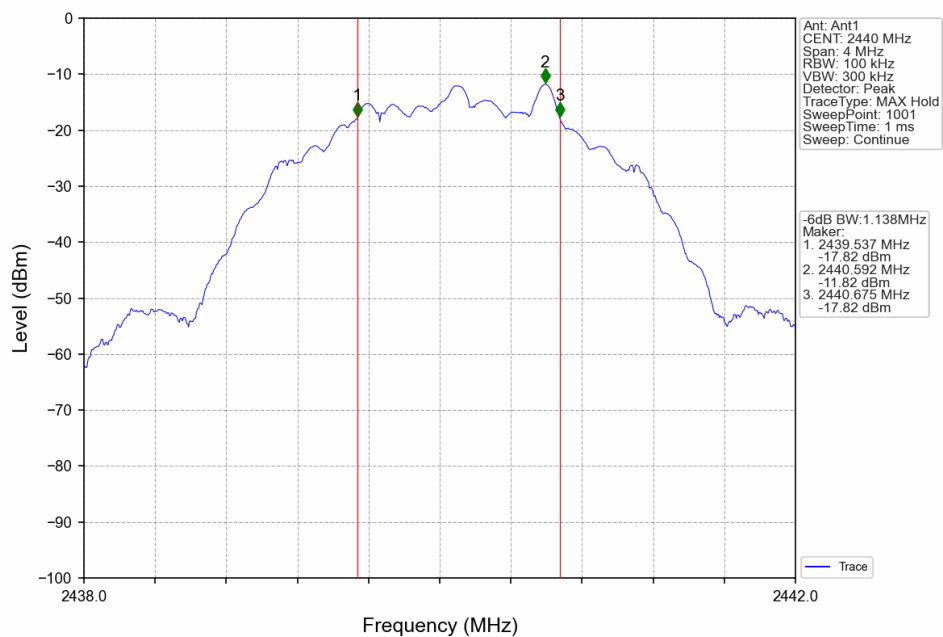

2M HCH 2480MHz Ant1 NTN

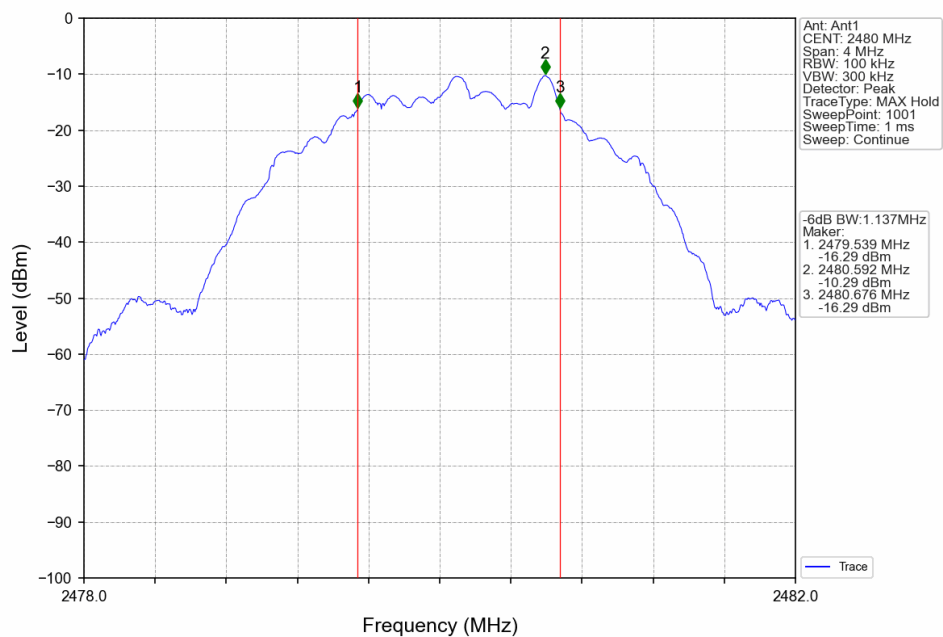

FCCID: 2AC9N-1686200-MIC

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-13.13	<=30	Pass
		2440	-11.32	<=30	Pass
		2480	-9.79	<=30	Pass
2M	SISO	2402	-13.05	<=30	Pass
		2440	-11.26	<=30	Pass
		2480	-9.73	<=30	Pass

Note1: Antenna Gain: Ant1: -0.58dBi;


FCCID: 2AC9N-1686200-MIC

2.2 Test Graph


2.2.1 Power

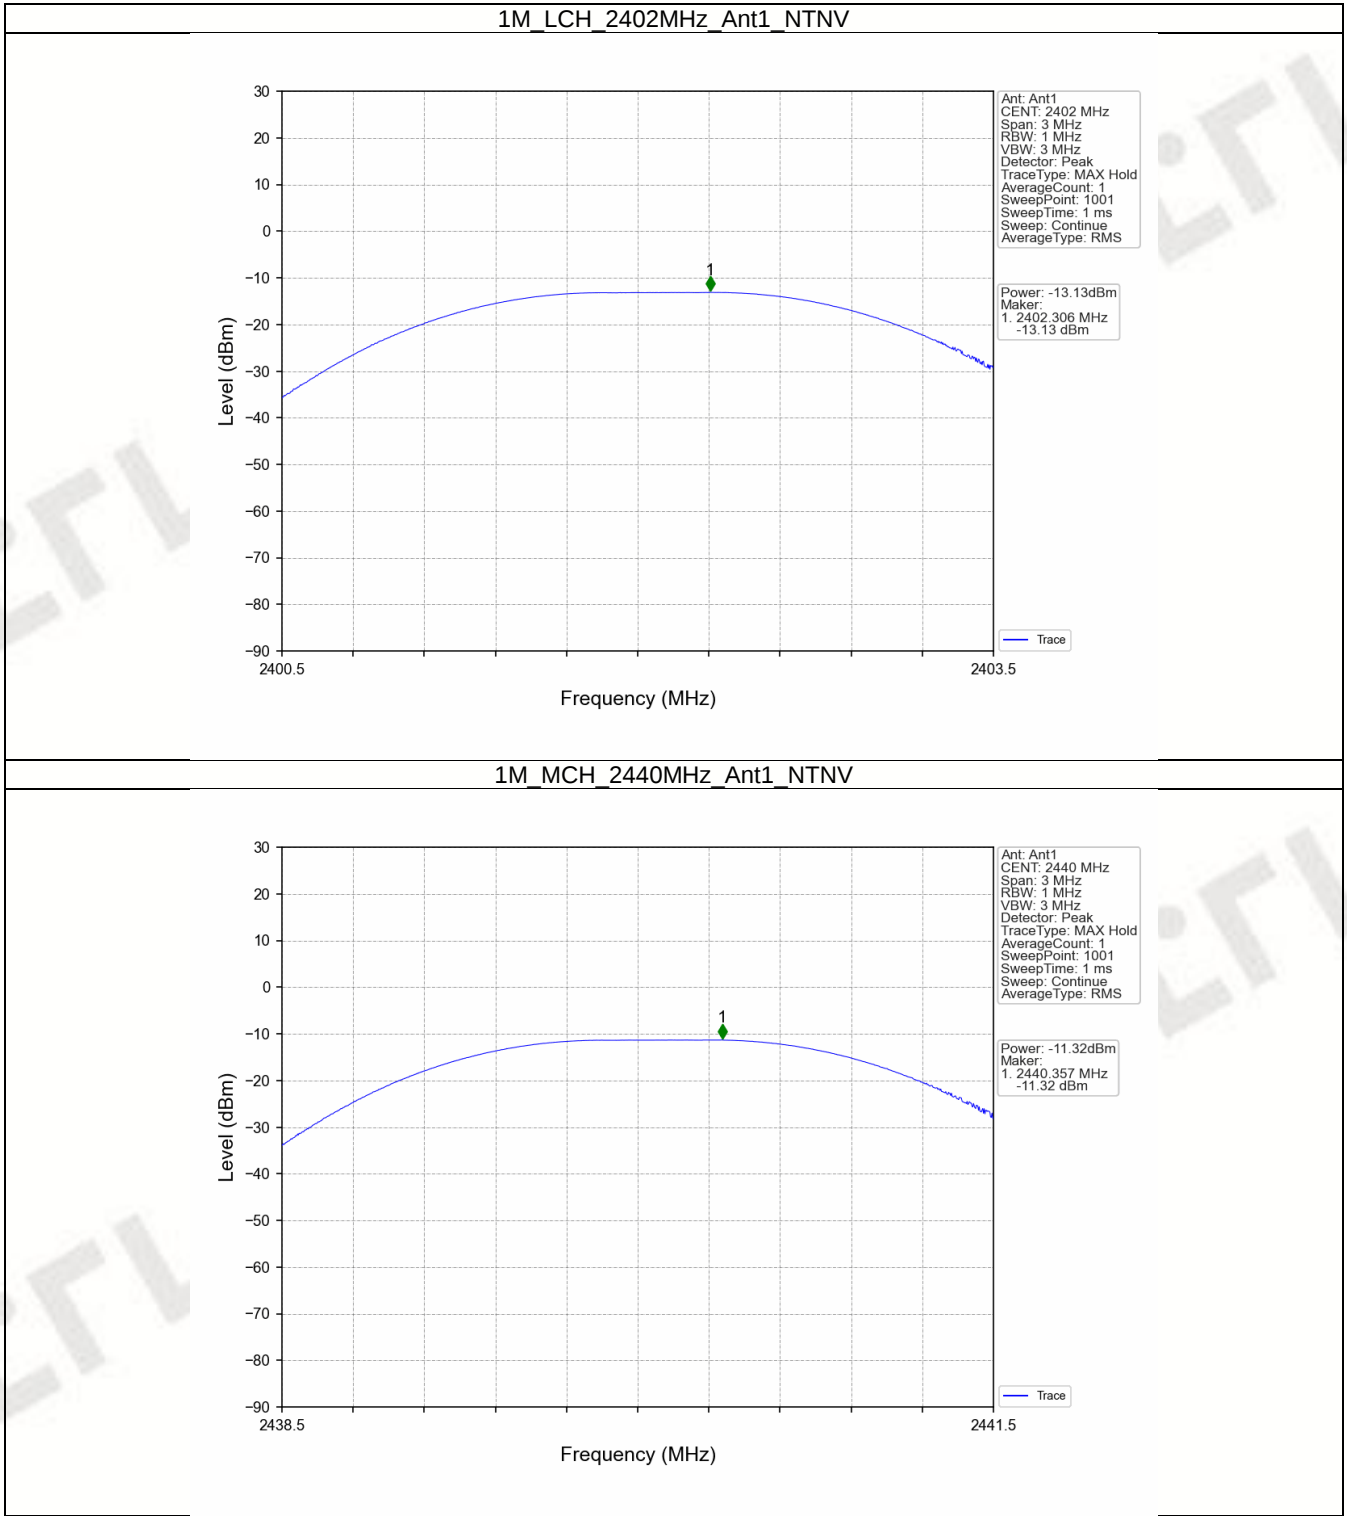

FCCID: 2AC9N-1686200-MIC

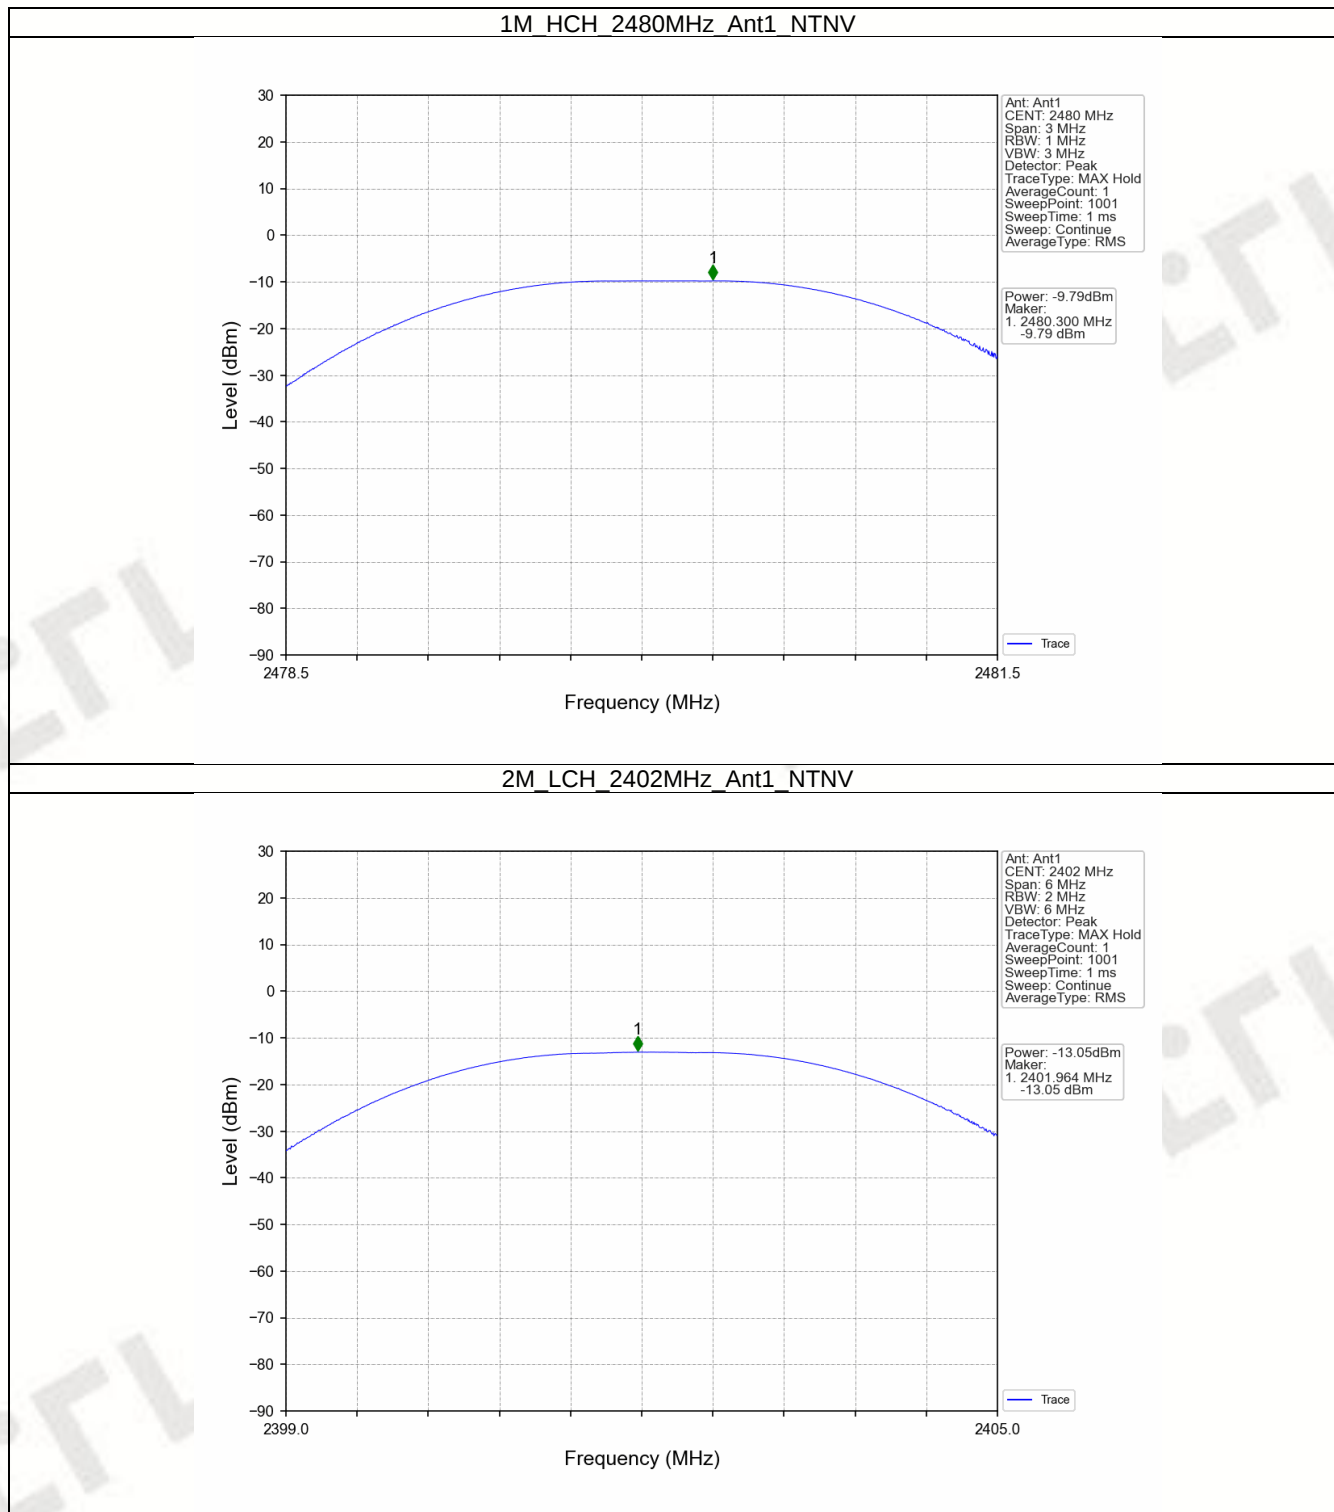

FCCID: 2AC9N-1686200-MIC

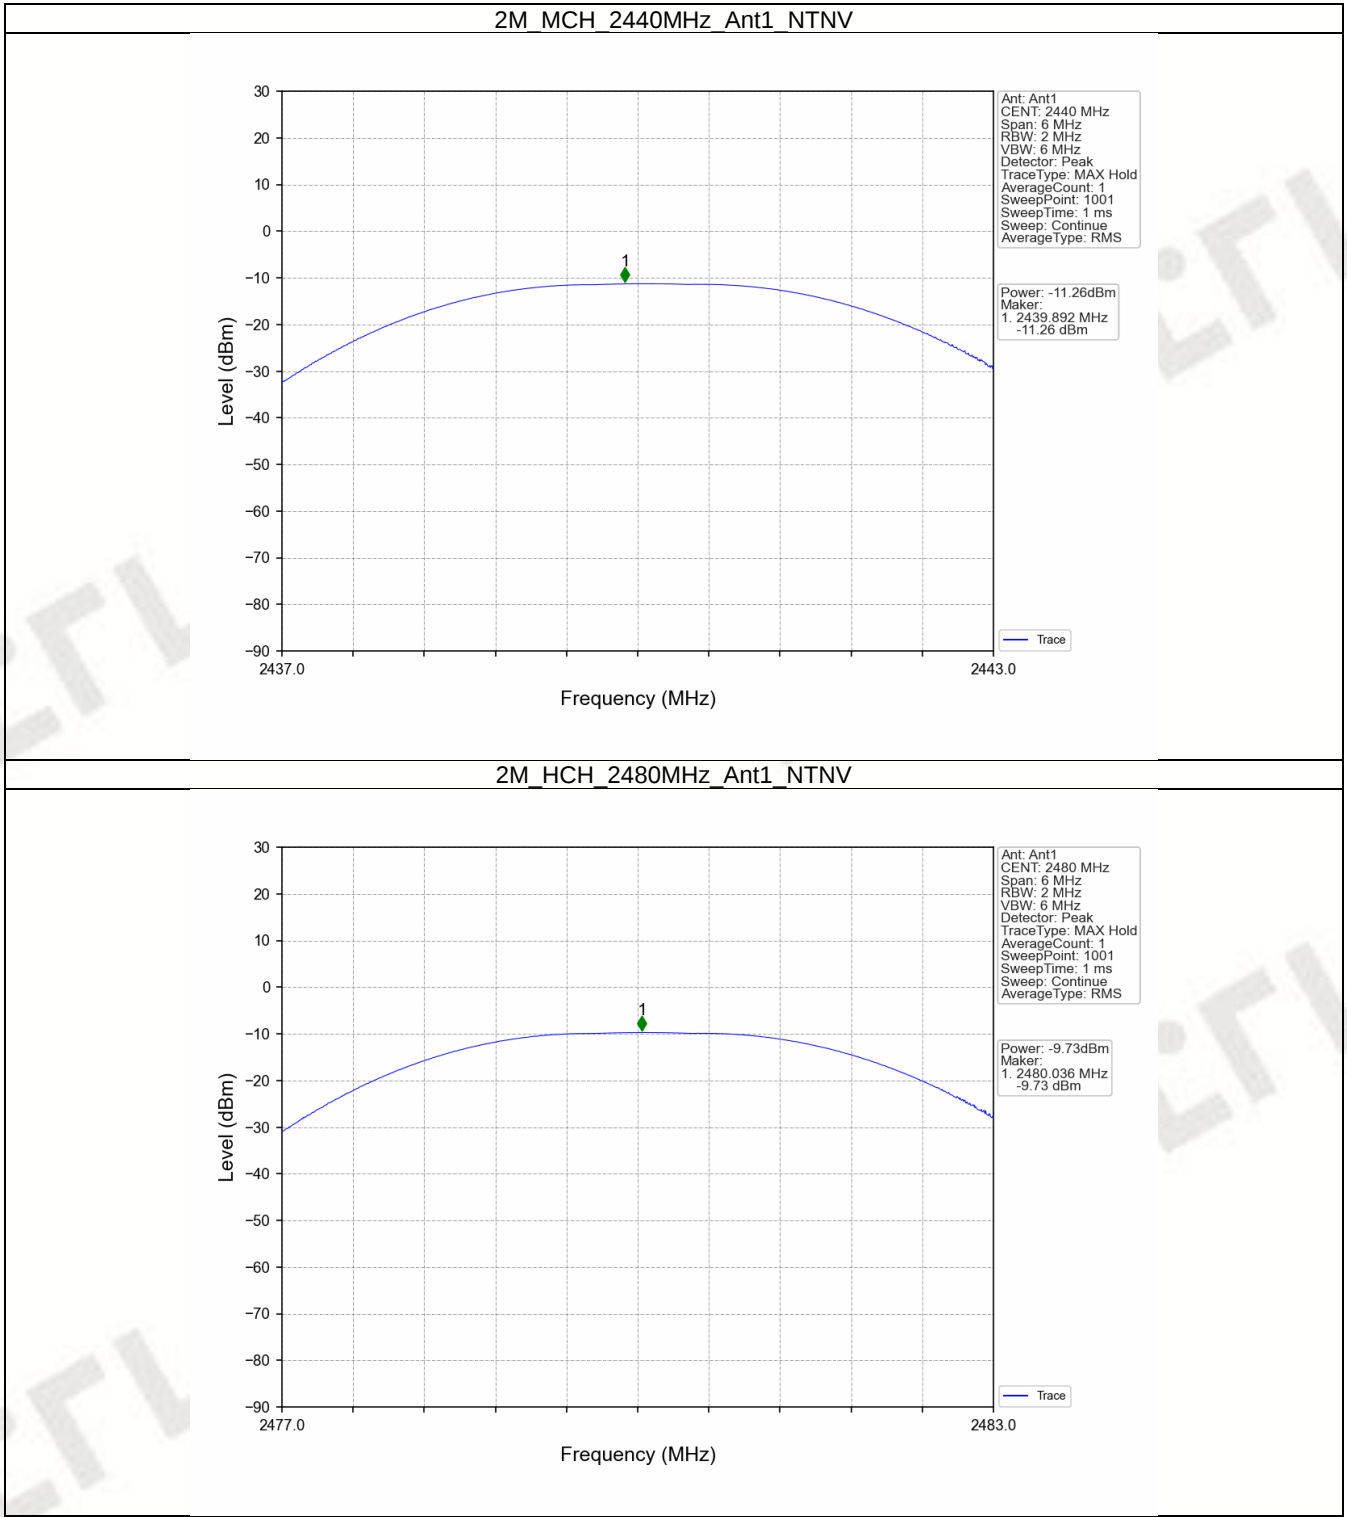

FCCID: 2AC9N-1686200-MIC

3. Maximum Power Spectral Density

3.1 Test Result


3.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-28.49	<=8	Pass
		2440	-27.03	<=8	Pass
		2480	-24.96	<=8	Pass
2M	SISO	2402	-30.75	<=8	Pass
		2440	-28.91	<=8	Pass
		2480	-27.31	<=8	Pass
Note1: Antenna Gain: Ant1: -0.58dBi;					


FCCID: 2AC9N-1686200-MIC

3.2 Test Graph


3.2.1 PSD

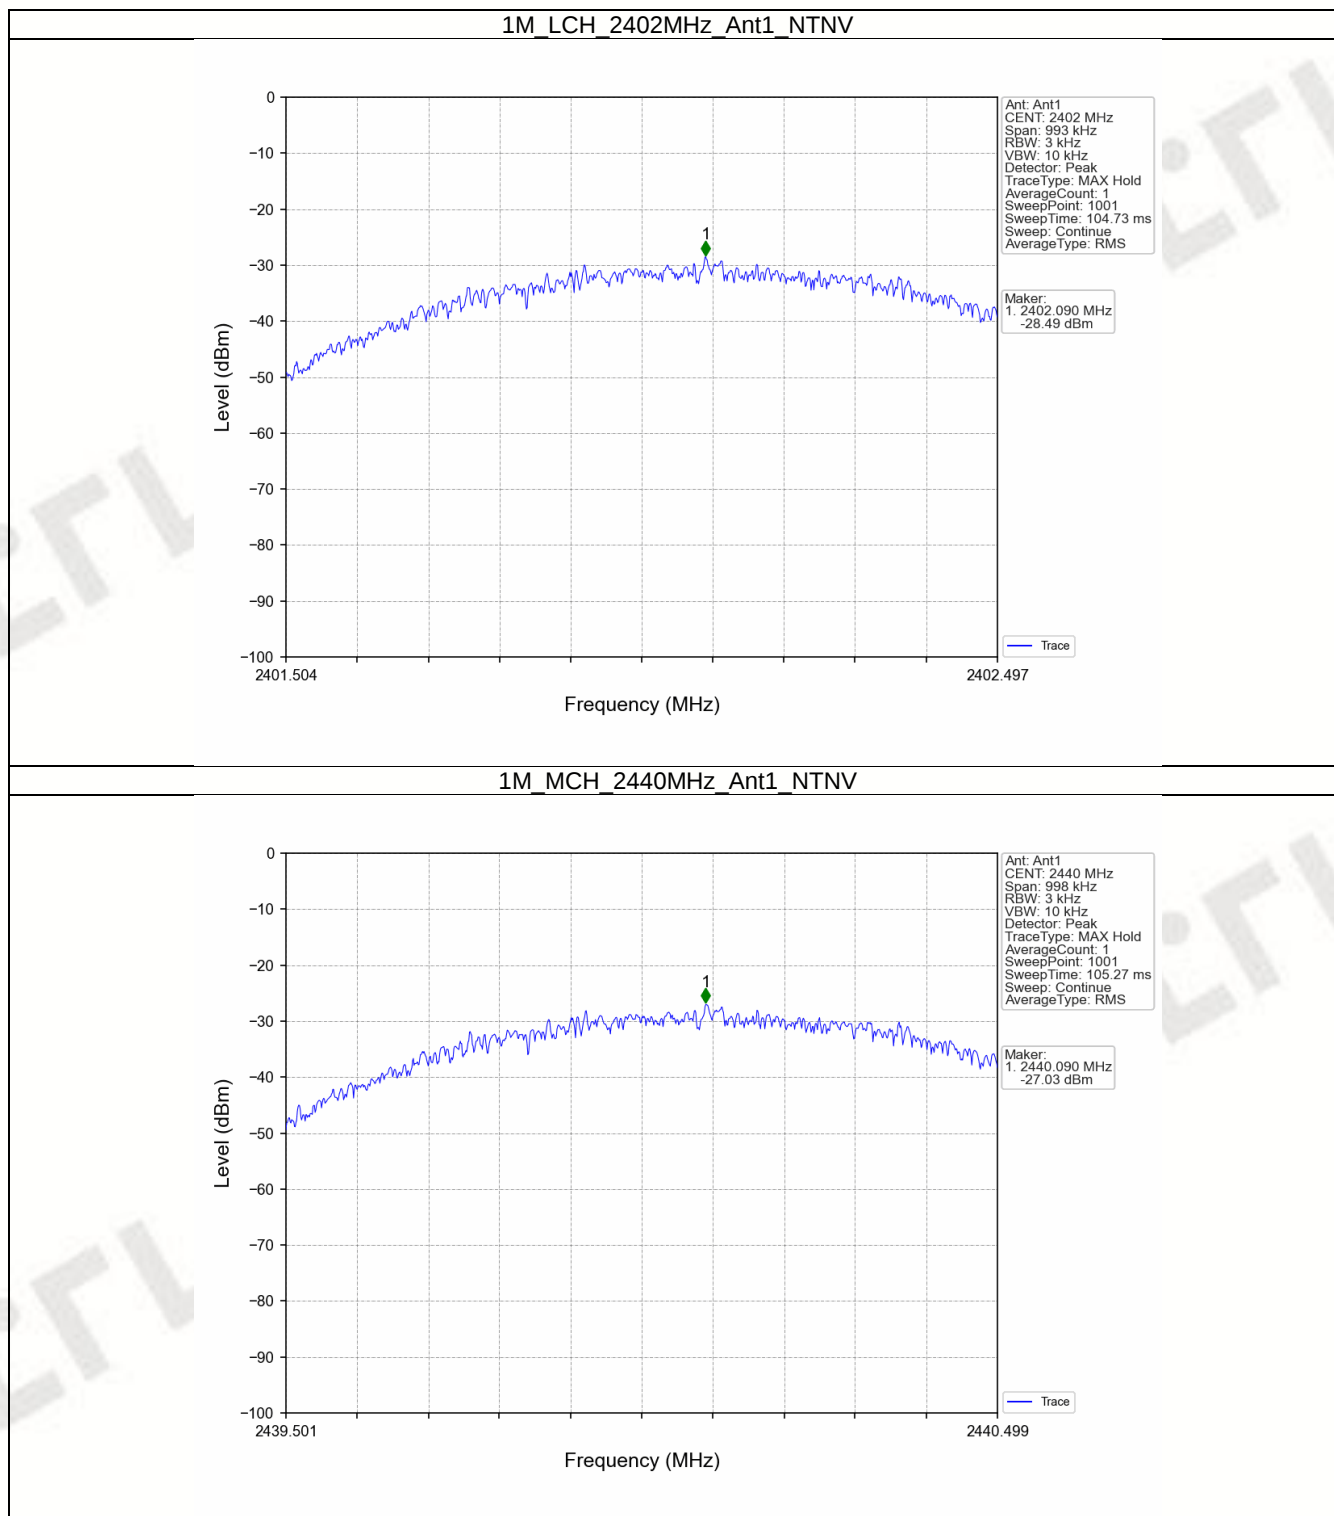

FCCID: 2AC9N-1686200-MIC

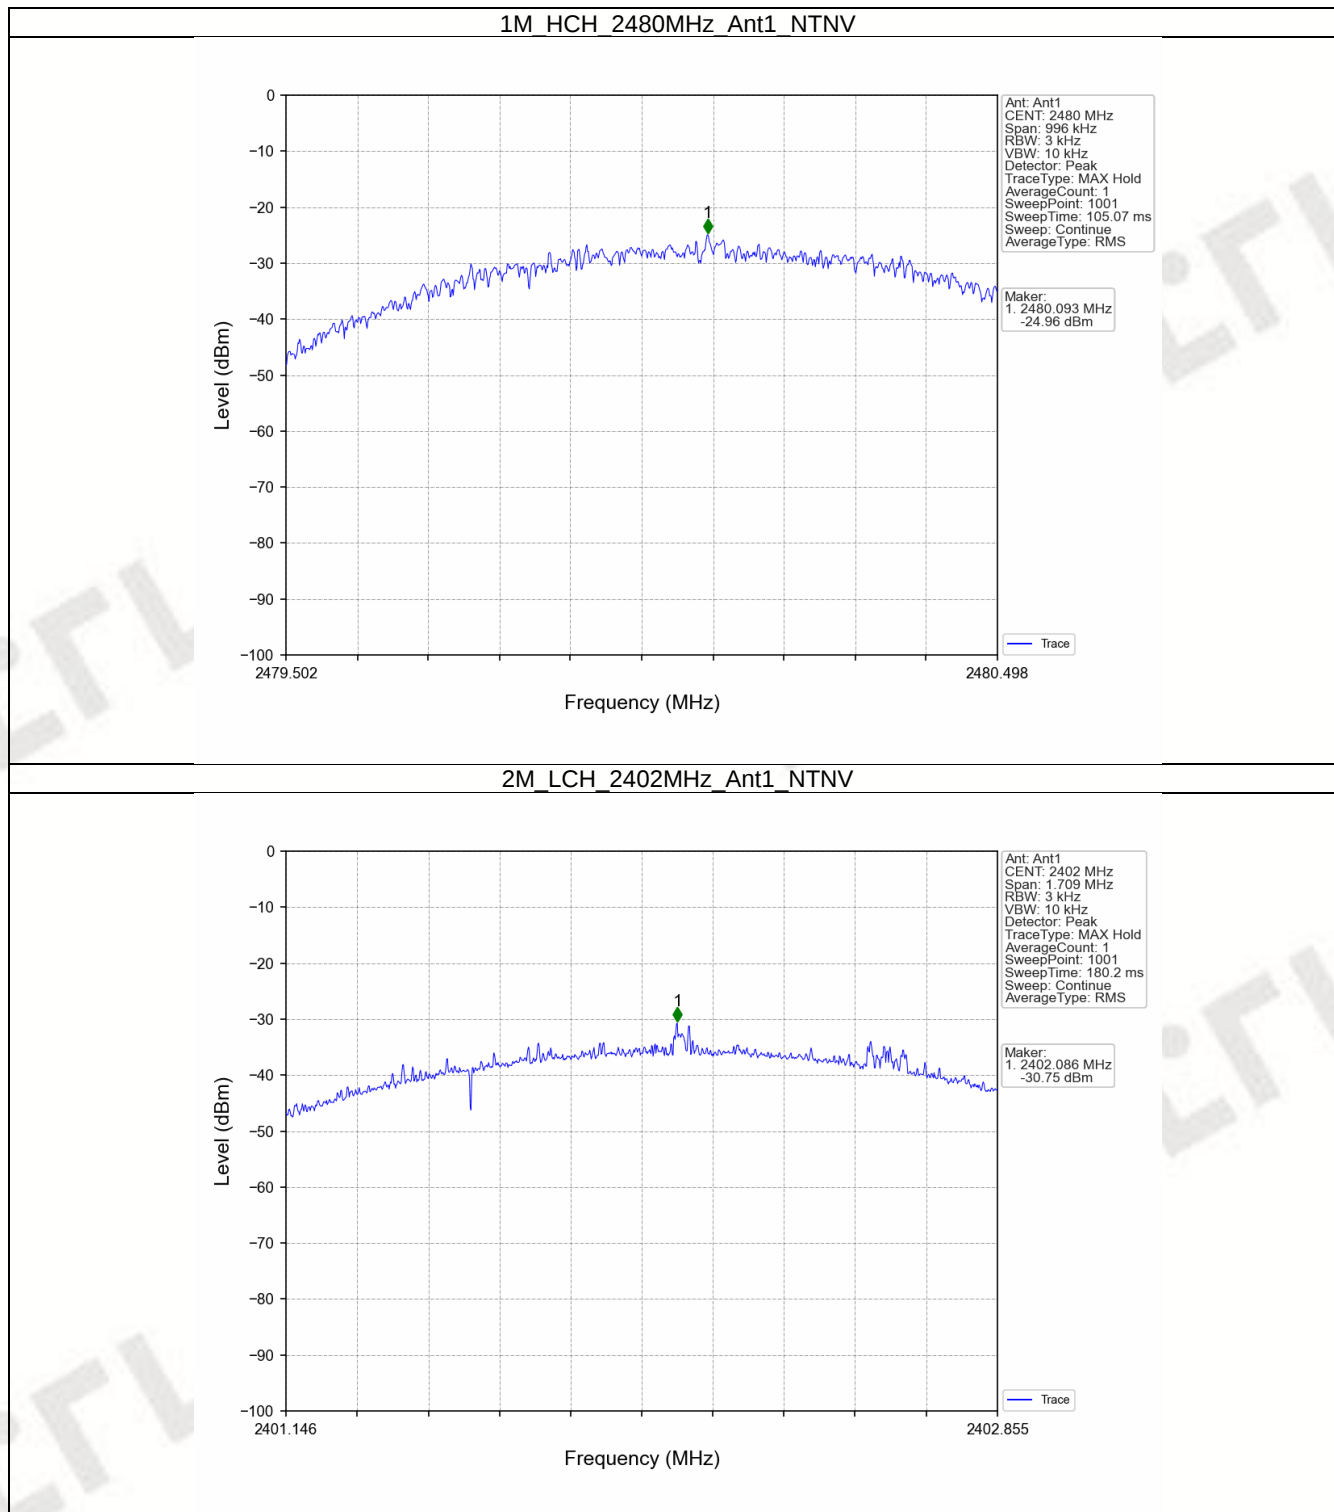

FCCID: 2AC9N-1686200-MIC

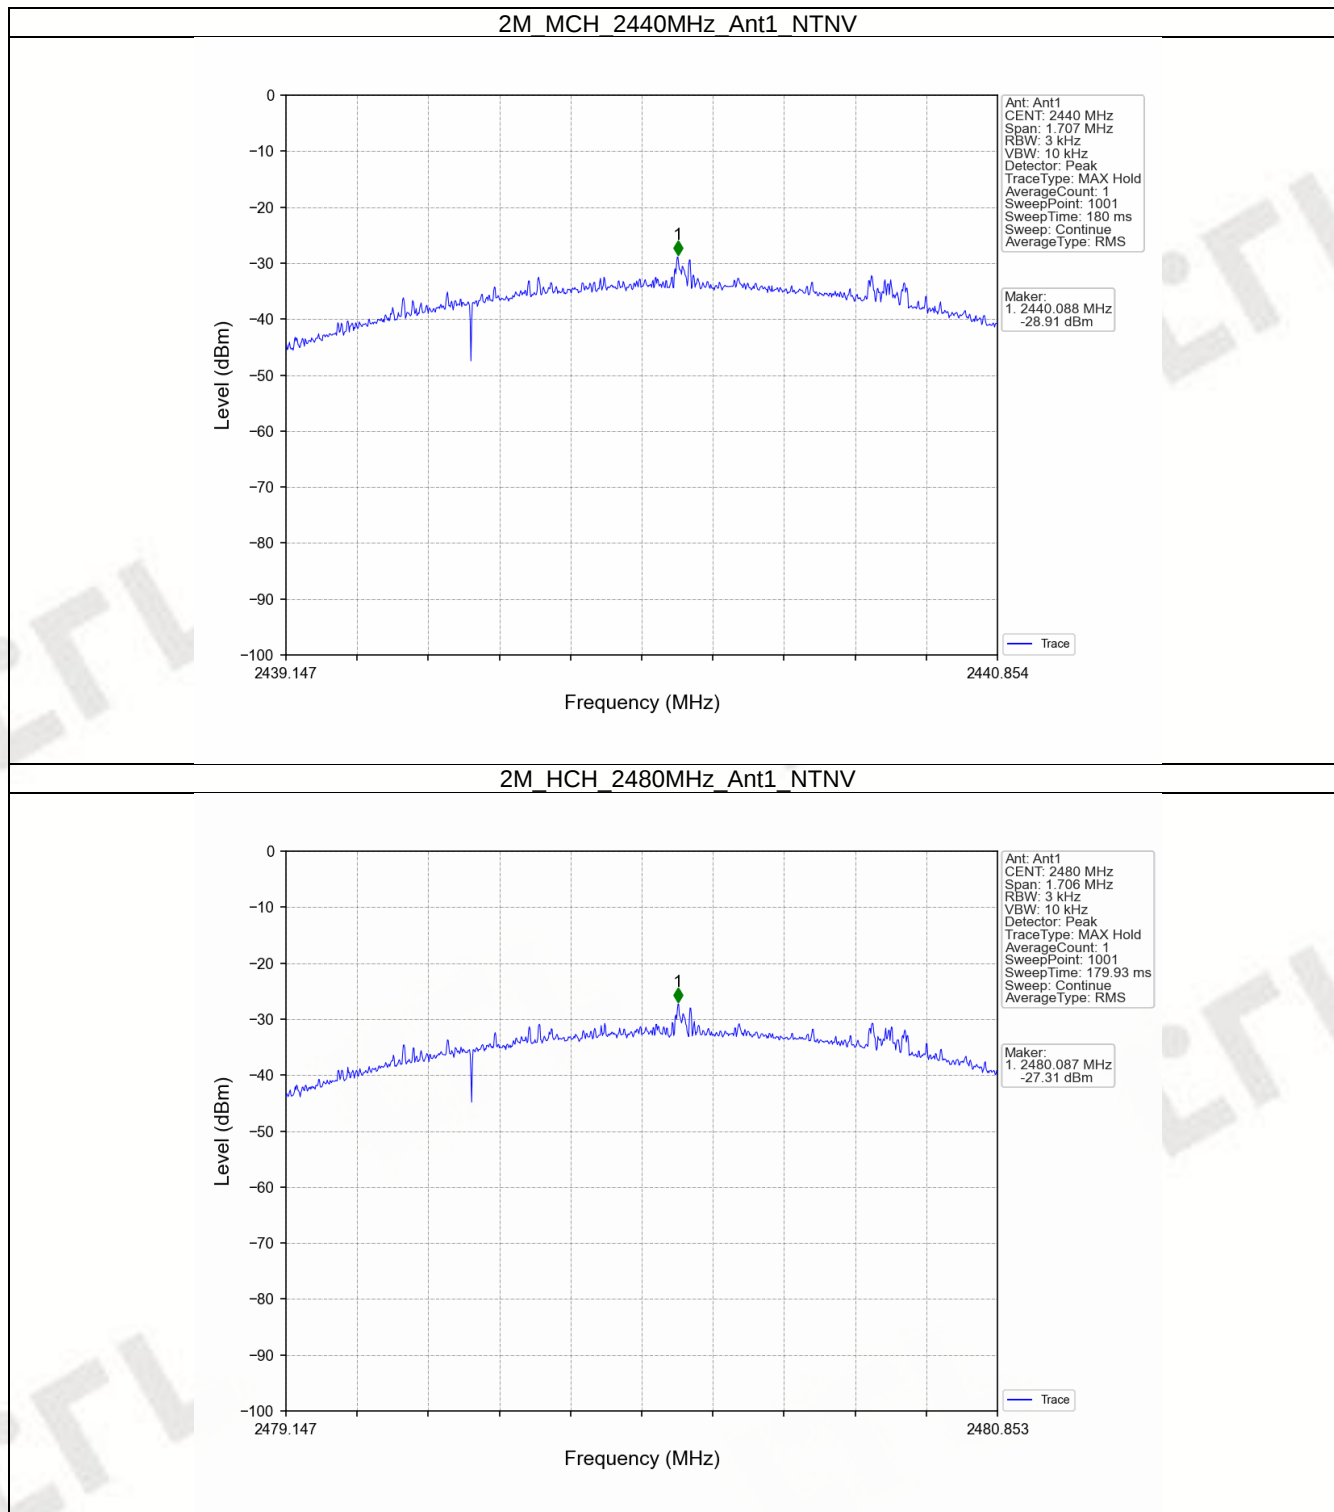

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Test Result

4.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-13.52
		2440	1	-11.71
		2480	1	-10.22
2M	SISO	2402	1	-13.66
		2440	1	-11.81
		2480	1	-10.33

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

4.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-10.22	-30.22	Pass
		2440	1	-10.22	-30.22	Pass
		2480	1	-10.22	-30.22	Pass
2M	SISO	2402	1	-10.33	-30.33	Pass
		2440	1	-10.33	-30.33	Pass
		2480	1	-10.33	-30.33	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


FCCID: 2AC9N-1686200-MIC

4.2 Test Graph


4.2.1 Ref

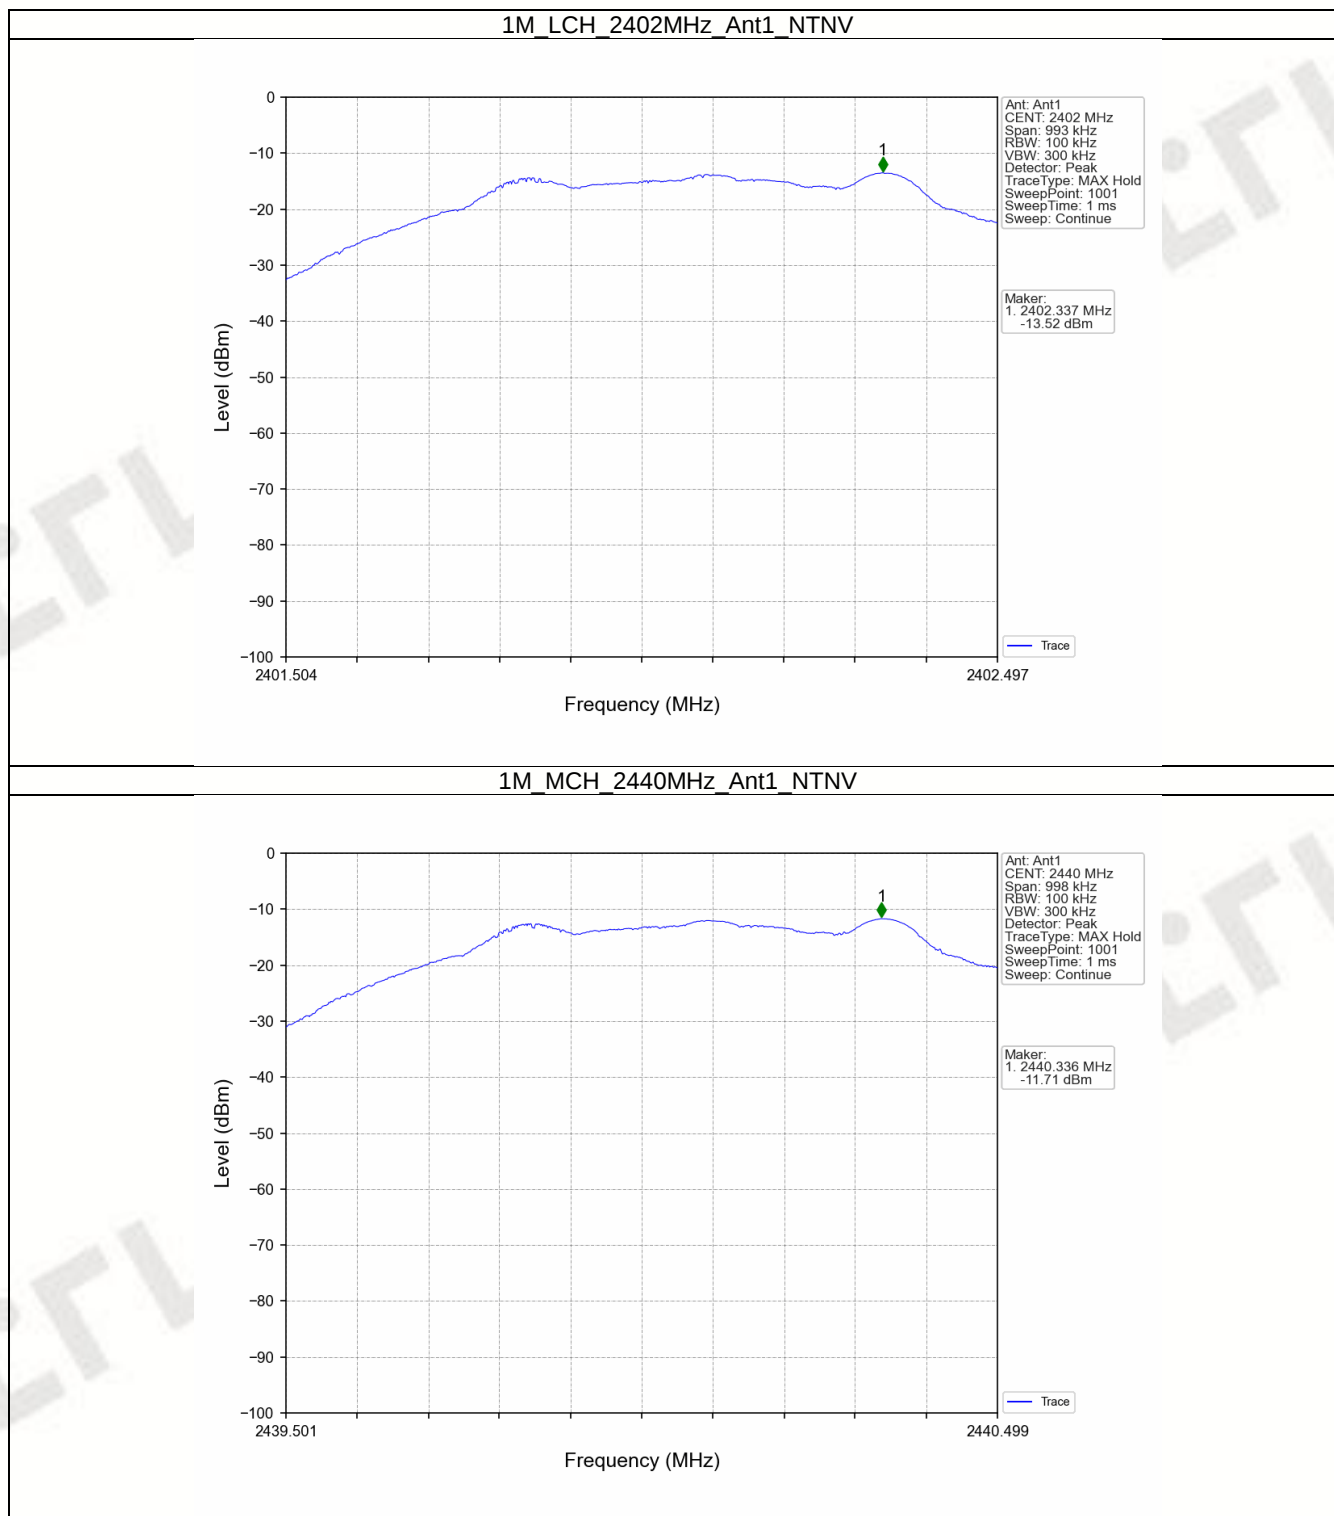

FCCID: 2AC9N-1686200-MIC

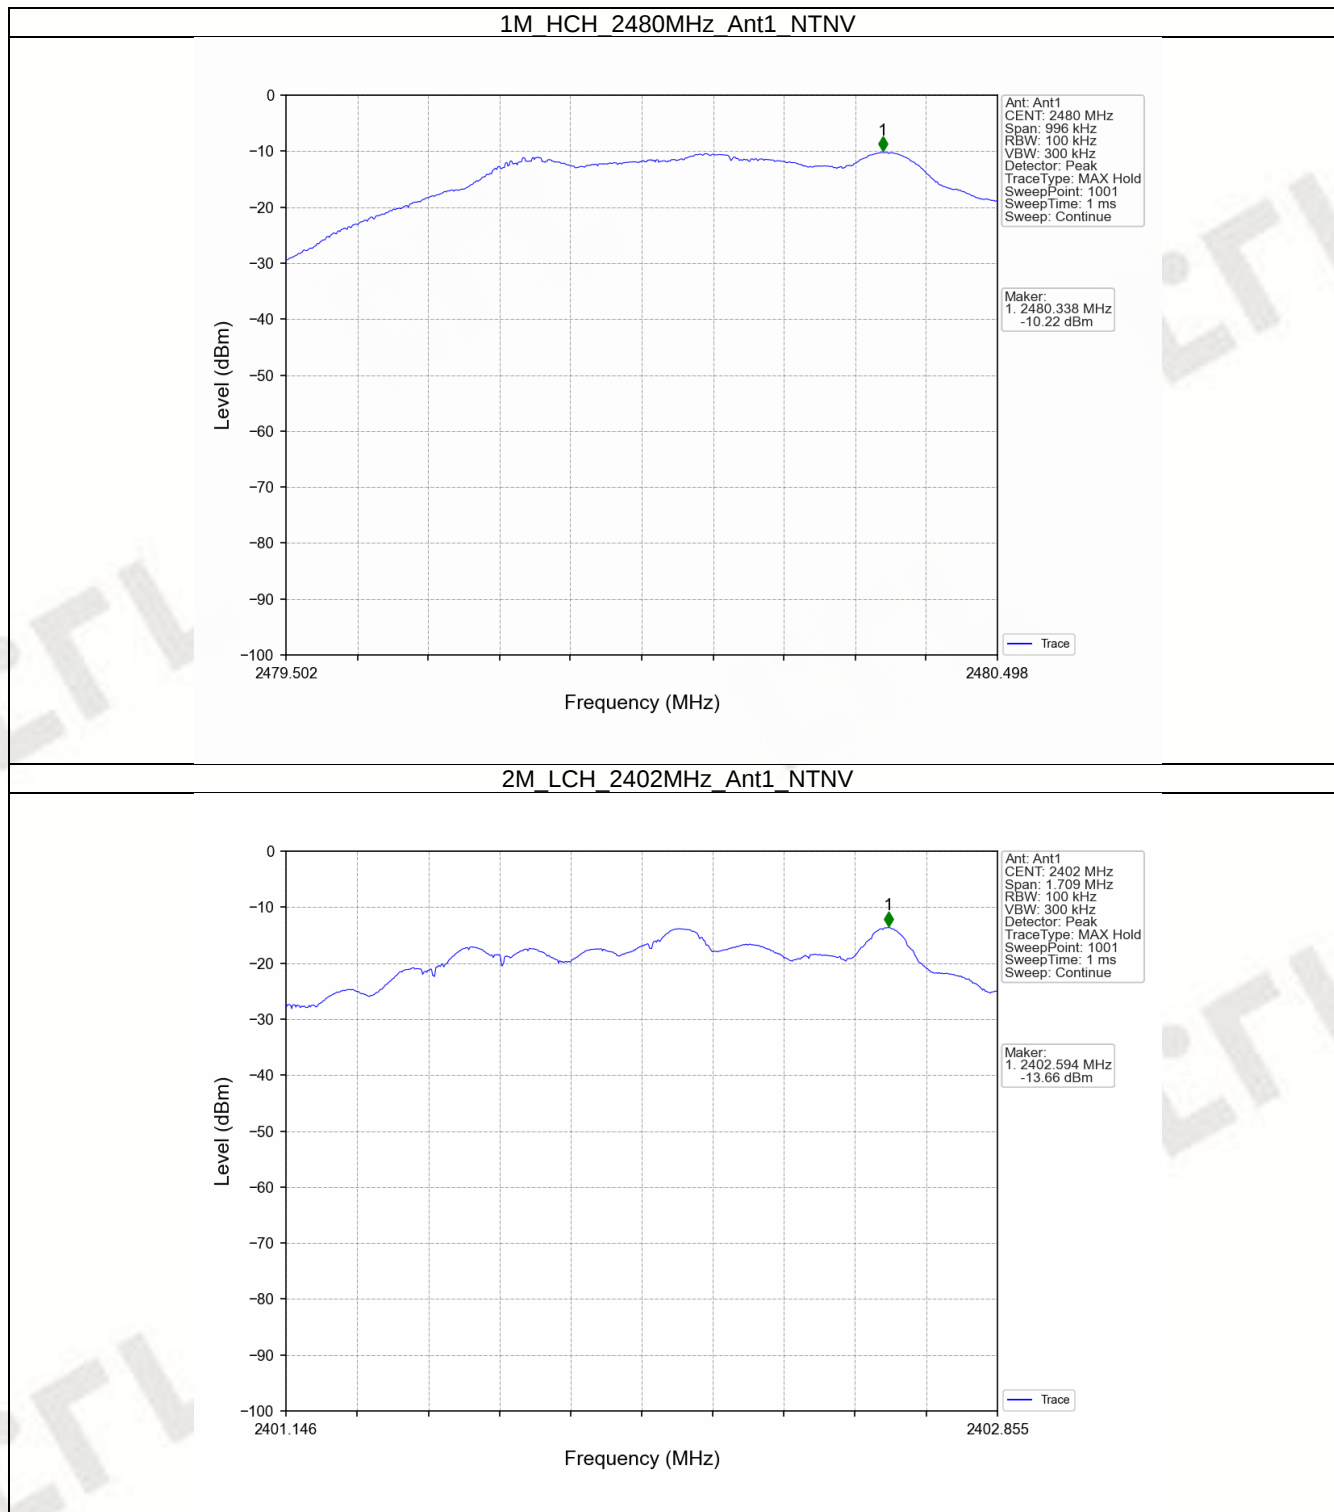


FCCID: 2AC9N-1686200-MIC

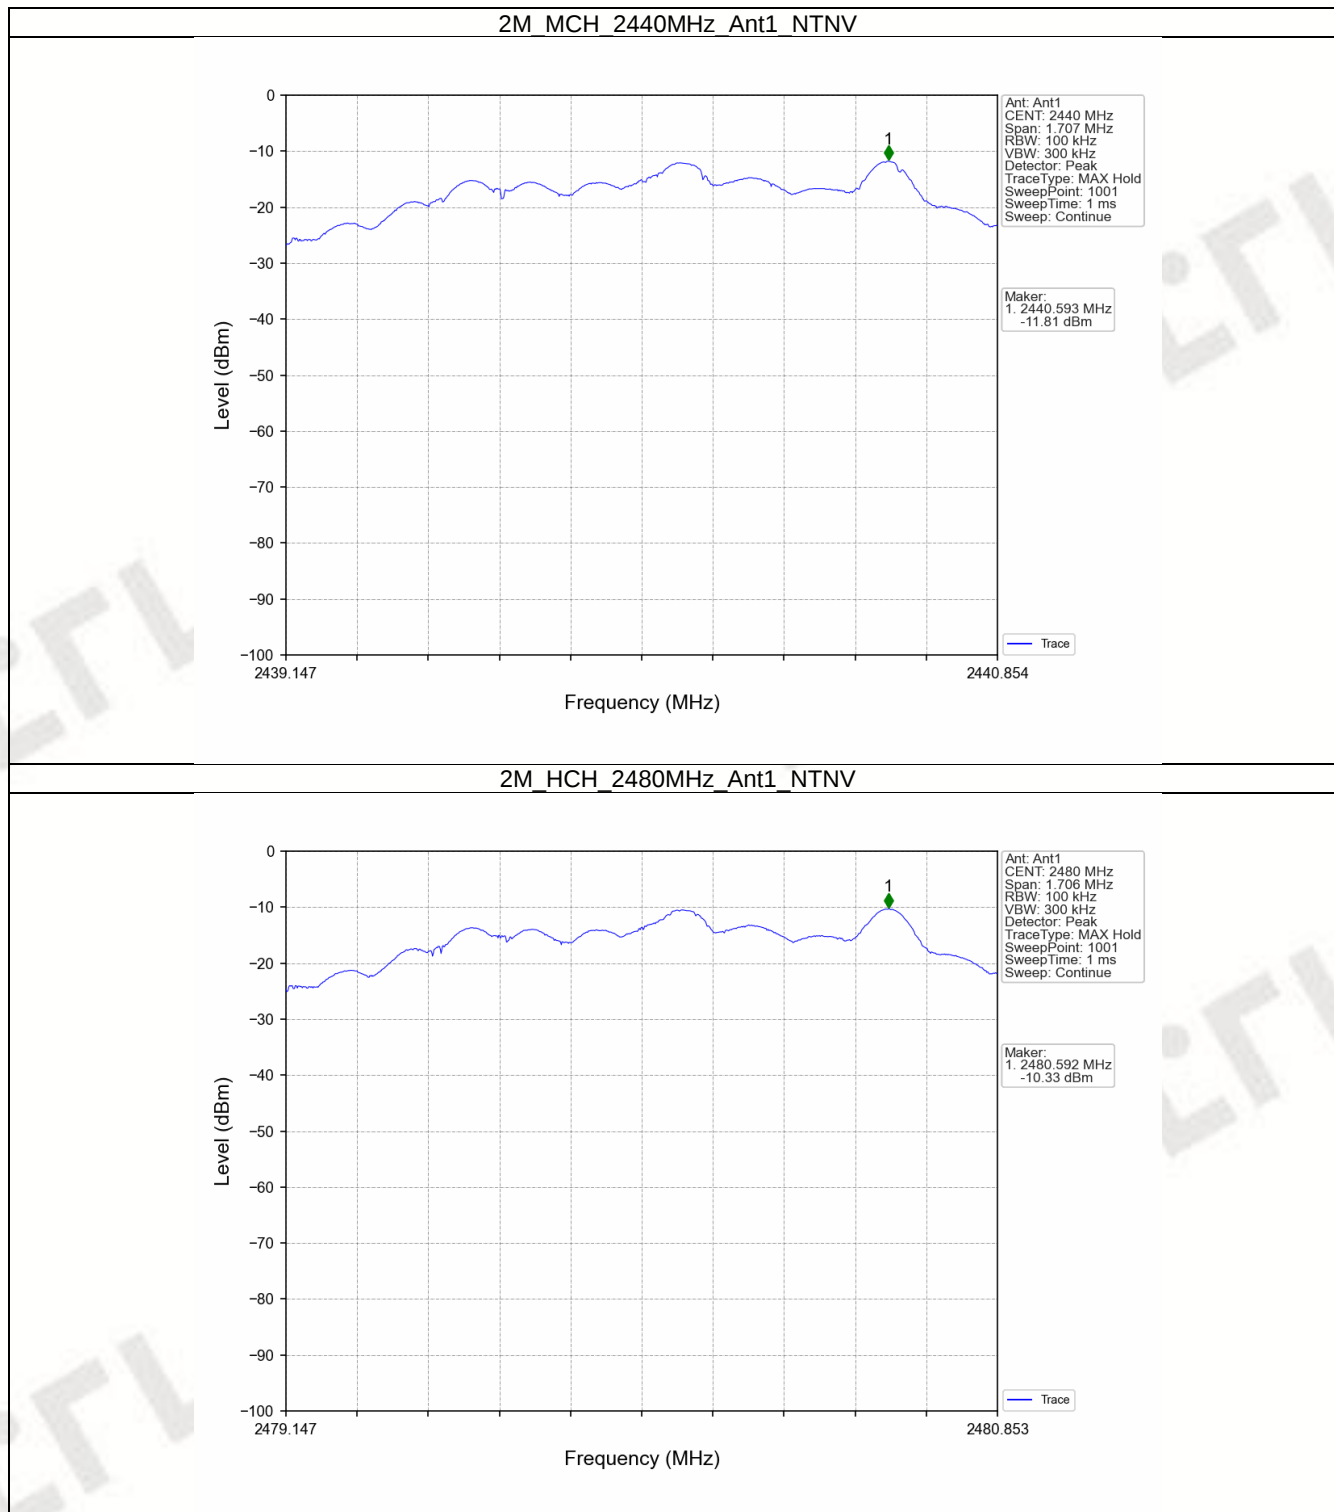


FCCID: 2AC9N-1686200-MIC


4.2.2 CSE

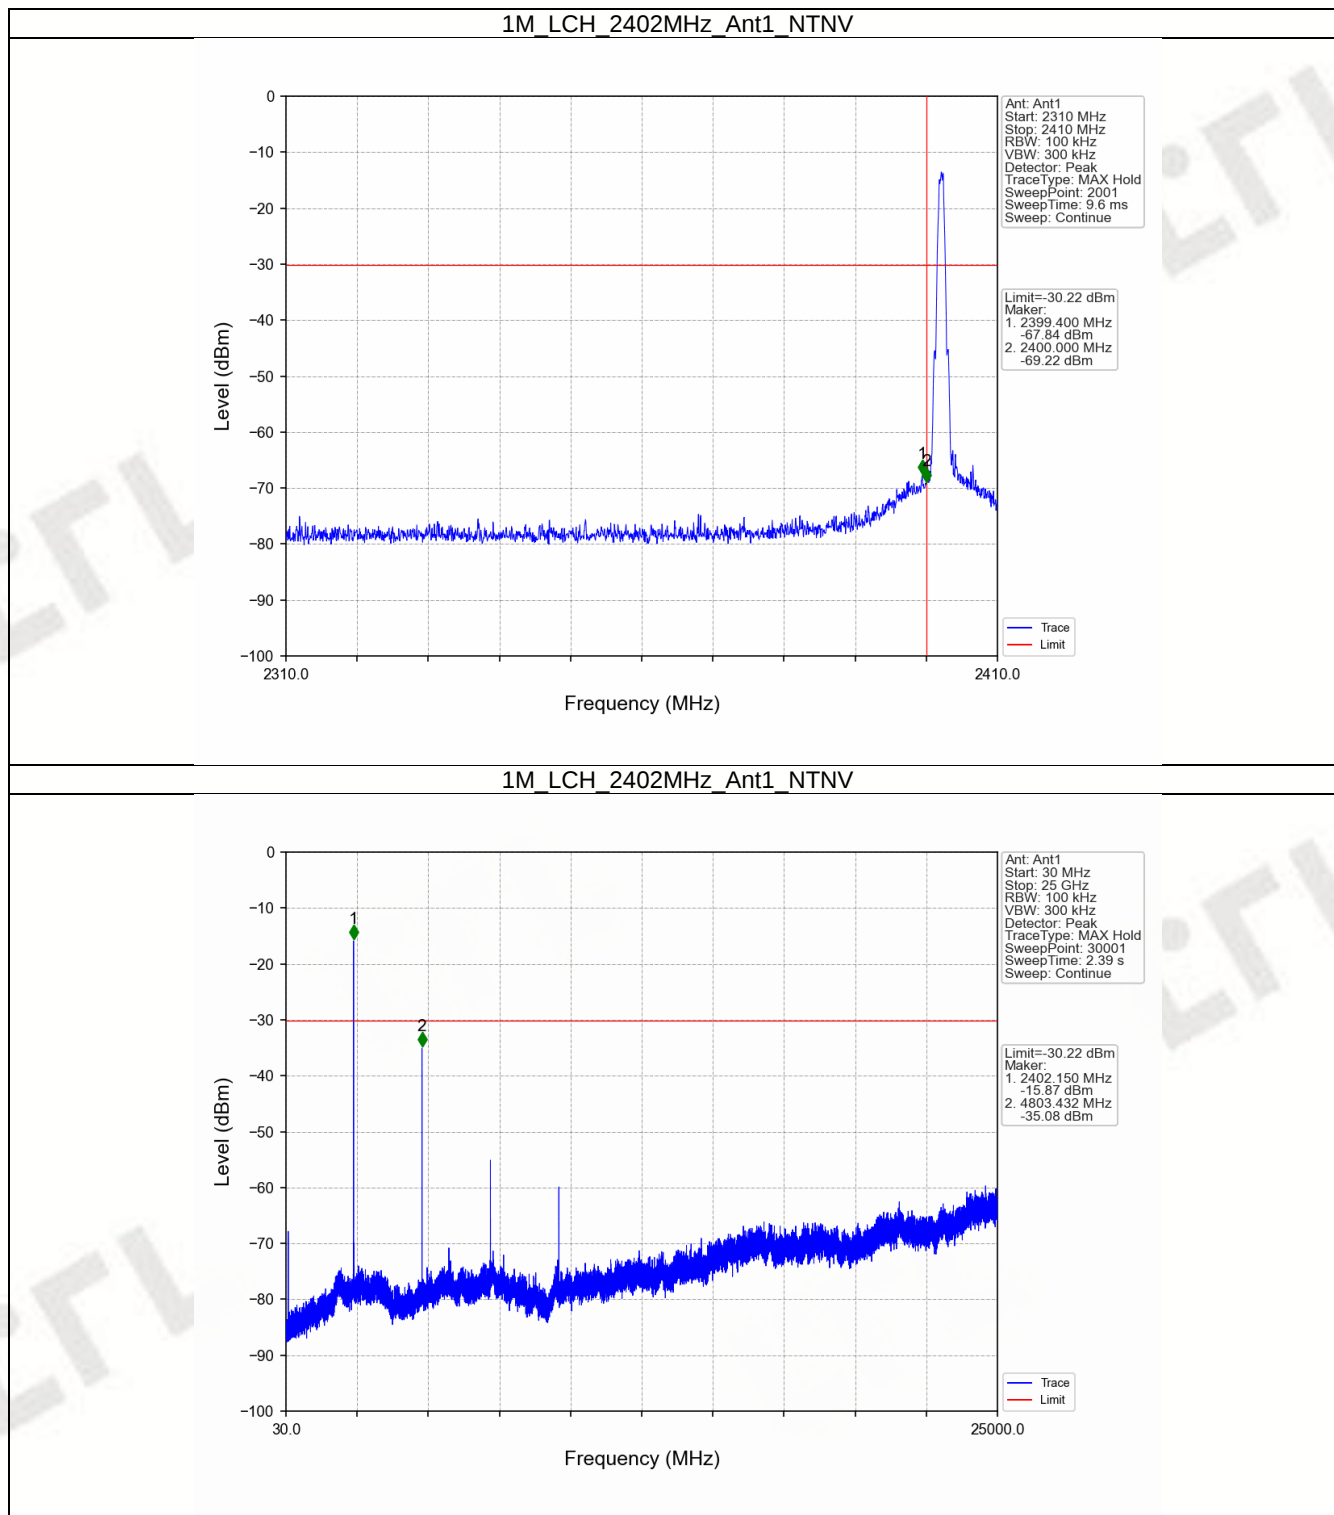


FCCID: 2AC9N-1686200-MIC

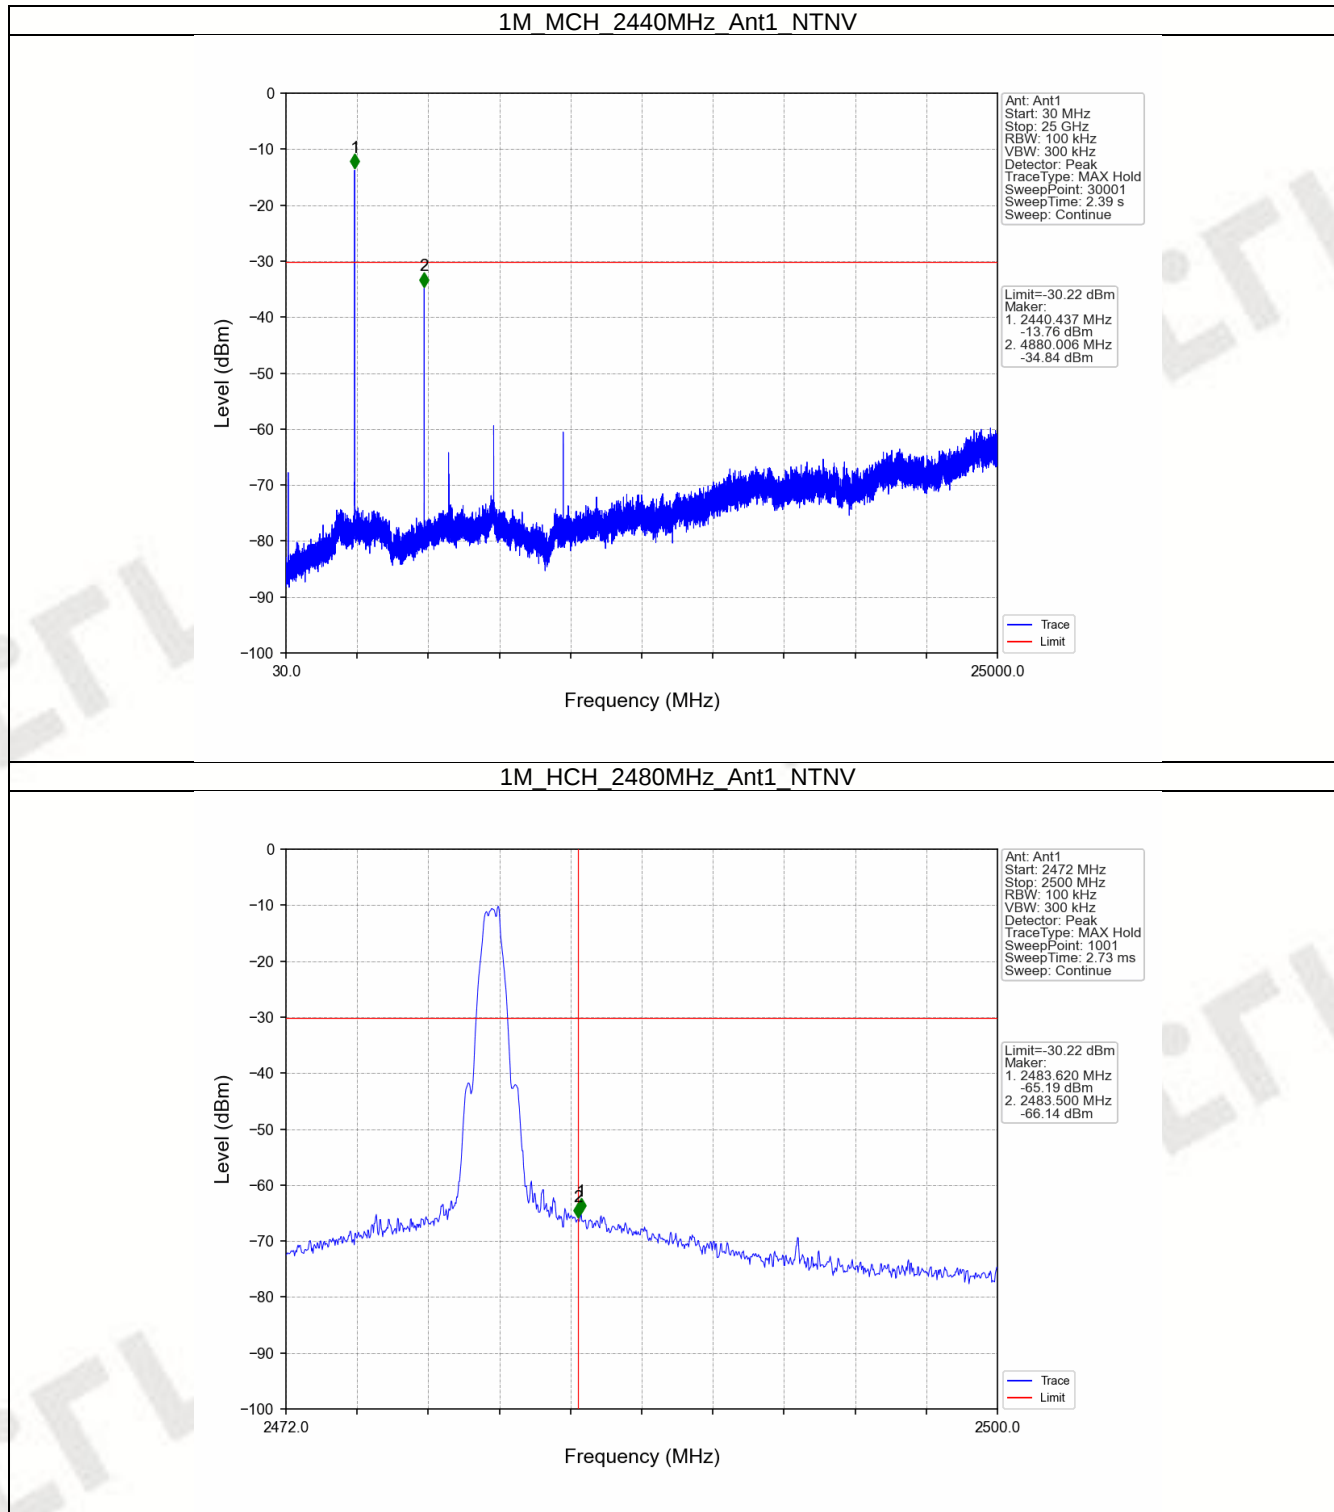

FCCID: 2AC9N-1686200-MIC

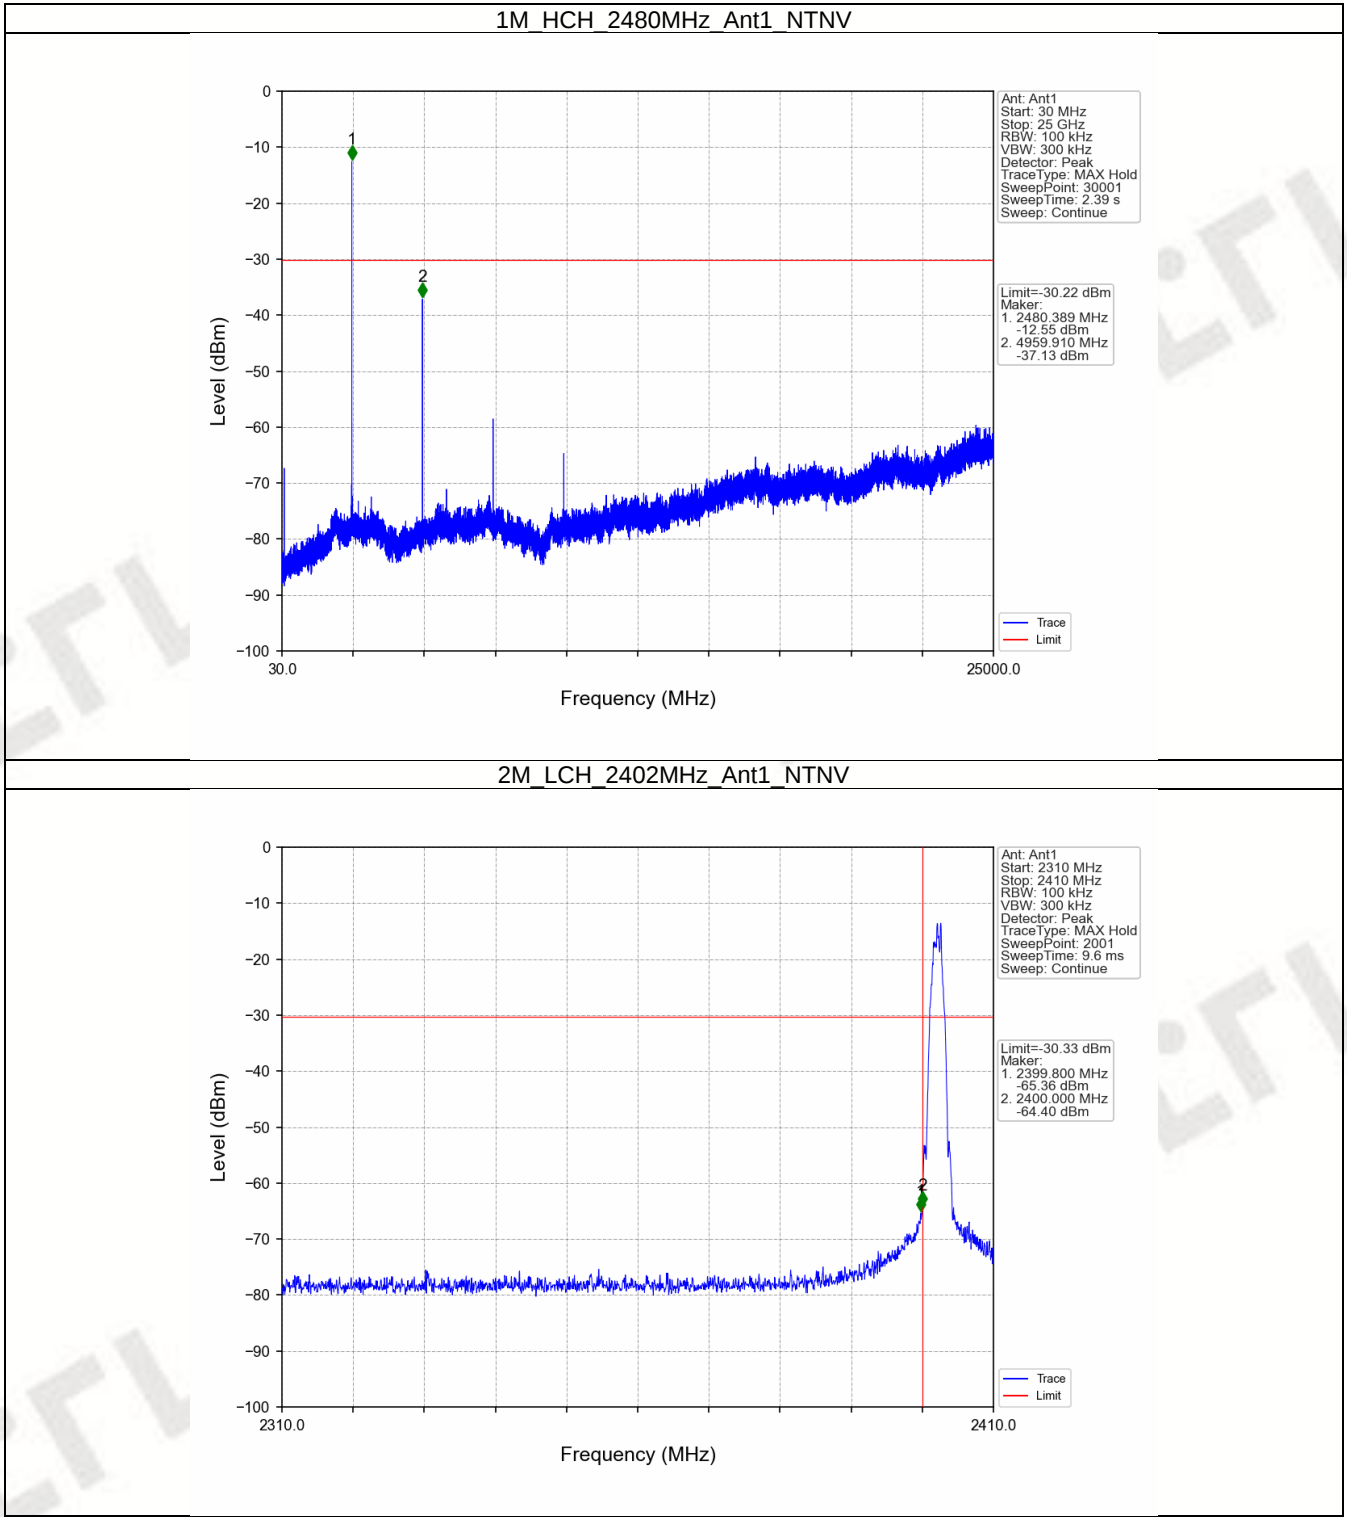

FCCID: 2AC9N-1686200-MIC

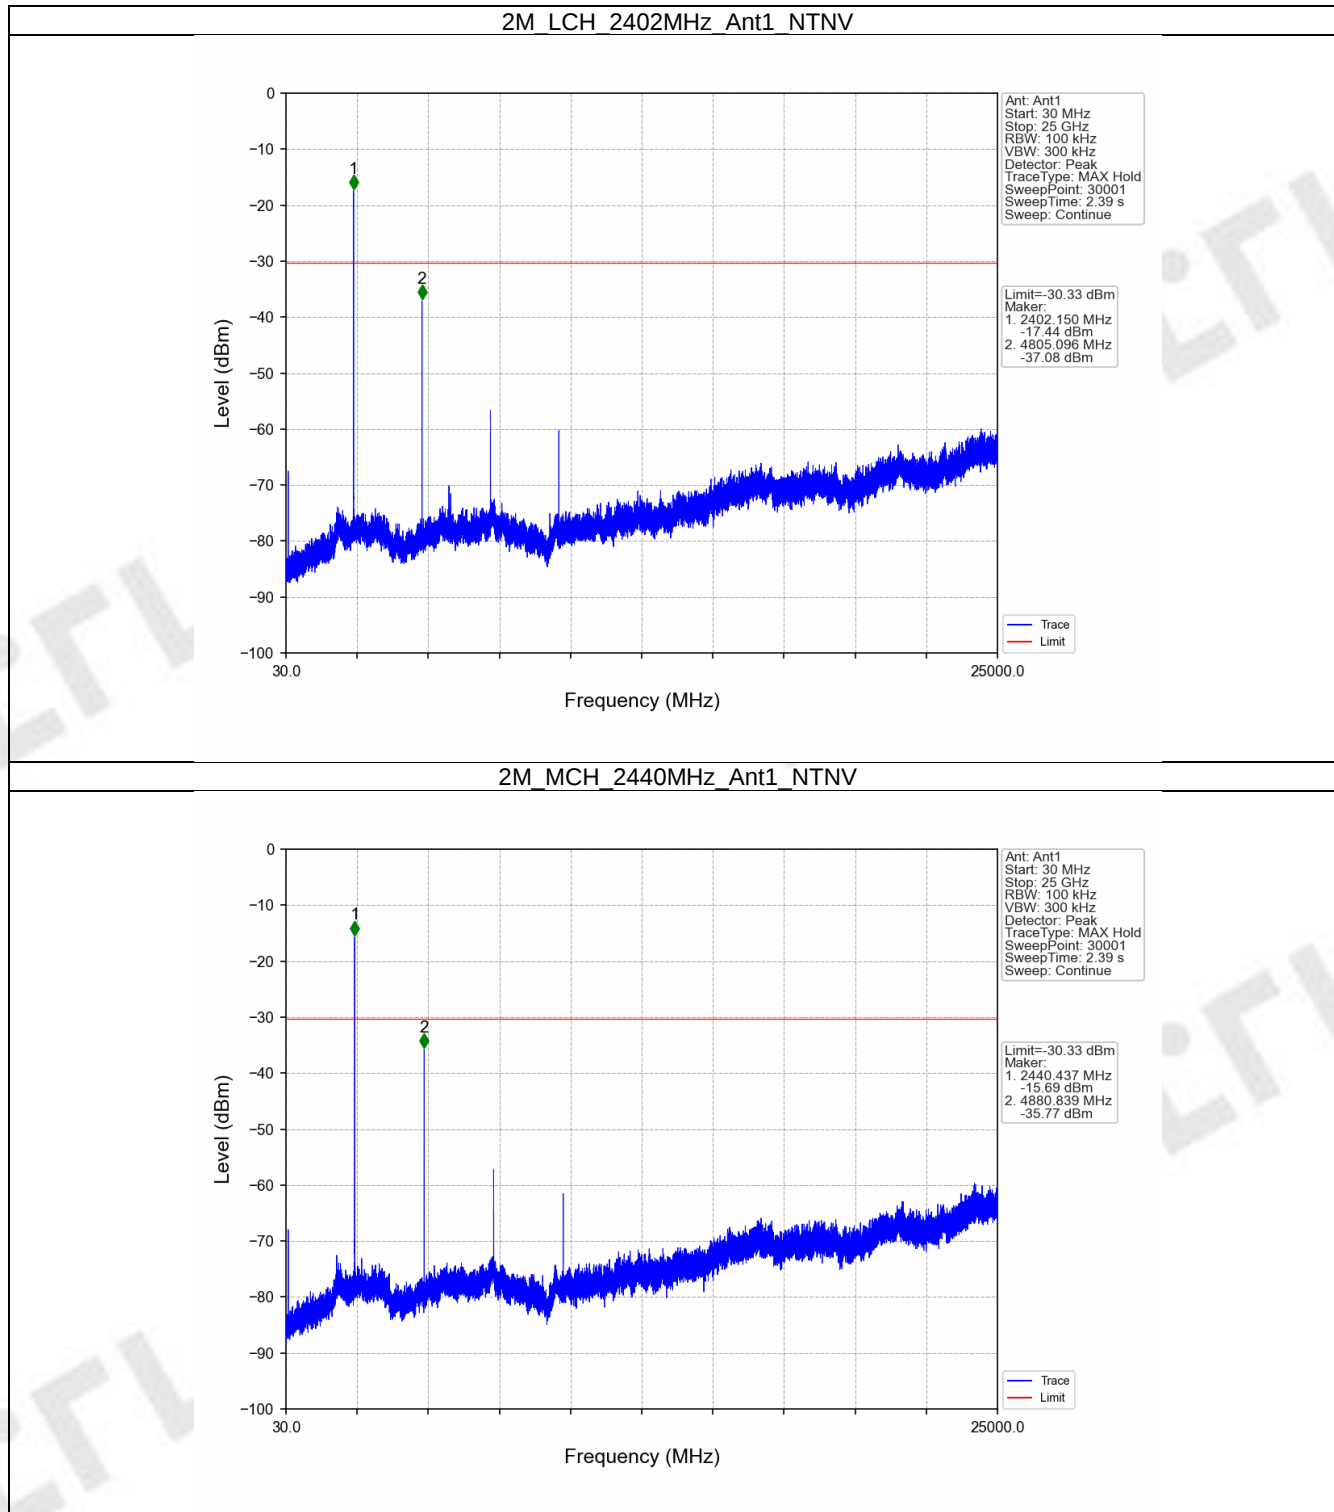

FCCID: 2AC9N-1686200-MIC

