

# FCC Test Report

Report No.: AGC11758241013FR01

FCC ID	:	2A482-PM139
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Baseus Bass BD1 Bean-shaped Bluetooth Earbuds
BRAND NAME	:	baseus
MODEL NAME	:	PM139
APPLICANT	:	Shenzhen Baseus Technology Co., Ltd.
DATE OF ISSUE	:	Nov. 28, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Nov. 28, 2024	Valid	Initial Release	



# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	9
2.9 Equipment Modifications	
2.10 Antenna Requirement	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	
4. System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	14
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	17
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	17
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	



9. Radiated Spurious Emission	
9.1 Measurement Limit	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	60
9.4 Measurement Result	61
10. Number of Hopping Frequency Measurement	70
10.1 Provisions Applicable	70
10.2 Measurement Procedure	70
10.3 Measurement Setup (Block Diagram of Configuration)	70
10.4 Measurement Result	70
11. Time of Occupancy (Dwell Time) Measurement	72
11.1 Provisions Applicable	72
11.2 Measurement Procedure	72
11.3 Measurement Setup (Block Diagram of Configuration)	72
11.4 Measurement Result	72
12. Frequency Separation Measurement	76
12.1 Provisions Applicable	76
12.2 Measurement Procedure	76
12.3 Measurement Setup (Block Diagram of Configuration)	76
12.4 Measurement Result	76
13. AC Power Line Conducted Emission Test	
13.1 Measurement Limit	78
13.2 Measurement Setup (Block Diagram of Configuration)	78
13.3 Preliminary Procedure of Line Conducted Emission Test	79
13.4 Final Procedure of Line Conducted Emission Test	79
13.5 Measurement Results	79
Appendix I: Photographs of Test Setup	80
Appendix II: Photographs of Test EUT	80



# **1. General Information**

Shenzhen Baseus Technology Co., Ltd.
2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Shenzhen Baseus Technology Co., Ltd.
2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
N/A
N/A
Baseus Bass BD1 Bean-shaped Bluetooth Earbuds
baseus
PM139
N/A
N/A
Oct. 17, 2024
Oct. 17, 2024 to Nov. 28, 2024
No any deviation from the test method
Normal
Pass
AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jouk Gai

Jack Gui (Project Engineer)

Nov. 28, 2024

Reviewed By

lin.

Calvin Liu (Reviewer)

Nov. 28, 2024

Approved By

Angela Li (Authorized Officer)

Nov. 28, 2024



# 2. Product Information

# 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BR 🖾 GFSK, EDR 🖾 $\pi$ /4-DQPSK, 🖾 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	Right earphone: 3.781dBm; Left earphone: 3.382dBm;
Hardware Version	V1.3
Software Version	V1.0
Antenna Designation	FPC Antenna
Antenna Gain	Right earphone: -3.14dBi; Left earphone: -3.52dBi;
Power Supply	DC 3.7V by battery or DC 5V by adapter
Note:	

The EUT includes left and right channel earphones, the schematic diagram is the same, but the PCB Layout is different. The RF output power of each earphone has been tested and recorded in the report. For other test items, the right earphone has been tested and recorded in this report, which is the worst case.

# 2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
2400~2483.5MHz	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402 + 1k MHz, k = 0,, 78; "f "is the operating frequency (MHz); "k" is the operating channel.					



# 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A482-PM139**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

# 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	2 FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

# 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

# 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



# 2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20	76	02	19		21	64	75
								1	1		
			li						:		
						; ;			i i		
				i		<u></u>		1	i		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



# 2.8 Special Accessories

Not available for this EUT intended for grant.

# **2.9 Equipment Modifications**

Not available for this EUT intended for grant.

# 2.10 Antenna Requirement

#### Standard Requirement

# 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

# 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

## EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -3.14dBi.



# 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

# 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

# A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

# FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

# IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



# **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

# **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$
Uncertainty of Dwell Time	$U_c = \pm 2 \%$



# 3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
$\boxtimes$	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\square$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
$\square$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
$\square$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
$\bowtie$	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
$\square$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Lised Faunment No. L. Lest Faunment I. Manutacturer I. Model No. L. Serial No. L.						Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A			
$\boxtimes$	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0			
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
$\square$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



# 4. System Test Configuration

# 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

# 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System

Radiated Emission Configure:



# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☑ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	RISYM	USB-TTL	-	

Test Accessories Come From The Manufactu	rer
--	-----

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1				-	



# 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



# 5. Description of Test Modes

	Summary table of Test Cases				
	Data Rate / Modulation				
Test Item					
	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)				
Radiated & Conducted Test Cases					
AC Conducted Emission	Not applicable				
Note: 1. Only the result of the worst case was recorded in the report, if no other cases. 2. The battery is full-charged during the test. 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode. Software Setting Diagram FCC Assist 1.0.22 F					



# 6. RF Output Power Measurement

# **6.1 Provisions Applicable**

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.


# 6.2 Measurement Procedure

⊠For Peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$  RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 6.3 Measurement Setup (Block Diagram of Configuration)

For peak power test setup

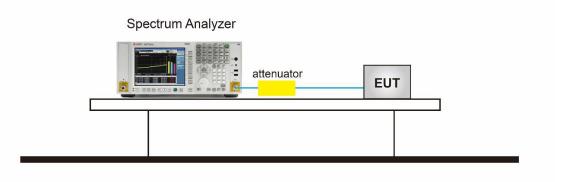



# 6.4 Measurement Result

#### **Right earphone:**


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	2.725	≤21	Pass		
GFSK	2441	2.044	≤21	Pass		
	2480	0.968	≤21	Pass		
	2402	3.425	≤21	Pass		
π /4-DQPSK	2441	2.861	≤21	Pass		
	2480	1.778	≤21	Pass		
	2402	3.781	≤21	Pass		
8DPSK	2441	3.166	≤21	Pass		
	2480	2.107	≤21	Pass		






# **Test Graphs of Conducted Output Power**




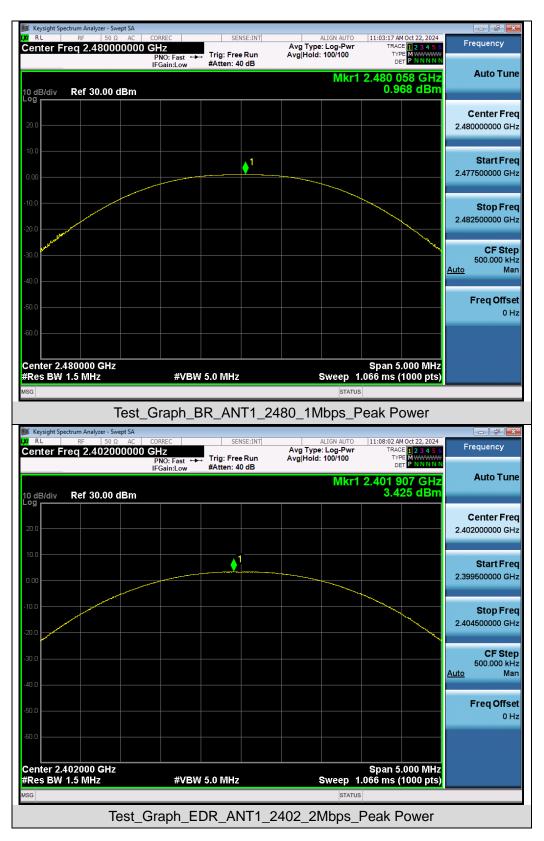




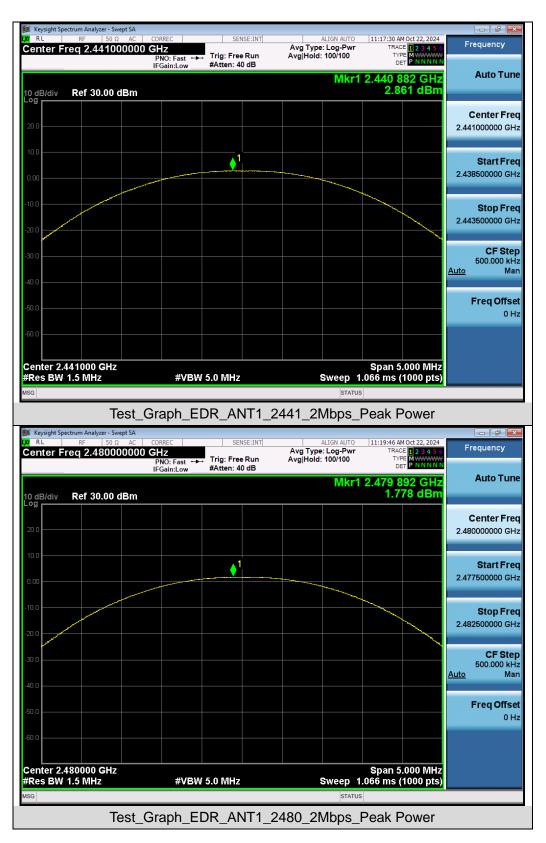



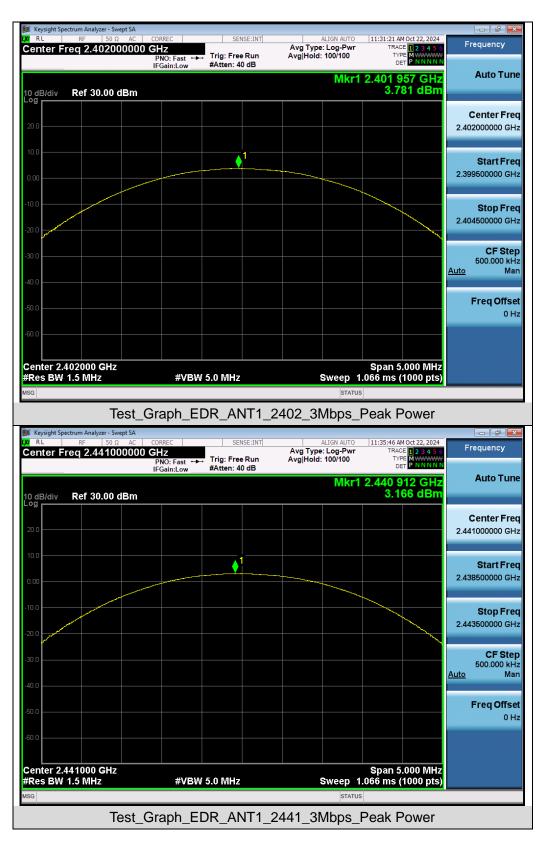



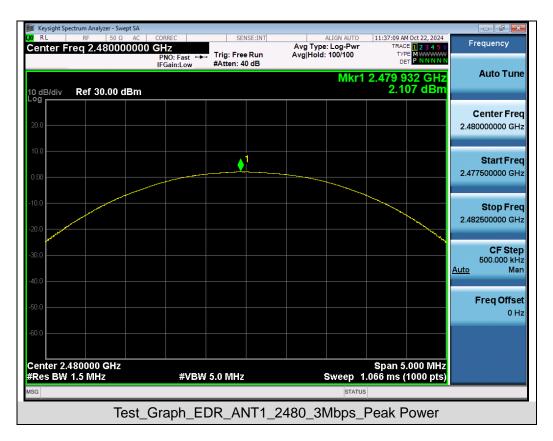



# Left earphone:


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	2.362	≤21	Pass		
GFSK	2441	1.919	≤21	Pass		
	2480	1.030	≤21	Pass		
	2402	3.061	≤21	Pass		
π /4-DQPSK	2441	2.662	≤21	Pass		
	2480	1.810	≤21	Pass		
	2402	3.382	≤21	Pass		
8DPSK	2441	3.015	≤21	Pass		
	2480	2.146	≤21	Pass		






# **Test Graphs of Conducted Output Power**




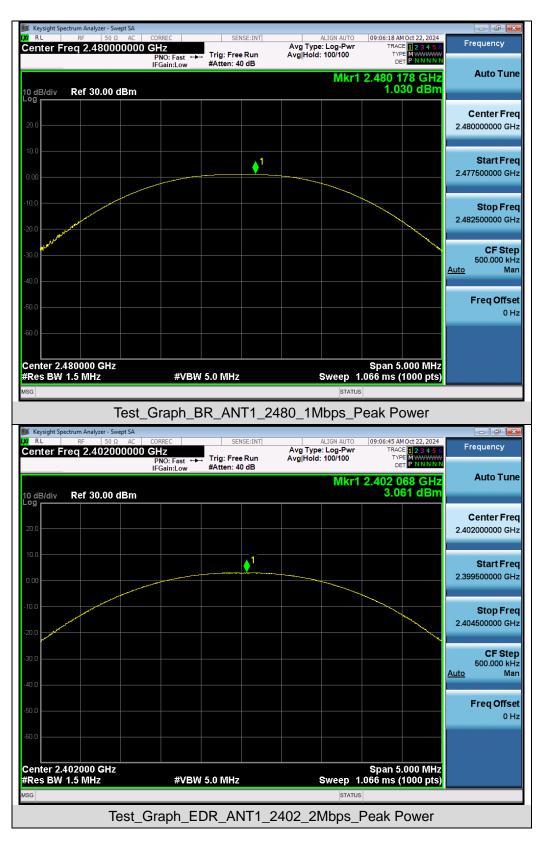




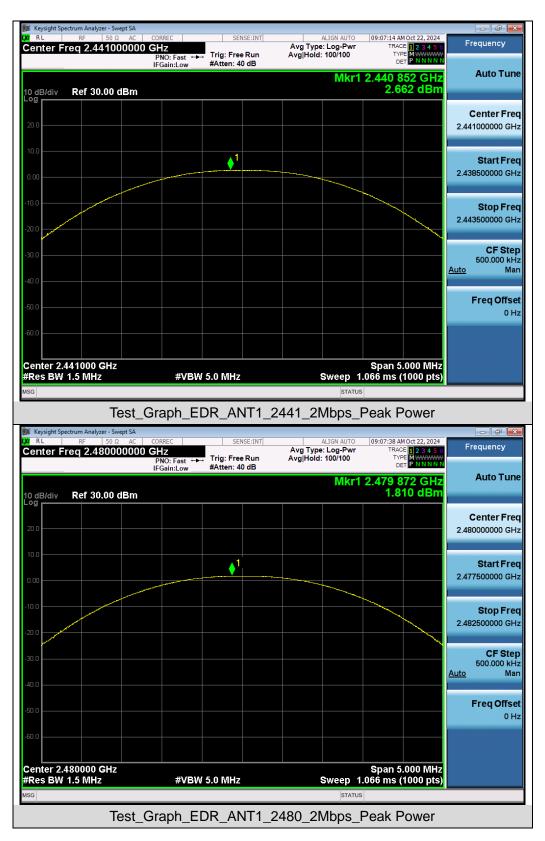



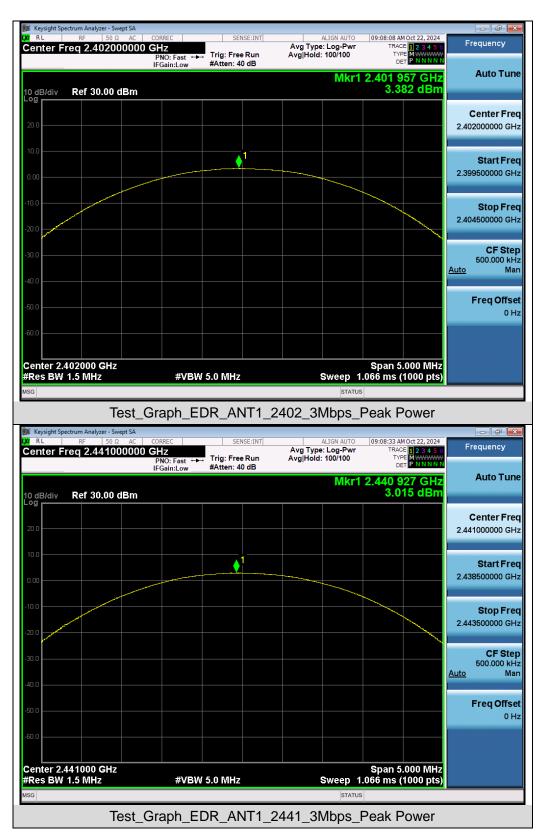



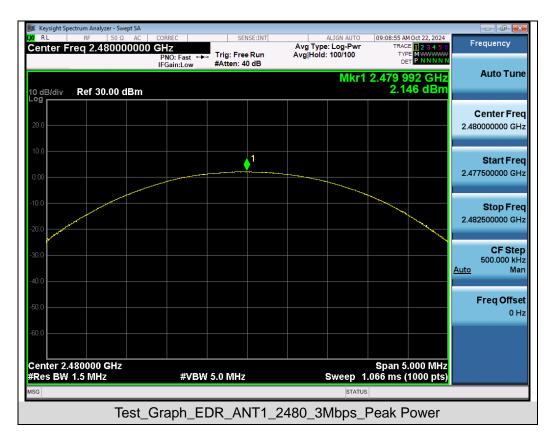



# 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

# 7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

# 7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW  $\geq$  1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW  $\geq$  3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

# 7.3 Measurement Setup (Block Diagram of Configuration)

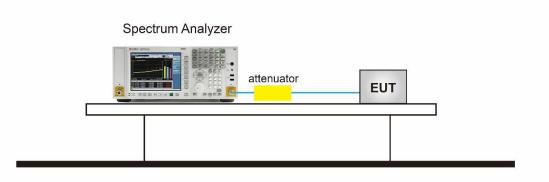




#### 7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
	2402	0.899	1.027	N/A	Pass	
GFSK	2441	0.898	1.024	N/A	Pass	
	2480	0.894	1.003	N/A	Pass	
	2402	1.193	1.314	N/A	Pass	
π /4-DQPSK	2441	1.187	1.314	N/A	Pass	
	2480	1.184	1.313	N/A	Pass	
	2402	1.194	1.301	N/A	Pass	
8DPSK	2441	1.192	1.297	N/A	Pass	
	2480	1.186	1.294	N/A	Pass	


# Test Graphs of Occupied Bandwidth and -20 Bandwidth

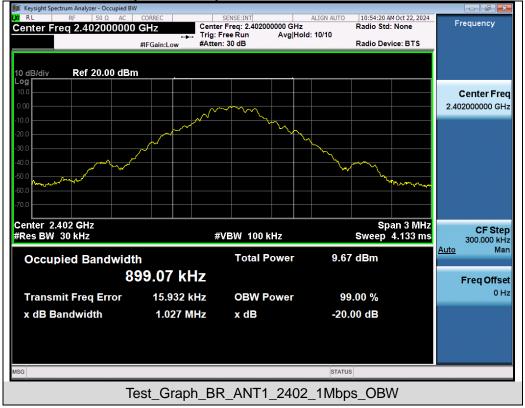









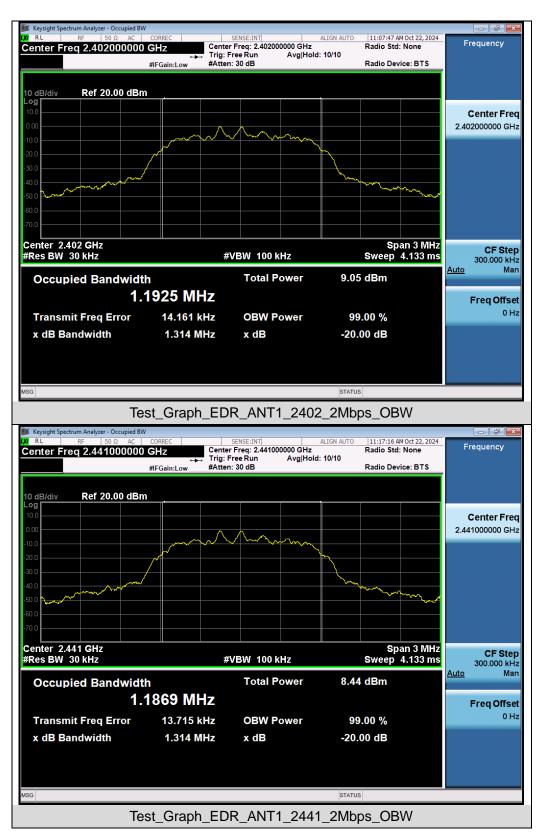



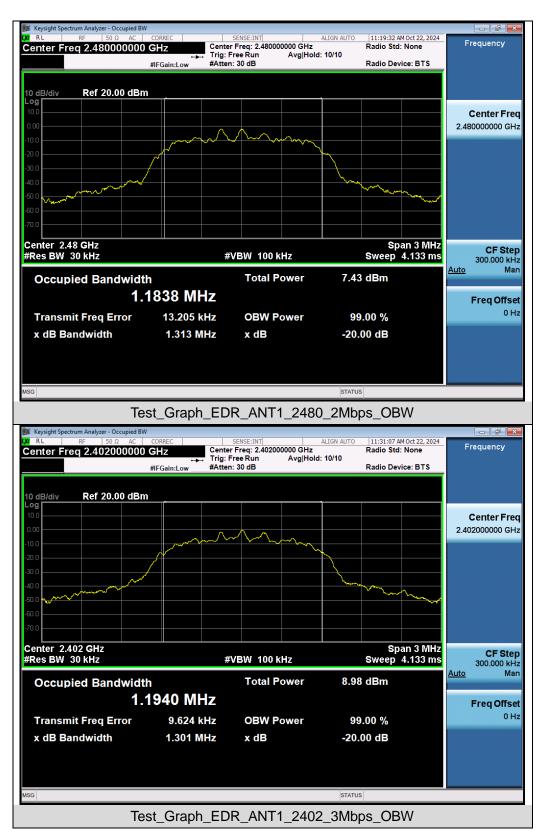



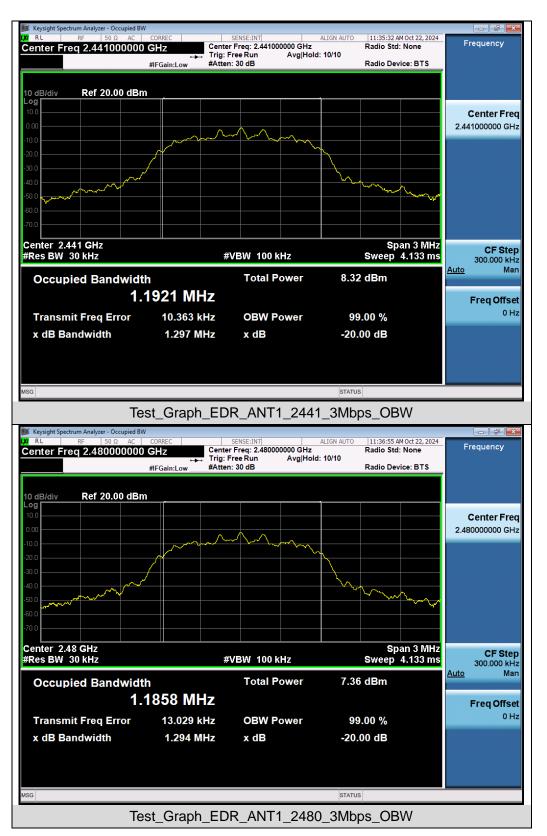



# 8. Conducted Band Edge and Out-of-Band Emissions

# 8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

# 8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:

- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

# 8.3 Measurement Setup (Block Diagram of Configuration)

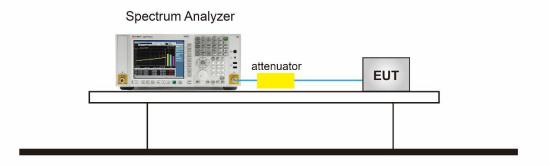




#### **8.4 Measurement Results**




#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




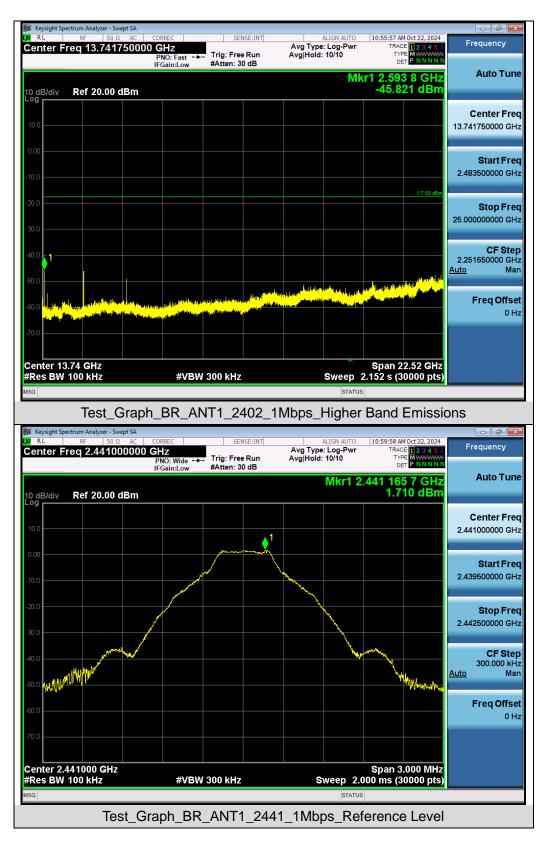




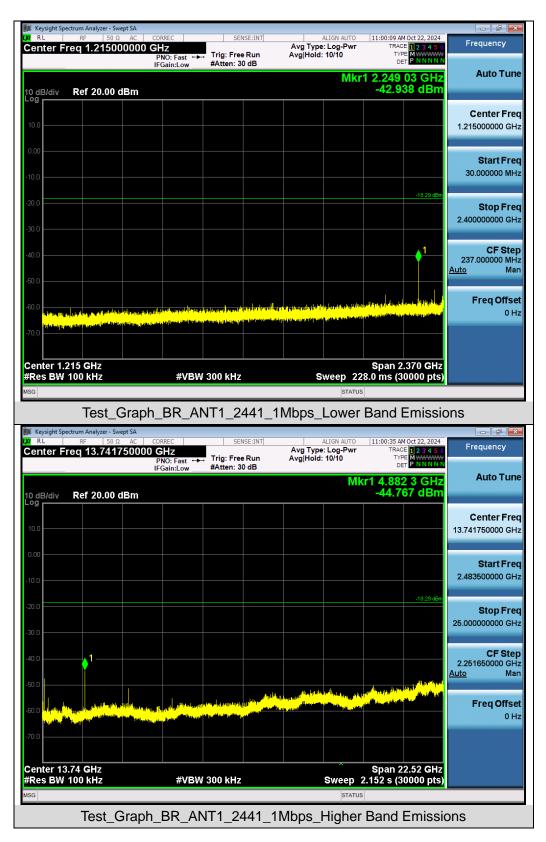




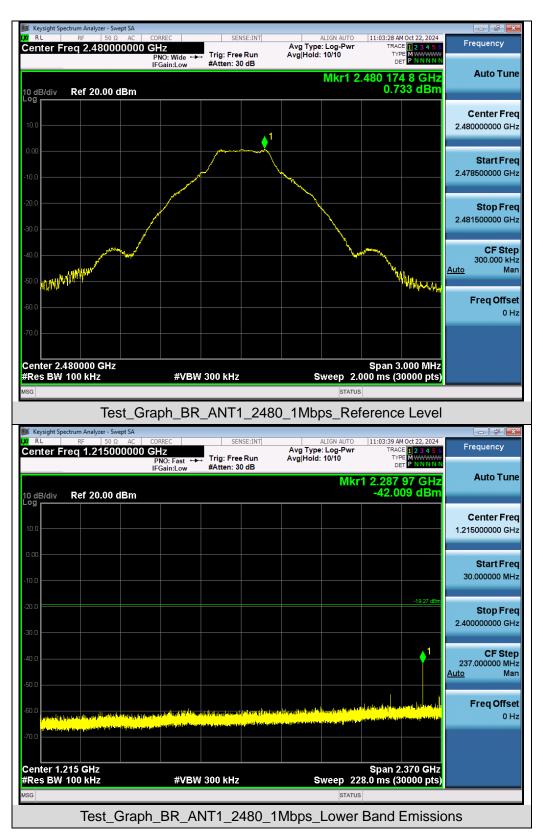




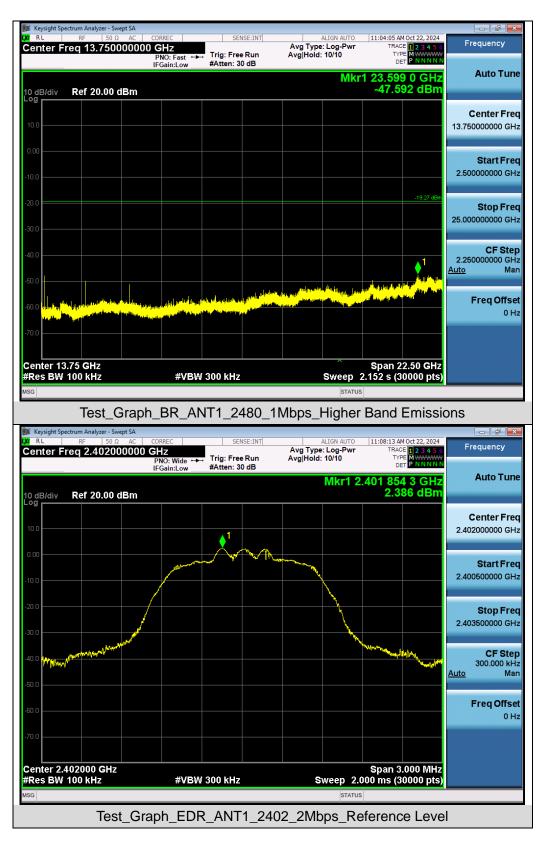




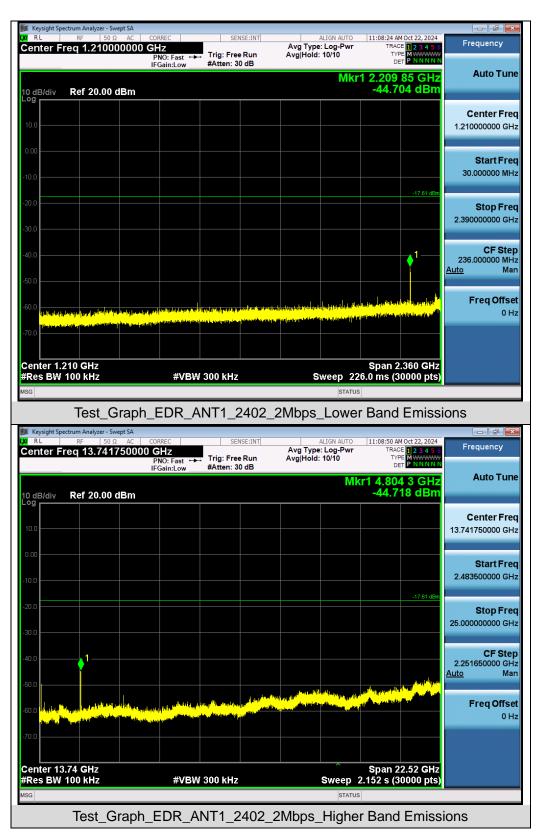




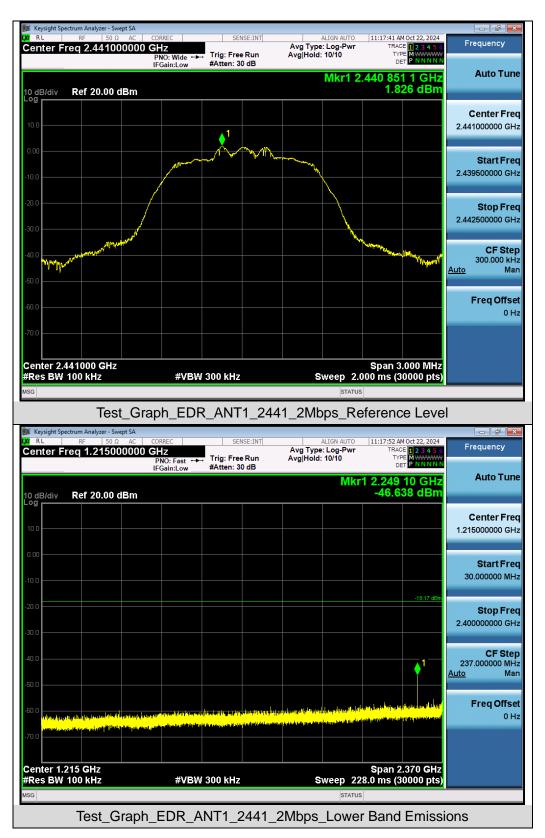




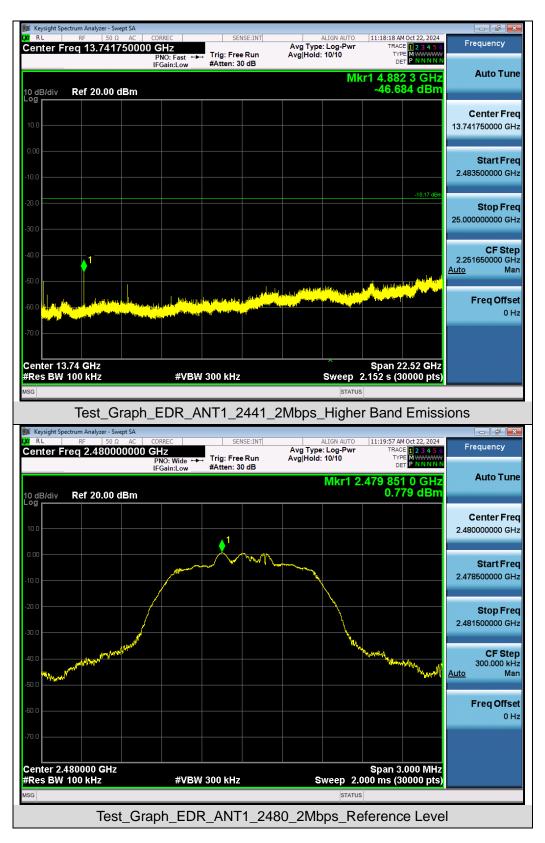




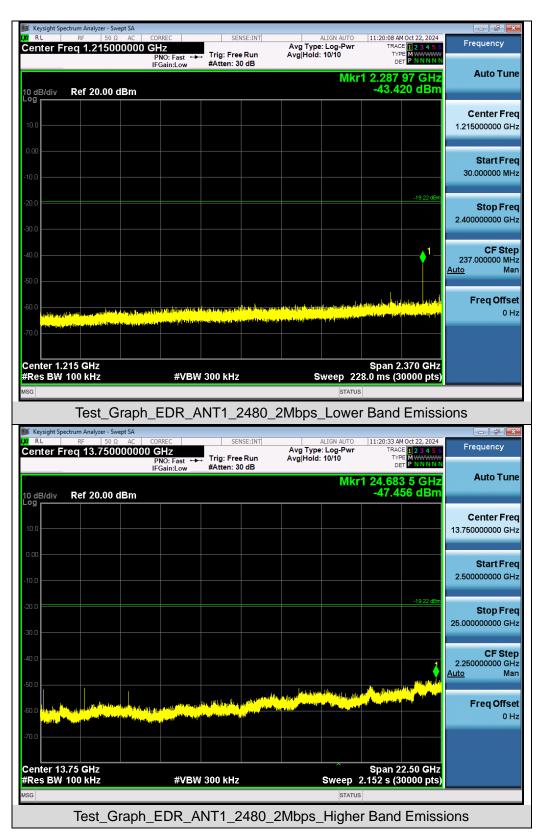




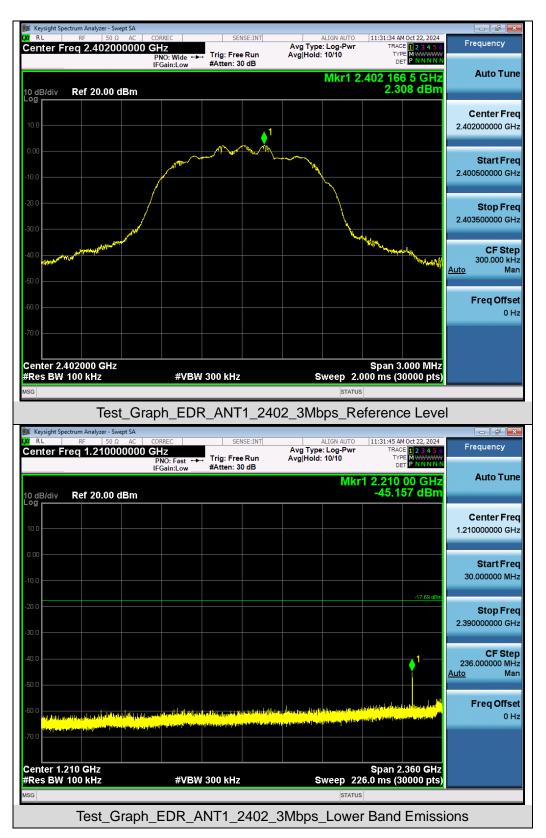




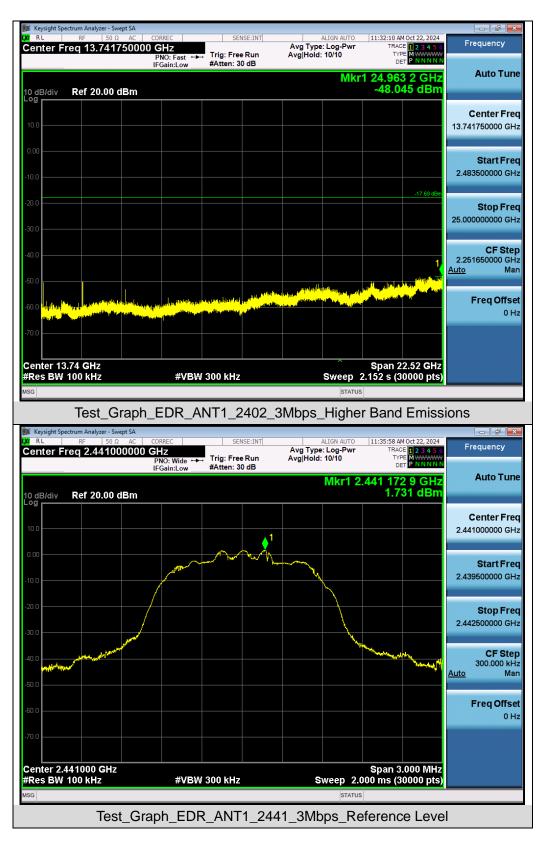




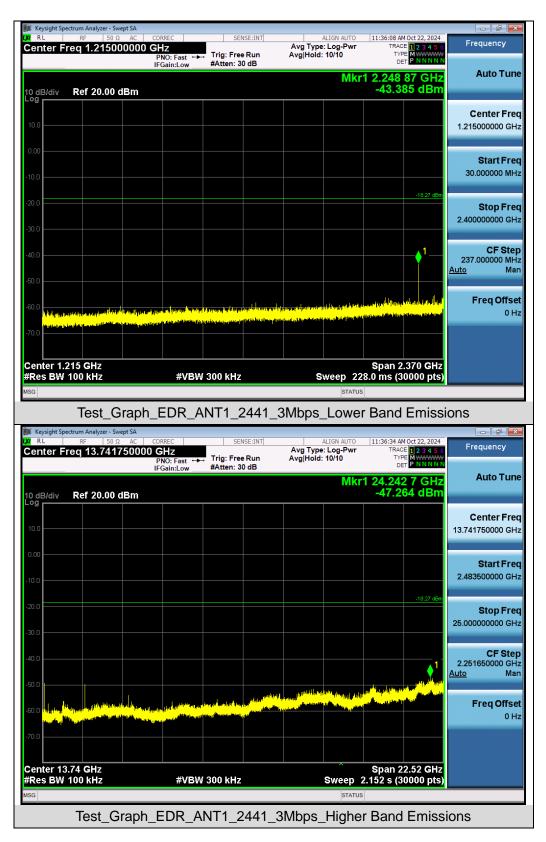




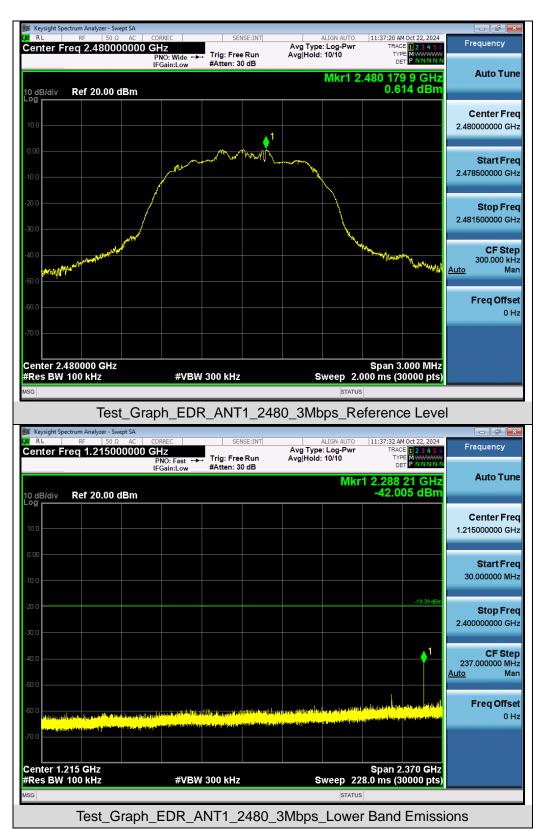



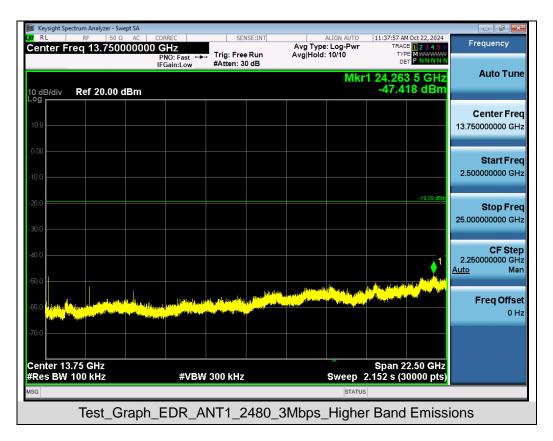




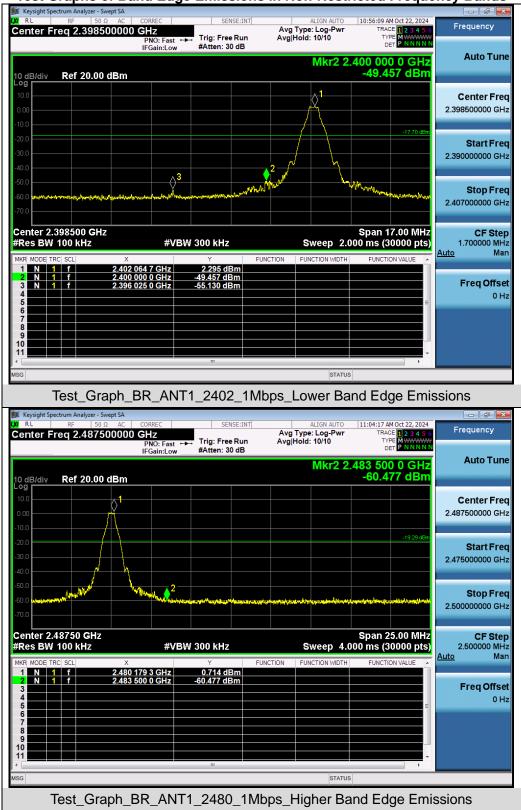


## Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




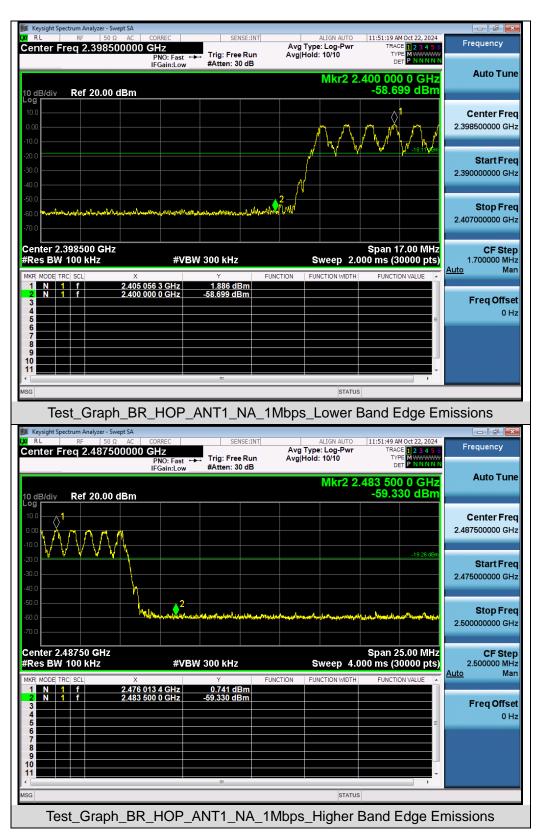




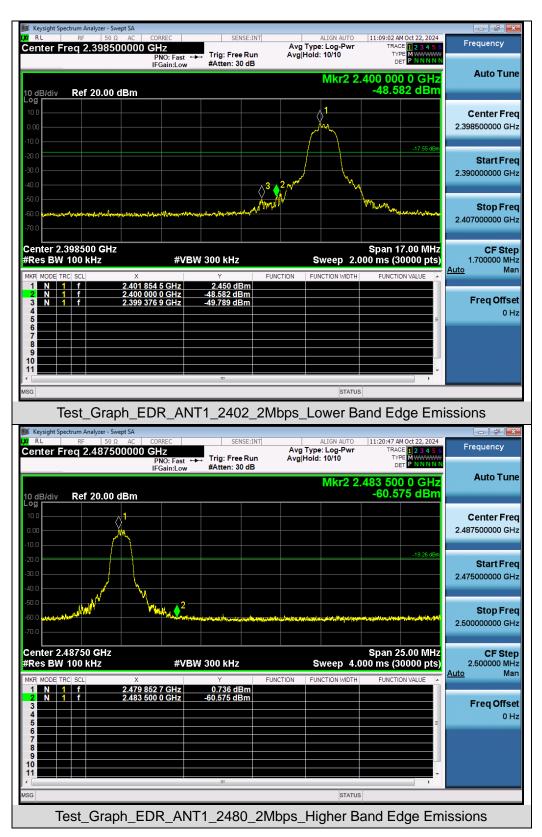




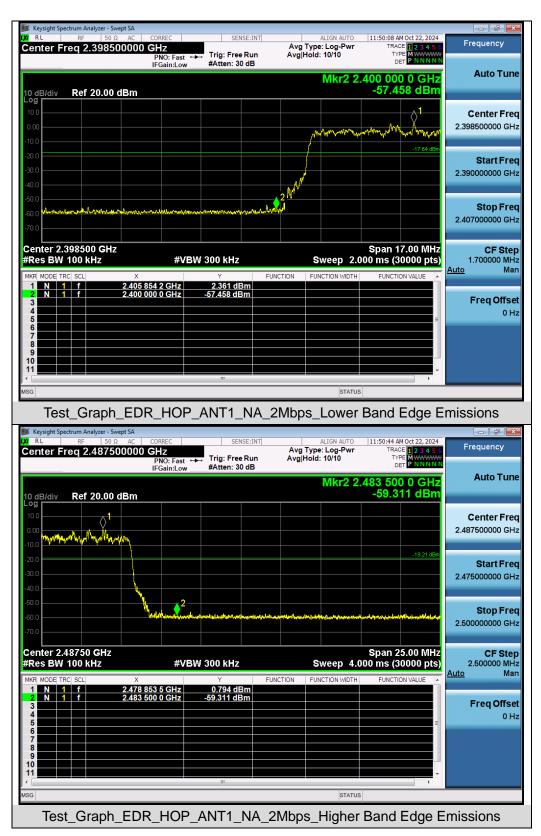



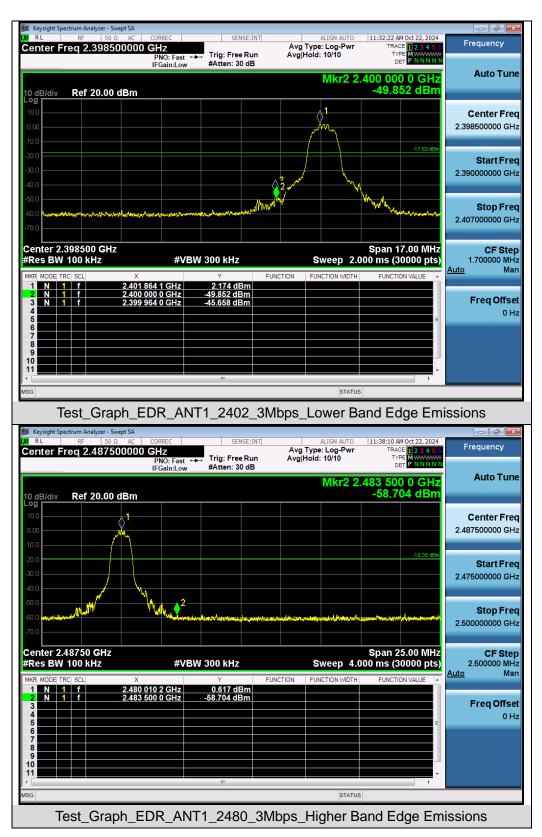



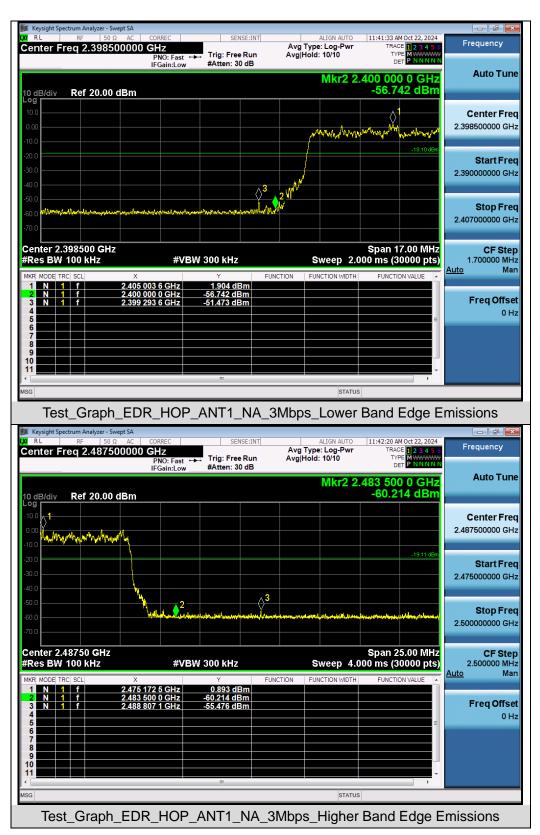





# 9. Radiated Spurious Emission

# 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

# 9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz				
Start ~Stop Trequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average				

#### The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



# Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

# • Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

# <u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




# 9.3 Measurement Setup (Block Diagram of Configuration)

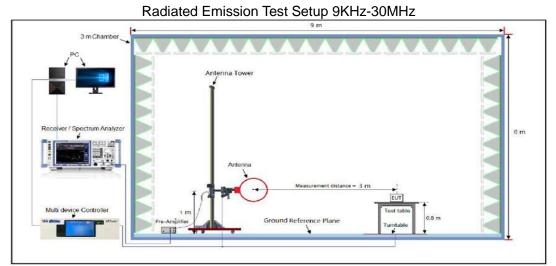

### Radiated Emission Test Setup 30MHz-1000MHz

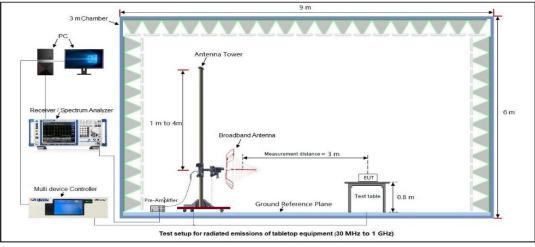

### Radiated Emission Test Setup Above 1000MHz

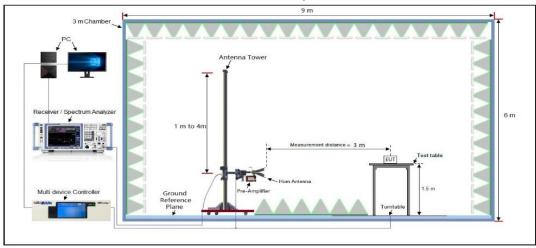

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



### 9.4 Measurement Result

# **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz												
EUT N	lame		Baseus Bass BD1 Bean-shaped Bluetooth Earbuds						ame	PM139		
Tempe	erature	22.6	<b>22.6</b> ℃						Humidity	56.3%	56.3%	
Press	ure	960ł	۱Pa					Test Volt	age	Normal Vo	oltage	
Test N	lode	Mod	e 7					Antenna	Polarity	Horizontal		
	72.0	dBuV/m										
										Limit: — Margin: —		
	_									F		
							_					
	-						_					
	32								4 5	manne		
				2		3			Added The Contraction of the	Nec miny		
		July May have	NAMAMAN AND MANY	ň.	when the state of the second	Well reversed and which a service of	Anter	nnennenth				
	Mar	ANY T				e e e						
	-8											
	30.00	00 40	0 50 60	70	80	(MHz)		300	400 500 6	00 700 1000.0	00	
Final <b>F</b>	Final Data List											
	Freq	.	Level		Factor	Limit		Margin	Height	Angle	<b>D L</b> <i>i</i>	
NO.	[MHz		[dBµV/m]		[dB]	[dBµV/m]		[dB]	[cm]	[°]	Polarity	
1	40.275	57	19.16		13.88	40.00		20.84	100	132	Horizontal	
2	69.844	19	20.23		12.80	40.00		19.77	100	147	Horizontal	
3	119.01	80	21.61		16.39	43.50		21.89	100	205	Horizontal	
4	447.98	21	30.51		24.82	46.00		15.49	100	89	Horizontal	
5	566.62	21	31.33		24.23	46.00		14.67	100	116	Horizontal	
6	893.85	67	36.62	$\uparrow$	31.03	46.00		9.38	100	138	Horizontal	



			Rad	liated Emiss	ion Test Resu	ilts at 30MH	z-1GHz			
EUT Na	ame	Base Earbi		D1 Bean-sh	aped Bluetootl	Model Na	Model Name		PM139	
Tempe	rature	22.6°	0			Relative	Humidity	56.3%	56.3%	
Pressu	re	960h	Pa			Test Volta	age	Normal Vo	Itage	
Test Mo	ode	Mode	97			Antenna	Polarity	Vertical		
	72.0	dBu∀/m				I				
								Limit: — Margin: —		
	32	page of page of the	sthat and the state of the stat	Million Marken and Marke	puterdram Burgeturtaberratary	uger Mart Martha Mary Mar	Mun Marine			
	-8 30.0			70 80	(MHz)	300		0 700 1000.00	10	
Final Da	ata List									
Final Da	Freq		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
		<u>ː]</u>	Level [dBµV/m] 22.86	Factor [dB] 17.02	Limit [dBµV/m] 40.00	Margin [dB] 17.14	Height [cm] 100	Angle [°] 96	Polarity Vertical	
NO.	Freq [MHz	:] 79	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	-	
NO. 1	Freq [MHz 52.20	2] 79 857	[dBµV/m] 22.86	[dB] 17.02	[dBµV/m] 40.00	[dB] 17.14	[cm] 100	[°] 96	Vertical	
NO. 1 2	Freq [MHz 52.20 149.48	2] 79 357 358	[dBµV/m] 22.86 23.40	[dB] 17.02 18.20	[dBµV/m] 40.00 43.50	[dB] 17.14 20.1	[cm] 100 100	[°] 96 214	Vertical Vertical	
NO. 1 2 3	Freq [MHz 52.20 149.48 449.55	:] 79 557 558 329	[dBµV/m] 22.86 23.40 31.19	[dB] 17.02 18.20 25.67	[dBµV/m] 40.00 43.50 46.00	[dB] 17.14 20.1 14.81	[cm] 100 100 100	[°] 96 214 157	Vertical Vertical Vertical	

# **RESULT: Pass**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been pre-tested. The mode 7 is the worst case and recorded in the report.



UT Name	Baseus Bas Bluetooth Ea	s BD1 Bea arbuds	n-shaped	Mode	el Name	PM1		PM139		
emperature	<b>22.6</b> ℃	22.6°C					56.3% Normal Voltage			
ressure	960hPa	960hPa			Test Voltage					
est Mode	Mode 7 Antenna			nna Polarity		Horizor	ntal			
Frequency	Meter Reading	Factor	Emissior	n Level	Limits	Ν	largin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)		(dB)	value Type		
4804.000	46.28	0.08	46.3	36	74	-	27.64	peak		
4804.000	37.41	0.08	37.4	19	54	-	16.51	AVG		
7206.000	41.36	2.21	43.5	57	74		30.43	peak		
7206.000	31.29	2.21	33.	5	54		-20.5	AVG		
Remark:										
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.					_		
	ame Baseus Bass BD1 Bean-shaped Model Name PM139									
UT Name			n-shaped	Mode	el Name		PM139			
UT Name	Baseus Bas Bluetooth Ea 22.6°C		n-shaped		el Name ive Humidity		PM139 56.3%			
	Bluetooth Ea		n-shaped	Relat			56.3%	Voltage		
emperature	Bluetooth Ea           22.6℃		n-shaped	Relat Test V	ive Humidity		56.3%	Voltage		
emperature ressure est Mode	Bluetooth Ea         22.6 °C         960hPa         Mode 7	arbuds		Relat Test V Anter	ive Humidity Voltage nna Polarity		56.3% Normal Vertical	Voltage		
emperature ressure est Mode Frequency	Bluetooth Ea 22.6°C 960hPa Mode 7 Meter Reading	arbuds Factor	Emission	Relat	ive Humidity Voltage nna Polarity Limits		56.3% Normal Vertical	Voltage		
emperature ressure est Mode Frequency (MHz)	Bluetooth Ea 22.6℃ 960hPa Mode 7 Meter Reading (dBµV)	Factor (dB)	Emissior (dBµV	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m)		56.3% Normal Vertical /argin (dB)	Voltage		
emperature ressure est Mode Frequency (MHz) 4804.000	Bluetooth Ea           22.6 °C           960hPa           Mode 7	Factor (dB) 0.08	Emission (dBµV 46.5	Relat Test Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	-	56.3% Normal Vertical /argin (dB) 27.45	Voltage		
emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	Bluetooth Ea           22.6 °C           960hPa           Mode 7           Meter Reading           (dBµV)           46.47           37.95	Factor (dB) 0.08 0.08	Emission (dBµV 46.5 38.0	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	-	56.3% Normal Vertical /argin (dB) 27.45 15.97	Voltage Value Type peak AVG		
emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	Bluetooth Ea           22.6 °C           960hPa           Mode 7           Meter Reading           (dBµV)           46.47           37.95           41.46	Factor (dB) 0.08 0.08 2.21	Emission (dBµV 46.5 38.0 43.6	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	-	56.3% Normal Vertical /argin (dB) 27.45 15.97 30.33	Voltage		
emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	Bluetooth Ea           22.6 °C           960hPa           Mode 7           Meter Reading           (dBµV)           46.47           37.95	Factor (dB) 0.08 0.08	Emission (dBµV 46.5 38.0	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	-	56.3% Normal Vertical /argin (dB) 27.45 15.97	Voltage Value Type peak AVG		
emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Bluetooth Ea           22.6 °C           960hPa           Mode 7           Meter Reading           (dBµV)           46.47           37.95           41.46	Factor (dB) 0.08 0.08 2.21	Emission (dBµV 46.5 38.0 43.6	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	-	56.3% Normal Vertical /argin (dB) 27.45 15.97 30.33	Voltage		
emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Bluetooth Ea           22.6 °C           960hPa           Mode 7           Meter Reading           (dBµV)           46.47           37.95           41.46	Factor (dB) 0.08 0.08 2.21 2.21	Emission (dBµV 46.5 38.0 43.6 34.5	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	-	56.3% Normal Vertical /argin (dB) 27.45 15.97 30.33	Voltage		

# **Radiated Emissions Test Results Above 1GHz**

# **RESULT: Pass**



Temperature         22.6 °C         Relative Humidity         56.3%           Pressure         960hPa         Test Voltage         Normal Voltage           Test Mode         Mode 8         Antenna Polarity         Horizontal           Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value           MHz         (dBµV)         (dB)         (dBµV/m)         (dB)         Value           4882.000         45.52         0.14         45.66         74         -28.34         pressure           4882.000         38.41         0.14         38.55         54         -15.45         -15.45           7323.000         42.63         2.36         44.99         74         -29.01         pressure           Remark:         Factor         Factor + Cable Loss – Pre-amplifier.         Model Name         PM139           Temperature         22.6°C         Relative Humidity         56.3%           Pressure         960hPa         Test Voltage         Normal Voltage           Remark:         Factor         Relative Humidity         56.3%           Temperature         22.6°C         Relative Humidity         56.3%           Pressure         960hP	Model Name	-shaped	ss BD1 Bean- arbuds		T Name	
Test Mode         Mode 8         Antenna Polarity         Horizontal           Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value           (MHz)         (dBµV)         (dBµV)         (dBµV/m)         (dB	Relative Humic					nperature
Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value           4882.000         45.52         0.14         45.66         74         -28.34         pressure           7323.000         42.63         2.36         44.99         74         -29.01         pressure           7323.000         33.85         2.36         36.21         54         -17.79         pressure           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.         pressure         prestor         p	Test Voltage			960hPa		ssure
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         (dBµV/m)         (dB)         (dB) <th< th=""><th>Antenna Polar</th><th></th><th></th><th>Mode 8</th><th></th><th>t Mode</th></th<>	Antenna Polar			Mode 8		t Mode
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         (dBµV/m)         (dB)         (dB) <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)           4882.000         45.52         0.14         45.66         74         -28.34         p           4882.000         38.41         0.14         38.55         54         -15.45         p           7323.000         42.63         2.36         44.99         74         -29.01         p           7323.000         33.85         2.36         36.21         54         -17.79         p           7323.000         33.85         2.36         36.21         54         -17.79         p           Remark:			Factor		' N	
4882.000         38.41         0.14         38.55         54         -15.45         47323.00           7323.000         42.63         2.36         44.99         74         -29.01         p           7323.000         33.85         2.36         36.21         54         -17.79         4           7323.000         33.85         2.36         36.21         54         -17.79         4           Remark:	. , , , ,	,	. ,	, , ,		,
Total         Total <th< td=""><td></td><td></td><td></td><td></td><td></td><td></td></th<>						
7323.000         33.85         2.36         36.21         54         -17.79         1           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.         Image: Comparison of Compari			-			
Image: Note of the second of the se						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.         EUT Name       Baseus Bass BD1 Bean-shaped Bluetooth Earbuds       Model Name       PM139         Temperature       22.6°C       Relative Humidity       56.3%         Pressure       960hPa       Test Voltage       Normal Voltage         Test Mode       Mode 8       Antenna Polarity       Vertical         Frequency       Meter Reading       Factor       Emission Level       Limits       Margin       Value Ty         (MHz)       (dBµV)       (dB)       (dBµV/m)       (dB)       Peak         4882.000       37.54       0.14       37.68       54       -16.32       AVG	36.21 54	36.21	2.36	33.85		7323.000
Factor = Antenna Factor + Cable Loss – Pre-amplifier.         EUT Name       Baseus Bass BD1 Bean-shaped Bluetooth Earbuds       Model Name       PM139         Temperature       22.6°C       Relative Humidity       56.3%         Pressure       960hPa       Test Voltage       Normal Voltage         Test Mode       Mode 8       Antenna Polarity       Vertical         Frequency       Meter Reading       Factor       Emission Level       Limits       Margin       Value Ty         (MHz)       (dBµV)       (dB)       (dBµV/m)       (dB)       Peak         4882.000       37.54       0.14       37.68       54       -16.32       AVG						
Pressure         960hPa         Test Voltage         Normal Voltage           Test Mode         Mode 8         Antenna Polarity         Vertical           Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value Ty           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dB)         Peak         Peak           4882.000         37.54         0.14         37.68         54         -16.32         AVG		chanad	ss BD1 Bean-	Baseus B		
Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value Ty           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         value Ty           4882.000         45.92         0.14         46.06         74         -27.94         peak           4882.000         37.54         0.14         37.68         54         -16.32         AVG	Relative Humic			<b>22.6</b> ℃		nperature
Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value Ty           (MHz)         (dBμV)         (dB)         (dBμV/m)         (dBμV/m)         (dB)         Value Ty           4882.000         45.92         0.14         46.06         74         -27.94         peak           4882.000         37.54         0.14         37.68         54         -16.32         AVG	Test Voltage			960hPa		ssure
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value Ty           4882.000         45.92         0.14         46.06         74         -27.94         peak           4882.000         37.54         0.14         37.68         54         -16.32         AVG	Antenna Polar			Mode 8		t Mode
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value Ty           4882.000         45.92         0.14         46.06         74         -27.94         peak           4882.000         37.54         0.14         37.68         54         -16.32         AVG	evel Limits	nission Leve	Factor Fm	r Reading	Meter	Frequency
4882.000         45.92         0.14         46.06         74         -27.94         peak           4882.000         37.54         0.14         37.68         54         -16.32         AVG						
4882.000 37.54 0.14 37.68 54 -16.32 AVG	, , , ,	,	. ,			. ,
7323.000 41.47 2.36 43.83 74 -30.17 peak	54	37.68	0.14			4882.000
	74	43.83	2.36	41.47	4	7323.000
7323.000 33.26 2.36 35.62 54 -18.38 AVG	54	35.62	2.36	33.26	3	7323.000
Remark:			I			mark:

# **Radiated Emissions Test Results for Above 1GHz**

# **RESULT: Pass**



East Mode         Mode 9         Antenna Polarity         Horizontal           Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value T           4960.000         46.36         0.22         46.58         74         -27.42         peak           4960.000         38.45         0.22         36.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         E         E         E         E         E         E         E           VIT Name         Baseus Bass BD1 Bean-shaped Bluetooth Earbuds         Model Name         PM139         E           emperature         22.6°C         Relative Humidity         56.3%         56.3%           ressure         960hPa         Test Voltage         Normal Voltage           est Mode         Mode 9         Antenna Polarity         Vertical           Ý(MHz)         (dBµV)         (dB)         (dBµV/m)         (dB)         Value T           (MHz)         (dBµV)	UT Name	Baseus Bas Bluetooth Ea	s BD1 Bean arbuds	-shaped	Model	Name	PM139			
Test Mode         Mode 9         Antenna Polarity         Horizontal           Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value T           4960.000         46.36         0.22         46.58         74         -27.42         peak           4960.000         38.45         0.22         38.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.	emperature	<b>22.6</b> °C	<b>22.6</b> ℃			ve Humidity	56.3%	56.3%		
Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value T           (MH2)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value T           4960.000         46.36         0.22         46.58         74         -27.42         peak           4960.000         38.45         0.22         38.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.	ressure	960hPa	960hPa			oltage	Normal \	Normal Voltage		
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value 1           4960.000         46.36         0.22         46.58         74         -27.42         peak           4960.000         38.45         0.22         38.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.	est Mode	Mode 9			Anten	na Polarity	Horizont	al		
(M+z)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value 1           4960.000         46.36         0.22         46.58         74         -27.42         peak           4960.000         38.45         0.22         38.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Eactor = Antenna Factor + Cable Loss – Pre-amplifier.		·								
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dB)           4960.000         46.36         0.22         46.58         74         -27.42         peak           4960.000         38.45         0.22         38.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.	Frequency	Meter Reading	Factor	Emissio	on Level	Limits	Margin			
4960.000         38.45         0.22         38.67         54         -15.33         AVG           7440.000         41.28         2.64         43.92         74         -30.08         peak           7440.000         32.74         2.64         35.38         54         -18.62         AVG           7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.	(MHz)	(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	value Type		
Totology         Date	4960.000	46.36	0.22	46.	.58	74	-27.42	peak		
7440.000         32.74         2.64         35.38         54         -18.62         AVG           Remark:         Factor = Antenna Factor + Cable Loss – Pre-amplifier.         Image: Comparison of Compar	4960.000	38.45	0.22	38.	.67	54	-15.33	AVG		
Image: Second	7440.000	41.28	2.64	43.	.92	74	-30.08	peak		
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameBaseus Bass BD1 Bean-shaped Bluetooth EarbudsModel NamePM139Temperature22.6 °CRelative Humidity56.3%Pressure960hPaTest VoltageNormal VoltagePressure960hPaAntenna PolarityVerticalFrequencyMeter Reading (MHz)FactorEmission LevelLimitsMargin (dB)Value TFrequencyMeter Reading (dBµV)FactorEmission LevelLimitsMargin (dB)Value T4960.00046.460.2246.6874-27.32peak4960.00038.920.2239.1454-14.86AVG7440.00041.322.6443.9674-30.04peak7440.00032.582.6435.2254-18.78AVG	7440.000	32.74	2.64	35.	.38	54	-18.62	AVG		
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameBaseus Bass BD1 Bean-shaped Bluetooth EarbudsModel NamePM139Temperature22.6°CRelative Humidity56.3%Pressure960hPaTest VoltageNormal VoltagePressure960hPaAntenna PolarityVerticalFrequencyMeter Reading (MHz)FactorEmission LevelLimitsMargin (dB)Value TFrequencyMeter Reading (dBµV)FactorEmission LevelLimitsMargin (dB)Value T4960.00046.460.2246.6874-27.32peak4960.00038.920.2239.1454-14.86AVG7440.00041.322.6443.9674-30.04peak7440.00032.582.6435.2254-18.78AVG										
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameBaseus Bass BD1 Bean-shaped Bluetooth EarbudsModel NamePM139Temperature22.6°CRelative Humidity56.3%Pressure960hPaTest VoltageNormal VoltagePressure960hPaAntenna PolarityVerticalFrequencyMeter Reading (MHz)FactorEmission LevelLimitsMargin (dB)Value TFrequencyMeter Reading (dBµV)FactorEmission LevelLimitsMargin (dB)Value T4960.00046.460.2246.6874-27.32peak4960.00038.920.2239.1454-14.86AVG7440.00041.322.6443.9674-30.04peak7440.00032.582.6435.2254-18.78AVG	Remark <sup>.</sup>									
EUT NameBaseus Bass BD1 Bean-shaped Bluetooth EarbudsModel NamePM139remperature22.6°CRelative Humidity56.3%Pressure960hPaTest VoltageNormal Voltagerest ModeMode 9Antenna PolarityVerticalrest ModeMode 9Antenna PolarityVerticalrest ModeMode 90.2246.6874-27.32requencyMeter ReadingFactorEmission LevelLimitsMargin (dB)Value T(MHz)(dBµV)(dB)(dBµV/m)(dB)Value T4960.00038.920.2239.1454-14.86AVG7440.00032.582.6435.2254-18.78AVGrunn										
Bluetooth Earbuds         Model Name         PM139           iemperature         22.6 °C         Relative Humidity         56.3%           iemperature         960hPa         Test Voltage         Normal Voltage           iest Mode         Mode 9         Antenna Polarity         Vertical           iest Mode         Mode 9         Antenna Polarity         Vertical           iest Mode         Meter Reading         Factor         Emission Level         Limits         Margin           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dB)         Value T           4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         32.58         2.64         35.22         54         -18.78         AVG		na Factor + Cabl	e Loss – Pre-	amplifier.						
ressure         960hPa         Test Voltage         Normal Voltage           est Mode         Mode 9         Antenna Polarity         Vertical           Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value T           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dB)         Vertical           4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG		nna Factor + Cabl	e Loss – Pre-	amplifier.						
Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value T           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value T           4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter	Baseus Bas	s BD1 Bean		Model	Name	PM139			
Frequency         Meter Reading         Factor         Emission Level         Limits         Margin         Value T           (MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value T           4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter	Baseus Bas Bluetooth Ea	s BD1 Bean							
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value 1           4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter UT Name emperature	Baseus Bas Bluetooth Ea 22.6℃	s BD1 Bean		Relativ	ve Humidity	56.3%	/oltage		
(MHz)         (dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)         Value 1           4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter UT Name emperature ressure	Baseus Bas Bluetooth Ea 22.6°C 960hPa	s BD1 Bean		Relativ Test V	ve Humidity oltage	56.3% Normal V	/oltage		
4960.000         46.46         0.22         46.68         74         -27.32         peak           4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter UT Name emperature ressure est Mode	Baseus Bas Bluetooth Ea 22.6°C 960hPa Mode 9	s BD1 Bean arbuds	-shaped	Relativ Test V Anten	ve Humidity oltage na Polarity	56.3% Normal Vertical	/oltage		
4960.000         38.92         0.22         39.14         54         -14.86         AVG           7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter	Baseus Bas Bluetooth Ea 22.6℃ 960hPa Mode 9 Meter Reading	s BD1 Bean arbuds Factor	-shaped	Relativ Test V Anten	ve Humidity oltage na Polarity Limits	56.3% Normal V Vertical	/oltage Value Type		
7440.000         41.32         2.64         43.96         74         -30.04         peak           7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter	Baseus Bas Bluetooth Ea 22.6℃ 960hPa Mode 9 Meter Reading (dBµV)	s BD1 Bean arbuds Factor (dB)	Emissic	Relativ Test V Anten	ve Humidity oltage na Polarity Limits (dBµV/m)	56.3% Normal V Vertical Margin (dB)	Value Type		
7440.000         32.58         2.64         35.22         54         -18.78         AVG	Factor = Anter	Baseus Bas Bluetooth Ea 22.6°C 960hPa Mode 9 Meter Reading (dBµV) 46.46	Factor (dB) 0.22	Emissic	Relativ Test V Anten on Level V/m) .68	ve Humidity oltage na Polarity Limits (dBµV/m) 74	56.3% Normal V Vertical Margin (dB) -27.32	- Value Type peak		
	Factor = Anter	Baseus Bas Bluetooth Ea 22.6℃ 960hPa Mode 9 Meter Reading (dBµV) 46.46 38.92	Factor (dB) 0.22 0.22	Emissic (dBµ 39.	Relativ Test V Anten	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	56.3% Normal V Vertical Margin (dB) -27.32 -14.86	- Value Type peak AVG		
	Factor = Anter	Baseus Bas Bluetooth Ea 22.6℃ 960hPa Mode 9 Meter Reading (dBµV) 46.46 38.92 41.32	Factor (dB) 0.22 0.22 2.64	-shaped Emissic (dBµ 46. 39. 43.	Relative Test V Anten	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.3% Normal V Vertical Margin (dB) -27.32 -14.86 -30.04	- Value Type peak AVG peak		
	Factor = Anter	Baseus Bas Bluetooth Ea 22.6℃ 960hPa Mode 9 Meter Reading (dBµV) 46.46 38.92 41.32	Factor (dB) 0.22 0.22 2.64	-shaped Emissic (dBµ 46. 39. 43.	Relative Test V Anten	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.3% Normal V Vertical Margin (dB) -27.32 -14.86 -30.04	- Value Type peak AVG		
Remark:	Factor = Anter	Baseus Bas Bluetooth Ea 22.6℃ 960hPa Mode 9 Meter Reading (dBµV) 46.46 38.92 41.32	Factor (dB) 0.22 0.22 2.64	-shaped Emissic (dBµ 46. 39. 43.	Relative Test V Anten	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.3% Normal V Vertical Margin (dB) -27.32 -14.86 -30.04	- Value Type peak AVG peak		

# Radiated Emissions Test Results for Above 1GHz

#### **RESULT: Pass**

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.




EUT Name	Baseus Bass BD1 Bean-shaped Bluetooth Earbuds	Model Name	PM139
Temperature	<b>25.0℃</b>	Relative Humidity	55.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

### Band Edge Emission Test Results for Restricted Bands

#### Test Graph for Peak Measurement

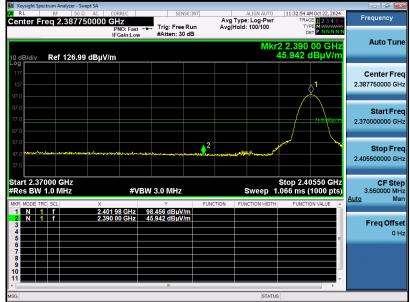

Test Graph for Average Measurement

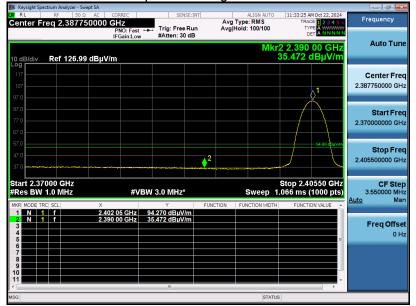


## **RESULT: Pass**




EUT Name	Baseus Bass BD1 Bean-shaped Bluetooth Earbuds	Model Name	PM139
Temperature	<b>25.0</b> ℃	Relative Humidity	55.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical



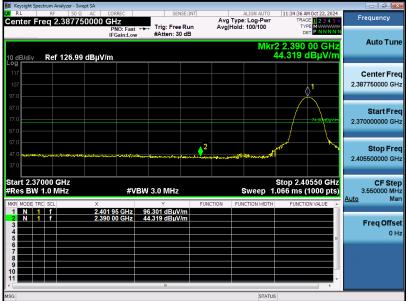

Test Graph for Average Measurement

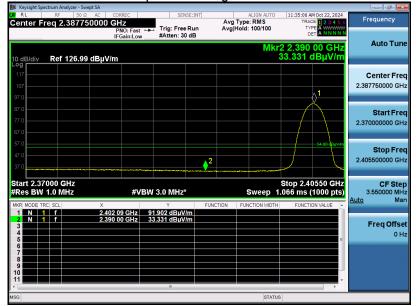


## **RESULT: Pass**




EUT Name	Baseus Bass BD1 Bean-shaped Bluetooth Earbuds	Model Name	PM139
Temperature	<b>25.0</b> ℃	Relative Humidity	55.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal



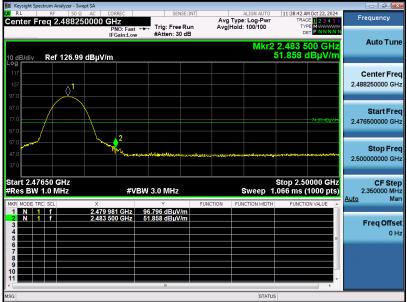


Test Graph for Average Measurement

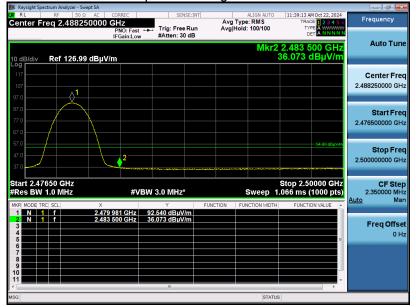

# **RESULT: Pass**




EUT Name	Baseus Bass BD1 Bean-shaped Bluetooth Earbuds	Model Name	PM139
Temperature	<b>25.0</b> ℃	Relative Humidity	55.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

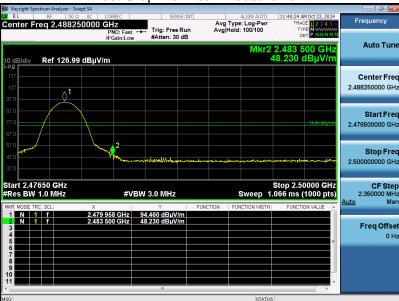

Test Graph for Peak Measurement

Test Graph for Average Measurement

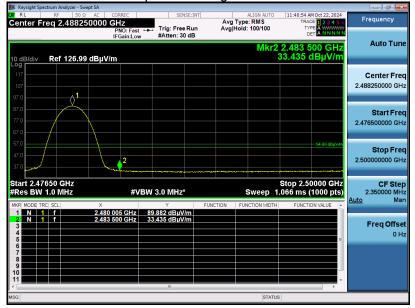

## **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



# **10. Number of Hopping Frequency Measurement**

## **10.1 Provisions Applicable**

This frequency hopping system must employ a minimum of 15 hopping channels.


# **10.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span = The frequency band of operation. Depending on the number of channels the device

- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW  $\geq$  RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

# 10.3 Measurement Setup (Block Diagram of Configuration)

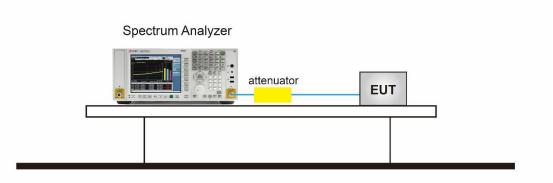

#### **10.4 Measurement Result**

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
8DPSK Hopping	79	>=15	Pass		



🍺 Keysight Spectrum Analyzer - Swept SA					
Center Freg 2.441750000	CORREC	SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	11:42:42 AM Oct 22, 2024 TRACE 1 2 3 4 5 6	Frequency
10 dB/div Ref 30.00 dBm	PNO: Fast IFGain:Low	Trig: Free Run #Atten: 40 dB	Avg Hold: 100/100	TYPE MWWWW DET PNNNNN 1 2.412 04 GHz 2.448 dBm	Auto Tune
20.0					Center Freq 2.441750000 GHz
10.0 0.00 - WWW. WWW. WWW	www.	whymraphypa	hpplage/anthone	MMMMM	Start Freq 2.400000000 GHz
-10.0					<b>Stop Freq</b> 2.483500000 GHz
-30.0					CF Step 8.350000 MHz <u>Auto</u> Man
-50.0				44 	Freq Offset 0 Hz
-60.0					
Center 2.44175 GHz #Res BW 200 kHz	#VBW	620 kHz	Sweep 1	Span 83.50 MHz .998 ms (1000 pts)	
Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Number of Hopping					

## **Test Graphs of Number of Hopping Frequency**

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



# 11. Time of Occupancy (Dwell Time) Measurement

# **11.1 Provisions Applicable**


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

# **11.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW  $\geq$  RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

# 11.3 Measurement Setup (Block Diagram of Configuration)

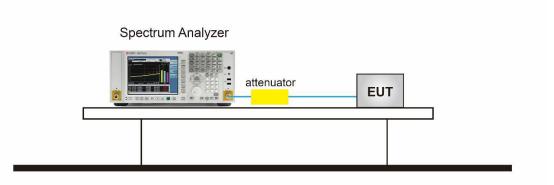

### **11.4 Measurement Result**

Test Data of Dwell Time					
Channel	Time of Pulse for 3DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.892	28.0*4	323.904	400	Pass
2441	2.892	21.0*4	242.928	400	Pass
2480	2.892	26.0*4	300.768	400	Pass