

Logitech, Inc.

Dongle: Model F-0461B

September 08, 2006

Report No. LABT0210.2

Report Prepared By



www.nwemc.com

1-888-EMI-CERT

© 2006 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test
Issue Date: September 08, 2006
Logitech, Inc.
Model: Dongle: Model F-0461B

Emissions				
Test Description	Specification	Test Method	Pass	Fail
Radiated Emissions	FCC 15.109:2006	ANSI C63.4:2003	☒	☐
Occupied Bandwidth	FCC 15.247:2006	ANSI C63.4:2003	☒	☐
Output Power	FCC 15.247:2006	ANSI C63.4:2003	☒	☐
Band Edge compliance	FCC 15.247:2006	ANSI C63.4:2003	☒	☐
Spurious Conducted Emissions	FCC 15.247:2006	ANSI C63.4:2003	☒	☐
Power Spectral Density	FCC 15.247:2006	ANSI C63.4:2003	☒	☐
Spurious Radiated Emissions	FCC 15.247:2006	ANSI C63.4:2003	☒	☐
AC Powerline Conducted Emissions	FCC 15.207:2006	ANSI C63.4:2003	☒	☐

Modifications made to the product

See the Modifications section of this report

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124
Phone: (503) 844-4066
Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Greg Kiemel, Director of Engineering

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.


Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is accredited under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C.



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (Registration Numbers. - Hillsboro: C-1071, R-1025, and R-2318, Irvine: C-2094 and R-1943, Sultan: R-871, C-1784 and R-1761).



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



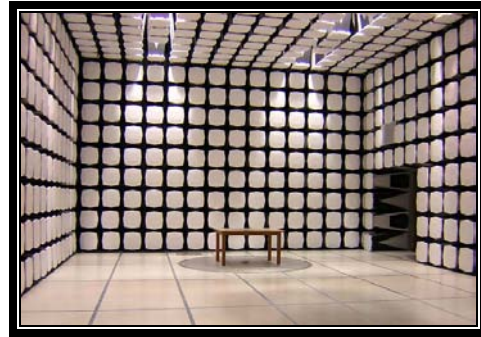
GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

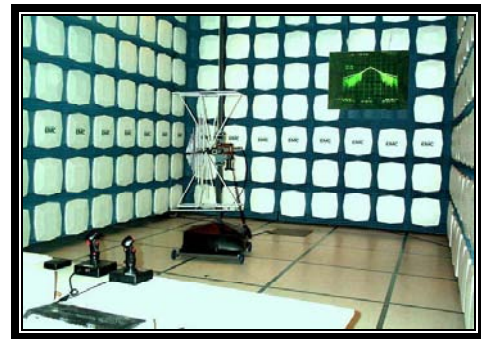
For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>



**California – Orange County Facility
Labs OC01 – OC13**

41 Tesla Ave. Irvine, CA 92618
(888) 364-2378 Fax: (503) 844-3826



**Oregon – Evergreen Facility
Labs EV01 – EV11**

22975 NW Evergreen Pkwy. Suite 400 Hillsboro, OR 97124
(503) 844-4066 Fax: (503) 844-3826



**Washington – Sultan Facility
Labs SU01 – SU07**

14128 339th Ave. SE Sultan, WA 98294
(888) 364-2378

Party Requesting the Test

Company Name:	Logitech, Inc.
Address:	1499 SE Tech Center Place Suite 350
City, State, Zip:	Vancouver, WA 98683
Test Requested By:	Mitchell Phillipi
Model:	Dongle: Model F-0461B
First Date of Test:	July 24, 2006
Last Date of Test:	August 22, 2006
Receipt Date of Samples:	July 24, 2006
Equipment Design Stage:	Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test**Functional Description of the EUT (Equipment Under Test):**

Bluetooth USB Dongle

Testing Objective:

To meet the EMC requirements for FCC.

EUT Photo

CONFIGURATION 1 LABT0210**Software/Firmware Running during test**

Description	Version
Windows Hyperterminal	5.1

EUT

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Headset	Logitech, Inc.	F-0461A	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Power Adapter	Dell	AA20031	CN-03694U-16291-14G-0ASD
Notebook PC	Dell	Latitude C400	C2MCL21
Development Module	Logitech, Inc.	PCB-212478-0000-0A	2/9/06

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.0m	No	Notebook PC	Development Module
Molex	No	0.3m	No	EUT (during set-up only)	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

CONFIGURATION 2 LABT0210**Software/Firmware Running during test**

Description	Version
Windows Hyperterminal	5.1

EUT

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Dongle	Logitech, Inc.	F-0461B	Unknown

Peripherals in test setup boundary

Description	Manufacturer	Model/Part Number	Serial Number
AC Power Adapter	Logitech, Inc.	P925BW05050ABD3	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Power Adapter	Dell	AA20031	CN-03694U-16291-14G-0ASD
Notebook PC	Dell	Latitude C400	C2MCL21
Development Module	Logitech, Inc.	PCB-212478-0000-0A	2/9/06

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.0m	No	Notebook PC	Development Module
Molex	No	0.3m	No	EUT (during set-up only)	Development Module
DC Power	No	1.2m	No	EUT - Dongle	AC Power Adapter
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

CONFIGURATION 5 LABT0210**Software/Firmware Running during test**

Description	Version
Windows Media Player	10.00.00.4036

EUT

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Headset	Logitech, Inc.	F-0461A	Unknown
EUT - Dongle	Logitech, Inc.	F-0461B	Unknown

Peripherals in test setup boundary

Description	Manufacturer	Model/Part Number	Serial Number
Power Adapter	Dell	AA20031	CN-03694U-16291-14G-0ASD
Notebook PC	Dell	Latitude C400	C2MCL21
USB Keyboard	Microsoft	E06401COMB	71305-584-2789315-39224
Serial Mouse	138445	Z-Nix, Inc.	Unknown

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	2.0m	No	AC Mains	AC Adapter
USB	Yes	1.8m	Yes	USB Keyboard	Notebook PC
Serial	Yes	1.4m	No	Serial Mouse	Notebook PC
DC Power	No	1.6m	Yes	Notebook PC	AC Adapter

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Equipment modifications					
Item	Date	Test	Modification	Note	Disposition of EUT
1	7/24/2006	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	7/27/2006	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	8/9/2006	AC Power Line Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	8/21/2006	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	8/21/2006	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	8/21/2006	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	8/21/2006	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
8	8/22/2006	Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Dongle and Headset Charging (230VAC/50Hz)

Dongle and Headset Charging (120VAC/60Hz)

Typical operating mode - Audio to dongle from laptop, wireless audio from dongle to headphones

MODE USED FOR FINAL DATA

Typical operating mode - Audio to dongle from laptop, wireless audio from dongle to headphones

POWER SETTINGS INVESTIGATED

230VAC/50Hz

120VAC/60Hz

Battery

POWER SETTINGS USED FOR FINAL DATA

Battery

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	1000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
EV11 cables a,b,c			EVL	4/5/2006	13
Pre-Amplifier	Miteq	AM-1551	AOY	4/5/2006	13
Antenna, Biconilog	EMCO	3142	AXB	1/6/2005	24
Spectrum Analyzer	Agilent	E4443A	AAS	12/8/2005	12

MEASUREMENT BANDWIDTHS

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Tests were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 3 meters or 10 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

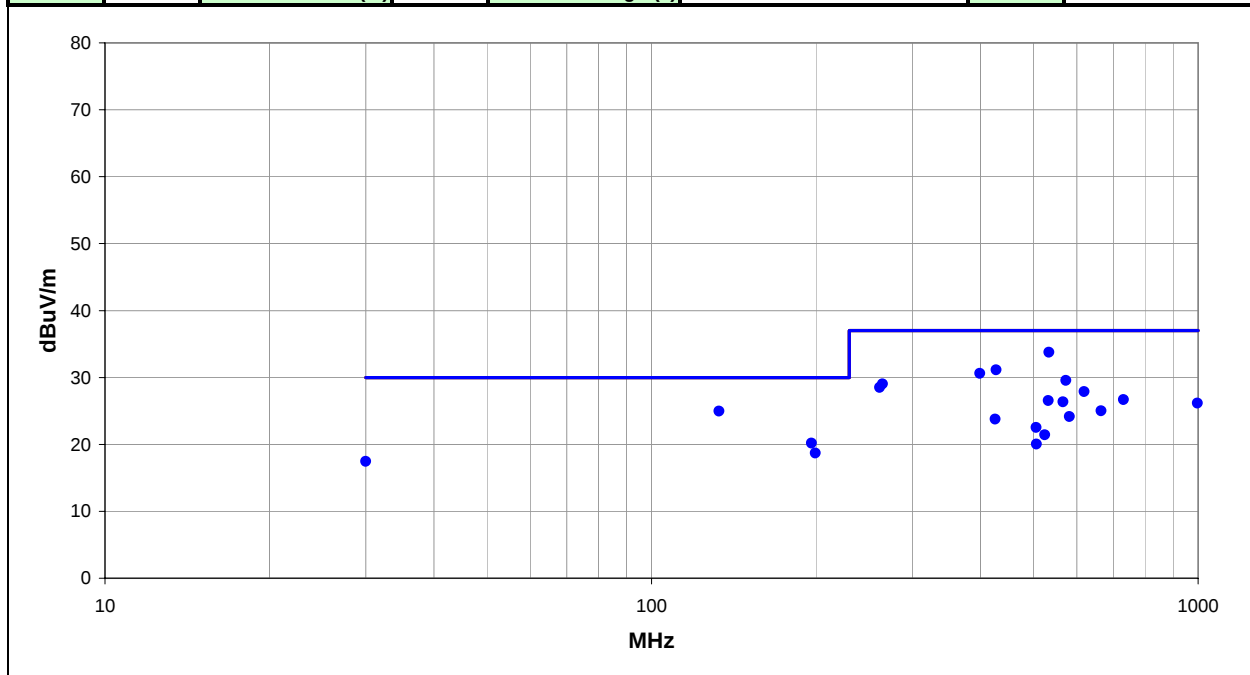
EMC

RADIATED EMISSIONS

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/22/06	<i>Holly Ashkannejhad</i> Tested by: Holly Ashkannejhad
Project:	None	Temperature:	26°C	
Job Site:	EV01	Humidity:	36	
Serial Number:	Unknown	Barometric Pres.:	30.01	
EUT:	Dongle: Model F-0461B and Headset: Model F-0461A			
Configuration:	5 - Typical Operating Mode			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Typical operating mode			
Deviations:				
Comments:	Dongle in headphone jack of laptop			

Test Specifications				Class B	Test Method		
CISPR 22 Class B EN 55022 (Amds. A1:2000 A2:2003) Class B FCC 15.109(g) (CISPR 22:1997) Class B					CISPR 22 Class B		
					CISPR 22		
					ANSI C63.4		
Run #	9	Test Distance (m)	10	Antenna Height(s)	1-4m	Results	Pass



Freq	Amplitude	Factor	Antenna Height	Azimuth (degrees)	Test Distance	External Attenuation	Polarity/ Transducer Type	Detector	Distance Adjustment	Adjusted	Spec. Limit	Compared to Spec. (dB)
533.823	47.6	-13.8	3.0	206.0	10.0	0.0	Vert	QP	0.0	33.8	37.0	-3.2
132.880	51.5	-26.6	1.0	52.0	10.0	0.0	Vert	QP	0.0	24.9	30.0	-5.1
427.263	47.5	-16.4	2.3	267.0	10.0	0.0	Horz	QP	0.0	31.1	37.0	-5.9
398.859	47.3	-16.7	2.2	272.0	10.0	0.0	Horz	QP	0.0	30.6	37.0	-6.4
573.041	43.0	-13.5	2.4	206.0	10.0	0.0	Vert	QP	0.0	29.5	37.0	-7.5
264.527	49.9	-20.9	3.5	289.0	10.0	0.0	Horz	QP	0.0	29.0	37.0	-8.0
261.562	49.4	-20.9	3.5	265.0	10.0	0.0	Horz	QP	0.0	28.5	37.0	-8.5
618.980	40.4	-12.5	2.6	219.0	10.0	0.0	Vert	QP	0.0	27.9	37.0	-9.1
196.181	43.5	-23.3	3.0	218.0	10.0	0.0	Horz	QP	0.0	20.2	30.0	-9.8
730.929	37.4	-10.7	2.0	44.0	10.0	0.0	Vert	QP	0.0	26.7	37.0	-10.3
531.859	40.4	-13.8	2.7	88.0	10.0	0.0	Horz	QP	0.0	26.6	37.0	-10.4
566.130	39.9	-13.5	3.1	193.0	10.0	0.0	Vert	QP	0.0	26.4	37.0	-10.6
997.020	33.9	-7.7	1.0	234.0	10.0	0.0	Horz	QP	0.0	26.2	37.0	-10.8
199.393	41.9	-23.2	1.1	325.0	10.0	0.0	Vert	QP	0.0	18.7	30.0	-11.3
664.351	36.9	-11.9	3.0	34.0	10.0	0.0	Vert	QP	0.0	25.0	37.0	-12.0
30.000	33.0	-15.6	1.4	156.0	10.0	0.0	Vert	QP	0.0	17.4	30.0	-12.6
581.266	37.4	-13.2	2.4	173.0	10.0	0.0	Vert	QP	0.0	24.2	37.0	-12.8
425.500	40.2	-16.4	2.0	57.0	10.0	0.0	Vert	QP	0.0	23.8	37.0	-13.2
505.505	36.9	-14.4	2.2	58.0	10.0	0.0	Vert	QP	0.0	22.5	37.0	-14.5
524.201	35.3	-13.9	3.0	0.0	10.0	0.0	Vert	QP	0.0	21.4	37.0	-15.6



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett-Packard	8593E	AAN	1/25/2006	13

MEASUREMENT UNCERTAINTY


Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

EMC

OCCUPIED BANDWIDTH

EUT:	Dongle: Model F-0461B		Work Order:	LABT0210	
Serial Number:	Unknown		Date:	07/24/06	
Customer:	Logitech, Inc.		Temperature:	24°C	
Attendees:	None		Humidity:	41%	
Project:	None		Barometric Pres.:	29.89	
Tested by:	Rod Peloquin	Power:	Battery	Job Site:	EV06
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2006 FHSS			ANSI C63.4:2003, DA 00-705:2000		
COMMENTS					
Dongle					
DEVIATIONS FROM TEST STANDARD					
Configuration #	1	 Signature			
			Value	Limit	Results

Low Channel

1.245 MHz

1.5 MHz

Pass

Mid Channel

1.238 MHz

1.5 MHz

Pass

High Channel

1.245 MHz

1.5 MHz

Pass

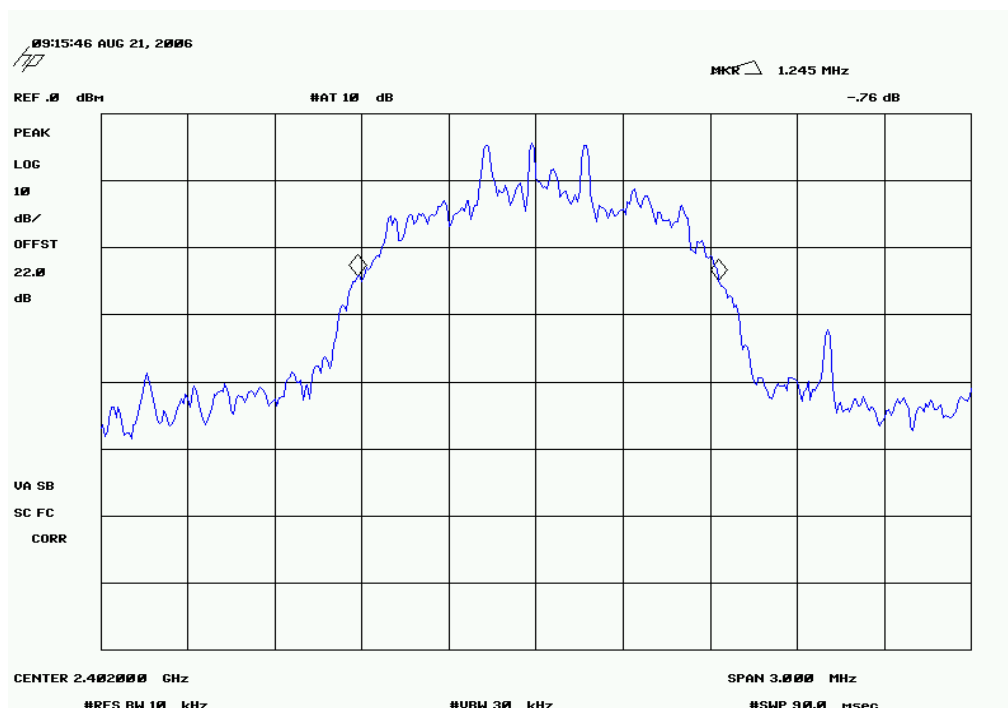
OCCUPIED BANDWIDTH

Low Channel

Result: Pass

Value: 1.245 MHz

Limit: 1.5 MHz

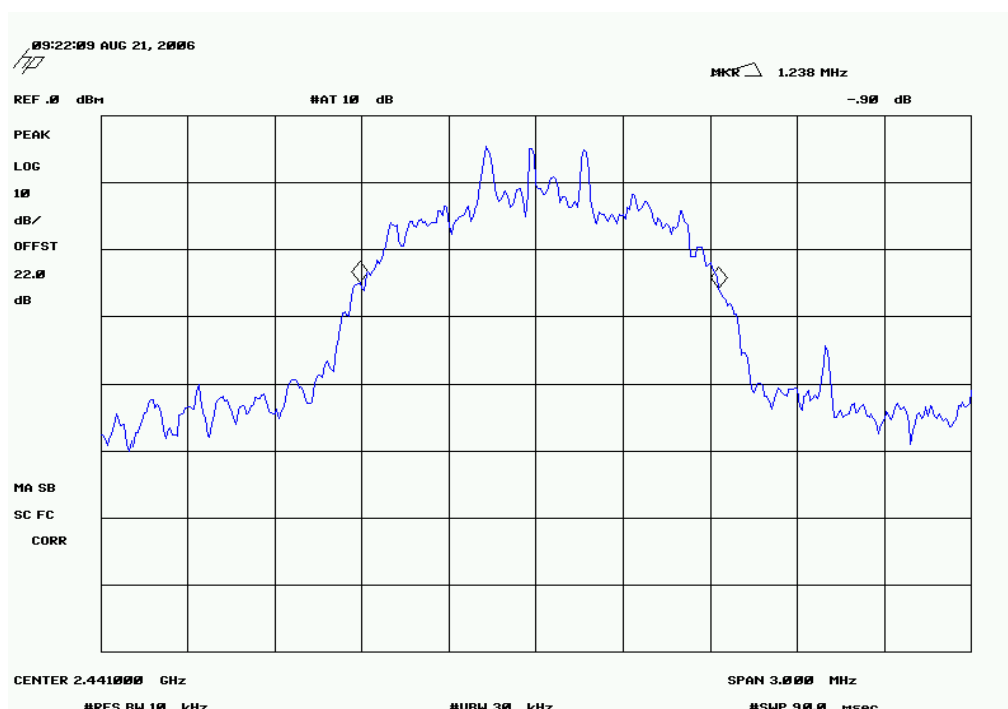


Mid Channel

Result: Pass

Value: 1.238 MHz

Limit: 1.5 MHz



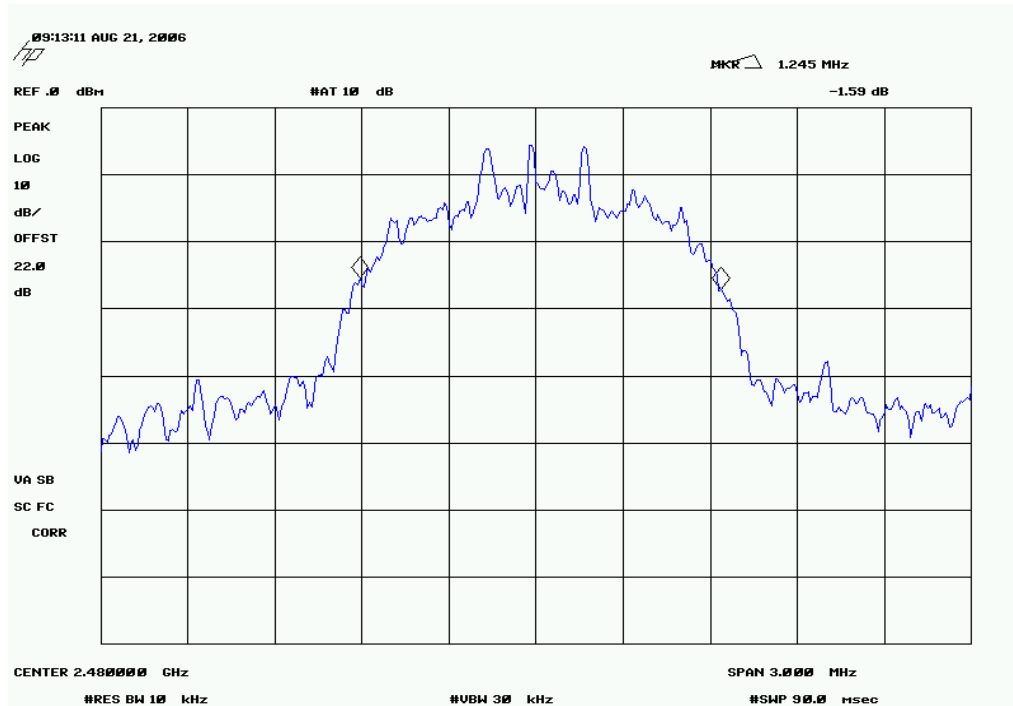
OCCUPIED BANDWIDTH

High Channel

Result: Pass

Value: 1.245 MHz

Limit: 1.5 MHz





Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT					
Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett-Packard	8593E	AAN	1/25/2006	13
Power Meter	Hewlett Packard	E4418A	SPA	7/23/2004	27
Power Sensor	Hewlett-Packard	8481H	SPB	10/23/2004	24
Signal Generator	Hewlett-Packard	8648D	TGC	1/27/2006	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

EMC

OUTPUT POWER

EUT:	Dongle: Model F-0461B	Work Order:	LABT0210
Serial Number:	Unknown	Date:	08/21/06
Customer:	Logitech, Inc.	Temperature:	23°C
Attendees:	None	Humidity:	35%
Project:	None	Barometric Pres.:	30.15
Tested by:	Rod Peloquin	Power:	battery
		Job Site:	EV06

TEST SPECIFICATIONS	Test Method
FCC 15.247:2006 FHSS	ANSI C63.4:2003, DA 00-705:2000

COMMENTS
Dongle

DEVIATIONS FROM TEST STANDARD

Configuration #	1	Signature 
-----------------	---	---

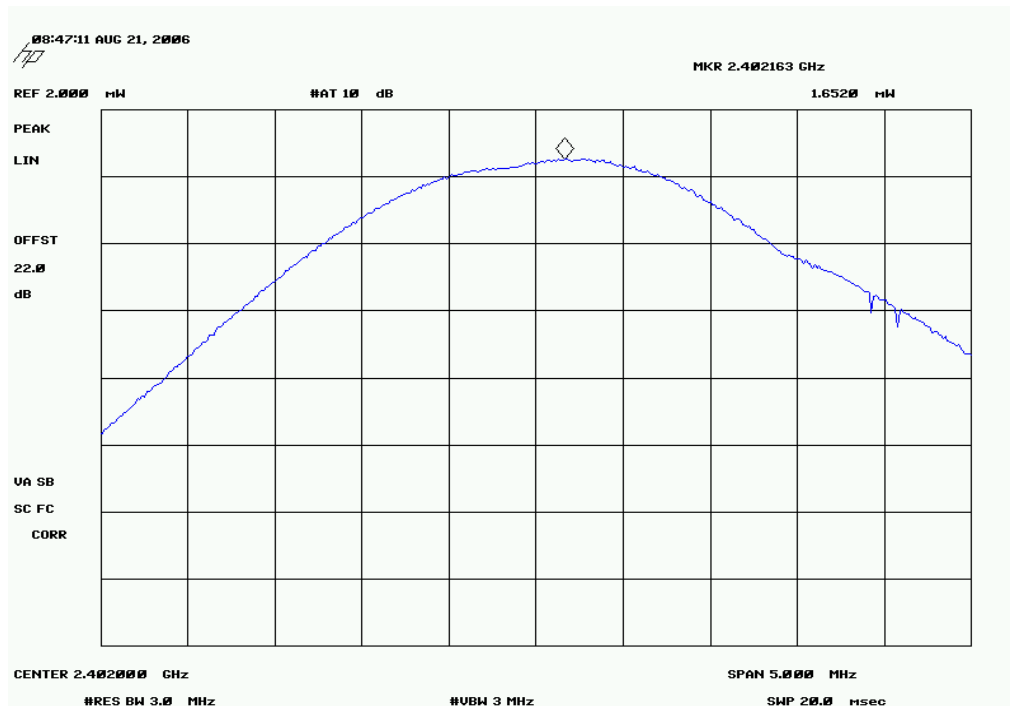
	Value	Limit	Results
Low Channel	1.652 mW	1 Watt	Pass
Mid Channel	1.483 mW	1 Watt	Pass
High Channel	1.276 mW	1 Watt	Pass

Low Channel

Result: Pass

Value: 1.652 mW

Limit: 1 Watt



Mid Channel

Result: Pass

Value: 1.483 mW

Limit: 1 Watt

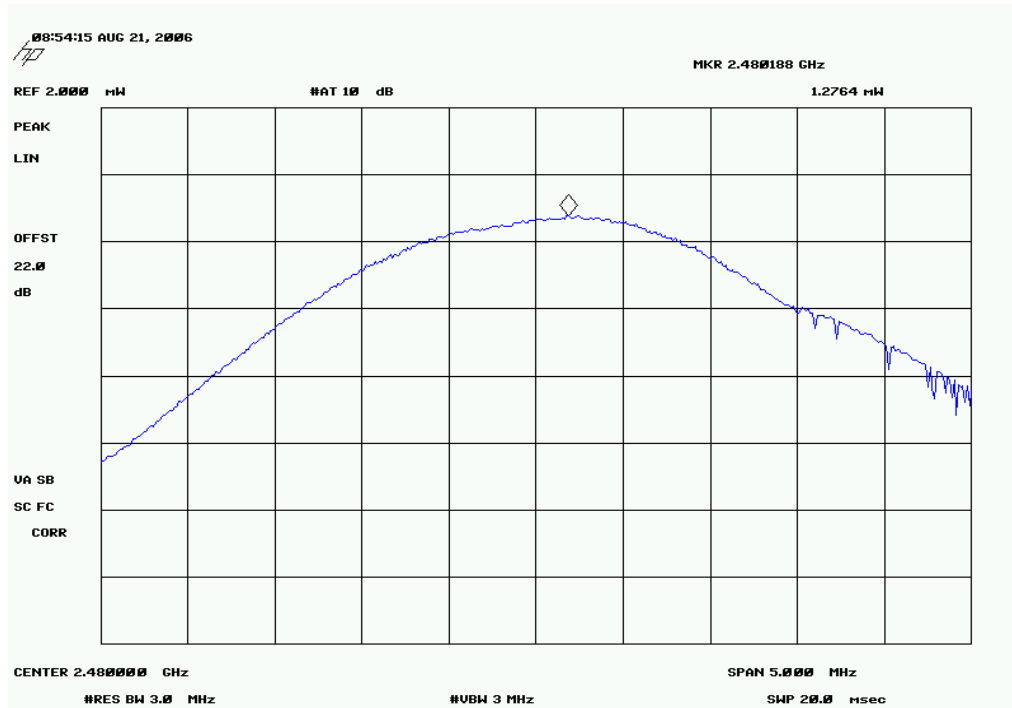


High Channel

Result: Pass

Value: 1.276 mW

Limit: 1 Watt





Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett-Packard	8593E	AAN	1/25/2006	13

MEASUREMENT UNCERTAINTY


Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 5 MHz below the band edge to 5 MHz above the band edge.

EMC

BAND EDGE COMPLIANCE

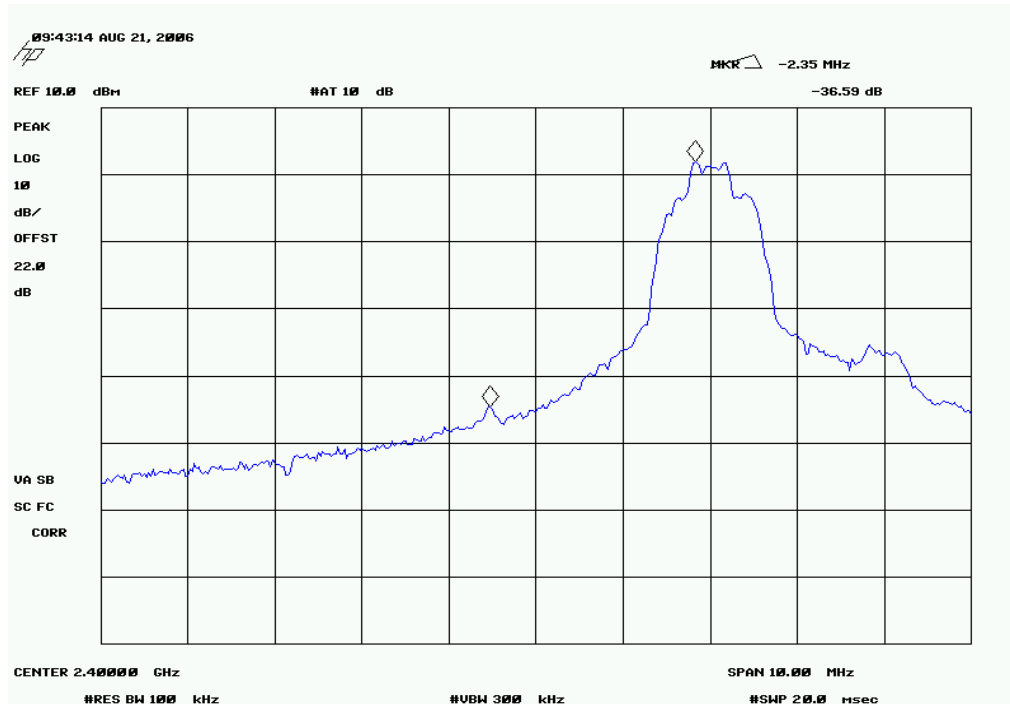
EUT: Dongle: Model F-0461B		Work Order: LABT0210	
Serial Number: Unknown		Date: 08/21/06	
Customer: Logitech, Inc.		Temperature: 25°C	
Attendees: None		Humidity: 36%	
Project: None		Barometric Pres.: 29.93	
Tested by: Rod Peloquin		Power: Battery	Job Site: EV06
TEST SPECIFICATIONS			
FCC 15.247:2006 FHSS		Test Method ANSI C63.4:2003, DA 00-705:2000	
COMMENTS			
Dongle			
DEVIATIONS FROM TEST STANDARD			
Configuration #	1	Signature 	
		Value	Limit Results
Low Channel		-36.59 dBc	≤ -20 dBc Pass
High Channel		-38.11 dBc	≤ -20 dBc Pass

BAND EDGE COMPLIANCE

Low Channel

Result: Pass

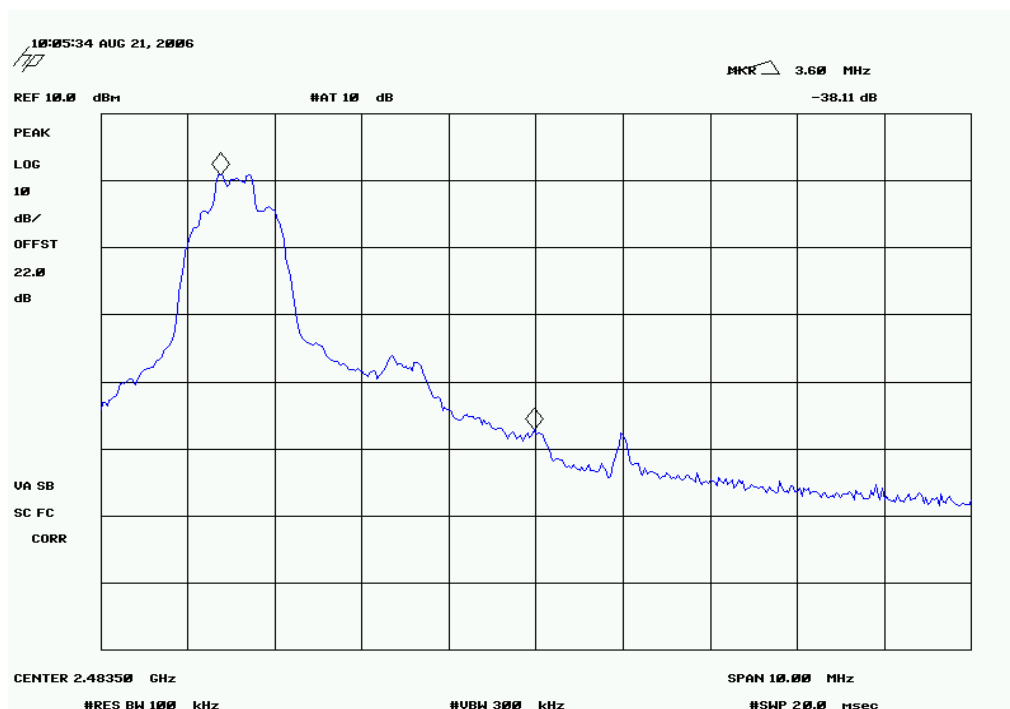
Value: -36.59 dBc

Limit: ≤ -20 dBc

High Channel

Result: Pass

Value: -38.11 dBc

Limit: ≤ -20 dBc



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4446A	AAT	4/4/2006	12

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. For each transmit frequency, the spectrum was scanned throughout the specified frequency.

EMC

SPURIOUS CONDUCTED EMISSIONS

EUT:	Dongle: Model F-0461B	Work Order:	LABT0210
Serial Number:	Unknown	Date:	08/21/06
Customer:	Logitech, Inc.	Temperature:	26°C
Attendees:	None	Humidity:	36%
Project:	None	Barometric Pres.:	30.01
Tested by:	Holly Ashkannejhad	Power:	Battery
		Job Site:	EV01

TEST SPECIFICATIONS

Test Method

FCC 15.247:2006 FHSS

ANSI C63.4:2003, DA 00-705:2000

COMMENTS

DEVIATIONS FROM TEST STANDARD

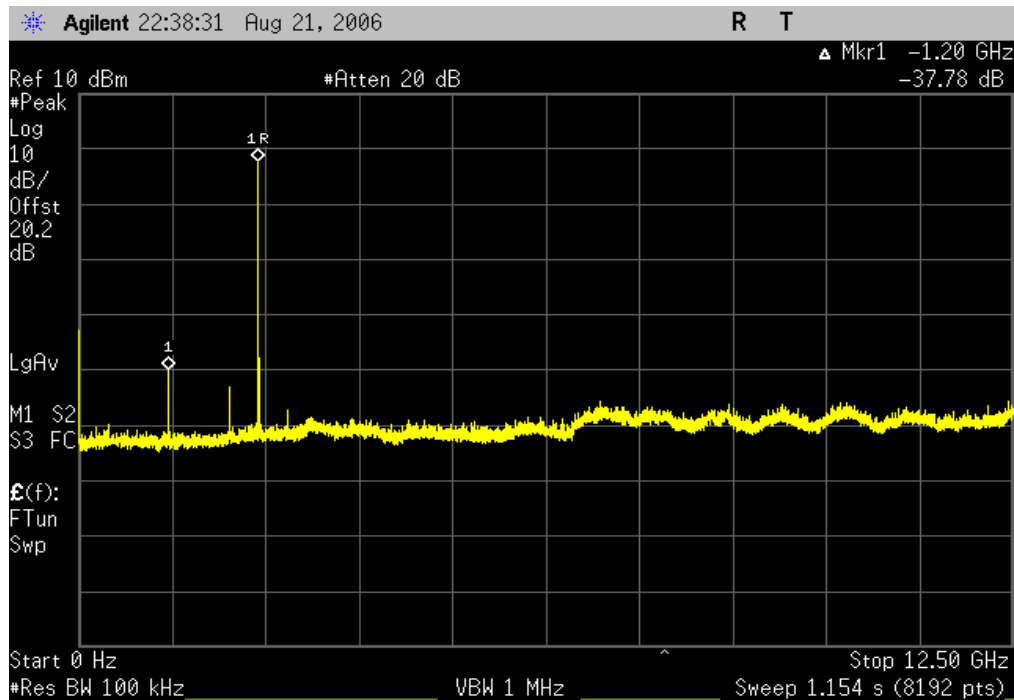
Configuration #	2	Signature <i>Holly Ashkannejhad</i>
-----------------	---	-------------------------------------

		Value	Limit	Results
Low Channel	0MHz - 12.5GHz	-37.78 dBc	≤ -20 dBc	Pass
	12.4GHz-25GHz	< -40 dBc	≤ -20 dBc	Pass
Mid Channel	0MHz - 12.5GHz	-38.95 dBc	≤ -20 dBc	Pass
	12.4GHz-25GHz	< -40 dBc	≤ -20 dBc	Pass
High Channel	0MHz - 12.5GHz	-35.62 dBc	≤ -20 dBc	Pass
	12.4GHz-25GHz	< -40 dBc	≤ -20 dBc	Pass

Low Channel, 0MHz - 12.5GHz

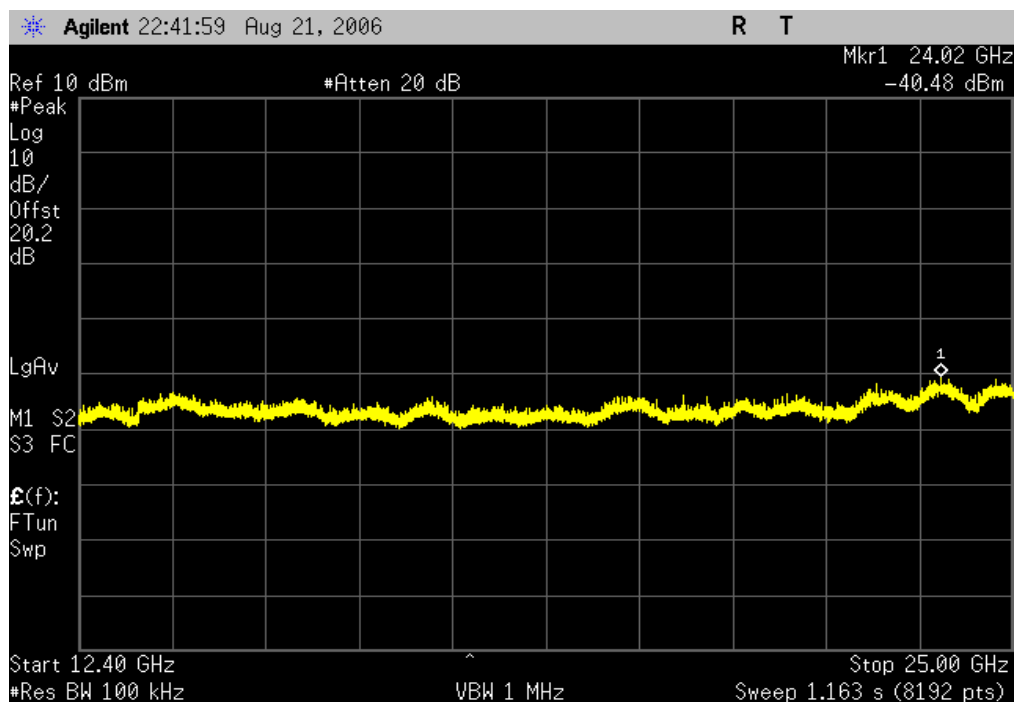
Result: Pass

Value: -37.78 dBc

Limit: ≤ -20 dBc

Low Channel, 12.4GHz-25GHz

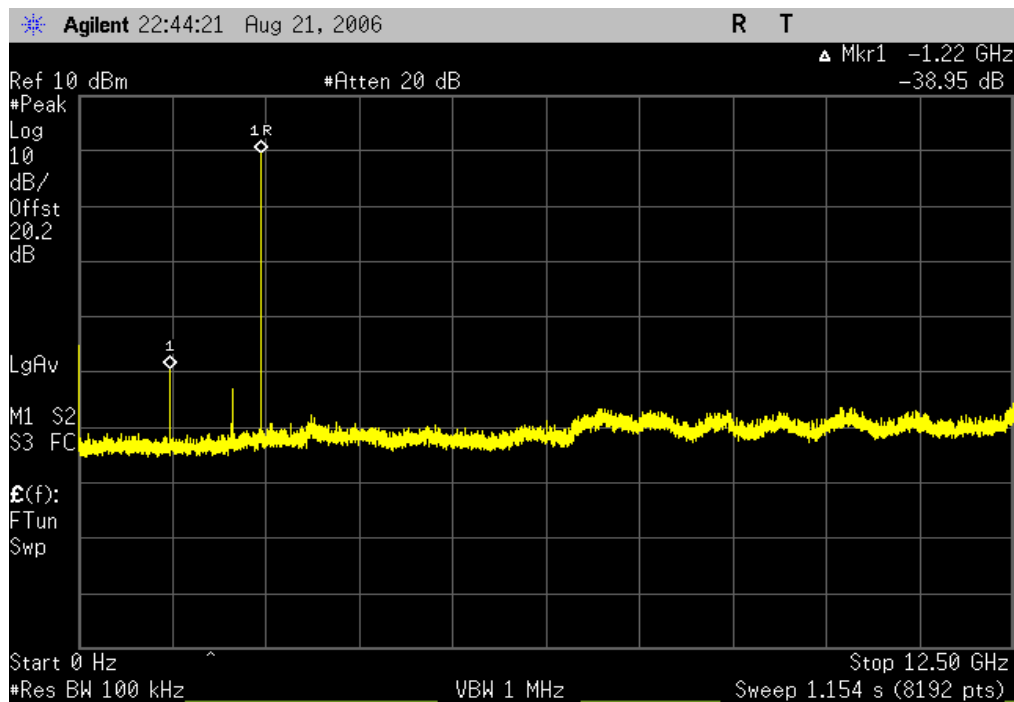
Result: Pass

Value: < -40 dBcLimit: ≤ -20 dBc

Mid Channel, 0MHz - 12.5GHz

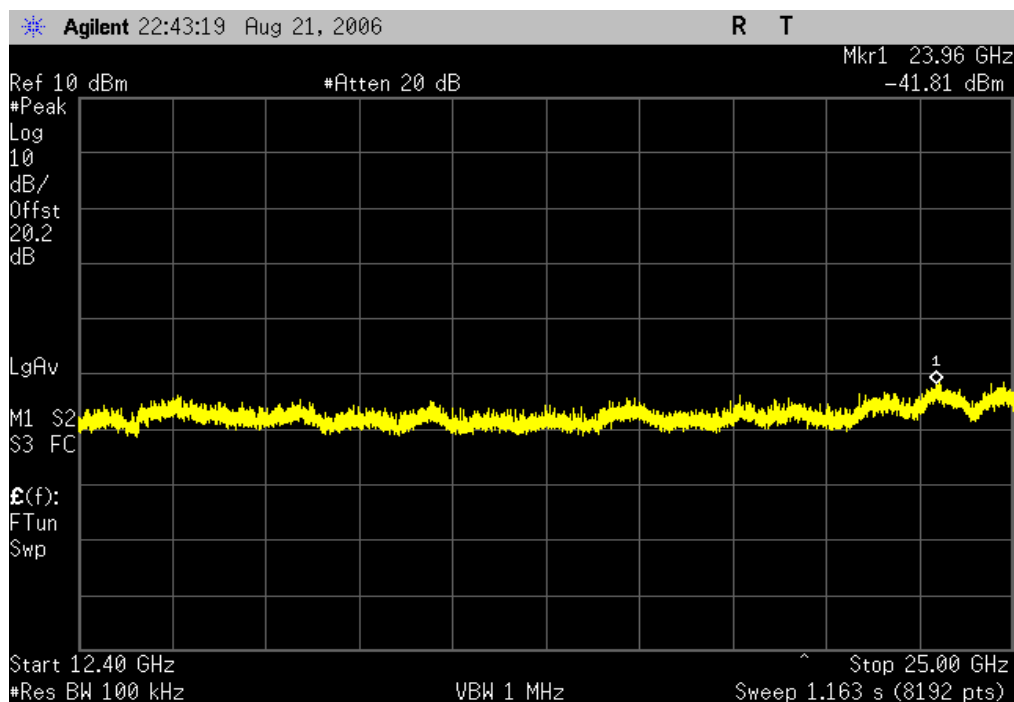
Result: Pass

Value: -38.95 dBc

Limit: ≤ -20 dBc

Mid Channel, 12.4GHz-25GHz

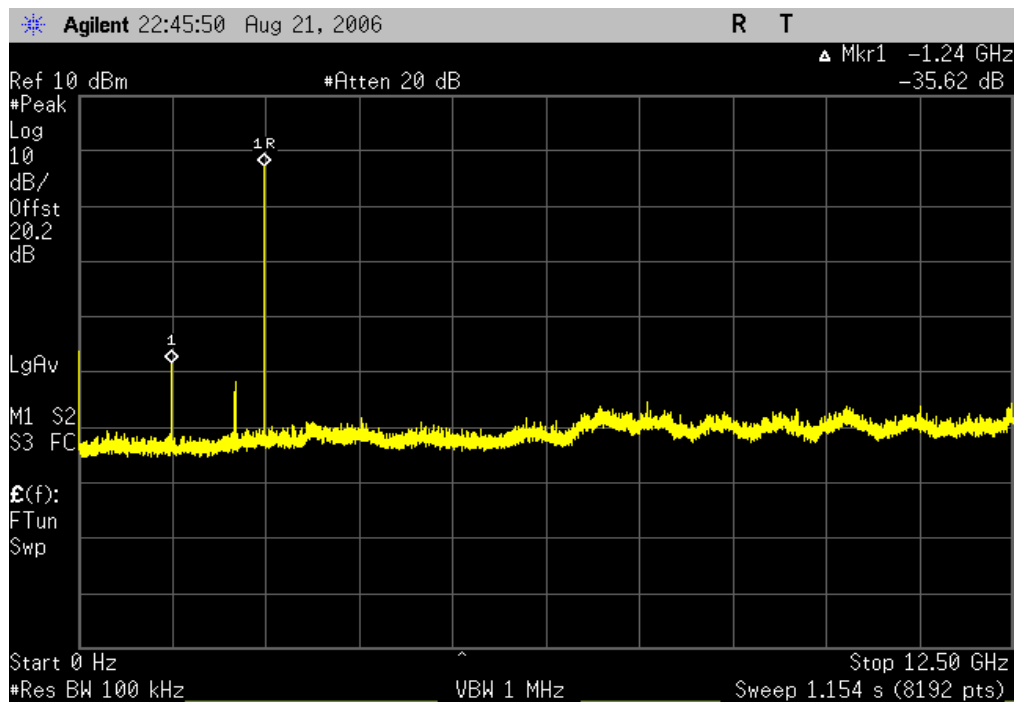
Result: Pass

Value: < -40 dBcLimit: ≤ -20 dBc

High Channel, 0MHz - 12.5GHz

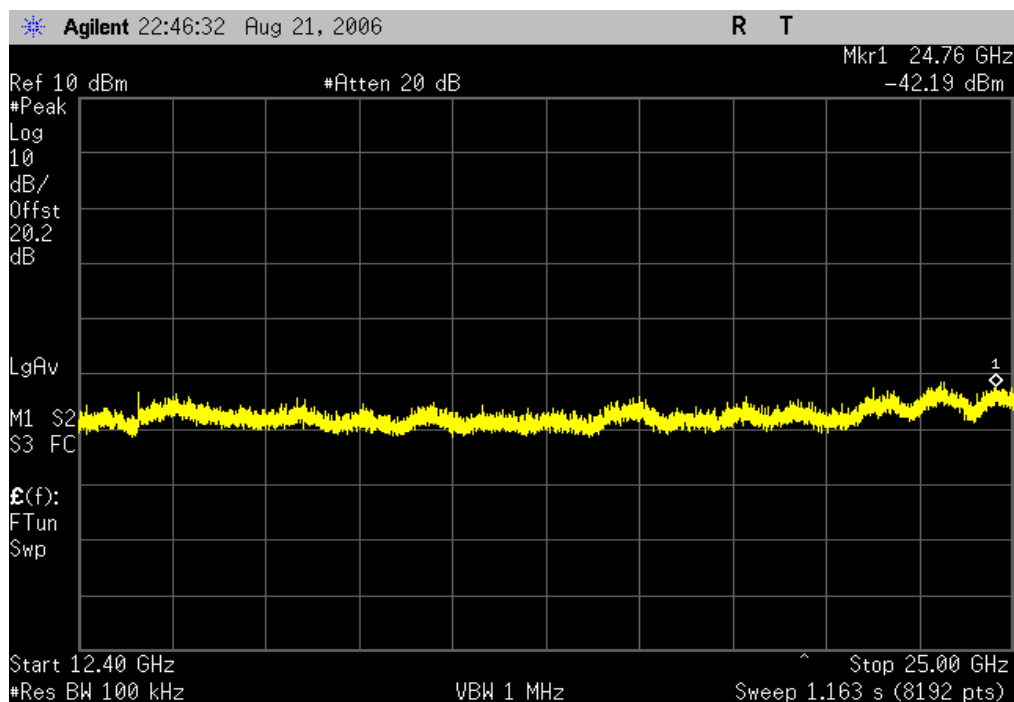
Result: Pass

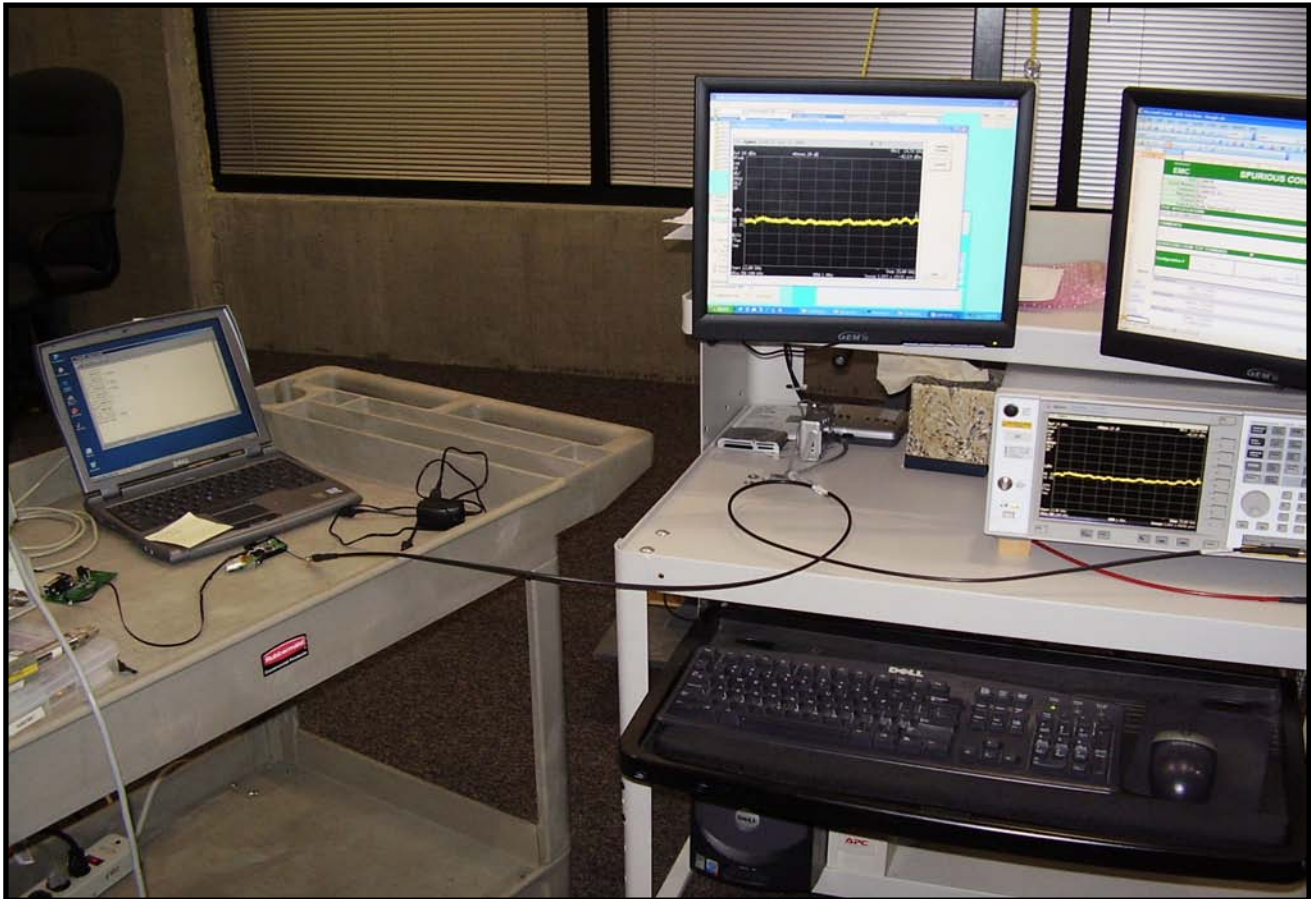
Value: -35.62 dBc

Limit: ≤ -20 dBc

High Channel, 12.4GHz-25GHz

Result: Pass

Value: < -40 dBcLimit: ≤ -20 dBc



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Hewlett-Packard	8593E	AAN	1/25/2006	13
Power Meter	Hewlett Packard	E4418A	SPA	7/23/2004	27
Power Sensor	Hewlett-Packard	8481H	SPB	10/23/2004	24
Signal Generator	Hewlett-Packard	8648D	TGC	1/27/2006	13

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be $1.5 \times 10^6 \div 3 \times 10^3 = 500$ seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."

EMC

POWER SPECTRAL DENSITY

EUT: Dongle: Model F-0461B		Work Order: LABT0210	
Serial Number: Unknown		Date: 08/21/06	
Customer: Logitech, Inc.		Temperature: 23°C	
Attendees: None		Humidity: 36%	
Project: None		Barometric Pres.: 29.89	
Tested by: Rod Peloquin		Power: Battery	Job Site: EV06
TEST SPECIFICATIONS			
FCC 15.247:2006 DTS		Test Method	
		ANSI C63.4:2003, KDB No. 558074	
COMMENTS			
Dongle			
DEVIATIONS FROM TEST STANDARD			
Configuration #	1	Signature 	
		Value	Limit
Low Channel		-12.16 dBm / 3 kHz	8 dBm / 3 kHz
Mid Channel		-12.60 dBm / 3 kHz	8 dBm / 3 kHz
High Channel		-13.61 dBm / 3 kHz	8 dBm / 3 kHz
			Results
			Pass
			Pass
			Pass

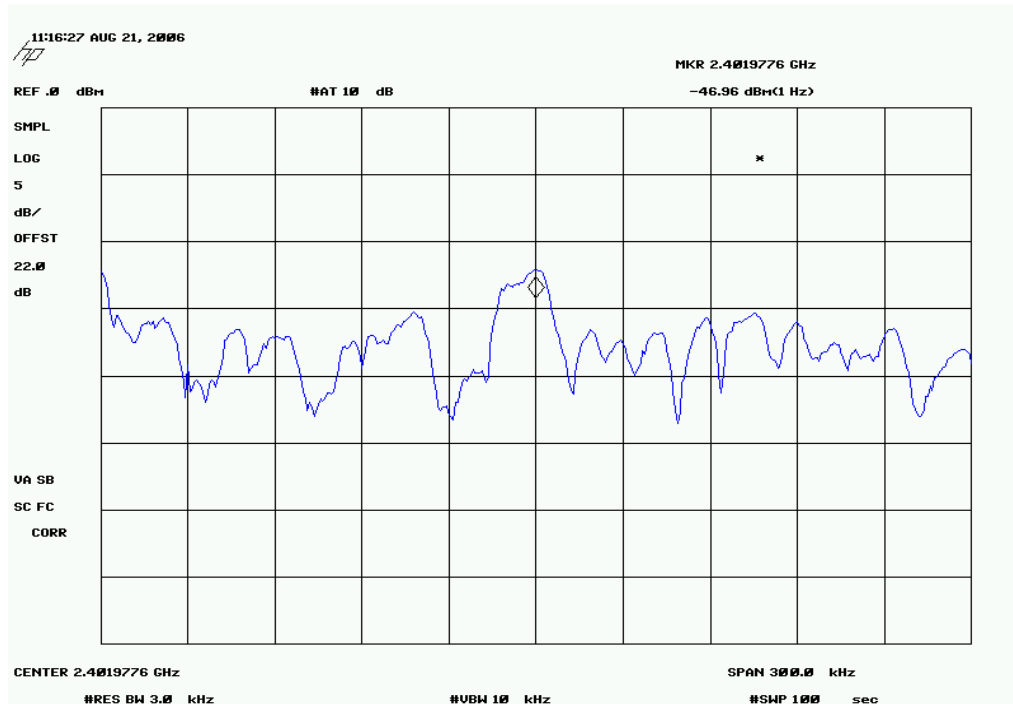
POWER SPECTRAL DENSITY

Low Channel

Result: Pass

Value: -12.16 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

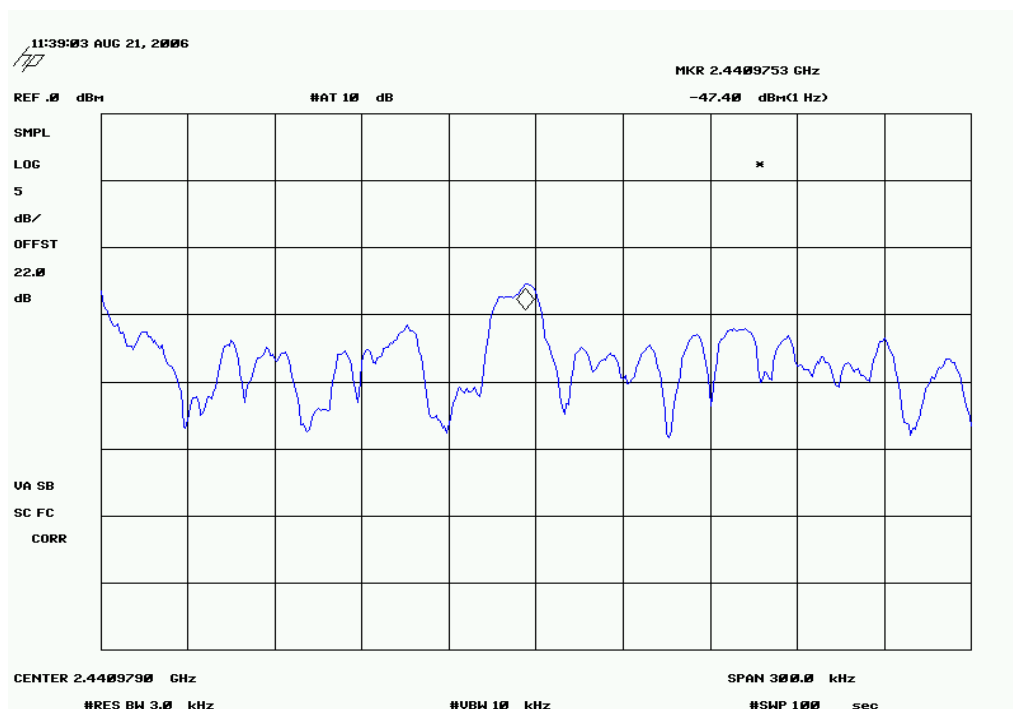


Mid Channel

Result: Pass

Value: -12.60 dBm / 3 kHz

Limit: 8 dBm / 3 kHz



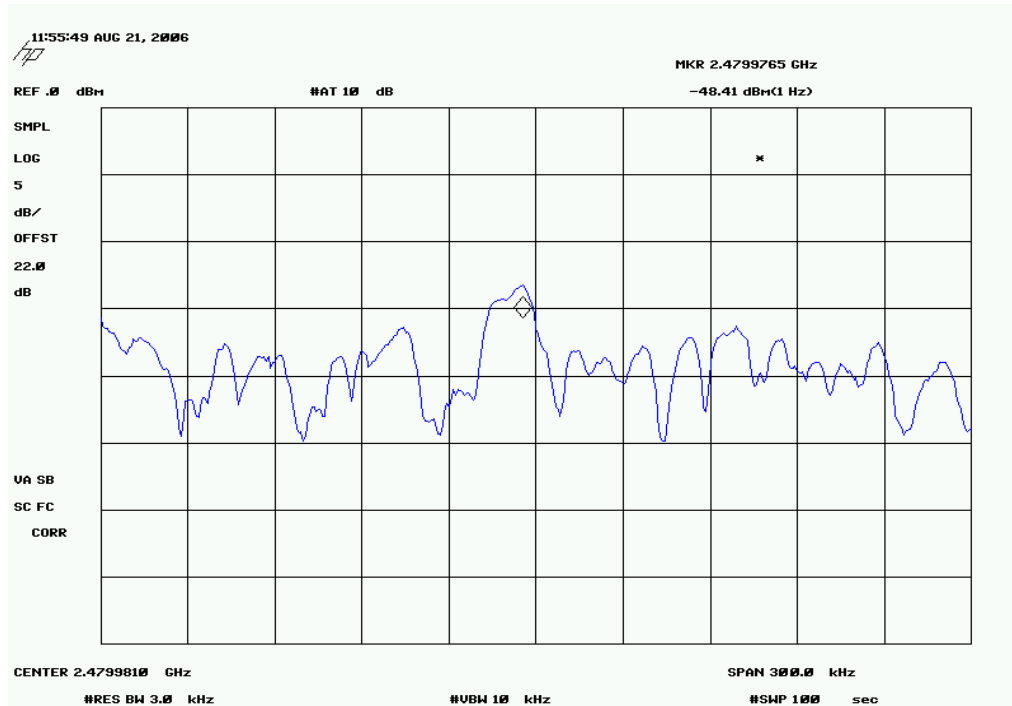
POWER SPECTRAL DENSITY

High Channel

Result: Pass

Value: -13.61 dBm / 3 kHz

Limit: 8 dBm / 3 kHz





Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Transmitting Bluetooth, low channel, max power level, EDR DPSK
Transmitting Bluetooth, mid channel, max power level, EDR DPSK
Transmitting Bluetooth, high channel, max power level, EDR DPSK

POWER SETTINGS INVESTIGATED

120VAC/60Hz

FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 26 GHz

CLOCKS AND OSCILLATORS

Not provided by client

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor + Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
High Pass Filter	Micro-Tronics	HPM50111	HFO	4/4/2006	13
EV01 Cable D			EVD	3/30/2006	13
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	3/23/2006	13
Antenna, Horn	EMCO	3160-09	AHG	NCR	0
EV01 cables g,h,i			EVF	4/17/2006	13
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	5/12/2006	13
Antenna, Horn	EMCO	3160-08	AHK	NCR	0
EV01 cables g,h,j			EVB	3/30/2006	13
EV01 cables c,g, h			EVA	3/30/2006	13
Pre-Amplifier	Miteq	AMF-4D-010100-24-10P	APW	8/2/2005	13
Pre-Amplifier	Miteq	AM-1616-1000	AOL	1/4/2006	13
Antenna, Horn	EMCO	3115	AHC	8/30/2005	12
Antenna, Biconilog	EMCO	3141	AXE	12/28/2005	24
Spectrum Analyzer	Agilent	E4446A	AAT	4/4/2006	12

MEASUREMENT BANDWIDTHS

Frequency Range	Peak Data	Quasi-Peak Data	Average Data
(MHz)	(kHz)	(kHz)	(kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

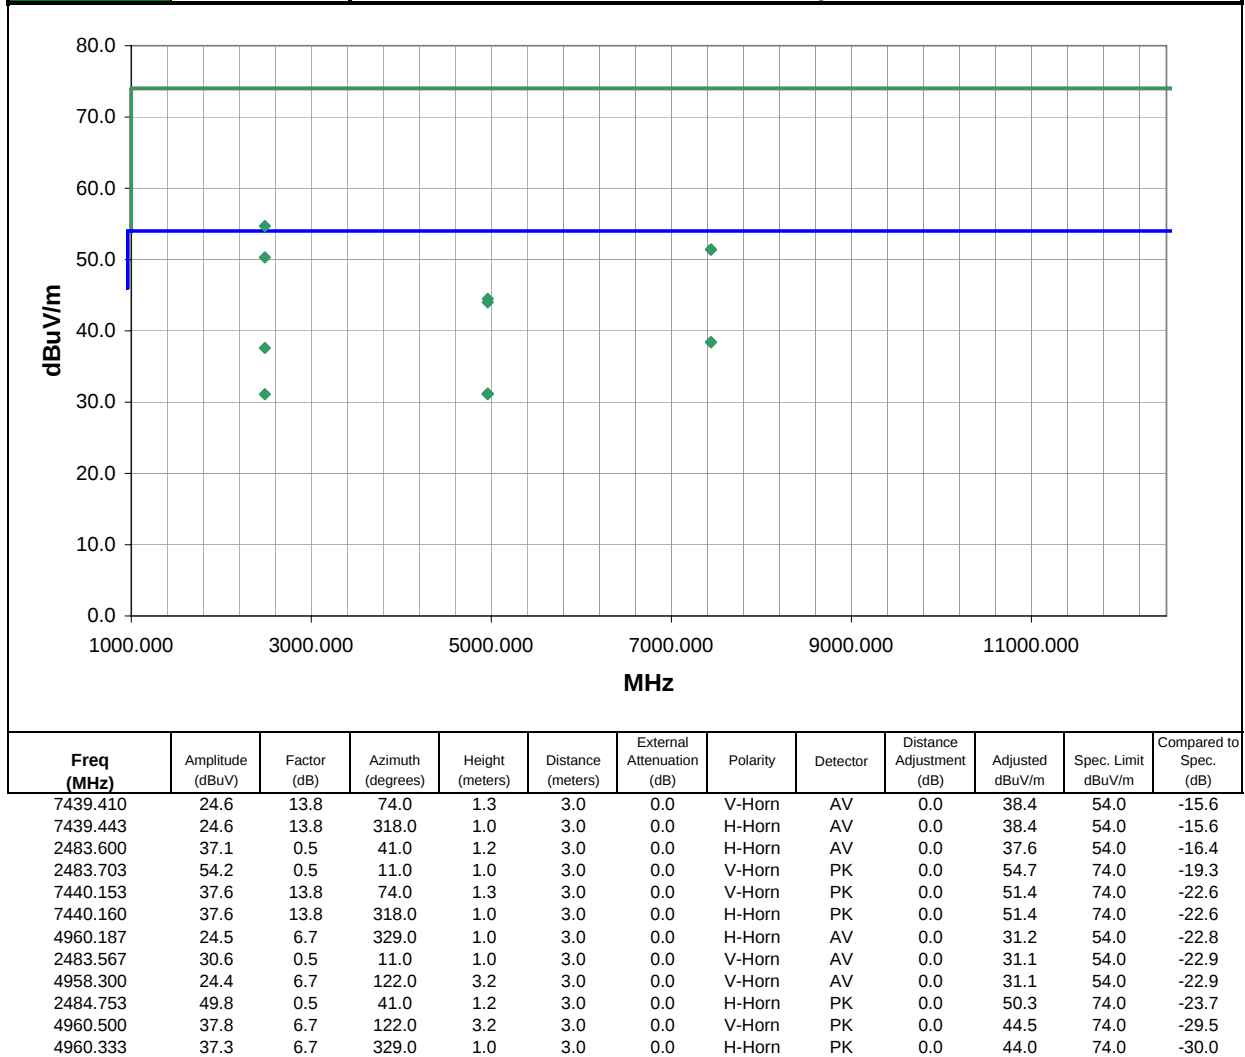
MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

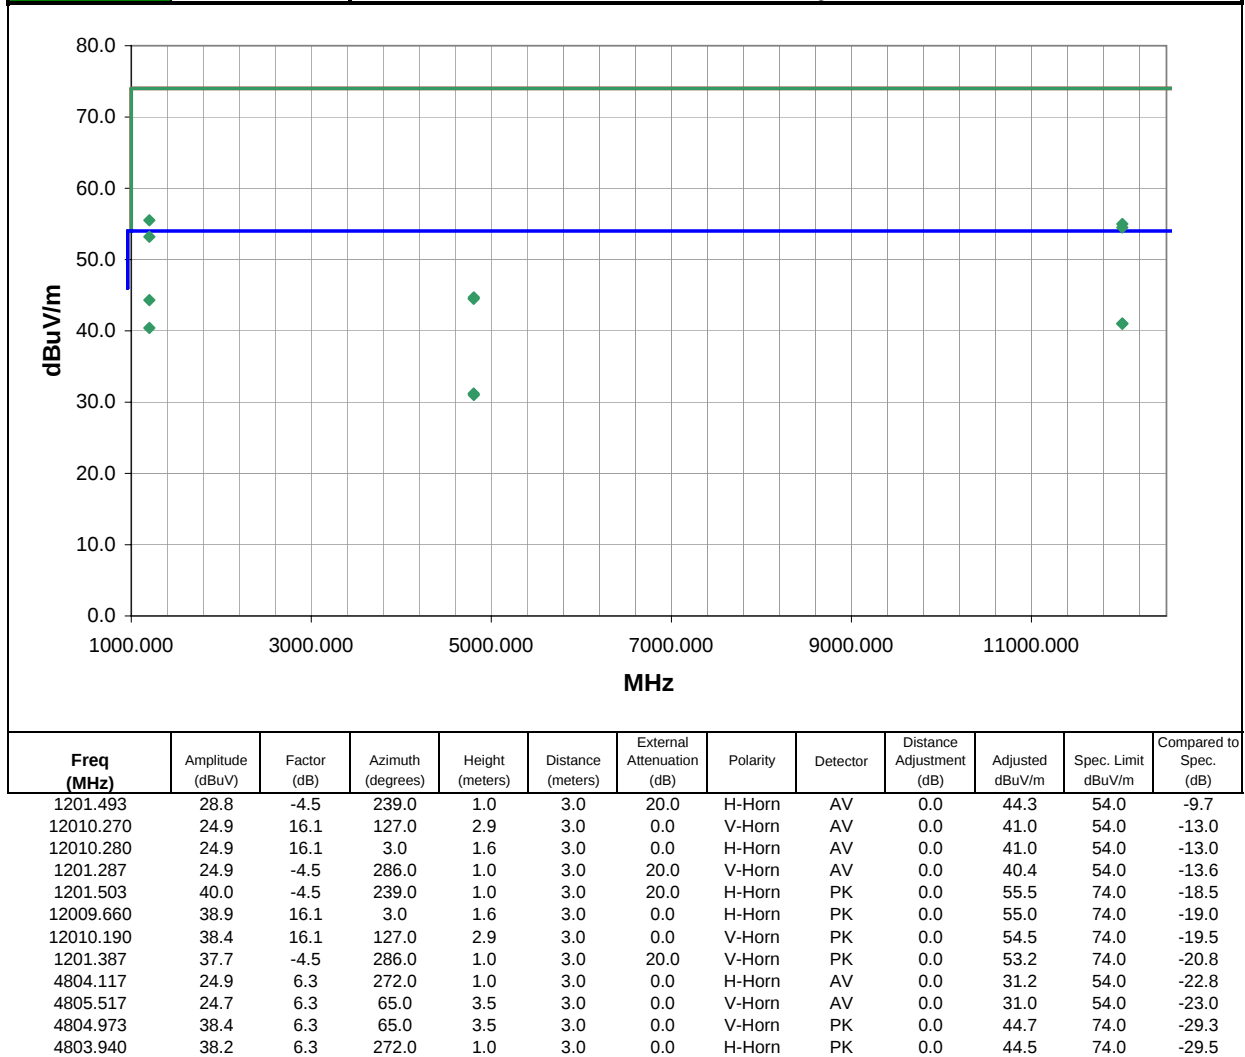
NORTHWEST		SPURIOUS RADIATED EMISSIONS		PSA 2006.05.30	
EMC				EMI 2006.7.11	
EUT: Dongle: Model F-0461B			Work Order: LABT0210		
Serial Number: Unknown			Date: 07/27/06		
Customer: Logitech, Inc.			Temperature: 27		
Attendees: None			Humidity: 38%		
Project: None			Barometric Pres.: 30.15		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01	
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2006 FHSS			ANSI C63.4:2003, DA 00-705:2000		
TEST PARAMETERS					
Antenna Height(s) (m)		1 - 4		Test Distance (m)	
				3	
COMMENTS					
Dongle					
EUT OPERATING MODES					
Transmitting Bluetooth, high channel, max power level, EDR DPSK					
DEVIATIONS FROM TEST STANDARD					
No deviations.					
Run #		11		<i>Holly Ashkannejhad</i> Signature	
Configuration #		2			
Results		Pass			
NVLAP Lab Code 200630-0					

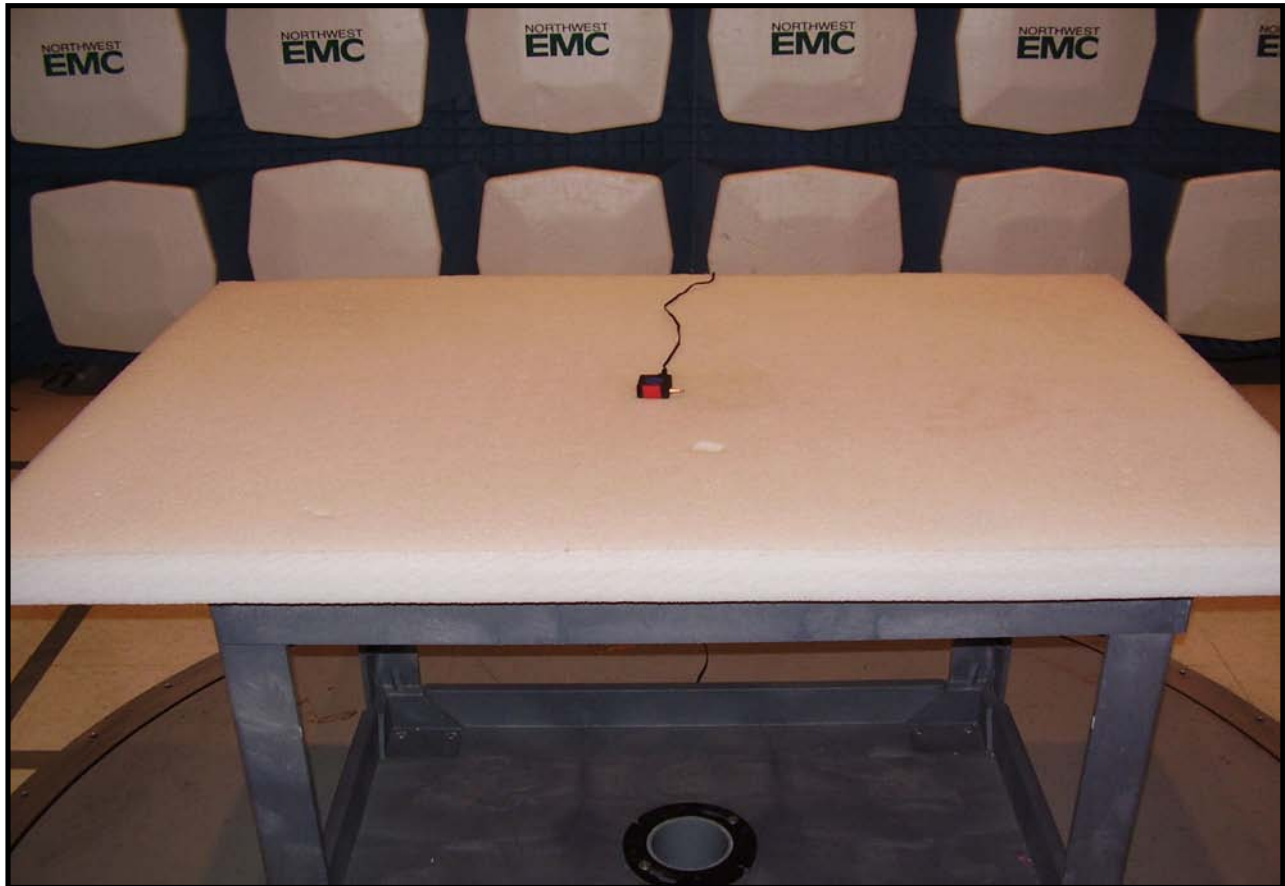


NORTHWEST		SPURIOUS RADIATED EMISSIONS		PSA 2006.05.30	
EMC				EMI 2006.7.11	
EUT: Dongle: Model F-0461B			Work Order: LABT0210		
Serial Number: Unknown			Date: 07/27/06		
Customer: Logitech, Inc.			Temperature: 28		
Attendees: None			Humidity: 38%		
Project: None			Barometric Pres.: 29.89		
Tested by: Holly Ashkannejhad		Power: Battery		Job Site: EV01	
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2006 FHSS			ANSI C63.4:2003, DA 00-705:2000		
TEST PARAMETERS					
Antenna Height(s) (m)		1 - 4		Test Distance (m)	
				3	
COMMENTS					
Dongle					
EUT OPERATING MODES					
Transmitting Bluetooth, mid channel, max power level, EDR DPSK					
DEVIATIONS FROM TEST STANDARD					
No deviations.					
Run #		12		<i>Holly Ashkannejhad</i> Signature	
Configuration #		2			
Results		Pass			
NVLAP Lab Code 200630-0					

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7323.048	24.8	13.4	194.0	1.0	3.0	0.0	H-Horn	AV	0.0	38.2	54.0	-15.8
7323.412	24.8	13.4	31.0	1.0	3.0	0.0	V-Horn	AV	0.0	38.2	54.0	-15.8
3661.979	28.4	4.5	198.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.9	54.0	-21.1
7322.820	38.3	13.4	31.0	1.0	3.0	0.0	V-Horn	PK	0.0	51.7	74.0	-22.3
4881.828	25.0	6.5	12.0	1.3	3.0	0.0	H-Horn	AV	0.0	31.5	54.0	-22.5
4882.418	24.8	6.5	325.0	3.5	3.0	0.0	V-Horn	AV	0.0	31.3	54.0	-22.7
7323.803	37.7	13.4	194.0	1.0	3.0	0.0	H-Horn	PK	0.0	51.1	74.0	-22.9
3662.077	25.1	4.5	129.0	1.3	3.0	0.0	V-Horn	AV	0.0	29.6	54.0	-24.4
4881.853	38.5	6.5	12.0	1.3	3.0	0.0	H-Horn	PK	0.0	45.0	74.0	-29.0
3662.110	40.0	4.5	198.0	1.3	3.0	0.0	H-Horn	PK	0.0	44.5	74.0	-29.5
4881.150	37.7	6.5	325.0	3.5	3.0	0.0	V-Horn	PK	0.0	44.2	74.0	-29.8
3662.170	37.7	4.5	129.0	1.3	3.0	0.0	V-Horn	PK	0.0	42.2	74.0	-31.8

NORTHWEST EMC		SPURIOUS RADIATED EMISSIONS		PSA 2006.05.30 EMI 2006.7.11	
EUT: Dongle: Model F-0461B			Work Order: LABT0210		
Serial Number: Unknown			Date: 07/27/06		
Customer: Logitech, Inc.			Temperature: 27		
Attendees: None			Humidity: 38%		
Project: None			Barometric Pres.: 30.15		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01	
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2006 FHSS			ANSI C63.4:2003, DA 00-705:2000		
TEST PARAMETERS					
Antenna Height(s) (m)		1 - 4		Test Distance (m)	
				3	
COMMENTS					
Dongle					
EUT OPERATING MODES					
Transmitting Bluetooth, low channel, max power level, EDR DPSK					
DEVIATIONS FROM TEST STANDARD					
No deviations.					
Run #		13		Signature <i>Holly Ashkannejhad</i>	
Configuration #		2			
Results		Pass			
NVLAP Lab Code 200630-0					









Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Transmitting Bluetooth, high channel, max power level, EDR DPSK
Transmitting Bluetooth, mid channel, max power level, EDR DPSK
Transmitting Bluetooth, low channel, max power level, EDR DPSK

POWER SETTINGS INVESTIGATED

120VAC/60Hz

SAMPLE CALCULATIONS

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Coaxicom	66702 2910-20	RBR	5/3/2006	13
High Pass Filter	T.T.E.	7766	HFG	12/19/2005	13
EV07 cable d			EVG	3/30/2006	13
LISN	Solar	9252-50-R-24-BNC	LIQ	12/13/2005	13
Receiver	Rohde & Schwartz	ESCI	ARG	6/22/2006	13

MEASUREMENT BANDWIDTHS

	Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50 Ω .

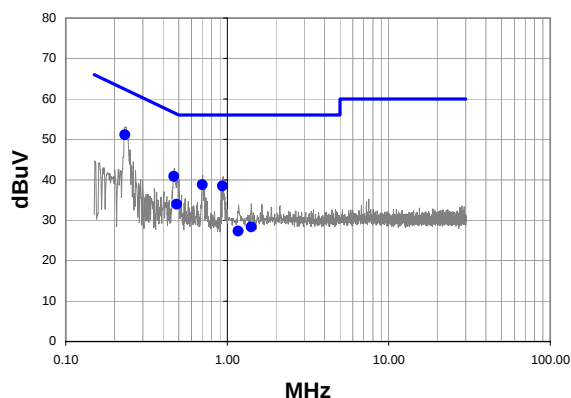
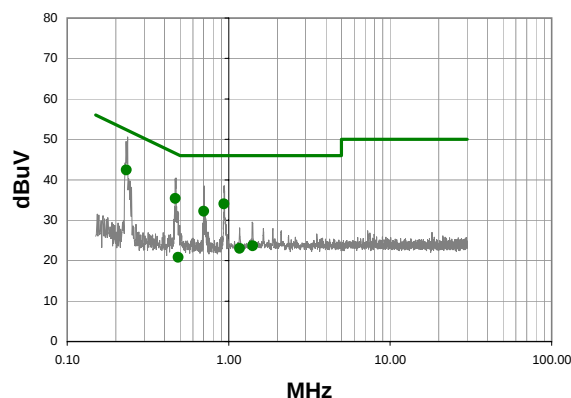
EMC**AC POWERLINE CONDUCTED EMISSIONS**

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/09/06	
Project:	None	Temperature:	24	
Job Site:	EV07	Humidity:	38	
Serial Number:	Unknown	Barometric Pres.:	30.11	
				Tested by: Holly Ashkannejhad
EUT:	Dongle: Model F-0461B			
Configuration:	2			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	Transmitting Bluetooth, low channel, max power level, EDR DPSK			
Deviations:	No deviations.			
Comments:	Dongle			

Test Specifications	Class B	Test Method
FCC 15.207 Class B:2006		ANSI C63.4:2003

Run #	3	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	-----------	--------------------------	----	----------------	------

Quasi-Peak**Average****Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	30.1	1.0	51.1	62.3	-11.3
0.467	20.0	0.8	40.8	56.6	-15.7
0.702	18.1	0.7	38.8	56.0	-17.2
0.937	17.9	0.5	38.4	56.0	-17.6
0.487	13.1	0.8	33.9	56.2	-22.3
1.408	7.8	0.5	28.3	56.0	-27.7
1.172	6.8	0.5	27.3	56.0	-28.7

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	21.4	1.0	42.4	52.3	-10.0
0.467	14.5	0.8	35.3	46.6	-11.2
0.937	13.5	0.5	34.0	46.0	-12.0
0.702	11.5	0.7	32.2	46.0	-13.8
1.408	3.2	0.5	23.7	46.0	-22.3
1.172	2.5	0.5	23.0	46.0	-23.0
0.487	0.0	0.8	20.8	46.2	-25.4

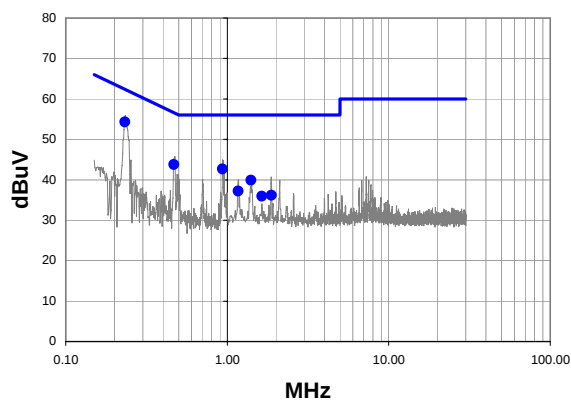
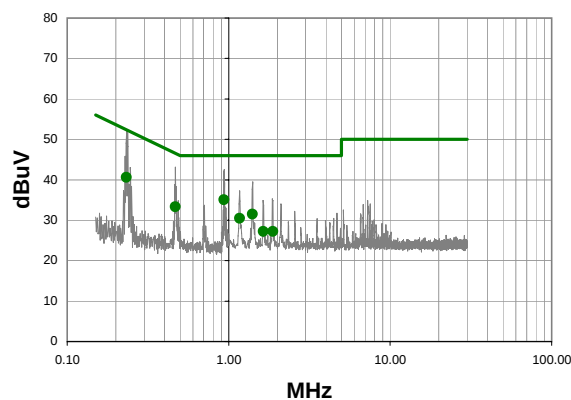
EMC**AC POWERLINE CONDUCTED EMISSIONS**

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/09/06	
Project:	None	Temperature:	24	
Job Site:	EV07	Humidity:	38	
Serial Number:	Unknown	Barometric Pres.:	30.11	
				Tested by: Holly Ashkannejhad
EUT:	Dongle: Model F-0461B			
Configuration:	2			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	Transmitting Bluetooth, low channel, max power level, EDR DPSK			
Deviations:	No deviations.			
Comments:	Dongle			

Test Specifications	Class B	Test Method
FCC 15.207 Class B:2006		ANSI C63.4:2003

Run #	4	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	---------	--------------------------	----	----------------	------

Quasi-Peak**Average****Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	33.3	1.0	54.3	62.3	-8.1
0.468	22.9	0.8	43.7	56.5	-12.8
0.935	22.1	0.5	42.6	56.0	-13.4
1.404	19.4	0.5	39.9	56.0	-16.1
1.172	16.7	0.5	37.2	56.0	-18.8
1.876	15.7	0.5	36.2	56.0	-19.8
1.640	15.4	0.5	35.9	56.0	-20.1

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.935	14.5	0.5	35.0	46.0	-11.0
0.233	19.6	1.0	40.6	52.3	-11.8
0.468	12.5	0.8	33.3	46.5	-13.2
1.404	11.0	0.5	31.5	46.0	-14.5
1.172	10.0	0.5	30.5	46.0	-15.5
1.640	6.7	0.5	27.2	46.0	-18.8
1.876	6.7	0.5	27.2	46.0	-18.8

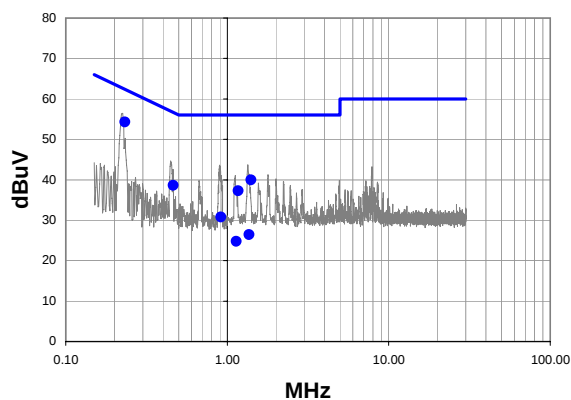
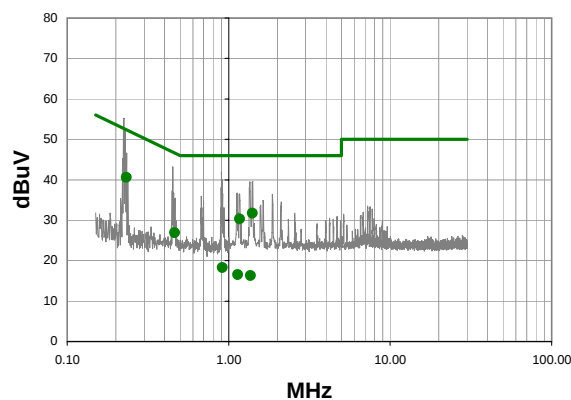
EMC**AC POWERLINE CONDUCTED EMISSIONS**

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/09/06	
Project:	None	Temperature:	24	
Job Site:	EV07	Humidity:	38	
Serial Number:	Unknown	Barometric Pres.:	30.11	
				Tested by: Holly Ashkannejhad
EUT:	Dongle: Model F-0461B			
Configuration:	2			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	Transmitting Bluetooth, mid channel, max power level, EDR DPSK			
Deviations:	No deviations.			
Comments:	Dongle			

Test Specifications	Class B	Test Method
FCC 15.207 Class B:2006		ANSI C63.4:2003

Run #	5	Line:	Neutral	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	---------	--------------------------	----	----------------	------

Quasi-Peak**Average****Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	33.3	1.0	54.3	62.3	-8.1
1.404	19.5	0.5	40.0	56.0	-16.0
0.463	17.8	0.8	38.6	56.6	-18.0
1.172	16.8	0.5	37.3	56.0	-18.7
0.915	10.2	0.6	30.8	56.0	-25.2
1.364	5.9	0.5	26.4	56.0	-29.6
1.140	4.3	0.5	24.8	56.0	-31.2

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	19.6	1.0	40.6	52.3	-11.8
1.404	11.2	0.5	31.7	46.0	-14.3
1.172	9.8	0.5	30.3	46.0	-15.7
0.463	6.1	0.8	26.9	46.6	-19.7
0.915	-2.3	0.6	18.3	46.0	-27.7
1.140	-4.0	0.5	16.5	46.0	-29.5
1.364	-4.2	0.5	16.3	46.0	-29.7

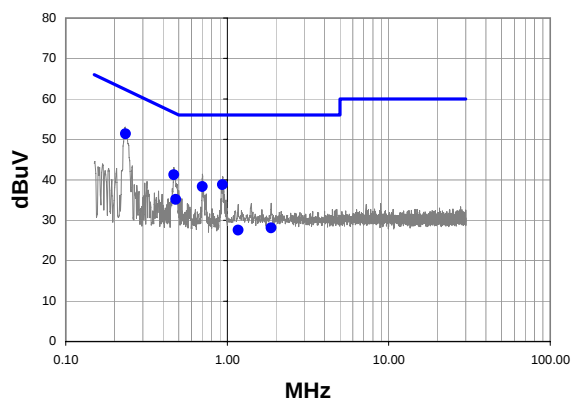
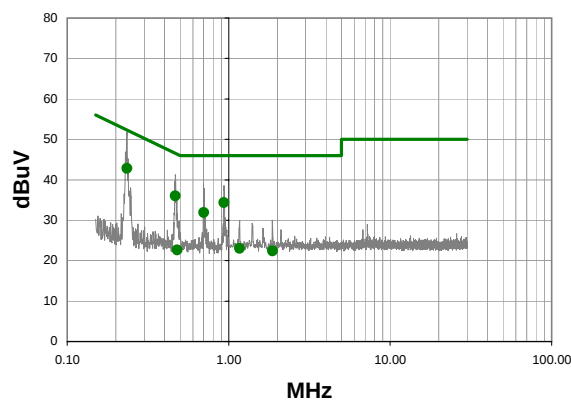
EMC**AC POWERLINE CONDUCTED EMISSIONS**

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/09/06	
Project:	None	Temperature:	24	
Job Site:	EV07	Humidity:	38	
Serial Number:	Unknown	Barometric Pres.:	30.11	
				Tested by: Holly Ashkannejhad
EUT:	Dongle: Model F-0461B			
Configuration:	2			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	Transmitting Bluetooth, mid channel, max power level, EDR DPSK			
Deviations:	No deviations.			
Comments:	Dongle			

Test Specifications	Class B	Test Method
FCC 15.207 Class B:2006		ANSI C63.4:2003

Run #	6	Line:	High Line	Ext. Attenuation:	20	Results	Pass
--------------	---	--------------	-----------	--------------------------	----	----------------	------

Quasi-Peak**Average****Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.235	30.4	1.0	51.4	62.3	-10.9
0.468	20.4	0.8	41.2	56.5	-15.3
0.937	18.2	0.5	38.7	56.0	-17.3
0.703	17.6	0.7	38.3	56.0	-17.7
0.480	14.3	0.8	35.1	56.3	-21.2
1.872	7.6	0.5	28.1	56.0	-27.9
1.172	7.0	0.5	27.5	56.0	-28.5

Average Data - vs - Average Limit

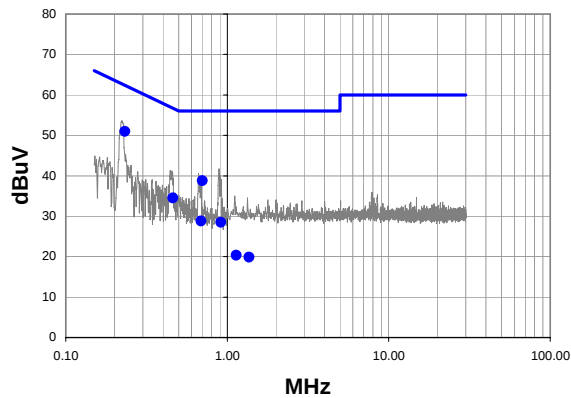
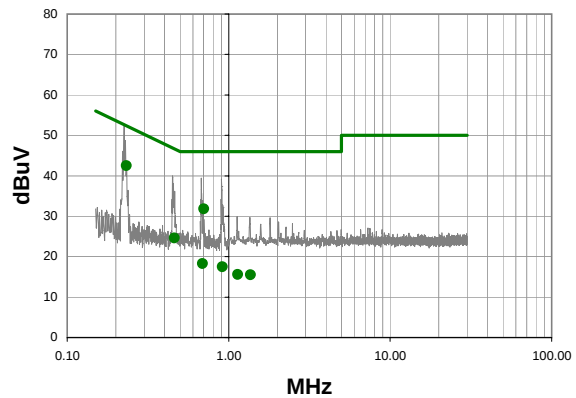
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.235	21.8	1.0	42.8	52.3	-9.5
0.468	15.2	0.8	36.0	46.5	-10.5
0.937	13.8	0.5	34.3	46.0	-11.7
0.703	11.2	0.7	31.9	46.0	-14.1
1.172	2.5	0.5	23.0	46.0	-23.0
1.872	1.9	0.5	22.4	46.0	-23.6
0.480	1.8	0.8	22.6	46.3	-23.7

EMC**AC POWERLINE CONDUCTED EMISSIONS**

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/09/06	<i>Holly Ashkannejhad</i> Tested by: Holly Ashkannejhad
Project:	None	Temperature:	24	
Job Site:	EV07	Humidity:	38	
Serial Number:	Unknown	Barometric Pres.:	30.11	
EUT:	Dongle: Model F-0461B			
Configuration:	2			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	Transmitting Bluetooth, high channel, max power level, EDR DPSK			
Deviations:	No deviations.			
Comments:	Dongle			

Test Specifications				Class B		Test Method			
FCC 15.207 Class B:2006						ANSI C63.4:2003			
Run #	7	Line:	High Line	Ext. Attenuation:	20	Results	Pass		

Quasi-Peak**Average**

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	30.0	1.0	51.0	62.3	-11.4
0.701	18.1	0.7	38.8	56.0	-17.2
0.461	13.7	0.8	34.5	56.7	-22.1
0.689	8.1	0.7	28.8	56.0	-27.2
0.913	7.9	0.6	28.5	56.0	-27.5
1.140	-0.2	0.5	20.3	56.0	-35.7
1.364	-0.6	0.5	19.9	56.0	-36.1

Average Data - vs - Average Limit

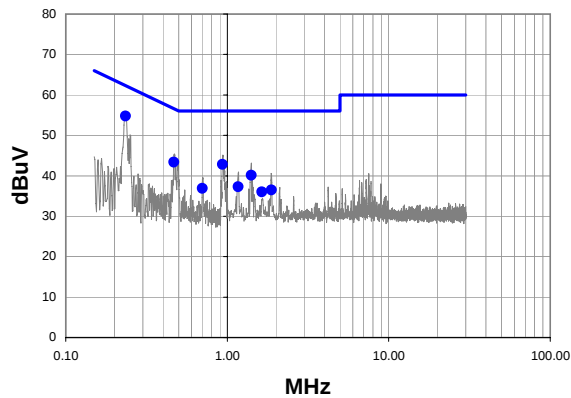
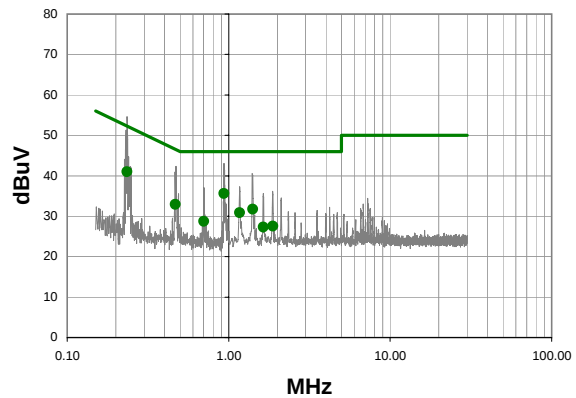
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.233	21.5	1.0	42.5	52.3	-9.9
0.701	11.1	0.7	31.8	46.0	-14.2
0.461	3.8	0.8	24.6	46.7	-22.0
0.689	-2.4	0.7	18.3	46.0	-27.7
0.913	-3.1	0.6	17.5	46.0	-28.5
1.140	-4.9	0.5	15.6	46.0	-30.4
1.364	-5.0	0.5	15.5	46.0	-30.5

EMC**AC POWERLINE CONDUCTED EMISSIONS**

NVLAP Lab Code 200630-0

Work Order:	LABT0210	Date:	08/09/06	
Project:	None	Temperature:	24	
Job Site:	EV07	Humidity:	38	
Serial Number:	Unknown	Barometric Pres.:	30.11	
EUT:	Dongle: Model F-0461B			
Configuration:	2			
Customer:	Logitech, Inc.			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	Transmitting Bluetooth, high channel, max power level, EDR DPSK			
Deviations:	No deviations.			
Comments:	Dongle			

Test Specifications				Class B		Test Method			
FCC 15.207 Class B:2006						ANSI C63.4:2003			
Run #	8	Line:	Neutral	Ext. Attenuation:	20	Results	Pass		

Quasi-Peak**Average**

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.235	33.8	1.0	54.8	62.3	-7.5
0.937	22.3	0.5	42.8	56.0	-13.2
0.467	22.5	0.8	43.3	56.6	-13.2
1.408	19.6	0.5	40.1	56.0	-15.9
1.172	16.8	0.5	37.3	56.0	-18.7
0.703	16.2	0.7	36.9	56.0	-19.1
1.876	16.0	0.5	36.5	56.0	-19.5
1.640	15.5	0.5	36.0	56.0	-20.0

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.937	15.1	0.5	35.6	46.0	-10.4
0.235	20.0	1.0	41.0	52.3	-11.3
0.467	12.1	0.8	32.9	46.6	-13.6
1.408	11.2	0.5	31.7	46.0	-14.3
1.172	10.4	0.5	30.9	46.0	-15.1
0.703	8.0	0.7	28.7	46.0	-17.3
1.876	7.0	0.5	27.5	46.0	-18.5
1.640	6.8	0.5	27.3	46.0	-18.7



BLUETOOTH APPROVALS

FCC Procedure Received from Joe Dichoso on 2-15-02

The following exhibit indicates the FCC Spread Spectrum requirements in Section 15.247 for devices meeting the Bluetooth Specifications in the 2.4 GHz band as of February 2001 operating in the USA. The purpose of this exhibit is to help expedite the approval process for Bluetooth devices. This exhibit provides items that vary for each device and also provides a list of items that are common to Bluetooth devices that explains the remaining requirements. The list of common items can be submitted for each application for equipment authorization. This exhibit only specifies requirements in Section 15.247, requirements in other rule Sections for intentional radiators such as in Section 15.203 or 15.207 must be also be addressed. A Bluetooth device is a FHSS transmitter in the data mode and applies as a Hybrid spread spectrum device in the acquisition mode.

For each individual device, the following items, 1-7 will vary from one device to another and must be submitted.

- 1) The occupied bandwidth in Section 15.247(a)(1)(ii).
- 2) Conducted output power specified in Section 15.247(b)(1).
- 3) EIRP limit in Section 15.247(b)(3).
- 4) RF safety requirement in Section 15.247(b)(4)
- 5) Spurious emission limits in Section 15.247(c).
- 6) Processing gain and requirements for Hybrids in Section 15.247(f) in the acquisition mode.
- 7) Power spectral density requirement in Section 15.247(f) in the acquisition mode.

For all devices, the following items, 1-12, are common to all Bluetooth devices and will not vary from one device to another. This list can be copied into the filing.

1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device don't influence the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters. Only a different hopping sequence will be used. For this reason, the RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

The maximum frequency of the device is: **2402 – 2480 MHz**.

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for devices which will be operated in the USA. Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification must **not be** supported by the device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from it's BD address which is unique for every Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,
01, 51, 03, 55, 05, 04

5 Equally average use of frequencies in data mode and short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units, only the offsets are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions, the Bluetooth system has the following behavior: The first connection between the two devices is established, a hopping sequence is generated. For transmitting the wanted data, the complete hopping sequence is not used and the connection ends. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth, synchronization and repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz.

In every connection, one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing is according to the packet type of the connection. Also, the slave of the connection uses these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence

7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625 μ s * 1600 1/s / 79 * 30s = 0.3797s (in a 30s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s$ (in a 30s period)

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is $f_{center} = 75 \text{ kHz}$.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see item 5), but this time with different input vectors:

****For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.**

****For the page hop sequence, the device address of the paged unit is used as the input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.**

So it is ensured that also in hybrid mode, the frequency is used equally on average.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronization in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code and the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The Dwell in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.