

# 47 CFR FCC Part 15 Subpart C

## Section 15.247

## TEST REPORT

Product : Transceiver

Trade Name : N/A

Model Number : 1512

FCC ID : ELVNTRRG

Prepared for

### **Nutek Corporation**

No.167, Lane 235, Bauchiau Rd., Xindian District,  
New Taipei City 23145, Taiwan

TEL. : +886 2 2918 9478

FAX. : +886 2 2917 9069

Prepared by

### **Interocean EMC Technology Corp.**

#### **Interocean EMC Technology Tin-Fu Laboratory**

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,  
Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX: +886 2 2600 6859



#### **Remark:**

The test report consists of **40** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.

The test result in this report is only subjected to the test sample.

# Table of Contents

<b>1</b>	<b>General Information</b>	<b>5</b>
1.1	Description of Equipment Under Test	5
1.2	Details of tested peripheral equipment	6
1.3	Table for Carrier Frequencies	7
1.4	Test Facility	8
1.5	Test Equipment	9
1.6	Measurement Uncertainty	9
1.7	Summary of Measurement	10
1.8	Justification	10
<b>2</b>	<b>Test Specifications</b>	<b>11</b>
2.1	Test Standard	11
2.2	Operation Mode	11
2.3	Test Step of EUT	11
<b>3</b>	<b>RF Radiated Spurious Emission</b>	<b>12</b>
3.1	Limit	12
3.2	Configuration of Measurement	12
3.3	Test Procedure	13
3.4	Test Result	13
<b>4</b>	<b>RF Conducted Spurious Emission &amp; Band-edge</b>	<b>17</b>
4.1	Limit	17
4.2	Configuration of Measurement	17
4.3	Test Procedure	17
4.4	Test Result	17
<b>5</b>	<b>Maximum Peak output power</b>	<b>21</b>
5.1	Limit	21
5.2	Configuration of Measurement	21
5.3	Test Procedure	21
5.4	Test Result	21
<b>6</b>	<b>6dB Bandwidth</b>	<b>23</b>
6.1	Limit	23
6.2	Configuration of Measurement	23
6.3	Test Procedure	23
6.4	Test Result	23
<b>7</b>	<b>Power Spectral Density</b>	<b>26</b>
7.1	Limit	26
7.2	Configuration of Measurement	26
7.3	Test Procedure	26
7.4	Test Result	26

<b>8</b>	<b>AC Power Line Conducted Emission test</b>	<b>29</b>
8.1	Limits	29
8.2	Configuration of Measurement	29
8.3	Test Procedures	29
8.4	Test Result	29
<b>9</b>	<b>Photographs of Test</b>	<b>32</b>
9.1	AC Power Line Conducted Emission test	32
9.2	Radiated Emission Measurement	33
<b>10</b>	<b>Photographs of EUT</b>	<b>35</b>

# Statement of Compliance

**Applicant:** Nutek Corporation  
**Manufacturer:** Nutek Corporation  
**Product:** Transceiver  
**Model No.:** 1512  
**Tested Power Voltage:** DC 3.7 V  
**Date of Final Test:** Nov. 17, 2017  
**Revision of Report:** Rev. 01  
**Configuration of Measurements and Standards Used :**  
FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

**Note:** 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of IETC

Report Issued: 2017/11/28

Project Engineer:   
Elli Chang

Approved:   
Jerry Liu

## 1 General Information

### 1.1 Description of Equipment Under Test

<b>Product</b>	: Transceiver
<b>Model Number</b>	: 1512
<b>Applicant</b>	: <b>Nutek Corporation</b> No.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Manufacturer</b>	: <b>Nutek Corporation</b> No.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Power Supply</b>	: DC 3.7 V
<b>Operating Frequency</b>	: 909.6 MHz - 915.6 MHz
<b>Channel Number</b>	: 5 channels
<b>Type of Modulation</b>	: DSSS
<b>Antenna description</b>	: This device uses Helix Antenna. Antenna gain: 0 dBi. The antenna is integral to the device, thereby meeting the requirement of FCC 15.203.
<b>Measurement Software</b>	: e3; Ver: 8.120803a7-2
<b>Date of Test</b>	: Nov. 02 ~ 17, 2017
<b>Additional Description</b>	: 1) The test model is “ <b>1512</b> ” and included in this report. 2) For more detail specification about EUT, please refer to the user’s manual.

## 1.2 Details of tested peripheral equipment

### 1.2.1 PC

#### PC33

Model Number : SGH017PFW4  
CPU Speed : Intel Core 2 Duo E5400  
RAM : 2GB DDR3 1333MHz  
EMC Compliance : CE, TUV, NCC, BSMI: R33275  
Hard Disk Drive : 250GB Serial ATA2 3.0Gb/s 7200rpm  
Manufacturer : HP  
Switching Power Supply : LiteOn, PS-4321-9HP, 320W  
Power Cord : Non-shielded, Detachable, 1.8m, w/o core

### 1.2.2 Monitor

#### MT39

Model Number : VS228/VS228H  
Serial Number : B3LMTF185625  
EMC Compliance : FCC, CE, VCCI, BSMI R31018  
Manufacturer : ASUS  
Power Cord : Non-shielded, Un-detachable, 1.8m, w/o core  
Data Cable : D-Sub Cable: Shielded 1.8m, with core

### 1.2.3 USB Keyboard

#### KB32

Model Number : Y-U0011  
Serial Number : N/A  
EMC Compliance : CE, FCC, C-Tick, BSMI T51160, VCCI  
Manufacturer : LOGITECH  
Data Cable : Non-Shielded, Un-detachable, 1.5m

### 1.2.4 USB Mouse

#### USB63

Model Number : M-U0028  
Serial Number : N/A  
EMC Compliance : FCC, CE, BSMI T41126, VCCI  
Manufacturer : LOGITECH  
Data Cable : Non-shielded, Un-detachable, 1.8m

### 1.2.5 Test Cable

USB Cable : Non-shielded, Detachable, 1.0 m, with core

### 1.3 Table for Carrier Frequencies

Channel	Frequency
0	909.6 MHz
1	911.1 MHz
2	912.6 MHz
3	914.1 MHz
4	915.6 MHz

## 1.4 Test Facility

- Site Description** : ☒ RF Test Room    ☒ Conducted 1    ☒ Chamber 3
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** :
  - Federal Communication Commissions – USA  
Designation No.: TW1020 (Test Firm Registration #: 651092)  
Designation No.: TW1113 (Test Firm Registration #: 959554)
  - Industry Canada (IC)  
OUR FILE: 46405-4437  
Registration No. (OATS 1): Site# 4437A-1  
Registration No. (OATS 3): Site# 4437A-3  
Registration No. (Chamber 3): Site# 4437A-5  
Registration No. (OATS 5): Site# 4437A-6
  - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan  
Member No.: 1349  
Registration No. (Conducted Room): C-1094  
Registration No. (Conducted Room): T-1562  
Registration No. (OATS 1): R-1040; G-10274
- Site Accreditation** :
  - Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.  
Accreditation No.:  
SL2-IN-E-0026 for CNS 13438 / CISPR 22  
SL2-R1-E-0026 for CNS 13439 / CISPR 13  
SL2-R2-E-0026 for CNS 13439 / CISPR 13  
SL2-L1-E-0026 for CNS 14115 / CISPR 15
  - Taiwan Accreditation Foundation (TAF)  
Accreditation No.: 1113
  - Vehicle Safety Certification Center (VSCC)  
Approval No.: TW16-11
  - TÜV NORD  
Certificate No: TNTW0801R



### 1.5 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	R&S	ESI7	830154/002	2018/10/17
EMI Test Receiver	R&S	ESCS 30	100134	2018/08/09
Pre-Amplifier	Burgeon	BPA-530	100216	2018/09/25
Spectrum Analyzer	R&S	FSP40	100478	2018/06/19
Bilog Antenna	ETC	MCTD 2786B	BLB17S04020	2018/10/04
Horn Antenna	Schwarzbeck	BBHA9120	9120D-583	2018/09/24
Pre-Amplifier	EMCI	EMC 051845	980110	2018/09/21
RF Cable	Jye Bao	A30N30-5005	CBL51	2018/07/31
RF Cable	Jye Bao	N30N30-5006	CBL53	2018/07/31
RF Cable	HARBOUR	27478LL142	CBL65	2018/07/31
RF Cable	IETC	CBL68	CBL68	2018/07/31
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2018/03/24
L.I.S.N.	Schaffner	MN2050D	1598	2018/08/22
Measurement Software	AUDIX-e3			

Note: The above equipments are within the valid calibration period.

### 1.6 Measurement Uncertainty

Item	Expended Uncertainty (k=2)
Conduction 1:	
Conducted Emission (9 kHz to 30 MHz)	2.98 dB
Chamber 3:	
Radiated Emission Test (30 MHz to 1 GHz)	4.86 dB
Radiated Emission Test (above 1 GHz)	5.12 dB
RF test:	
RF conducted measurement (9 kHz to 40 GHz)	2.92 dB

## 1.7 Summary of Measurement

Report Clause	Test Parameter	Reference Document CFR47 Part15	Results
3	RF Radiated spurious emission	§15.205, 15.209	PASS
4	RF Conducted spurious emission & Band-edge	§15.247(d)	PASS
5	Maximum Peak output power	§15.247(b)	PASS
6	6dB Bandwidth	§15.247(a)(2)	PASS
7	Power spectral density	§15.247(e)	PASS
8	AC Power Line Conducted Emission	§15.207	PASS

## 1.8 Justification

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of the frequency band were all arrive limit requirement, thus we evaluate the EUT pass the specified test.

## 2 Test Specifications

### 2.1 Test Standard

The EUT was performed according to FCC Part 15 Subpart C Section 15.247 procedure and setup followed by ANSI C63.10, 2013 requirements.

### 2.2 Operation Mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

The EUT was operated in continuous transmission mode during all of the tests.



**X axis mode**



**Y axis mode**



**Z axis mode**

### 2.3 Test Step of EUT

- 2.3.1 Setup the fixture to EUT for power supplying.
- 2.3.2 Turn on the power of all equipment.
- 2.3.3 Let the EUT continuous transmission. Executed the test.

### 3 RF Radiated Spurious Emission


#### 3.1 Limit

For intentional radiator, the radiated emission shall comply with FCC Part 15.209(a).  
For intentional radiators, according to FCC Part 15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with FCC Part 15.247 (c)


Frequency (MHz)	Field strength dB( $\mu$ V/m)	Measurement distance (meters)
1.705 ~ 30.0	29.5	30
30 ~ 88	40	3
88 ~ 216	43.5	3
216 ~ 960	46	3
Above 960	54	3

#### 3.2 Configuration of Measurement

Measurement Frequency under 1 GHz

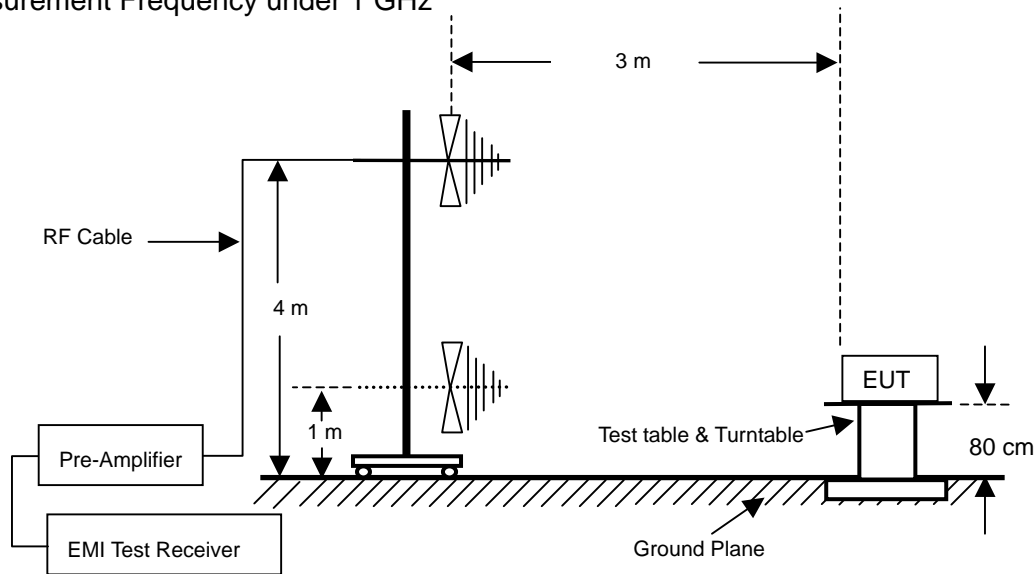

Measurement Frequency above 1 GHz

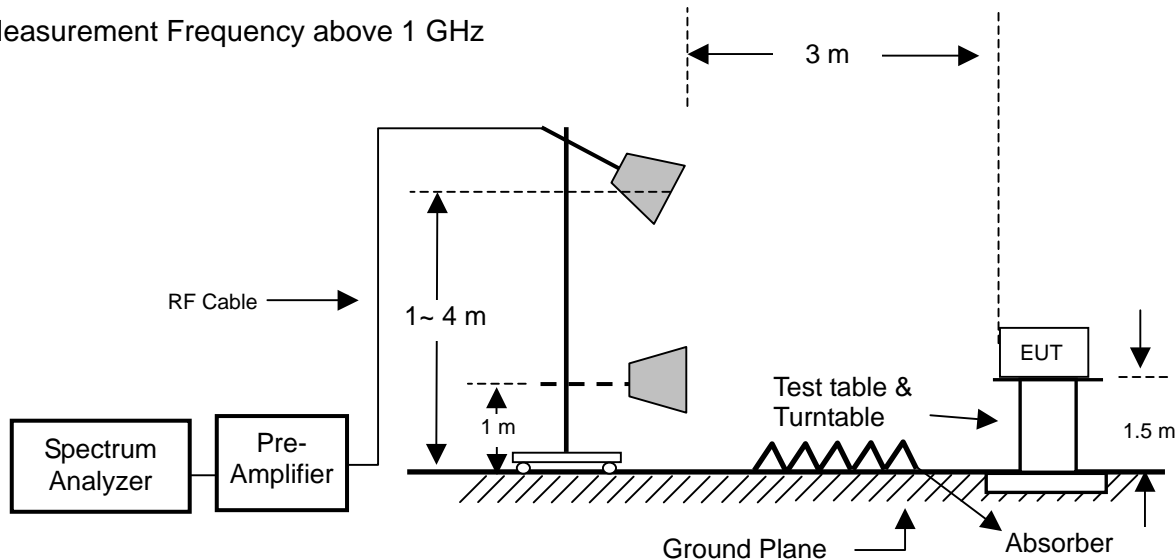

### 3.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested procedure of Jan. 2016 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

Radiated emission measurements were performed from 9kHz to 10GHz. Spectrum Analyzer set as below: For frequency range from 9kHz to 30MHz RBW=9kHz; 30MHz to 1GHz: RBW=100kHz or greater. For frequencies above 1GHz: set RBW=VBW=1MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

### 3.4 Test Result

**PASS.**

The final test data is shown as following pages.

## Radiated Emission Below 1 GHz

After verifying low, middle and high channel, the worse case was found at middle channel X axis.

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
45.85	H	29.66	31.68	19.28	17.26	40.00	-22.74	PK
103.28	H	34.57	31.52	19.83	22.88	43.52	-20.64	PK
190.30	H	37.64	31.23	16.97	23.38	43.52	-20.14	PK
267.95	H	36.68	31.23	21.17	26.62	46.02	-19.40	PK
345.80	H	33.94	31.27	23.20	25.87	46.02	-20.15	PK
498.30	H	31.15	31.29	26.30	26.16	46.02	-19.86	PK
87.86	V	35.16	31.57	15.22	18.81	40.00	-21.19	PK
169.78	V	37.23	31.29	17.72	23.66	43.52	-19.86	PK
256.47	V	34.19	31.23	20.53	23.49	46.02	-22.53	PK
387.40	V	31.93	31.30	24.49	25.12	46.02	-20.90	PK
468.56	V	31.91	31.30	25.83	26.44	46.02	-19.58	PK
531.10	V	31.08	31.31	26.92	26.69	46.02	-19.33	PK

Remark :  $\text{Corrected Level} = \text{Reading} + \text{Correction Factor} - \text{Preamp}$

$\text{Correction Fcator} = \text{Antenna Factor} + \text{Cable Loss}$

$\text{Margin} = \text{Correction Factor} - \text{Limits}$

\*ANSI C63.10\_2013\_11.12.2.3: As an alternative to CISPR quasi-peak measurement, compliance can be determined for the applicable emission requirements using a peak detector.

## Radiated Emission Above 1 GHz

Radiated emission above 1GHz (Worse case X axis)

### CH00 (909.6 MHz)

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1819.2(X Axis)	H	75.20	52.84	32.28	54.64	74	-19.36	PK
1819.2(X Axis)	H	72.27	52.84	32.28	51.71	54	-2.29	AV
1819.2(Y Axis)	H	70.98	52.84	32.28	50.42	54	-3.58	PK
1819.2(Z Axis)	H	73.52	52.84	32.28	52.96	54	-1.04	PK
2728.80	H	69.66	52.35	35.30	52.61	54	-1.39	PK
3638.40	H	67.68	52.47	37.34	52.55	54	-1.45	PK
4548.00	H	64.91	52.41	40.12	52.62	54	-1.38	PK
5457.60	H	65.03	52.50	42.28	54.81	74	-19.19	PK
5457.60	H	57.18	52.50	42.28	46.96	54	-7.04	AV
6367.20	H	63.49	52.23	45.02	56.28	74	-17.72	PK
6367.20	H	54.92	52.23	45.02	47.71	54	-6.29	AV
7276.80	H	65.78	52.17	48.08	61.69	74	-12.31	PK
7276.80	H	54.29	52.17	48.08	50.20	54	-3.80	AV
8186.40	H	54.48	51.84	49.98	52.62	54	-1.38	PK
9096.00	H	59.79	52.02	50.72	58.49	74	-15.51	PK
9096.00	H	47.92	52.02	50.72	46.62	54	-7.38	AV
1819.2(X Axis)	V	73.57	52.84	32.28	53.01	74	-20.99	PK
1819.2(X Axis)	V	69.24	52.84	32.28	48.68	54	-5.32	AV
1819.2(Y Axis)	V	72.68	52.84	32.28	52.12	54	-1.88	PK
1819.2(Z Axis)	V	66.60	52.84	32.28	46.04	54	-7.96	PK
2728.80	V	69.23	52.35	35.30	52.18	54	-1.82	PK
3638.40	V	65.78	52.47	37.34	50.65	54	-3.35	PK
4548.00	V	70.38	52.41	40.12	58.09	74	-15.91	PK
4548.00	V	64.62	52.41	40.12	52.33	54	-1.67	AV
5457.60	V	70.09	52.50	42.28	59.87	74	-14.13	PK
5457.60	V	62.41	52.50	42.28	52.19	54	-1.81	AV
6367.20	V	65.34	52.23	45.02	58.13	74	-15.87	PK
6367.20	V	54.52	52.23	45.02	47.31	54	-6.69	AV
7276.80	V	66.19	52.17	48.08	62.10	74	-11.90	PK
7276.80	V	55.77	52.17	48.08	51.68	54	-2.32	AV
8186.40	V	54.31	51.84	49.98	52.45	54	-1.55	PK
9096.00	V	59.78	52.02	50.72	58.48	74	-15.52	PK
9096.00	V	47.26	52.02	50.72	45.96	54	-8.04	AV

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Fcator = Antenna Factor + Cable Loss

Margin = Correction Factor - Limits

\* Mark indicated background noise level.

### CH4 (915.6 MHz)

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1831.20	H	74.88	52.83	32.33	54.38	74	-19.62	PK
1831.20	H	72.02	52.83	32.33	51.52	54	-2.48	AV
2746.80	H	72.69	52.35	35.34	55.68	74	-18.32	PK
2746.80	H	69.82	52.35	35.34	52.81	54	-1.19	AV
3662.40	H	66.50	52.47	37.40	51.43	54	-2.57	PK
4578.00	H	64.90	52.42	40.21	52.69	54	-1.31	PK
5493.60	H	63.02	52.50	42.35	52.87	54	-1.13	PK
6409.20	H	65.88	52.22	45.21	58.87	74	-15.13	PK
6409.20	H	56.38	52.22	45.21	49.37	54	-4.63	AV
7324.80	H	67.84	52.11	48.28	64.01	74	-9.99	PK
7324.80	H	56.66	52.11	48.28	52.83	54	-1.17	AV
8240.40	H	54.15	51.85	50.02	52.32	54	-1.68	PK
9156.00	H	59.05	52.03	50.86	57.88	74	-16.12	PK
9156.00	H	46.74	52.03	50.86	45.57	54	-8.43	AV
1831.20	V	73.99	52.83	32.33	53.49	74	-20.51	PK
1831.20	V	70.31	52.83	32.33	49.81	54	-4.19	AV
2746.80	V	73.26	52.35	35.34	56.25	74	-17.75	PK
2746.80	V	69.77	52.35	35.34	52.76	54	-1.24	AV
3662.40	V	66.28	52.47	37.40	51.21	54	-2.79	PK
4578.00	V	67.36	52.42	40.21	55.15	74	-18.85	PK
4578.00	V	61.67	52.42	40.21	49.46	54	-4.54	AV
5493.60	V	65.03	52.50	42.35	54.88	74	-19.12	PK
5493.60	V	56.29	52.50	42.35	46.14	54	-7.86	AV
6409.20	V	62.25	52.22	45.21	55.24	74	-18.76	PK
6409.20	V	51.16	52.22	45.21	44.15	54	-9.85	AV
7324.80	V	67.79	52.11	48.26	63.94	74	-10.06	PK
7324.80	V	56.83	52.11	48.26	52.98	54	-1.02	AV
8240.40	V	54.60	51.85	50.02	52.77	54	-1.23	PK
9156.00	V	59.90	52.03	50.86	58.73	74	-15.27	PK
9156.00	V	47.51	52.03	50.86	46.34	54	-7.66	AV

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Fcator = Antenna Factor + Cable Loss

Margin = Correction Factor - Limits

\* Mark indicated background noise level.




## 4 RF Conducted Spurious Emission & Band-edge

### 4.1 Limit

According to FCC Part 15.247(d) requirement :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 4.2 Configuration of Measurement



### 4.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested procedure of Jan. 2016 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

The measurements were performed from 9 kHz to 10 GHz RF antenna conducted per FCC 15.247 (c) was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set  $\geq$  RBW.

Harmonics and spurious noise must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limit for each channel.

### 4.4 Test Result


**PASS.**

The final test data is shown as following pages.


Remark: The frequency range from 9 kHz to 30 MHz was pre-scanned and the results were 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

## Conducted Spurious Emission


### 909.6 MHz (30 M ~ 1 GHz)

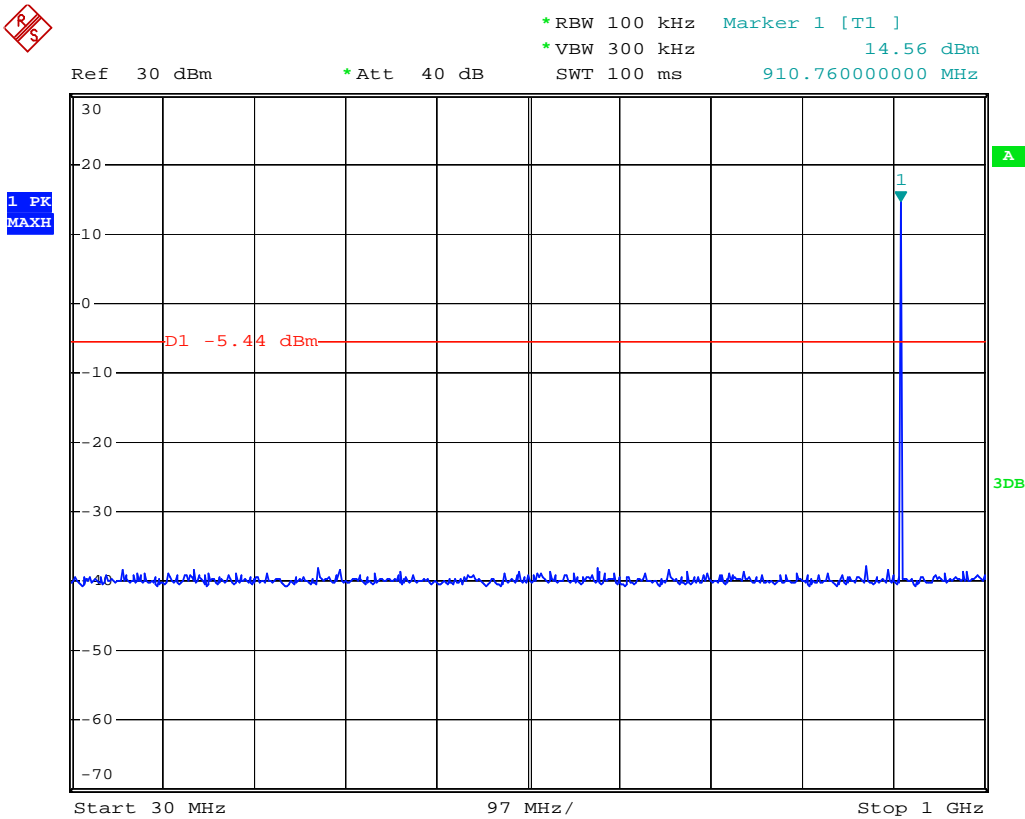


### 909.6 MHz (1 G ~ 10 GHz)

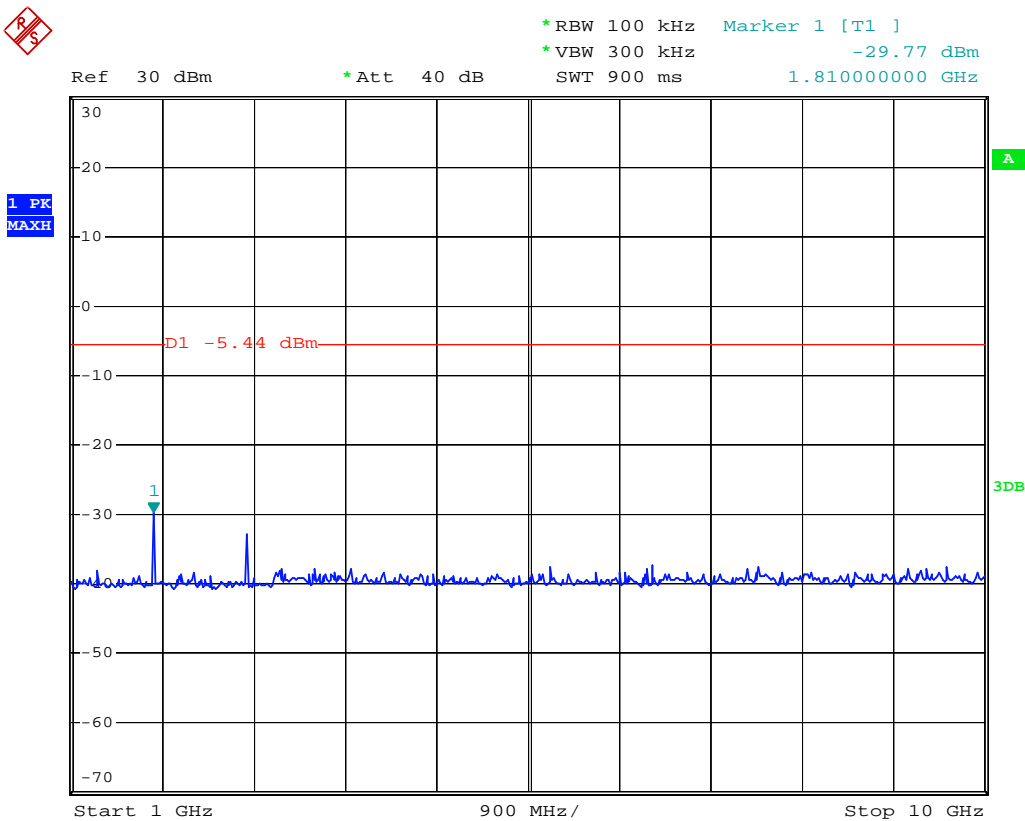

915.6 MHz (30 M ~ 1 GHz)

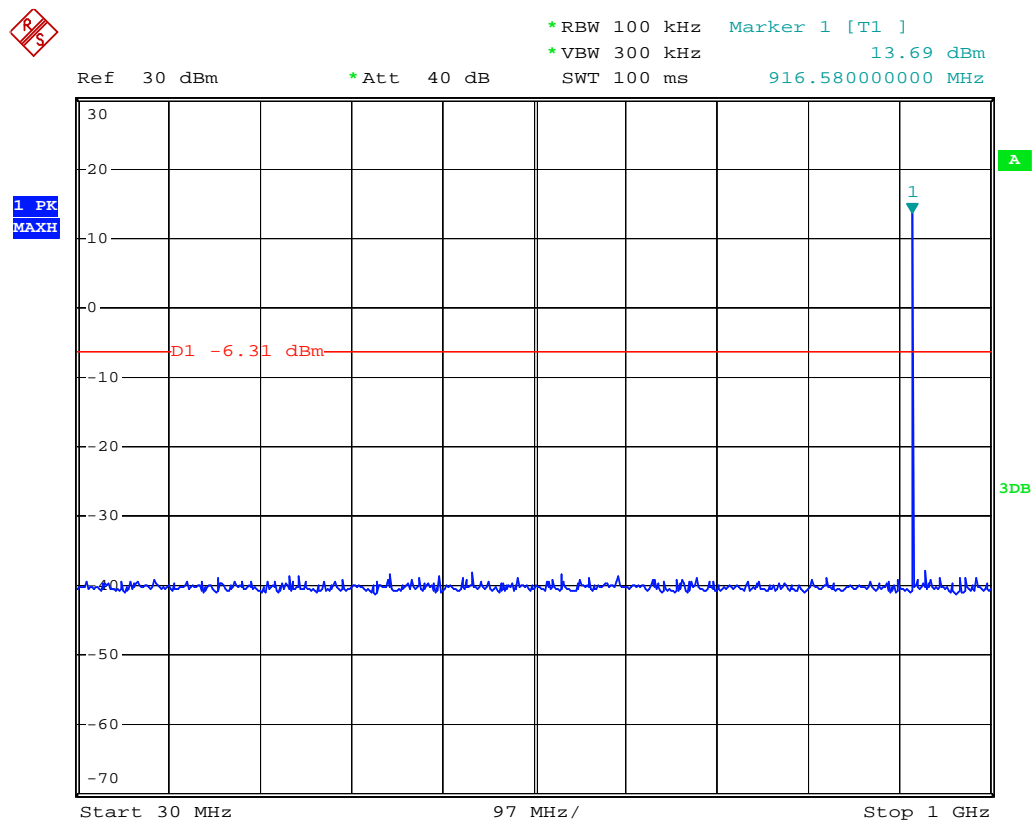


915.6 MHz (1 G ~ 10 GHz)

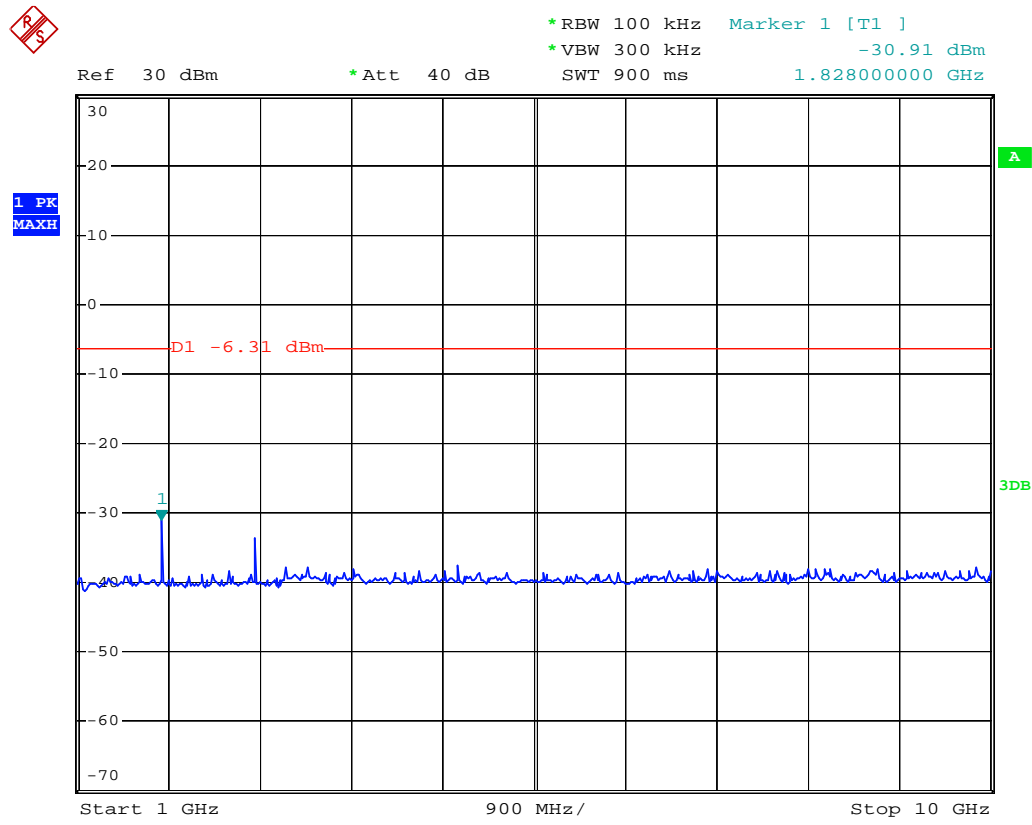


# Band-edge

## 909.6 MHz

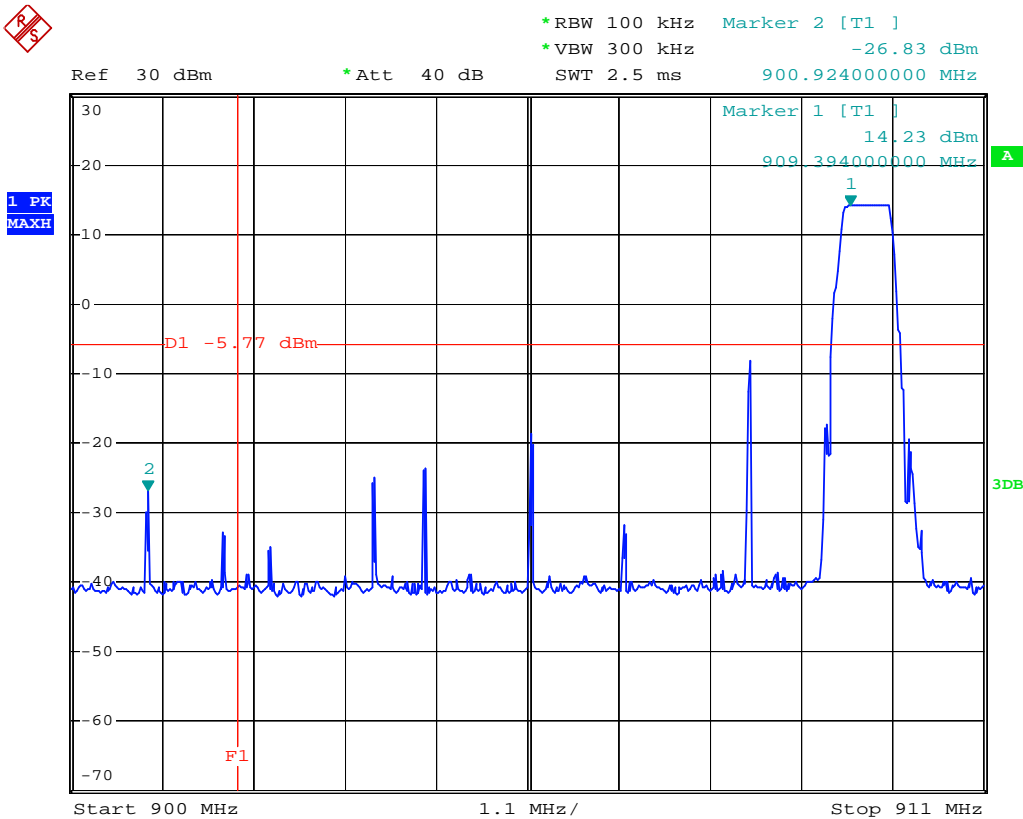

## 915.6 MHz

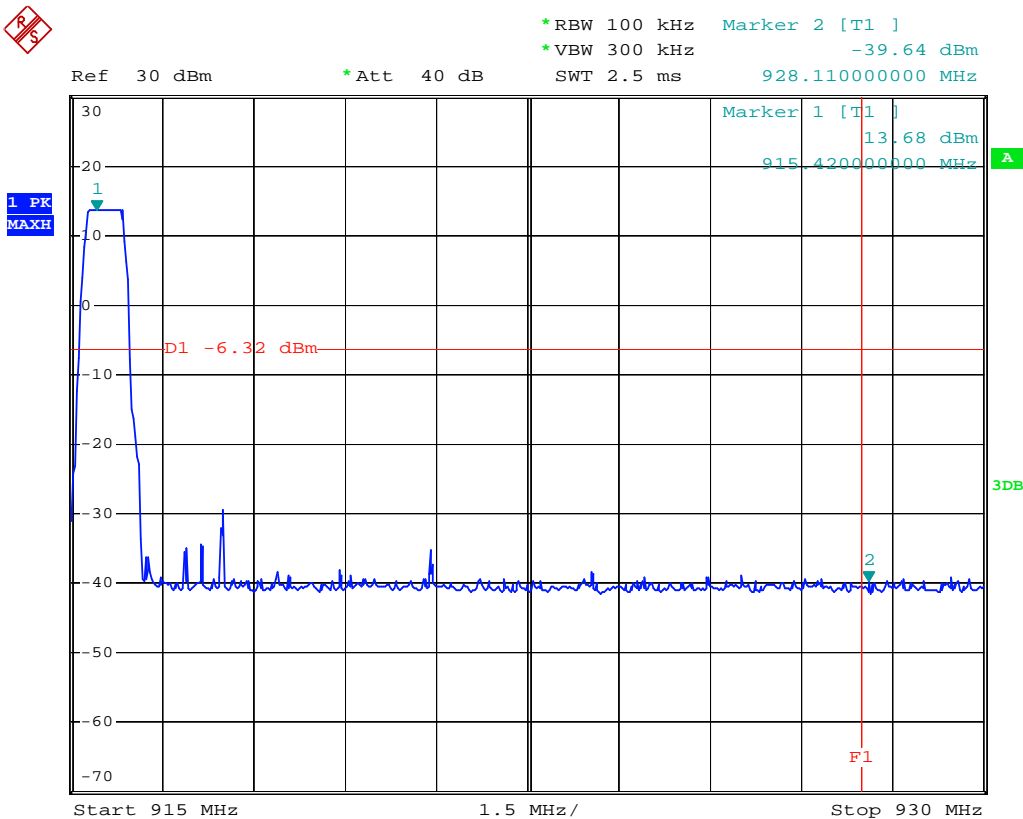

## 5 Maximum Peak output power

### 5.1 Limit


For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt.

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 watts.

For systems using digital modulation in the 2400–2483.5 MHz bands: The maximum conducted output power shall be less than 1Watt.

### 5.2 Configuration of Measurement



### 5.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested procedure of Jan. 2016 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

For FCC §15.247(b) the power output was measured on the EUT using a 50 ohm SMA cable connected to Spectrum Analyzer. Peak output power was read directly from Spectrum Analyzer.

Set :

1.  $RBW \geq$  DTS bandwidth,  $VBW \geq 3 \times RBW$
2.  $Span \geq 3 \times RBW$
3. Detector = peak, trace mode = max hold
4. All trace to fully stabilize
5. Use peak marker function to determine the peak amplitude

### 5.4 Test Result


**PASS.**

The final test data is shown as following table.


# Maximum Peak Power

Test CH		Maximum Peak Power		Limit (dBm)	Margin (dB)
CH No.	Freq. (MHz)	dBm	Watts		
0	909.6	14.36	0.0273	30	-15.64
4	915.6	13.73	0.0236	30	-16.27

## 909.6 MHz Maximum Peak Power

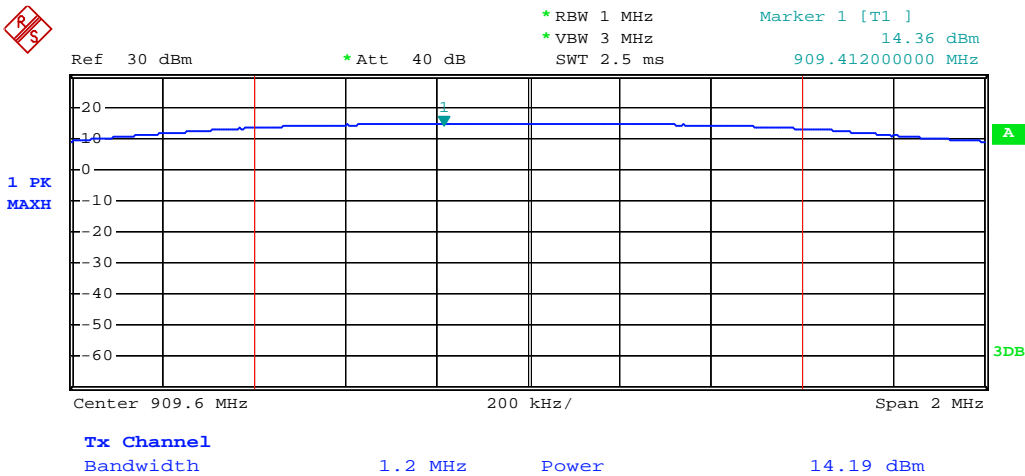

## 915.6 MHz Maximum Peak Power

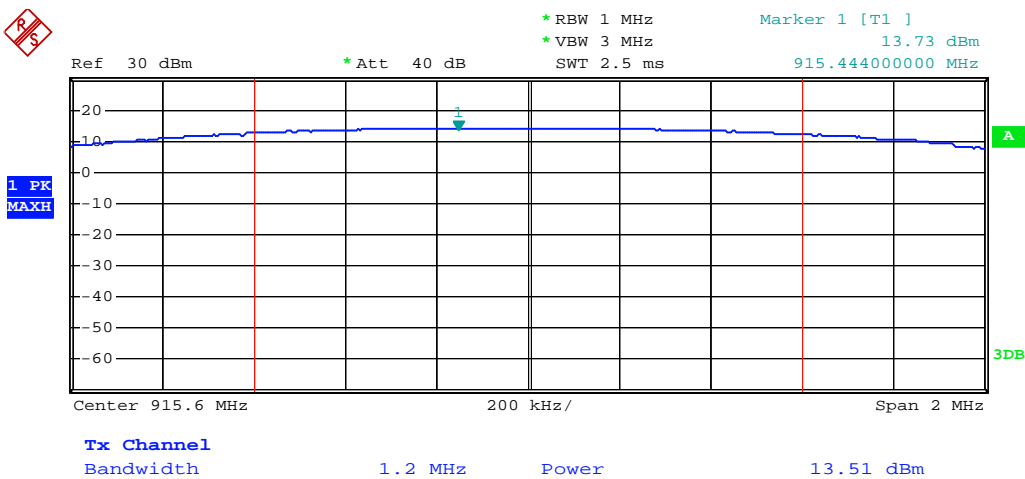


## 6 6dB Bandwidth

### 6.1 Limit

According to FCC Part15.247 (a)(2) requirement :

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz, The minimum 6dB bandwidth shall be at least 500 kHz.

### 6.2 Configuration of Measurement



### 6.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested procedure of Jan. 2016 KDB558074 D01 for compliance to FCC 47 CFR 15.247 requirements.

The minimum 6dB bandwidth was measured using a 50 ohm spectrum analyzer.

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) All trace to fully stabilize
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### 6.4 Test Result


**PASS.**

The final test data is shown on as following pages.

## 6dB Bandwidth


Test CH		6dB Bandwidth (kHz)	Limit (kHz)	Result
CH No.	Freq. (MHz)			
0	909.6	728.0	>500	Pass
4	915.6	724.0	>500	Pass

### 909.6 MHz 6dB Bandwidth

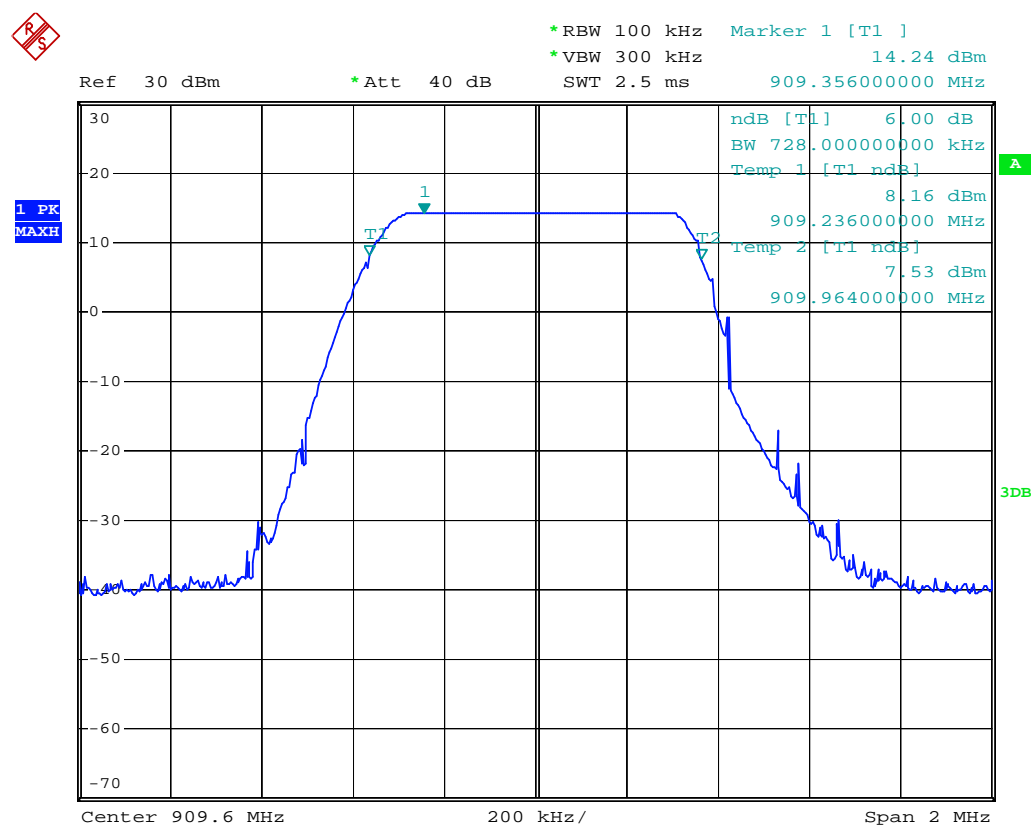



915.6 MHz 6dB Bandwidth

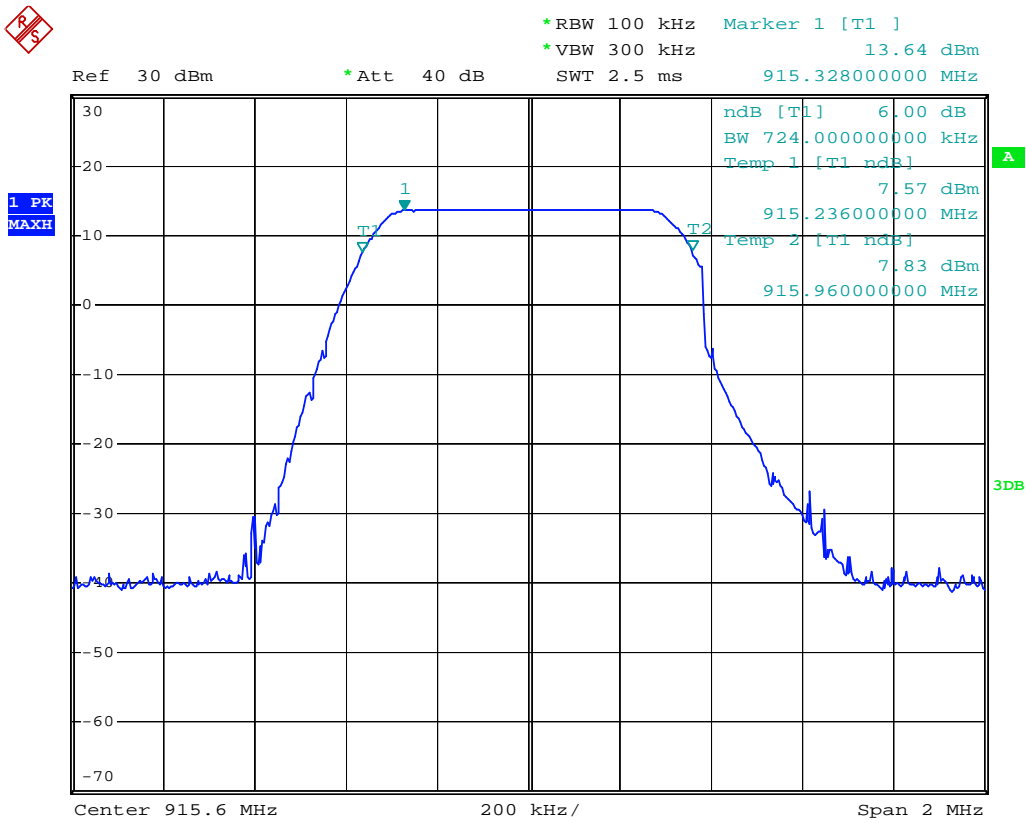


## 7 Power Spectral Density

### 7.1 Limit

According to FCC Part15.247 (e) requirement :

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.2 Configuration of Measurement



### 7.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested procedure of Jan. 2016 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

Set::

- 1) Analyzer center frequency to DTS channel center frequency
- 2) The span  $\geq 1.5$  times the DTS bandwidth
- 3) RBW:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- 4) VBW  $\geq 3 \times \text{RBW}$
- 5) Detector = Peak
- 6) Trace mode = Max hold
- 7) Sweep = auto couple
- 8) All trace to fully stabilize
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW
- 10) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

### 7.4 Test Result


**PASS.**

The final test data is shown on as following pages.


### Power Spectral Density

Test CH		PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
CH No.	Freq. (MHz)			
0	909.6	5.98	8	PASS
4	915.6	5.74	8	PASS

### 909.6 MHz Power Spectral Density

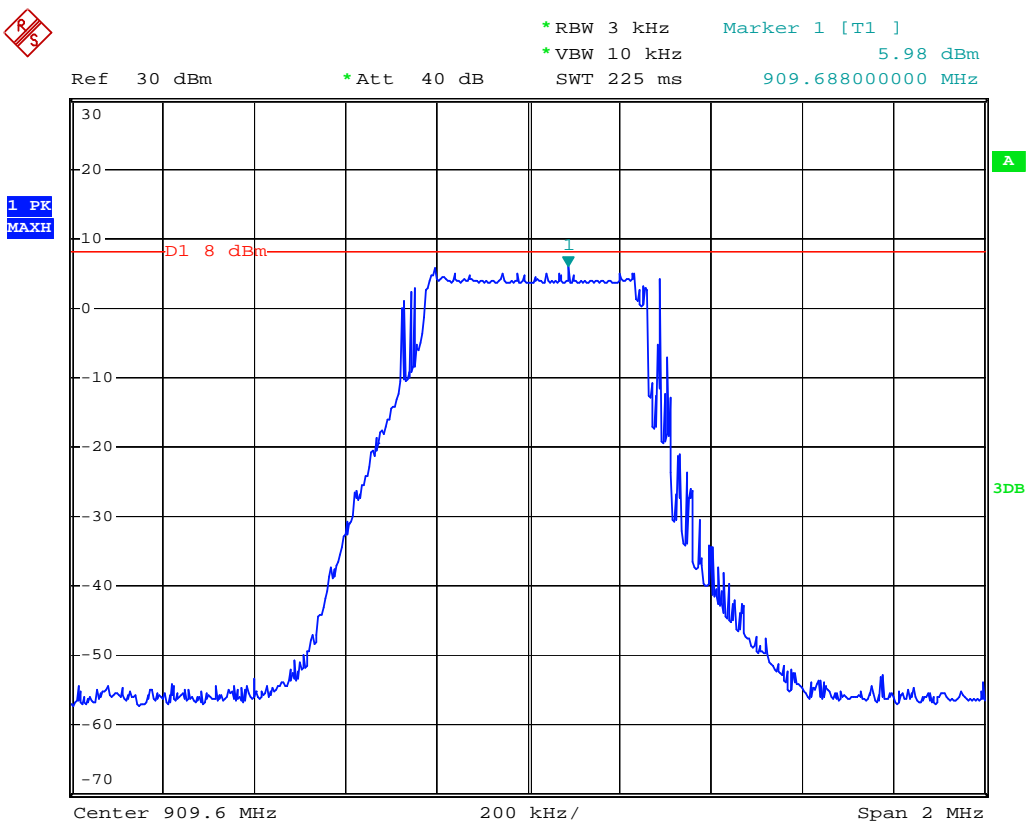

915.6 MHz Power Spectral Density

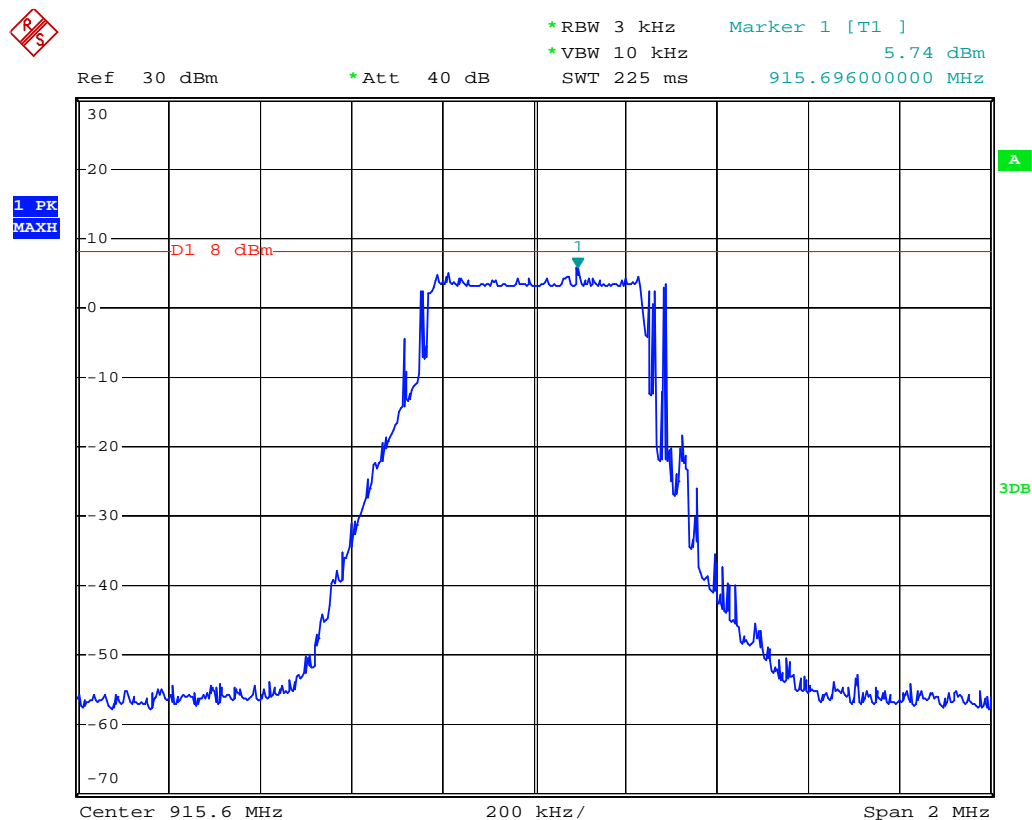


## 8 AC Power Line Conducted Emission test

### 8.1 Limits

Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 to 0.5	66 to 56	56 to 46
> 0.5 to 5	56	46
> 5 to 30	60	50

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 30 MHz.

### 8.2 Configuration of Measurement

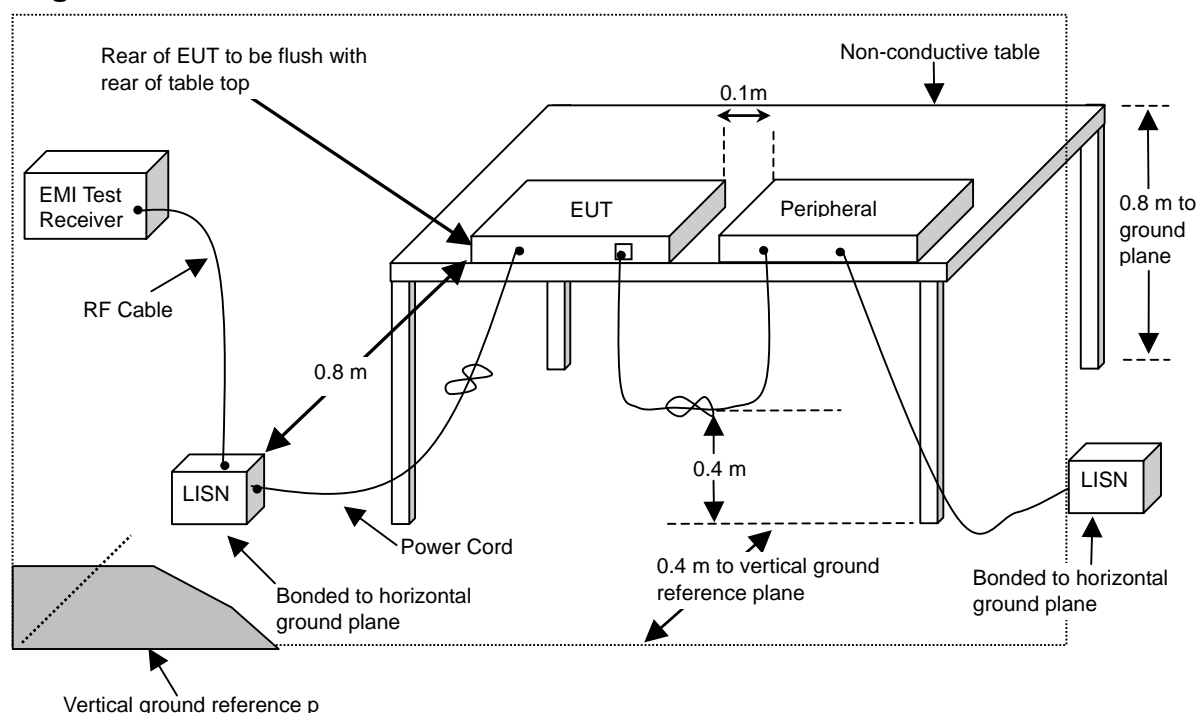

### 8.3 Test Procedures

The EUT was setup to ANSI C63.10, 2013; tested procedure of Jan. 2016 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

- 1) The EUT was placed 80cm height above ground on a non-conductive table and vertical conducting plane located 40cm to the rear of the EUT.
- 2) The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm/50mH coupling impedance for the measuring equipment. The auxiliary equipment will place in secondary LISN.
- 3) Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10, 2013 on conducted measurement.

### 8.4 Test Result

**PASS.**

The final test data is shown as following pages.


# Power Line Conducted Test Data

CLIENT: Nutek Corporation  
 EUT: Transceiver  
 MODEL: 1512  
 RATING: 120Vac/60Hz  
 COMMENT: Charger mode

OPERATOR: Elli  
 TEST SITE: Conducted 1  
 POLARIZATION: Line  
 TEMP/HUM: 25.3°C / 46%

Data:1

2017-11-06

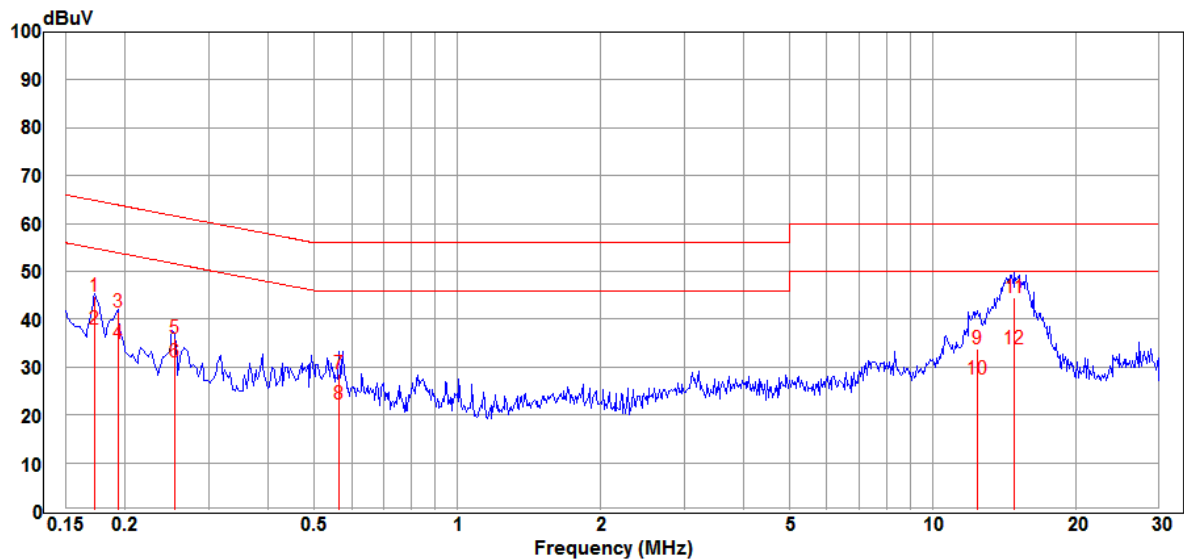

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.1731	34.57	10.26	44.83	64.81	-19.98	QP
2	0.1731	27.79	10.26	38.05	54.81	-16.76	Average
3	0.1934	31.32	10.26	41.58	63.89	-22.31	QP
4	0.1934	24.56	10.26	34.82	53.89	-19.07	Average
5	0.2548	25.75	10.27	36.02	61.60	-25.58	QP
6	0.2548	20.70	10.27	30.97	51.60	-20.63	Average
7	0.5641	18.33	10.30	28.63	56.00	-27.37	QP
8	0.5641	11.92	10.30	22.22	46.00	-23.78	Average
9	12.4490	23.07	10.80	33.87	60.00	-26.13	QP
10	12.4490	16.61	10.80	27.41	50.00	-22.59	Average
11	14.9070	33.73	10.82	44.55	60.00	-15.45	QP
12	14.9070	23.06	10.82	33.88	50.00	-16.12	Average

## Power Line Conducted Test Data

CLIENT: Nutek Corporation

EUT: Transceiver

MODEL: 1512

RATING: 120Vac/60Hz

COMMENT: Charger mode

OPERATOR: Elli


TEST SITE: Conducted 1

POLARIZATION: Neutral

TEMP/HUM: 25.3°C / 46%

Data:2

2017-11-06

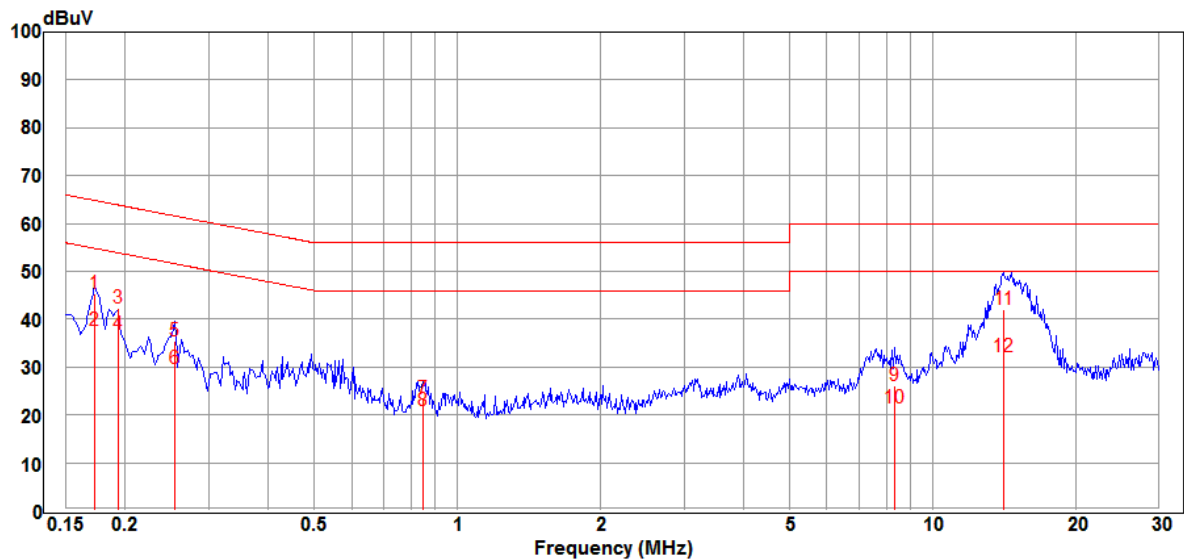

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.1731	35.09	10.22	45.31	64.81	-19.50	QP
2	0.1731	27.35	10.22	37.57	54.81	-17.24	Average
3	0.1934	32.06	10.22	42.28	63.89	-21.61	QP
4	0.1934	26.61	10.22	36.83	53.89	-17.06	Average
5	0.2548	25.24	10.23	35.47	61.60	-26.13	QP
6	0.2548	19.39	10.23	29.62	51.60	-21.98	Average
7	0.8483	13.02	10.29	23.31	56.00	-32.69	QP
8	0.8483	10.68	10.29	20.97	46.00	-25.03	Average
9	8.3230	15.28	10.79	26.07	60.00	-33.93	QP
10	8.3230	10.56	10.79	21.35	50.00	-28.65	Average
11	14.1380	31.11	10.85	41.96	60.00	-18.04	QP
12	14.1380	21.29	10.85	32.14	50.00	-17.86	Average