


Test Plots:

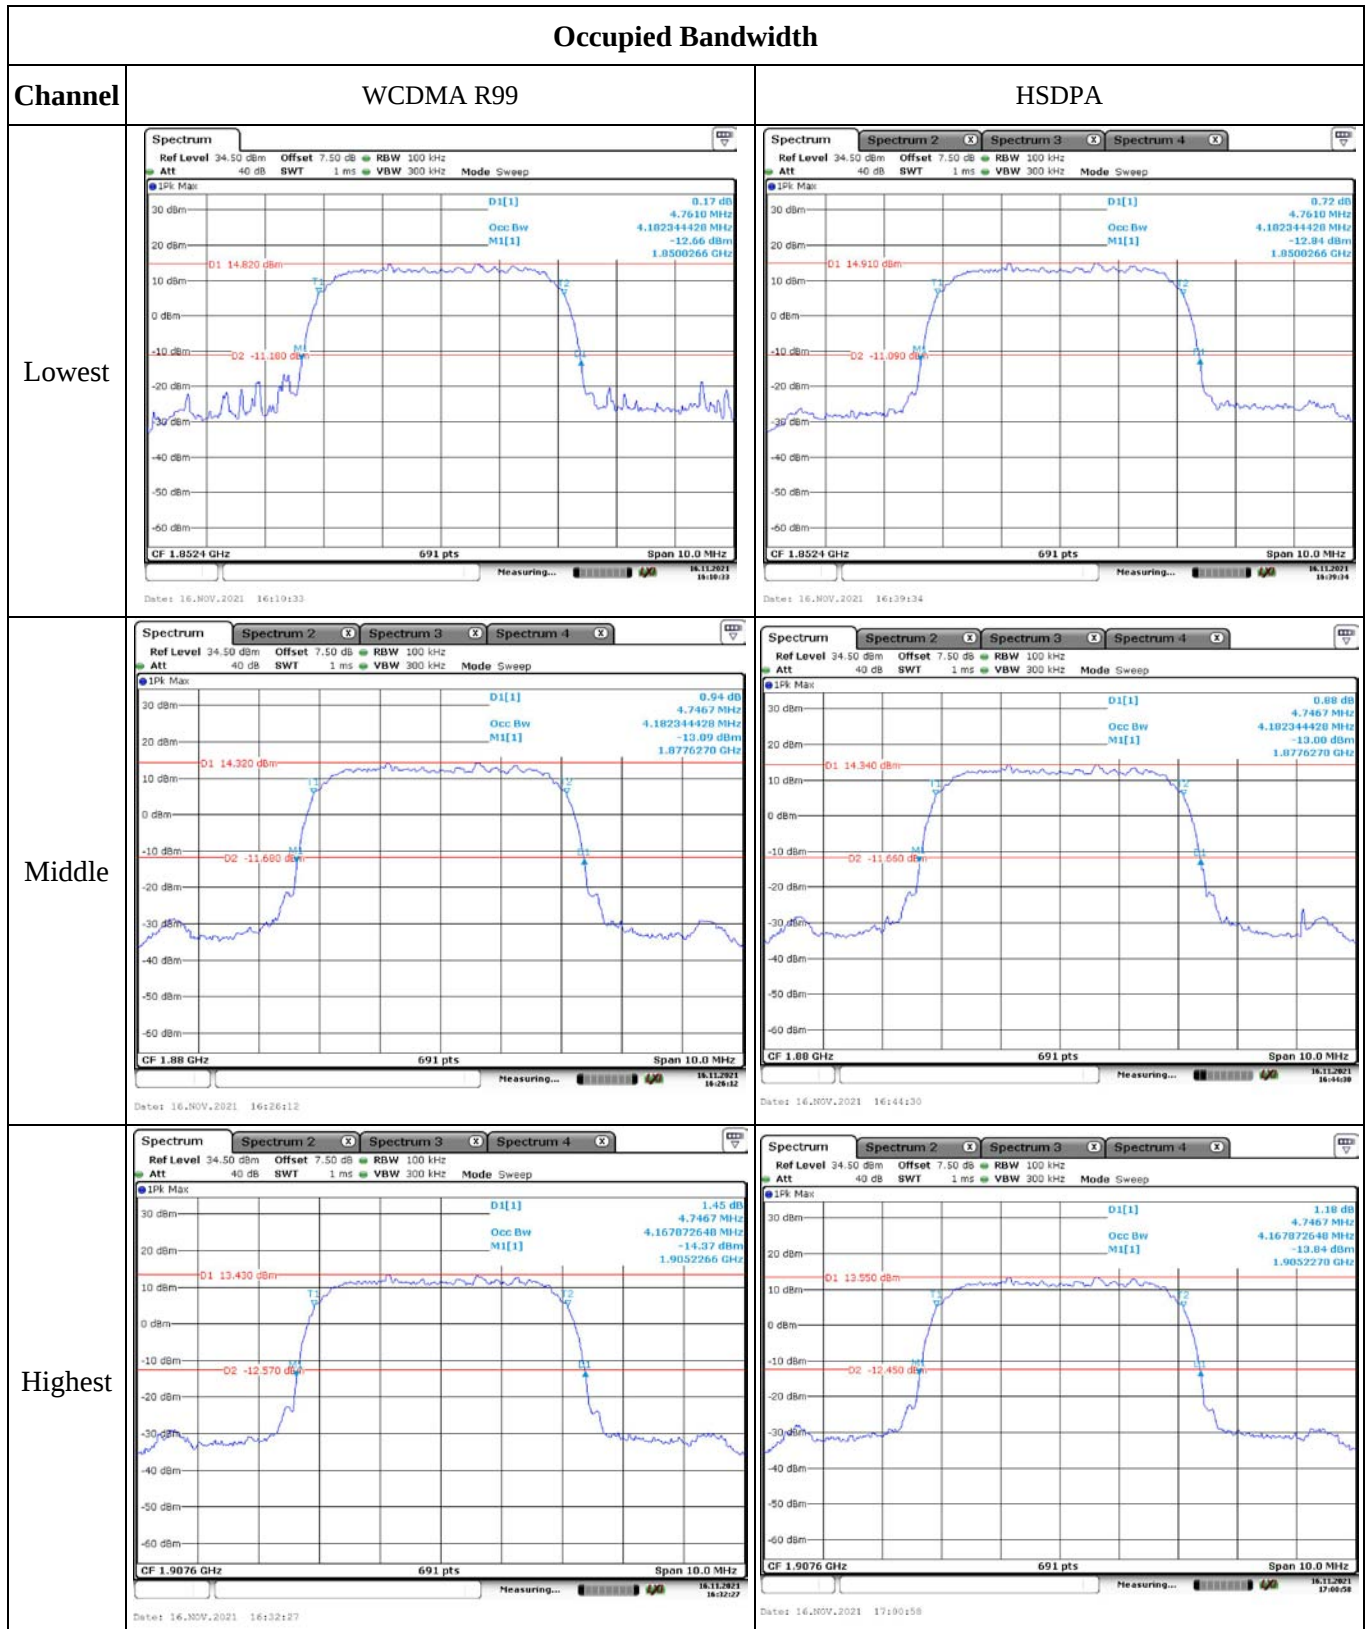


Occupied Bandwidth


Channel

HSUPA


Lowest

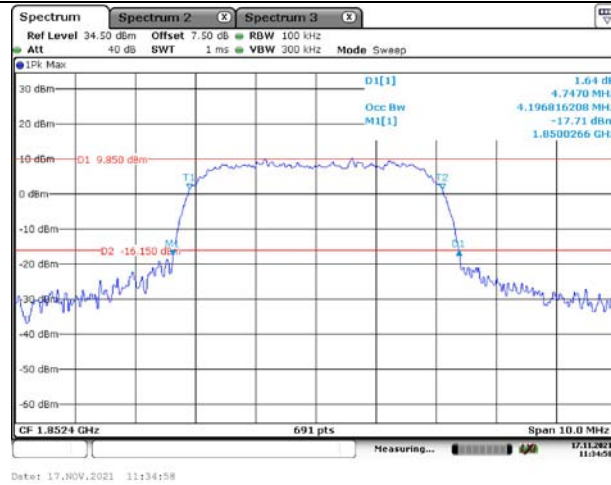

Middle

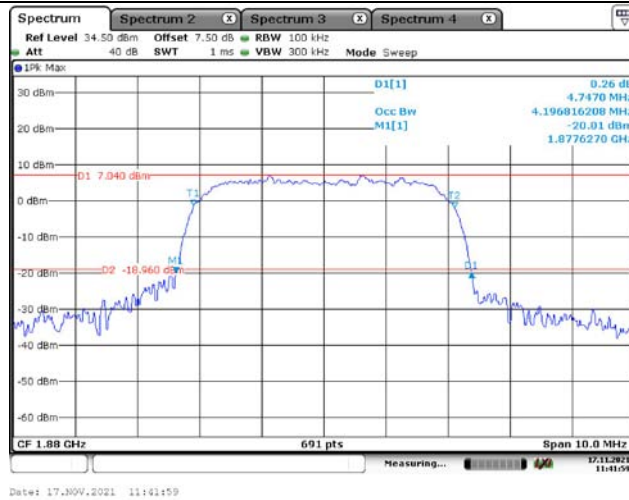

Highest


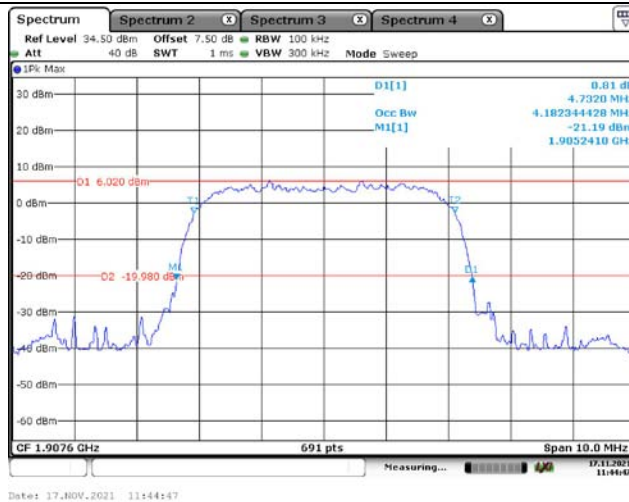


Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

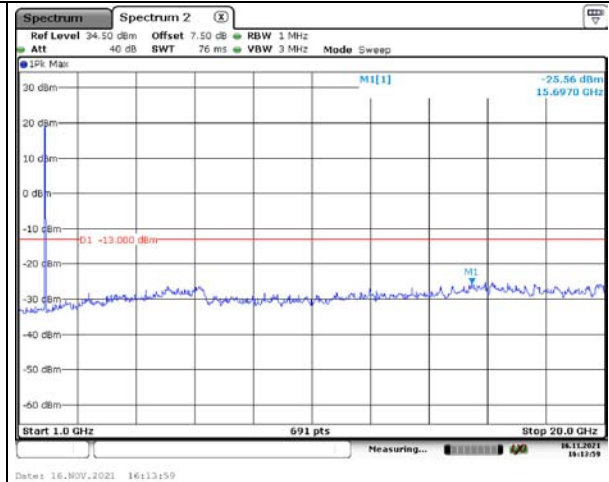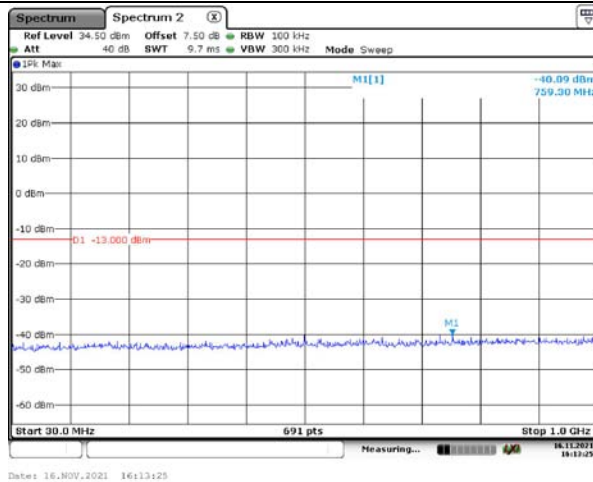


Middle

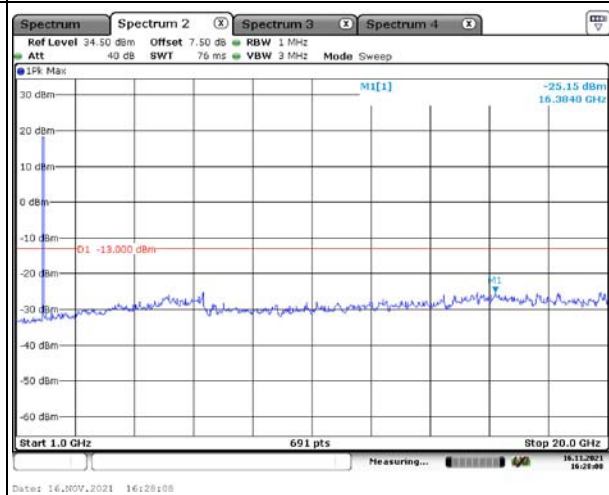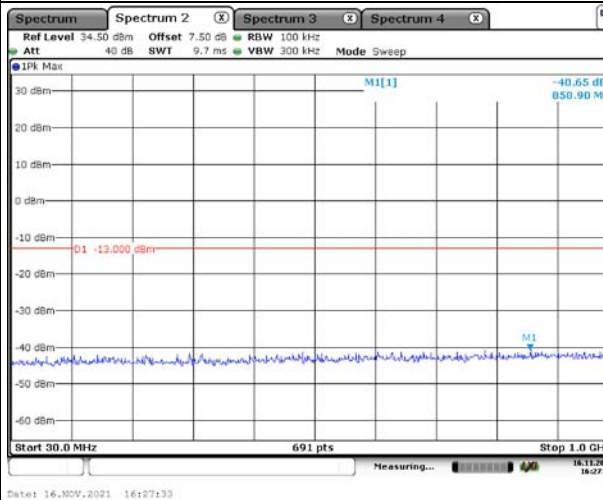

Highest

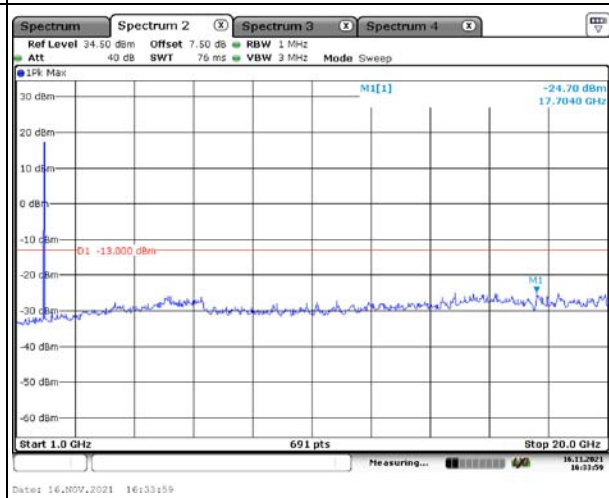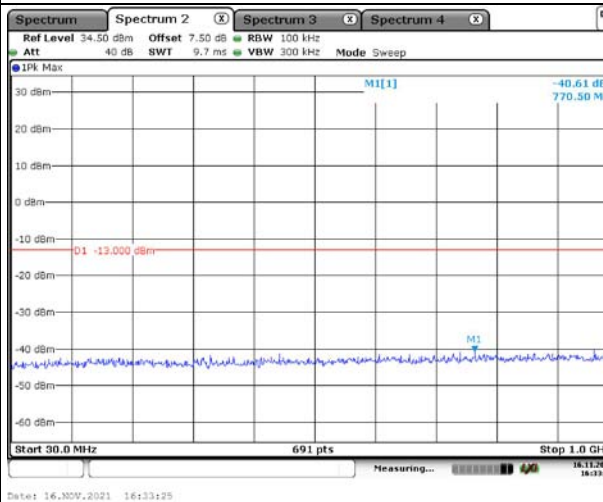

Out of band emission, Band Edge

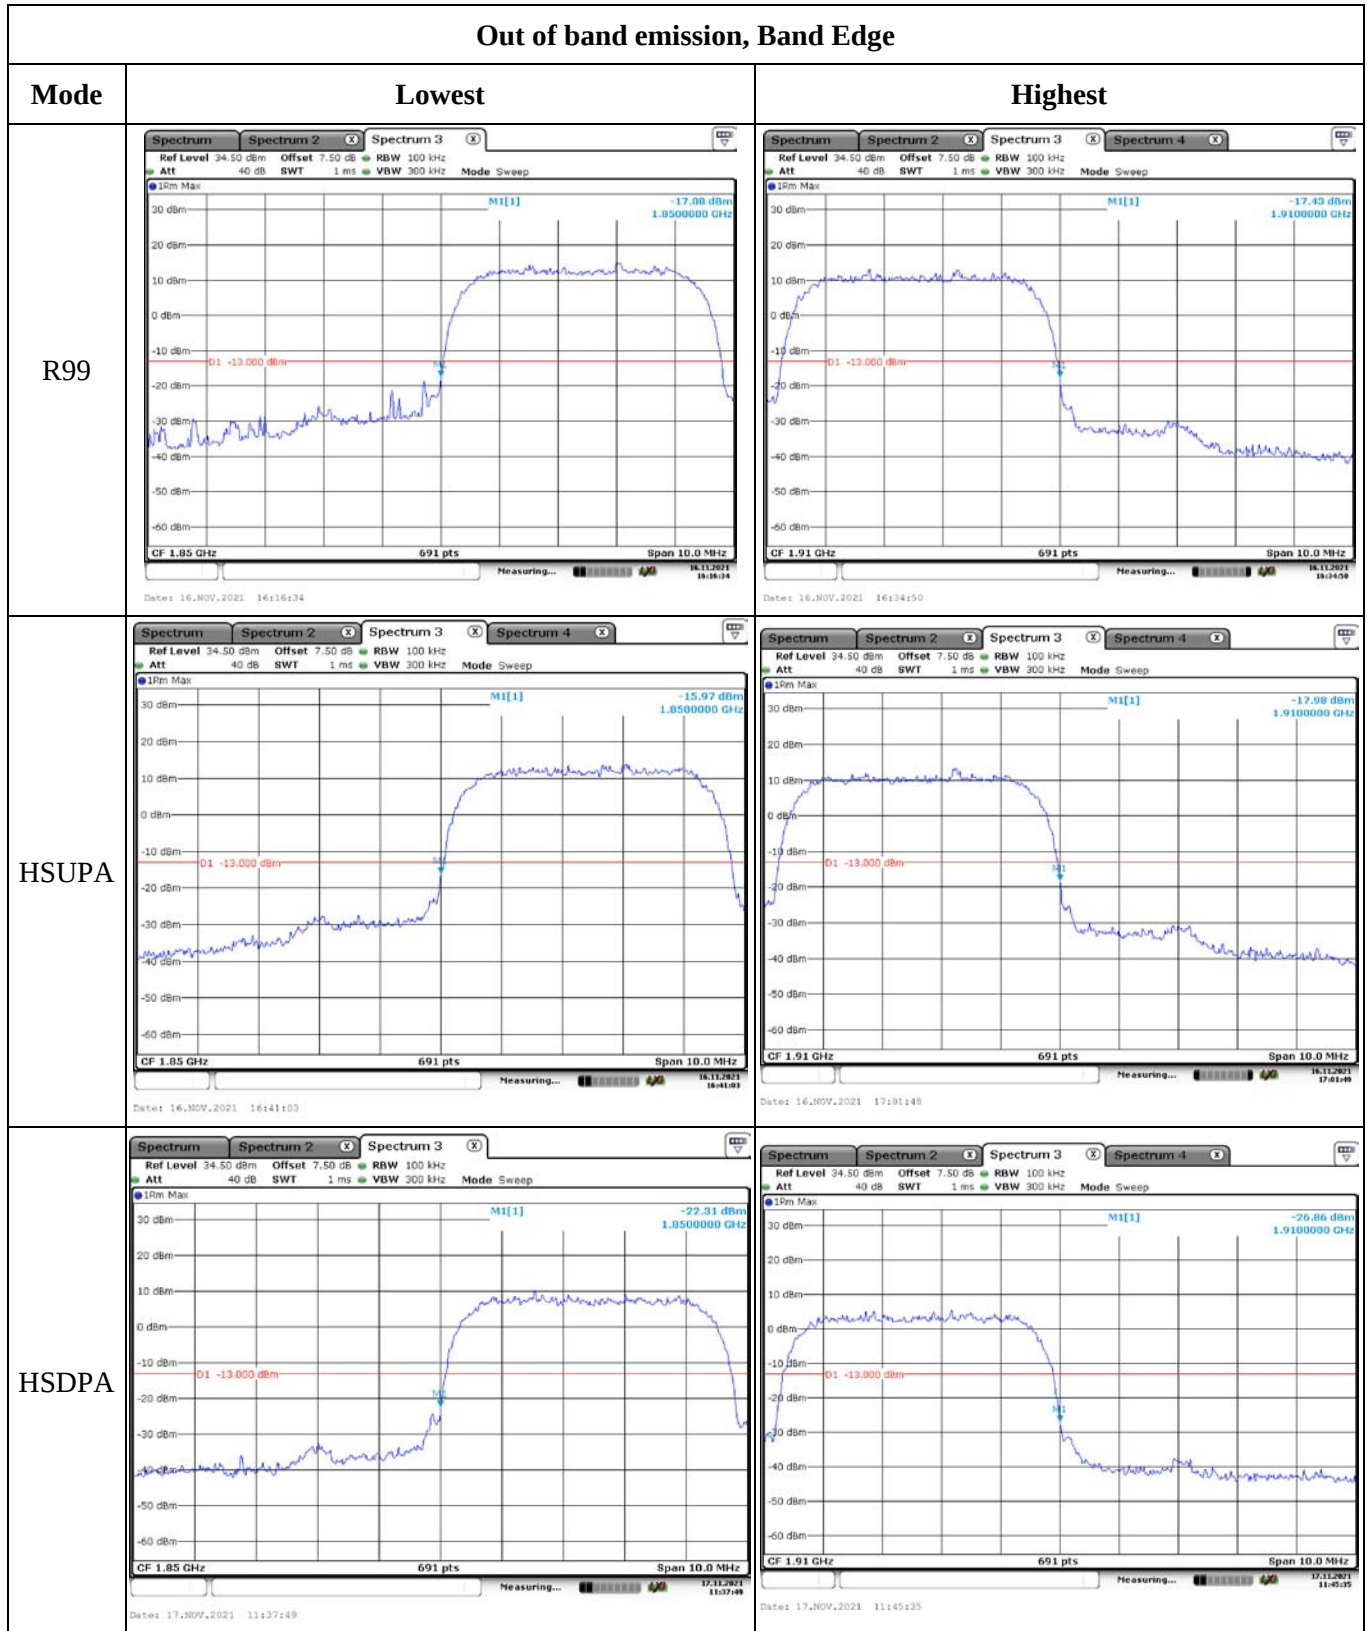

4.4 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	CR21100112-RF-S1	Test Date:	2021/11/11~2021/11/20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.8~27.7	Relative Humidity: (%)	48~53	ATM Pressure: (kPa)	101.4~101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	110 825	2021/7/22	2022/7/21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
44834	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

EUT Information@ WCDMA Band V▲:

Antenna Gain (dBi):	-3.5	Antenna Gain (dBd):	-5.65	Cable Loss (dB):	0.2
Operation Voltage(V _{DC}):					
Lowest:	3.5	Normal:	3.85	Highest:	4.4

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99 Subtest 1	23.65	23.85	23.91	18.06	38.45
HSDPA Subtest 1	23.48	23.59	23.47	17.74	38.45
HSDPA Subtest 2	23.55	23.63	23.41	17.78	38.45
HSDPA Subtest 3	23.28	23.19	23.45	17.6	38.45
HSDPA Subtest 4	22.96	22.38	23.17	17.32	38.45
HSUPA Subtest 1	23.84	23.58	23.29	17.99	38.45
HSUPA Subtest 2	23.87	23.52	22.71	18.02	38.45
HSUPA Subtest 3	23.69	23.18	23.17	17.84	38.45
HSUPA Subtest 4	23.25	23.47	23.21	17.62	38.45
HSUPA Subtest 5	22.96	22.74	22.84	17.11	38.45
DC-HSDPA Subtest 1	22.17	22.38	22.46	16.61	38.45
DC-HSDPA Subtest 2	22.15	22.43	22.16	16.58	38.45
DC-HSDPA Subtest 3	22.45	22.38	22.64	16.79	38.45
DC-HSDPA Subtest 4	22.47	22.96	22.41	17.11	38.45
HSPA+ Subtest 1	21.45	21.38	21.73	15.88	38.45
Note: ERP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBd)					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.96	2.99	3.01	13
HSDPA	3.01	3.04	3.13	13
HSUPA	3.22	2.96	3.07	13
DC-HSDPA	2.89	3.07	2.84	13
HSPA+	2.41	2.36	2.32	13
			Result:	Pass

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.182	4.197	4.182	4.747	4.761	4.747
HSDPA	4.211	4.211	4.226	4.805	4.834	5.123
HSUPA	4.197	4.197	4.226	4.877	4.79	5.21
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a):Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	22	0.026	2.5
	-20	3.85	-20	-0.024	2.5
	-10	3.85	24	0.029	2.5
	0	3.85	22	0.026	2.5
	10	3.85	23	0.027	2.5
	20	3.85	28	0.033	2.5
	30	3.85	26	0.031	2.5
	40	3.85	-22	-0.026	2.5
	50	3.85	24	0.029	2.5
Frequency Stability vs. Voltage	20	3.5	-18	-0.022	2.5
	20	4.4	20	0.024	2.5
Result:				Pass	

Test Plots:

Occupied Bandwidth

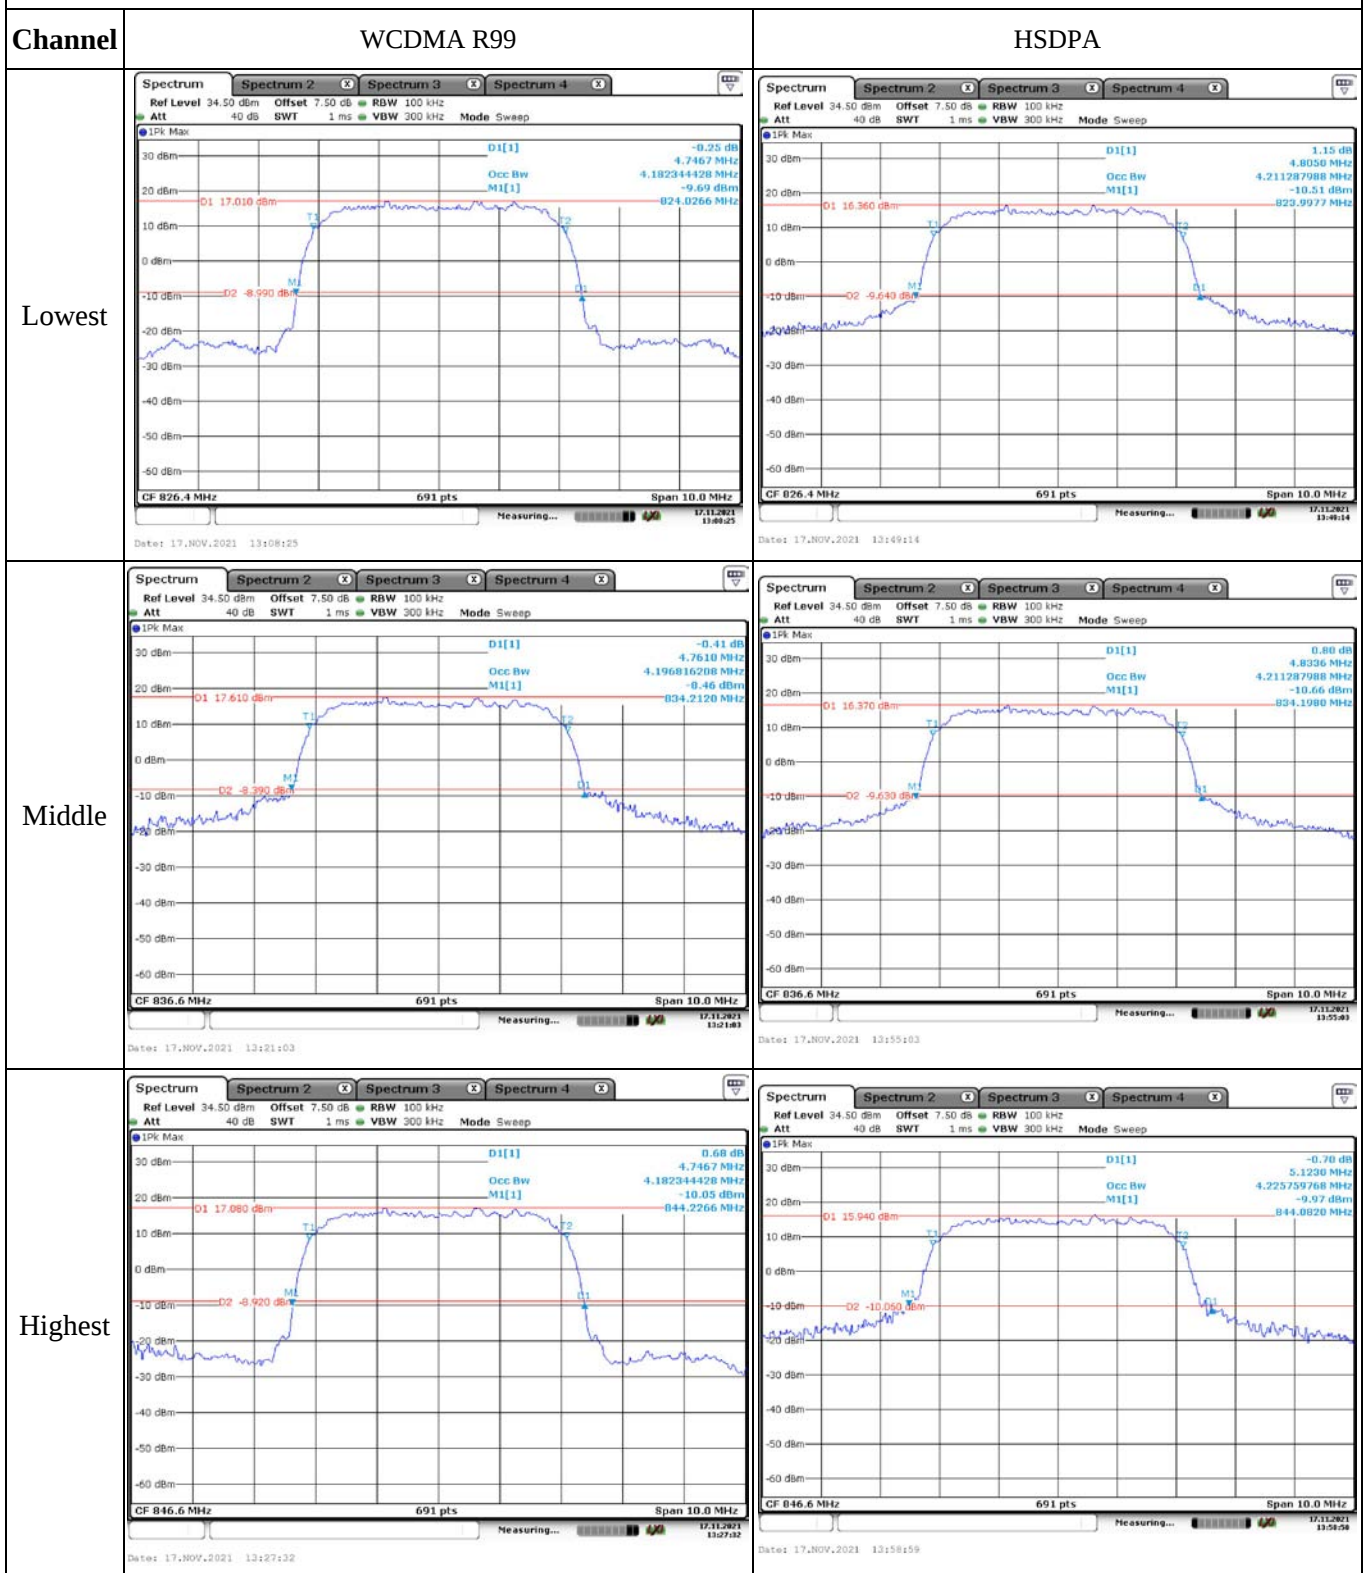


Occupied Bandwidth


Channel

HSUPA


Lowest

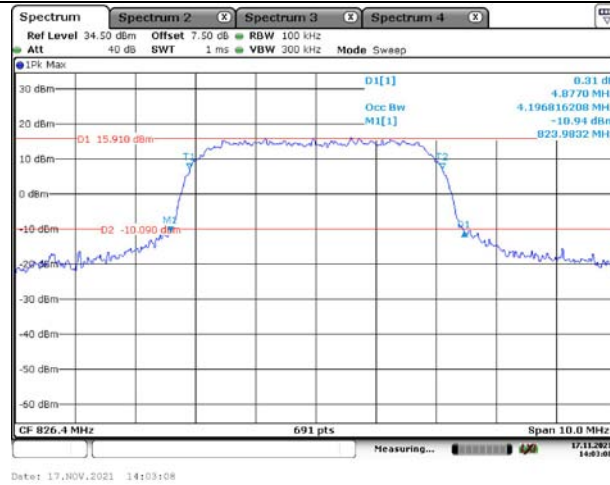

Middle

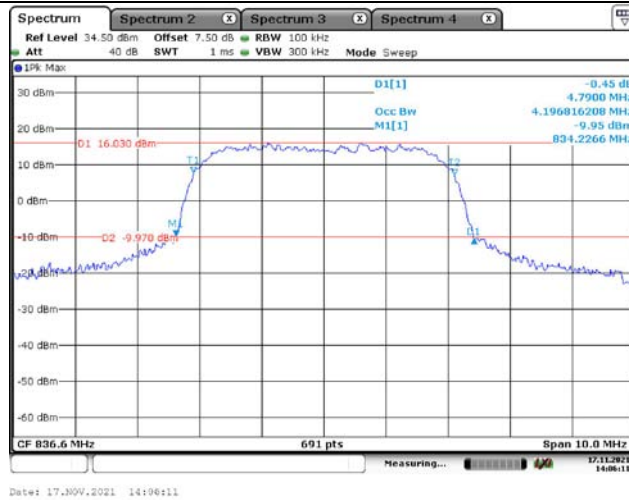

Highest


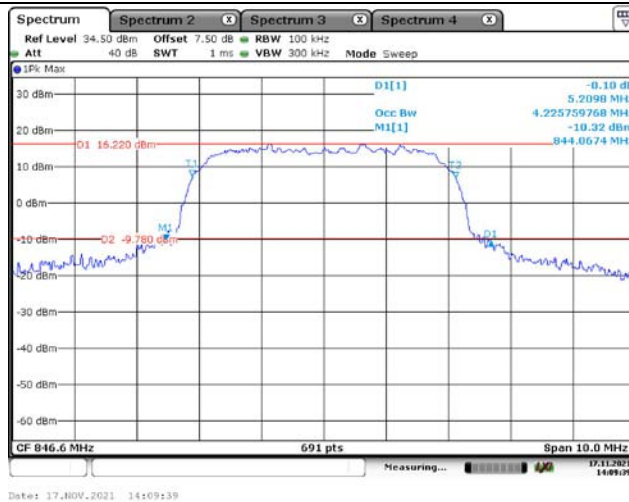


Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

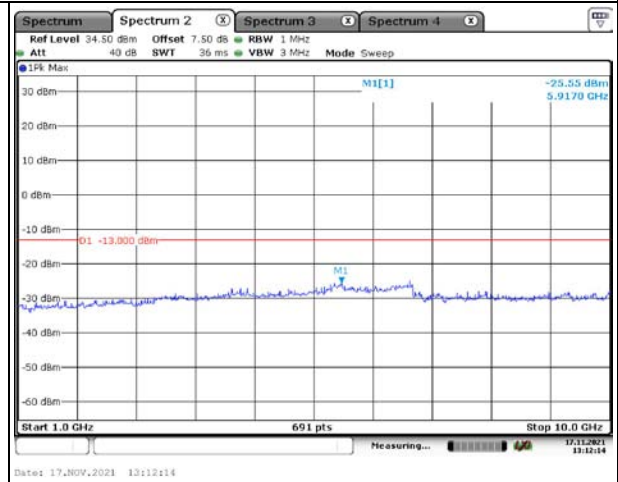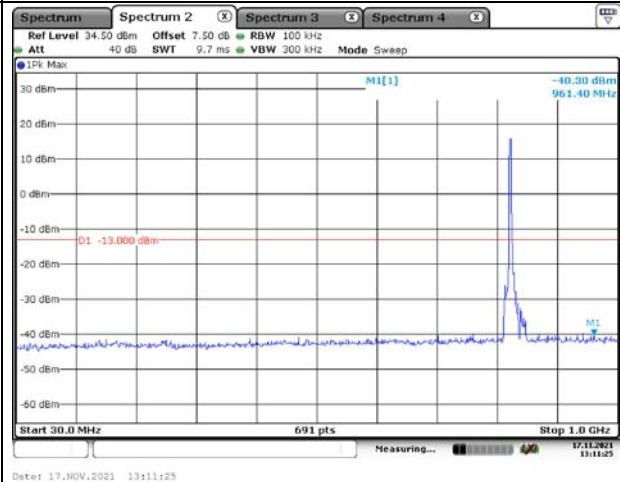


Middle

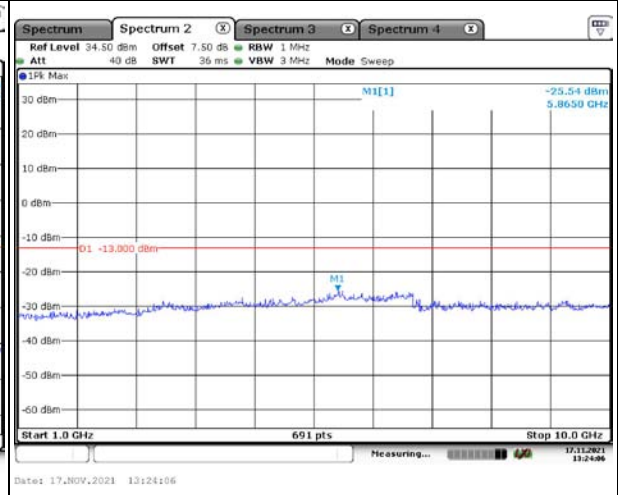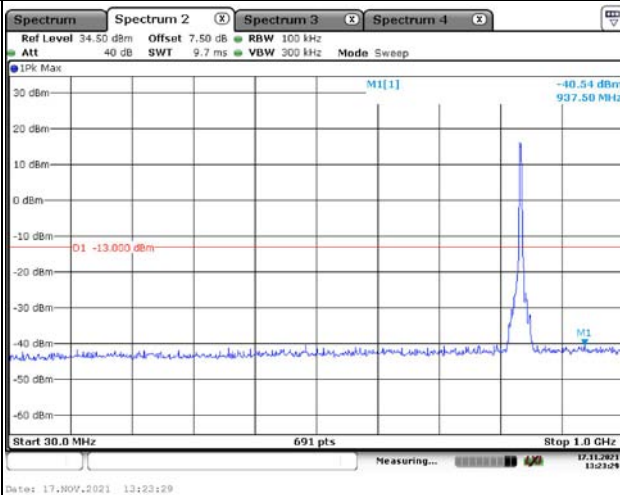

Highest

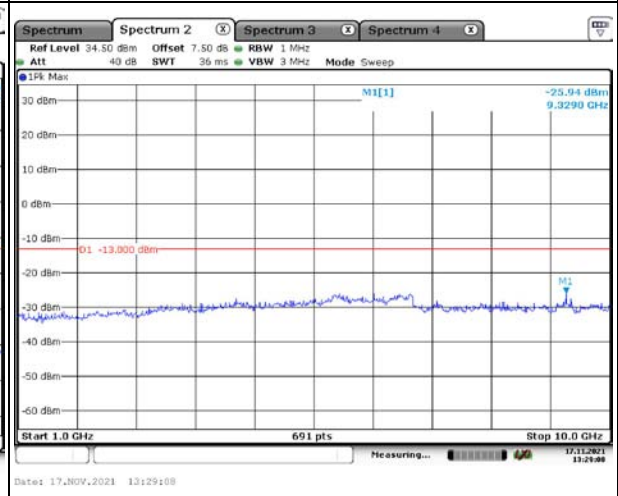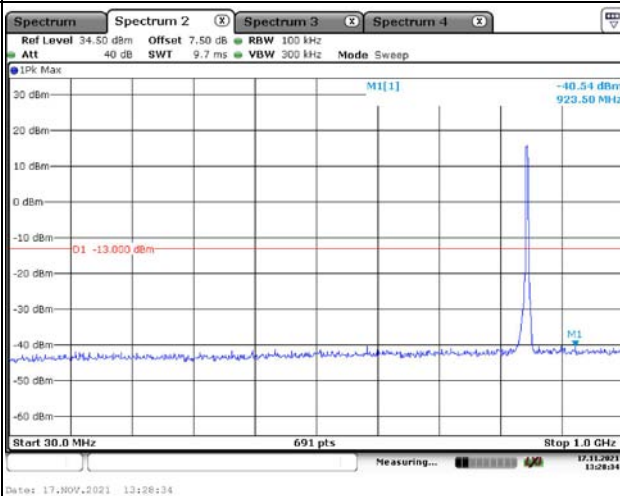

Out of band emission, Band Edge

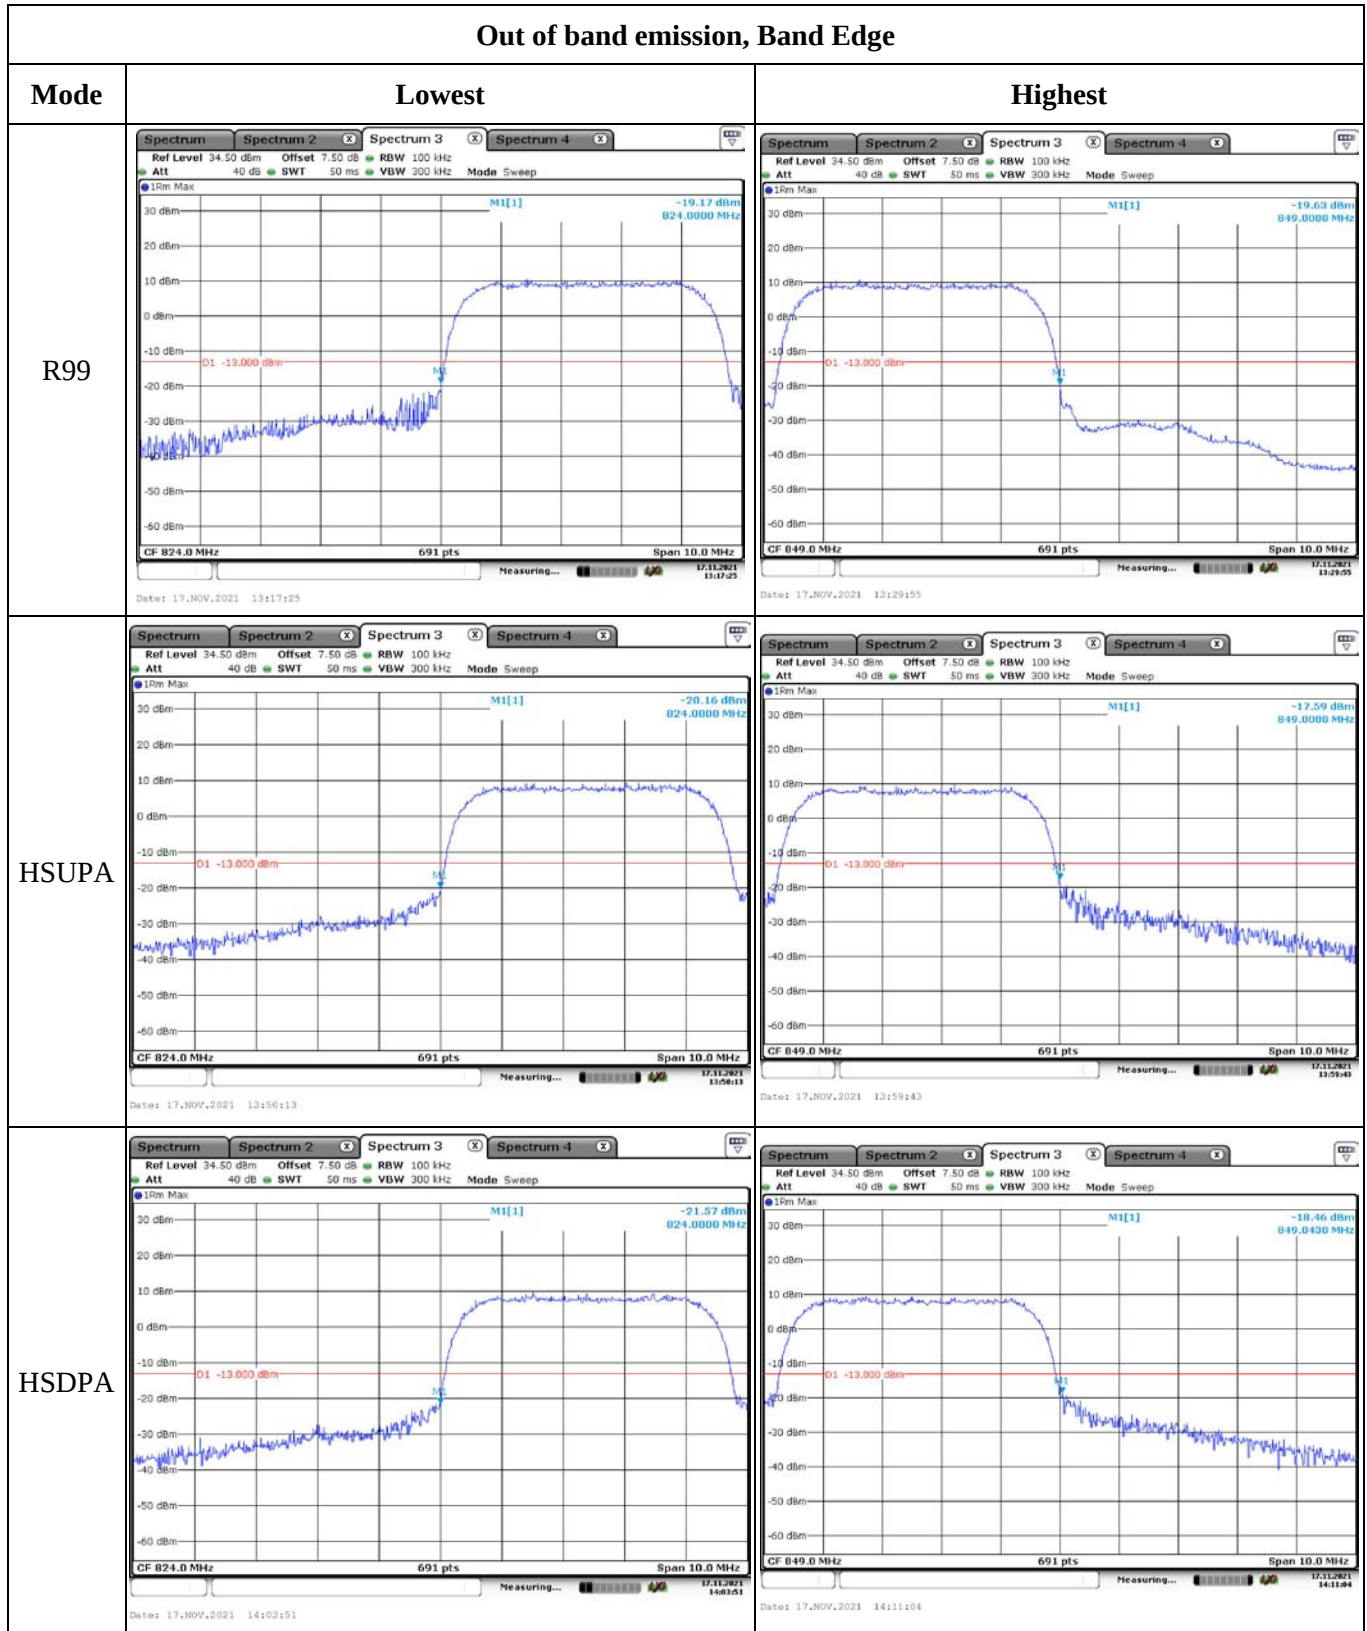

4.5 Antenna Port Test Data and Results for LTE Band 5:

Serial Number:	CR21100112-RF-S1	Test Date:	2021/11/11~2021/11/20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.8~27.7	Relative Humidity: (%)	48~53	ATM Pressure: (kPa)	101.4~101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2021/7/22	2022/7/21
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
44834	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@ LTE Band 5▲:

Antenna Gain (dBi):	-3.5	Antenna Gain (dBd):	-5.65	Cable Loss (dB):	0.2
Operation Voltage(V _{DC}):					
Lowest:	3.5	Normal:	3.85	Highest:	4.4

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	22.93	22.91	22.91	17.24	38.45
	RB1#3	23.09	23.08	23.05		
	RB1#5	22.94	22.89	22.91		
	RB3#0	23.04	22.98	22.97		
	RB3#3	23.00	23.01	22.96		
	RB6#0	21.97	22.01	21.96		
1.4MHz 16QAM	RB1#0	21.91	22.00	21.89	16.34	38.45
	RB1#3	22.07	22.19	22.06		
	RB1#5	21.90	22.00	21.89		
	RB3#0	22.13	21.90	22.03		
	RB3#3	22.16	21.94	21.99		
	RB6#0	20.95	21.00	20.91		
3MHz QPSK	RB1#0	22.98	22.95	22.97	17.14	38.45
	RB1#8	22.96	22.93	22.99		
	RB1#14	22.98	22.94	22.96		
	RB6#0	21.97	21.98	21.91		
	RB6#9	21.94	21.95	21.94		
	RB15#0	21.99	21.99	21.93		
3MHz 16QAM	RB1#0	22.47	22.11	22.01	16.66	38.45
	RB1#8	22.49	22.10	21.95		
	RB1#14	22.51	22.10	21.93		
	RB6#0	21.03	20.95	20.87		
	RB6#9	21.01	20.99	20.87		
	RB15#0	21.02	20.91	20.95		
5MHz QPSK	RB1#0	22.86	22.91	22.85	17.17	38.45
	RB1#13	23.02	23.01	22.99		
	RB1#24	22.94	22.88	22.87		
	RB15#0	21.99	21.98	21.95		
	RB15#10	22.01	21.97	22.03		
	RB25#0	21.96	21.99	21.99		
5MHz 16QAM	RB1#0	21.76	22.18	21.94	16.42	38.45
	RB1#13	21.94	22.27	22.09		
	RB1#24	21.84	22.18	21.99		
	RB15#0	21.01	20.92	20.97		
	RB15#10	21.02	20.91	21.05		
	RB25#0	21	20.94	20.99		
10MHz QPSK	RB1#0	22.93	22.94	22.93	17.31	38.45
	RB1#25	23.16	23.08	23.08		
	RB1#49	22.96	22.97	22.98		

	RB25#0	21.96	21.95	22.05		
	RB25#25	22.10	21.93	22.08		
	RB50#0	22.01	21.92	22.10		
10MHz 16QAM	RB1#0	22.43	22.03	21.90	16.85	38.45
	RB1#25	22.70	22.20	22.13		
	RB1#49	22.51	22.10	21.96		
	RB25#0	21.04	20.96	21.17		
	RB25#25	21.10	20.97	21.17		
	RB50#0	20.98	20.94	21.11		
Note: ERP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBd)						
					Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	4.7	5.07	5.07	13
	RB50#0	5.22	5.22	5.36	13
10MHz 16QAM	RB1#0	6	5.65	5.74	13
	RB50#0	6.06	5.94	6.17	13
Result:					Pass

FCC §2.1049, §22.905:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.096	1.102	1.302	1.308	1.314
1.4MHz 16QAM	1.102	1.096	1.09	1.296	1.326	1.29
3MHz QPSK	2.683	2.683	2.683	2.88	2.856	2.892
3MHz 16QAM	2.683	2.683	2.683	2.904	2.88	2.88
5MHz QPSK	4.531	4.511	4.491	4.94	4.96	4.94
5MHz 16QAM	4.491	4.531	4.531	4.94	4.94	4.98
10MHz QPSK	8.942	8.942	8.981	9.68	9.6	9.6
10MHz 16QAM	8.942	8.942	8.942	9.56	9.6	9.68
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.


FCC §2.1051, §22.917(a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §22.355: Frequency Stability					
Test Mode:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	-7.18	-0.009	2.5
	-20	3.85	-5.03	-0.006	2.5
	-10	3.85	6.53	0.008	2.5
	0	3.85	-5.53	-0.007	2.5
	10	3.85	8.51	0.010	2.5
	20	3.85	-7.84	-0.009	2.5
	30	3.85	-8.85	-0.011	2.5
	40	3.85	-6.46	-0.008	2.5
	50	3.85	-9.44	-0.011	2.5
Frequency Stability vs. Voltage	20	3.5	6.92	0.008	2.5
	20	4.4	5.23	0.006	2.5
				Result:	Pass


Test Mode:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	-8.48	-0.010	2.5
	-20	3.85	7.27	0.009	2.5
	-10	3.85	6.77	0.008	2.5
	0	3.85	-6.95	-0.008	2.5
	10	3.85	7.38	0.009	2.5
	20	3.85	8.46	0.010	2.5
	30	3.85	-6.44	-0.008	2.5
	40	3.85	8.49	0.010	2.5
	50	3.85	-5.05	-0.006	2.5
Frequency Stability vs. Voltage	20	3.5	5.99	0.007	2.5
	20	4.4	5.87	0.007	2.5
				Result:	Pass

Test Plots:


Occupied Bandwidth

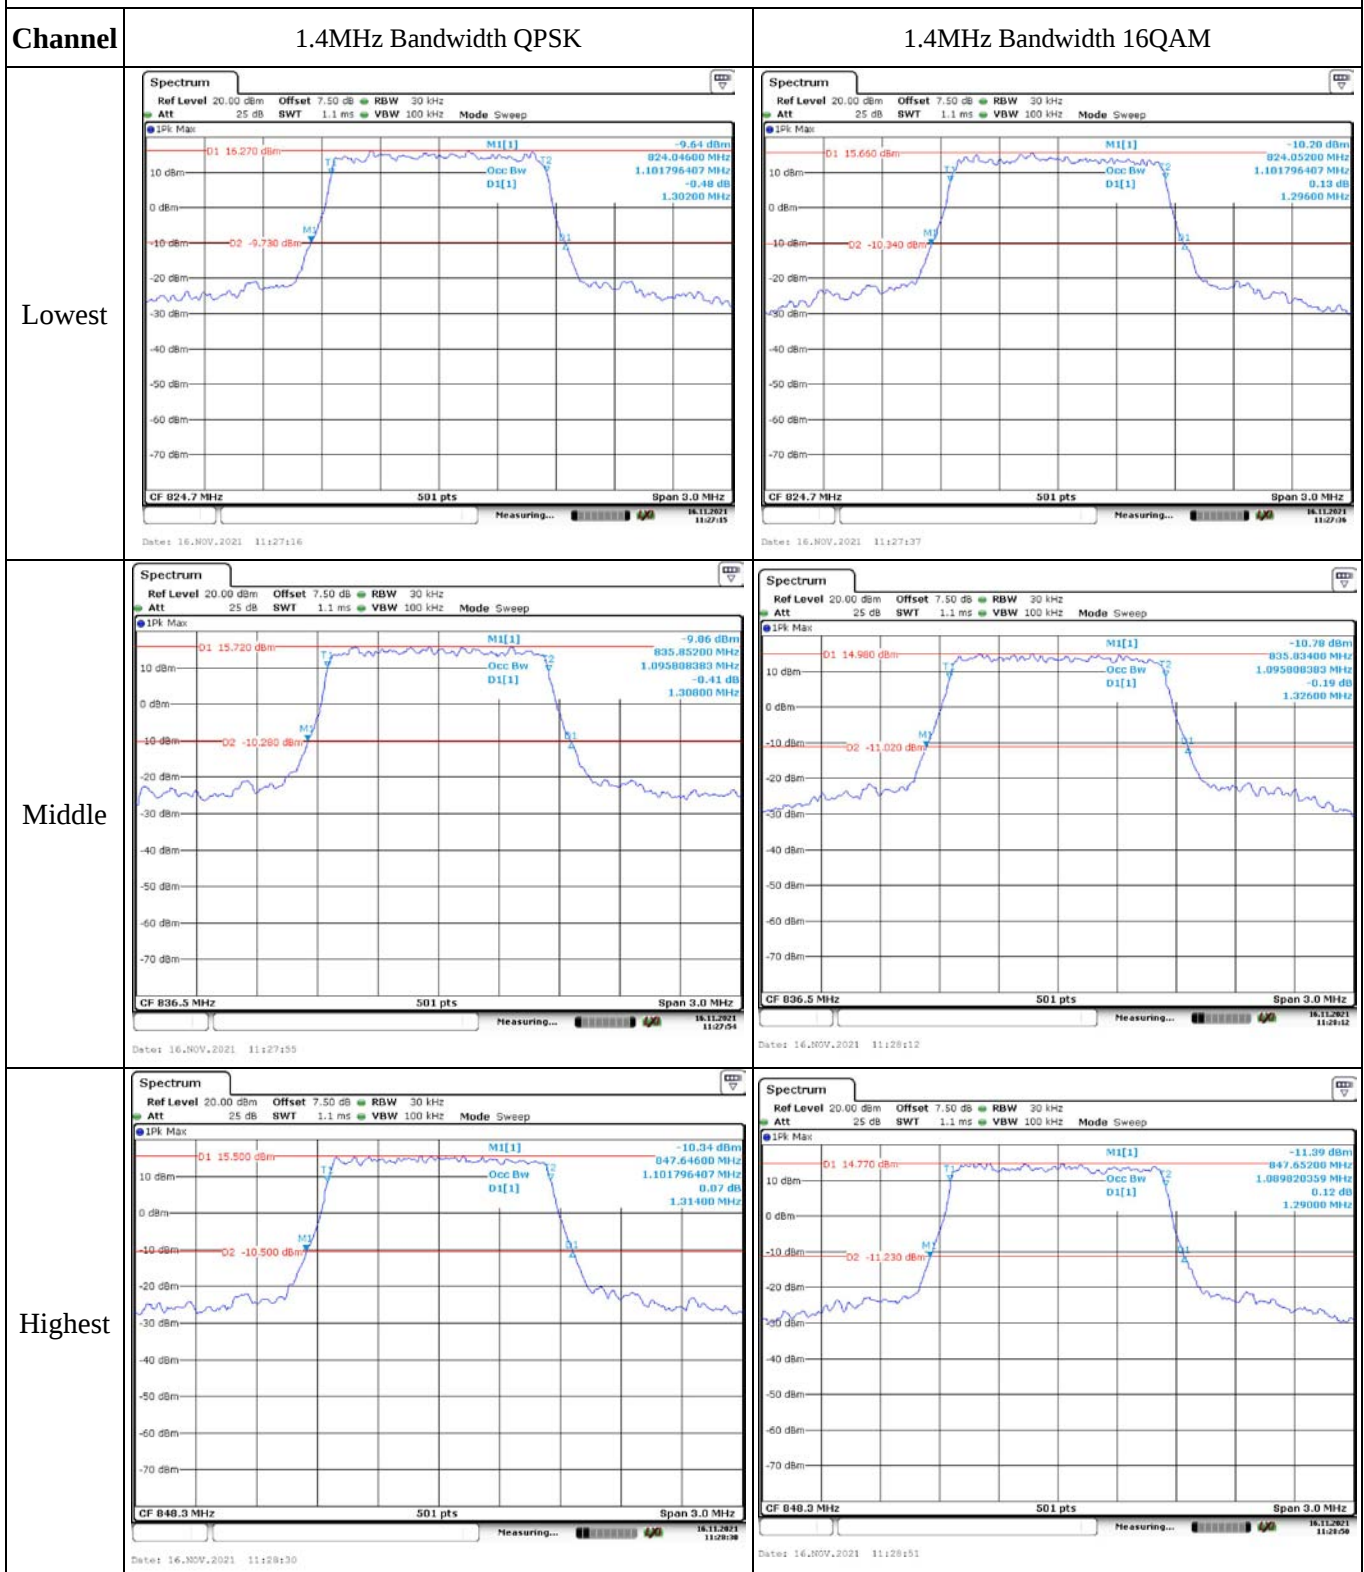


Occupied Bandwidth

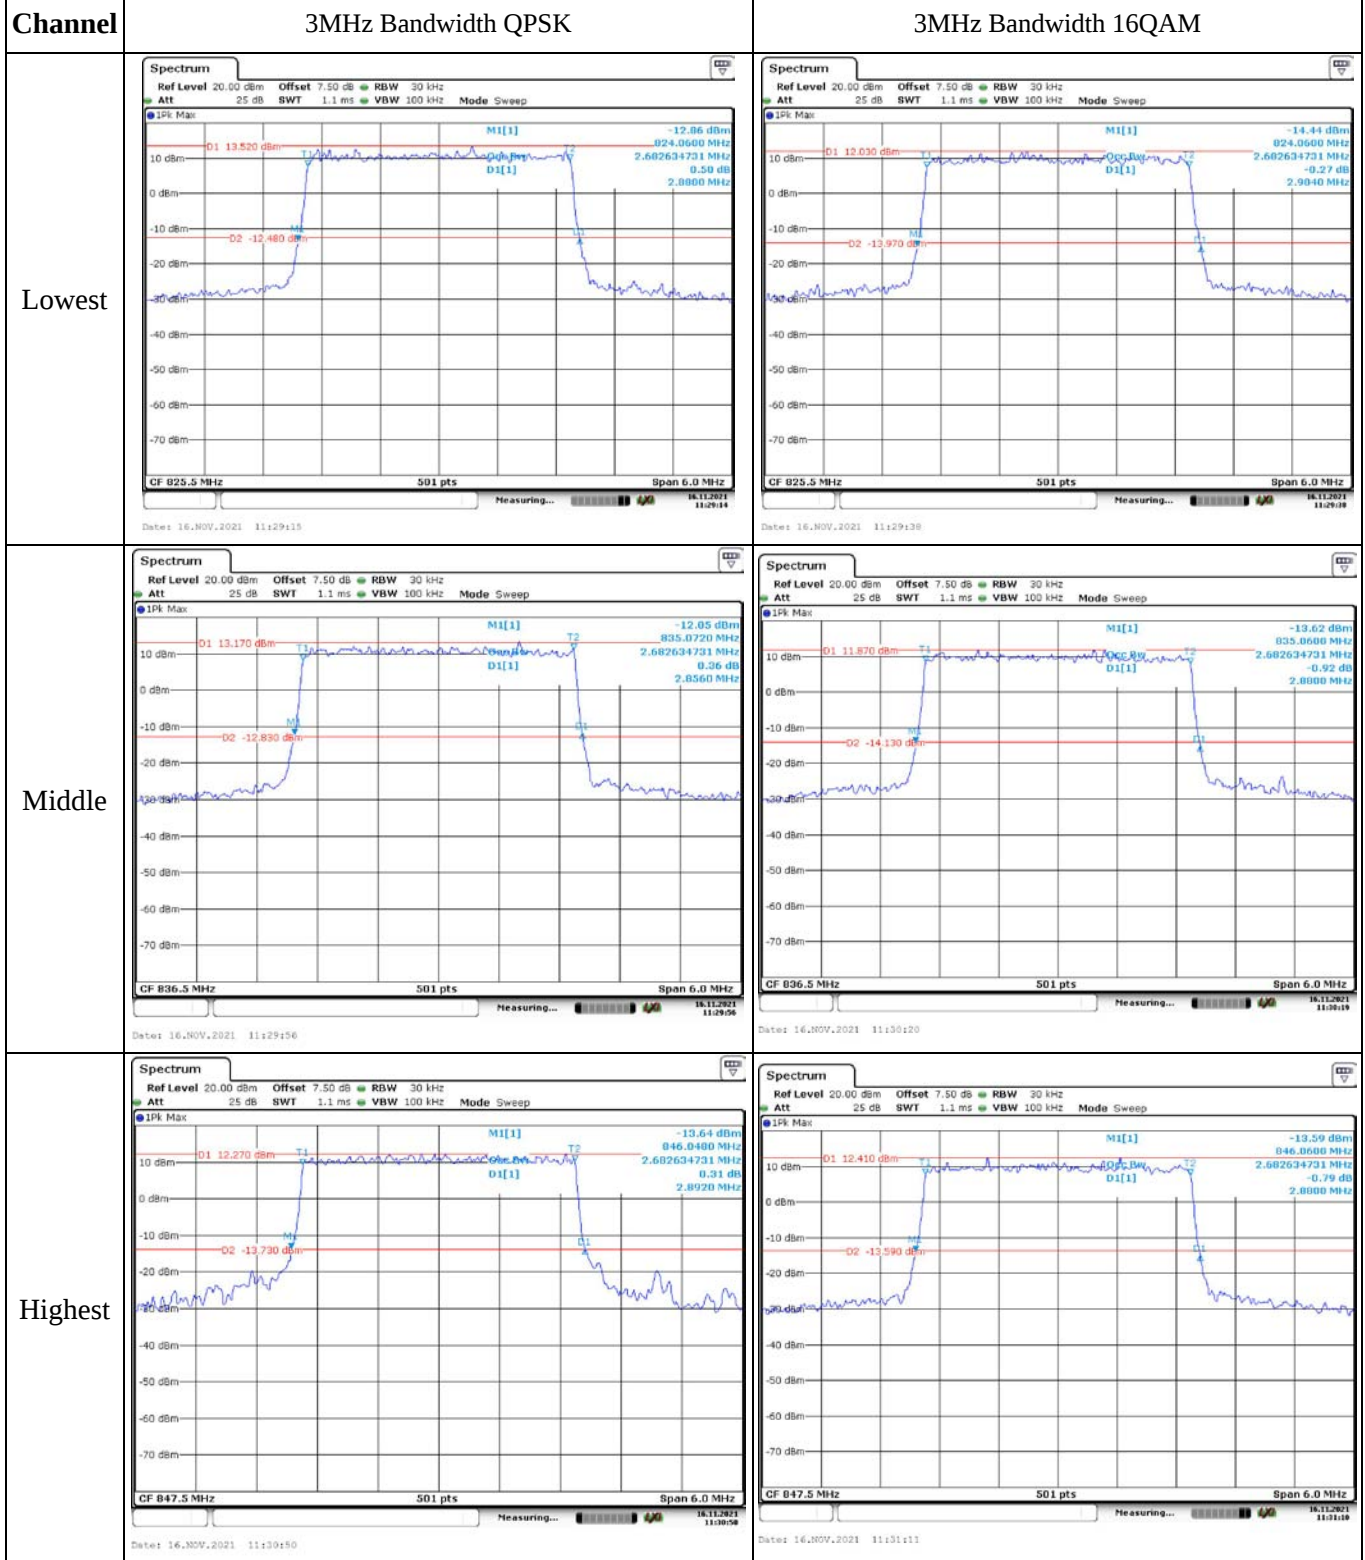

Occupied Bandwidth

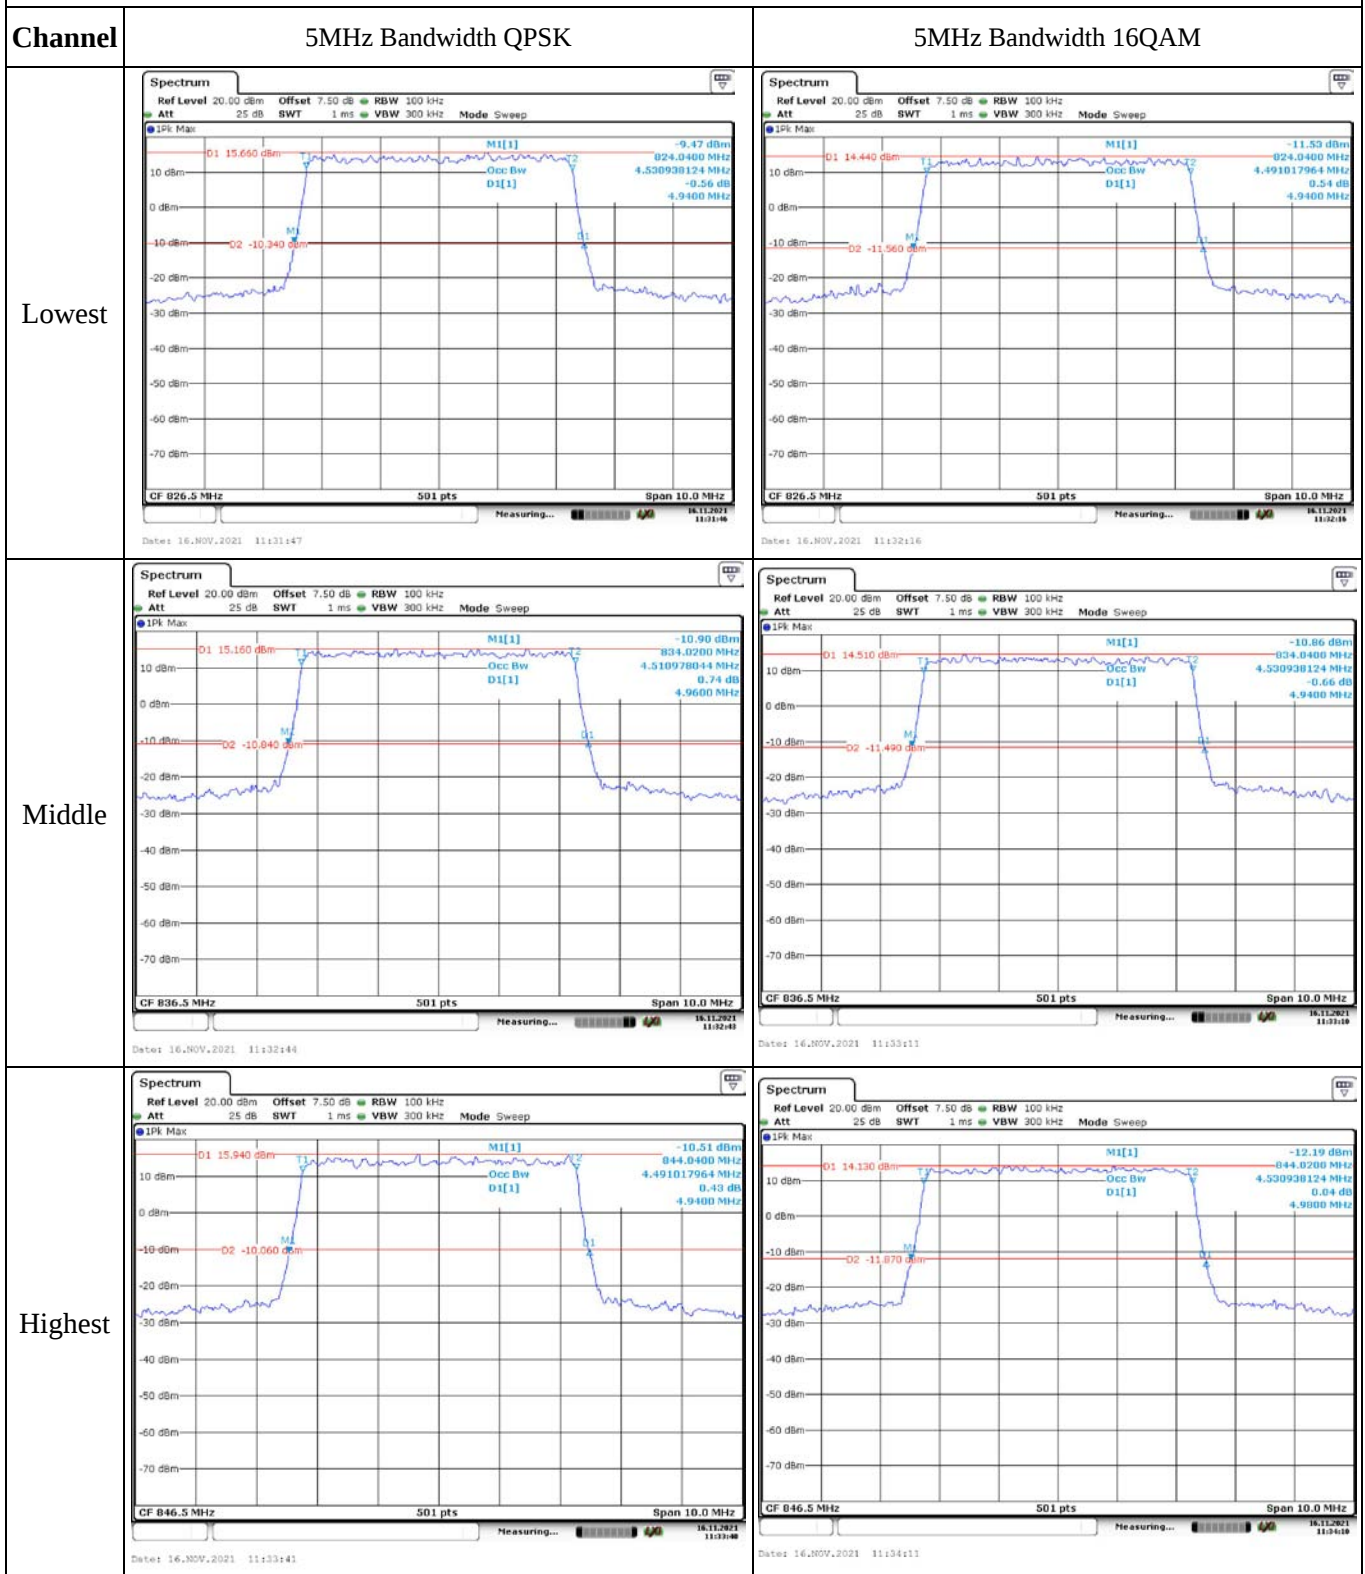

Occupied Bandwidth


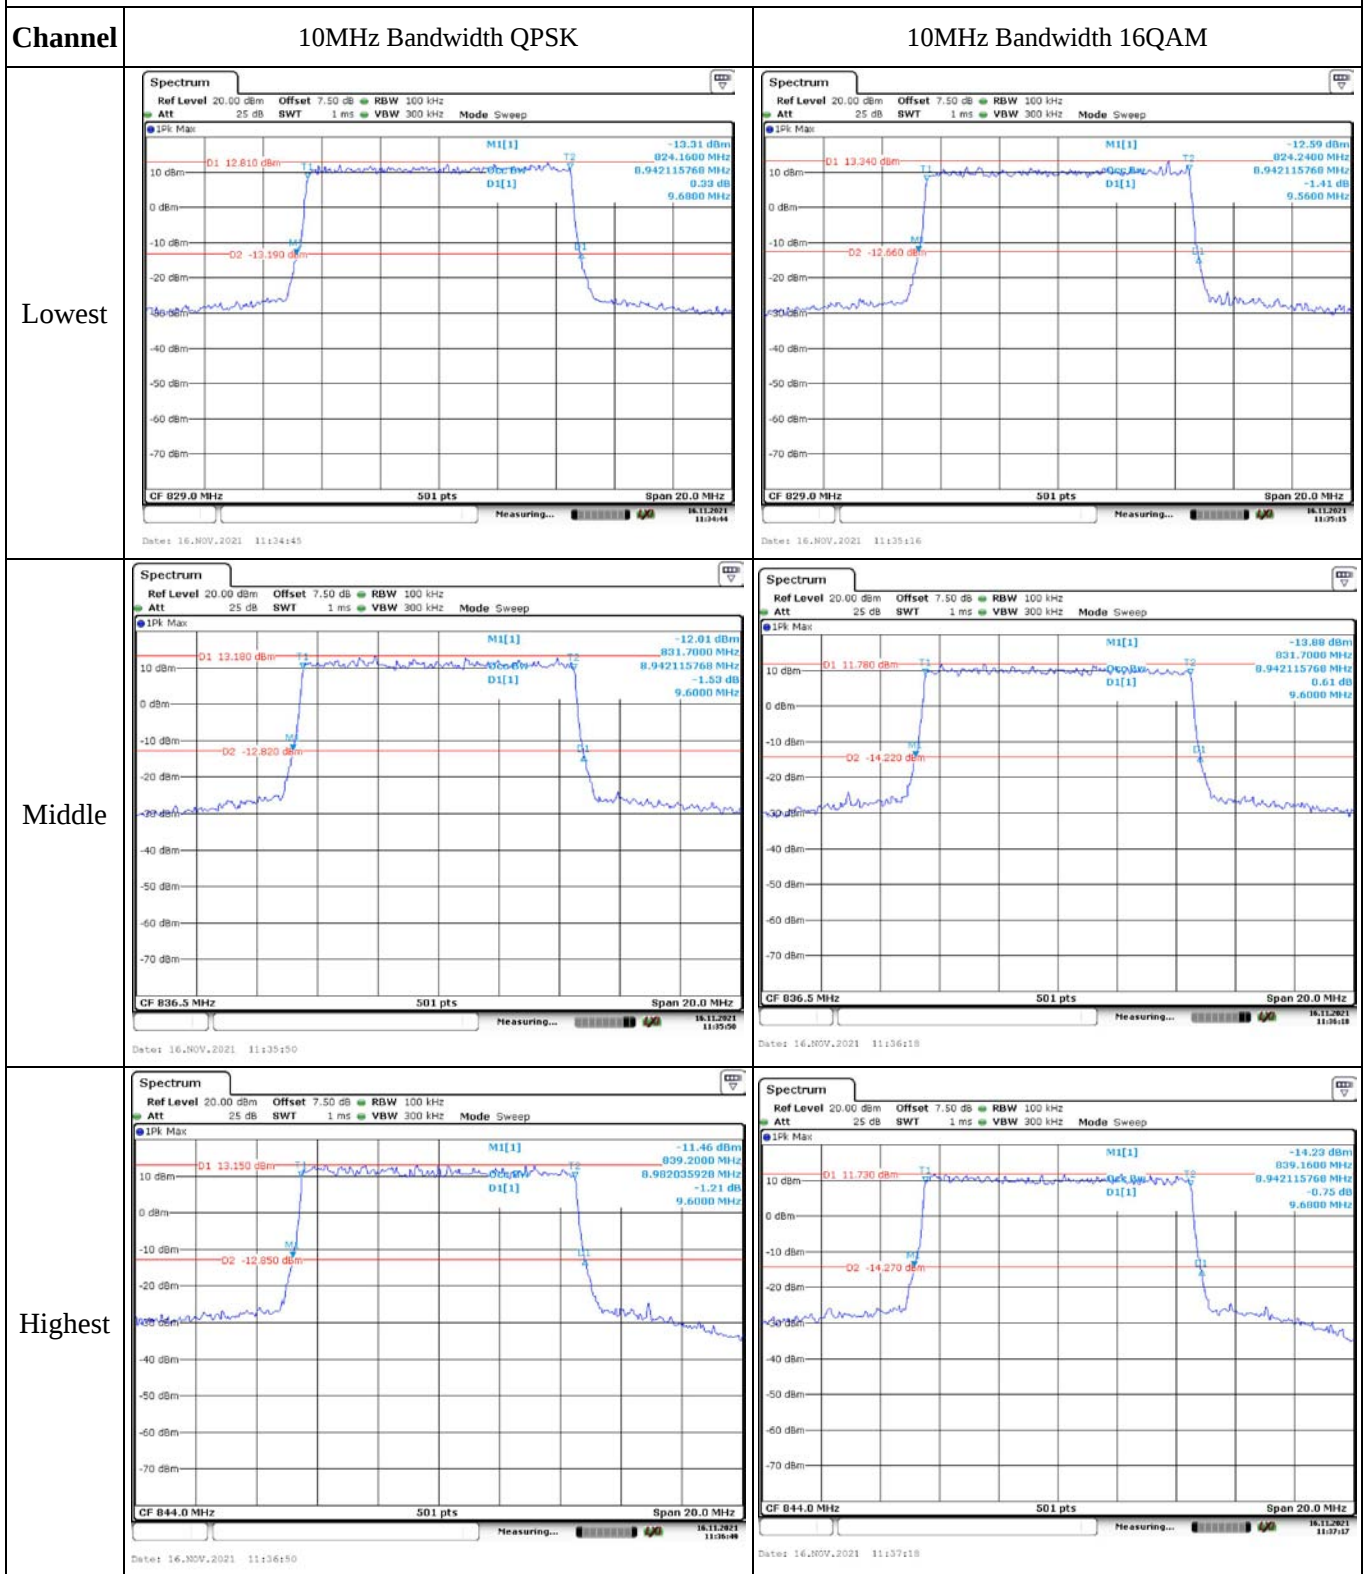


Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

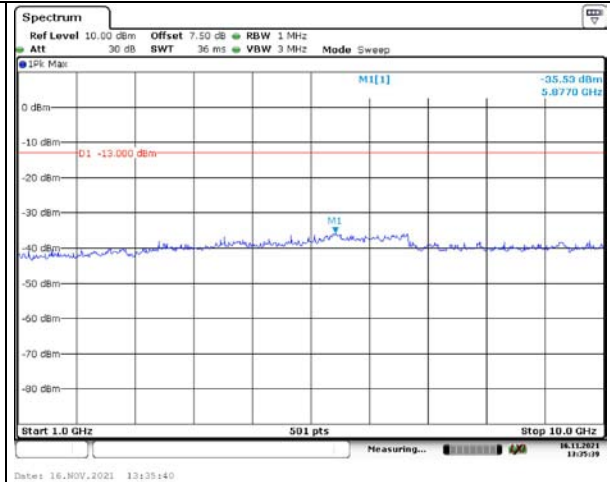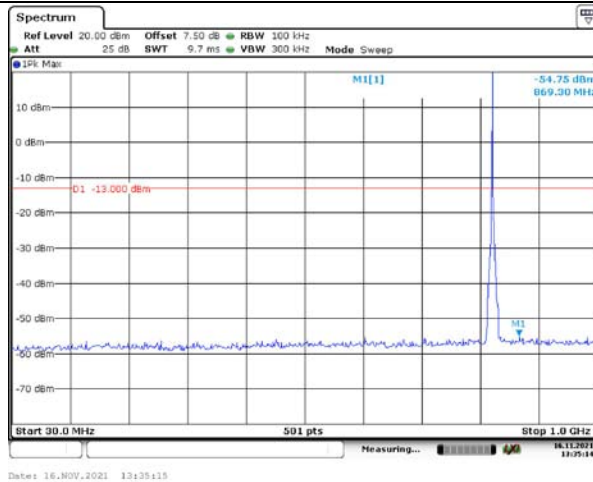

Middle

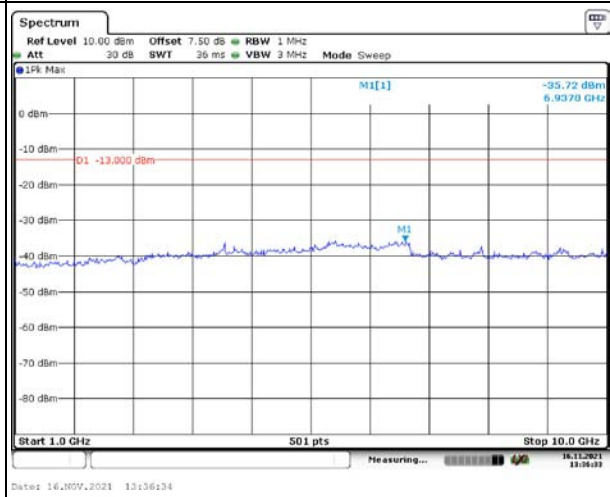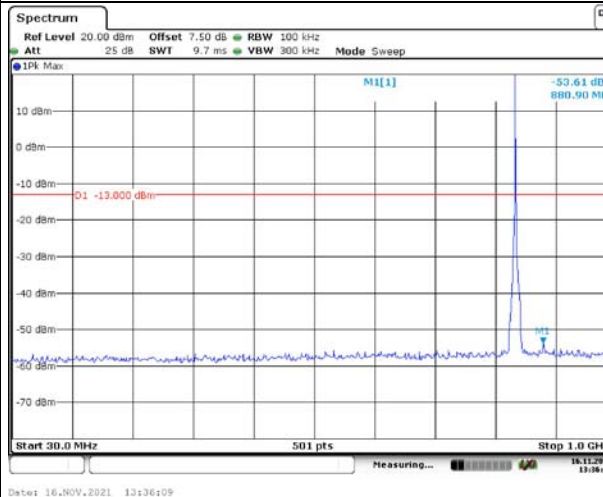

Highest

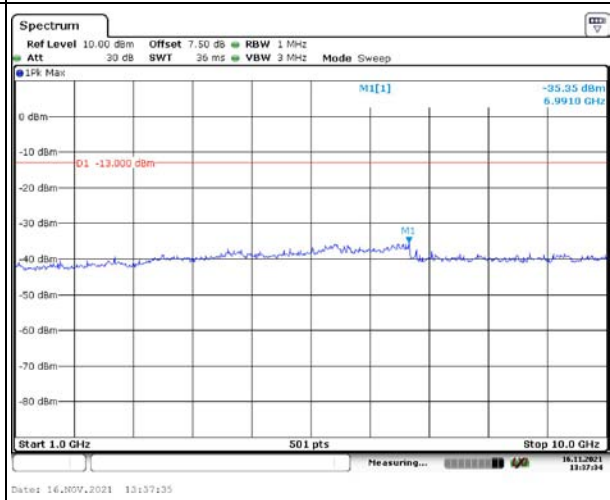
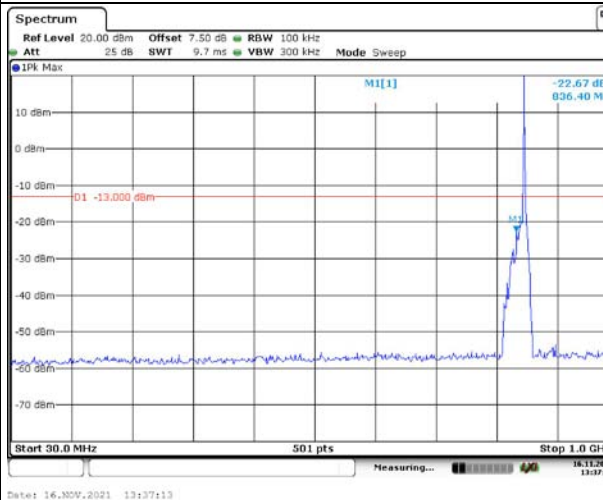


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

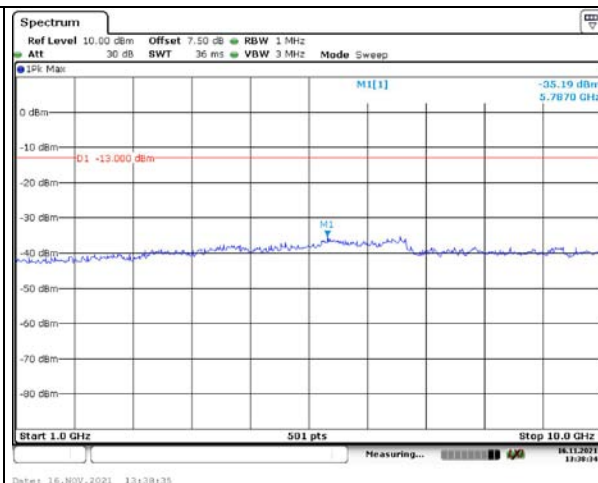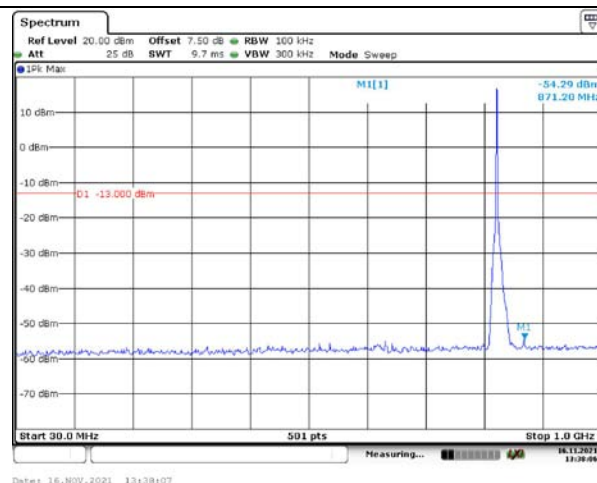

Middle

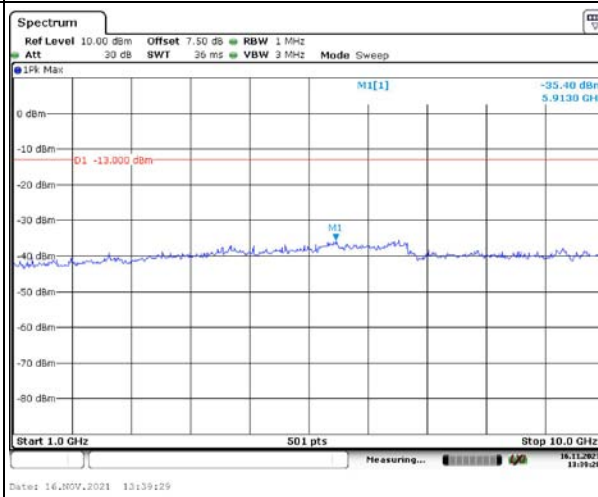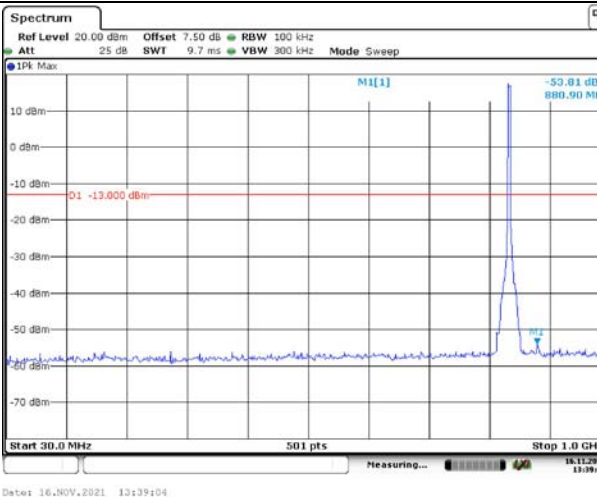

Highest

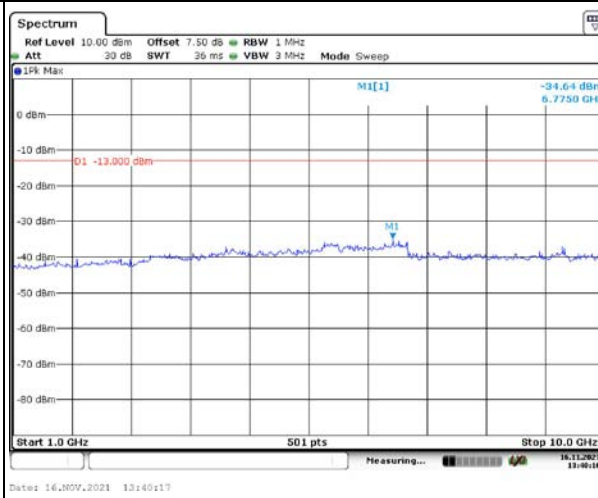
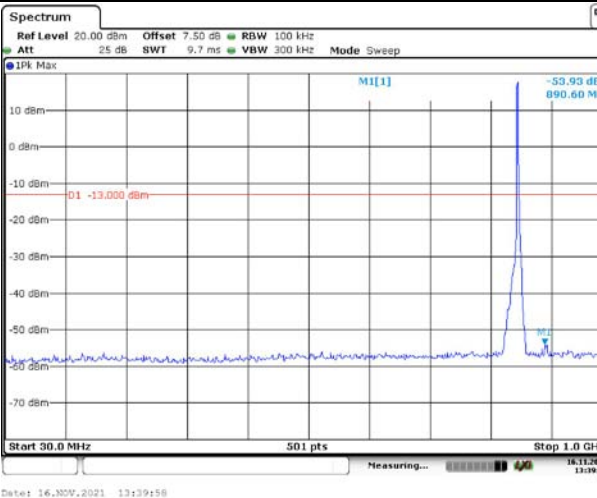


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

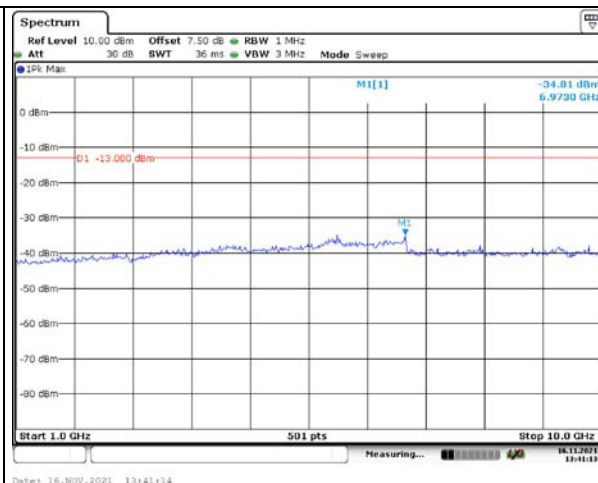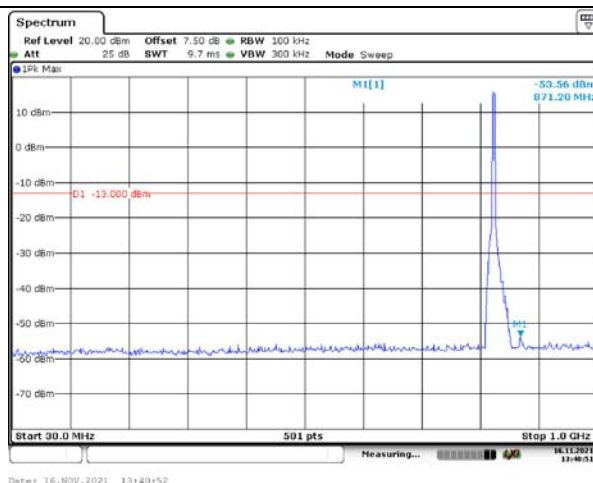

Middle

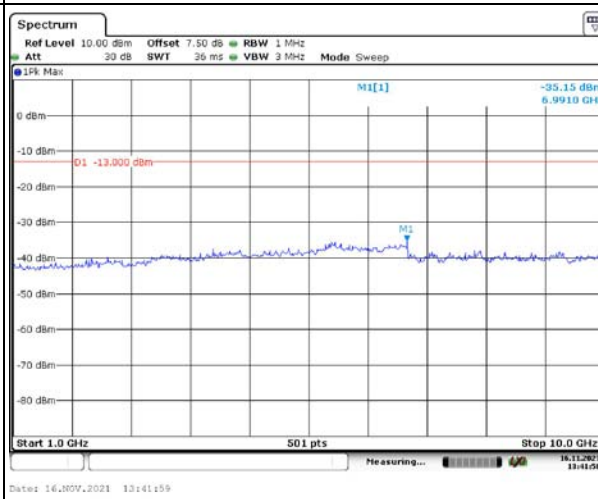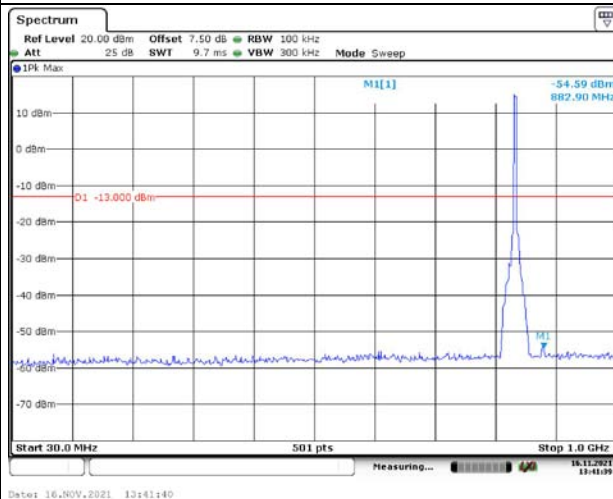

Highest

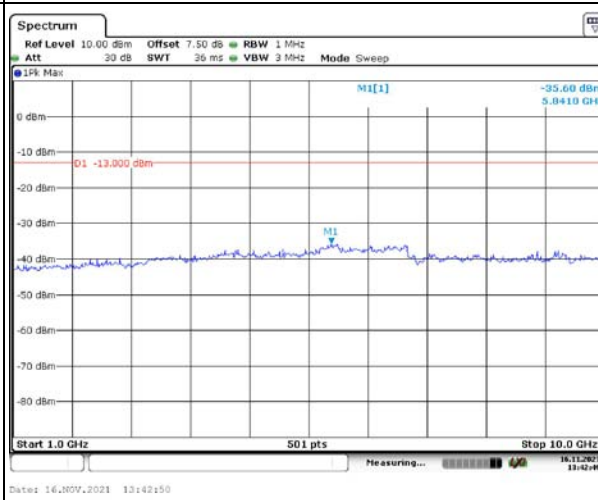
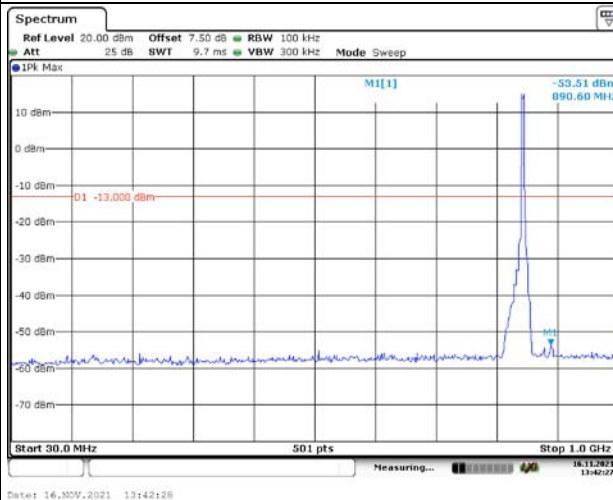


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

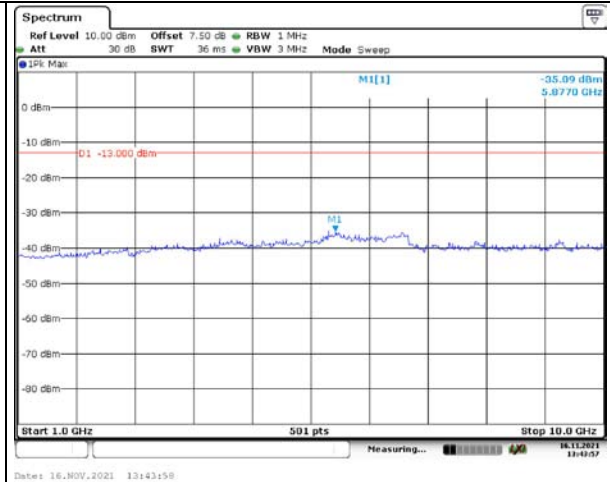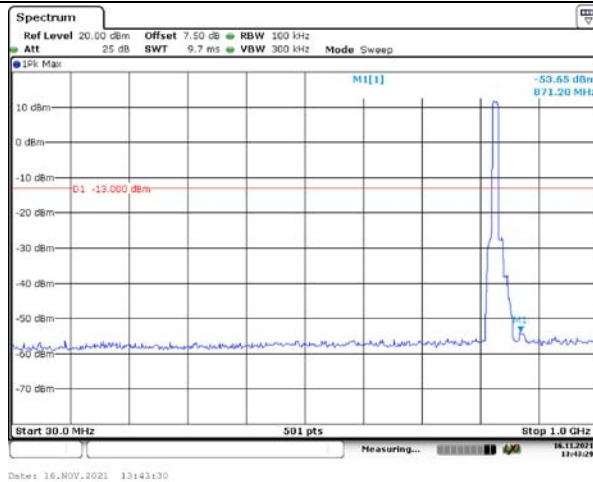


Middle

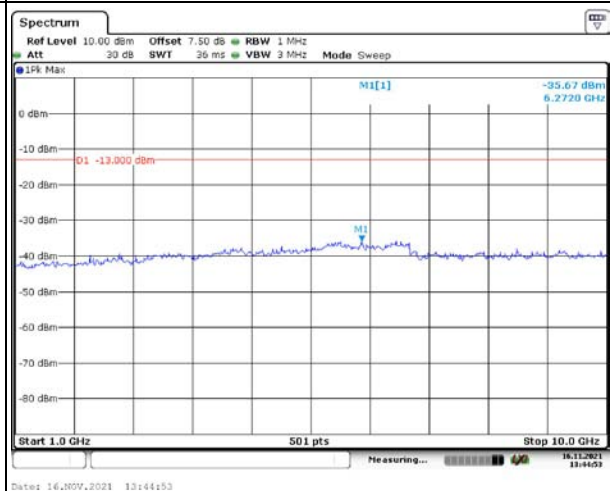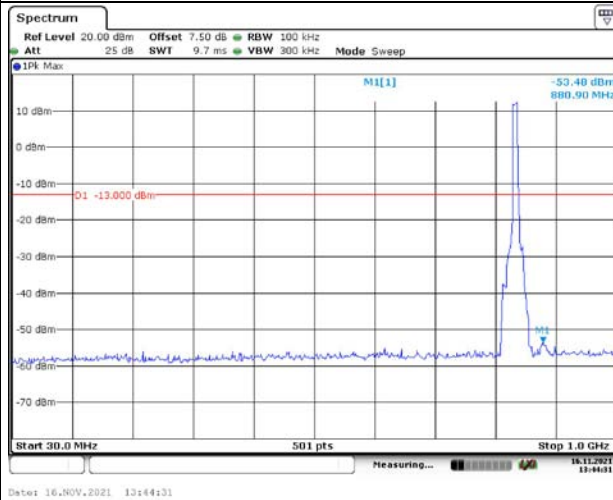


Highest

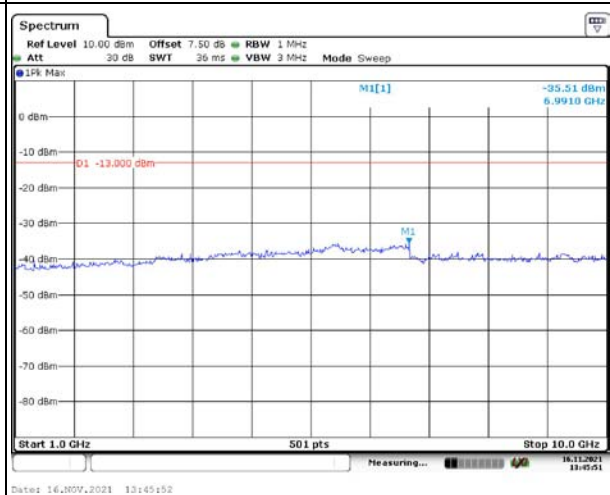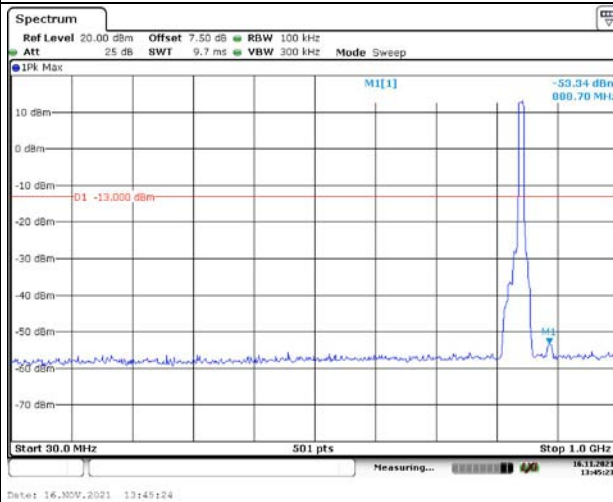


Out of band emission, Band Edge

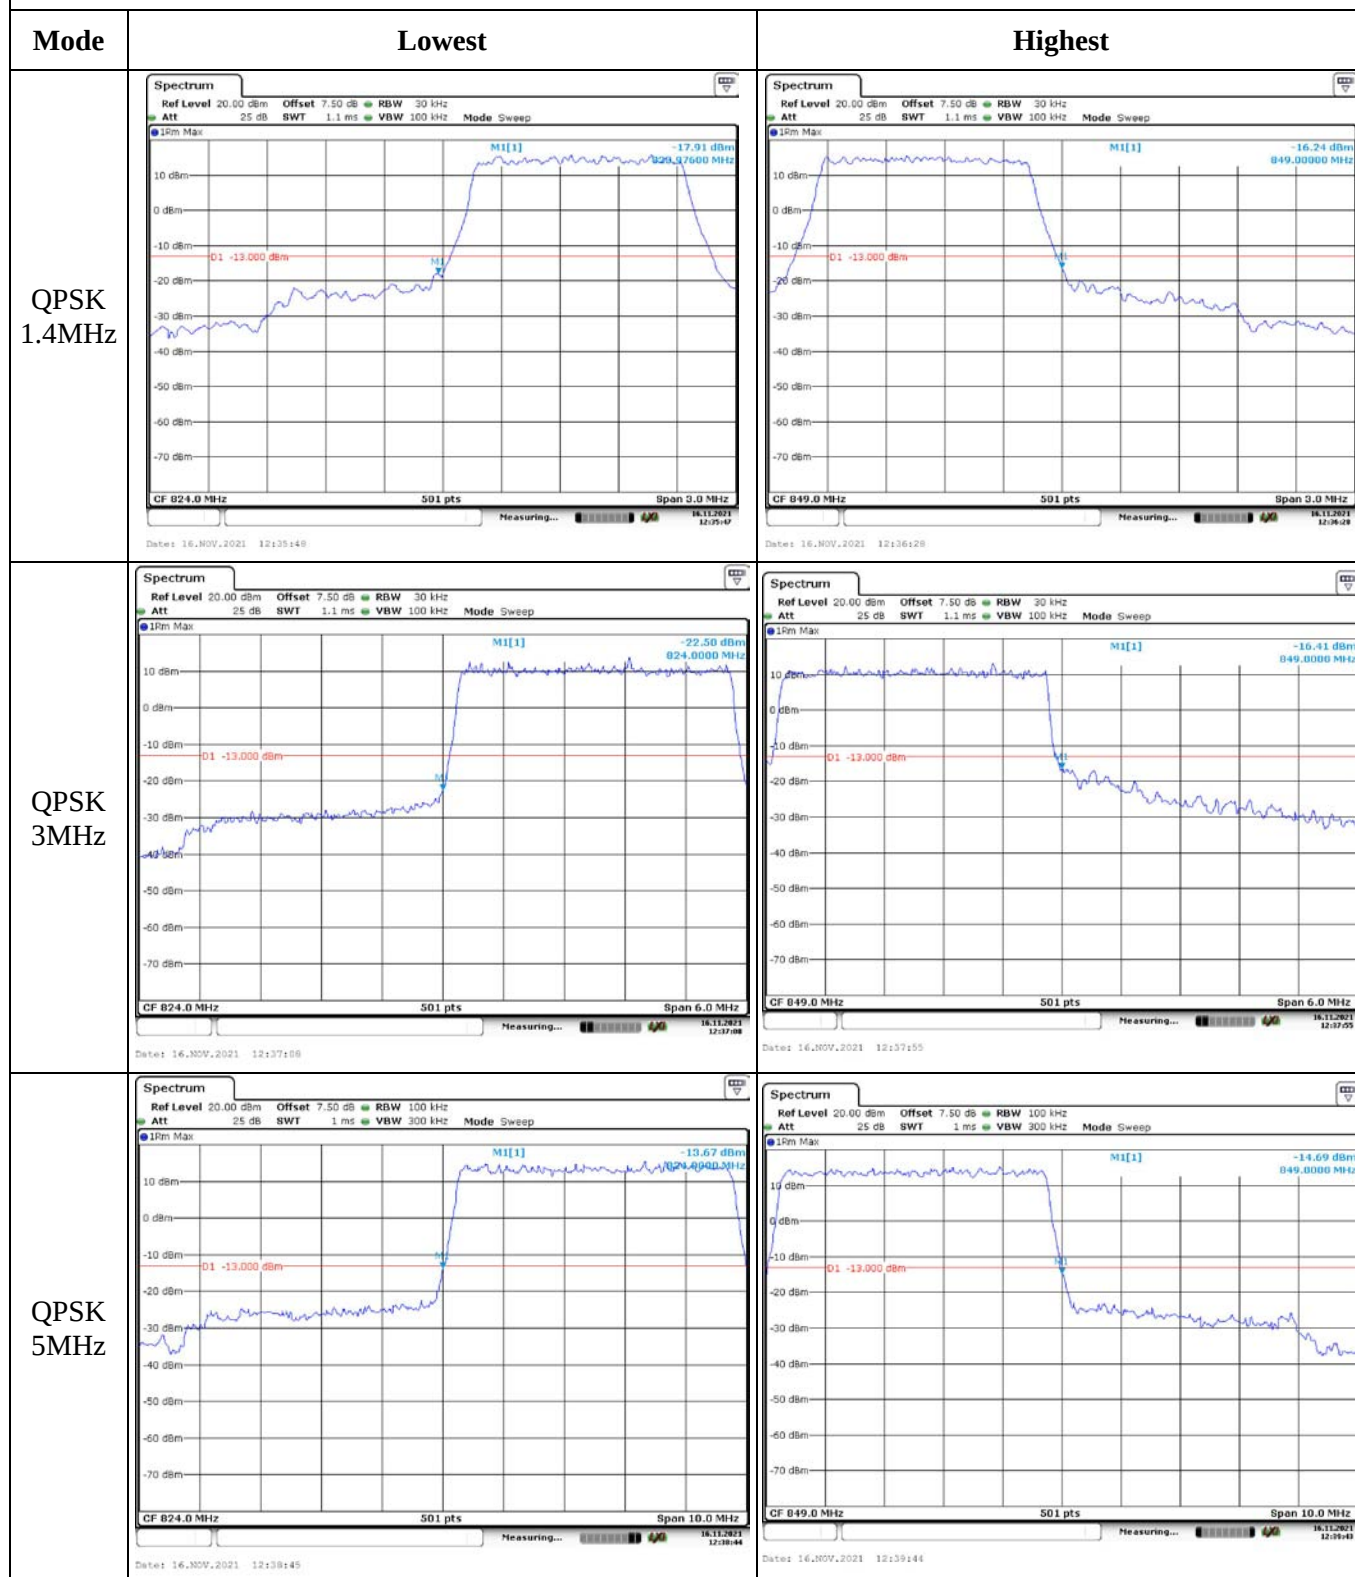


Out of band emission, Band Edge

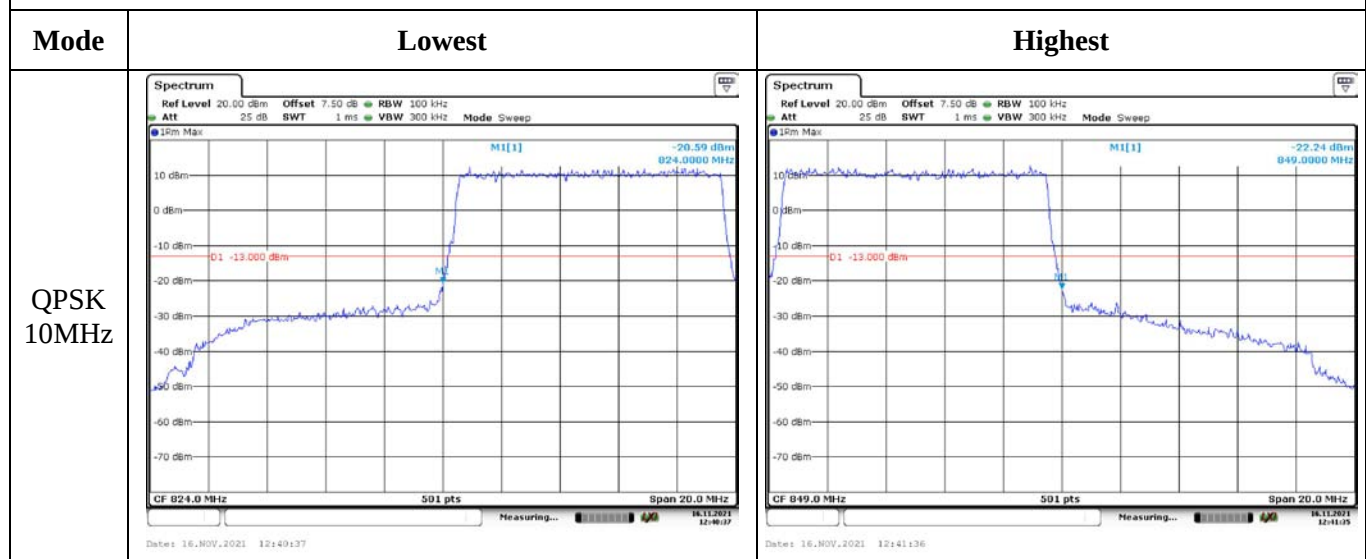

Out of band emission, Band Edge

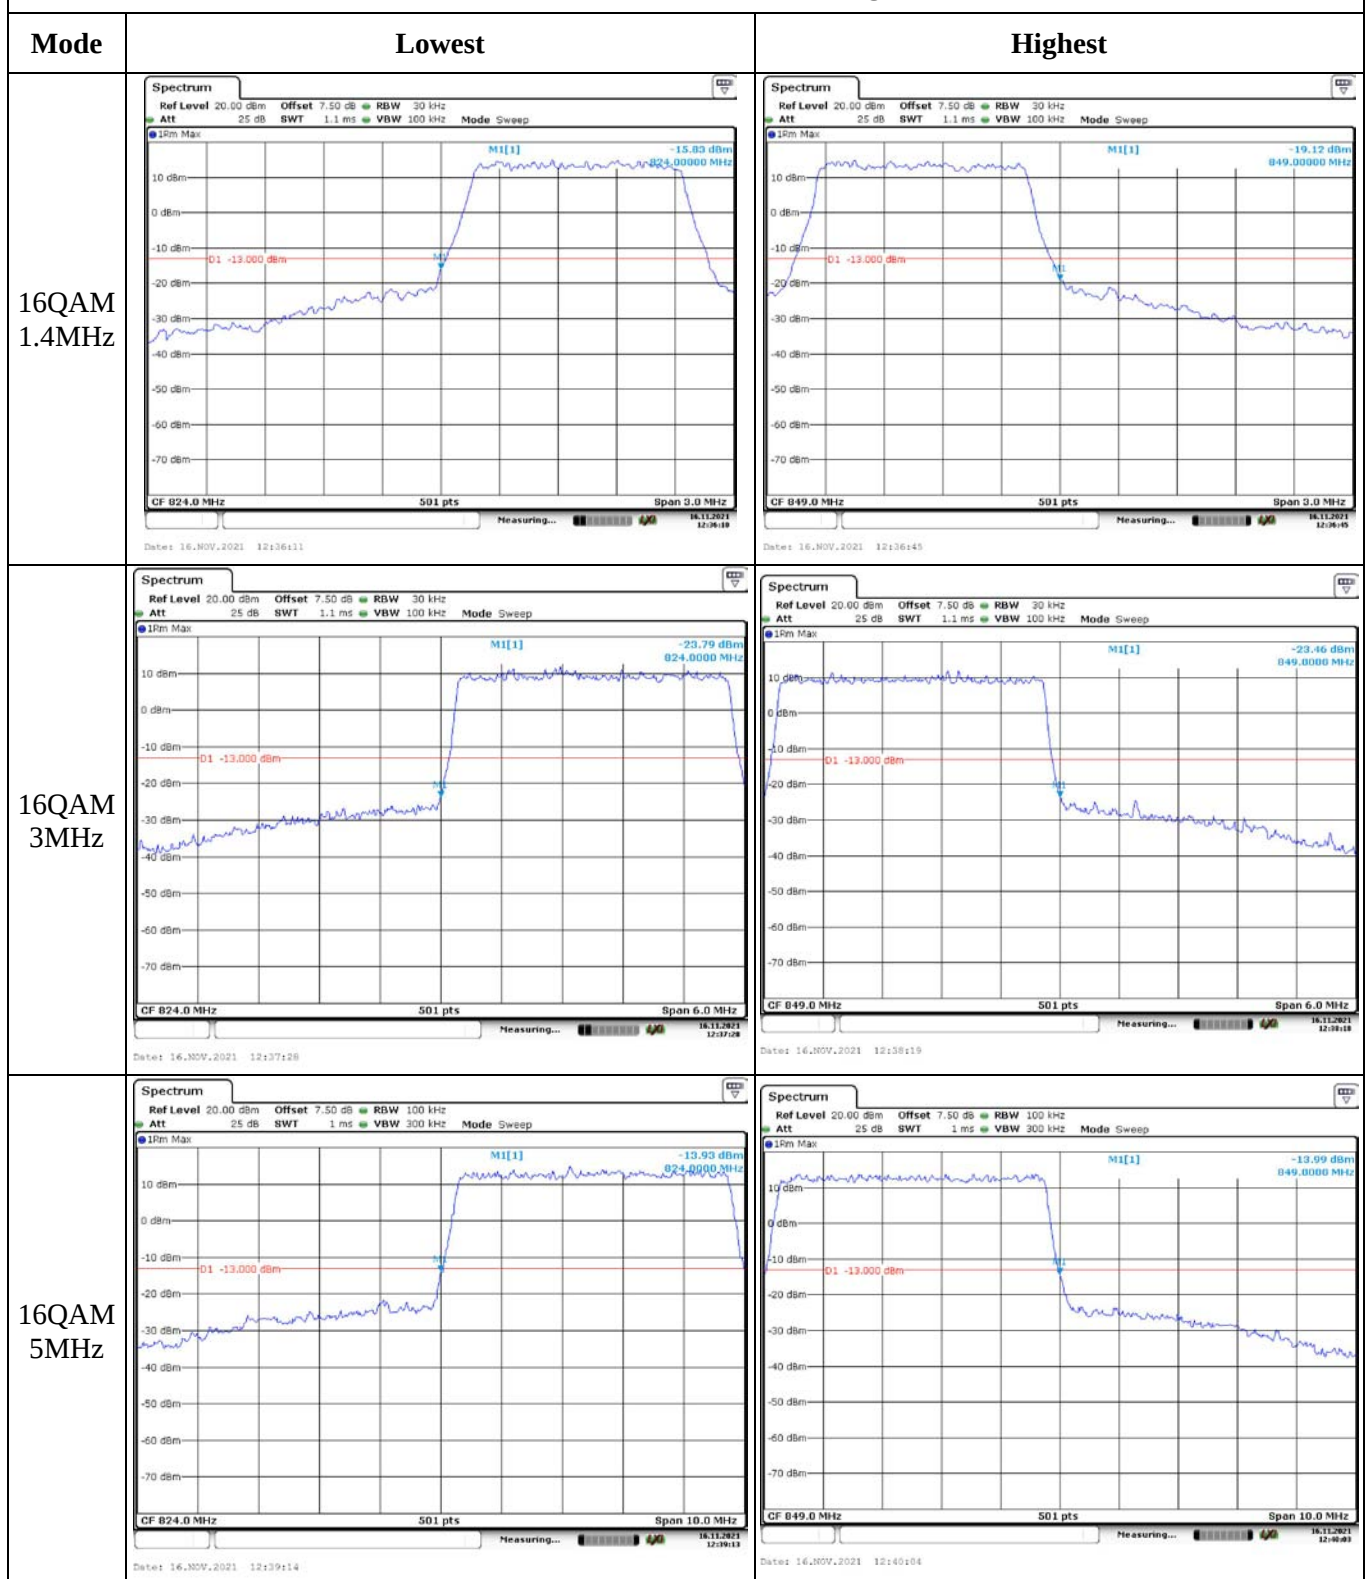

Out of band emission, Band Edge

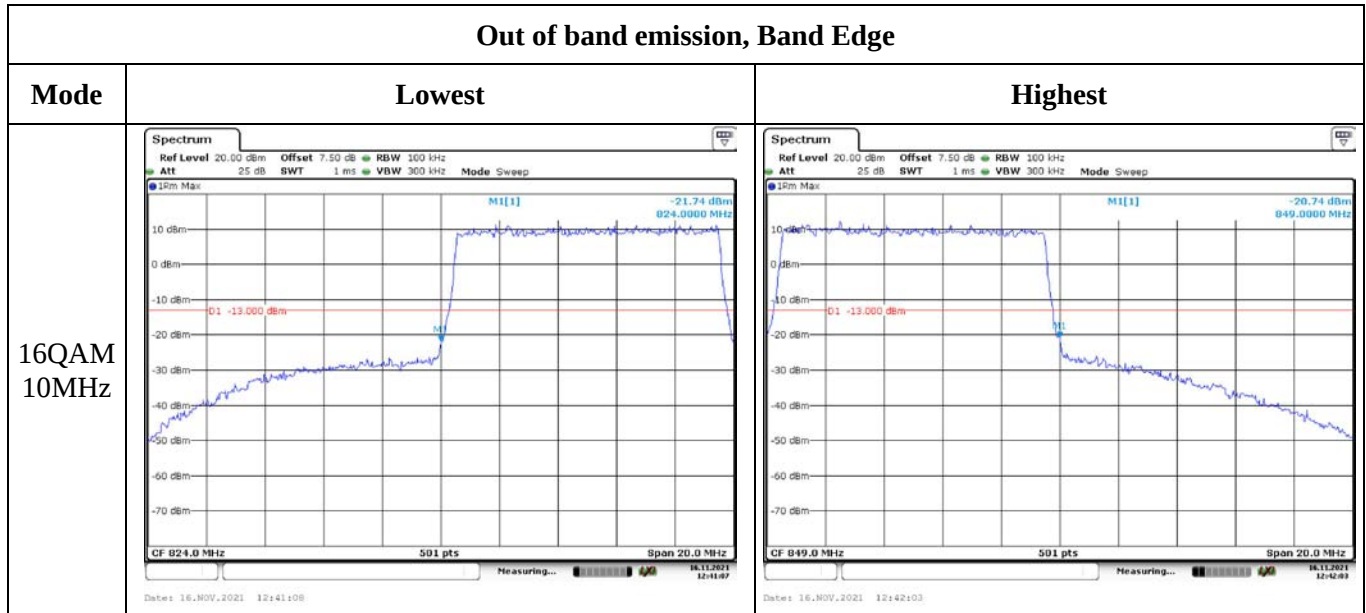

4.6 Antenna Port Test Data and Results for LTE Band 7:

Serial Number:	CR21100112-RF-S1	Test Date:	2021/11/11~2021/11/20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.8~27.7	Relative Humidity: (%)	48~53	ATM Pressure: (kPa)	101.4~101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2021/7/22	2022/7/21
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
44834	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

EUT Information@LTE Band 7▲:

Antenna Gain (dBi):	1	Cable Loss (dB):	0.5
Operation Voltage(V _{DC}):			
Lowest:	3.5	Normal:	3.85
		Highest:	4.4

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2502.5	2535	2567.5
10MHz	2505	2535	2565
15MHz	2507.5	2535	2562.5
20MHz	2510	2535	2560

Test Data:**FCC§2.1046;§ 27.50(h)(2)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	21.36	21.9	22.28	22.85	33
	RB1#13	21.52	22.02	22.35		
	RB1#24	21.41	22	22.3		
	RB15#0	20.5	20.98	21.35		
	RB15#10	20.57	21.06	21.37		
	RB25#0	20.51	21	21.33		
5MHz 16QAM	RB1#0	20.29	21.17	21.32	21.94	33
	RB1#13	20.37	21.32	21.44		
	RB1#24	20.32	21.22	21.39		
	RB15#0	19.58	19.96	20.42		
	RB15#10	19.62	20.06	20.43		
	RB25#0	19.6	20.03	20.42		
10MHz QPSK	RB1#0	21.47	21.92	22.33	23.04	33
	RB1#25	21.77	22.18	22.54		
	RB1#49	21.69	22.04	22.39		
	RB25#0	20.56	20.98	21.36		
	RB25#25	20.59	21.1	21.43		
	RB50#0	20.57	21.06	21.4		
10MHz 16QAM	RB1#0	21	21.07	21.25	22.01	33
	RB1#25	21.14	21.2	21.51		
	RB1#49	21.11	21.16	21.31		
	RB25#0	19.67	20.04	20.47		
	RB25#25	19.71	20.17	20.56		
	RB50#0	19.58	20.11	20.48		
15MHz QPSK	RB1#0	21.44	21.84	22.24	22.81	33
	RB1#38	21.69	22.05	22.31		
	RB1#74	21.66	22.05	21.96		
	RB36#0	20.68	21.02	20.95		
	RB36#39	20.79	21.16	21.13		
	RB75#0	20.7	21.08	20.97		
15MHz 16QAM	RB1#0	20.88	20.98	21.1	21.75	33
	RB1#38	21.1	21.2	21.25		
	RB1#74	21.14	21.17	21.22		
	RB36#0	19.63	20.01	19.89		
	RB36#39	19.74	20.17	20.19		
	RB75#0	19.67	20.11	19.99		
20MHz QPSK	RB1#0	21.28	21.71	21.93	22.76	33
	RB1#50	21.89	22.17	22.26		
	RB1#99	21.32	21.65	21.64		

20MHz 16QAM	RB50#0	20.45	20.86	20.86	22.16	33
	RB50#50	20.73	21.08	20.96		
	RB100#0	20.63	20.96	20.85		
	RB1#0	20.51	20.78	21.01		
	RB1#50	21.11	21.22	21.66		
	RB1#99	20.78	20.98	21.2		
	RB50#0	19.63	19.9	19.86		
	RB50#50	19.71	20.18	19.94		
	RB100#0	19.67	20.06	19.87		

Note: EIRP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	3.86	4.55	4.78	13
	RB100#0	4.75	5.1	5.19	13
20MHz 16QAM	RB1#0	4.84	5.48	5.48	13
	RB100#0	5.62	6	6.09	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.511	4.511	4.491	4.94	4.94	4.94
5MHz 16QAM	4.491	4.511	4.511	4.94	4.96	4.94
10MHz QPSK	8.942	8.942	8.942	9.68	9.6	9.6
10MHz 16QAM	8.942	8.981	8.942	9.6	9.64	9.6
15MHz QPSK	13.473	13.473	13.473	14.76	14.7	14.82
15MHz 16QAM	13.533	13.473	13.473	15.12	14.7	14.7
20MHz QPSK	17.884	17.884	17.964	19.28	19.2	19.52
20MHz 16QAM	17.964	17.964	17.964	19.36	19.36	19.44

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---


FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2500.528	2500.00	2569.512	2570
	-20	3.85	2500.528	2500.00	2569.510	2570
	-10	3.85	2500.528	2500.00	2569.511	2570
	0	3.85	2500.528	2500.00	2569.512	2570
	10	3.85	2500.529	2500.00	2569.512	2570
	20	3.85	2500.529	2500.00	2569.511	2570
	30	3.85	2500.529	2500.00	2569.512	2570
	40	3.85	2500.527	2500.00	2569.510	2570
	50	3.85	2500.528	2500.00	2569.511	2570
Frequency Stability vs. Voltage	20	3.5	2500.529	2500.00	2569.512	2570
	20	4.4	2500.528	2500.00	2569.511	2570
					Result:	Pass


Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2500.529	2500.00	2569.472	2570
	-20	3.85	2500.529	2500.00	2569.472	2570
	-10	3.85	2500.528	2500.00	2569.472	2570
	0	3.85	2500.529	2500.00	2569.471	2570
	10	3.85	2500.528	2500.00	2569.471	2570
	20	3.85	2500.529	2500.00	2569.471	2570
	30	3.85	2500.529	2500.00	2569.471	2570
	40	3.85	2500.527	2500.00	2569.472	2570
	50	3.85	2500.527	2500.00	2569.472	2570
Frequency Stability vs. Voltage	20	3.5	2500.528	2500.00	2569.471	2570
	20	4.4	2500.528	2500.00	2569.472	2570
					Result:	Pass

Test Plots:







Occupied Bandwidth

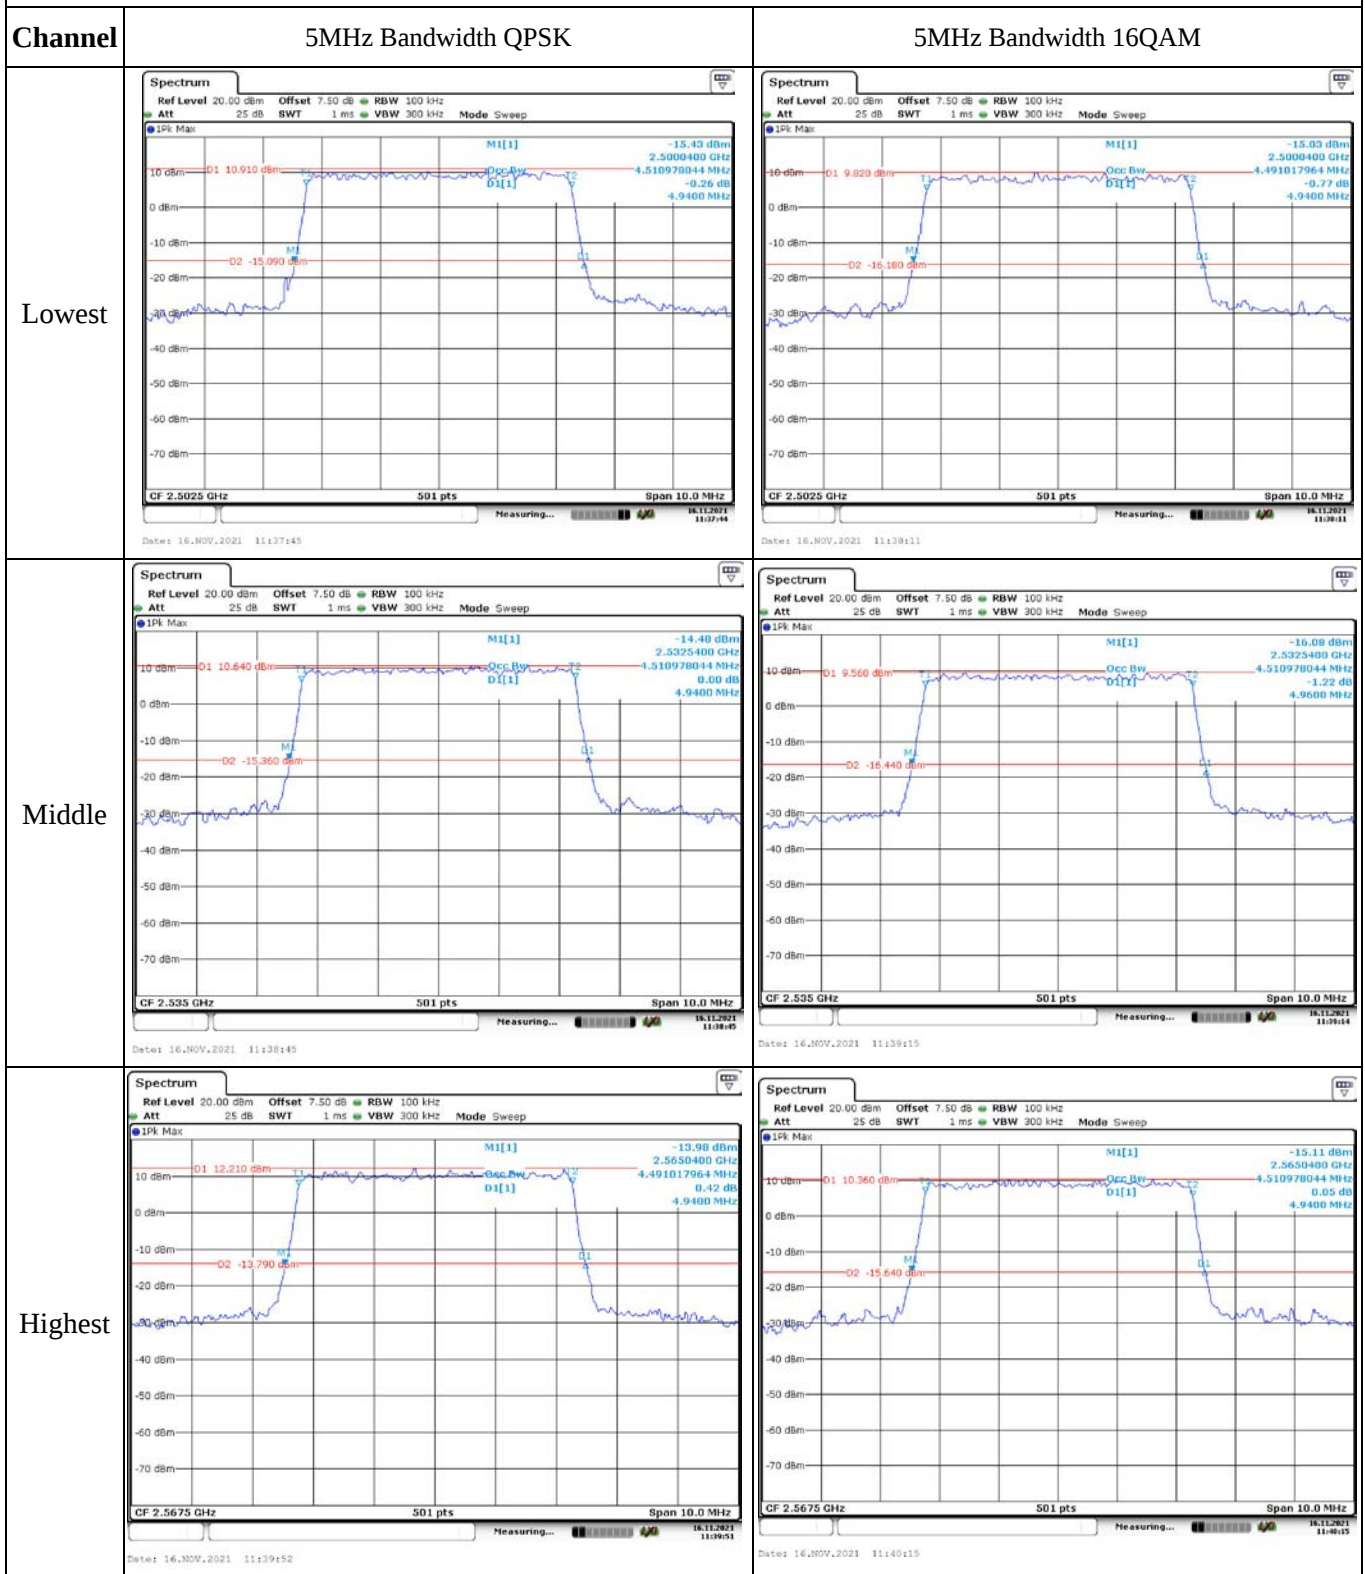


Occupied Bandwidth

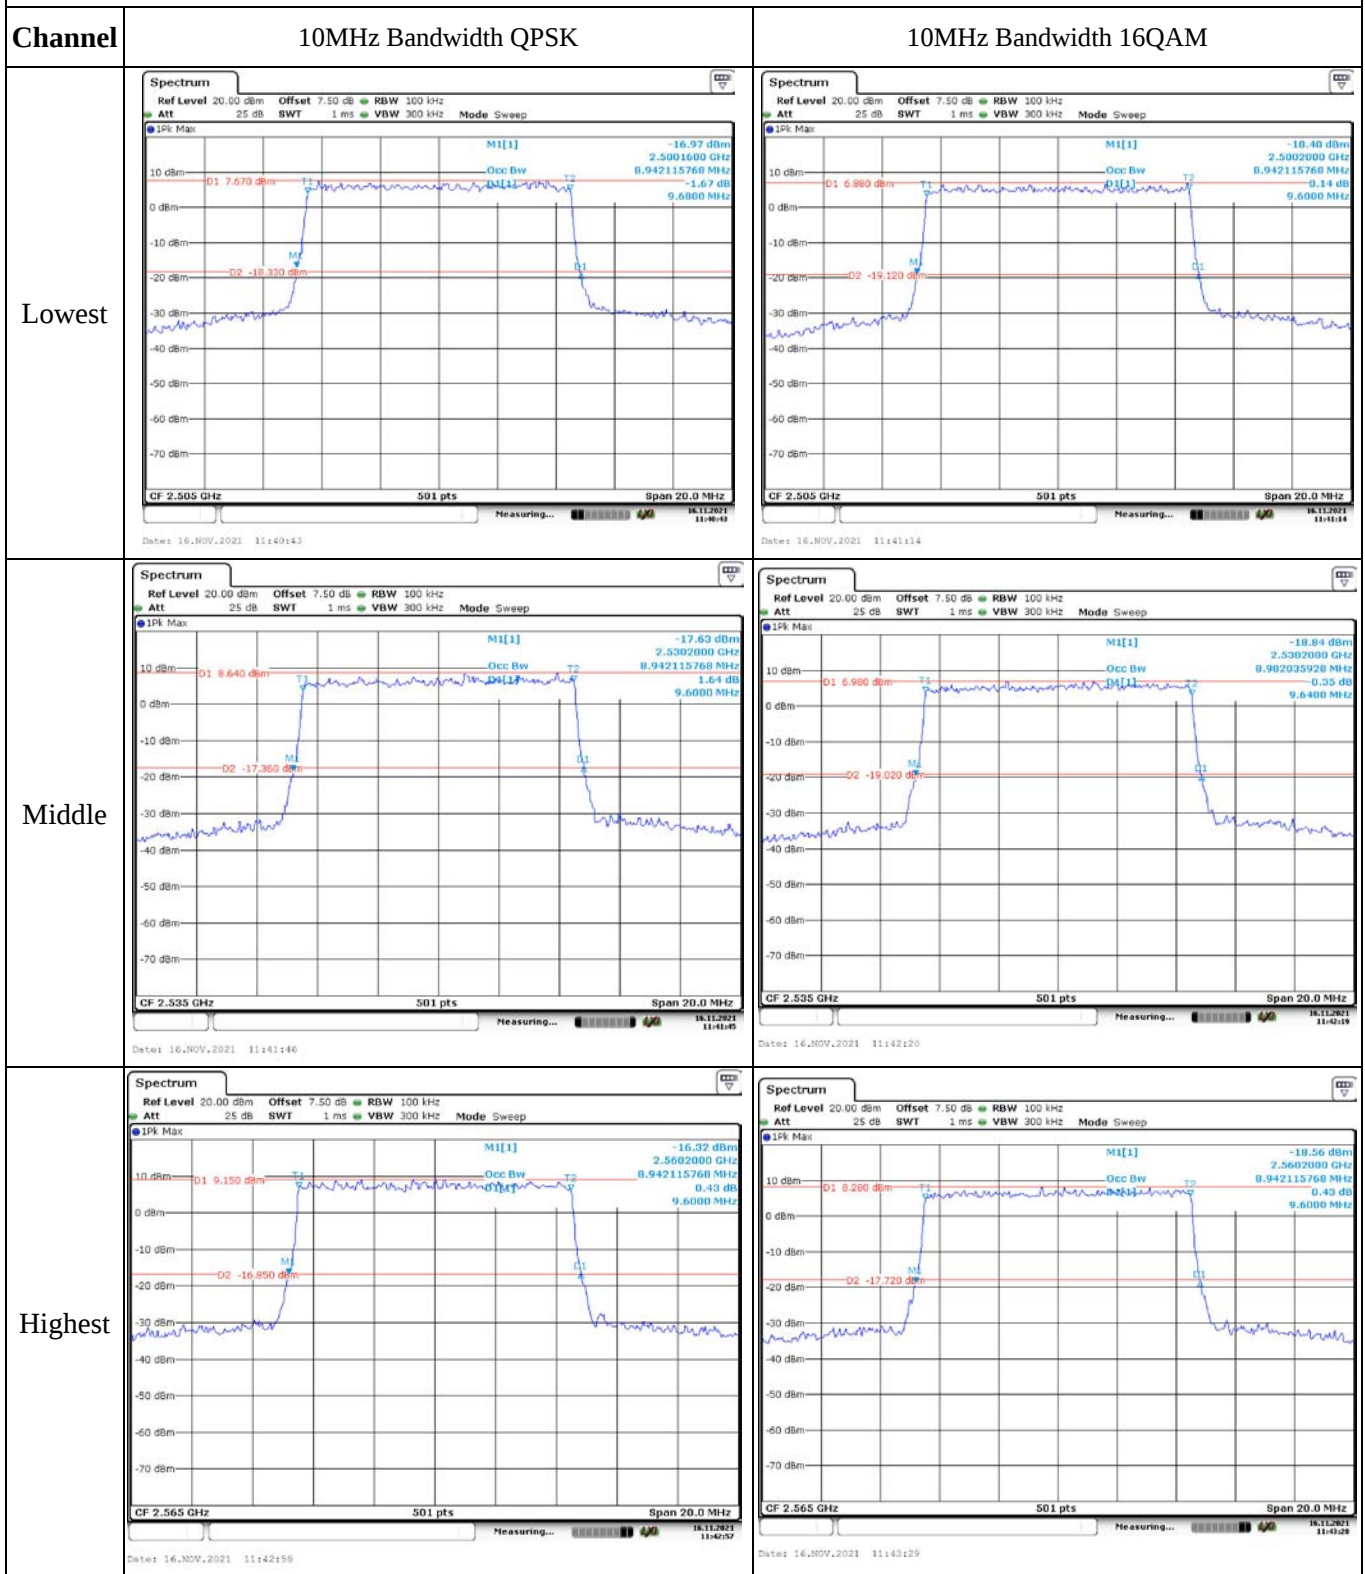

Occupied Bandwidth

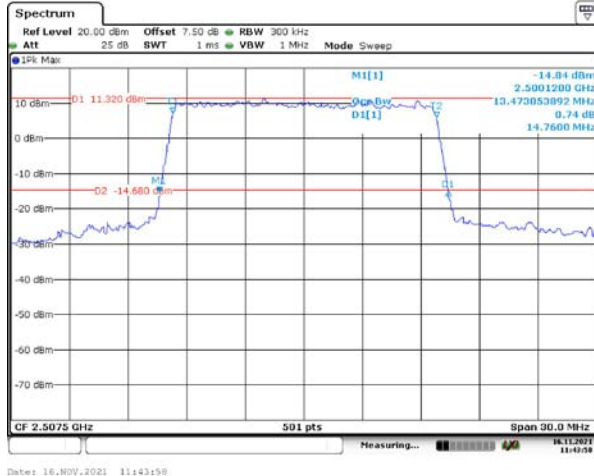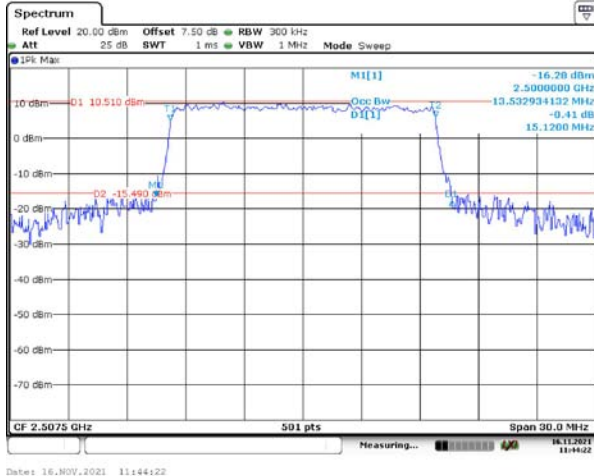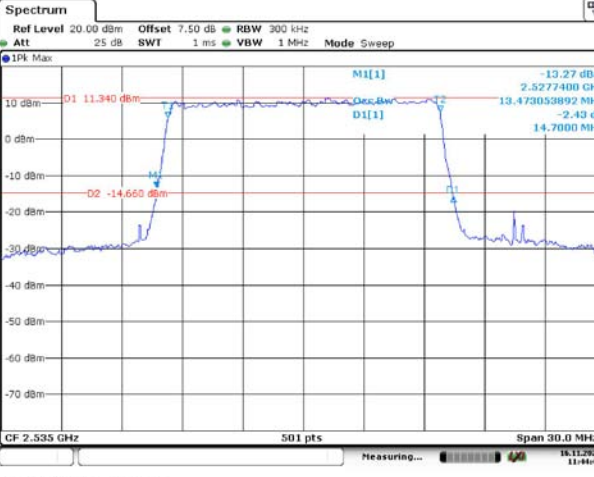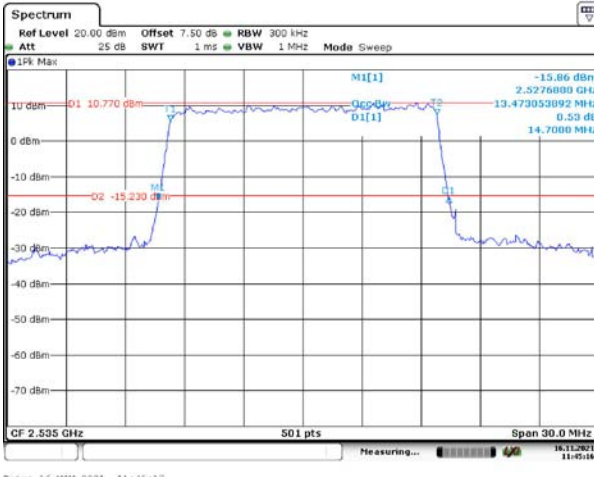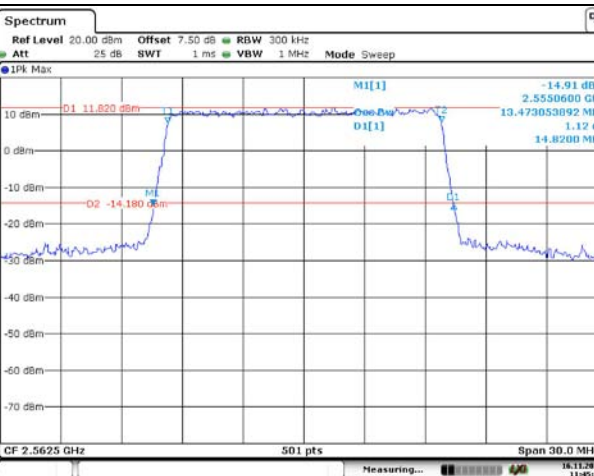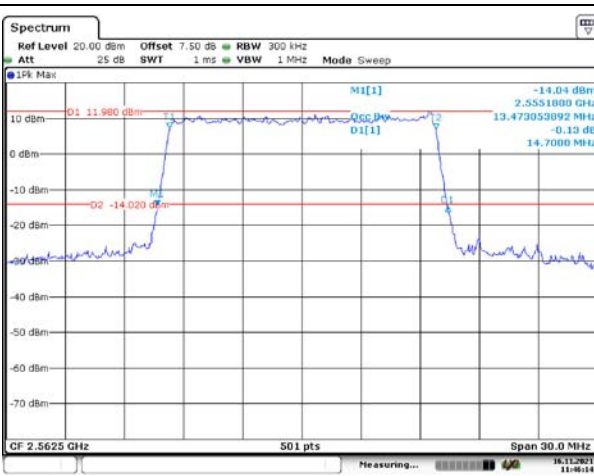Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth


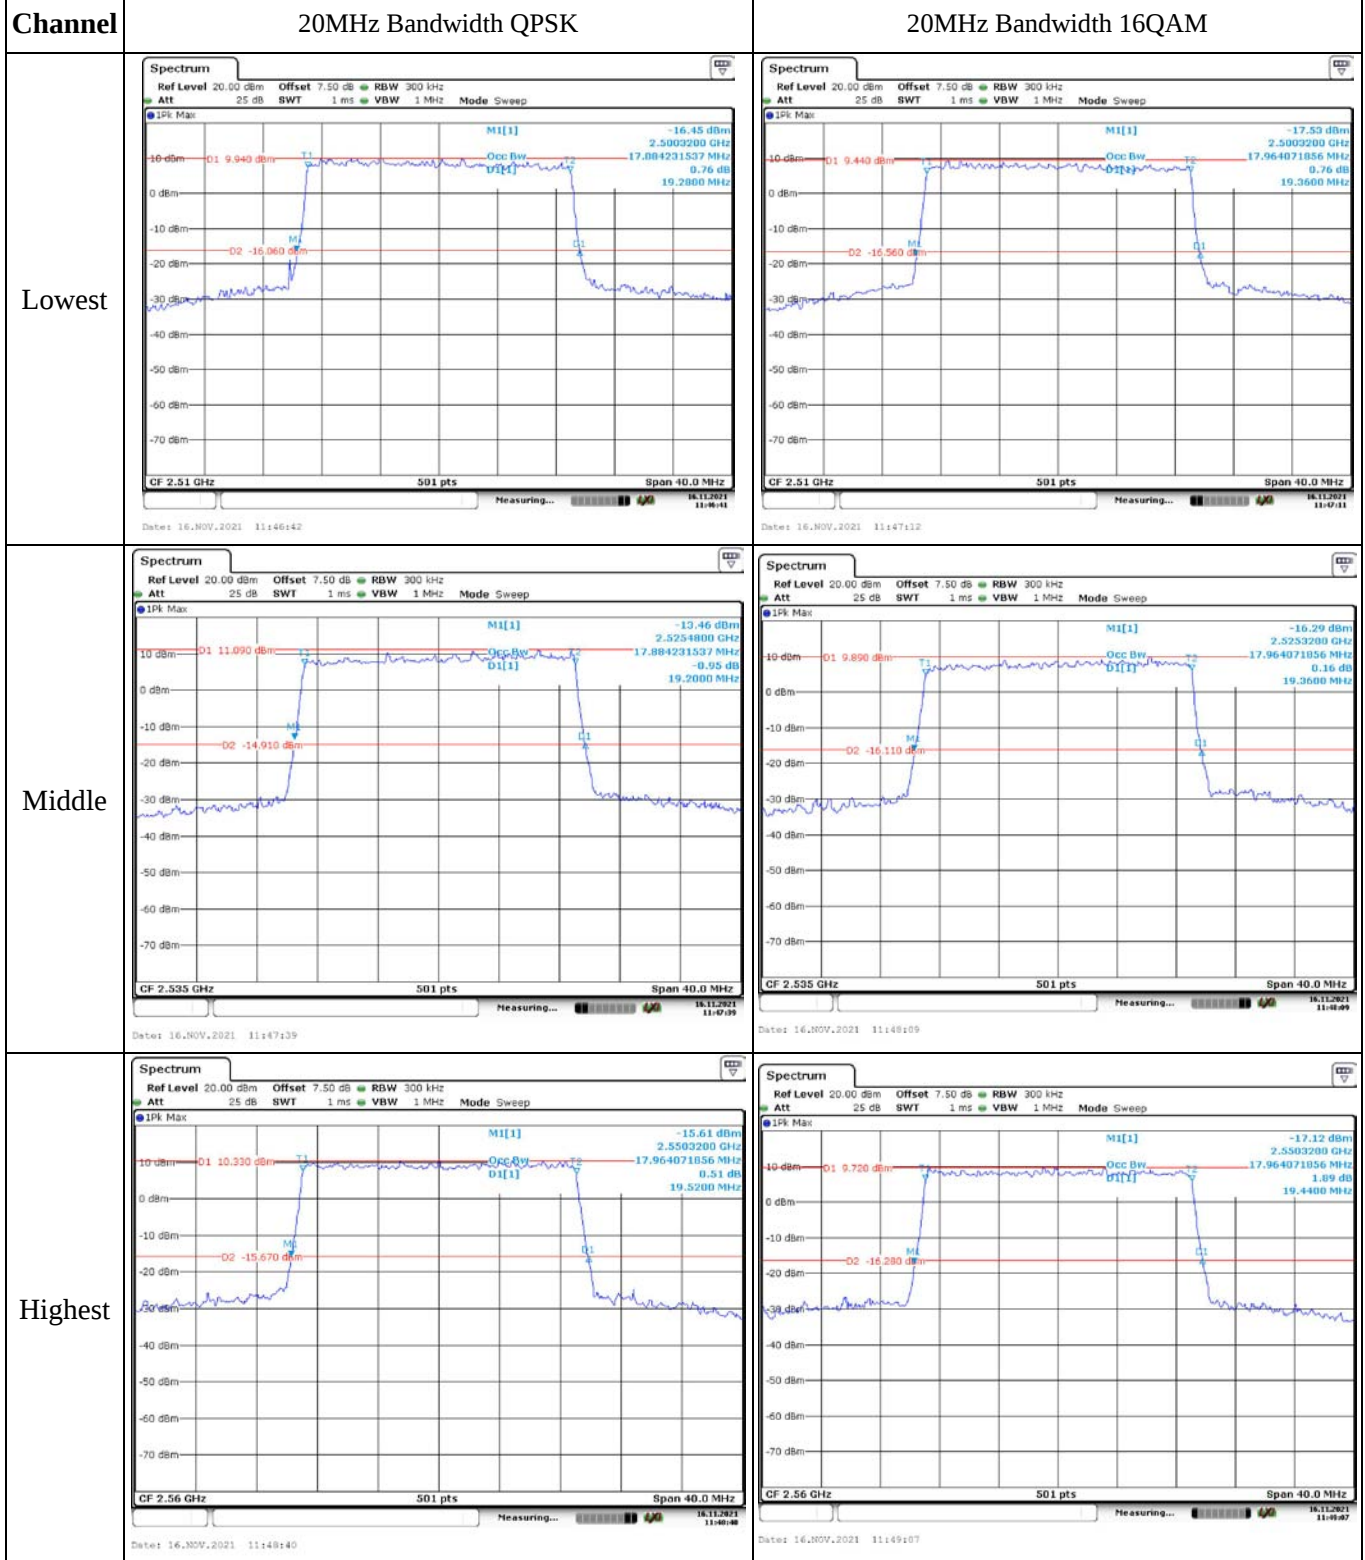


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK

Lowest

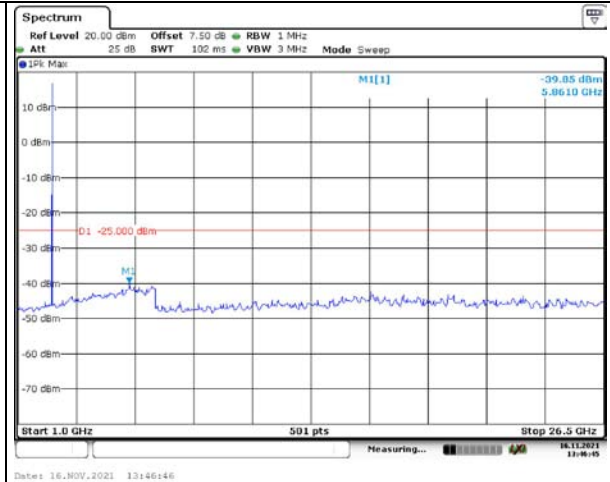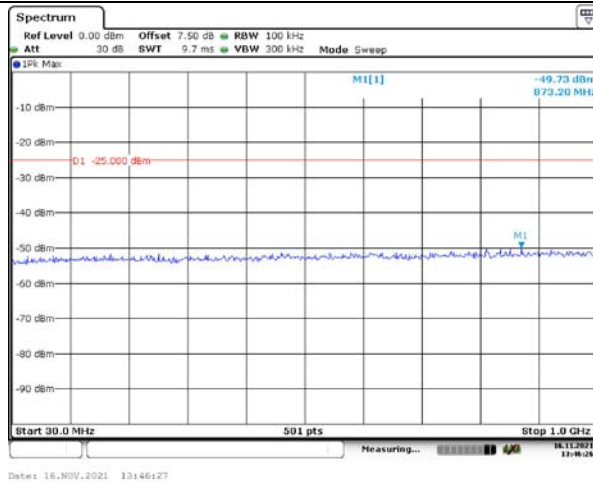

Middle

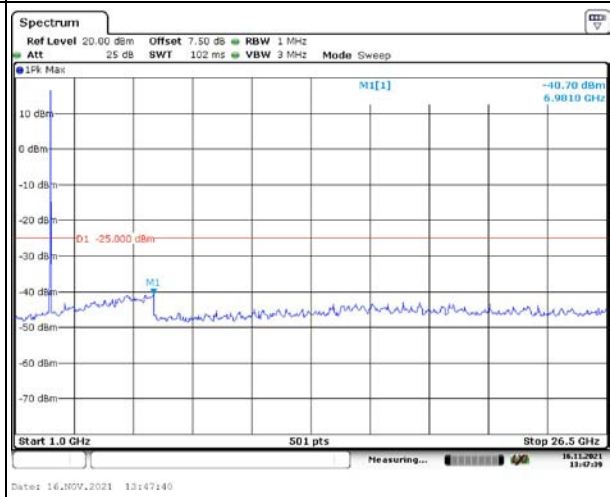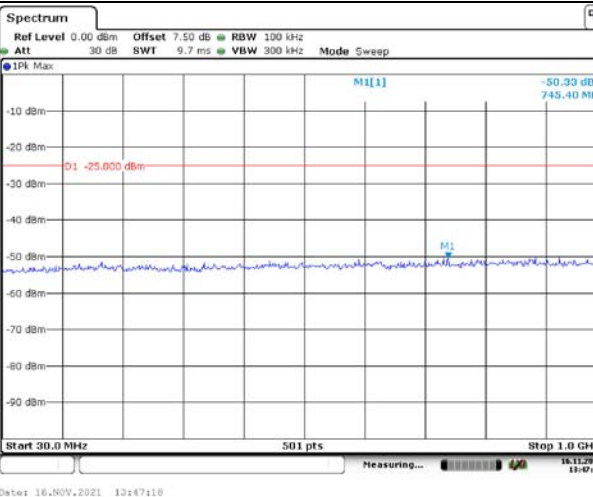

Highest

