

Test Plot 1#: Chain 0 Wi-Fi 2.4G_Front(Face)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 39.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.34, 7.34, 7.34); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.0305 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.096 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0293 W/kg

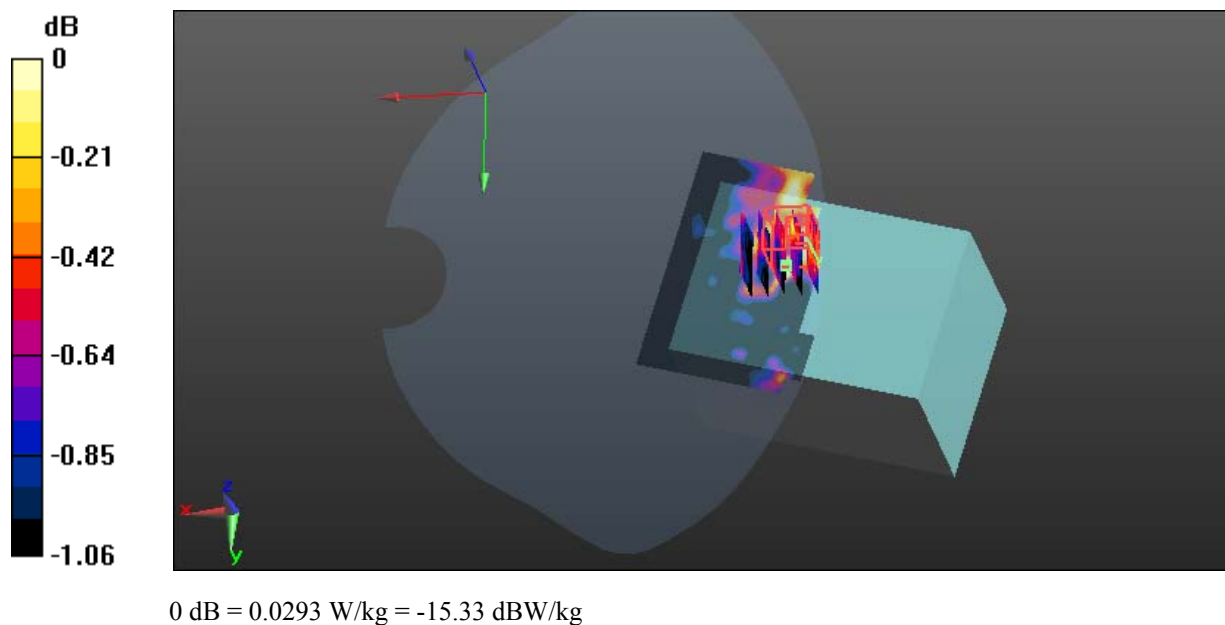

Test Plot 2#: Chain 0 Wi-Fi 2.4G _Front(Eye)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.759 \text{ S/m}$; $\epsilon_r = 39.909$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.34, 7.34, 7.34); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

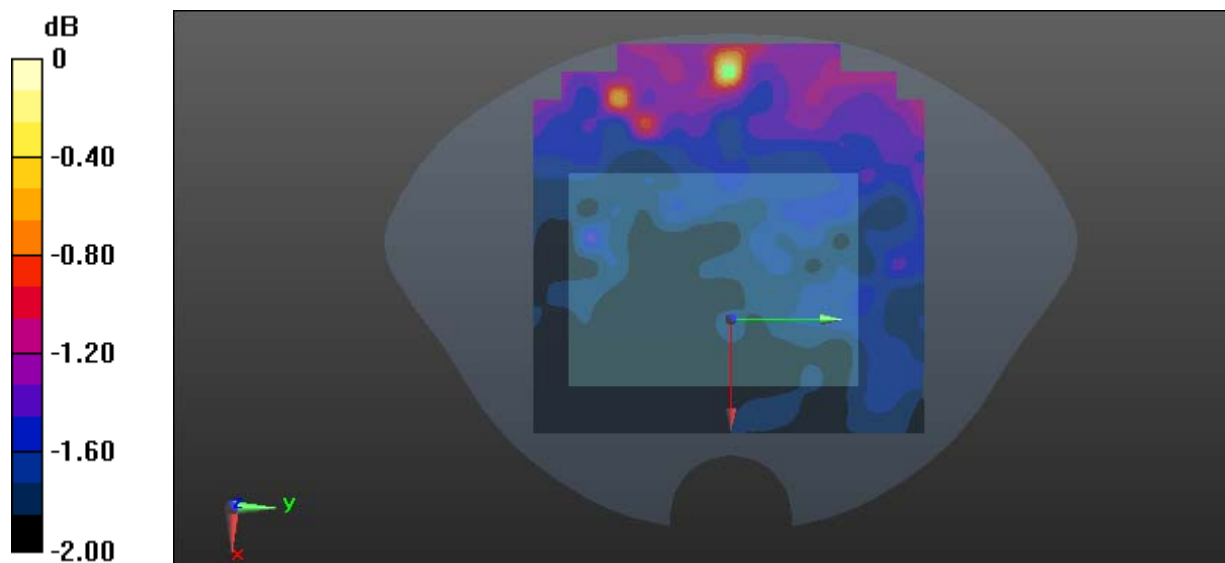Area Scan (151x141x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00663 W/kg  $0 \text{ dB} = 0.00663 \text{ W/kg} = -21.78 \text{ dBW/kg}$

Test Plot 3#: Chain 1 Wi-Fi 2.4G _Front(Face)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 39.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.34, 7.34, 7.34); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0187 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.936 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0200 W/kg

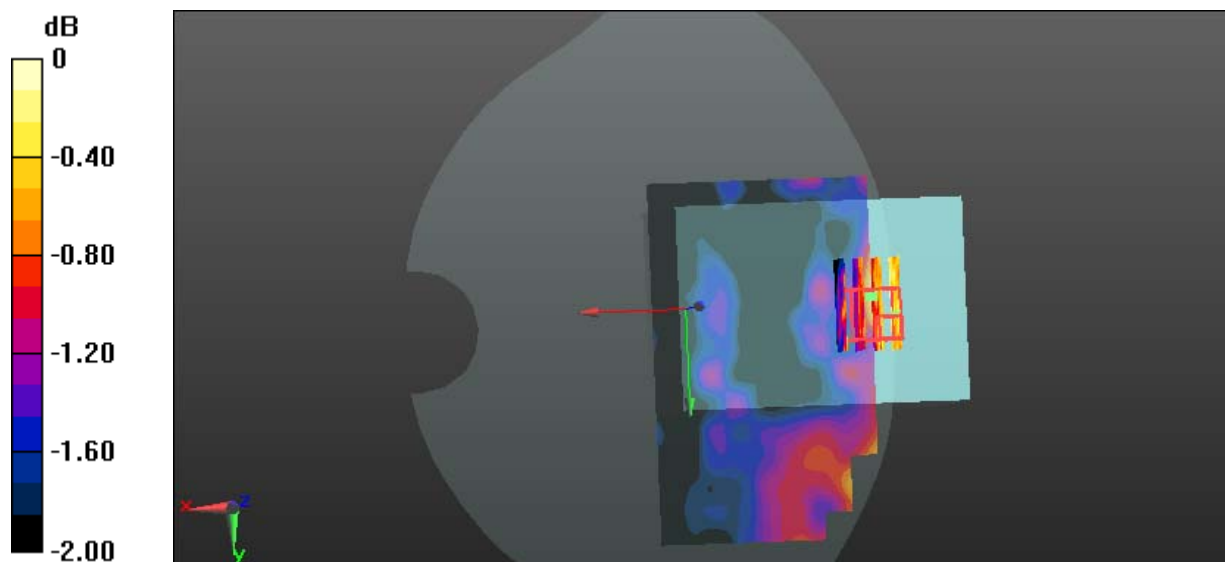

0 dB = 0.0200 W/kg = -16.99 dBW/kg

Test Plot 4#: Chain 1 Wi-Fi 2.4G _Front(Eye)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 39.909$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.34, 7.34, 7.34); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00190 W/kg

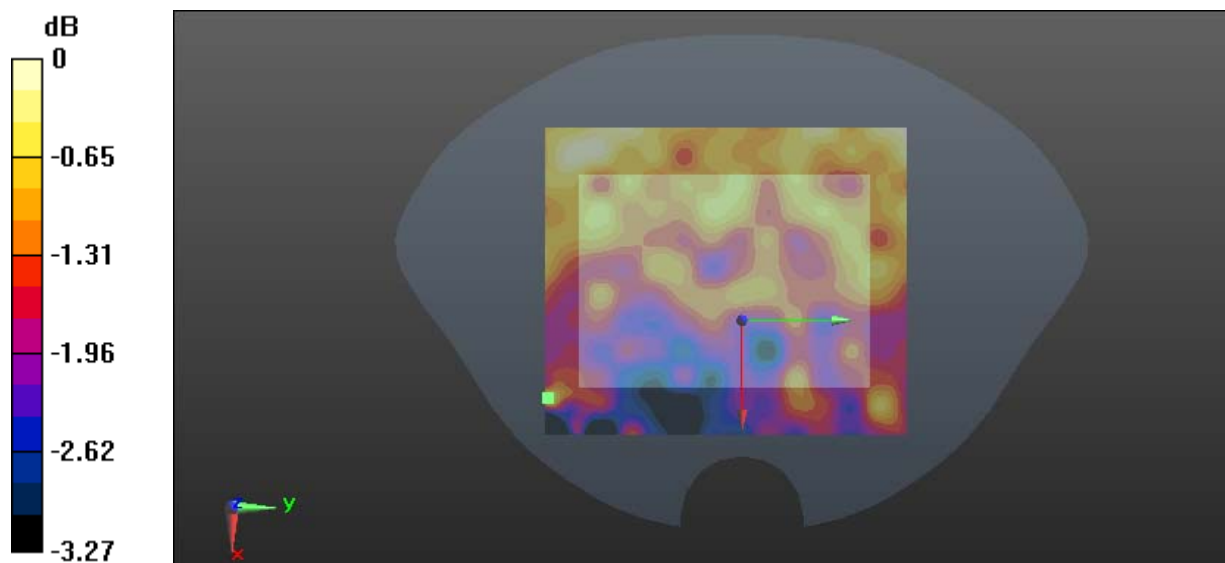 $0 \text{ dB} = 0.00190 \text{ W/kg} = -27.21 \text{ dBW/kg}$

Test Plot 5#: Chain 0 Wi-Fi 5.2G _Front(Face)_High**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.629$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x171x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00664 W/kg

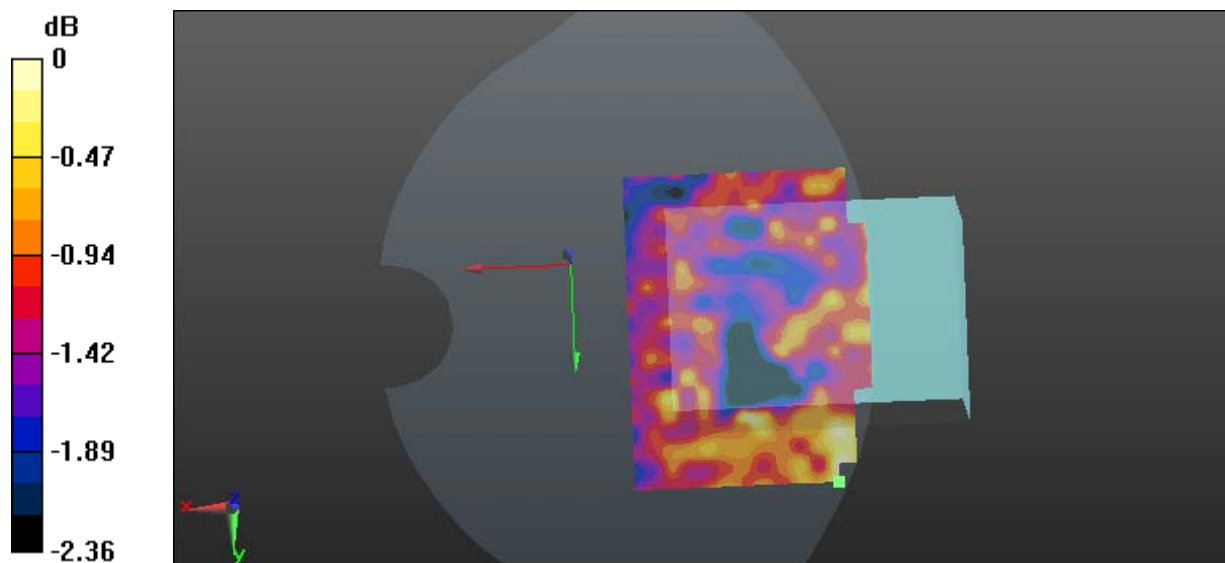

0 dB = 0.00664 W/kg = -21.78 dBW/kg

Test Plot 6#: Chain 0 Wi-Fi 5.2G _Front(Eye)_ High**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.629$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.0115 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 4.094 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.0073 W/kg; SAR(10 g) = 0.0066 W/kg

Maximum value of SAR (measured) = 0.00915 W/kg

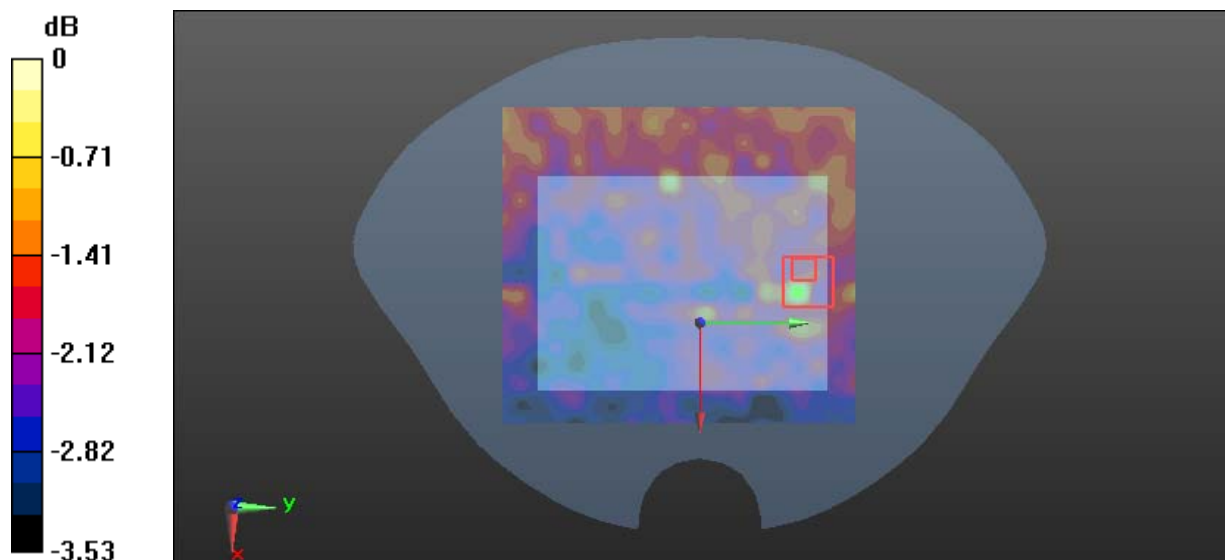

0 dB = 0.00915 W/kg = -20.39 dBW/kg

Test Plot 7#: Chain 1 Wi-Fi 5.2G _Front(Face)_ High**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.629$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x171x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00211 W/kg

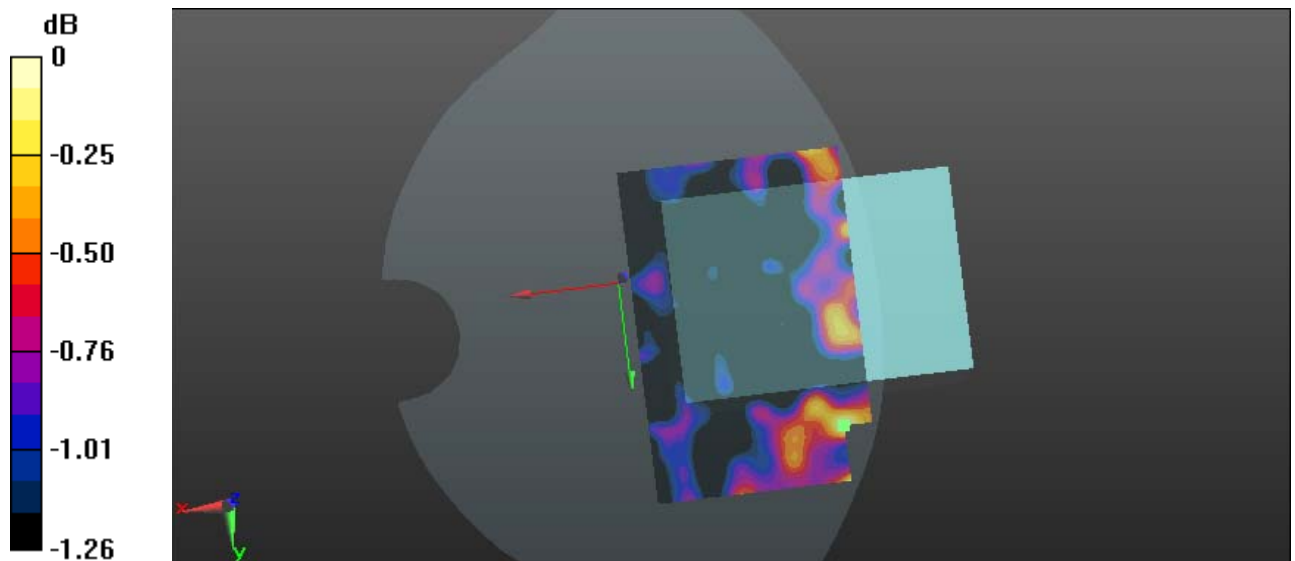

0 dB = 0.00211 W/kg = -26.76 dBW/kg

Test Plot 8#: Chain 1 Wi-Fi 5.2G _Front(Eye)_ High**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.629$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00340 W/kg

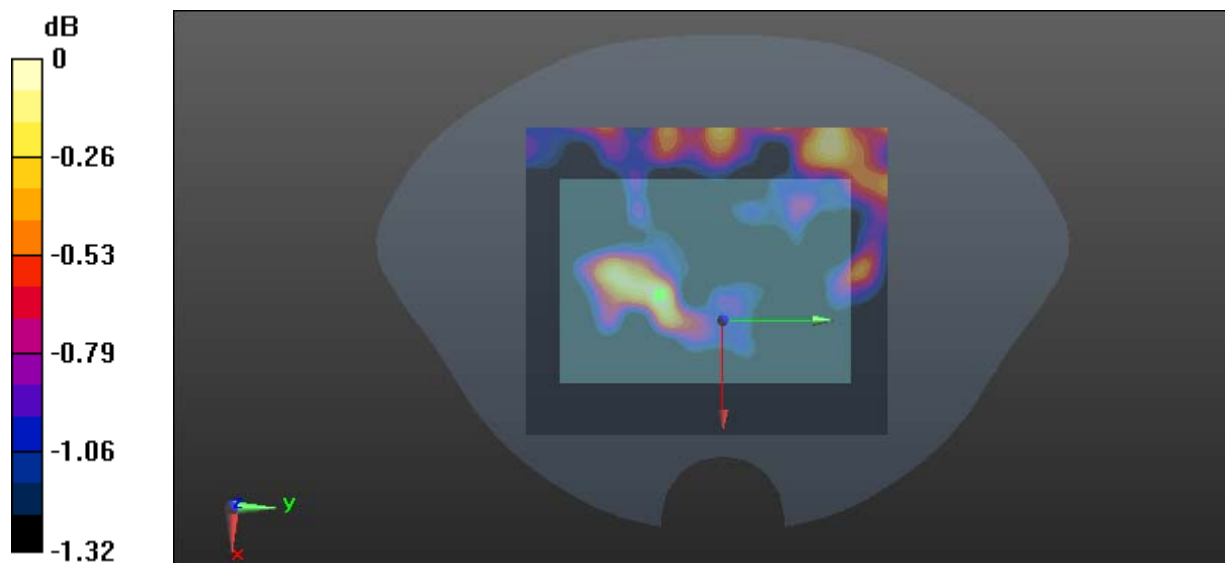

0 dB = 0.00340 W/kg = -24.69 dBW/kg

Test Plot 9#: Chain 0 Wi-Fi 5.3G _Front(Face)_Low**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.3 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.573$ S/m; $\epsilon_r = 36.844$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x161x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00622 W/kg

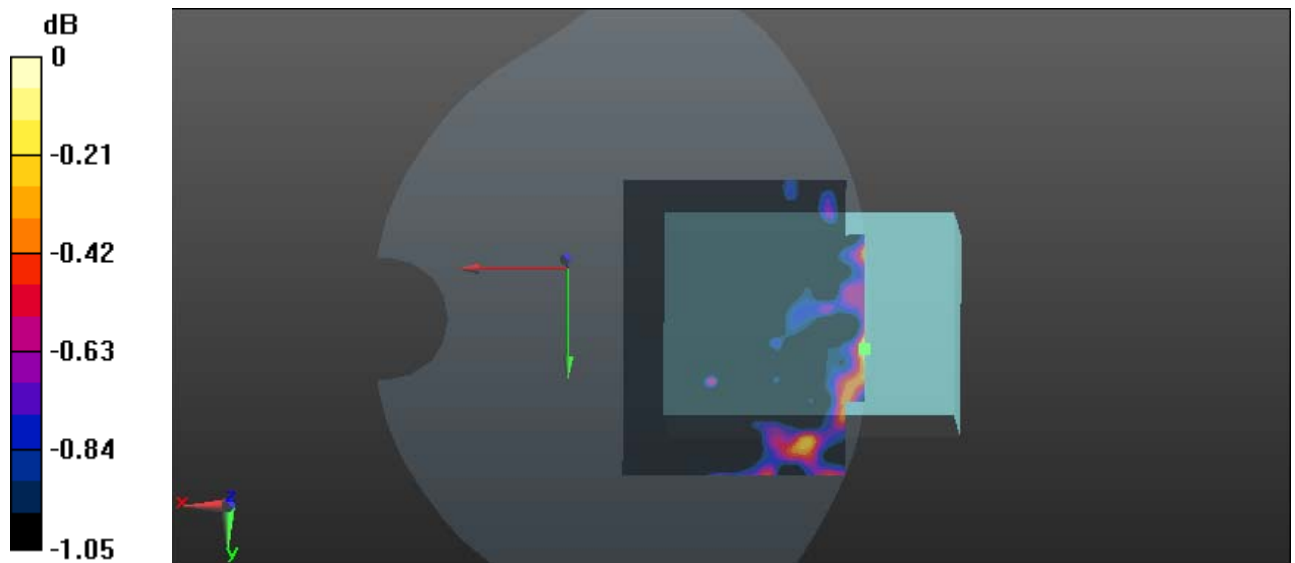

0 dB = 0.00622 W/kg = -22.06 dBW/kg

Test Plot 10#: Chain 0 Wi-Fi 5.3G _Front(Eye)_ Low**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.3 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.573$ S/m; $\epsilon_r = 36.844$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (191x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00542 W/kg

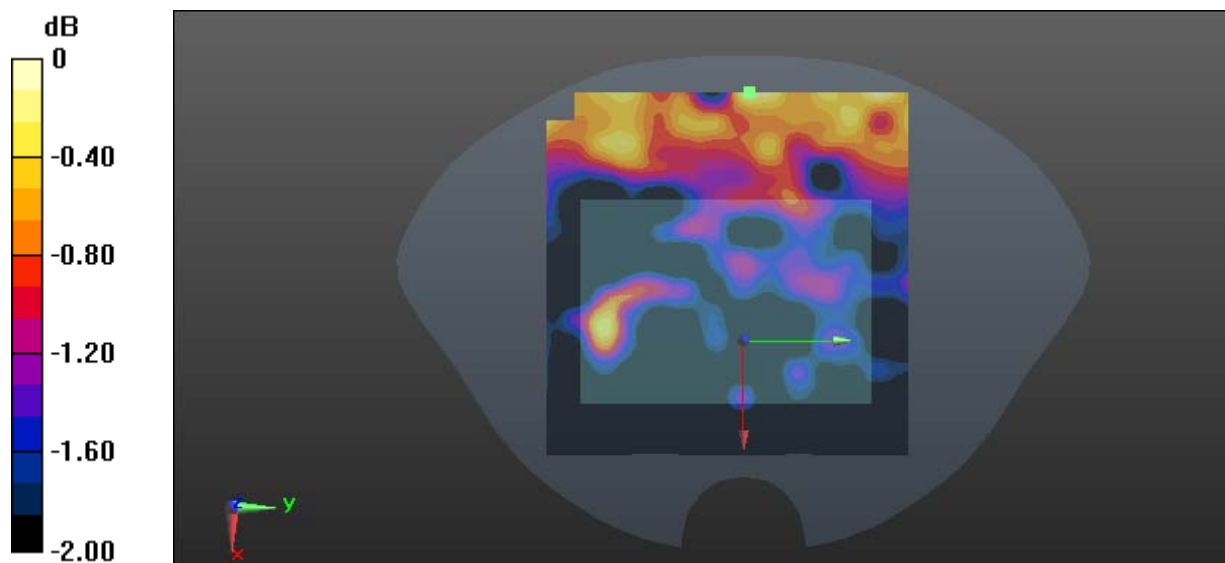

0 dB = 0.00542 W/kg = -22.66 dBW/kg

Test Plot 11#: Chain 1 Wi-Fi 5.3G _Front(Face)_ Low**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.3 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.573$ S/m; $\epsilon_r = 36.844$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x171x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00644 W/kg

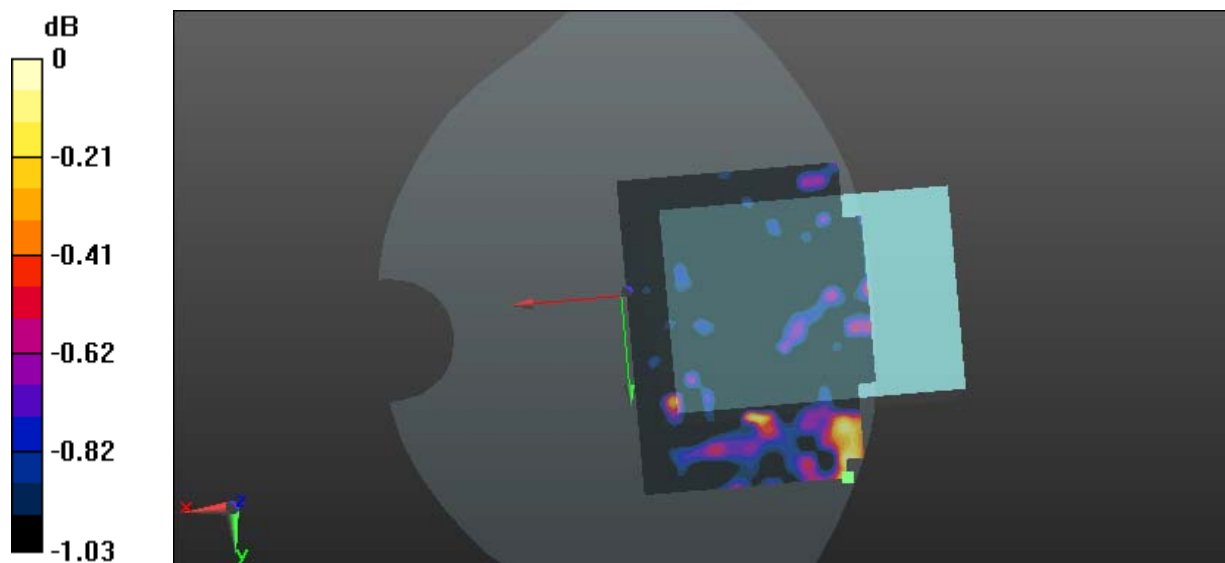

0 dB = 0.00644 W/kg = -21.91 dBW/kg

Test Plot 12#: Chain 1 Wi-Fi 5.3G _Front(Eye)_ Low**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.3 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.573$ S/m; $\epsilon_r = 36.844$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.44, 5.44, 5.44); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.0190 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 2.000 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.0061 W/kg; SAR(10 g) = 0.0054 W/kg

Maximum value of SAR (measured) = 0.00700 W/kg

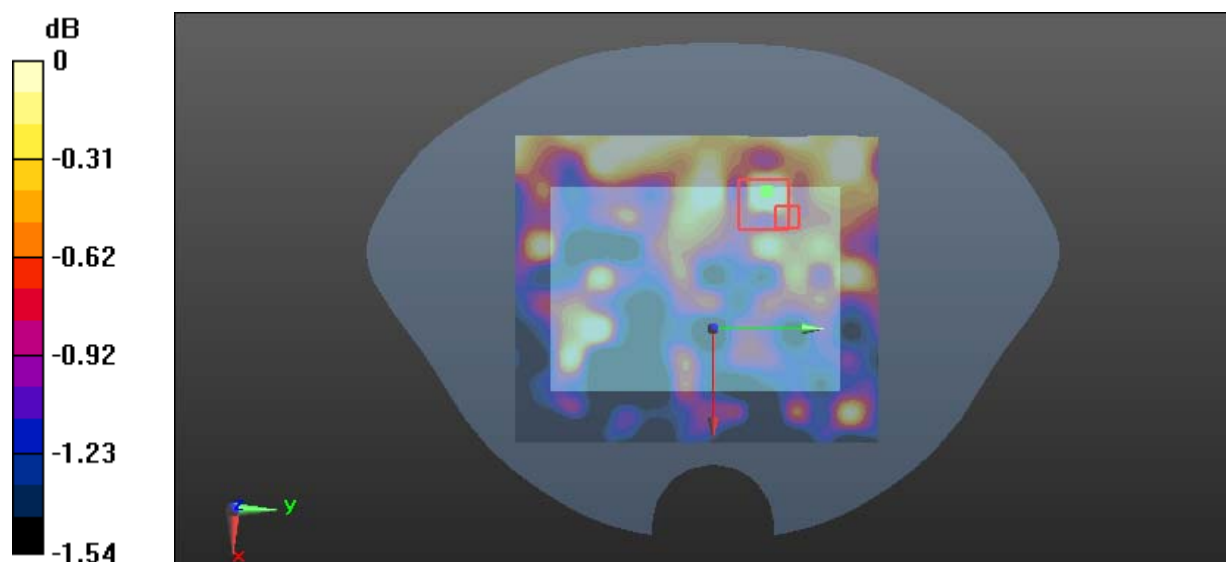

0 dB = 0.00700 W/kg = -21.55 dBW/kg

Test Plot 13#: Chain 0 Wi-Fi 5.6G _Front(Face)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.6 GHz; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.978$ S/m; $\epsilon_r = 35.883$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.8, 4.8, 4.8); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00298 W/kg

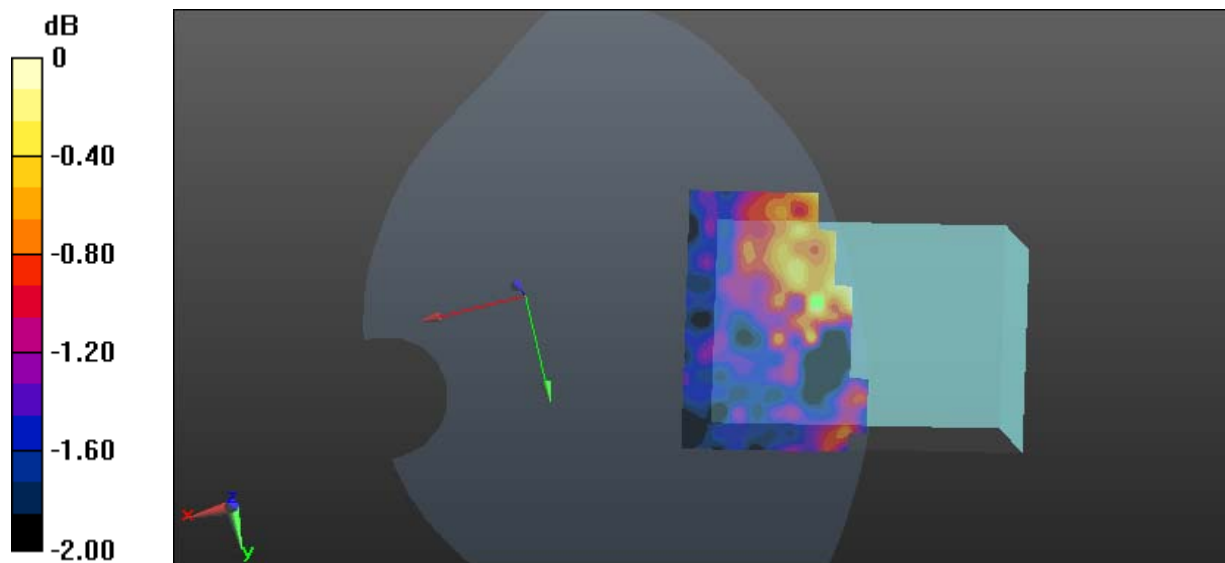

0 dB = 0.00298 W/kg = -25.26 dBW/kg

Test Plot 14#: Chain 0 Wi-Fi 5.6G _Front(Eye)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.6 GHz; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.978$ S/m; $\epsilon_r = 35.883$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.8, 4.8, 4.8); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00293 W/kg

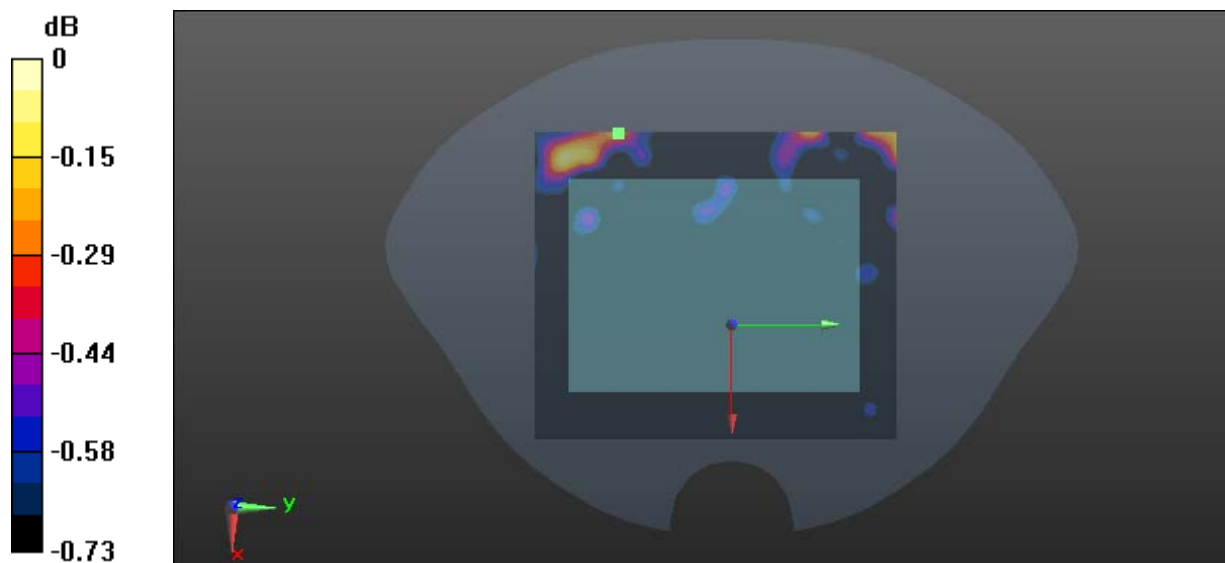 $0 \text{ dB} = 0.00293 \text{ W/kg} = -25.33 \text{ dBW/kg}$

Test Plot 15#: Chain 1 Wi-Fi 5.6G _Front(Face)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.6 GHz; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.978$ S/m; $\epsilon_r = 35.883$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.8, 4.8, 4.8); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x181x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00101 W/kg

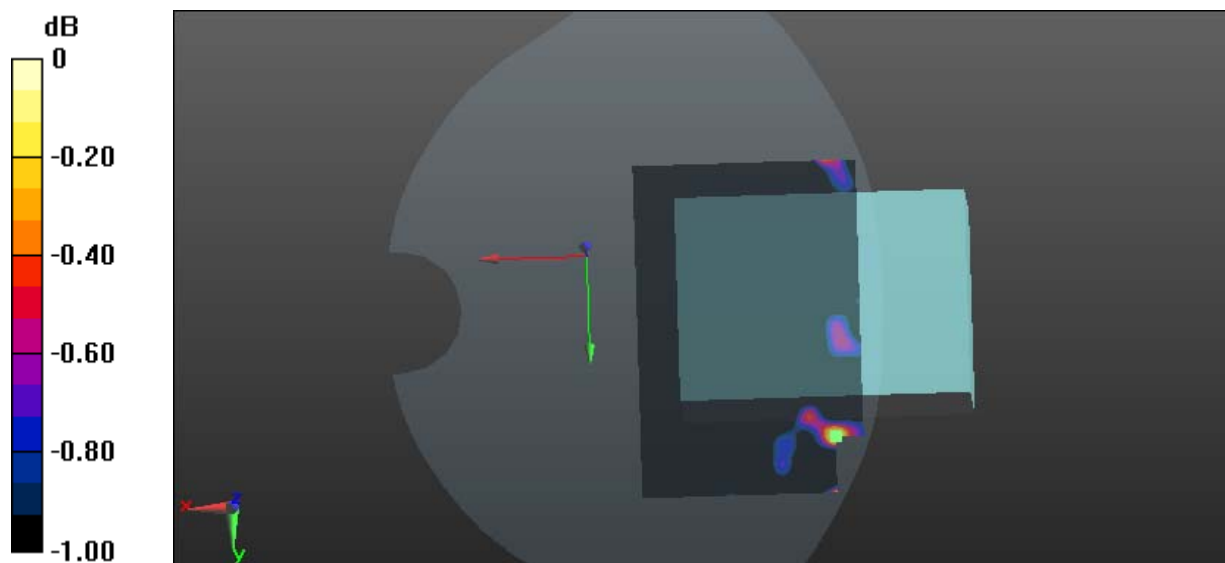

0 dB = 0.00101 W/kg = -29.96 dBW/kg

Test Plot 16#: Chain 1 Wi-Fi 5.6G _Front(Eye)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.6 GHz; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.978$ S/m; $\epsilon_r = 35.883$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.8, 4.8, 4.8); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00115 W/kg

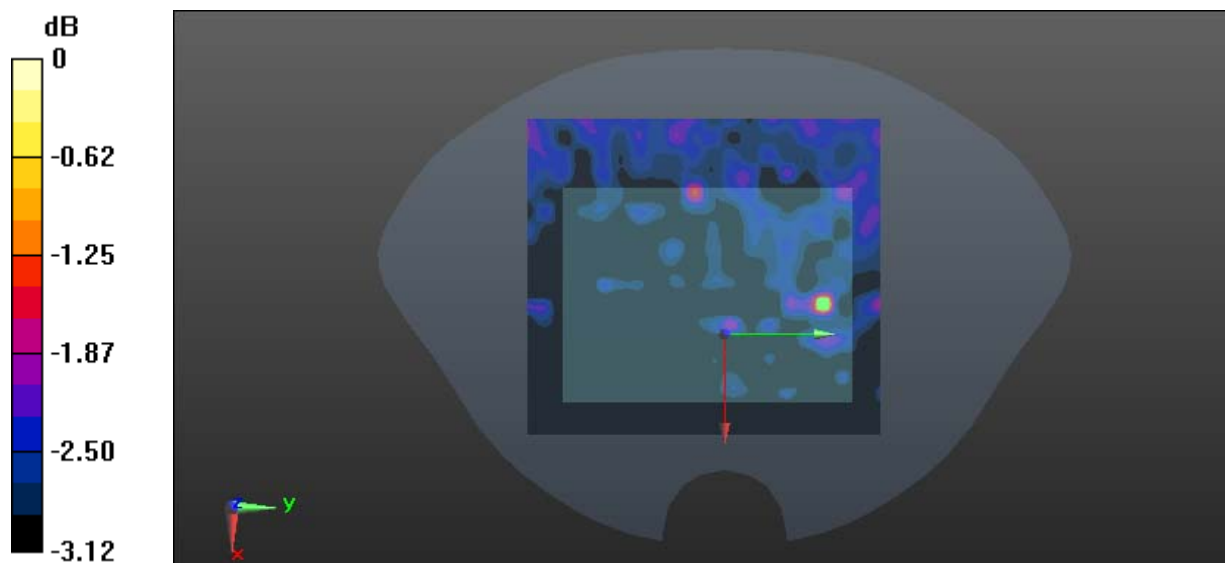 $0 \text{ dB} = 0.00115 \text{ W/kg} = -29.39 \text{ dBW/kg}$

Test Plot 17#: Chain 0 Wi-Fi 5.8G _Front(Face)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.166 \text{ S/m}$; $\epsilon_r = 35.741$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.15, 5.15, 5.15); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

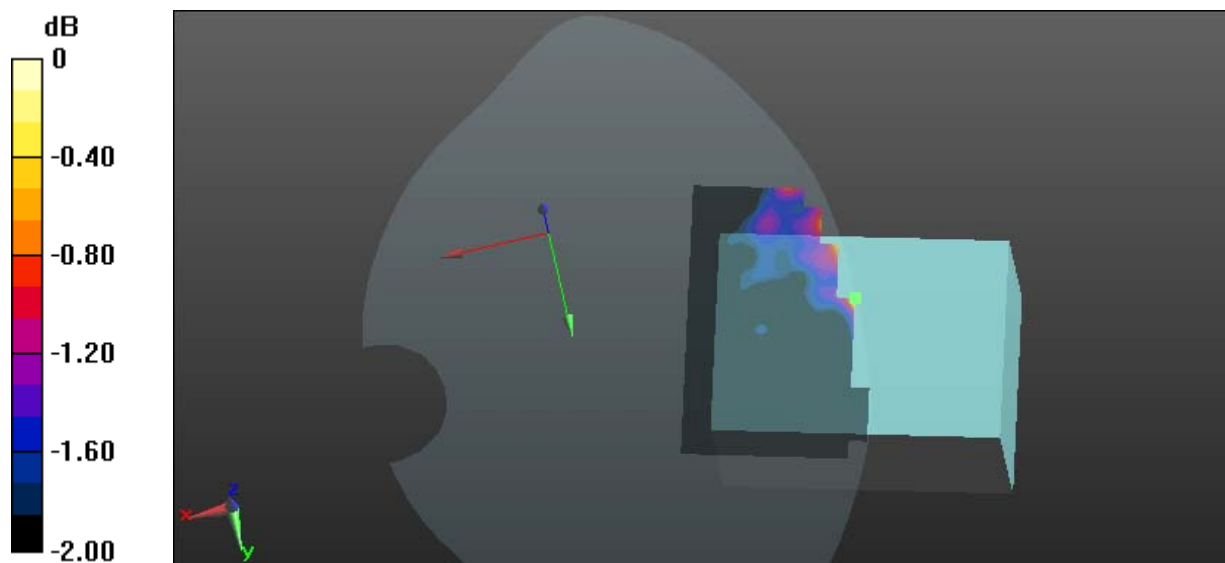Area Scan (101x151x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00456 W/kg  $0 \text{ dB} = 0.00456 \text{ W/kg} = -23.41 \text{ dBW/kg}$

Test Plot 18#: Chain 0 Wi-Fi 5.8G _Front(Eye)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.166 \text{ S/m}$; $\epsilon_r = 35.741$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.15, 5.15, 5.15); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

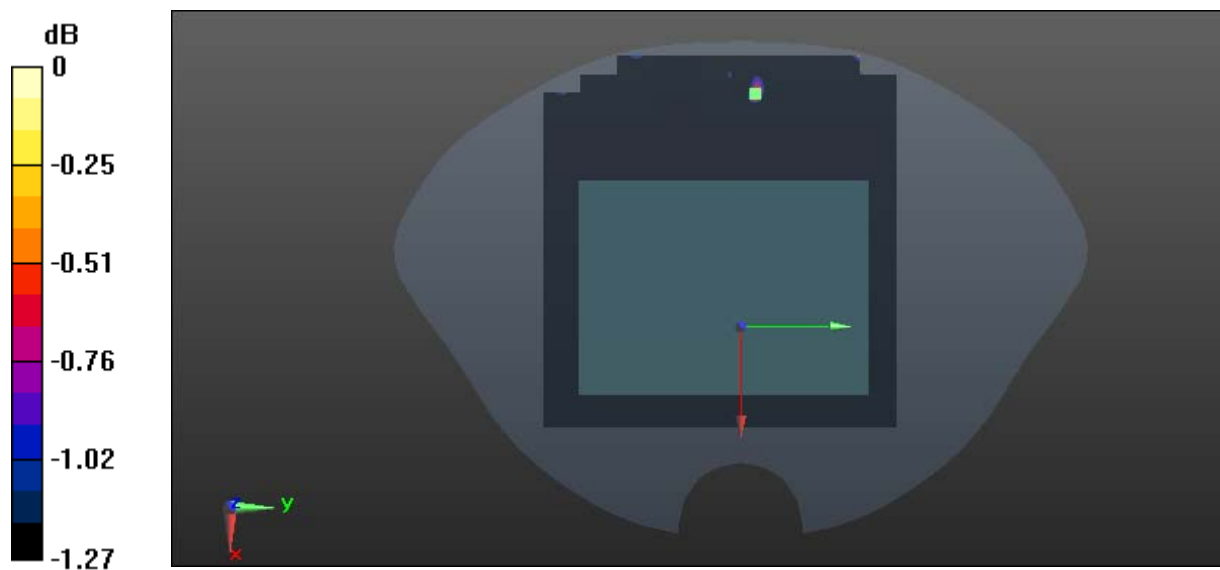Area Scan (211x191x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00160 W/kg 

Test Plot 19#: Chain 1 Wi-Fi 5.8G _Front(Face)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.166 \text{ S/m}$; $\epsilon_r = 35.741$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.15, 5.15, 5.15); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

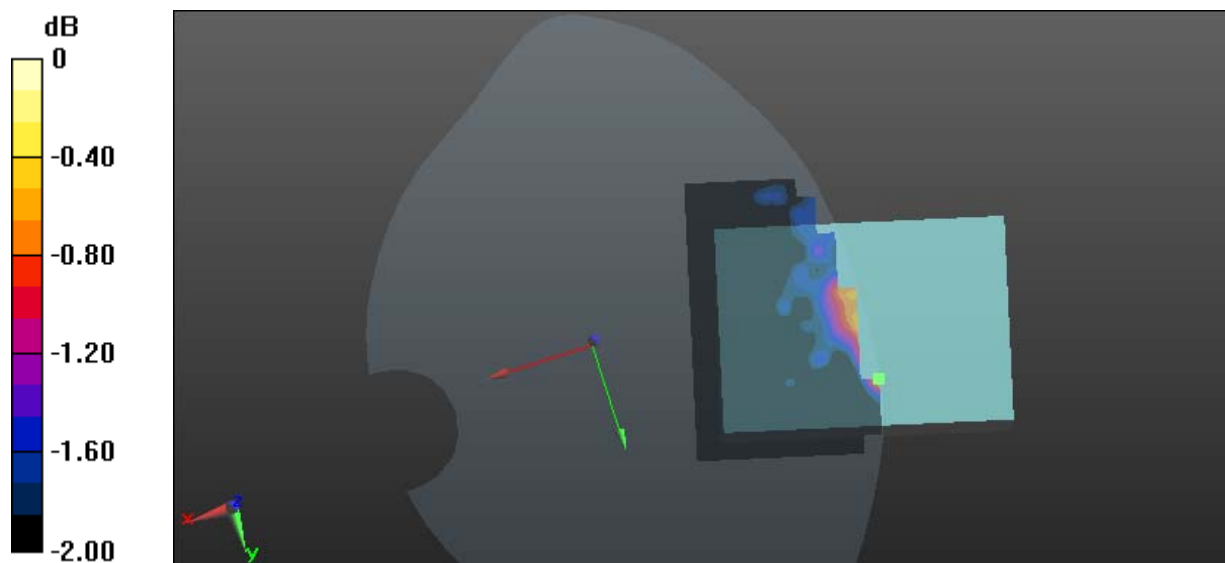Area Scan (101x151x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00174 W/kg  $0 \text{ dB} = 0.00174 \text{ W/kg} = -27.59 \text{ dBW/kg}$

Test Plot 20#: Chain 1 Wi-Fi 5.8G _Front(Eye)_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.166 \text{ S/m}$; $\epsilon_r = 35.741$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.15, 5.15, 5.15); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

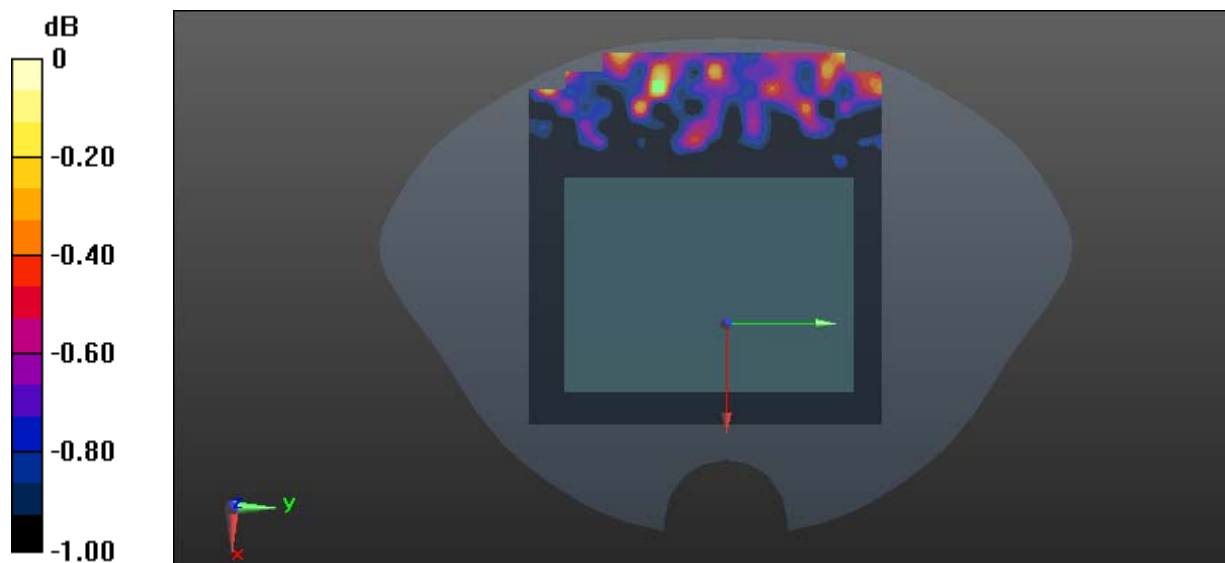Area Scan (211x191x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00160 W/kg  $0 \text{ dB} = 0.00160 \text{ W/kg} = -27.96 \text{ dBW/kg}$

Test Plot 21#: Chain 0 Wi-Fi 5.2G_Left_High**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.4$ S/m; $\epsilon_r = 50.081$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x181x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.0083 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 3.497 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.0080 W/kg; SAR(10 g) = 0.0072 W/kg

Maximum value of SAR (measured) = 0.00916 W/kg

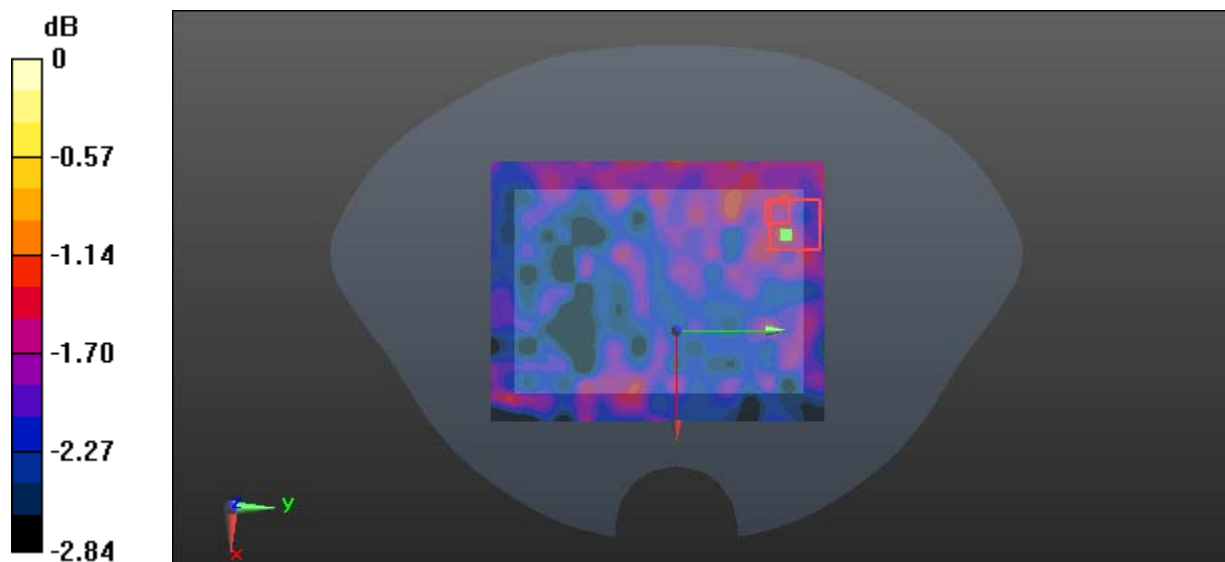

0 dB = 0.00916 W/kg = -20.38 dBW/kg

Test Plot 22#: Chain 0 Wi-Fi 5.2G_Right_High**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.4$ S/m; $\epsilon_r = 50.081$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.0116 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 3.541 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.0097 W/kg; SAR(10 g) = 0.0085 W/kg

Maximum value of SAR (measured) = 0.0120 W/kg

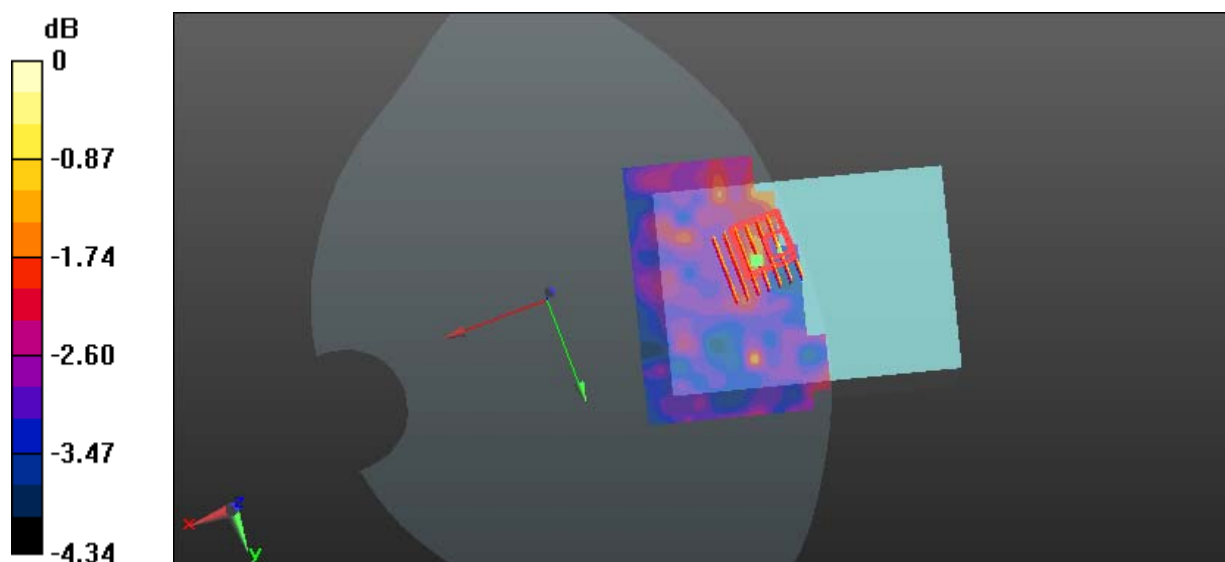

0 dB = 0.0120 W/kg = -19.21 dBW/kg

Test Plot 23#: Chain 0 Wi-Fi 5.3G_Left_Low**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.3 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.435$ S/m; $\epsilon_r = 49.763$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x191x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00290 W/kg

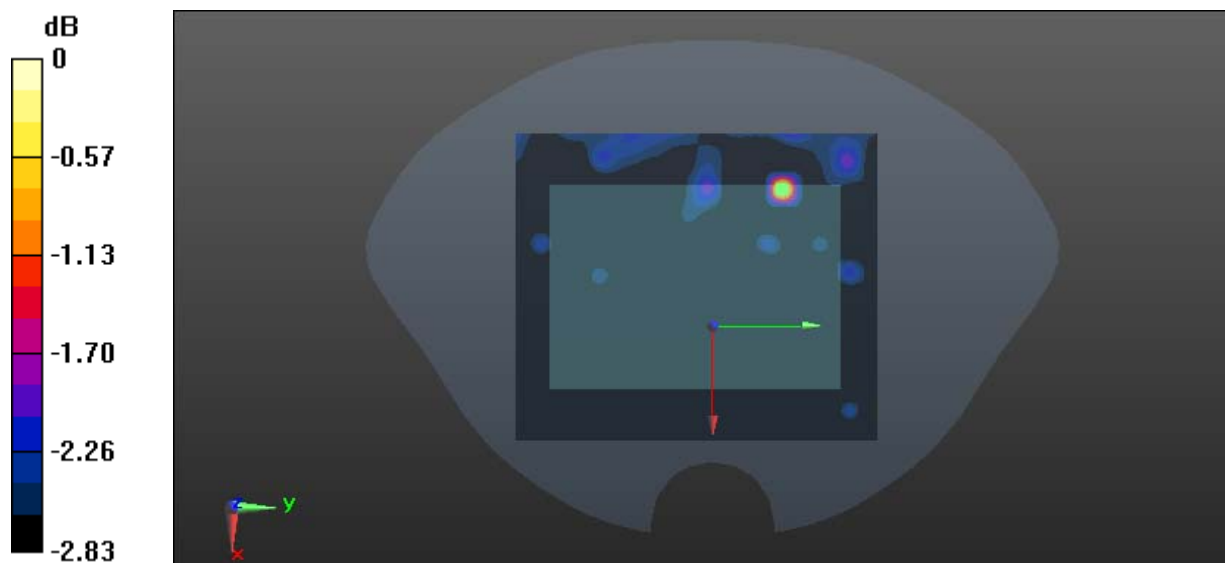 $0 \text{ dB} = 0.00290 \text{ W/kg} = -25.38 \text{ dBW/kg}$

Test Plot 24#: Chain 1 Wi-Fi 5.3G_Right_Low**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**

Communication System: IEEE 802.11ac WiFi 5.3 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.435$ S/m; $\epsilon_r = 49.763$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=0.8000$ mm, $dy=0.8000$ mm

Maximum value of SAR (interpolated) = 0.00305 W/kg

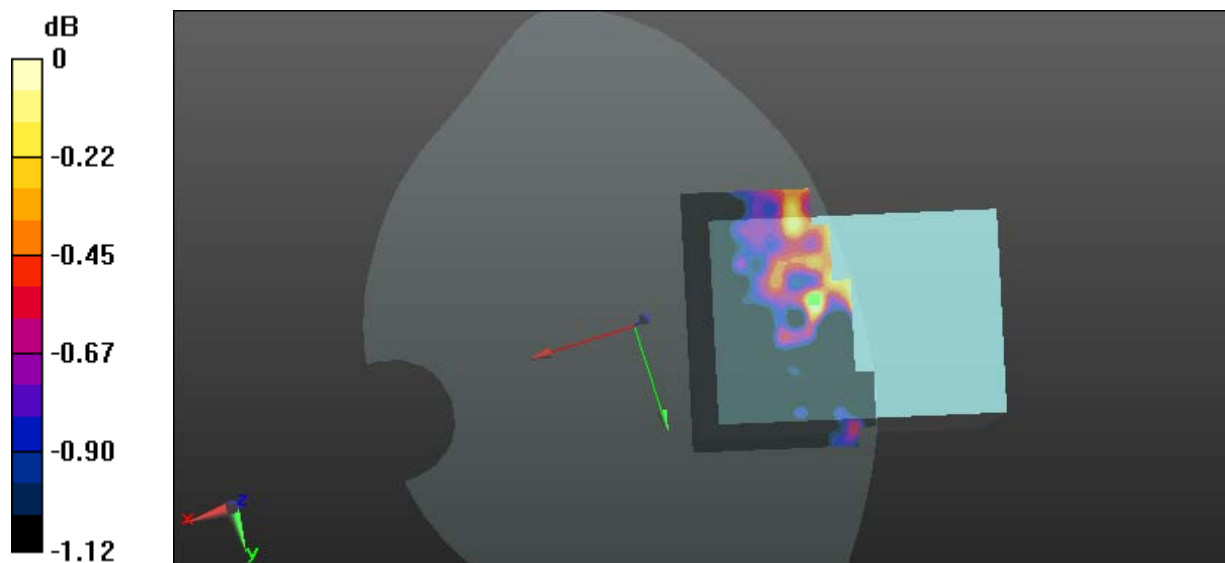 $0 \text{ dB} = 0.00305 \text{ W/kg} = -25.16 \text{ dBW/kg}$

Test Plot 25#: Chain 0 Wi-Fi 5.8G_Left_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.912 \text{ S/m}$; $\epsilon_r = 49.288$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.48, 4.48, 4.48); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

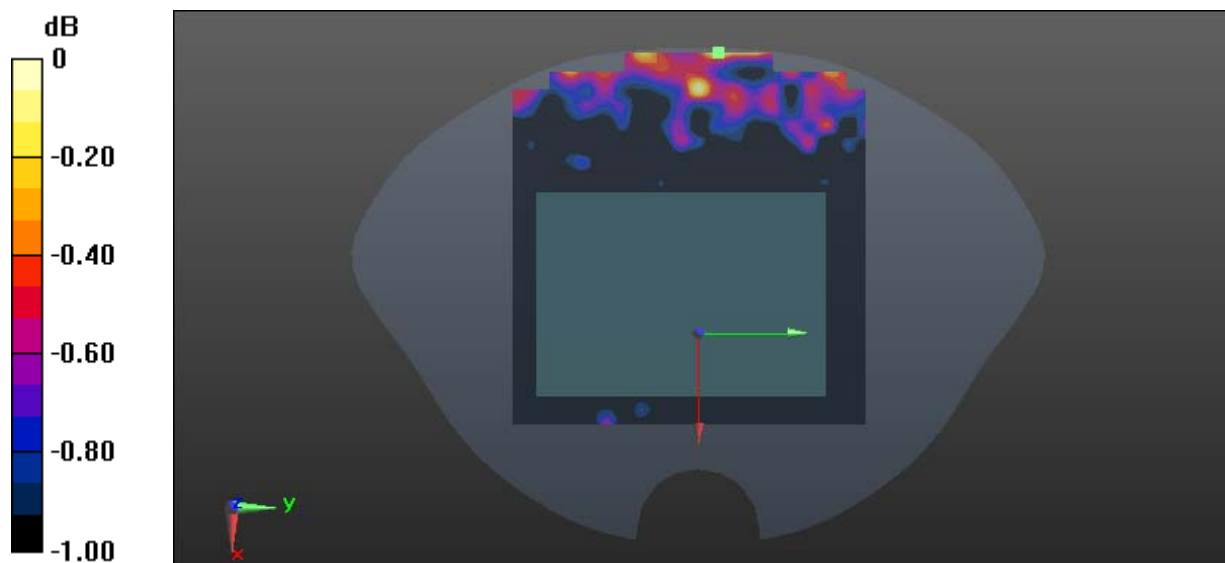Area Scan (211x191x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00166 W/kg  $0 \text{ dB} = 0.00166 \text{ W/kg} = -27.80 \text{ dBW/kg}$

Test Plot 26#: Chain 0 Wi-Fi 5.8G_Right_Middle**DUT: H6D Camera; Type: H6D-400c Ms; Serial: 17122700120**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.912 \text{ S/m}$; $\epsilon_r = 49.288$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.48, 4.48, 4.48); Calibrated: 2017/3/13;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

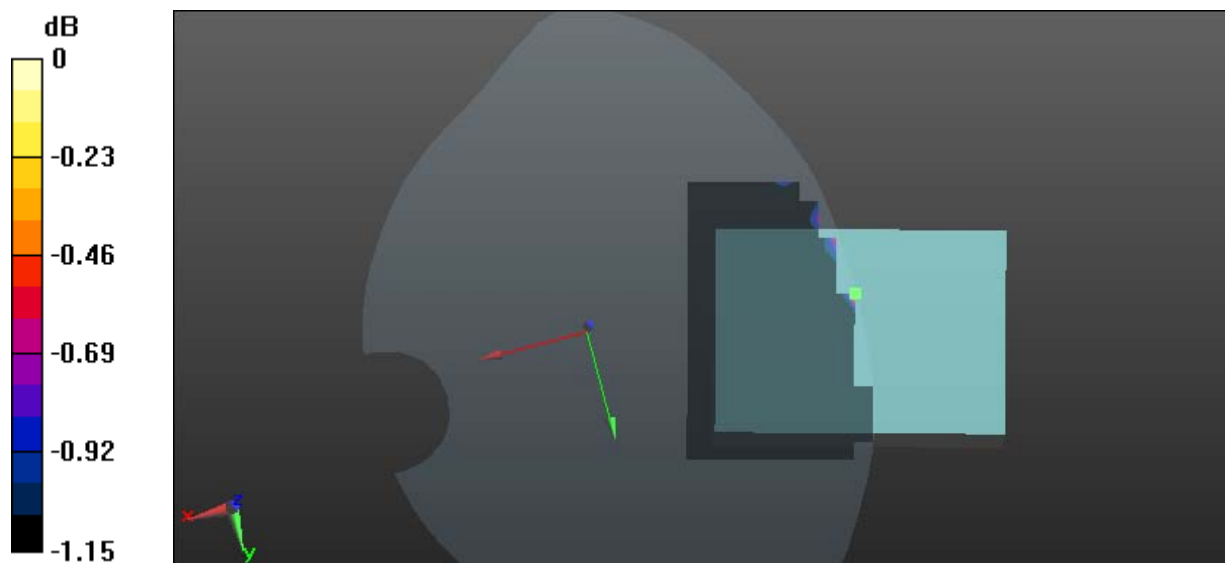Area Scan (101x151x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.00352 W/kg  $0 \text{ dB} = 0.00352 \text{ W/kg} = -24.53 \text{ dBW/kg}$