



TEST REPORT

Report No. : **CHTEW21070228** **Report verification:** 

Project No. : **SHT2104128004EW**

FCC ID : **2AY5M-E3PDA**

Applicant's name : **Fuzhou Soarfree Information Technology Co., Ltd.**

Address : Office 426, Floor 4, Building 3, Plot A1, Fuzhou Zhengrong Fortune Center, 28 Xinbao Road, Shangjie Town, Minhou County, Fuzhou, Fujian

Test item description : **New Mobile Computer**

Trade Mark : -

Model/Type reference : E3PDA

Listed Model(s) : -

Standard : **FCC 47 CFR Part 2.1093**
IEEE Std C95.1, 1999 Edition
IEEE 1528: 2013

Date of receipt of test sample : Jun. 22, 2021

Date of testing : Jun. 23, 2021- Jul. 29, 2021

Date of issue : Aug. 5, 2021

Result : **PASS**

Compiled by
(position+printedname+signature).... : File administrators: Silvia Li

Silvia Li

Supervised by
(position+printedname+signature).... : Test Engineer: Xiaodong Zhao

patrick. bin

Approved by
(position+printedname+signature).... : Manager: Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Statement of Compliance</u>	<u>4</u>
<u>2.</u>	<u>Test Standards and Report version</u>	<u>5</u>
2.1.	Test Standards	5
2.2.	Report version	5
<u>3.</u>	<u>Summary</u>	<u>6</u>
3.1.	Client Information	6
3.2.	Product Description	6
3.3.	RF Specification Description	6
3.4.	Testing Laboratory Information	9
3.5.	Environmental conditions	9
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>10</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>11</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>12</u>
6.1.	SAR Measurement Set-up	12
6.2.	DASY5 E-field Probe System	13
6.3.	Phantoms	14
6.4.	Device Holder	14
<u>7.</u>	<u>SAR Test Procedure</u>	<u>15</u>
7.1.	Scanning Procedure	15
7.2.	Data Storage and Evaluation	17
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>19</u>
8.1.	Head Position	19
8.2.	Body Position	20
8.3.	Hotspot Mode Exposure conditions	20
<u>9.</u>	<u>Dielectric Property Measurements & System Check</u>	<u>21</u>
9.1.	Tissue Dielectric Parameters	21
9.2.	System Check	23
<u>10.</u>	<u>SAR Exposure Limits</u>	<u>31</u>
<u>11.</u>	<u>Conducted Power Measurement Results</u>	<u>32</u>
11.1.	GSM	32
11.2.	LTE	33
11.3.	Wi-Fi	40
11.4.	2.4G module	42
11.5.	Bluetooth	42
<u>12.</u>	<u>Maximum Tune-up Limit</u>	<u>43</u>
<u>13.</u>	<u>Antenna Location</u>	<u>50</u>
<u>14.</u>	<u>Measured and Reported SAR Results</u>	<u>51</u>
14.1.	Head SAR	53
14.2.	Body SAR	65
14.3.	Hotspot SAR	71
<u>15.</u>	<u>SAR Measurement Variability</u>	<u>77</u>
<u>16.</u>	<u>Simultaneous Transmission analysis</u>	<u>78</u>
16.1.	Head	79
16.2.	Body-worn	85

16.3.	Hotspot	88
<u>17.</u>	<u>TestSetup Photos</u>	<u>92</u>
<u>18.</u>	<u>External and Internal Photos of the EUT</u>	<u>94</u>

1. Statement of Compliance

Maximum Reported SAR (W/kg @1g)				
RF Exposure Conditions	PCE	DTS	NII	Simultaneous TX
Head	0.535	0.234	0.077	0.754
Body-worn(Dist.= 10mm)	0.458	0.116	0.188	0.646
Hotspot(Dist.= 10mm)	0.458	0.116	0.188	0.646

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Test Standards and Report version

2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[648474 D04 Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

2.2. Report version

Revision No.	Date of issue	Description
N/A	2021-08-05	Original

3. Summary

3.1. Client Information

Applicant:	Fuzhou Soarfree Information Technology Co., Ltd.
Address:	Office 426, Floor 4,Building 3,Plot A1,Fuzhou Zhengrong Fortune Center,28 Xinbao Road,Shangjie Town,Minhou County,Fuzhou,Fujian
Manufacturer:	Fuzhou Soarfree Information Technology Co., Ltd.
Address:	Office 426, Floor 4,Building 3,Plot A1,Fuzhou Zhengrong Fortune Center,28 Xinbao Road,Shangjie Town,Minhou County,Fuzhou,Fujian

3.2. Product Description

Main unit	
Name of EUT:	New Mobile Computer
Trade Mark:	-
Model No.:	E3PDA
Listed Model(s):	-
Power supply:	DC 3.7V
Device Category:	Portable
Product stage:	Production unit
RF Exposure Environment:	General Population/Uncontrolled
HTW test sample No.:	YPHT21041280005
Hardware version:	7129S0_MMI_V02
Software version:	R107V200R001C01B011_SF01
Device Dimension:	Overall (Length x Width x Thickness):150 x 70 x25 mm

3.3. RF Specification Description

GSM	
Operation Band:	GSM850 PCS1900
Support Network:	GSM GPRS EGPRS
Operating Mode:	GSM:GMSK GPRS:GMSK EGPRS:8PSK
Device Class:	B
GPRS Multi-Slot Class:	12
EGPRS Multi-Slot Class:	12
Antenna Type:	PIFA Antenna
Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No	

LTE	
Operation Band:	FDD Band 5 TDD Band 38 TDD Band 41
Power Class:	Class 3
Operating Mode:	QPSK 16QAM
Antenna Type:	PIFA Antenna
Does this device support Carrier Aggregation (CA)? ☐ Yes ☒ No	
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No	
Wi-Fi 2.4G	
Operating Mode:	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Antenna Type:	PIFA Antenna
Does this device 2.4GHz Wi-Fi support hotspot operation? ☒ Yes ☐ No	
2.4G module	
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	IFA Antenna
Wi-Fi 5G	
Operation Band:	U-NII-1 U-NII-2A U-NII-3
Operating Mode:	802.11a 802.11n(HT20) 802.11n(HT40)
Antenna Type:	PIFA Antenna
Does this device 5GHz Wi-Fi support hotspot operation? ☐ Yes ☒ No	
Bluetooth	
Bluetooth version:	V4.0
Support function:	EDR
Operating Mode:	GFSK $\pi/4$ DQPSK 8DPSK
Antenna Type:	PIFA Antenna
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
Bluetooth	
Bluetooth version:	V4.0
Support function:	BLE
Operating Mode:	GFSK

Antenna Type:	PIFA Antenna
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
<i>Remark:</i> <i>1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power.</i>	

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEx	SPEAG	DAE4	1549	2021/03/23	2022/03/22
●	E-field Probe	SPEAG	EX3DV4	7494	2021/04/09	2022/04/08
●	Universal Radio Communication Tester	R&S	CMW500	137681	2021/05/27	2022/05/26
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2020/10/15	2021/10/14
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D450V3	1102	2021/01/20	2024/01/19
○	System Validation Dipole	SPEAG	D750V3	1180	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D835V2	4d238	2021/01/22	2024/01/21
○	System Validation Dipole	SPEAG	D1750V2	1164	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1900V2	5d226	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D2450V2	1009	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D2600V2	1150	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D5GHzV2	1273	2021/01/26	2024/01/25
●	Signal Generator	R&S	SMB100A	114360	2020/08/11	2021/08/10
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2020/08/11	2021/08/10
●	Power sensor	R&S	NRP18A	101386	2021/05/27	2022/05/26
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2020/11/12	2021/11/11
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2020/11/12	2021/11/11

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

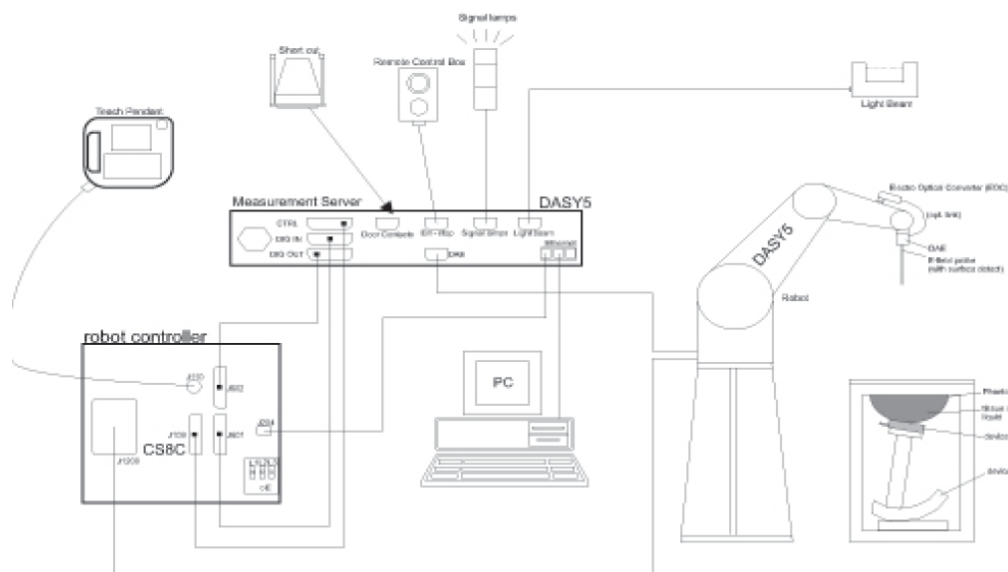

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

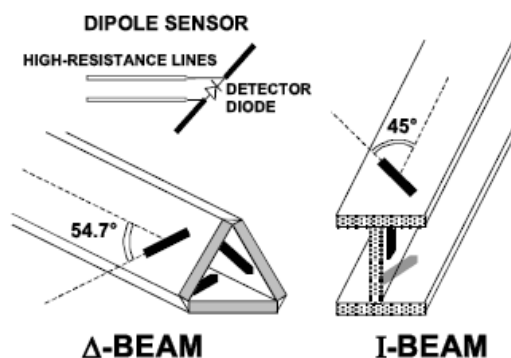

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM-Twin Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Resolutions per FCC KDB Publication 865664 D01v04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within $\pm 5 \%$.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom


8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


The vertical centreline passes through two points on the front side of the handset: the midpoint of the width W_t of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width W_b of the bottom of the handset (point B).

The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

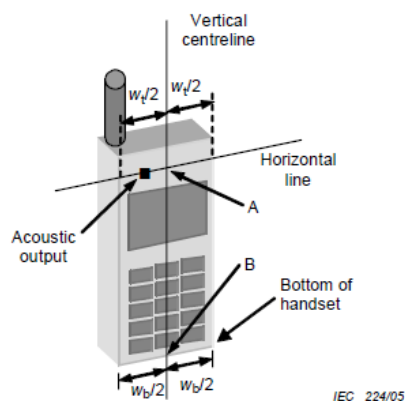


Figures 5a

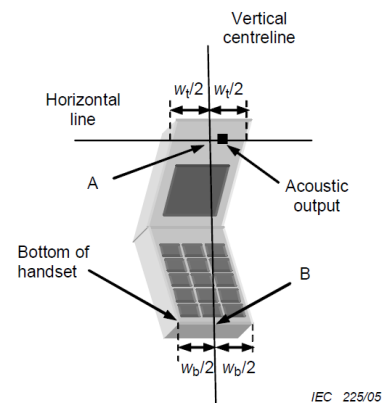

Figures 5b


W_t	Width of the handset at the level of the acoustic
W_b	Width of the bottom of the handset
A	Midpoint of the width w_t of the handset at the level of the acoustic output
B	Midpoint of the width w_b of the bottom of the handset

Cheek position

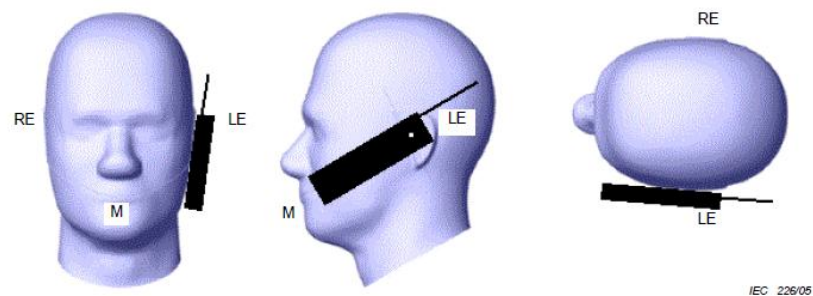

Picture 2 Cheek position of the wireless device on the left side of SAM

Tilt position

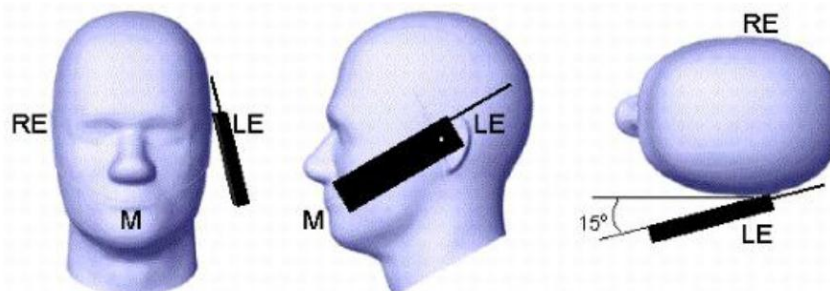


Picture 3 Tilt position of the wireless device on the left side of SAM

8.2. Body Position

Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics.


Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance $\leq 5\text{mm}$ to support compliance.

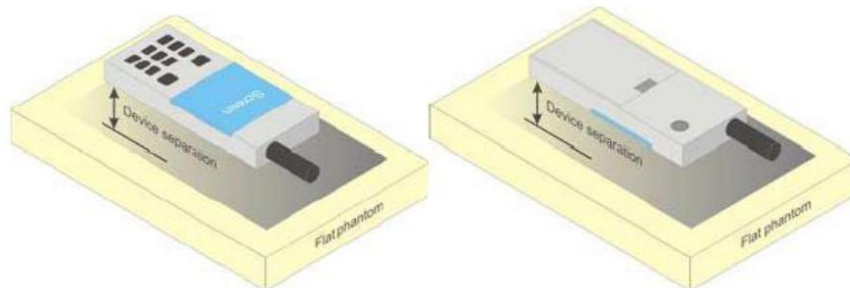

Picture 4 Test positions for body-worn devices

8.3. Hotspot Mode Exposure conditions

The hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either 10 mm or that used in the body-worn accessory configuration, whichever is less for devices with dimension $> 9\text{ cm} \times 5\text{ cm}$. For smaller devices with dimensions $\leq 9\text{ cm} \times 5\text{ cm}$ because of a greater potential for next to body use a test separation of $\leq 5\text{ mm}$ must be used.

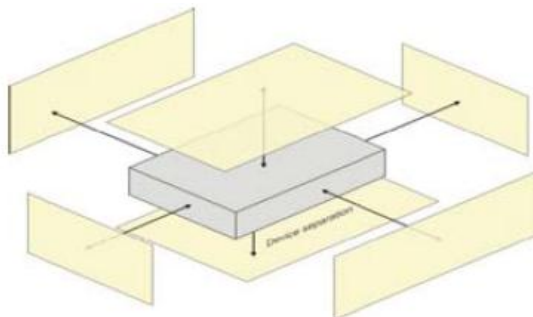

Picture 5 Test positions for Hotspot Mode

9. Dielectric Property Measurements & System Check

9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Tissue dielectric parameters for Head and Body				
Target Frequency (MHz)	Head		Body	
	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		$\sigma(\text{S/m})$		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
835	41.50	40.15	0.900	0.947	-3.25%	5.22%	±5%	22.3	2021/7/21
1900	40.00	38.37	1.400	1.460	-4.08%	4.29%	±5%	22.3	2021/7/21
2450	39.20	38.91	1.800	1.812	-0.74%	0.67%	±5%	22.2	2021/7/22
2600	39.00	38.68	1.960	1.918	-0.82%	-2.14%	±5%	22.2	2021/7/22
5250	35.93	34.66	4.706	4.549	-3.53%	-3.34%	±5%	22.0	2021/7/23
5750	35.36	33.95	5.219	5.038	-3.99%	-3.47%	±5%	22.0	2021/7/23

System Check Result:

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target.

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
835	9.39	10.16	2.54	6.14	6.44	1.61	8.20%	4.89%	$\pm 10\%$	22.3	2021/7/21
1900	39.80	42.80	10.70	20.30	21.88	5.47	7.54%	7.78%	$\pm 10\%$	22.3	2021/7/21
2450	52.00	56.00	14.00	23.90	25.64	6.41	7.69%	7.28%	$\pm 10\%$	22.2	2021/7/22
2600	56.50	59.20	14.80	25.00	26.64	6.66	4.78%	6.56%	$\pm 10\%$	22.2	2021/7/22

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 100mW	Target 1W	Normalize to 1W	Measured 100mW					
5250	78.20	80.50	8.05	22.30	23.50	2.35	2.94%	5.38%	$\pm 10\%$	22.0	2021/7/23
5750	79.30	86.00	8.60	22.50	24.20	2.42	8.45%	7.56%	$\pm 10\%$	22.0	2021/7/23

Plots of System Performance Check

System Performance Check-Head 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2021-07-21

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.947 \text{ S/m}$; $\epsilon_r = 40.145$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5°C ; Liquid Temperature: 22.3°C ;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 835 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.56 W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.89 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.20 W/kg

SAR(1 g) = 2.54 W/kg ; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.58 W/kg

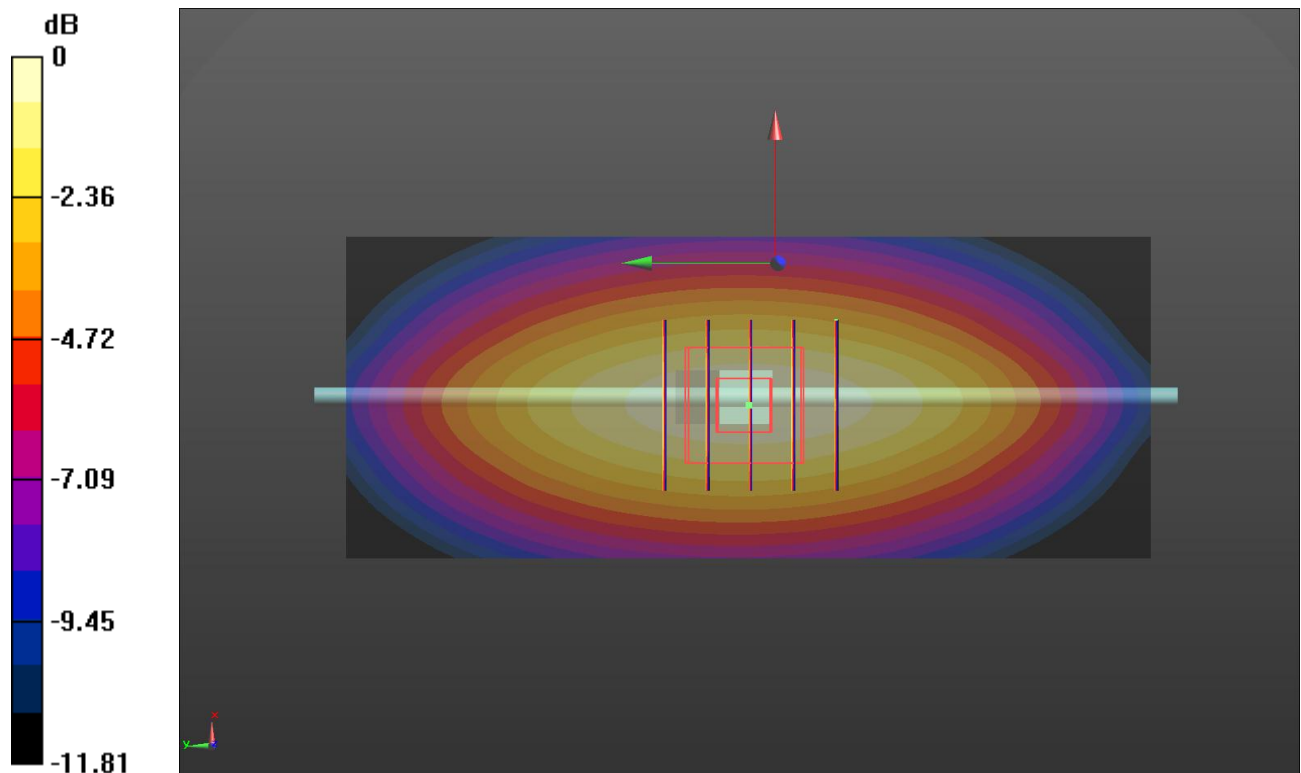

0 dB = 3.58 W/kg = 5.54 dBW/kg

System Performance Check-Head 1900MHz

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date: 2021-07-21

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 38.372$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 17.3 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 110.3 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 20.8 W/kg

SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.47 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

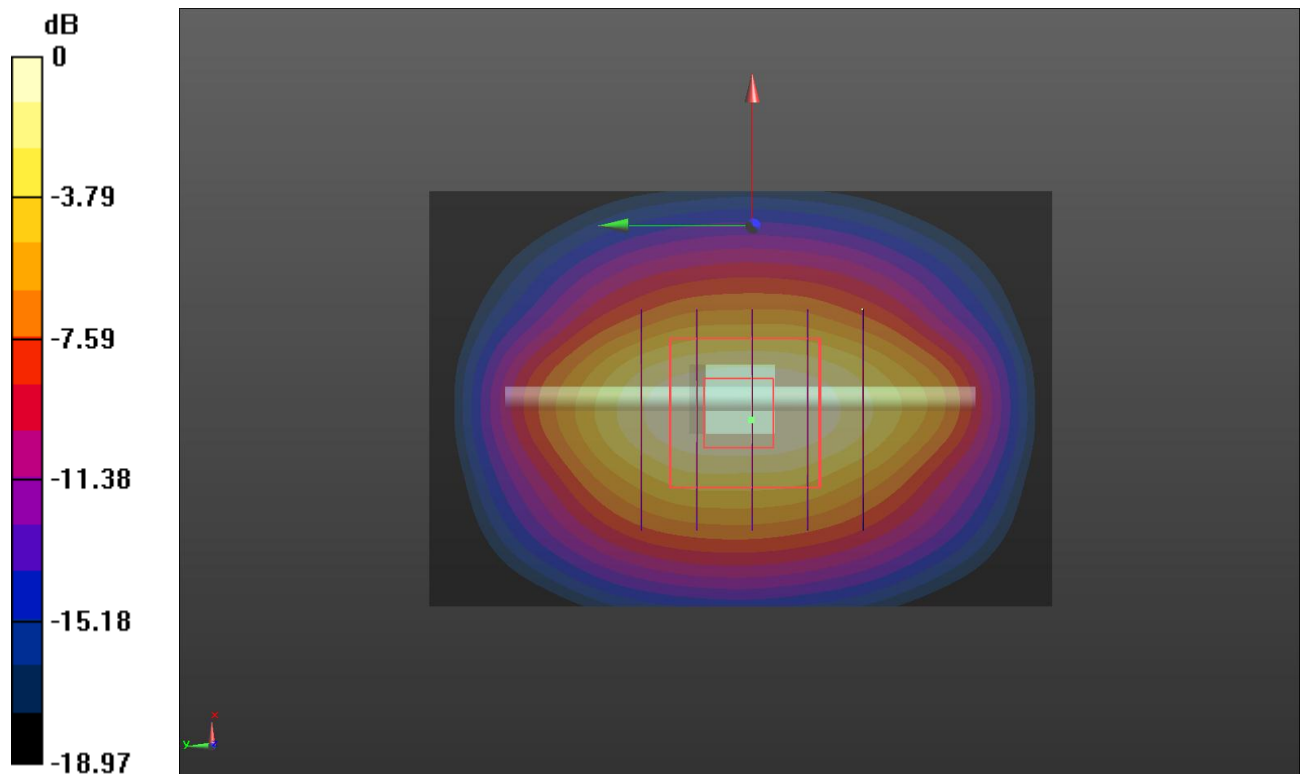

0 dB = 17.0 W/kg = 12.30 dBW/kg

SystemPerformanceCheck-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2021-07-22

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.812$ S/m; $\epsilon_r = 38.91$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2450 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 24.8 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.9 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.41 W/kg

Maximum value of SAR (measured) = 23.8 W/kg

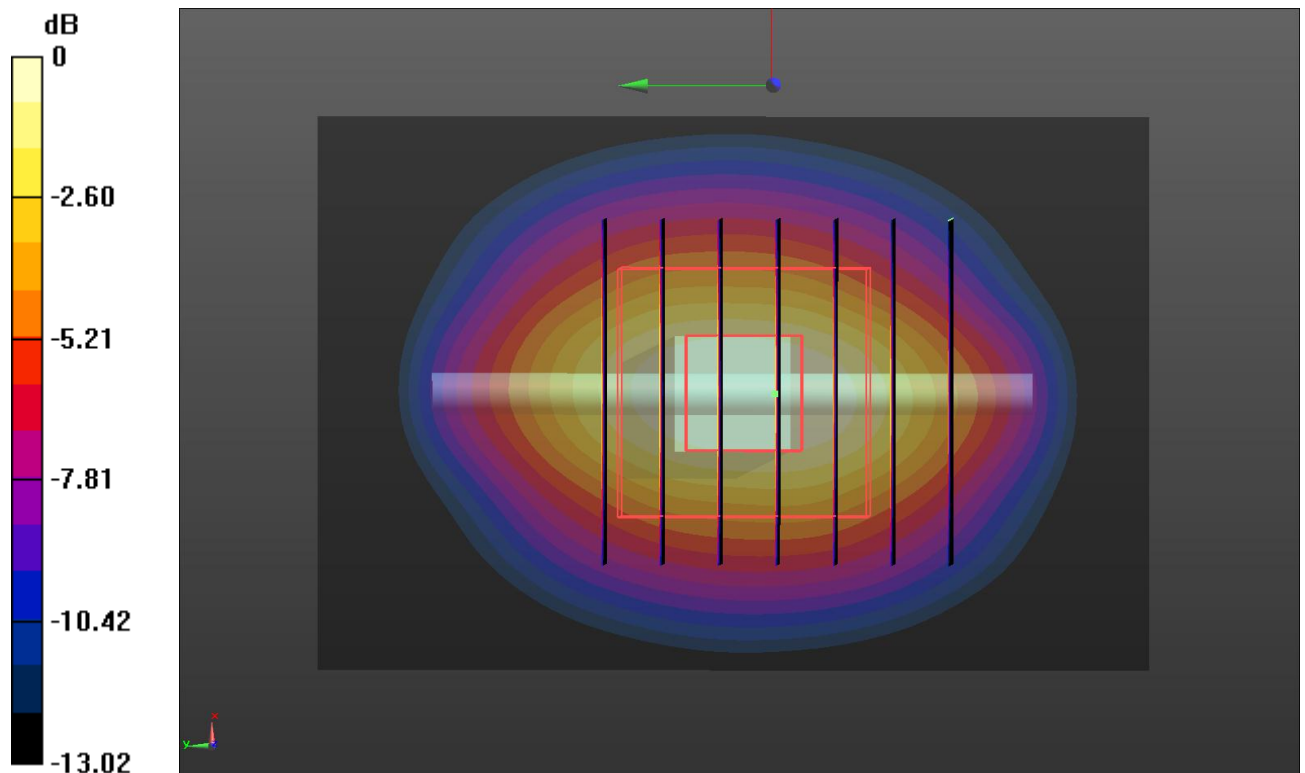

0 dB = 23.8 W/kg = 13.77 dBW/kg

SystemPerformanceCheck-Head 2600MHz

DUT: D2600V2; Type: D2600V2; Serial: 1150

Date: 2021-07-22

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.918$ S/m; $\epsilon_r = 38.679$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C; Liquid Temperature: 22.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.68, 7.68, 7.68) @ 2600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm,Pin=250mW/Area Scan (41x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 27.2 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 14.8 W/kg; SAR(10 g) = 6.66 W/kg

Maximum value of SAR (measured) = 25.4 W/kg

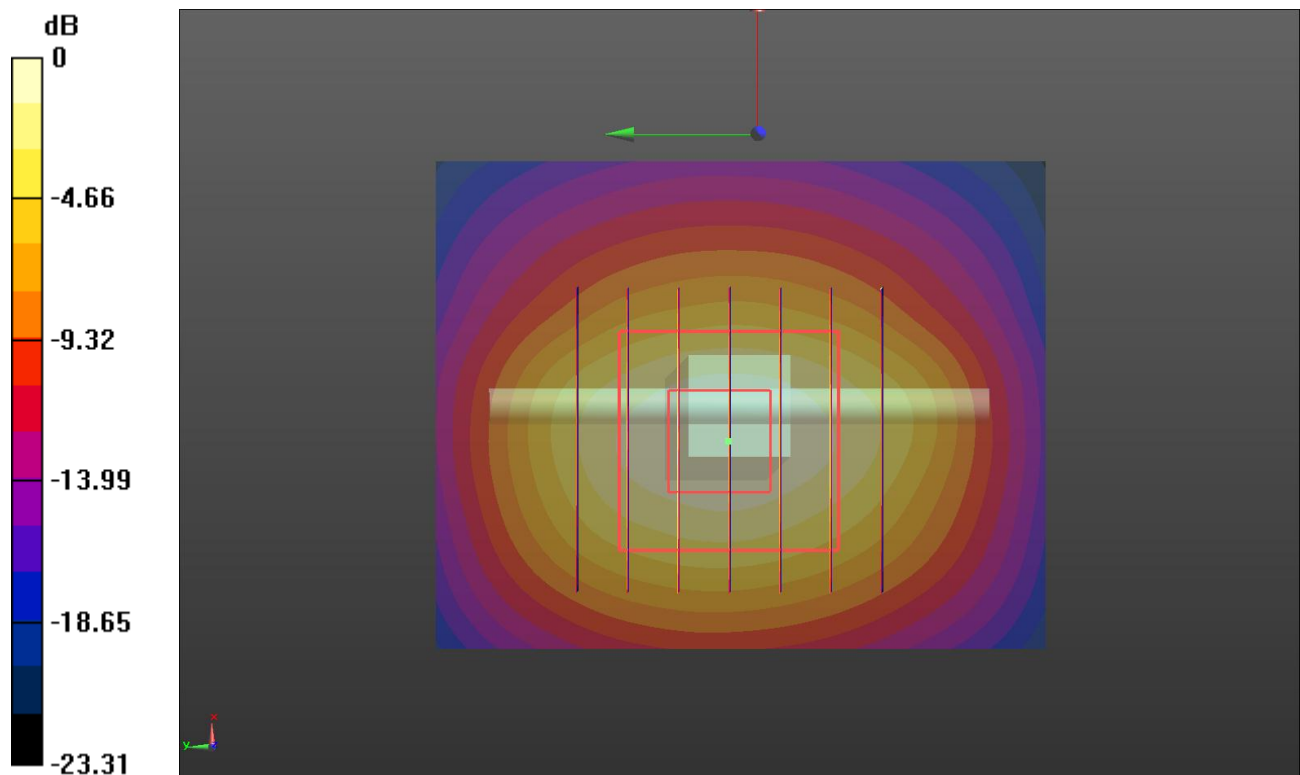

0 dB = 25.4 W/kg = 14.05 dBW/kg

SystemPerformanceCheck-Head 5250MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-07-23

Communication System: UID 0, Generic WIFI (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.549$ S/m; $\epsilon_r = 34.665$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C; Liquid Temperature: 22.1°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(5.65, 5.65, 5.65) @ 5250 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, pin=100mW/Area Scan (31x31x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.4 W/kg


Head/d=10mm, pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.89 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

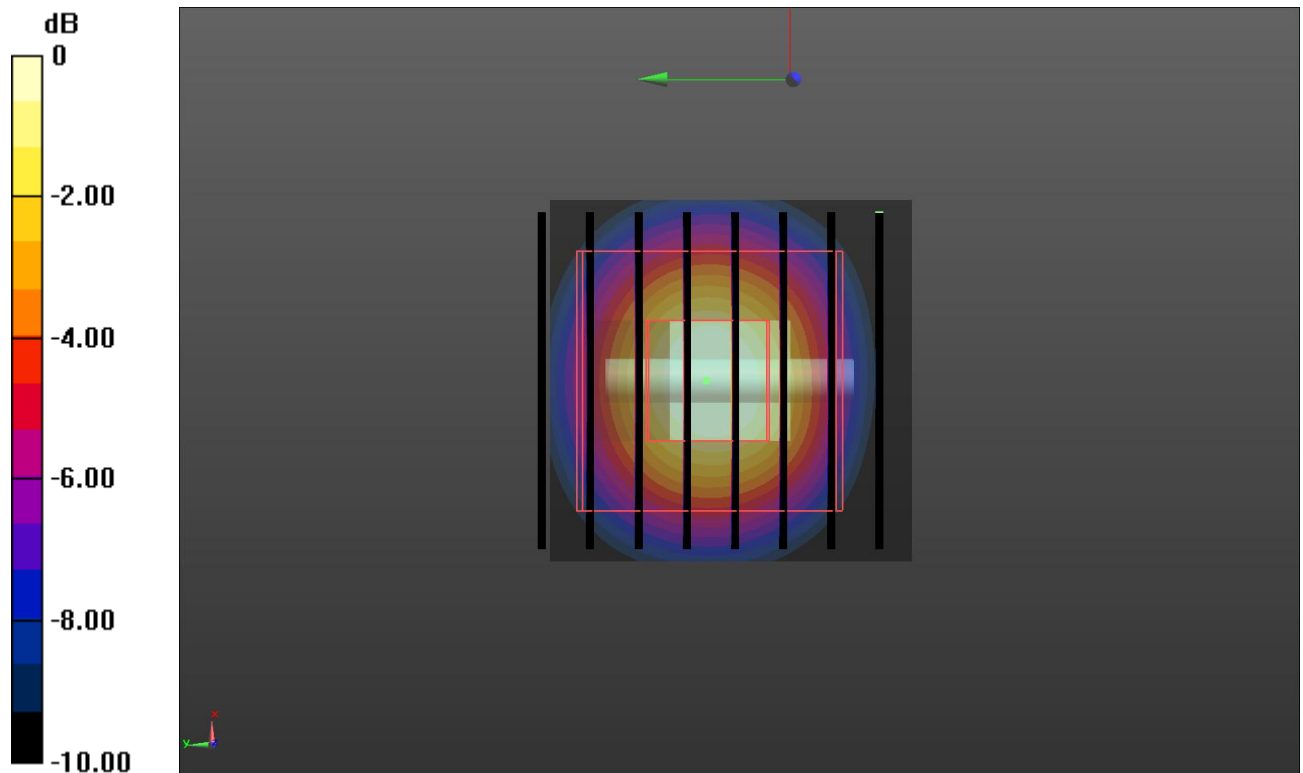

0 dB = 18.9 W/kg = 12.76 dBW/kg

SystemPerformanceCheck-Head 5750MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-07-23

Communication System: UID 0, Generic WIFI (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.038 \text{ S/m}$; $\epsilon_r = 33.95$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.1°C; Liquid Temperature: 21.9°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.86, 4.86, 4.86) @ 5750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW/Area Scan (41x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 27.3 W/kg


Head/d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 76.54 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 38.3 W/kg

SAR(1 g) = 8.6 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

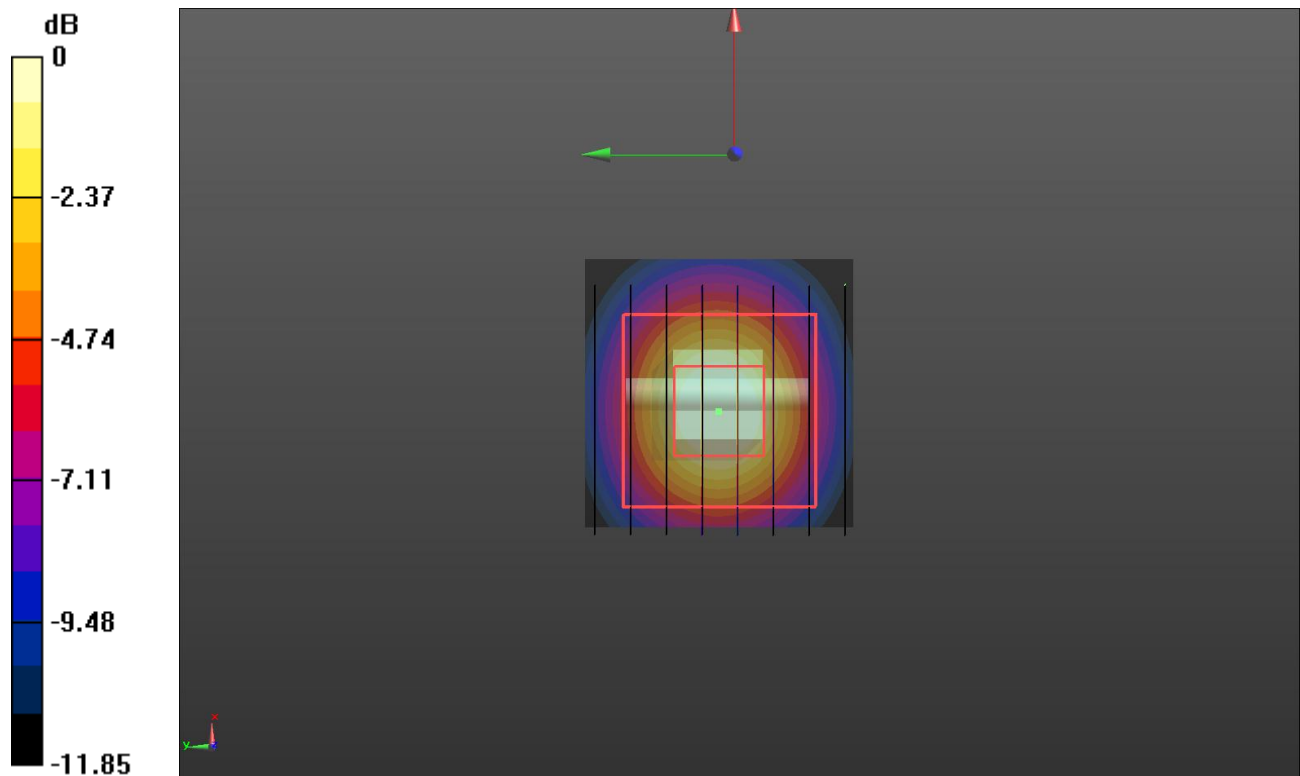

0 dB = 22.4 W/kg = 13.50 dBW/kg

10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population/ Uncontrolled Exposure Environment	Occupational/ Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

11. Conducted Power Measurement Results

11.1. GSM

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and further SAR test reduction.
2. Per KDB 941225 D01, considering the possibility of e.g. 3rd party VoIP operation for Head and Body-worn SAR test reduction for GSM and GPRS modes is determined by the source-base time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Per KDB941225 D01, for hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Mode: GSM850		Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
		CH128	CH190	CH251		CH128	CH190	CH251
		824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM Voice		32.68	32.64	32.84	-9.03	23.65	23.61	23.81
GPRS (GMSK)	1TXslot	32.72	32.58	32.62	-9.03	23.69	23.55	23.59
	2TXslots	32.05	31.82	31.89	-6.02	26.03	25.80	25.87
	3TXslots	30.44	30.30	30.46	-4.26	26.18	26.04	26.20
	4TXslots	28.90	28.77	28.92	-3.01	25.89	25.76	25.91
EGPRS (8PSK)	1TXslot	26.46	25.75	25.75	-9.03	17.43	16.72	16.72
	2TXslots	25.21	25.07	25.03	-6.02	19.19	19.05	19.01
	3TXslots	23.48	22.71	23.39	-4.26	19.22	18.45	19.13
	4TXslots	23.20	21.48	22.59	-3.01	20.19	18.47	19.58
Mode: PCS1900		Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
		CH512	CH661	CH810		CH512	CH661	CH810
		1850.2MHz	1880MHz	1909.8MHz		1850.2MHz	1880MHz	1909.8MHz
GSM Voice		30.84	31.01	30.96	-9.03	21.81	21.98	21.93
GPRS (GMSK)	1TXslot	30.84	30.94	30.91	-9.03	21.81	21.91	21.88
	2TXslots	30.25	30.41	30.37	-6.02	24.23	24.39	24.35
	3TXslots	28.69	28.91	28.88	-4.26	24.43	24.65	24.62
	4TXslots	27.19	27.40	27.39	-3.01	24.18	24.39	24.38
EGPRS (8PSK)	1TXslot	26.26	25.47	26.02	-9.03	17.23	16.44	16.99
	2TXslots	25.12	24.68	24.75	-6.02	19.10	18.66	18.73
	3TXslots	23.15	22.86	22.55	-4.26	18.89	18.60	18.29
	4TXslots	21.65	21.45	21.44	-3.01	18.64	18.44	18.43

Note:

1) Division Factors

To Frame-Average Power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> Burst Average Power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/4) => -3.01dB

11.2. LTE

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
 - LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
 - LTE Band 5 (824-849 MHz) is covered by LTE Band 26 (814-849 MHz)
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20407	20525	20643
				8.4.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	22.93	23.03	22.85
			2	23.01	23.03	22.80
			5	22.91	22.99	22.73
		3	0	23.02	23.13	22.93
			1	23.01	23.12	22.93
			3	23.00	23.08	22.84
		6	0	21.96	22.03	21.82
	16QAM	1	0	22.06	22.20	22.02
			2	22.21	22.26	22.02
			5	22.06	22.19	21.88
		3	0	21.93	22.06	21.86
			1	21.92	22.05	21.86
			3	21.91	22.03	21.76
		6	0	20.99	21.11	20.90
Band-width	Modulation	RB allocation	RB offset	20415	20525	20635
				825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	22.78	22.90	22.92
			8	22.82	22.96	22.82
			14	22.78	22.96	22.66
		8	0	21.87	21.97	22.02
			4	21.87	21.96	22.02
			7	21.89	21.98	21.83
		15	0	21.88	21.96	21.90
	16QAM	1	0	21.97	22.10	22.13
			8	21.99	22.15	22.01
			14	21.93	22.11	21.84
		8	0	20.93	21.04	21.09
			4	20.94	21.03	21.09
			7	20.96	21.03	20.90
		15	0	20.91	20.92	20.94

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20425	20525	20625
				826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	22.92	23.02	23.17
			12	22.97	23.07	23.07
			24	22.89	23.09	22.78
		12	0	21.96	22.07	22.14
			7	21.95	22.06	22.15
			13	21.93	22.08	21.96
		25	0	21.89	22.03	21.99
	16QAM	1	0	21.94	22.27	22.16
			12	21.95	22.33	22.08
			24	21.91	22.28	21.82
		12	0	20.98	21.15	21.18
			7	20.97	21.14	21.18
			13	20.99	21.16	20.99
		25	0	20.92	21.04	21.05
Band-width	Modulation	RB allocation	RB offset	20450	20525	20600
				829MHz	836.5MHz	844MHz
10MHz	QPSK	1	0	22.16	23.01	23.11
			24	22.08	22.99	23.07
			49	21.82	23.06	22.77
		25	0	21.18	22.03	22.18
			24	21.18	22.00	22.16
			49	20.99	22.13	22.07
		50	0	21.05	22.08	22.12
	16QAM	1	0	22.07	22.21	22.33
			24	22.03	22.24	22.27
			49	22.18	22.28	21.99
		25	0	20.96	21.09	21.16
			24	20.96	21.10	21.15
			49	21.04	21.19	21.07
		50	0	20.99	21.13	21.13

LTE-TDD Band 38				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	37775	38000	38225
				2572.5MHz	2595MHz	2617.5MHz
5MHz	QPSK	1	0	22.38	22.82	22.72
			12	22.44	22.96	22.65
			24	22.52	22.95	22.51
		12	0	22.44	21.84	21.66
			7	22.44	21.85	21.66
			13	22.44	21.99	21.56
		25	0	22.38	21.83	21.54
	16QAM	1	0	22.39	22.01	21.71
			12	22.45	22.13	21.64
			24	22.44	22.14	21.53
		12	0	21.40	20.87	20.66
			7	21.38	20.86	20.65
			13	21.42	20.93	20.56
		25	0	21.37	20.90	20.56
Band-width	Modulation	RB allocation	RB offset	37800	38000	38200
				2575MHz	2595MHz	2615MHz
10MHz	QPSK	1	0	23.47	22.86	22.92
			24	23.56	23.07	22.75
			49	23.19	23.14	22.64
		25	0	22.49	21.82	21.77
			24	22.49	21.83	21.78
			49	22.32	22.04	21.68
		50	0	22.42	22.02	21.72
	16QAM	1	0	22.67	21.93	22.72
			24	22.72	22.04	22.64
			49	22.30	22.17	22.58
		25	0	21.44	20.75	20.69
			24	21.45	20.77	20.69
			49	21.26	20.99	20.70
		50	0	21.37	20.89	20.71

LTE-TDD Band 38				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	37825	38000	38175
				2577.5MHz	2595MHz	2612.5MHz
15MHz	QPSK	1	0	23.58	22.91	23.14
			38	23.40	23.13	22.93
			74	22.99	23.20	22.74
		38	0	22.75	22.15	22.05
			18	22.55	22.27	22.81
			37	22.19	22.36	22.64
		75	0	22.43	22.07	21.94
	16QAM	1	0	22.74	22.14	22.06
			38	22.55	22.27	22.81
			74	22.18	22.37	22.63
		38	0	22.77	22.15	22.05
			18	22.56	22.27	22.58
			37	22.19	22.38	22.76
		75	0	21.32	21.02	20.86
Band-width	Modulation	RB allocation	RB offset	37850	38000	38150
				2580MHz	2595MHz	2610MHz
20MHz	QPSK	1	0	23.68	23.19	23.22
			49	23.22	23.25	22.97
			99	22.91	23.29	22.74
		50	0	22.52	21.93	22.05
			25	22.52	21.92	22.06
			50	22.00	22.15	21.81
		100	0	22.24	22.01	21.95
	16QAM	1	0	22.78	22.35	22.20
			49	22.27	22.41	22.84
			99	22.51	22.47	22.70
		50	0	21.47	20.90	21.07
			25	21.47	20.90	21.07
			50	20.94	21.11	20.73
		100	0	21.20	20.97	20.89

LTE-TDD Band 41				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	40265	40740	41215
				2557.5MHz	2605MHz	2652.5MHz
5MHz	QPSK	1	0	23.34	23.15	22.56
			12	23.42	23.07	22.53
			24	23.42	22.97	22.45
		12	0	22.37	22.14	21.49
			7	22.37	22.16	21.50
			13	22.40	22.01	21.49
		25	0	22.35	22.12	21.42
	16QAM	1	0	22.58	22.13	22.52
			12	22.61	22.10	22.41
			24	22.63	22.09	22.68
		12	0	21.38	21.09	20.45
			7	21.38	21.10	20.46
			13	21.42	21.09	20.45
		25	0	21.28	21.01	20.40
Band-width	Modulation	RB allocation	RB offset	40290	40740	41190
				2560MHz	2605MHz	2650MHz
10MHz	QPSK	1	0	22.36	22.19	22.53
			24	22.42	22.41	22.57
			49	22.36	22.93	22.43
		25	0	22.30	22.08	21.48
			24	22.30	22.08	21.49
			49	22.41	21.93	21.44
		50	0	22.35	22.04	21.46
	16QAM	1	0	22.34	22.09	21.69
			24	22.50	21.91	21.69
			49	22.60	21.85	21.62
		25	0	21.52	21.07	21.69
			24	21.28	21.08	21.67
			49	21.40	21.52	21.63
		50	0	21.34	20.98	20.41

LTE-TDD Band 41				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	40315	40740	41165
				2562.5MHz	2605MHz	2647.5MHz
15MHz	QPSK	1	0	23.36	23.25	23.09
			38	23.50	23.08	23.57
			74	23.57	23.68	23.50
		38	0	21.53	22.14	21.77
			18	21.48	22.00	21.69
			37	21.75	21.81	21.63
		75	0	22.48	21.78	21.59
	16QAM	1	0	22.20	22.14	22.71
			38	22.67	22.00	22.54
			74	22.75	22.81	22.62
		38	0	21.65	22.13	21.77
			18	21.54	21.98	21.69
			37	21.73	21.51	21.63
		75	0	21.41	20.78	20.49
Band-width	Modulation	RB allocation	RB offset	40340	40740	41140
				2565MHz	2605MHz	2645MHz
20MHz	QPSK	1	0	22.41	22.27	22.89
			49	22.25	22.11	22.64
			99	22.72	22.84	22.59
		50	0	22.39	22.71	22.63
			25	22.40	22.52	22.41
			50	22.54	22.39	22.54
		100	0	22.45	22.02	21.57
	16QAM	1	0	22.54	22.25	22.25
			49	22.82	22.05	22.31
			99	22.85	22.14	22.61
		50	0	21.42	21.17	20.60
			25	20.68	21.16	20.60
			50	20.68	20.93	20.49
		100	0	21.43	20.98	20.52

11.3. Wi-Fi

For 2.4GHz Wi-Fi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Wi-Fi 2.4G				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
802.11b	1	2412	12.37	9.90
	6	2437	15.66	13.16
	11	2462	15.57	13.12
802.11g	1	2412	15.85	12.98
	6	2437	16.78	14.05
	11	2462	16.56	13.86
802.11n (HT20)	1	2412	15.86	13.09
	6	2437	16.86	14.22
	11	2462	16.55	13.85
802.11n (HT40)	3	2422	15.61	13.03
	6	2437	15.88	13.33
	9	2452	16.06	13.61

Wi-Fi 5G U-NII-1					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11n (HT20)	36	5180	11.80	12.00
		44	5220	11.86	12.00
		48	5240	12.96	13.00
	802.11a	36	5180	11.80	12.00
		44	5220	12.34	12.50
		48	5240	12.39	12.50
40	802.11n	38	5190	11.31	11.50
		46	5230	12.03	12.50

Wi-Fi 5G U-NII-2A					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11n (HT20)	52	5260	13.14	13.50
		56	5280	12.83	13.00
		64	5320	11.61	11.50
	802.11a	52	5260	12.75	13.00
		56	5280	12.40	12.50
		64	5320	12.08	12.50
40	802.11n	54	5270	12.38	12.50
		62	5310	11.52	12.00

Wi-Fi 5G U-NII-3					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11n (HT20)	149	5745	14.27	14.50
		157	57853	13.49	13.50
		165	5825	12.36	12.50
	802.11a	149	5745	14.28	14.50
		157	57853	12.98	13.00
		165	5825	12.38	12.50
40	802.11n	151	5755	13.48	13.50
		159	5795	12.63	13.00

11.4.2.4G module

2.4G module				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
GFSK	0	2402	-2.05	-2.06
	39	2441	-1.39	-1.40
	78	2480	-0.82	-0.84

11.5. Bluetooth

Bluetooth				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
GFSK	0	2402	2.30	2.29
	39	2441	1.65	1.64
	78	2480	1.07	1.00
$\pi/4$ QPSK	0	2402	1.61	0.99
	39	2441	1.18	0.67
	78	2480	0.44	-0.10
8DPSK	0	2402	1.68	1.11
	39	2441	1.24	0.73
	78	2480	0.53	-0.06
BLE	0	2402	-5.26	-5.32
	19	2440	-5.62	-5.71
	39	2480	-6.63	-6.77

12. Maximum Tune-up Limit

GSM		
Mode	Maximum Tune-up (dBm)	
	GSM850	PCS1900
GSM (GMSK, 1Tx Slot)	33.00	31.50
GPRS (GMSK, 1Tx Slot)	33.00	31.00
GPRS (GMSK, 2Tx Slots)	32.50	30.50
GPRS (GMSK, 3Tx Slots)	30.50	29.00
GPRS (GMSK, 4Tx Slots)	29.00	27.50
EGPRS (8PSK, 1Tx Slot)	26.50	26.50
EGPRS (8PSK, 2Tx Slots)	25.50	25.50
EGPRS (8PSK, 3Tx Slots)	23.50	23.50
EGPRS (8PSK, 4Tx Slots)	23.50	22.00

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 5	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	22.50
			3	22.50
			6	21.50
	3	QPSK	1	23.00
			8	22.50
			15	22.00
		16QAM	1	22.50
			8	21.50
			15	21.00
	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
TDD Band 38	5	QPSK	1	23.00
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	24.00
			25	22.50
			50	22.50
		16QAM	1	23.00
			25	21.50
			50	21.50
	15	QPSK	1	24.00
			38	23.00
			75	22.50
		16QAM	1	23.00
			38	23.00
			75	21.50
	20	QPSK	1	24.00
			50	23.00
			100	22.50
		16QAM	1	23.00
			50	21.50
			100	21.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
TDD Band 41	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	23.00
			12	21.50
			25	21.50
	10	QPSK	1	23.00
			25	22.50
			50	22.50
		16QAM	1	23.00
			25	22.00
			50	21.50
	15	QPSK	1	24.00
			38	22.50
			75	22.50
		16QAM	1	23.00
			38	22.50
			75	21.50
	20	QPSK	1	23.00
			50	23.00
			100	22.50
		16QAM	1	23.00
			50	21.50
			100	21.50

The allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≤ 1						≤ 5

Wi-Fi 2.4G		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11b	1	10.00
	6	13.50
	11	13.50
802.11g	1	13.00
	6	14.50
	11	14.00
802.11n(HT20)	1	13.50
	6	14.50
	11	14.00
802.11n(HT40)	3	13.50
	6	13.50
	9	14.00

Wi-Fi 5G U-NII-1					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11n (HT20)	36	5180	11.80	12.00
		44	5220	11.86	12.00
		48	5240	12.96	13.00
	802.11a	36	5180	11.80	12.00
		44	5220	12.34	12.50
		48	5240	12.39	12.50
40	802.11n	38	5190	11.31	11.50
		46	5230	12.03	12.50

Wi-Fi 5G U-NII-2A					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11n (HT20)	52	5260	13.14	13.50
		56	5280	12.83	13.00
		64	5320	11.61	11.50
	802.11a	52	5260	12.75	13.00
		56	5280	12.40	12.50
		64	5320	12.08	12.50
40	802.11n	54	5270	12.38	12.50
		62	5310	11.52	12.00

Wi-Fi 5G U-NII-3					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11n (HT20)	149	5745	14.27	14.50
		157	57853	13.49	13.50
		165	5825	12.36	12.50
	802.11a	149	5745	14.28	14.50
		157	57853	12.98	13.00
		165	5825	12.38	12.50
40	802.11n	151	5755	13.48	13.50
		159	5795	12.63	13.00

2.4G module		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
GFSK	0	-2.00
	19	-1.00
	39	-0.50

Bluetooth		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
GFSK	0	2.50
	39	2.00
	78	1.00
$\pi/4$ QPSK	0	1.00
	39	1.00
	78	0.00
8DPSK	0	1.50
	39	1.00
	78	0.00
BLE	0	-5.00
	19	-5.50
	39	-6.50

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by:


$$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$

Band/Mode	F(GHz)	Position	Separation Distance (mm)	Exclusion Thresholds	SAR test exclusion
Bluetooth	2.45	Head	0	0.6	0.074
		Body	10	0.3	0.037

Per KDB 447498 D01, when the minimum test separation distance is $< 5\text{mm}$, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

13. Antenna Location

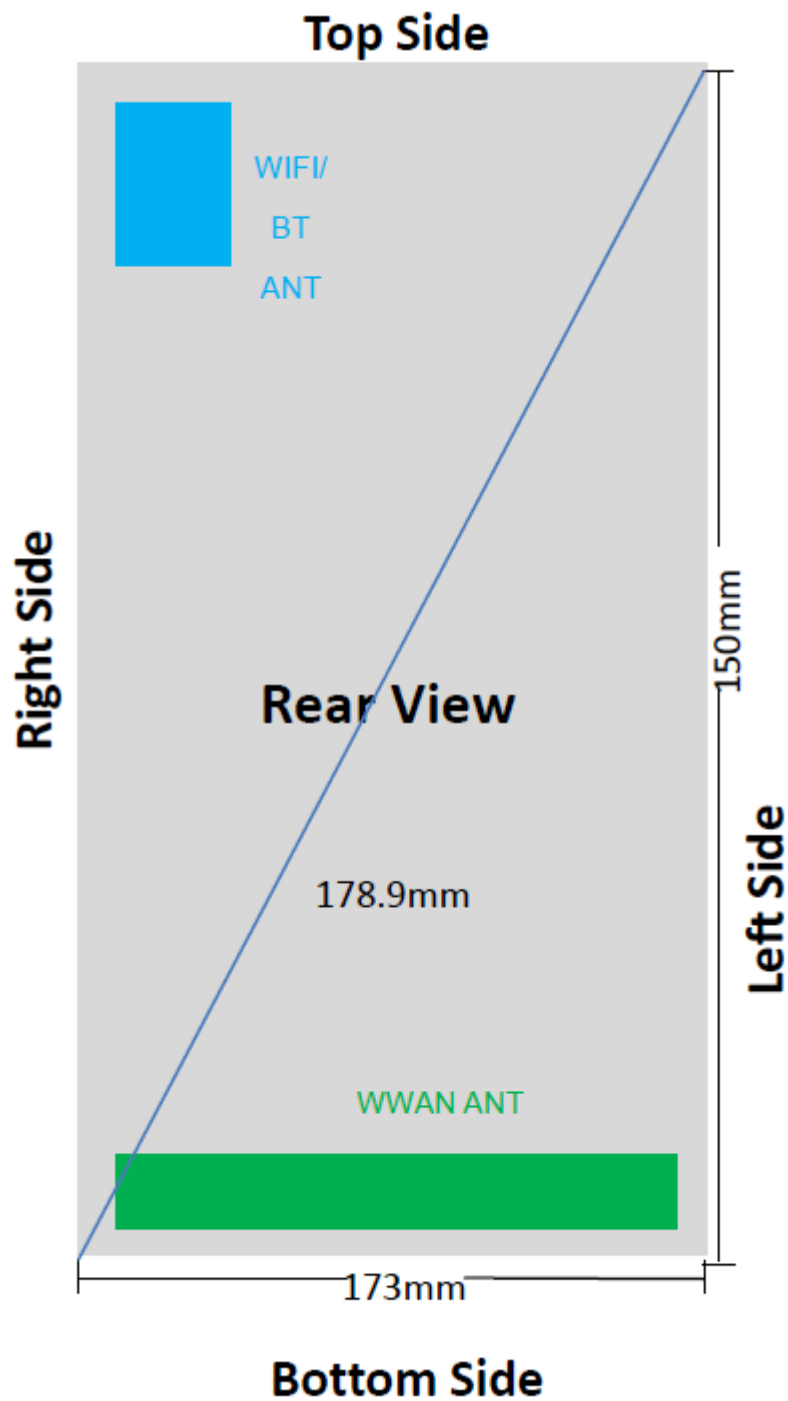

14. Measured and Reported SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G SAR Test Reduction Procedure:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

GSM Guidance

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Please refer to section 9. for GSM power verification.

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM and 64-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.

- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11:

When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

14.1. Head SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Left-Cheek	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	-0.11	0.515	0.520	-
	Left-Tilt	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	-0.15	0.500	0.505	-
	Right-Cheek	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	0.02	0.530	0.535	1
	Right-Tilt	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	0.08	0.518	0.523	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Left-Cheek	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	-0.13	0.258	0.263	2
		810	1909.8	28.88	29.00	1.028	-	-	-	-
	Left-Tilt	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	-0.09	0.208	0.212	-
		810	1909.8	28.88	29.00	1.028	-	-	-	-
	Right-Cheek	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	0.07	0.129	0.132	-
		810	1909.8	28.88	29.00	1.028	-	-	-	-
	Right-Tilt	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	0.08	0.101	0.103	-
		810	1909.8	28.88	29.00	1.028	-	-	-	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Left-Cheek	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	-0.10	0.286	0.313	-
	Left-Tilt	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	-0.12	0.275	0.301	-
	Right-Cheek	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	-0.03	0.292	0.319	3
	Right-Tilt	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	-0.05	0.285	0.312	-
10M QPSK 25RB	Left-Cheek	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	-0.16	0.280	0.301	-
	Left-Tilt	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	-0.07	0.262	0.282	-
	Right-Cheek	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	-0.06	0.290	0.312	-
	Right-Tilt	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	-0.05	0.283	0.305	-

LTE Band 38

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Left-Cheek	37850	2580	23.68	24.00	1.076	1.006	-0.11	0.055	0.059	4
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
	Left-Tilt	37850	2580	23.68	24.00	1.076	1.006	0.05	0.052	0.056	-
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
	Right-Cheek	37850	2580	23.68	24.00	1.076	1.006	-0.08	0.050	0.054	-
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
	Right-Tilt	37850	2580	23.68	24.00	1.076	1.006	-0.12	0.048	0.052	-
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
20M QPSK 50RB	Left-Cheek	37850	2580	22.52	23.00	1.117	1.006	-0.09	0.047	0.053	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-
	Left-Tilt	37850	2580	22.52	23.00	1.117	1.006	-0.04	0.040	0.045	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-
	Right-Cheek	37850	2580	22.52	23.00	1.117	1.006	-0.16	0.035	0.039	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-
	Right-Tilt	37850	2580	22.52	23.00	1.117	1.006	-0.18	0.032	0.036	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) Tune-up Scaling Factor* scaling factor for extended cyclic prefix.*

LTE Band 41

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Left-Cheek	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.05	0.061	0.063	5
	Left-Tilt	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.08	0.059	0.060	-
	Right-Cheek	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.10	0.057	0.059	-
	Right-Tilt	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	0.06	0.053	0.054	-
20M QPSK 50RB	Left-Cheek	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.12	0.052	0.053	-
	Left-Tilt	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	0.07	0.040	0.041	-
	Right-Cheek	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.04	0.031	0.032	-
	Right-Tilt	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.07	0.025	0.026	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) Tune-up Scaling Factor* scaling factor for extended cyclic prefix.*

WIFI 2.4G

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11b 1Mbps	Left-Cheek	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.08	0.215	0.234	6
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-
	Left-Tilt	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	0.11	0.182	0.198	-
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-
	Right-Cheek	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.07	0.190	0.207	-
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-
	Right-Tilt	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.06	0.160	0.174	-
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-

WIFI 5G U-NII-2A

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Left-Cheek	52	5260	12.75	13.00	1.059	97.36%	1.03	-0.170	0.144	0.157	8
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Left-Tilt	52	5260	12.75	13.00	1.059	97.36%	1.03	0.23	0.122	0.133	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Right-Cheek	52	5260	12.75	13.00	1.059	97.36%	1.03	0.09	0.138	0.151	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Right-Tilt	52	5260	12.75	13.00	1.059	97.36%	1.03	-0.12	0.116	0.126	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-

WIFI 5G U-NII-1

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Left-Cheek	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	-0.12	0.073	0.077	7
	Left-Tilt	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	0.16	0.062	0.065	-
	Right-Cheek	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	0.07	0.070	0.074	-
	Right-Tilt	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	-0.09	0.059	0.062	-

WIFI 5G U-NII-2A

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Left-Cheek	52	5260	12.75	13.00	1.059	97.36%	1.03	-0.170	0.144	0.157	8
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Left-Tilt	52	5260	12.75	13.00	1.059	97.36%	1.03	0.23	0.122	0.133	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Right-Cheek	52	5260	12.75	13.00	1.059	97.36%	1.03	0.09	0.138	0.151	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Right-Tilt	52	5260	12.75	13.00	1.059	97.36%	1.03	-0.12	0.116	0.126	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-

WIFI 5G U-NII-3

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Left-Cheek	149	5745	14.28	14.50	1.052	97.28%	1.03	-0.110	0.077	0.084	9
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-
	Left-Tilt	149	5745	14.28	14.50	1.052	97.28%	1.03	0.15	0.066	0.071	-
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-
	Right-Cheek	149	5745	14.28	14.50	1.052	97.28%	1.03	0.06	0.074	0.080	-
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-
	Right-Tilt	149	5745	14.28	14.50	1.052	97.28%	1.03	-0.08	0.062	0.067	-
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-

14.2. Body SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	-0.04	0.401	0.405	-
	Rear	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	-0.07	0.454	0.458	10

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	-0.18	0.306	0.312	11
		810	1909.8	28.88	29.00	1.028	-	-	-	-
	Rear	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	-0.13	0.243	0.248	-
		810	1909.8	28.88	29.00	1.028	-	-	-	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	0.10	0.258	0.282	-
	Rear	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	0.07	0.265	0.290	12
10M QPSK 25RB	Front	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	0.12	0.246	0.265	-
	Rear	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	-0.08	0.251	0.270	-

LTE Band 38

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	37850	2580	23.68	24.00	1.076	1.006	-0.11	0.035	0.037	13
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
	Rear	37850	2580	23.68	24.00	1.076	1.006	-0.08	0.031	0.034	-
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
20M QPSK 50RB	Front	37850	2580	22.52	23.00	1.117	1.006	-0.09	0.028	0.031	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-
	Rear	37850	2580	22.52	23.00	1.117	1.006	-0.10	0.025	0.028	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-

LTE Band 41											
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.21	0.039	0.040	14
	Rear	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.12	0.037	0.038	-
20M QPSK 50RB	Front	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.08	0.037	0.038	-
	Rear	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	0.05	0.035	0.036	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

WIFI 2.4G

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11b 1Mbps	Front	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.09	0.056	0.061	-
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-
	Rear	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.05	0.107	0.116	15
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-

WIFI 5G U-NII-1

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	-0.100	0.169	0.178	-
	Rear	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	-0.06	0.178	0.188	16

WIFI 5G U-NII-2A

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	52	5260	12.75	13.00	1.059	97.36%	1.03	-0.050	0.136	0.148	-
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-
	Rear	52	5260	12.75	13.00	1.059	97.36%	1.03	-0.11	0.148	0.161	17
		56	5280	12.40	12.50	1.023	97.28%	1.03	-	-	-	-
		64	5320	12.08	12.50	1.102	97.36%	1.03	-	-	-	-

WIFI 5G U-NII-3

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	149	5745	14.28	14.50	1.052	97.28%	1.03	-0.08	0.096	0.103	-
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-
	Rear	149	5745	14.28	14.50	1.052	97.28%	1.03	-0.10	0.100	0.108	18
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-

14.3. Hotspot SAR

GSM 850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	-0.04	0.401	0.405	-
	Rear	128	824.2	30.44	30.50	1.014	-	-	-	-
		190	836.6	30.30	30.50	1.047	-	-	-	-
		251	848.8	30.46	30.50	1.009	-0.07	0.454	0.458	10
	Left	251	848.8	30.46	30.50	1.009	1.009	0.08	0.395	0.399
	Right	251	848.8	30.46	30.50	1.009	1.009	-0.12	0.375	0.378
	Top	251	848.8	30.46	30.50	1.009	1.009	-	-	-
	Bottom	251	848.8	30.46	30.50	1.009	1.009	0.10	0.356	0.359

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	-0.18	0.306	0.312	11
		810	1909.8	28.88	29.00	1.028	-	-	-	-
	Rear	512	1850.2	28.69	29.00	1.074	-	-	-	-
		661	1880	28.91	29.00	1.021	-0.13	0.243	0.248	-
		810	1909.8	28.88	29.00	1.028	-	-	-	-
	Left	661	1880	28.91	29.00	1.021	0.07	0.150	0.153	-
	Right	661	1880	28.91	29.00	1.021	-0.05	0.143	0.146	-
	Top	661	1880	28.91	29.00	1.021	-	-	-	-
	Bottom	661	1880	28.91	29.00	1.021	-0.05	0.190	0.194	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	0.10	0.258	0.282	-
	Rear	20450	829	22.16	23.50	1.361	-	-	-	-
		20525	836.5	23.01	23.50	1.119	-	-	-	-
		20600	844	23.11	23.50	1.094	0.07	0.265	0.290	12
	Left	20600	844.0	23.11	23.50	1.094	-0.04	0.163	0.178	-
	Right	20600	844.0	23.11	23.50	1.094	0.03	0.156	0.171	-
	Top	20600	844.0	23.11	23.50	1.094	0.03	0.108	0.118	-
	Bottom	20600	844.0	23.11	23.50	1.094	-	-	-	-
10M QPSK 25RB	Front	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	0.12	0.246	0.265	-
	Rear	20450	829	21.18	22.50	1.355	-	-	-	-
		20525	836.5	22.03	22.50	1.114	-	-	-	-
		20600	844	22.18	22.50	1.076	-0.08	0.251	0.270	-
	Left	20600	844.0	22.18	22.50	1.076	0.00	0.154	0.166	-
	Right	20600	844.0	22.18	22.50	1.076	-0.03	0.148	0.159	-
	Top	20600	844.0	22.18	22.50	1.076	-	-	-	-
	Bottom	20600	844.0	22.18	22.50	1.076	-0.03	0.102	0.110	-

LTE Band 38

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	37850	2580	23.68	24.00	1.076	1.006	-0.11	0.035	0.037	13
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
	Rear	37850	2580	23.68	24.00	1.076	1.006	-0.08	0.031	0.034	-
		38000	2595	23.19	24.00	1.205	1.006	-	-	-	-
		38150	2610	23.22	24.00	1.197	1.006	-	-	-	-
	Left	37850	2580	23.68	24.00	1.076	1.006	0.05	0.019	0.021	-
	Right	37850	2580	23.68	24.00	1.076	1.006	-0.03	0.018	0.019	-
	Top	37850	2580	23.68	24.00	1.076	1.006	-	-	-	-
	Bottom	37850	2580	23.68	24.00	1.076	1.006	-0.03	0.024	0.026	-
20M QPSK 50RB	Front	37850	2580	22.52	23.00	1.117	1.006	-0.09	0.028	0.031	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-
	Rear	37850	2580	22.52	23.00	1.117	1.006	-0.10	0.025	0.028	-
		38000	2595	21.93	23.00	1.279	1.006	-	-	-	-
		38150	2610	22.05	23.00	1.245	1.006	-	-	-	-
	Left	37850	2580	22.52	23.00	1.117	1.006	0.06	0.015	0.017	-
	Right	37850	2580	22.52	23.00	1.117	1.006	-0.04	0.015	0.017	-
	Top	37850	2580	22.52	23.00	1.117	1.006	-	-	-	-
	Bottom	37850	2580	22.52	23.00	1.117	1.006	-0.04	0.035	0.039	-

LTE Band 41

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.21	0.039	0.040	14
	Rear	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.12	0.037	0.038	-
	Left	41140	2645	22.89	23.00	1.026	1.006	0.07	0.035	0.036	-
	Right	41140	2645	22.89	23.00	1.026	1.006	-0.04	0.028	0.029	-
	Top	41140	2645	22.89	23.00	1.026	1.006	-	-	-	-
	Bottom	41140	2645	22.89	23.00	1.026	1.006	-0.04	0.025	0.026	-
20M QPSK 50RB	Front	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	-0.08	0.037	0.038	-
	Rear	40340	2565	22.41	23.00	1.146	1.006	-	-	-	-
		40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
		41140	2645	22.89	23.00	1.026	1.006	0.05	0.035	0.036	-
	Left	40740	2605	22.27	23.00	1.183	1.006	-0.03	0.030	0.036	-
	Right	40740	2605	22.27	23.00	1.183	1.006	0.02	0.020	0.024	-
	Top	40740	2605	22.27	23.00	1.183	1.006	-	-	-	-
	Bottom	40740	2605	22.27	23.00	1.183	1.006	-0.08	0.027	0.032	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

WIFI 2.4G

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11b 1Mbps	Front	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.09	0.056	0.061	-
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-
	Rear	1	2412	9.90	10.00	1.023	99.40%	1.01	-	-	-	-
		6	2437	13.16	13.50	1.081	99.40%	1.01	-0.05	0.107	0.116	15
		11	2462	13.12	13.50	1.091	99.40%	1.01	-	-	-	-
	Left	6	2437	13.16	13.50	1.081	99.40%	1.01	-	-	-	-
	Right	6	2437	13.16	13.50	1.081	99.40%	1.01	-0.12	0.069	0.075	-
	Top	6	2437	13.16	13.50	1.081	99.40%	1.01	0.05	0.061	0.066	-
	Bottom	6	2437	13.16	13.50	1.081	99.40%	1.01	-	-	-	-

WIFI 5G U-NII-1

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	-0.10	0.169	0.178	-
	Rear	36	5180	11.80	12.00	1.047	97.36%	1.03	-	-	-	-
		44	5220	12.34	12.50	1.038	97.36%	1.03	-	-	-	-
		48	5240	12.39	12.50	1.026	97.36%	1.03	-0.06	0.178	0.188	16
	Left	48	5240	12.39	12.50	1.026	97.36%	1.03	-	-	-	-
	Right	48	5240	12.39	12.50	1.026	97.36%	1.03	0.05	0.160	0.169	-
	Top	48	5240	12.39	12.50	1.026	97.36%	1.03	-0.09	0.151	0.159	-
	Bottom	48	5240	12.39	12.50	1.026	97.36%	1.03	-	-	-	-

WIFI 5G U-NII-3

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	149	5745	14.28	14.50	1.052	97.28%	1.03	-0.08	0.096	0.103	-
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-
	Rear	149	5745	14.28	14.50	1.052	97.28%	1.03	-0.10	0.100	0.108	18
		157	5785	12.98	13.00	1.005	97.36%	1.03	-	-	-	-
		165	5825	12.38	12.50	1.028	97.36%	1.03	-	-	-	-
	Left	149	5745	14.28	14.50	1.052	97.28%	1.03	-	-	-	-
	Right	149	5745	14.28	14.50	1.052	97.36%	1.03	-0.15	0.085	0.092	-
	Top	149	5745	14.28	14.50	1.052	97.36%	1.03	0.13	0.092	0.099	-
	Bottom	149	5745	14.28	14.50	1.052	97.28%	1.03	-	-	-	-

SAR Test Data Plots to the Appendix A.

15. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Frequency		Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
		CH	MHz		Measured SAR(W/kg)	Largest to Smallest SAR Ratio	Measured SAR(W/kg)	Largest to Smallest SAR Ratio
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

16. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note
1	GSM(voice) + Bluetooth (data)	Yes	Yes		
2	GSM(voice) + WLAN (data)	Yes	Yes		
3	GPRS (data) + Bluetooth (data)	Yes	Yes	NA	
4	GPRS (data) + WLAN (data)	Yes	Yes	Yes	
5	LTE + Bluetooth (data)	Yes	Yes	NA	
6	LTE + WLAN (data)	Yes	Yes	Yes	

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Head	Body-worn
	Test separation	0mm	10mm
2.50dBm	Estimated SAR (W/kg)	0.074	0.037

16.1. Head

PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN DTS	(W/kg)
GSM	GSM850	Left Cheek	0.520	0.234	0.754
		Left Tilted	0.505	0.198	0.703
		Right Cheek	0.535	0.207	0.742
		Right Tilted	0.523	0.174	0.697
	PCS1900	Left Cheek	0.263	0.234	0.497
		Left Tilted	0.212	0.198	0.410
		Right Cheek	0.132	0.207	0.339
		Right Tilted	0.103	0.174	0.277
LTE	B5 1RB	Left Cheek	0.313	0.234	0.547
		Left Tilted	0.301	0.198	0.499
		Right Cheek	0.319	0.207	0.526
		Right Tilted	0.312	0.174	0.486
	B5 25RB	Left Cheek	0.301	0.234	0.535
		Left Tilted	0.282	0.198	0.480
		Right Cheek	0.312	0.207	0.519
		Right Tilted	0.305	0.174	0.479
	B38 1RB	Left Cheek	0.059	0.234	0.293
		Left Tilted	0.056	0.198	0.254
		Right Cheek	0.054	0.207	0.261
		Right Tilted	0.052	0.174	0.226
	B38 50RB	Left Cheek	0.053	0.234	0.287
		Left Tilted	0.045	0.198	0.243
		Right Cheek	0.039	0.207	0.246
		Right Tilted	0.036	0.174	0.210

	B41 1RB	Left Cheek	0.063	0.234	0.297
		Left Tilted	0.060	0.198	0.258
		Right Cheek	0.059	0.207	0.266
		Right Tilted	0.054	0.174	0.228
	B41 50RB	Left Cheek	0.053	0.234	0.287
		Left Tilted	0.041	0.198	0.239
		Right Cheek	0.032	0.207	0.239
		Right Tilted	0.026	0.174	0.200

PCE + WLAN U-NII					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN U-NII-1	(W/kg)
GSM	GSM850	Left Cheek	0.520	0.077	0.597
		Left Tilted	0.505	0.065	0.570
		Right Cheek	0.535	0.074	0.609
		Right Tilted	0.523	0.062	0.585
	PCS1900	Left Cheek	0.263	0.077	0.340
		Left Tilted	0.212	0.065	0.277
		Right Cheek	0.132	0.074	0.206
		Right Tilted	0.103	0.062	0.165
	B5 1RB	Left Cheek	0.313	0.077	0.390
		Left Tilted	0.301	0.065	0.366
		Right Cheek	0.319	0.074	0.393
		Right Tilted	0.312	0.062	0.374
	B5 25RB	Left Cheek	0.301	0.077	0.378
		Left Tilted	0.282	0.065	0.347
		Right Cheek	0.312	0.074	0.386
		Right Tilted	0.305	0.062	0.367
	B38 1RB	Left Cheek	0.059	0.077	0.136
		Left Tilted	0.056	0.065	0.121
		Right Cheek	0.054	0.074	0.128
		Right Tilted	0.052	0.062	0.114
	B38 50RB	Left Cheek	0.053	0.077	0.130
		Left Tilted	0.045	0.065	0.110
		Right Cheek	0.039	0.074	0.113
		Right Tilted	0.036	0.062	0.098
	B41 1RB	Left Cheek	0.063	0.077	0.140

		Left Tilted	0.060	0.065	0.125
		Right Cheek	0.059	0.074	0.133
		Right Tilted	0.054	0.062	0.116
	B41 50RB	Left Cheek	0.053	0.077	0.130
		Left Tilted	0.041	0.065	0.106
		Right Cheek	0.032	0.074	0.106
		Right Tilted	0.026	0.062	0.088

PCE + BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	BT	(W/kg)
GSM	GSM850	Left Cheek	0.520	0.074	0.594
		Left Tilted	0.505	0.074	0.579
		Right Cheek	0.535	0.074	0.609
		Right Tilted	0.523	0.074	0.597
	PCS1900	Left Cheek	0.263	0.074	0.338
		Left Tilted	0.212	0.074	0.287
		Right Cheek	0.132	0.074	0.206
		Right Tilted	0.103	0.074	0.177
	B5 1RB	Left Cheek	0.313	0.074	0.387
		Left Tilted	0.301	0.074	0.375
		Right Cheek	0.319	0.074	0.394
		Right Tilted	0.312	0.074	0.386
	B5 25RB	Left Cheek	0.301	0.074	0.376
		Left Tilted	0.282	0.074	0.356
		Right Cheek	0.312	0.074	0.386
		Right Tilted	0.305	0.074	0.379
	B38 1RB	Left Cheek	0.059	0.074	0.133
		Left Tilted	0.056	0.074	0.131
		Right Cheek	0.054	0.074	0.128
		Right Tilted	0.052	0.074	0.126
	B38 50RB	Left Cheek	0.053	0.074	0.127
		Left Tilted	0.045	0.074	0.119
		Right Cheek	0.039	0.074	0.114
		Right Tilted	0.036	0.074	0.110
	B41 1RB	Left Cheek	0.063	0.074	0.137

		Left Tilted	0.060	0.074	0.135
		Right Cheek	0.059	0.074	0.133
		Right Tilted	0.054	0.074	0.128
	B41 50RB	Left Cheek	0.053	0.074	0.127
		Left Tilted	0.041	0.074	0.115
		Right Cheek	0.032	0.074	0.106
		Right Tilted	0.026	0.074	0.100

16.2. Body-worn

PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.405	0.061	0.466
		Rear	0.458	0.116	0.574
	PCS1900	Front	0.312	0.061	0.373
		Rear	0.248	0.116	0.364
LTE	B5 1RB	Front	0.282	0.061	0.343
		Rear	0.290	0.116	0.406
	B5 25RB	Front	0.265	0.061	0.326
		Rear	0.270	0.116	0.386
	B38 1RB	Front	0.037	0.061	0.098
		Rear	0.034	0.116	0.150
	B38 50RB	Front	0.031	0.061	0.092
		Rear	0.028	0.116	0.144
	B41 1RB	Front	0.040	0.061	0.101
		Rear	0.038	0.116	0.154
	B41 50RB	Front	0.038	0.061	0.099
		Rear	0.036	0.116	0.152

PCE + WLAN U-NII					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN U-NII-1	(W/kg)
GSM	GSM850	Front	0.405	0.178	0.583
		Rear	0.458	0.188	0.646
	PCS1900	Front	0.312	0.178	0.490
		Rear	0.248	0.188	0.436
LTE	B5 1RB	Front	0.282	0.178	0.460
		Rear	0.290	0.188	0.478
	B5 25RB	Front	0.265	0.178	0.443
		Rear	0.270	0.188	0.458
	B38 1RB	Front	0.037	0.178	0.215
		Rear	0.034	0.188	0.222
	B38 50RB	Front	0.031	0.178	0.209
		Rear	0.028	0.188	0.216
	B41 1RB	Front	0.040	0.178	0.218
		Rear	0.038	0.188	0.226
	B41 50RB	Front	0.038	0.178	0.216
		Rear	0.036	0.188	0.224

PCE + BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	BT	(W/kg)
GSM	GSM850	Front	0.405	0.037	0.442
		Rear	0.458	0.037	0.495
	PCS1900	Front	0.312	0.037	0.350
		Rear	0.248	0.037	0.285
LTE	B5 1RB	Front	0.282	0.037	0.319
		Rear	0.290	0.037	0.327
	B5 25RB	Front	0.265	0.037	0.302
		Rear	0.270	0.037	0.307
	B38 1RB	Front	0.037	0.037	0.075
		Rear	0.034	0.037	0.071
	B38 50RB	Front	0.031	0.037	0.069
		Rear	0.028	0.037	0.065
	B41 1RB	Front	0.040	0.037	0.077
		Rear	0.038	0.037	0.075
	B41 50RB	Front	0.038	0.037	0.075
		Rear	0.036	0.037	0.073

16.3. Hotspot


PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.405	0.061	0.465
		Rear	0.458	0.116	0.575
		Left side	0.399	0.000	0.399
		Right side	0.378	0.075	0.454
		Top side	0.000	0.066	0.066
		Bottom side	0.359	0.000	0.359
	PCS1900	Front	0.312	0.061	0.373
		Rear	0.248	0.116	0.365
		Left side	0.153	0.000	0.153
		Right side	0.146	0.075	0.221
		Top side	0.000	0.066	0.066
		Bottom side	0.194	0.000	0.194
LTE	B5 1RB	Front	0.282	0.061	0.343
		Rear	0.290	0.116	0.406
		Left side	0.178	0.000	0.178
		Right side	0.171	0.075	0.246
		Top side	0.000	0.066	0.066
		Bottom side	0.118	0.000	0.118
	B5 25RB	Front	0.265	0.061	0.325
		Rear	0.270	0.116	0.387
		Left side	0.166	0.000	0.166
		Right side	0.159	0.075	0.234
		Top side	0.000	0.066	0.066
		Bottom side	0.110	0.000	0.110

	B38 1RB	Front	0.037	0.061	0.098
		Rear	0.034	0.116	0.150
		Left side	0.021	0.000	0.021
		Right side	0.019	0.075	0.095
		Top side	0.000	0.066	0.066
		Bottom side	0.026	0.000	0.026
	B38 50RB	Front	0.031	0.061	0.092
		Rear	0.028	0.116	0.145
		Left side	0.017	0.000	0.017
		Right side	0.017	0.075	0.092
		Top side	0.000	0.066	0.066
		Bottom side	0.039	0.000	0.039
	B41 1RB	Front	0.040	0.061	0.101
		Rear	0.038	0.116	0.155
		Left side	0.036	0.000	0.036
		Right side	0.029	0.075	0.104
		Top side	0.000	0.066	0.066
		Bottom side	0.026	0.000	0.026
	B41 50RB	Front	0.038	0.061	0.098
		Rear	0.036	0.116	0.152
		Left side	0.036	0.000	0.036
		Right side	0.024	0.075	0.099
		Top side	0.000	0.066	0.066
		Bottom side	0.032	0.000	0.032


PCE + WLAN U-NII					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN U-NII-1	(W/kg)
GSM	GSM850	Front	0.405	0.178	0.583
		Rear	0.458	0.188	0.646
		Left side	0.399	0.000	0.399
		Right side	0.378	0.169	0.547
		Top side	0.000	0.159	0.159
		Bottom side	0.359	0.000	0.359
	PCS1900	Front	0.312	0.178	0.490
		Rear	0.248	0.188	0.436
		Left side	0.153	0.000	0.153
		Right side	0.146	0.169	0.315
		Top side	0.000	0.159	0.159
		Bottom side	0.194	0.000	0.194
LTE	B5 1RB	Front	0.282	0.178	0.460
		Rear	0.290	0.188	0.477
		Left side	0.178	0.000	0.178
		Right side	0.171	0.169	0.339
		Top side	0.000	0.159	0.159
		Bottom side	0.118	0.000	0.118
	B5 25RB	Front	0.265	0.178	0.443
		Rear	0.270	0.188	0.458
		Left side	0.166	0.000	0.166
		Right side	0.159	0.169	0.328
		Top side	0.000	0.159	0.159
		Bottom side	0.110	0.000	0.110
	B38 1RB	Front	0.037	0.178	0.216

		Rear	0.034	0.188	0.221
		Left side	0.021	0.000	0.021
		Right side	0.019	0.169	0.188
		Top side	0.000	0.159	0.159
		Bottom side	0.026	0.000	0.026
	B38 50RB	Front	0.031	0.178	0.209
		Rear	0.028	0.188	0.216
		Left side	0.017	0.000	0.017
		Right side	0.017	0.169	0.185
		Top side	0.000	0.159	0.159
		Bottom side	0.039	0.000	0.039
	B41 1RB	Front	0.040	0.178	0.218
		Rear	0.038	0.188	0.226
		Left side	0.036	0.000	0.036
		Right side	0.029	0.169	0.197
		Top side	0.000	0.159	0.159
		Bottom side	0.026	0.000	0.026
	B41 50RB	Front	0.038	0.178	0.216
		Rear	0.036	0.188	0.223
		Left side	0.036	0.000	0.036
		Right side	0.024	0.169	0.192
		Top side	0.000	0.159	0.159
		Bottom side	0.032	0.000	0.032

17. TestSetup Photos

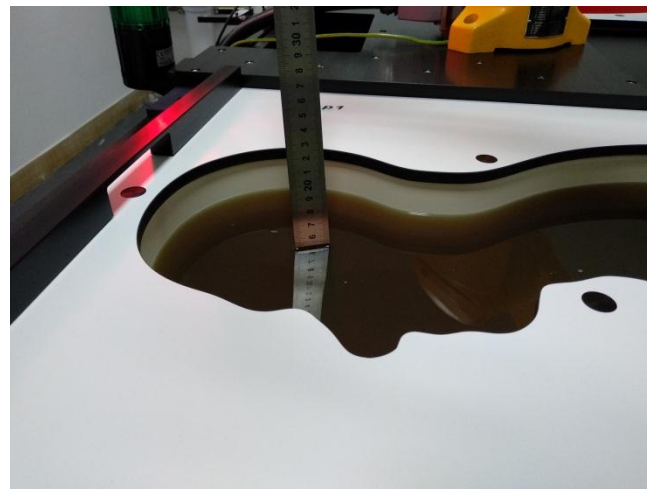

Liquid depth in the Head phantom

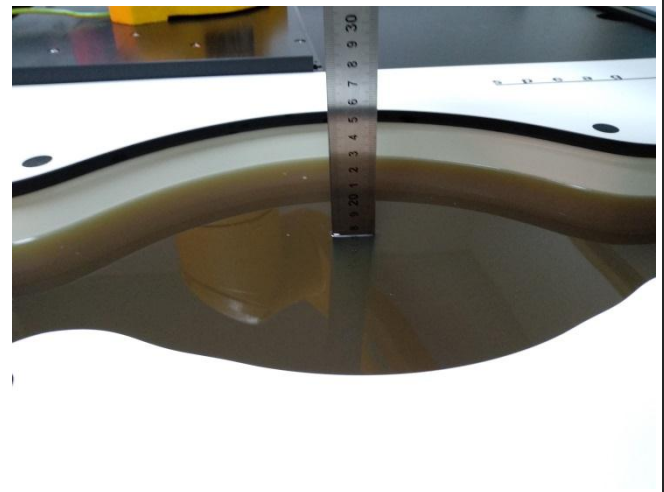

Liquid depth in the Body phantom



Left Head Touch



Right Head Touch




Left Head Tilt (15°)



Right Head Tilt (15°)



Body-worn Front (10mm)

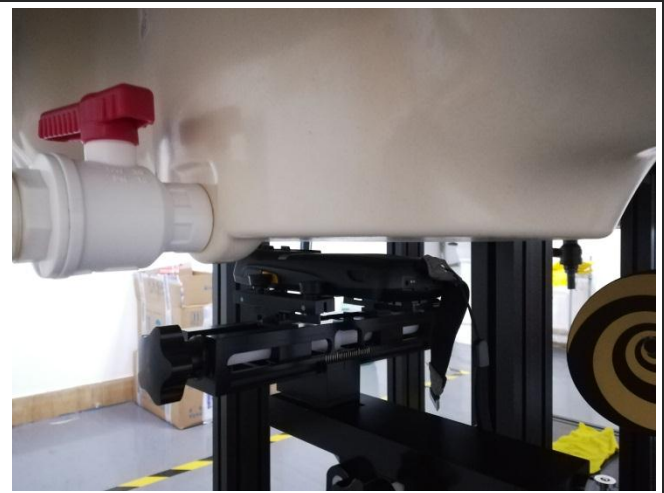

Body-worn Rear(10mm)



Front (10mm)



Rear (10mm)



Left Side (10mm)



Right Side (10mm)



Top Side (10mm)



Bottom Side (10mm)

18. External and Internal Photos of the EUT

Please reference to the report No.: CHTEW21070219

-----End of Report-----