		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		1(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

SAR Compliance Test Report

Testing Lab:	BlackBerry RTS 440 Phillip Street Waterloo, Ontario Canada N2L 5R9 Phone: 519-888-7465 Fax: 519-746-0189	Applicant:	BlackBerry Limited 2200 University Ave. East Waterloo, Ontario Canada N2K 0A7 Phone: 519-888-7465 Fax: 519-888-6906
---------------------	---	-------------------	--

Web site: www.BlackBerry.com

Statement of Compliance: BlackBerry RTS declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

Device Category: This BlackBerry® Smartphone is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in approved accessories when carried on the user's body.

RF Exposure Environment: This device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in, FCC 47 CFR Part 2.1093, FCC 96-326, IEEE Std. C95.1-1992, Health Canada's Safety Code 6, as reproduced in RSS-102 issue 4-2010 and has been tested in accordance with the measurement procedures specified in latest FCC OET KDB Procedures, ANSI/IEEE Std. C95.3-2002, IEEE 1528-2013, and RSS 102-issue4-2010

Andrew Becker
SAR & HAC Compliance Specialist
(Author of the Test Report)


Daoud Attayi
Compliance Systems Analyst II
SAR & HAC Compliance Lead
(Verification and responsible of the Test Report)

Masud S. Attayi
Manager, Regulatory Compliance
(Approval for the Test Report)

RTS is accredited
according to
EN ISO/IEC 17025 by:




592

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 2(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	


Revision History		
Rev. Number	Date	Changes
Initial	Oct 17, 2013	-----
Rev 2	Apr 30, 2014	Added measured conducted power data for 802.11b Direct/GO mode: <ul style="list-style-type: none"> Table 1.8.1-3c added on page 12
Rev 3	Dec 15, 2014	Added measured conducted power data for 802.11a Direct/GO and Hotspot mode which will be supported on software 10.3.1.x maintenance release: <ul style="list-style-type: none"> Table 1.8.1-4c added on page 16 Updated simultaneous transmission results for Hotspot mode <ul style="list-style-type: none"> Table 1.8.3-1 updated on page 18 Table 1.9.1-1 updated on page 42 Table 1.9.1-4a updated on page 45 Table 1.9.1-4b added on page 46 Added equipment information used for 802.11a Direct/GO and Hotspot testing <ul style="list-style-type: none"> Table 2.1.1-2 added on page 49 Table 3.2-3 added on page 53 Table 6.1.1-2 added on page 58 Added dipole and dielectric parameters information used for 802.11a Direct/GO and Hotspot testing <ul style="list-style-type: none"> Table 4.1-2 added on page 55 Table 6.2-2 added on page 62 Added 802.11a Hotspot SAR test data <ul style="list-style-type: none"> Table 11.2-13 added on page 88 Updated References on page 89

Note: According to the hardware similarity document BlackBerry model: RFV121LW has the same Wi-Fi 802.11a Direct/GO and Hotspot mode design as RFW121LW. Therefore, conducted power and radiated SAR testing was done on model RFW121LW and the results reused for this report.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 3(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Contents

1.0	OPERATING CONFIGURATIONS AND TEST CONDITIONS	5
1.1	PICTURE OF DEVICE	5
1.2	ANTENNA DESCRIPTION.....	5
1.3	DEVICE DESCRIPTION	5
1.4	BODY WORN ACCESSORIES (HOLSTERS)	8
1.5	HEADSET.....	8
1.6	BATTERY.....	8
1.7	PROCEDURE USED TO ESTABLISH TEST SIGNAL.....	8
1.8	HIGHLIGHTS OF THE FCC OET SAR MEASUREMENT REQUIREMENTS.....	9
1.8.1	SAR MEASUREMENT PROCEDURES FOR 802.11 A/B/G/N AS PER KDB 248227 D01 V01R02 AND SAR MEASUREMENTS 100 MHZ TO 6 GHZ AS PER KDB 865664 D0 V01	9
1.8.2	SAR MEASUREMENT REQUIREMENTS FOR BLUETOOTH	17
1.8.3	SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES AS PER KDB 941225 D06 V01	17
1.8.4	SAR EVALUATION PROCEDURES FOR GSM/(E)GPRS DUAL TRANSFER MODE AS PER KDB 941225 D04 V01 AND SAR TEST REDUCTION PROCEDURES GSM GPRS EDGE AS PER DDB 941225 D03 VO1	19
1.8.5	SAR MEASUREMENT PROCEDURE FOR FAST SAR SCAN AS PER KDB 447498	21
1.8.6	SAR MEASUREMENT PROCEDURES FOR 3G DEVICES.....	22
1.8.7	TEST SEUP INFORMATION FOR WCDMA / HSPDA / HSUPA.....	22
1.8.8	SAR EVALUATION PROCEDURES FOR LTE AS PER KDB 941225 D05 V02.....	29
1.9	GENERAL SAR TEST REDUCTION AND EXCLUSION PROCEDURE AS PER KDB 447498 D01 V05 AND SAR HANDSETS MULTI XMITER AND ANT PROCEDURE AS PER 648474 D04 V01	41
1.9.1	SIMULTANEOUS TRANSMISSION ANALYSIS	42
2.0	DESCRIPTION OF THE TEST EQUIPMENT.....	47
2.1	SAR MEASUREMENT SYSTEM.....	47
2.1.1	EQUIPMENT LIST	48
2.2	DESCRIPTION OF THE TEST SETUP.....	50
2.2.1	DEVICE AND BASE STATION SIMULATOR SETUP	50
2.2.2	DASY SETUP	50
3.0	ELECTRIC FIELD PROBE CALIBRATION	50
3.1	PROBE SPECIFICATIONS	50
3.2	PROBE CALIBRATION AND MEASUREMENT UNCERTAINTY	51
4.0	SAR MEASUREMENT SYSTEM VERIFICATION.....	54
4.1	SYSTEM ACCURACY VERIFICATION FOR HEAD ADJACENT USE	54
5.0	PHANTOM DESCRIPTION.....	56
6.0	TISSUE DIELECTRIC PROPERTIES.....	57
6.1	COMPOSITION OF TISSUE SIMULANT.....	57
6.1.1	EQUIPMENT	57
6.2	ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID	59
6.2.2	TEST CONFIGURATION.....	63
6.2.3	PROCEDURE	63
7.0	SAR SAFETY LIMITS	64
8.0	DEVICE POSITIONING.....	65
8.1	DEVICE HOLDER FOR SAM TWIN PHANTOM	65
8.2	DESCRIPTION OF THE TEST POSITIONING	66
8.2.1	TEST POSITIONS OF DEVICE RELATIVE TO HEAD.....	66
8.2.2	BODY-WORN CONFIGURATION.....	68
8.2.3	LIMB/HAND CONFIGURATION	68
9.0	HIGH LEVEL EVALUATION.....	69
9.1	MAXIMUM SEARCH.....	69
9.2	EXTRAPOLATION	69
9.3	BOUNDARY CORRECTION	69
9.4	PEAK SEARCH FOR 1G AND 10G CUBE AVERAGED SAR.....	70
10.0	MEASUREMENT UNCERTAINTY	71
11.0	TEST RESULTS	73
11.1	SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE HEAD	73

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		4(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

11.2	SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE BODY USING ACCESSORIES	79
12.0	REFERENCES.....	89

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION


APPENDIX B: SAR DISTRIBUTION PLOTS - HEAD CONFIGURATION

APPENDIX C1: SAR DISTRIBUTION PLOTS - BODY-WORN CONFIGURATION

APPENDIX C2: SAR DISTRIBUTION PLOTS - HOT SPOT

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

APPENDIX E: PHOTOGRAPHS

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 5(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

1.1 Picture of Device

Please refer to Appendix E.

Figure 1.1-1 BlackBerry Smartphone


1.2 Antenna description

Type	Internal fixed antenna
Location	Please refer to Figure 1.9-1
Configuration	Internal fixed antenna

Table 1.2-1 Antenna description

1.3 Device description

Device Model	RFV121LW			
FCC ID	L6ARFV120LW			
PIN	Radiated: 2FFFE967 (Rev2), 2FFFE9A7 (Rev2), 2FFF7DAD (Rev3) Conducted: 2FFFE9B6 (Rev2), 2FFF7DB3 (Rev3)			
Hardware Rev	Rev2-x08-00/01, Rev3-x09-01			
Software Version	10.2.0.519/1512, 10.3.1.1817			
Prototype or Production Unit	Production			
Mode(s) of Operation	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
Nominal Maximum conducted RF Output Power (dBm)	32.5 30.0	30.0 27.5	28.5 25.5	27.0 24.0
Tolerance in Power Setting on centre channel (dB)	± 1.0	± 1.0	± 1.0	± 1.0
Duty Cycle	1:8	2:8	3:8	4:8
Transmitting Frequency Range (MHz)	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
Mode(s) of Operation	802.11b	802.11g	802.11n	Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	19.0	18.0	17.0	9.8
Tolerance in Power Setting on centre channel (dB)	± 1.5	± 1.5	± 1.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462	2402-2483
Mode(s) of Operation	802.11a/n (low band)	802.11a/n (middle band)	802.11a/n (upper band I)	802.11a/n (upper band II)
Nominal Maximum conducted RF Output Power (dBm)	13.5	15.0	17.5	17.0
Tolerance in Power Setting on centre channel (dB)	± 1.5	± 1.5	± 1.5	± 1.5
Duty Cycle	1:1	1:1	1:1	1:1
Transmitting Frequency	5180-5240	5260-5320	5520-5700	5745-5825


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 6(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Range (MHz)				
Mode(s) of Operation	HSPA ⁺ / WCDMA / UMTS FDD V (850)	HSPA ⁺ / WCDMA / UMTS FDD IV (1800)	HSPA ⁺ / WCDMA / UMTS FDD II (1900)	NFC
Nominal Maximum conducted RF Output Power (dBm)	23.0	22.5	22.5	N/A
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	824.6 – 846.6	1712.4 – 1752.6	1852.4 – 1907.6	13.56

Table 1.3-1 Test device characterization non-LTE U.S. wireless operating modes/bands


Note 1: SAR measurements on NFC haven't been conducted, since it is very low power and frequency magnetic field transceiver. SAR probes measure higher frequency/power electric field.

Device Model		RFV121LW		
FCC ID		L6ARFV120LW		
PIN		Radiated: 2FFFE967 (Rev2), 2FFFE9A7 (Rev2), 2FFF7DAD (Rev3) Conducted: 2FFFE9B6 (Rev2), 2FFF7DB3 (Rev3)		
Hardware Rev		Rev2-x08-00/01, Rev3-x09-01		
Software Version		10.2.0.519/1512		
Prototype or Production Unit		Production		
Transmission channel bandwidth		Band 2: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 4: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 5: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz Band 17: 5 MHz, 10 MHz		
Transmission channel number and frequencies				
	LTE band 2		LTE band 4	
	f (MHz)	Chan.	f (MHz)	Chan.
L	1860.0	18700	1720.0	20050
M	1880.0	18900	1732.5	20175
H	1900.0	19100	1745.0	20300
	LTE band 5		LTE band 17	
	f (MHz)	Chan.	f (MHz)	Chan.
L	829.0	20450	709.0	23780
M	836.5	20525	710.0	23790
H	844.0	20600	711.0	23800
UE Category		Category 3		
Modulation supported in uplink		QPSK, 16QAM		
Description of LTE antenna		1 Tx/Rx Ant, Sharing with GSM/UMTS;		
LTE voice available/supported		third party VOIP application might be possible		
Hotspot with LTE+ WiFi		Yes		

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 7(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Hotspot with LTE+WiFi active with GSM/UMTS voice	No		
LTE MPR permanently built-in by design	Yes		
LTE A-MPR	Disabled during SAR testing , by setting NV value to NV_01 on the CMW500		
LTE maximum average power (dBm)	Band 2: 22.4 Band 4: 22.6 Band 5: 23.6 Band 17: 23.6		
Other non-LTE U.S. wireless operating modes/bands	GSM//WCDMA/HSPA ⁺	GSM 850 MHz UMTS/WCDMA 850 MHz UMTS/WCDMA 1800 MHz GSM 1900 MHz UMTS/WCDMA 1900 MHz	
	WiFi and BT	2.4 GHz Wi-Fi 5 GHz Wi-Fi 2.4 GHz BT	
Simultaneous Tx conditions	Please refer to section 1.9: Highlights of the FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters/ Antennas & GSM/GPRS/EDGE Procedure.		
Power reduction applied for SAR compliance	No		

Table 1.3-2 Test device characterization all North American wireless operating modes/bands

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 8(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

1.4 Body worn accessories (holsters)

The device has been tested with the holster listed below. The holster has been designed with the intended device orientation being with the LCD facing the belt clip only. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the device. The device can also be placed in the holster with the backside facing the belt clip. Body SAR measurements were carried out with the worst-case configuration front LCD side and backside towards the belt clip.

Number	Holster Type	Part Number	Separation distance (mm)
1	Vertical Holster, Leather	HDW-55471-001	20

Table 1.4-1 Body worn holster

Note: Holsters have identical design, except for different leather material being used.

Please refer to Appendix E.

Figure 1.4-1 Body-worn holster

1.5 Headset

The device was tested with headset if 1g avg. SAR > 1.2 W/Kg model numbers.

1) HDW-44306-xxx


1.6 Battery

The device was tested with the following Lithium Ion Battery packs.

1) BAT-50136-00x

1.7 Procedure used to establish test signal

- The device was put into test mode for SAR measurements by placing a call from a Rohde & Schwarz CMU 200 or CMW 500 Communications Test Instrument. The power control level was set to command the device to transmit at full power at the specified frequency. Other parameters include: Channel type = full rate, discontinuous transmission off, frequency hopping off. For LTE specific bandwidths, number of resource blocks, and resource block offsets were set. In addition, LTE A-MPR was disabled.
- Software Tool was used to set Wi-Fi to transmit at maximum power and duty cycle for each band, channel, and modulation.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 9(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

1.8 Highlights of the FCC OET SAR Measurement Requirements


1.8.1 SAR Measurement Procedures for 802.11 a/b/g/n as per KDB 248227 D01 v01r02 and SAR Measurements 100 MHz to 6 GHz as per KDB 865664 D0 V01

- Repeat measurements when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement was performed to reaffirm that the results are not expected to have substantial variations. An additional repeated measurement is required only if the measured results are within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties.
- Maintained dielectric parameter uncertainty to $\pm 5.0\%$ of the target values, (although it is very challenging to control/maintain both permittivity and conductivity for 5-6 GHz for all test channels within $\pm 5.0\%$ of the target values, some conductivity values were measured slightly higher which resulted in more conservative SAR values.
- Liquid depth from SAM ERP or flat phantom was kept at 15 cm.
- Probe Requirement: Used SPEAG probe model ET3DV6/ES3DV3 for 2.45 GHz and EX3DV4 for 5-6 GHz SAR testing specs are outlined below:

ET3DV6/ES3DV3	
Probe tip to sensor center	2.7 mm / 2.0 mm
Probe tip diameter is	6.8 mm / 4.0 mm
Probe calibration uncertainty	$< 15\%$ for $f = 2.45$ GHz
Probe calibration range	± 100 MHz
EX3DV4	
Probe tip to sensor center	1.0 mm
Probe tip diameter is	2.5 mm
Probe calibration uncertainty	$< 15\%$ for $f = 2.45$ to < 6.0 GHz
Probe calibration range	± 100 MHz

Table 1.8.1-1 Probe specification requirements

- Area scan resolution was maintained at 10mm (5-6 GHz)
- Area scan resolution was maintained at 12mm (2-3 GHz)
- Area scan resolution was maintained at 15mm (≤ 2 GHz)
- System accuracy validation was conducted within ± 100 MHz of device mid-band frequency and results were within $\pm 10\%$ of the manufacturers target value for each band.
- Zoom Scan: The following settings were used for the validation and measurement.

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		10(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


ET3DV6/ES3DV3	
Closest Measurement Point to Phantom	4.0 mm
Zoom Scan (x,y) Resolution	7.5 mm (≤2 GHz) or 5 mm (2-3 GHz)
Zoom Scan (z) Resolution	5.0 mm
Zoom Scan Volume	Minimum 30 x 30 x 30 mm ¹
EX3DV4	
Closest Measurement Point to Phantom	2.0 mm
Zoom Scan (x,y) Resolution	4.0 mm (5-6 GHz)
Zoom Scan (z) Resolution	2.0 mm (5-6 GHz)
Zoom Scan Volume	Minimum 22 x 22 x 22 mm ¹

Table 1.8.1-2 Zoom Scan requirement

Note 1: “Auto-extend zoom scan when maxima on boundary” is enabled, which can result in the zoom scan dimensions varying between 30x30x30 to 60x60x30 mm and 22x22x22 to 48x40x22 mm.

- Frequency Channel Configuration: 802.11 b/g modes are tested on “default test channels” 1, 6 and 11.
- 802.11a is tested for UNII operations on the highest output power channel of each sub band (low, mid, upper band I, and upper band II). If the highest output power channel has a SAR level that is not 3dB lower than the limit, then the low, mid, and high channels of each sub band must also be tested.
- For each frequency band, testing at higher rates and higher modulations is not required when the maximum average output power for each of these configurations is less than ¼ dB higher than those measured at the lowest data rate.
- SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.
- SAR test was conducted on each “default test channel” and each band with the worst case modulation and highest duty cycle, if the SAR level was within 3dB of the limit.
- Conducted power measurements:


802.11b @ 1Mbps			802.11g @ 6Mbps			802.11n @ 6.5 Mbps		
f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)
2412	1	19.3	2412	1	13.8	2412	1	12.8
2437	6	19.8	2437	6	18.2	2437	6	17.2
2462	11	19.0	2462	11	13.5	2462	11	13.5
2472	13	12.7	2472	13	12.3	2472	13	12.2
802.11g			802.11b					
Data Rate (Mbps)	Mod.	Channel 6	Data Rate (Mbps)	Mod.	Channel 6			
		Max Avg. Cond. Power (dBm)			Max Avg. Cond. Power (dBm)			
6	BPSK	18.2	1	BPSK	19.8			
9	BPSK	18.2	2	DQPSK	19.7			

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		11(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

12	QPSK	18.0	5.5	CCK	19.6
18	QPSK	17.9	11	CCK	19.6
24	16-QAM	16.8			
36	16-QAM	16.6			
48	64-QAM	15.3			
54	64-QAM	15.2			
802.11n					
Data Rate (Mbps)		Mod.		Channel 6	
				Max Avg. Cond. Power (dBm)	
6.5		MCS0		17.2	
13		MCS1		17.1	
19.5		MCS2		16.1	
26		MCS3		16.0	
39		MCS4		14.7	
52		MCS5		14.5	
58.5		MCS6		13.5	
65		MCS7		13.5	

Table 1.8.1-3a 802.11 b/g/n modulation type/data rate vs. maximum average conducted power at full power level

802.11b @ 1Mbps			802.11g @ 6Mbps			802.11n @ 6.5 Mbps		
f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)
2412	1	14.53	2412	1	14.94	2412	1	14.93
2437	6	14.97	2437	6	15.41	2437	6	15.38
2462	11	14.21	2462	11	14.62	2462	11	14.59
2472	13	13.91	2472	13	13.39	2472	13	13.35
802.11g			802.11b					
Data Rate (Mbps)	Mod.	Channel 6	Data Rate (Mbps)	Mod.	Channel 6			
		Max Avg. Cond. Power (dBm)			Max Avg. Cond. Power (dBm)			
6	BPSK	15.41	1	BPSK	14.97			
9	BPSK	15.29	2	DQPSK	14.91			
12	QPSK	15.21	5.5	CCK	14.93			
18	QPSK	15.08	11	CCK	14.77			
24	16-QAM	14.95						
36	16-QAM	14.79						

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		12(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


48	64-QAM	14.50			
54	64-QAM	14.41			
802.11n					
Data Rate (Mbps)		Mod.	Channel 6		
			Max Avg. Cond. Power (dBm)		
6.5		MCS0	15.38		
13		MCS1	15.36		
19.5		MCS2	15.34		
26		MCS3	15.35		
39		MCS4	15.37		
52		MCS5	15.34		
58.5		MCS6	15.35		
65		MCS7	15.36		

Table 1.8.1-3b 802.11 b/g/n modulation type/data rate vs. maximum average conducted power at hotspot power level


Note: There is fixed power reduction on Wi-Fi in hotspot mode. Power reduction is triggered when device is set to Hotspot mode.

802.11b @ 1Mbps			802.11g @ 6Mbps			802.11n @ 6.5 Mbps		
f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)
2412	1	13.1	2412	1	13.2	2412	1	13.2
2437	6	13.6	2437	6	13.7	2437	6	13.7
2462	11	12.8	2462	11	12.7	2462	11	12.8
802.11g					802.11b			
Data Rate (Mbps)	Mod.	Channel 6	Data Rate (Mbps)	Mod.	Channel 6			
		Max Avg. Cond. Power (dBm)			Max Avg. Cond. Power (dBm)			
18	QPSK	13.7	5.5	CCK	13.7			
54	64-QAM	13.7	11	CCK	13.7			
802.11n								
Data Rate (Mbps)		Mod.	Channel 6					
			Max Avg. Cond. Power (dBm)					
26		MCS3		13.7				
65		MCS7		13.6				

Table 1.8.1-3c 802.11 b/g/n modulation type/data rate vs. maximum average conducted power in 802.11b Wi-Fi Direct/GO mode

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 13(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	


802.11a (low band) 6Mbps			802.11a (mid band) 6Mbps			802.11a (upper band I) 6Mbps		
f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)
5180	36	13.13	5260	52	14.82	5520	104	17.33
5200	40	13.05	5280	56	14.73	5580	116	17.15
5220	44	12.99	5300	60	14.73	5620	124	17.08
5240	48	12.99	5320	64	12.73	5680	136	17.00
						5700	140	14.60
						802.11a (upper band II) 6Mbps		
						f (MHz)	Chan	Max Avg. Cond. Power (dBm)
						5745	149	11.89
						5765	153	16.56
						5785	157	16.40
						5805	161	16.31
						5825	165	11.51
		802.11a (lower band)	802.11a (middle band)	802.11a (upper band I)	802.11a (upper band II)			
Data Rate (Mbps)	Mod.	Channel 36	Channel 52	Channel 104	Channel 153			
		Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)			
6	BPSK	13.13	14.82	17.33	16.56			
9	BPSK	13.00	14.71	17.22	16.46			
12	QPSK	12.93	14.66	16.21	15.47			
18	QPSK	12.82	14.52	16.10	15.34			
24	16-QAM	12.71	14.11	14.93	14.16			
36	16-QAM	12.48	14.15	14.69	13.91			
48	64-QAM	12.25	13.25	13.40	12.69			
54	64-QAM	12.12	13.14	13.32	12.59			
	802.11n (lower band)	802.11n (middle band)	802.11n (upper band I)	802.11n (upper band II)				
Mod.	Channel 36	Channel 52	Channel 104	Channel 153				
	Avg. Cond. Power (dBm)	Avg. Cond. Power (dBm)	Avg. Cond. Power (dBm)	Avg. Cond. Power (dBm)				

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		14(89)	
Author Data	Dates of Test		Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014		RTS-6046-1310-25 Rev 3	L6ARFV120LW	

MCS0	13.04	14.06	16.35	11.80
MCS1	12.95	13.96	16.23	11.69
MCS2	12.91	12.89	15.14	11.61
MCS3	12.81	12.78	14.98	11.51
MCS4	12.68	14.35	13.79	11.32
MCS5	12.52	14.20	13.64	11.23
MCS6	12.46	14.16	12.46	11.16
MCS7	12.39	14.07	12.48	11.08

Table 1.8.1-4a 802.11 a/n modulation type/data rate vs. maximum average conducted power at max power level


802.11a (low band) 6Mbps			802.11a (mid band) 6Mbps			802.11a (upper band I) 6Mbps		
f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)	f (MHz)	Chan	Max Avg. Cond. Power (dBm)
5180	36	13.12	5260	52	14.82	5520	104	14.98
5200	40	13.06	5280	56	14.71	5580	116	14.80
5220	44	13.01	5300	60	14.65	5620	124	14.70
5240	48	13.00	5320	64	12.71	5680	136	14.65
						5700	140	14.51
						802.11a (upper band II) 6Mbps		
						f (MHz)	Chan	Max Avg. Cond. Power (dBm)
						5745	149	11.89
						5765	153	14.86
						5785	157	14.72
						5805	161	14.60
						5825	165	11.51
		802.11a (lower band)	802.11a (middle band)	802.11a (upper band I)	802.11a (upper band II)			
Data Rate (Mbps)	Mod.	Channel 36	Channel 52	Channel 104	Channel 153			
		Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)			
6	BPSK	13.12	14.82	14.98	14.86			
9	BPSK	13.00	14.71	14.82	14.68			
12	QPSK	12.93	14.66	14.75	14.55			
18	QPSK	12.82	14.52	14.63	14.41			

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		15(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

24	16-QAM	12.71	14.11	14.51	14.03
36	16-QAM	12.48	14.15	14.28	13.80
48	64-QAM	12.25	13.25	13.32	12.61
54	64-QAM	12.12	13.14	13.24	12.52
	802.11n (lower band)	802.11n (middle band)	802.11n (upper band I)	802.11n (upper band II)	
	Channel 36	Channel 52	Channel 104	Channel 153	
Mod.	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	Max Avg. Cond. Power (dBm)	
MCS0	12.99	14.01	14.89	11.74	
MCS1	12.96	13.87	14.78	11.63	
MCS2	12.79	12.85	14.68	11.55	
MCS3	12.77	12.75	14.60	11.49	
MCS4	12.58	14.30	13.76	11.36	
MCS5	12.43	14.17	13.60	11.21	
MCS6	12.35	14.10	12.46	11.15	
MCS7	12.37	14.03	12.39	11.07	

Table 1.8.1-4b 802.11 a/n modulation type/data rate vs. maximum average conducted power at reduced simultaneous transmission power level with cellular bands (GSM/GPRS/UMTS/HSPA/LTE)


Note: There is fixed power reduction on 802.11a/n which is triggered when transmitting simultaneously with cellular modes (bands: GSM/GPRS/UMTS/HSPA/LTE voice and data).

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 16(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

802.11a/n Conducted Power in Wi-Fi Direct/GO/Hotspot Mode					
802.11a (low band) 6Mbps			802.11a (upper band II) 6Mbps		
f (MHz)	Chan	Max. average conducted power (dBm)	f (MHz)	Chan	Max. average conducted power (dBm)
5180	36	10.34	5745	149	10.33
5200	40	10.29	5765	153	10.30
5220	44	10.24	5785	157	10.27
5240	48	10.20	5805	161	10.15
			5825	165	10.10
		802.11a (lower band)	802.11 a (upper band II)		
		Channel 36	Channel 149		
Data Rate (Mbits)		Max. average conducted power (dBm)	Max. average conducted power (dBm)		
6		10.34	10.33		
24		10.32	10.31		
54		10.30	10.30		
		802.11n (lower band)	802.11n (upper band II)		
		Channel 36	Channel 149		
Mod.		Max. average conducted power (dBm)	Max. average conducted power (dBm)		
MCS0		10.32	10.33		
MCS4		10.30	10.32		
MCS7		10.30	10.30		

Table 1.8.1-4c 802.11 a/n modulation type/data rate vs. maximum average conducted power in 802.11a Direct/Go and Hotspot mode measured using BlackBerry model RFW121LW

Note: 802.11a/n Hotspot mode does not support channels 52-140

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		17(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

1.8.2 SAR Measurement Requirements for Bluetooth

Channel	Freq (MHz)	Mode	Modulation	Conducted Transmit Power (dBm) Average Peak
0	2402	DH5	GFSK	8.0
39	2441			9.8
78	2480			6.5
0	2402	2-DH5	$\pi/4$ -DQPSK	7.0
39	2441			8.3
78	2480			5.3
0	2402	3-DH5	8-DPSK	7.1
39	2441			8.5
78	2480			5.5


Table 1.8.2-1 Bluetooth maximum peak conducted power measurements

1.8.3 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities as per KDB 941225 D06 v01

Standalone personal wireless routers and handsets with hotspot mode capabilities must address hand-held and other near-body exposure conditions to show SAR compliance. The following procedures are applicable when the overall device length and width are ≥ 9 cm x 5 cm respectively. A test separation of 10 mm is required. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge, for the data modes, wireless technologies and frequency bands supporting hotspot mode. The standalone SAR results in each device test orientation must be analyzed for the applicable hotspot mode simultaneous transmission configurations to determine SAR test exclusion and volume scan requirements.

Static/fixed power reduction scheme on the following modes/bands have been implemented when Hotspot Mode is enabled or active to comply with body SAR with 10 mm test separation from flat phantom on standalone transmitter and multi-band simultaneous transmission conditions:

This lower power level is triggered when device is placed in the hotspot mode.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 18(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

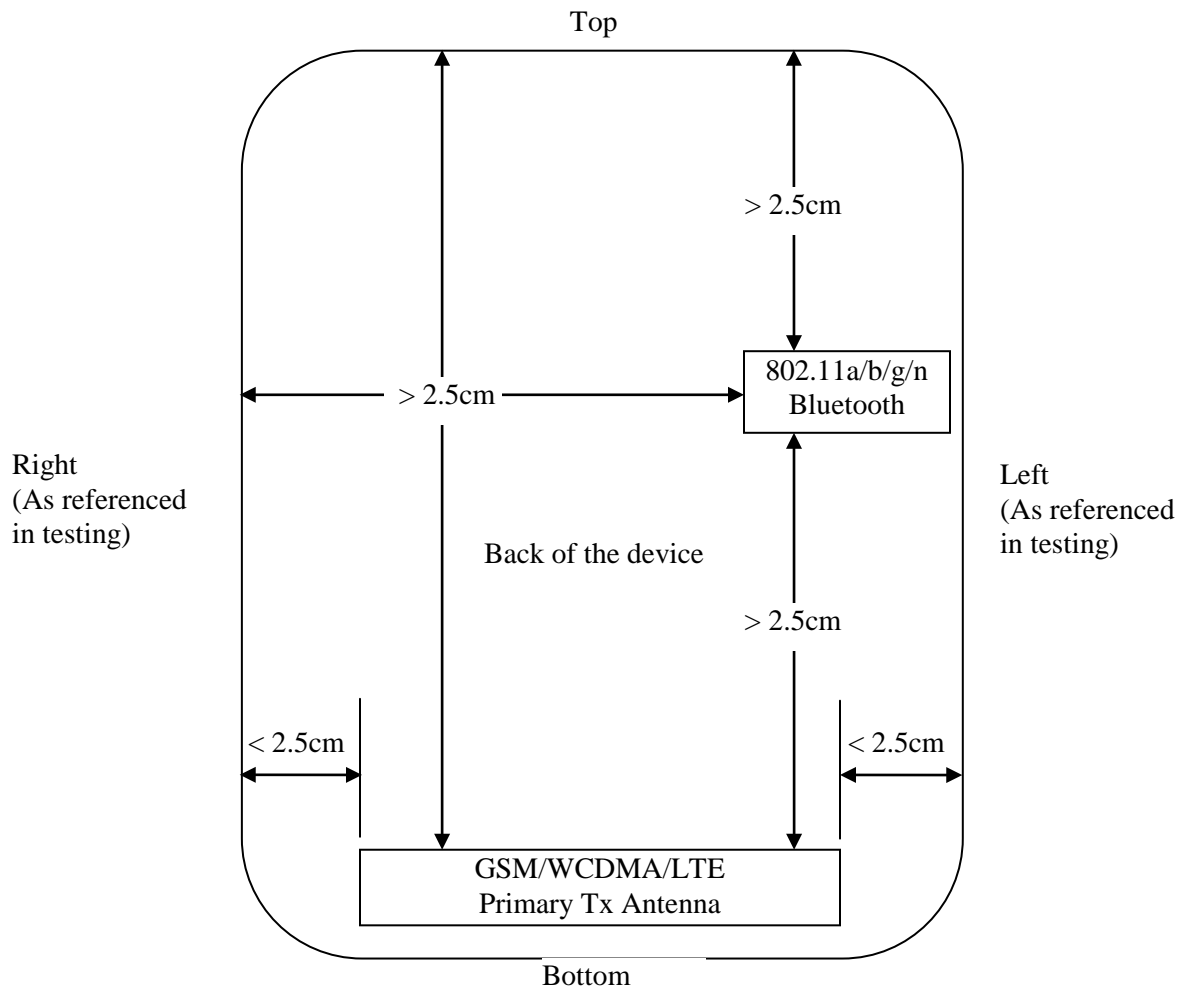



Figure 1.8.3-1 Identification of all sides for SAR Testing.

Note: According to FCC guidance, Hotspot SAR testing is not required on any edge that is more than 2.5cm from the transmitting antenna.

Hotspot Sides for SAR Testing						
Mode	Front	Back	Top	Bottom	Left	Right
LTE/GSM/EDGE/GPRS/WCDMA/HSPA 750/850/1800/1900	Yes	Yes	No	Yes	Yes	Yes
Bluetooth 2.4GHz/802.11b 2.4GHz/802.11a 5.0GHz	Yes	Yes	No	No	Yes	No


Table 1.8.3-1 Identification of all sides for SAR Testing

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		19(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	


1.8.4 SAR Evaluation Procedures for GSM/(E)GPRS Dual Transfer Mode as per KDB 941225 D04 v01 and SAR Test Reduction Procedures GSM GPRS EDGE as per DDB 941225 D03 v01

- The device supports EGPRS/GPRS Multi-slot Class 12, DTM/GPRS Multi-slot Class11 and DTM/EGPRS Multi-slot Class10.
- CMU200 base station simulator with DTM software option CMU-K44 was used to set device in DTM (CS+PD) mode for testing. However, device could not be connected in DTM 4-slots uplink.
- For each slot addition in multi-slot modes (DTM, GPRS, EDGE), there is software power reduction of ~ 2 dB per slot.
- For head configurations, 1 slot CS, 2/3/4-slots (PD) and DTM (CS+PD) were evaluated.
- For body SAR configurations, 2/3/4-slots GPRS (PD) mode were tested.
- In EDGE/GPRS mode, GMSK Modulation was used using CS1-CS4 or MCS1-MCS4.
- 8-PSK modulation or MCS5-MCS9 code scheme were avoided since maximum burst avg . power was measured lower on those modulation schemes.
- Please refer to the conducted power measurements table below:

Mode	Freq. (MHz)	Channel	Max burst averaged conducted power (dBm) CS1	Max burst averaged conducted power (dBm) MCS1	Max burst averaged conducted power (dBm) MCS5	
2-slots GPRS 850 MHz	824.2	128	29.0			
	836.8	190	29.1			
	848.8	251	29.0			
3-slots GPRS 850 MHz	824.2	128	28.1			
	836.8	190	28.2			
	848.8	251	27.9			
4-slots GPRS 850 MHz	824.2	128	26.1			
	836.8	190	26.2			
	848.8	251	25.8			
2-slots EDGE 850 MHz	824.2	128	29.0	29.0	26.3	
	836.8	190	29.1	29.1	26.3	
	848.8	251	29.0	28.9	26.1	
2-slots DTM 850 MHz	824.2	128	30.1	30.1	30.1	26.2
	836.8	190	29.8	29.8	29.8	26.3
	848.8	251	29.7	29.7	29.7	26.3
3-slots EDGE 850 MHz	824.2	128	28.1	28.1	25.0	
	836.8	190	28.2	28.2	25.0	
	848.8	251	27.8	27.9	24.7	

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		20(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


3-slots DTM 850 MHz	824.2	128	28.9	29.0	29.0	25.0
	836.8	190	28.8	28.8	28.7	25.0
	848.8	251	28.6	28.7	28.6	24.7
4-slots EDGE 850 MHz	824.2	128	26.1	26.1	23.9	
	836.8	190	26.2	26.1	24.0	
	848.8	251	25.8	25.8	23.6	
2-slots GPRS 1900 MHz	1850.2	512	27.7			
	1880.0	661	27.7			
	1909.8	810	27.8			
3-slots GPRS 1900 MHz	1850.2	512	25.4			
	1880.0	661	25.3			
	1909.8	810	25.5			
4-slots GPRS 1900 MHz	1850.2	512	24.8			
	1880.0	661	24.8			
	1909.8	810	24.9			
2-slots EDGE 1900MHz	1850.2	512	27.5	27.5	24.6	
	1880.0	661	27.6	27.6	24.5	
	1909.8	810	27.5	27.7	24.7	
2-slots DTM 1900MHz	1850.2	512	28.2	28.3	28.2	24.6
	1880.0	661	28.2	28.2	28.2	24.5
	1909.8	810	28.4	28.4	28.4	24.7
3-slots EDGE 1900MHz	1850.2	512	25.2	25.3	23.6	
	1880.0	661	25.3	25.3	23.5	
	1909.8	810	25.4	25.5	23.7	
3-slots DTM 1900MHz	1850.2	512	25.5	25.5	25.5	23.6
	1880.0	661	25.6	25.5	25.5	23.5
	1909.8	810	25.7	25.8	25.8	23.7
4-slots EDGE 1900MHz	1850.2	512	24.8	24.8	22.7	
	1880.0	661	24.7	24.7	22.7	
	1909.8	810	24.8	24.9	23.0	
Mode		Freq. (MHz)		Channel	Max burst averaged conducted power (dBm)	
1-slot GSM (CS) 850 MHz		824.2		128	33.4	
		836.8		190	33.2	
		848.8		251	33.0	
1-slot GSM (CS) 1900 MHz		1850.2		512	29.9	
		1880.0		661	29.9	
		1909.8		810	30.0	

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		21(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

1.8.4-1 GSM/EDGE/GPRS channel vs. conducted power

1.8.5 SAR Measurement Procedure for Fast SAR Scan as per KDB 447498

- Area scan based 1-g SAR estimation.
 - Very specific implementation of fast SAR methods.
 - Reported in the 29th BEMS meeting in 2009.
 - Using the specific polynomial fit algorithm.
 - Other implementations are not considered.
- When estimated 1-g SAR is ≤ 1.2 W/kg, zoom scan is not required according to the following:
 - Zoom scan is not required for any other purposes.
 - Peaks are distinctively identified in the area scan.
 - No sharp gradients: SAR at 1 cm from peak $\geq 40\%$ of peak value.
 - No measurement warnings or alerts for other measurement issues.
- 1-g SAR for estimated & zoom scan in the system verification (dipole) must be within 3% of each other to utilize Fast SAR.
- 1g Fast SAR values for dipole validation scans are generally more conservative than the standard SAR scans.
- Regardless of the SAR value, a zoom scan is required for the highest SAR configuration in each frequency band and wireless mode.
- Fast SAR Algorithm: The approach is based on the area scan using DASY5 system.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		22(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

1.8.6 SAR Measurement Procedures for 3G Devices

WCDMA Handsets

Output Power Verification

- Maximum output power is verified on the High, Middle and Low channels using 12.2 kbps RMC, 12.2 kbps AMR with a 3.4 kbps SRB (signal radio bearer) with TPC (transmit power control) set to all “1’s” for WCDMA/HSPA or applying the required inner loop.
- For Release 6 HSPA/Release 7 HSDPA⁺, output power is measured according to requirements for HS-DPCCH Sub-test 1-4/1-5 and 3GPP TS 34.121.

Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCH_n, when supported by the DUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH_n using the exposure configuration that results in the highest SAR with 12.2 RMC.

Handsets with HSPA


Body SAR is not required for handsets with HSPA/HSPA+ capabilities, when the maximum average output of each RF channel with HSPA active is less than ¼ dB higher than that measured in 12.2 kbps RMC without HSPA/HSPA+. Otherwise, SAR for HSPA is measured using FRC (fixed reference channel) in the body exposure configuration that results in the highest SAR for that RF channel in 12.2 kbps RMC.

1.8.7 Test Setup information for WCDMA / HSPDA / HSUPA

a) WCDMA RMC

In RMC (reference measurement channel) mode there are 4 different bit rates that correspond with the used spreading factors as follows:

<i>Bit rate</i>	<i>12.2 kbit/s</i>	<i>64 kbit/s</i>	<i>144 kbit/s</i>	<i>384 kbit/s</i>
Spreading factor (SF)	64	16	8	4

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		23(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

In RMC mode only DPCCCH and DPDCH are active. As bit rate changes do not influence the relative power of any code channel the measured RMS output power remains on the same level which is set to maximum by TPC (Transmit power control) pattern type 'All 1'.

b) HSDPA

HSDPA adds the HS-DPCCH in uplink as a control channel for high speed data transfer in downlink. In HSDPA mode 4 sub-tests are defined by 3GPP 34.121 according to the following table:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$
Note 2 : CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$
Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$


Table 1.8.7-1 Sub-tests for UMTS Release 5 HSDPA

The β_c and β_d gain factors for DPCCCH and DPDCH were set according to the values in the above table, β_{hs} for HS-DPCCH is set automatically to the correct value when $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8$. The variation of the β_c/β_d ratio causes a power reduction at sub-tests 2 - 4.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 1.8.7-2 Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 24(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

c) DC-HSDPA (3GPP Release 8)

Dual Cell – HSDPA has been signaled using the following settings for connection setup:

Parameter	Value
During Connection Setup	
P-CPICH_Ec/Ior	-10 dB
P-CCPCH	-12
SCH_Ec/Ior	-12
PICH_Ec/Ior	-15
HS-PDSCH	off
HS-SCCH_1	off
DPCH_Ec/Ior	-5
OCNS_Ec/Ior	-3.1


Table 1.8.7-3 Downlink Physical Channels according to 3GPP 34.121 Table E.5.0

The fixed reference channel has been set to H-set 12 according to 3GPP TS 34.121 Table C.8.1.12:

Parameter	Unit	Value
Nominal Average Inf. Bit Rate	kbit/s	60
Inter-TTI Distance	TTI's	1
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Process	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codecs	Codecs	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Table 1.8.7-4 H-Set 12 QPSK configuration

The same Sub-test settings as for Release 5 HSDPA were used for the tests.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 25(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

d) HSUPA

In HSUPA mode additional code channels (E-DPCCH, E-DPDCHn) are added for data transfer in uplink at higher bit rates.

5 sub-tests are defined by 3GPP 34.121 according to the following table :


Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$
Note 2 : CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference
Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$
Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$
Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g
Note 6 : β_{ed} cannot be set directly; it is set by Absolute Grant Value

Table 1.8.7-5 Subtests for UMTS Release 6 HSUPA

To achieve the settings above some additional procedures were defined by 3GPP 34.121. Those have been included in an application note for the CMU200 and were exactly followed :

- Test mode connection (BS signal tab) :
- RMC 12.2 kbit/s + HSPA 34.108 with loop mode 1
- HS-DSCH settings (BS signal tab):
- FRC with H-set 1 QPSK
- ACK-NACK repetition factor = 3
- CQI feedback cycle = 4ms
- CQI repetition factor = 2
- HSUPA-specific signalling settings (UE signal tab) :
- E-TFCI table index = 0
- E-DCH minimum set E-TFCI = 9
- Puncturing limit non-max = 0.84
- max. number of channelisation codes = 2x SF4
- Initial Serving Grant Value = Off
- HSDPA and HSUPA Gain factors (UE signal tab)

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 26(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Sub-test	β_c	β_d	$\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$	$\Delta E-DPCCH^*$
1	10	15	8	6
2	6	15	8	8
3	15	9	8	8
4	2	15	8	5
5	14	15	8	7

* β_{ec} and β_{ed} ratios (relative to β_c and β_d) are set by $\Delta E-DPCCH$

- HSUPA Reference E-TFCIs (UE signal tab > HSUPA gain factors) :

Sub-test	1, 2, 4, 5				
Number of E-TFCIs	5				
Reference E-TFCI	11	67	71	75	81
Reference E-TFCI power offset	4	18	23	26	27

Sub-test	3	
Number of E-TFCIs	2	
Reference E-TFCI	11	92
Reference E-TFCI power offset	4	18

- HSUPA-specific generator parameters (BS Signal tab > HSUPA > E-AGCH > AG Pattern)

Sub-test	Absolute Grant Value (AG Index)
1	20
2	12
3	15
4	17
5	21

- Power Level settings (BS Signal tab > Node B-settings):

- Level reference : Output Channel Power (lor)

- Output Channel Power (lor) : -86 dBm

- Downlink Physical Channel Settings (BS signal tab)

- P-CPICH : -10 dB

- S-CPICH : Off

- P-SCH : -15 dB


- S-SCH : -15 dB

- P-CCPCH : -12 dB

- S-CCPCH : -12 dB

- PICH : -15 dB

- AICH : -12 dB

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		27(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

- DPDCH : -10 dB
- HS-SCCH : -8 dB
- HS-PDSCH : -3 dB
- E-AGCH : -20 dB
- E-RGCH/E-HICH - 20 dB
- E-RGCH Active : Off

The settings above were stored once for each sub-test and recalled before the measurement.

To reach maximum output power in HSUPA mode the following procedures were followed:

3 different TPC patterns were defined :

Set 1 : Closed loop with target power 10 dBm

Set 2 : Single Pattern+Alternating with binary pattern '11111' for 1 dB steps 'up'

Set 3 : Single Pattern+Alternating with binary pattern '00000' for 1 dB steps 'down'

After recalling a certain HSUPA sub-test the HSUPA E-AGCH graph with E-TFCI event counter is displayed. After starting with the closed loop command the power is increased in 1 dB steps by activating pattern set 2 until the UE decreases the transmitted E-TFCI.

At this point set 3 is activated once to reduce the output power to the value at which the original E-TFCI, which is required for the sub-test, appears again.


For conducted power measurements the same steps are repeated in the power menu to read out the corresponding maximum RMS output power with the target E-TFCI.

For SAR measurements it is useful to switch to Code Domain Power vs. Time display.

Here the CMU200 shows relative power values (max. and min.) of each code channel which should roughly correspond to the numerators of the gain factors e.g. :


Sub-test	β_c	β_d	β_{hs}	β_{ec}	β_{ed}
5	15	15	30	24	134

	Band	FDD V (850)		
	Freq (MHz)	826.4	836.4	846.6
	Channel	4132	4182	4233
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	23.0	23.2	23.1
Rel99	12.2kbps, Voice, AMR, SRB 3.4 kbps	23.1	23.2	23.1
HSUPA	1	21.6	21.8	21.6
HSUPA	2	21.3	21.6	21.4
HSUPA	3	22.2	22.3	22.2
HSUPA	4	22.0	22.2	22.1
HSUPA	5	21.2	21.5	21.2

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 28(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

HSDPA+	1	22.1	22.2	22.1
HSDPA+	2	20.6	20.7	20.7
HSDPA+	3	19.3	19.2	19.4
HSDPA+	4	18.8	19.0	18.6
	Band	FDD IV (1700)		
	Freq (MHz)	1712.4	1732.6	1752.6
	Channel	1312	1413	1513
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	23.0	23.0	23.0
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	23.0	23.0	22.9
HSUPA	1	21.7	21.6	21.6
HSUPA	2	21.4	21.3	21.3
HSUPA	3	22.2	22.1	22.0
HSUPA	4	22.1	22.0	21.9
HSUPA	5	21.3	21.2	21.1
HSDPA+	1	22.1	22.0	22.1
HSDPA+	2	20.7	20.8	20.6
HSDPA+	3	19.3	19.4	19.0
HSDPA+	4	19.0	19.1	19.4
	Band	FDD II (1900)		
	Freq (MHz)	1852.4	1880.0	1907.6
	Channel	9262	9400	9538
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	22.7	22.6	22.9
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	22.7	22.6	22.8
HSUPA	1	21.3	21.1	21.4
HSUPA	2	21.0	20.9	21.1
HSUPA	3	21.8	21.7	21.9
HSUPA	4	21.7	21.6	21.8
HSUPA	5	20.9	20.7	20.9
HSDPA+	1	21.8	21.5	21.9
HSDPA+	2	20.5	20.7	20.7
HSDPA+	3	19.0	18.9	19.8
HSDPA+	4	19.0	18.8	19.0

Table 1.8.7-6 WCDMA (Rel99) / HSPA/HSPA+ conducted power measurements

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		29(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

1.8.8 SAR Evaluation Procedures for LTE as per KDB 941225 D05 v02

“1. QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and *required test channel* combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each *required test channel*. When the *reported* SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and *required test channels* is not required for 1 RB allocation; otherwise, SAR is required for the remaining *required test channels* and only for the RB offset configuration with the highest output power for that channel.⁶ When the *reported* SAR of a *required test channel* is > 1.45 W/kg, SAR is required for all three RB offset configurations for that *required test channel*.

2. QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1. are applied to measure the SAR for QPSK with 50% RB allocation.

3. QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest *reported* SAR for 1 RB and 50% RB allocation in 1. and 2. are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the *reported* SAR is > 1.45 W/kg, the remaining *required test channels* must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 1. and 2. and 3. to determine the QAM configurations that may need SAR measurement.

For each configuration

identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the *reported* SAR for the QPSK configuration is > 1.45 W/kg.


4. Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

The equivalent channel configuration for the RB allocation, RB offset and modulation etc. Is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth.


However, 50% RB allocation in 10 MHz channel bandwidth

is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.”


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		30(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

- MPR has been implemented permanently by the manufacturer as per 3GPP TS36.101
- A-MPR was disabled for all SAR measurements.
- LTE Head SAR was evaluated to cover third-party VoIP applications at full power.
- LTE Head SAR was evaluated in SVLTE mode at lowered LTE power.
- According to “3GPP TS 36.521-1 V10.0.0 (2011-12)”:
 - “The channel numbers that designate carrier frequencies so close to the operating band edges that the carrier extends beyond the operating band edge shall not be used. This implies that the first 7, 15, 25, 50, 75 and 100 channel numbers at the lower operating band edge and the last 6, 14, 24, 49, 74 and 99 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively.”...


LTE Band	BW (MHz)	Mod.	Channel	RB#	RB OFFSET	Avg. Power (dBm)
2	20	QPSK	18700	1	LOW	22.21
2	20	QPSK	18700	1	MID	22.38
2	20	QPSK	18700	1	HIGH	22.27
2	20	QPSK	18700	50	LOW	21.21
2	20	QPSK	18700	50	HIGH	21.29
2	20	QPSK	18700	100	LOW	21.19
2	20	Q16	18700	1	LOW	21.25
2	20	Q16	18700	1	MID	21.35
2	20	Q16	18700	1	HIGH	21.27
2	20	Q16	18700	75	LOW	20.19
2	20	Q16	18700	75	HIGH	20.25
2	20	Q16	18700	100	LOW	20.20
2	20	QPSK	18900	1	LOW	22.12
2	20	QPSK	18900	1	MID	22.09
2	20	QPSK	18900	1	HIGH	22.13
2	20	QPSK	18900	50	LOW	21.12
2	20	QPSK	18900	50	HIGH	20.92
2	20	QPSK	18900	100	LOW	21.10
2	20	Q16	18900	1	LOW	21.86
2	20	Q16	18900	1	MID	21.78
2	20	Q16	18900	1	HIGH	21.84
2	20	Q16	18900	75	LOW	20.10

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		31(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

2	20	Q16	18900	75	HIGH	20.08
2	20	Q16	18900	100	LOW	20.15
2	20	QPSK	19100	1	LOW	22.04
2	20	QPSK	19100	1	MID	22.10
2	20	QPSK	19100	1	HIGH	22.03
2	20	QPSK	19100	50	LOW	21.04
2	20	QPSK	19100	50	HIGH	20.97
2	20	QPSK	19100	100	LOW	20.95
2	20	Q16	19100	1	LOW	21.16
2	20	Q16	19100	1	MID	21.17
2	20	Q16	19100	1	HIGH	21.13
2	20	Q16	19100	75	LOW	20.06
2	20	Q16	19100	75	HIGH	20.00
2	20	Q16	19100	100	LOW	20.02
2	15	QPSK	18900	1	LOW	22.10
2	15	QPSK	18900	1	MID	22.10
2	15	QPSK	18900	1	HIGH	22.00
2	15	QPSK	18900	36	LOW	21.11
2	15	QPSK	18900	36	HIGH	21.02
2	15	QPSK	18900	75	LOW	21.02
2	15	Q16	18900	1	LOW	21.04
2	15	Q16	18900	1	MID	20.99
2	15	Q16	18900	1	HIGH	20.89
2	15	Q16	18900	16	LOW	21.22
2	15	Q16	18900	16	HIGH	21.09
2	15	Q16	18900	75	LOW	20.09
2	10	QPSK	18900	1	LOW	22.18
2	10	QPSK	18900	1	MID	22.10
2	10	QPSK	18900	1	HIGH	22.06
2	10	QPSK	18900	25	LOW	21.21
2	10	QPSK	18900	25	HIGH	21.11
2	10	QPSK	18900	50	LOW	21.06
2	10	Q16	18900	1	LOW	21.73
2	10	Q16	18900	1	MID	21.67
2	10	Q16	18900	1	HIGH	21.62

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		32(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


2	10	Q16	18900	30	LOW	20.33
2	10	Q16	18900	30	HIGH	20.23
2	10	Q16	18900	50	LOW	20.13
2	5	QPSK	18900	1	LOW	22.01
2	5	QPSK	18900	1	MID	22.08
2	5	QPSK	18900	1	HIGH	22.01
2	5	QPSK	18900	10	LOW	21.15
2	5	QPSK	18900	10	HIGH	21.12
2	5	QPSK	18900	25	LOW	21.06
2	5	Q16	18900	1	LOW	20.80
2	5	Q16	18900	1	MID	20.75
2	5	Q16	18900	1	HIGH	20.71
2	5	Q16	18900	8	LOW	21.20
2	5	Q16	18900	8	HIGH	21.19
2	5	Q16	18900	25	LOW	20.24
2	3	QPSK	18900	1	LOW	21.96
2	3	QPSK	18900	1	MID	22.04
2	3	QPSK	18900	1	HIGH	22.03
2	3	QPSK	18900	6	LOW	21.20
2	3	QPSK	18900	6	HIGH	21.08
2	3	QPSK	18900	15	LOW	21.11
2	3	Q16	18900	1	LOW	21.64
2	3	Q16	18900	1	MID	21.62
2	3	Q16	18900	1	HIGH	21.65
2	3	Q16	18900	4	LOW	21.29
2	3	Q16	18900	4	HIGH	21.32
2	3	Q16	18900	15	LOW	20.32
2	14	QPSK	18900	1	LOW	22.00
2	14	QPSK	18900	1	MID	22.10
2	14	QPSK	18900	1	HIGH	22.11
2	14	QPSK	18900	3	LOW	22.18
2	14	QPSK	18900	3	HIGH	22.17
2	14	QPSK	18900	6	LOW	21.20
2	14	Q16	18900	1	LOW	20.94
2	14	Q16	18900	1	MID	20.86

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		33(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


2	14	Q16	18900	1	HIGH	20.87
2	14	Q16	18900	5	LOW	21.15
2	14	Q16	18900	5	HIGH	21.15
2	14	Q16	18900	6	LOW	20.22

Table 1.8.8-1 LTE band 2 conducted power measurements

LTE Band	BW (MHz)	Mod.	Channel	RB#	RB OFFSET	Avg. Power (dBm)
4	20	QPSK	20050	1	LOW	22.48
4	20	QPSK	20050	1	MID	22.55
4	20	QPSK	20050	1	HIGH	22.52
4	20	QPSK	20050	50	LOW	21.59
4	20	QPSK	20050	50	HIGH	21.45
4	20	QPSK	20050	100	LOW	21.44
4	20	Q16	20050	1	LOW	21.53
4	20	Q16	20050	1	MID	21.56
4	20	Q16	20050	1	HIGH	21.49
4	20	Q16	20050	75	LOW	20.43
4	20	Q16	20050	75	HIGH	20.44
4	20	Q16	20050	100	LOW	20.43
4	20	QPSK	20175	1	LOW	22.38
4	20	QPSK	20175	1	MID	22.30
4	20	QPSK	20175	1	HIGH	22.31
4	20	QPSK	20175	50	LOW	21.40
4	20	QPSK	20175	50	HIGH	21.19
4	20	QPSK	20175	100	LOW	21.29
4	20	Q16	20175	1	LOW	22.14
4	20	Q16	20175	1	MID	22.01
4	20	Q16	20175	1	HIGH	22.03
4	20	Q16	20175	75	LOW	20.36
4	20	Q16	20175	75	HIGH	20.22
4	20	Q16	20175	100	LOW	20.34
4	20	QPSK	20300	1	LOW	22.27
4	20	QPSK	20300	1	MID	22.42
4	20	QPSK	20300	1	HIGH	22.18


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		34(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

4	20	QPSK	20300	50	LOW	21.23
4	20	QPSK	20300	50	HIGH	21.38
4	20	QPSK	20300	100	LOW	21.22
4	20	Q16	20300	1	LOW	21.40
4	20	Q16	20300	1	MID	21.54
4	20	Q16	20300	1	HIGH	21.33
4	20	Q16	20300	75	LOW	20.27
4	20	Q16	20300	75	HIGH	20.32
4	20	Q16	20300	100	LOW	20.30
4	15	QPSK	20175	1	LOW	22.39
4	15	QPSK	20175	1	MID	22.30
4	15	QPSK	20175	1	HIGH	22.02
4	15	QPSK	20175	36	LOW	21.44
4	15	QPSK	20175	36	HIGH	21.19
4	15	QPSK	20175	75	LOW	21.21
4	15	Q16	20175	1	LOW	21.36
4	15	Q16	20175	1	MID	21.20
4	15	Q16	20175	1	HIGH	20.91
4	15	Q16	20175	16	LOW	21.47
4	15	Q16	20175	16	HIGH	21.16
4	15	Q16	20175	75	LOW	20.30
4	10	QPSK	20175	1	LOW	22.37
4	10	QPSK	20175	1	MID	22.30
4	10	QPSK	20175	1	HIGH	22.28
4	10	QPSK	20175	25	LOW	21.54
4	10	QPSK	20175	25	HIGH	21.45
4	10	QPSK	20175	50	LOW	21.32
4	10	Q16	20175	1	LOW	21.93
4	10	Q16	20175	1	MID	21.88
4	10	Q16	20175	1	HIGH	21.87
4	10	Q16	20175	30	LOW	20.56
4	10	Q16	20175	30	HIGH	20.41
4	10	Q16	20175	50	LOW	20.39
4	5	QPSK	20175	1	LOW	22.31
4	5	QPSK	20175	1	MID	22.29


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		35(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

4	5	QPSK	20175	1	HIGH	22.30
4	5	QPSK	20175	10	LOW	21.51
4	5	QPSK	20175	10	HIGH	21.25
4	5	QPSK	20175	25	LOW	21.20
4	5	Q16	20175	1	LOW	21.11
4	5	Q16	20175	1	MID	20.97
4	5	Q16	20175	1	HIGH	21.00
4	5	Q16	20175	8	LOW	21.48
4	5	Q16	20175	8	HIGH	21.32
4	5	Q16	20175	25	LOW	20.39
4	3	QPSK	20175	1	LOW	22.28
4	3	QPSK	20175	1	MID	22.27
4	3	QPSK	20175	1	HIGH	22.11
4	3	QPSK	20175	6	LOW	21.47
4	3	QPSK	20175	6	HIGH	21.35
4	3	QPSK	20175	15	LOW	21.27
4	3	Q16	20175	1	LOW	21.97
4	3	Q16	20175	1	MID	21.84
4	3	Q16	20175	1	HIGH	21.73
4	3	Q16	20175	4	LOW	21.68
4	3	Q16	20175	4	HIGH	21.53
4	3	Q16	20175	15	LOW	20.50
4	14	QPSK	20175	1	LOW	22.24
4	14	QPSK	20175	1	MID	22.31
4	14	QPSK	20175	1	HIGH	22.28
4	14	QPSK	20175	3	LOW	22.39
4	14	QPSK	20175	3	HIGH	22.30
4	14	QPSK	20175	6	LOW	21.42
4	14	Q16	20175	1	LOW	21.21
4	14	Q16	20175	1	MID	21.11
4	14	Q16	20175	1	HIGH	21.11
4	14	Q16	20175	5	LOW	21.37
4	14	Q16	20175	5	HIGH	21.38
4	14	Q16	20175	6	LOW	20.47


Table 1.8.8-2 LTE band 4 conducted power measurements

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 36(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

LTE Band	BW (MHz)	Mod.	Channel	RB#	RB OFFSET	Avg. Power (dBm)
5	10	QPSK	20450	1	LOW	23.25
5	10	QPSK	20450	1	MID	23.38
5	10	QPSK	20450	1	HIGH	23.60
5	10	QPSK	20450	25	LOW	22.51
5	10	QPSK	20450	25	HIGH	22.50
5	10	QPSK	20450	50	LOW	22.38
5	10	Q16	20450	1	LOW	22.33
5	10	Q16	20450	1	MID	22.34
5	10	Q16	20450	1	HIGH	22.55
5	10	Q16	20450	30	LOW	21.59
5	10	Q16	20450	30	HIGH	21.51
5	10	Q16	20450	50	LOW	21.49
5	10	QPSK	20525	1	LOW	23.39
5	10	QPSK	20525	1	MID	23.44
5	10	QPSK	20525	1	HIGH	23.47
5	10	QPSK	20525	25	LOW	22.61
5	10	QPSK	20525	25	HIGH	22.62
5	10	QPSK	20525	50	LOW	22.48
5	10	Q16	20525	1	LOW	22.28
5	10	Q16	20525	1	MID	22.21

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		37(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

5	10	Q16	20525	1	HIGH	22.20
5	10	Q16	20525	30	LOW	21.67
5	10	Q16	20525	30	HIGH	21.60
5	10	Q16	20525	50	LOW	21.55
5	10	QPSK	20600	1	LOW	23.37
5	10	QPSK	20600	1	MID	23.15
5	10	QPSK	20600	1	HIGH	23.32
5	10	QPSK	20600	25	LOW	22.53
5	10	QPSK	20600	25	HIGH	22.43
5	10	QPSK	20600	50	LOW	22.36
5	10	Q16	20600	1	LOW	23.08
5	10	Q16	20600	1	MID	22.81
5	10	Q16	20600	1	HIGH	22.92
5	10	Q16	20600	30	LOW	21.59
5	10	Q16	20600	30	HIGH	21.53
5	10	Q16	20600	50	LOW	21.41
5	5	QPSK	20525	1	LOW	23.43
5	5	QPSK	20525	1	MID	23.54
5	5	QPSK	20525	1	HIGH	23.68
5	5	QPSK	20525	10	LOW	22.69
5	5	QPSK	20525	10	HIGH	22.67
5	5	QPSK	20525	25	LOW	22.53
5	5	Q16	20525	1	LOW	22.91
5	5	Q16	20525	1	MID	22.90
5	5	Q16	20525	1	HIGH	23.02
5	5	Q16	20525	8	LOW	22.61
5	5	Q16	20525	8	HIGH	22.66
5	5	Q16	20525	25	LOW	21.58
5	3	QPSK	20525	1	LOW	23.38
5	3	QPSK	20525	1	MID	23.43
5	3	QPSK	20525	1	HIGH	23.51
5	3	QPSK	20525	6	LOW	22.69
5	3	QPSK	20525	6	HIGH	22.53
5	3	QPSK	20525	15	LOW	22.55
5	3	Q16	20525	1	LOW	23.09


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		38(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

5	3	Q16	20525	1	MID	23.06
5	3	Q16	20525	1	HIGH	23.13
5	3	Q16	20525	4	LOW	22.82
5	3	Q16	20525	4	HIGH	22.84
5	3	Q16	20525	15	LOW	21.77
5	14	QPSK	20525	1	LOW	23.38
5	14	QPSK	20525	1	MID	23.48
5	14	QPSK	20525	1	HIGH	23.47
5	14	QPSK	20525	3	LOW	23.55
5	14	QPSK	20525	3	HIGH	23.52
5	14	QPSK	20525	6	LOW	22.65
5	14	Q16	20525	1	LOW	22.39
5	14	Q16	20525	1	MID	22.33
5	14	Q16	20525	1	HIGH	22.33
5	14	Q16	20525	5	LOW	22.65
5	14	Q16	20525	5	HIGH	22.65
5	14	Q16	20525	6	LOW	21.69


Table 1.8.8-3 LTE band 5 conducted power measurements

Note: does not support 20 MHz, and 15 MHz Bandwidth

LTE Band	BW (MHz)	Mod.	Channel	RB#	RB OFFSET	Avg. Power (dBm)
17	10	QPSK	23780	1	LOW	23.59
17	10	QPSK	23780	1	MID	23.50
17	10	QPSK	23780	1	HIGH	23.32
17	10	QPSK	23780	25	LOW	22.52
17	10	QPSK	23780	25	HIGH	22.42
17	10	QPSK	23780	50	LOW	22.43
17	10	Q16	23780	1	LOW	22.51
17	10	Q16	23780	1	MID	22.43
17	10	Q16	23780	1	HIGH	22.28
17	10	Q16	23780	30	LOW	21.55
17	10	Q16	23780	30	HIGH	21.44
17	10	Q16	23780	50	LOW	21.44

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		39(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


17	10	QPSK	23790	1	LOW	23.31
17	10	QPSK	23790	1	MID	23.45
17	10	QPSK	23790	1	HIGH	23.38
17	10	QPSK	23790	25	LOW	22.49
17	10	QPSK	23790	25	HIGH	22.37
17	10	QPSK	23790	50	LOW	22.37
17	10	Q16	23790	1	LOW	22.15
17	10	Q16	23790	1	MID	22.05
17	10	Q16	23790	1	HIGH	22.05
17	10	Q16	23790	30	LOW	21.43
17	10	Q16	23790	30	HIGH	21.39
17	10	Q16	23790	50	LOW	21.41
17	10	QPSK	23800	1	LOW	23.31
17	10	QPSK	23800	1	MID	23.30
17	10	QPSK	23800	1	HIGH	23.43
17	10	QPSK	23800	25	LOW	22.52
17	10	QPSK	23800	25	HIGH	22.39
17	10	QPSK	23800	50	LOW	22.36
17	10	Q16	23800	1	LOW	22.94
17	10	Q16	23800	1	MID	22.88
17	10	Q16	23800	1	HIGH	22.97
17	10	Q16	23800	30	LOW	21.45
17	10	Q16	23800	30	HIGH	21.44
17	10	Q16	23800	50	LOW	21.45
17	5	QPSK	23790	1	LOW	23.35
17	5	QPSK	23790	1	MID	23.46
17	5	QPSK	23790	1	HIGH	23.35
17	5	QPSK	23790	10	LOW	22.51
17	5	QPSK	23790	10	HIGH	22.42
17	5	QPSK	23790	25	LOW	22.35
17	5	Q16	23790	1	LOW	22.79
17	5	Q16	23790	1	MID	22.74
17	5	Q16	23790	1	HIGH	22.76
17	5	Q16	23790	8	LOW	22.45
17	5	Q16	23790	8	HIGH	22.39

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 40(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

17	5	Q16	23790	25	LOW	21.39
----	---	-----	-------	----	-----	-------

Table 1.8.8-4 LTE band 17 conducted power measurements

Note: does not support 20 MHz, 15 MHz, 3 MHz, 1.4 MHz Bandwidth

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 41(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

1.9 General SAR Test Reduction and Exclusion procedure as per KDB 447498 D01 V05 and SAR Handsets Multi Xmitter and Ant procedure as per 648474 D04 v01

Standalone SAR test exclusion guidance:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*

$$\left(\frac{\text{max. power of channel, including tune – up tolerance (mW)}}{\text{min. test separation distance (mm)}} \times \sqrt{\frac{f}{(\text{GHz})}} \right) \leq 3.0, \text{ For 1g SAR}$$

Where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- If *distance* is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
- The result is rounded to one decimal place for comparison

Simultaneous Transmission SAR Test exclusion considerations:

When the sum of 1-g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. When the sum is greater than the SAR limit, the SAR to peak location separation ratio procedures described below may be applied to determine if simultaneous transmission SAR test exclusion applies.

The ratio is determined by:


$$\left([SAR1 + SAR2]^{\frac{1.5}{R_i}} \right) \leq 0.04$$

Where:

- R_i = the separation distance between the peak SAR locations for the antenna pair (mm)

Simultaneous Transmission SAR required:

- antenna pairs with SAR to antenna separation ratio > 0.04; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		42(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

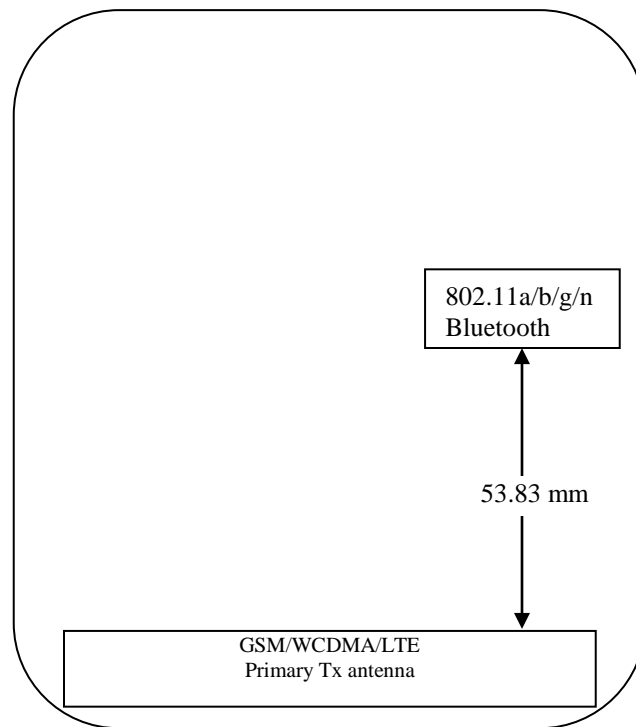


Figure 1.9-1 Back view of device showing closest distance between antenna pairs

1.9.1 Simultaneous Transmission Analysis


Simultaneous Transmission Combination	Head	Body-Worn Accessory	Mobile Hotspot
WCDMA/GSM voice + Wi-Fi 5.0 GHz	Yes	Yes	No
WCDMA/GSM voice + Wi-Fi/BT 2.45 GHz	Yes	Yes	No
HSPA/EDGE/GPRS/LTE data + BT/Wi-Fi 2.45 & 5.0 GHz	Yes	Yes	Yes

Table 1.9.1-1 Simultaneous Transmission Scenarios

Note 1: BT and Wi-Fi cannot transmit simultaneously since the design doesn't allow it and they use the same antenna.

Note 2: 802.11b and 802.11a cannot transmit simultaneously since the design doesn't allow it and they use the same antenna.

Note 3: LTE and GSM/WCDMA cannot transmit simultaneously since it shares the same antenna.


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		43(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

Test	Licensed Transmitters			WiFi 2.4/5.0GHz	Max Sum 1g
	Band	Configuration	1g avg. SAR (W/kg)	1g avg. SAR (W/kg)	avg. SAR (W/kg)
Head SAR	LTE Band 17	Right Head Touch	0.37	0.18	0.55
	LTE Band 17	Right Head Tilt	0.21	0.06	0.27
	LTE Band 17	Left Head Touch	0.44	0.44	0.88
	LTE Band 17	Left Head Tilt	0.26	0.07	0.33
	LTE Band 5	Right Head Touch	0.41	0.18	0.59
	LTE Band 5	Right Head Tilt	0.24	0.06	0.30
	LTE Band 5	Left Head Touch	0.50	0.44	0.94
	LTE Band 5	Left Head Tilt	0.27	0.07	0.34
	GSM/EDGE/GPRS 850	Right Head Touch	0.77	0.18	0.95
	GSM/EDGE/GPRS 850	Right Head Tilt	0.53	0.06	0.59
	GSM/EDGE/GPRS 850	Left Head Touch	0.94	0.44	1.38
	GSM/EDGE/GPRS 850	Left Head Tilt	0.56	0.07	0.63
	UMTS Band V	Right Head Touch	0.39	0.18	0.57
	UMTS Band V	Right Head Tilt	0.21	0.06	0.27
	UMTS Band V	Left Head Touch	0.47	0.44	0.91
	UMTS Band V	Left Head Tilt	0.25	0.07	0.32
	LTE Band 4	Right Head Touch	0.50	0.18	0.68
	LTE Band 4	Right Head Tilt	0.18	0.06	0.24
	LTE Band 4	Left Head Touch	0.55	0.44	0.99
	LTE Band 4	Left Head Tilt	0.22	0.07	0.29
	UMTS Band IV	Right Head Touch	0.49	0.18	0.67
	UMTS Band IV	Right Head Tilt	0.20	0.06	0.26
	UMTS Band IV	Left Head Touch	0.60	0.44	1.04
	UMTS Band IV	Left Head Tilt	0.24	0.07	0.31
	LTE Band 2	Right Head Touch	0.34	0.18	0.52
	LTE Band 2	Right Head Tilt	0.14	0.06	0.20
	LTE Band 2	Left Head Touch	0.64	0.44	1.08
	LTE Band 2	Left Head Tilt	0.12	0.07	0.19
	GSM/EDGE/GPRS 1900	Right Head Touch	0.19	0.18	0.37
	GSM/EDGE/GPRS 1900	Right Head Tilt	0.09	0.06	0.15
	GSM/EDGE/GPRS 1900	Left Head Touch	0.37	0.44	0.81
	GSM/EDGE/GPRS 1900	Left Head Tilt	0.06	0.07	0.13
	UMTS Band II	Right Head Touch	0.33	0.18	0.51
	UMTS Band II	Right Head Tilt	0.16	0.06	0.22
	UMTS Band II	Left Head Touch	0.61	0.44	1.05
	UMTS Band II	Left Head Tilt	0.13	0.07	0.20

Table 1.9.1-2 Highest Head SAR values and summation

Note 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.

Note 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.


		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		44(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Test	Licensed Transmitters			WiFi 5.0GHz	Max Sum 1g
	Band	Configuration	1g avg. SAR (W/kg)	1g avg. SAR (W/kg)	avg. SAR (W/kg)
Body Worn SAR	LTE Band 17	15mm separation device back	0.43	0.67	1.10
	LTE Band 17	15mm separation device front	0.39	0.06	0.45
	LTE Band 17	Holster device back	0.38	0.44	0.82
	LTE Band 5	15mm separation device back	0.42	0.67	1.09
	LTE Band 5	15mm separation device front	0.44	0.06	0.50
	LTE Band 5	Holster device front	0.33	0.44	0.77
	GSM/EDGE/GPRS 850	15mm separation device back	0.92	0.67	1.59
	GSM/EDGE/GPRS 850	15mm separation device front	0.91	0.06	0.97
	GSM/EDGE/GPRS 850	Holster device back	0.71	0.44	1.15
	UMTS Band V	15mm separation device back	0.39	0.67	1.06
	UMTS Band V	15mm separation device front	0.40	0.06	0.46
	UMTS Band V	Holster device front	0.31	0.44	0.75
	LTE Band 4	15mm separation device back	0.56	0.67	1.23
	LTE Band 4	15mm separation device front	0.50	0.06	0.56
	LTE Band 4	Holster device back	0.30	0.44	0.74
	UMTS Band IV	15mm separation device back	0.55	0.67	1.22
	UMTS Band IV	15mm separation device front	0.53	0.06	0.59
	UMTS Band IV	Holster device back	0.34	0.44	0.78
	LTE Band 2	15mm separation device back	0.43	0.67	1.10
	LTE Band 2	15mm separation device front	0.36	0.06	0.42
	LTE Band 2	Holster device back	0.33	0.44	0.77
	GSM/EDGE/GPRS 1900	15mm separation device back	0.37	0.67	1.04
	GSM/EDGE/GPRS 1900	15mm separation device front	0.23	0.06	0.29
	GSM/EDGE/GPRS 1900	Holster device back	0.23	0.44	0.67
	UMTS Band II	15mm separation device back	0.46	0.67	1.13
	UMTS Band II	15mm separation device front	0.30	0.06	0.36
	UMTS Band II	Holster device back	0.27	0.44	0.71

Table 1.9.1-3 Highest Body-worn SAR values for the same configuration

Note 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.


Note 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters is required.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		45(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Test	Licensed Transmitters			WiFi 2.4/5GHz	Max Sum 1g
	Band	Configuration	1g avg. SAR (W/kg)	1g avg. SAR (W/kg)	avg. SAR (W/kg)
Hotspot Mode SAR	LTE Band 17	10mm separation device back	0.54	0.59	1.13
	LTE Band 17	10mm separation device front	0.50	0.03	0.53
	LTE Band 17	10mm separation device left	0.49	0.28	0.77
	LTE Band 17	10mm separation device right	0.24	0.00	0.24
	LTE Band 17	10mm separation device bottom	0.15	0.00	0.15
	LTE Band 5	10mm separation device back	0.48	0.59	1.07
	LTE Band 5	10mm separation device front	0.47	0.03	0.50
	LTE Band 5	10mm separation device left	0.47	0.28	0.75
	LTE Band 5	10mm separation device right	0.38	0.00	0.38
	LTE Band 5	10mm separation device bottom	0.19	0.00	0.19
	GSM/EDGE/GPRS 850	10mm separation device back	0.95	0.59	1.54
	GSM/EDGE/GPRS 850	10mm separation device front	1.00	0.03	1.03
	GSM/EDGE/GPRS 850	10mm separation device left	0.89	0.28	1.17
	GSM/EDGE/GPRS 850	10mm separation device right	0.76	0.00	0.76
	GSM/EDGE/GPRS 850	10mm separation device bottom	0.29	0.00	0.29
	UMTS Band V	10mm separation device back	0.46	0.59	1.05
	UMTS Band V	10mm separation device front	0.43	0.03	0.46
	UMTS Band V	10mm separation device left	0.43	0.28	0.71
	UMTS Band V	10mm separation device right	0.35	0.00	0.35
	UMTS Band V	10mm separation device bottom	0.17	0.00	0.17
	LTE Band 4	10mm separation device back	1.03	0.59	1.62
	LTE Band 4	10mm separation device front	0.80	0.03	0.83
	LTE Band 4	10mm separation device left	0.46	0.28	0.74
	LTE Band 4	10mm separation device right	0.16	0.00	0.16
	LTE Band 4	10mm separation device bottom	0.43	0.00	0.43
	UMTS Band IV	10mm separation device back	1.11	0.59	1.70
	UMTS Band IV	10mm separation device front	0.99	0.03	1.02
	UMTS Band IV	10mm separation device left	0.49	0.28	0.77
	UMTS Band IV	10mm separation device right	0.16	0.00	0.16
	UMTS Band IV	10mm separation device bottom	0.43	0.00	0.43
	LTE Band 2	10mm separation device back	0.76	0.59	1.35
	LTE Band 2	10mm separation device front	0.63	0.03	0.66
	LTE Band 2	10mm separation device left	0.33	0.28	0.61
	LTE Band 2	10mm separation device right	0.08	0.00	0.08
	LTE Band 2	10mm separation device bottom	0.74	0.00	0.74
	GSM/EDGE/GPRS 1900	10mm separation device back	0.62	0.59	1.21
	GSM/EDGE/GPRS 1900	10mm separation device front	0.44	0.03	0.47
	GSM/EDGE/GPRS 1900	10mm separation device left	0.22	0.28	0.50
	GSM/EDGE/GPRS 1900	10mm separation device right	0.06	0.00	0.06
	GSM/EDGE/GPRS 1900	10mm separation device bottom	0.58	0.00	0.58
	UMTS Band II	10mm separation device back	1.06	0.59	1.65
	UMTS Band II	10mm separation device front	0.59	0.03	0.62
	UMTS Band II	10mm separation device left	0.09	0.28	0.37
	UMTS Band II	10mm separation device right	0.32	0.00	0.32
	UMTS Band II	10mm separation device bottom	0.73	0.00	0.73

Table 1.9.1-4a Highest Hotspot SAR values for the same configuration

Note 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 46(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Note 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.

		Highest 1 g SAR (W/kg)	Hotspot Coordinates mm (x, y, z)			
Antenna 1 (802.11 a)	10mm separation distance, back	0.59	-51.0	-7.0	-208.5	
Antenna 2 (LTE 4)	10mm separation distance, back	1.03	-41.0	39.5	-208.0	
	SAR Sum	1.62				
	SAR Sum to the power of 1.5	2.06				
	Delta [mm]		-10.0	-46.5	-0.5	
	closest Distance [mm]					47.56
	Ratio	0.04				
		Highest 1 g SAR (W/kg)	Hotspot Coordinates mm (x, y, z)			
Antenna 1 (802.11 a)	10mm separation distance, back	0.59	-51.0	-7.0	-208.5	
Antenna 2 (UMTS IV)	10mm separation distance, back	1.11	-37.0	44.0	-207.8	
	SAR Sum	1.70				
	SAR Sum to the power of 1.5	2.22				
	Delta [mm]		-14.0	-51.0	-0.7	
	closest Distance [mm]					52.89
	Ratio	0.04				
		Highest 1 g SAR (W/kg)	Hotspot Coordinates mm (x, y, z)			
Antenna 1 (802.11 a)	10mm separation distance, back	0.59	-51.0	-7.0	-208.5	
Antenna 2 (UMTS II)	10mm separation distance, back	1.06	-34.0	62.0	-207.7	
	SAR Sum	1.65				
	SAR Sum to the power of 1.5	2.12				
	Delta [mm]		-17.0	-69.0	-0.8	
	closest Distance [mm]					71.07
	Ratio	0.03				

Table 1.9.1-4b Hotspot configuration ratio of SAR to peak separation distance for pair of transmitters

Note: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		47(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

2.0 DESCRIPTION OF THE TEST EQUIPMENT

2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY52), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 52 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector that is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP are to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows.
- DASY52 software version 52.8.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM Twin Phantom enabling testing left-hand and right-hand usage.
- The device holder for mobile phones.
- Tissue simulating liquid mixed according to the given recipes (see section 6.1).
- System validation dipoles allowing for the validation of proper functioning of the system.

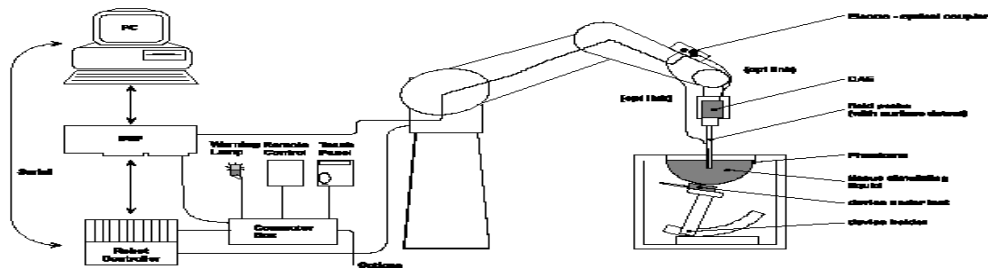



Figure 2.1-1 System Description


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 48(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

2.1.1 Equipment List

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	E-field probe	ES3DV3	3225	01/10/2014
SCHMID & Partner Engineering AG	E-field probe	EX3DV4	3548	01/15/2014
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE4 V1	881	01/14/2014
SCHMID & Partner Engineering AG	Dipole Validation Kit	D750V3	1021	01/07/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D835V2	446	01/07/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1800V2	2d020	01/09/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1900V2	545	01/09/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D2450V2	747	11/09/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D5000V2	1033	11/15/2013
Agilent Technologies	Signal generator	8648C	4037U03155	09/25/2015
Agilent Technologies	Power meter	E4419B	GB40202821	09/25/2015
Agilent Technologies	Power sensor	8481A	MY41095233	09/27/2014
Agilent Technologies	Power sensor	8481A	MY41095417	09/26/2014
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Agilent Technologies	Power meter	N1911A	MY45100905	05/29/2015
Agilent Technologies	Power sensor	N1921A	SG45240281	12/04/2014
Weinschel Corp	20dB Attenuator	33-20-34	BMO697	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	09/27/2014
Rohde & Schwarz	Base Station Simulator	CMU 200	109747	11/18/2013
CPI Wireless Solutions	Amplifier	VZC-6961K4	SK4310E5	CNR
Rohde & Schwarz	Signal generator	SMA 100A	101540	12/02/2013
Rohde & Schwarz	Bluetooth Tester	CBT	100368	12/04/2013
Rohde & Schwarz	Bluetooth Tester	CBT	100678	12/04/2013
Rohde & Schwarz	Wideband Base Station Simulator	CMW 500	136298	04/22/2014


Table 2.1.1-1 Equipment list

Note: Only power meter model: N1911A, power sensor model: N1921A were used for conducted power measurements for Wi-Fi Direct GO mode, March 24-26, 2014

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 49(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	E-field probe	EX3DV4	3592	11/10/2015
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3	472	03/18/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D5000V2	1033	11/08/2015
Agilent Technologies	Signal generator	8648C	4037U03155	09/25/2015
Agilent Technologies	Power meter	E4419B	GB40202821	09/25/2015
Agilent Technologies	Power sensor	8481A	MY41095233	10/06/2015
Agilent Technologies	Power sensor	8481A	MY41095417	10/06/2015
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Rohde & Schwarz	Signal generator	SMA 100A	101540	11/28/2015
Amplifier Research	Coupler	DC7144	300993	CNR
CPI Wireless Solutions	Amplifier	VZC-6961K4	SK4310E5	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	10/24/2015
Agilent Technologies	Power meter	N1911A	MY45100905	05/29/2015
Agilent Technologies	Power sensor	N1921A	MY45241383	09/05/2015
Weinschel Corp	20dB Attenuator	33-20-34	BMO697	CNR

Table 2.1.1-2 Equipment list for 802.11a Direct/Go and Hotspot mode

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		50(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

2.2 Description of the test setup

Before SAR measurements are conducted, the device and the DASY equipment are setup as follows:

2.2.1 Device and base station simulator setup

- Power up the device.
- Turn on the base station simulator and set the radio channel and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the device.

2.2.2 DASY setup

- Turn the computer on and log on to Windows.
- Start the DASY software by clicking on the icon located on the Windows desktop.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe by clicking the 'Align probe in light beam' button.
- Open a file and configure the proper parameters - probe, medium, communications system etc.
- Establish a connection between the Device and the communications test instrument. Place the Device on the stand and adjust it under the phantom.
- Start SAR measurements.

3.0 ELECTRIC FIELD PROBE CALIBRATION

3.1 Probe Specifications

SAR measurements were conducted using the dosimetric probes ES3DV3/ET3DV6 and EX3DV4, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fibre for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

Property	Data
Frequency range	30 MHz – 3 GHz
Linearity	±0.1 dB
Directivity (rotation around probe axis)	≤ ±0.2 dB
Directivity (rotation normal to probe axis)	±0.4 dB
Dynamic Range	5 mW/kg – 100 W/kg
Probe positioning repeatability	±0.2 mm
Spatial resolution	< 0.125 mm ³
Probe model EX3DV4 for 2.4 – 6 GHz	
Probe tip to sensor center	1.0 mm
Probe tip diameter is	2.5 mm
Probe calibration uncertainty	< 15 % for f = 2.45 to < 6.0 GHz
Probe calibration range	± 100 MHz


		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		51(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Table 3.1-1 Probe specifications

3.2 Probe calibration and measurement uncertainty

The probe had been calibrated with accuracy better than $\pm 12\%$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D and below:


Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.56	6.56	6.56	0.42	1.54	$\pm 12.0\%$
900	41.5	0.97	6.19	6.19	6.19	0.43	1.52	$\pm 12.0\%$
1810	40.0	1.40	5.35	5.35	5.35	0.63	1.39	$\pm 12.0\%$
1950	40.0	1.40	5.09	5.09	5.09	0.80	1.23	$\pm 12.0\%$
2450	39.2	1.80	4.65	4.65	4.65	0.61	1.63	$\pm 12.0\%$
2600	39.0	1.96	4.43	4.43	4.43	0.80	1.32	$\pm 12.0\%$

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.27	6.27	6.27	0.48	1.51	$\pm 12.0\%$
900	55.0	1.05	6.12	6.12	6.12	0.73	1.25	$\pm 12.0\%$
1810	53.3	1.52	5.04	5.04	5.04	0.57	1.47	$\pm 12.0\%$
1950	53.3	1.52	4.94	4.94	4.94	0.58	1.50	$\pm 12.0\%$
2450	52.7	1.95	4.35	4.35	4.35	0.70	1.16	$\pm 12.0\%$
2600	52.5	2.16	4.11	4.11	4.11	0.67	0.99	$\pm 12.0\%$

Table 3.2-1 Probe ES3DV3 SN: 3225 (cal: 1/10/2013)

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		52(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

Calibration Parameter Determined in Head Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
2600	39.0	1.96	7.15	7.15	7.15	0.47	0.86	± 12.0 %
5200	36.0	4.66	5.13	5.13	5.13	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.79	4.79	4.79	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.61	4.61	4.61	0.45	1.80	± 13.1 %

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
2600	52.5	2.16	7.08	7.08	7.08	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.68	4.68	4.68	0.52	1.90	± 13.1 %
5500	48.6	5.65	4.15	4.15	4.15	0.52	1.90	± 13.1 %
5800	48.2	6.00	4.19	4.19	4.19	0.60	1.90	± 13.1 %

Table 3.2-2 Probe EX3DV4 SN: 3548 (cal: 1/15/2013)

^C The validity of ± 100 MHz only applies for DASY v4.4 and higher.
DASY 52 has been used for measurements, therefore ± 100 MHz tolerance is valid.
Measured dielectric parameters are within +/- 5% of the probe calibration values and target values.
Expanded probe calibration uncertainty (k=2) is < 15 %

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		53(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
2600	39.0	1.96	6.80	6.80	6.80	0.36	0.93	± 12.0 %
5250	35.9	4.71	4.63	4.63	4.63	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.20	4.20	4.20	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.34	4.34	4.34	0.40	1.80	± 13.1 %

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
2600	52.5	2.16	6.84	6.84	6.84	0.78	0.62	± 12.0 %
5250	48.9	5.36	4.06	4.06	4.06	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.78	3.78	3.78	0.45	1.90	± 13.1 %
5750	48.3	5.94	3.81	3.81	3.81	0.50	1.90	± 13.1 %

Table 3.2-3 Probe EX3DV4 SN: 3592 (cal: 11/10/2014)

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 54(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	


4.0 SAR MEASUREMENT SYSTEM VERIFICATION

Prior to conducting SAR measurements, the system was validated using the dipole validation kit and the flat section of the SAM phantom. A power level of 1.0W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are within the allowed tolerances.

At above 1.5 – 2 GHz, dipoles maintain good return loss of -15 dB to -20 dB, therefore SAR measurements are limited to approximately +/- 100 MHz of the probe/dipole calibration frequency.

4.1 System accuracy verification for head adjacent use

f (MHz)	Limits / Measured (MM/DD/YYYY)	Scan Type	SAR 1g/10g (W/kg)	Dielectric Parameters		Liquid Temp. (°C)
				ϵ_r	σ [S/m]	
750	Measured (07/12/2013)	Area Scan/Fast SAR	7.75/5.20	41.1	0.89	22.8
	Measured (07/12/2013)	Zoom Scan	7.67/5.02	41.1	0.89	22.8
	Recommended Limits (Dipole: 1021)		8.46 / 5.51	41.9	0.89	N/A
835	Measured (07/13/2013)	Area Scan/Fast SAR	9.09/6.03	41.6	0.90	23.0
	Measured (07/13/2013)	Zoom Scan	9.06/5.94	41.6	0.90	23.0
	Measured (07/16/2013)	Area Scan/Fast SAR	9.08/6.03	40.6	0.88	23.1
	Measured (07/16/2013)	Zoom Scan	8.80/5.76	40.6	0.88	23.1
	Measured (08/16/2013)	Area Scan/Fast SAR	8.70/5.76	40.4	0.88	21.5
	Measured (08/16/2013)	Zoom Scan	8.61/5.64	40.4	0.88	21.5
	Recommended Limits (Dipole: 446)		9.39/6.13	41.5	0.90	N/A
1800	Measured (07/10/2013)	Area Scan/Fast SAR	36.3/19.8	38.2	1.42	22.9
	Measured (07/10/2013)	Zoom Scan	36.0/18.9	38.2	1.42	22.9
	Recommended Limits (Dipole: 2d020)		38.5/20.3	40.0	1.40	N/A
1900	Measured (07/02/2013)	Area Scan/Fast SAR	37.6/19.8	38.4	1.39	21.6
	Measured (07/02/2013)	Zoom Scan	37.0/19.5	38.4	1.39	21.6
	Measured (07/05/2013)	Area Scan/Fast SAR	36.7/19.4	38.7	1.41	21.7
	Measured (07/05/2013)	Zoom Scan	36.2/19.1	38.7	1.41	21.7
	Measured (07/08/2013)	Area Scan/Fast SAR	37.3/19.6	38.5	1.38	22.5
	Measured (07/08/2013)	Zoom Scan	36.6/19.2	38.5	1.38	22.5
	Measured (08/07/2013)	Area Scan/Fast SAR	38.7/20.5	38.2	1.38	22.2
	Measured (08/07/2013)	Zoom Scan	38.0/19.9	38.2	1.38	22.2
	Recommended Limits (Dipole: 545)		40.2/21.1	40.0	1.40	N/A
2450	Measured (07/19/2013)	Area Scan/Fast SAR	52.5/23.2	37.8	1.82	22.8
	Measured (07/19/2013)	Zoom Scan	52.1/24.6	37.8	1.82	22.8
	Measured (10/08/2013)	Area Scan/Fast SAR	53.0/23.5	37.4	1.83	22.4
	Measured (10/08/2013)	Zoom Scan	52.8/24.9	37.4	1.83	22.4
	Recommended Limits (Dipole: 747)		54.1/25.3	39.2	1.80	N/A
5200	Measured (10/10/2013)	Area Scan/Fast SAR	82.4/22.8	34.7	4.67	22.8
	Measured (10/10/2013)	Zoom Scan	86.0/25.0	34.7	4.67	22.8
	Measured (10/15/2013)	Area Scan/Fast SAR	81.1/22.7	34.6	4.71	22.8
	Measured (10/15/2013)	Zoom Scan	84.6/24.8	34.6	4.71	22.8


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 55(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

	Recommended Limits (Dipole: 1033)		80.8/23.0	36.0	4.66	N/A
5500	Measured (10/10/2013)	Area Scan/Fast SAR	88.7/24.3	34.1	4.97	22.8
	Measured (10/10/2013)	Zoom Scan	93.1/26.8	34.1	4.97	22.8
	Measured (10/15/2013)	Area Scan/Fast SAR	87.7/24.1	34.5	5.10	22.8
	Measured (10/15/2013)	Zoom Scan	90.5/26.2	34.5	5.10	22.8
	Recommended Limits (Dipole: 1033)		87.3/24.7	35.6	4.96	N/A
5800	Measured (10/10/2013)	Area Scan/Fast SAR	81.5/22.2	33.8	5.40	22.8
	Measured (10/10/2013)	Zoom Scan	84.8/24.4	33.8	5.40	22.8
	Measured (10/15/2013)	Area Scan/Fast SAR	80.0/22.0	33.6	5.34	22.8
	Measured (10/15/2013)	Zoom Scan	84.5/24.5	33.6	5.34	22.8
	Recommended Limits (Dipole: 1033)		79.4/22.5	35.3	5.27	N/A

Table 4.1-1 System accuracy (validation for head adjacent use)

f (MHz)	Limits / Measured (MM/DD/YYYY)	Scan Type	SAR 1g/10g (W/kg)	Dielectric Parameters		Liquid Temp. (°C)
				ϵ_r	σ [S/m]	
5200	Measured (12/08/2014)	Zoom Scan	83.7/24.2	34.3	4.67	22.6
	Recommended Limits (Dipole: 1033)		79.4/22.6	36.0	4.66	N/A
5800	Measured (12/08/2014)	Zoom Scan	85.8/24.4	33.7	5.40	22.6
	Recommended Limits (Dipole: 1033)		79.4/22.6	35.3	5.27	N/A

Table 4.1-2 System accuracy (validation for head adjacent use) for 802.11a Hotspot testing

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 56(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fibreglass shell integrated with a wooden table.

The SAM Twin Phantom is a fibreglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left side head
- Right side head
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with freestanding robots.


The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of ≥ 15 cm is maintained in the phantom for all the measurements.



Figure 5.0-1 SAM Twin Phantom

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 57(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

6.0 TISSUE DIELECTRIC PROPERTIES

6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids are shown in the table below.


INGREDIENT	MIXTURE 800–900MHz		MIXTURE 1800–1900MHz		MIXTURE 2450 MHz		MIXTURE 5 – 6 GHz	
	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscle %
Water	40.29	65.45	55.24	69.91	55.0	68.75	64	64-78
Sugar	57.90	34.31	0	0	0	0	0	0
Salt	1.38	0.62	0.31	0.13	0	0	0	0
HEC	0.24	0	0	0	0	0	0	0
Bactericide	0.18	0.10	0	0	0	0	0	0
DGBE	0	0	44.45	29.96	40.0	31.25	0	0
Triton X-100	0	0	0	0	5.0	0	0	0
Additives and Salt	0	0	0	0	0	0	3	2-3
Emulsifiers	0	0	0	0	0	0	15	9-15
Mineral Oil	0	0	0	0	0	0	18	11-18

Table 6.1-1 Tissue simulant recipe

6.1.1 Equipment


Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A
Dell	PC using GPIB card	GX110	347	N/A
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Agilent Technologies	Network Analyzer	8753ES	US39174857	09/27/2014
Control Company	Digital Thermometer	15-077-21	51129471	05/30/2014

Table 6.1.1-1 Tissue simulant preparation equipment

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		58(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A
Dell	PC using GPIB card	GX110	347	N/A
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Agilent Technologies	Network Analyzer	8753ES	US39174857	10/24/2015
Control Company	Digital Thermometer	23609-234	21352860	09/22/2015
Control Company	Digital Thermometer	15-077-21	51129471	06/11/2015

Table 6.1.1-2 Tissue simulant preparation equipment used for 802.11a Direct/GO and Hotspot mode

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		59(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

6.1.2 Preparation procedure

800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

1800-2450 MHz liquid

- Fill the container with water and place it on hotplate. Begin heating and stirring.
- Add the salt, Glycol/Triton X-100. The container must be covered to prevent evaporation.
- Keep the liquid hot enough to dissolve sugar for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.


6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are shown in the table below.


Recommended limits are adopted from IEEE P1528-2003:

“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, DASY manual and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>


Band (MHz)	Tissue Type	Limits / Measured (MM/DD/YYYY)	f (MHz)	Dielectric Parameters		Liquid Temp (°C)
				ϵ_r	σ [S/m]	
750	Head	Measured (07/12/2013)	705	41.7	0.85	22.8
			715	41.6	0.86	
			750	41.1	0.89	
			775	40.7	0.91	
			790	40.5	0.93	
	Muscle	Recommended Limits	750	41.9	0.89	N/A
		Measured (07/12/2013)	705	54.6	0.92	22.8
			715	54.5	0.93	
			750	54.1	0.96	
			775	53.8	0.98	
			790	53.7	1.00	

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 60(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

		Recommended Limits	750	55.5	0.96	N/A
835	Head	Measured (07/13/2013)	815	41.8	0.88	23.0
			825	41.7	0.89	
			835	41.6	0.90	
			850	41.4	0.91	
		Measured (07/16/2013)	815	40.8	0.86	23.1
			825	40.7	0.87	
			835	40.6	0.88	
			850	40.4	0.89	
		Measured (08/16/2013)	815	40.7	0.86	21.5
			825	40.5	0.87	
			835	40.4	0.88	
			850	40.2	0.90	
		Recommended Limits	835	41.5	0.90	N/A
	Muscle	Measured (07/13/2013)	815	53.4	0.95	23.0
			825	53.4	0.96	
			835	53.3	0.97	
			850	53.1	0.98	
		Measured (07/16/2013)	815	53.9	0.93	23.1
			825	53.9	0.94	
			835	53.8	0.96	
			850	53.8	0.97	
		Measured (08/16/2013)	815	54.3	0.94	21.5
			825	54.2	0.95	
			835	54.0	0.96	
			850	53.9	0.98	
		Recommended Limits	835	55.2	0.97	N/A
1800	Head	Measured (07/10/2013)	1710	38.6	1.33	22.9
			1750	38.4	1.37	
			1800	38.2	1.42	
		Recommended Limits	1800	40.0	1.40	N/A
	Muscle	Measured (07/10/2013)	1710	50.9	1.48	22.9
			1750	50.8	1.52	
			1800	50.8	1.57	
		Recommended Limits	1800	53.3	1.52	N/A
1900	Head	Measured (07/02/2013)	1850	38.5	1.34	21.6
			1900	38.4	1.39	
			1910	38.4	1.40	
			1980	38.1	1.47	
		Measured (07/05/2013)	1850	38.9	1.36	21.7
			1900	38.7	1.41	
			1910	38.6	1.42	
			1980	38.3	1.49	
		Measured (07/08/2013)	1850	38.7	1.33	22.5
			1900	38.5	1.38	

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		61(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

		Measured (08/07/2013)	1910	38.5	1.39	22.2
			1980	38.2	1.46	
			1850	38.4	1.33	
			1900	38.2	1.38	
			1910	38.2	1.42	
		Recommended Limits	1900	40.0	1.40	N/A
	Muscle	Measured (07/02/2013)	1850	50.7	1.50	21.6
			1900	50.7	1.55	
			1910	50.7	1.56	
		Measured (07/05/2013)	1850	51.3	1.52	21.7
			1900	51.0	1.58	
			1910	51.0	1.59	
		Measured (07/08/2013)	1850	51.1	1.49	22.5
			1900	50.9	1.55	
			1910	50.8	1.56	
		Measured (08/07/2013)	1850	51.0	1.50	22.2
			1900	50.8	1.55	
			1910	50.8	1.56	
		Recommended Limits	1900	53.3	1.52	N/A
2450	Head	Measured (07/17/2013)	2410	37.9	1.79	22.8
			2450	37.8	1.83	
			2480	37.7	1.86	
		Measured (10/07/2013)	2410	37.6	1.79	22.4
			2450	37.4	1.83	
			2480	37.3	1.86	
		Recommended Limits	2450	39.2	1.80	N/A
	Muscle	Measured (07/17/2013)	2410	50.9	1.96	22.8
			2450	50.8	2.01	
			2480	50.6	2.05	
		Measured (10/07/2013)	2410	50.4	1.97	22.4
			2450	50.2	2.02	
			2480	50.1	2.06	
		Recommended Limits	2450	52.7	1.95	N/A
5200	Head	Measured (10/10/2013)	5180	34.8	4.65	22.8
			5200	34.7	4.67	
			5280	34.5	4.77	
		Measured (10/15/2013)	5180	34.6	4.69	22.8
			5200	34.6	4.71	
			5280	34.5	4.80	
		Recommended Limits	5200	36.0	4.66	N/A
	Muscle	Measured (10/10/2013)	5180	47.1	5.45	23.0
			5200	47.0	5.48	
			5280	46.8	5.61	
		Measured (10/15/2013)	5180	49.0	5.29	22.8


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		62(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

5500	Head	Recommended Limits	5200	49.0	5.32	N/A
			5280	48.8	5.43	
		Measured (10/10/2013)	5200	49.0	5.30	22.8
			5620	33.9	5.11	
	Muscle	Measured (10/15/2013)	5500	34.1	4.97	22.8
			5620	33.9	5.11	
		Measured (10/15/2013)	5500	34.5	5.10	22.8
			5620	34.4	5.23	
		Recommended Limits	5500	35.6	4.96	N/A
			5500	35.6	4.96	
		Measured (10/10/2013)	5500	47.4	5.91	23.0
			5620	47.1	6.06	
		Measured (10/15/2013)	5500	48.8	5.78	22.8
			5620	48.6	5.97	
		Recommended Limits	5500	48.6	5.65	N/A
			5500	48.6	5.65	
5800	Head	Measured (10/10/2013)	5745	33.9	5.34	22.8
			5800	33.8	5.40	
		Measured (10/15/2013)	5745	33.8	5.30	22.8
			5800	33.6	5.34	
		Recommended Limits	5800	35.3	5.27	N/A
			5800	35.3	5.27	
	Muscle	Measured (10/10/2013)	5745	47.1	6.30	23.0
			5800	46.5	6.33	
		Measured (10/15/2013)	5745	49.6	6.14	22.8
			5800	49.5	6.22	
		Recommended Limits	5800	48.2	6.00	N/A
			5800	48.2	6.00	

Table 6.2-1 Electrical parameters of tissue simulating liquid

Band (MHz)	Tissue Type	Limits / Measured (MM/DD/YYYY)	f (MHz)	Dielectric Parameters		Liquid Temp (°C)
				ϵ_r	σ [S/m]	
5200	Head	Measured (12/08/2014)	5180	34.3	4.65	22.6
			5200	34.3	4.67	
		Recommended Limits	5280	34.1	4.76	N/A
			5200	36.0	4.66	
	Muscle	Measured (12/08/2014)	5180	46.7	5.61	22.6
			5200	46.7	5.64	
		Recommended Limits	5280	46.5	5.76	N/A
			5200	49.0	5.30	
5800	Head	Measured (12/08/2014)	5745	33.8	5.34	22.6
			5800	33.7	5.40	
		Recommended Limits	5800	35.3	5.27	N/A
			5800	35.3	5.27	
	Muscle	Measured (12/08/2014)	5745	45.3	6.42	22.6
			5800	45.1	6.51	
		Recommended Limits	5800	48.2	6.00	N/A
			5800	48.2	6.00	

Table 6.2-2 Electrical parameters of tissue simulating liquid

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 63(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

6.2.2 Test Configuration

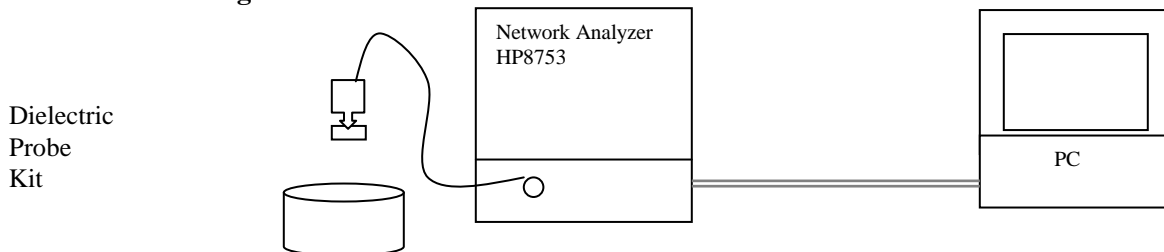



Figure 6.2.2-1 Test configuration

6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Relative permittivity $\epsilon_r = \epsilon'$ and conductivity can be calculated from ϵ'' ($\sigma = \omega \epsilon_0 \epsilon''$)
7. Measure liquid shortly after calibration.
8. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
9. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
10. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
11. Perform measurements.
12. Adjust medium parameters in DASY software for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Head 835 MHz) and press 'Option'-button.
13. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 835 MHz).

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 64(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

7.0 SAR SAFETY LIMITS

Standards/Guideline	Localized SAR Limit (W/kg) General public (uncontrolled)	Localized SAR Limits (W/kg) Workers (controlled)
ICNIRP Standard	2.0 (10g)	10.0 (10g)
IEEE C95.1 Standard	1.6 (1g)	8.0 (1g)


Table 7.0-1 SAR safety limits for Controlled / Uncontrolled environment

Human Exposure	Localized SAR Limits (W/kg) 10g, ICNIRP Standard	Localized SAR Limits (W/kg) 1g, IEEE C95.1 Standard
Spatial Average (averaged over the whole body)	0.08	0.08
Spatial Peak (averaged over any X g of tissue)	2.00	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.00	4.00 (10g)

Table 7.0-2 SAR safety limits

Uncontrolled Environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 65(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

8.0 DEVICE POSITIONING


8.1 Device holder for SAM Twin Phantom

The Device was positioned for all test configurations using the DASY5 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 8.1-1 Device Holder

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the earpiece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the earpiece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and backsides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the earpiece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.
5. Adjust the device position angles to the desired measurement position.
6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking. (The point of contact depends on the design of the device and the positioning angle).

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 66(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

8.2 Description of the test positioning

8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

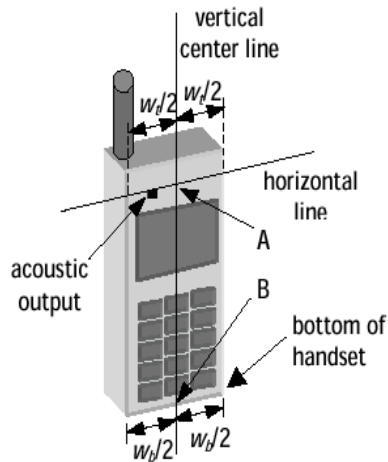


Figure 8.2.1-1 Handset vertical and horizontal reference lines – fixed case

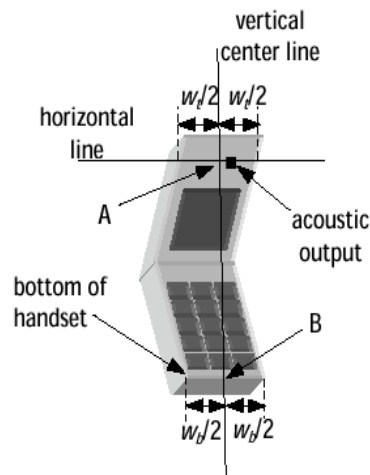



Figure 8.2.1-2 Handset vertical and horizontal reference lines – “clam-shell”

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 67(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 8.2.1-1 and 8.2.1-2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 8.2.1-1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 8.2.1-2), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 8.2.1-3), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

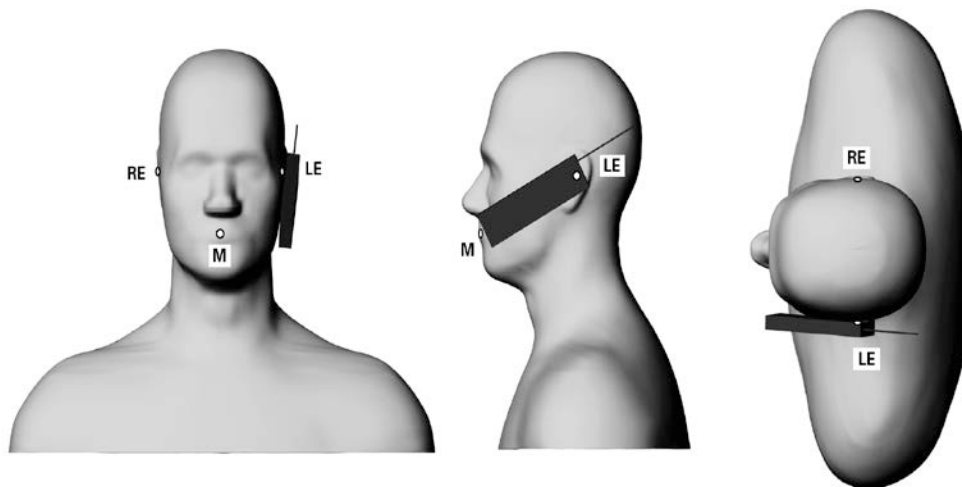



Figure 8.2.1-3 Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 68(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 from above.
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

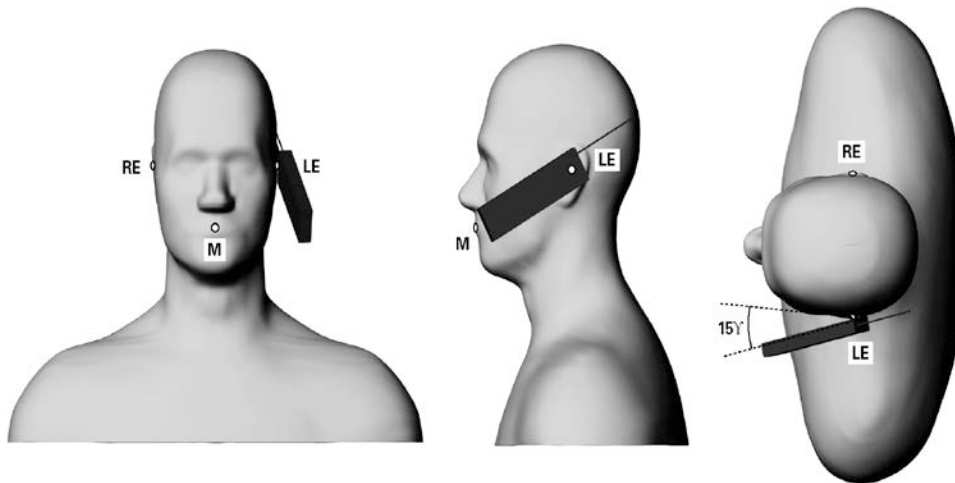


Figure 8.2.1-4 Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

8.2.2 Body-worn Configuration


Body-worn holsters, as shown on Figure 1.4-1, have been test with the device for RF exposure compliance. The device was positioned in each holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the device to simulate hands-free operation in a body worn holster configuration.

In addition, device was tested with 15 mm BlackBerry recommended separation distance to allow typical after-market holster to be used. BlackBerry body-worn holsters with belt-clip have been designed to maintain ~ 19-20 mm separation distance from body.

8.2.3 Limb/Hand Configuration

BlackBerry device is not a limb-worn device and hasn’t been tested for such a configuration.

As per Clause 6.1.4.9 in the IEC/EN 62209-2 standard:

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		69(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

"Additional studies remain needed for devising a representative method for evaluating SAR in the hand of hand-held devices. Future versions of this standard are intended to contain a test method based on scientific data and rationale. Annex J presents the currently available test procedure."

Clause J.2 of the IEC/EN 62209-2 states that testing for compliance for the exposure of the hand is not applicable for devices that are intended to being hand-held to enable use at the ear (see EN 62209-1) or worn on the body when transmitting.

In addition, BlackBerry device is not intended to be held in hand at a distance of larger than 200 mm from the head and body during normal use.

9.0 HIGH LEVEL EVALUATION

9.1 Maximum search


The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.


9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 70(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are done using a minimum predefined cube of 5x5x7 (≤ 2 GHz) / 7x7x7 (2-3 GHz) / 7x7x12 (5-6 GHz) scan. The cube's (x,y) parameters will extend if the maxima is found to be outside the zoom scan boundary to ensure the absolute peak value is recorded. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm (< 3 GHz) / 24x24x22mm (5-6 GHz) with 7.5mm (≤ 2 GHz) / 5mm (2-3 GHz) / 4mm (5-6 GHz) resolution in (x,y) and 5mm (< 3 GHz) / 2mm (5-6 GHz) resolution in z axis amounts to 175 (≤ 2 GHz) / 343 (2-3 GHz) / 588 (5-6 GHz) measurement points. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 71(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

10.0 MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget According to IEEE 1528/2003 [1]								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±5.5 %	N	1	1	1	±5.5 %	±5.5 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	$\sqrt{3}$	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	$\sqrt{3}$	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±10.7 %	±10.5 %	387
Expanded STD Uncertainty						±21.4 %	±21.0 %	


Table 10.0-1 Worst-Case uncertainty budget for DASY5 assessed according to IEEE P1528.
Source: Schmid & Partner Engineering AG.

[1] The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 72(89)	
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW		

DASY5 Uncertainty Budget for the 3 - 6 GHz range								
Error Description	Uncert. value	Prob. Dist.	Div.	(c ₁) 1g	(c ₁) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v ₁) v _{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±9.9 %	R	√3	1	1	±5.7 %	±5.7 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	√3	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	√3	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±12.8 %	±12.6 %	330
Expanded STD Uncertainty						±25.6 %	±25.2 %	

Table 10.0-2 Worst-Case uncertainty budget for DASY52 assessed according to IEEE P1528.
Source: Schmid & Partner Engineering AG.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		73(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

11.0 TEST RESULTS

11.1 SAR Measurement results at highest power measured against the head

Measured/Extrapolated SAR Values - Head - LTE Band 17 700 MHz										
Channel	Freq. (MHz)	Mod.	RB #	RB Offset	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
						Declared	Measured		Measured	Extrapolated
23780	709.0	QPSK	1	0	Right Cheek	24.0	23.6	-0.18	0.34	0.37
23790	710.0	QPSK	1	0	Right Cheek					0.00
23800	711.0	QPSK	1	0	Right Cheek					0.00
23780	709.0	QPSK	25	0	Right Cheek	23.0	22.5	0.01	0.26	0.29
23780	709.0	QPSK	50	0	Right Cheek					0.00
23780	709.0	QPSK	1	0	Right 15° Tilt	24.0	23.6	0.05	0.19	0.21
23780	709.0	QPSK	1	0	Left Cheek	24.0	23.6	-0.06	0.40	0.44
23790	710.0	QPSK	1	0	Left Cheek					0.00
23800	711.0	QPSK	1	0	Left Cheek					0.00
23780	709.0	QPSK	25	0	Left Cheek	23.0	22.5	0.09	0.31	0.35
23780	709.0	QPSK	50	0	Left Cheek					0.00
23780	709.0	QPSK	1	0	Left 15° Tilt	24.0	23.6	-0.13	0.24	0.26

Table 11.1-1 SAR results for LTE Band 17 head configuration

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only Middle channel was tested when 1g Average SAR < 0.8 W/Kg or 3dB lower than the limit.

Note 3: Declared conducted power is the maximum possible power determined by the manufacturer


Note 4: Only required to test the configuration (channel and offset) yielding the highest conducted power for RB 1 and RB 50% when combined 1g avg. SAR < 0.8 W/Kg or 3dB lower than the limit for both cases. Also, when the highest conducted power for RB 1 and RB 50% are both greater than RB 100%, then SAR testing for RB 100% can be excluded.

Note 5: If 1g avg. SAR > 0.8 W/Kg or not at least 3dB lower than the limit, then the remaining channels for that RB number must be tested and one additional scan must be done with RB 100%. For all additional scans the highest conducted power configuration (channel and offset) must be used.

Note 6: For LTE if SAR > 1.45 , then SAR tests for the smaller bandwidths are required

Note 7: Tested only the highest bandwidth since conducted power on other bandwidths is about the same.

Note 8: Did not test 16 QAM as conducted power was lower than QPSK.

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		74(89)	
Author Data	Dates of Test		Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014		RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Measured/Extrapolated SAR Values - Head - LTE Band 5 850 MHz										
Channel	Freq. (MHz)	Mod.	RB #	RB Offset	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
						Declared	Measured		Measured	Extrapolated
20450	829.0	QPSK	1	49	Right Cheek	24.0	23.6	-0.19	0.37	0.41
20525	836.5	QPSK	1	49	Right Cheek					0.00
20600	844.0	QPSK	1	0	Right Cheek					0.00
20525	836.5	QPSK	25	25	Right Cheek	23.0	22.6	0.13	0.29	0.32
20525	836.5	QPSK	50	0	Right Cheek					0.00
20450	829.0	QPSK	1	49	Right 15° Tilt	24.0	23.6	0.03	0.22	0.24
20450	829.0	QPSK	1	49	Left Cheek	24.0	23.6	-0.09	0.46	0.50
20525	836.5	QPSK	1	49	Left Cheek					0.00
20600	844.0	QPSK	1	0	Left Cheek					0.00
20525	836.5	QPSK	25	25	Left Cheek	23.0	22.6	0.09	0.33	0.36
20525	836.5	QPSK	50	0	Left Cheek					0.00
20450	829.0	QPSK	1	49	Left 15° Tilt	24.0	23.6	0.02	0.25	0.27

Table 11.1-2 SAR results for LTE Band 5 head configuration

Measured/Extrapolated SAR Values - Head - GSM/EDGE/DTM 850 MHz								
Channel	Freq. (MHz)	Time Slots	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
128	824.2	1	Right Cheek					0.00
190	836.6	1	Right Cheek	33.5	33.2	-0.11	0.39	0.42
251	848.8	1	Right Cheek					0.00
190	836.6	4	Right Cheek	28.0	26.2	0.08	0.51	0.77
190	836.6	4	Right 15° Tilt	28.0	26.2	-0.16	0.35	0.53
128	824.2	1	Left Cheek					0.00
190	836.6	1	Left Cheek	33.5	33.2	0.02	0.43	0.46
251	848.8	1	Left Cheek					0.00
190	836.6	2	Left Cheek	31.0	29.8	0.03	0.58	0.76
190	836.6	3	Left Cheek	29.5	28.8	-0.08	0.63	0.74
190	836.6	4	Left Cheek	28.0	26.2	0.21	0.62	0.94
190	836.6	4	Left 15° Tilt	28.0	26.2	0.06	0.37	0.56


Table 11.1-3 SAR results for GSM/EDGE/DTM 850 head configuration

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only Middle channel was tested when 1g Average SAR <0.8 W/Kg or 3dB lower than the limit.

Note 3: Declared conducted power is the maximum possible power determined by the manufacturer

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 75(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Measured/Extrapolated SAR Values - Head - WCDMA FDD V 850 MHz							
Channel	Freq. (MHz)	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
			Declared	Measured		Measured	Extrapolated
4132	826.4	Right Cheek					0.00
4182	836.4	Right Cheek	23.5	23.2	-0.05	0.36	0.39
4233	846.6	Right Cheek					0.00
4182	836.4	Right 15° Tilt	23.5	23.2	-0.04	0.20	0.21
4132	826.4	Left Cheek					0.00
4182	836.4	Left Cheek	23.5	23.2	0.15	0.44	0.47
4233	846.6	Left Cheek					0.00
4182	836.4	Left 15° Tilt	23.5	23.2	0.03	0.23	0.25


Table 11.1-4 SAR results for WCDMA FDD V head configuration

Measured/Extrapolated SAR Values - Head - LTE Band 4 1800 MHz										
Channel	Freq. (MHz)	Mod.	RB #	RB Offset	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
						Declared	Measured		Measured	Extrapolated
20050	1720.0	QPSK	1	50	Right Cheek	23.0	22.6	-0.06	0.46	0.50
20175	1732.5	QPSK	1	0	Right Cheek	23.0	22.4			0.00
20300	1745.0	QPSK	1	0	Right Cheek	23.0	22.4			0.00
20050	1720.0	QPSK	50	0	Right Cheek	22.0	21.6	0.04	0.36	0.39
20050	1720.0	QPSK	100	0	Right Cheek	22.0	21.4			0.00
20050	1720.0	QPSK	1	50	Right 15° Tilt	23.0	22.6	0.16	0.16	0.18
20050	1720.0	QPSK	1	50	Left Cheek	23.0	22.6	0.05	0.50	0.55
20175	1732.5	QPSK	1	0	Left Cheek	23.0	22.4			0.00
20300	1745.0	QPSK	1	0	Left Cheek	23.0	22.4			0.00
20050	1720.0	QPSK	50	0	Left Cheek	22.0	21.6	0.01	0.38	0.42
20050	1720.0	QPSK	100	0	Left Cheek	22.0	21.4			0.00
20050	1720.0	QPSK	1	50	Left 15° Tilt	23.0	22.6	0.04	0.20	0.22

Table 11.1-5 SAR results for LTE Band 4 head configuration

Measured/Extrapolated SAR Values - Head - WCDMA FDD IV 1800 MHz							
Channel	Freq. (MHz)	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
			Declared	Measured		Measured	Extrapolated
1312	1712.4	Right Cheek					0.00
1413	1732.6	Right Cheek	23.0	23.0	0.34	0.49	0.49
1513	1752.6	Right Cheek					0.00
1413	1732.6	Right 15° Tilt	23.0	23.0	0.00	0.20	0.20
1312	1712.4	Left Cheek					0.00
1413	1732.6	Left Cheek	23.0	23.0	0.09	0.60	0.60
1513	1752.6	Left Cheek					0.00
1413	1732.6	Left 15° Tilt	23.0	23.0	0.06	0.24	0.24

Table 11.1-6 SAR results for WCDMA FDD IV head configuration

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		76(89)	
Author Data	Dates of Test		Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014		RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Measured/Extrapolated SAR Values - Head - LTE Band 2 1900 MHz										
Channel	Freq. (MHz)	Mod.	RB #	RB Offset	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
						Declared	Measured		Measured	Extrapolated
18700	1860.0	QPSK	1	50	Right Cheek	22.5	22.4	0.02	0.33	0.34
18900	1880.0	QPSK	1	99	Right Cheek	22.5	22.1			0.00
19100	1900.0	QPSK	1	50	Right Cheek	22.5	22.1			0.00
18700	1860.0	QPSK	50	50	Right Cheek	21.5	21.3	0.11	0.24	0.25
18700	1860.0	QPSK	100	0	Right Cheek	21.5	21.2			0.00
18700	1860.0	QPSK	1	50	Right 15° Tilt	22.5	22.4	-0.14	0.14	0.14
18700	1860.0	QPSK	1	50	Left Cheek	22.5	22.4	0.47	0.63	0.64
18900	1880.0	QPSK	1	99	Left Cheek	22.5	22.1	0.04	0.46	0.50
19100	1900.0	QPSK	1	50	Left Cheek	22.5	22.1	0.12	0.44	0.48
18700	1860.0	QPSK	50	50	Left Cheek	21.5	21.3	0.02	0.46	0.48
18700	1860.0	QPSK	100	0	Left Cheek	21.5	21.2			0.00
18700	1860.0	QPSK	1	50	Left 15° Tilt	22.5	22.4	0.07	0.12	0.12

Table 11.1-7 SAR results for LTE Band 2 head configuration

Measured/Extrapolated SAR Values - Head - GSM/EDGE/DTM 1900 MHz								
Channel	Freq. (MHz)	Time Slots	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
512	1850.2	1	Right Cheek					0.00
661	1880.0	1	Right Cheek	31.0	29.9	-0.04	0.15	0.19
810	1909.8	1	Right Cheek					0.00
661	1880.0	2	Right Cheek	28.5	28.2	0.10	0.13	0.14
661	1880.0	1	Right 15° Tilt	31.0	29.9	0.09	0.07	0.09
661	1880.0	2	Right 15° Tilt	28.5	28.2	-0.05	0.06	0.06
512	1850.2	1	Left Cheek					0.00
661	1880.0	1	Left Cheek	31.0	29.9	0.02	0.29	0.37
810	1909.8	1	Left Cheek					0.00
661	1880.0	2	Left Cheek	28.5	28.2	0.12	0.25	0.27
661	1880.0	3	Left Cheek	26.5	25.6	-0.17	0.25	0.31
661	1880.0	4	Left Cheek	25.0	24.7	0.10	0.24	0.26
661	1880.0	2	Left 15° Tilt	28.5	28.2	0.09	0.06	0.06

Table 11.1-8 SAR results for GSM/DTM 1900 head configuration

Measured/Extrapolated SAR Values - Head - WCDMA FDD II 1900 MHz							
Channel	Freq. (MHz)	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
			Declared	Measured		Measured	Extrapolated
9262	1852.4	Right Cheek					0.00
9400	1880.0	Right Cheek	23.0	22.6	0.06	0.30	0.33
9538	1907.6	Right Cheek					0.00
9400	1880.0	Right 15° Tilt	23.0	22.6	0.18	0.15	0.16
9262	1852.4	Left Cheek					0.00
9400	1880.0	Left Cheek	23.0	22.6	-0.03	0.56	0.61
9538	1907.6	Left Cheek					0.00
9400	1880.0	Left 15° Tilt	23.0	22.6	-0.12	0.12	0.13


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		77(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		


Table 11.1-9 SAR results for WCDMA FDD II head configuration

Measured/Extrapolated SAR Values - Head - 802.11b 2450 MHz							
Channel	Freq. (MHz)	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
			Declared	Measured		Measured	Extrapolated
1	2412.0	Right Cheek					0.00
6	2437.0	Right Cheek	20.5	19.8	-0.02	0.12	0.14
11	2462.0	Right Cheek					0.00
6	2437.0	Right 15° Tilt	20.5	19.8	0.13	0.05	0.06
1	2412.0	Left Cheek					0.00
6	2437.0	Left Cheek	20.5	19.8	0.19	0.21	0.25
11	2462.0	Left Cheek					0.00
6	2437.0	Left 15° Tilt	20.5	19.8	0.06	0.04	0.05

Table 11.1-10 SAR results for WiFi/WLAN/802.11b head configuration


Measured/Extrapolated SAR Values - Head - Bluetooth 2450 MHz							
Channel	Freq. (MHz)	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
			Declared	Measured		Measured	Extrapolated
0	2402.0	Right Cheek					0.00
39	2441.0	Right Cheek	9.8	9.8	0.37	0.01	0.01
78	2480.0	Right Cheek					0.00
39	2441.0	Right 15° Tilt	9.8	9.8	-0.09	0.00	0.00
0	2402.0	Left Cheek					0.00
39	2441.0	Left Cheek	9.8	9.8	0.41	0.01	0.01
78	2480.0	Left Cheek					0.00
39	2441.0	Left 15° Tilt	9.8	9.8	-0.04	0.00	0.00

Table 11.1-11 SAR results for Bluetooth head configuration

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		78(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

Measured/Extrapolated SAR Values - Head - 802.11a 5000 MHz							
Channel	Freq. (MHz)	Position	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
			Declared	Measured		Measured	Extrapolated
36	5180.0	Right Cheek	15.0	13.1	-0.16	0.09	0.14
40	5200.0	Right Cheek					0.00
44	5220.0	Right Cheek					0.00
48	5240.0	Right Cheek					0.00
52	5260.0	Right Cheek	16.5	14.8	-0.19	0.12	0.18
56	5280.0	Right Cheek					0.00
60	5300.0	Right Cheek					0.00
64	5320.0	Right Cheek					0.00
104	5520.0	Right Cheek	19.0	17.3	0.08	0.09	0.13
116	5580.0	Right Cheek					0.00
124	5620.0	Right Cheek					0.00
136	5680.0	Right Cheek					0.00
140	5700.0	Right Cheek					0.00
149	5745.0	Right Cheek					0.00
153	5765.0	Right Cheek	18.5	16.6	-0.02	0.05	0.08
157	5785.0	Right Cheek					0.00
161	5805.0	Right Cheek					0.00
165	5825.0	Right Cheek					0.00
52	5260.0	Right 15° Tilt	16.5	14.8	0.14	0.03	0.04
36	5180.0	Left Cheek	15.0	13.1	0.06	0.17	0.26
40	5200.0	Left Cheek					0.00
44	5220.0	Left Cheek					0.00
48	5240.0	Left Cheek					0.00
52	5260.0	Left Cheek	16.5	14.8	0.15	0.27	0.40
56	5280.0	Left Cheek					0.00
60	5300.0	Left Cheek					0.00
64	5320.0	Left Cheek					0.00
104	5520.0	Left Cheek	19.0	17.3	0.14	0.30	0.44
116	5580.0	Left Cheek					0.00
124	5620.0	Left Cheek					0.00
136	5680.0	Left Cheek					0.00
140	5700.0	Left Cheek					0.00
149	5745.0	Left Cheek					0.00
153	5765.0	Left Cheek	18.5	16.6	-0.19	0.14	0.22
157	5785.0	Left Cheek					0.00
161	5805.0	Left Cheek					0.00
165	5825.0	Left Cheek					0.00
104	5520.0	Left 15° Tilt	19.0	17.3	0.09	0.05	0.07

Table 11.1-12 SAR results for WiFi/WLAN/802.11a head configuration

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 79(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

11.2 SAR measurement results at highest power measured against the body using accessories

Measured/Extrapolated SAR Values - Hotspot/Body-Worn - LTE Band 17 700 MHz											
Channel	Freq. (MHz)	Spacing (cm)/ Holster	Mod.	RB #	RB Offset	Side facing phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
							Declared	Measured		Measured	Extrapolated
Hotspot											
23780	709	1.0	QPSK	1	0	Back	24.0	23.6	-0.03	0.49	0.54
23790	710	1.0	QPSK	1	25	Back					0.00
23800	711	1.0	QPSK	1	50	Back					0.00
23780	709	1.0	QPSK	25	0	Back	23.0	22.5	0.02	0.38	0.43
23780	709	1.0	QPSK	50	0	Back					0.00
23780	709	1.0	QPSK	1	0	Front	24.0	23.6	0.07	0.46	0.50
23780	709	1.0	QPSK	1	0	Left	24.0	23.6	0.04	0.45	0.49
23780	709	1.0	QPSK	1	0	Right	24.0	23.6	-0.03	0.22	0.24
23780	709	1.0	QPSK	1	0	Bottom	24.0	23.6	-0.01	0.14	0.15
23780	709	1.0	QPSK	1	0	+HS					0.00
Body-worn											
23780	709	1.5	QPSK	1	0	Back	24.0	23.6	0.09	0.39	0.43
23780	709	1.5	QPSK	1	0	Front	24.0	23.6	0.04	0.36	0.39
23780	709	Holster	QPSK	1	0	Back	24.0	23.6	-0.06	0.35	0.38

Table 11.2-1 SAR results for LTE Band 17 body-worn and Hotspot configurations

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only Middle channel was tested when 1g Average SAR < 0.8 W/Kg or 3dB lower than the limit.

Note 3: Device was tested with 15 mm BLACKBERRY recommended separation distance to allow typical after-market holster to be used. BLACKBERRY body-worn holsters with belt-clip have been designed to maintain ~ 19 mm separation distance from body.

Note 4: For Hot Spot mode any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.

Note 5: Declared conducted power is the maximum possible power determined by the manufacturer


Note 6: Only required to test the configuration (channel and offset) yielding the highest conducted power for RB 1 and RB 50% when combined 1g avg. SAR < 0.8 W/Kg or 3dB lower than the limit for both cases. Also, when the highest conducted power for RB 1 and RB 50% are both greater than RB 100%, then SAR testing for RB 100% can be excluded.

Note 7: If 1g avg. SAR > 0.8 W/Kg or not at least 3dB lower than the limit, then the remaining channels for that RB number must be tested and one additional scan must be done with RB 100%. For all additional scans the highest conducted power configuration (channel and offset) must be used.

Note 8: For LTE if SAR > 1.45 , then SAR tests for the smaller bandwidths are required

Note 9: Tested only the highest bandwidth since conducted power on other bandwidths is about the same.

Note 10: Did not test 16 QAM as conducted power was lower than QPSK.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3			Page 80(89)
		Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW


Measured/Extrapolated SAR Values - Hotspot/Body-Worn - LTE Band 5 850 MHz											
Channel	Freq. (MHz)	Spacing (cm)/ Holster	Mod.	RB #	RB Offset	Side facing phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
							Declared	Measured		Measured	Extrapolated
Hotspot											
20450	829.0	1.0	QPSK	1	49	Back	24.0	23.6	-0.24	0.44	0.48
20525	836.5	1.0	QPSK	1	49	Back					0.00
20600	844.0	1.0	QPSK	1	0	Back					0.00
20525	836.5	1.0	QPSK	25	25	Back	23.0	22.5	0.02	0.34	0.38
20525	836.5	1.0	QPSK	50	0	Back					0.00
20450	829.0	1.0	QPSK	1	49	Front	24.0	23.6	0.11	0.43	0.47
20450	829.0	1.0	QPSK	1	49	Left	24.0	23.6	0.03	0.43	0.47
20450	829.0	1.0	QPSK	1	49	Right	24.0	23.6	-0.19	0.35	0.38
20450	829.0	1.0	QPSK	1	49	Bottom	24.0	23.6	0.08	0.17	0.19
20450	829.0	1.0	QPSK	1	49	+HS					0.00
Body-worn											
20450	829.0	1.5	QPSK	1	49	Back	24.0	23.6	-0.02	0.38	0.42
20450	829.0	1.5	QPSK	1	49	Front	24.0	23.6	-0.03	0.40	0.44
20450	829.0	Holster	QPSK	1	49	Front	24.0	23.6	0.27	0.30	0.33

Table 11.2-2 SAR results for LTE band 5 body-worn and Hotspot configurations

Measured/Extrapolated SAR Values - Hotspot/Body-Worn - GSM/EDGE/GPRS 850 MHz									
Ch.	Freq. (MHz)	Time Slots	spacing (cm)/ holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
					Declared	Measured		Measured	Extrapolated
Hotspot									
128	824.2	1	1.0	Back					0.00
190	836.6	1	1.0	Back	33.5	33.2	-0.14	0.55	0.59
251	848.8	1	1.0	Back					0.00
190	836.6	2	1.0	Back	31.0	29.8	-0.01	0.65	0.86
190	836.6	3	1.0	Back	29.5	28.8	0.00	0.69	0.81
190	836.6	4	1.0	Back	28.0	26.2	0.01	0.63	0.95
190	836.6	4	1.0	Front	28.0	26.2	-0.07	0.66	1.00
190	836.6	4	1.0	Left	28.0	26.2	0.00	0.59	0.89
190	836.6	4	1.0	Right	28.0	26.2	-0.08	0.50	0.76
190	836.6	4	1.0	Bottom	28.0	26.2	-0.08	0.19	0.29
190	836.6	4	1.0	+HS					0.00
Body-worn									
128	824.2	4	1.5	Back	28.0	26.1	0.01	0.54	0.84
190	836.6	4	1.5	Back	28.0	26.2	-0.06	0.61	0.92
251	848.8	4	1.5	Back	28.0	25.8	-0.16	0.45	0.75

Table 11.2-3 SAR results for EDGE/EGPRS 850 body-worn and Hotspot configurations

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS
Copyright 2005-2014, BlackBerry RTS, a division of BlackBerry Limited

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		81(89)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW	

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only Middle channel was tested when 1g Average SAR <0.8 W/Kg or 3dB lower than the limit.


Note 3: Device was tested with 15 mm BLACKBERRY recommended separation distance to allow typical after-market holster to be used. BLACKBERRY body-worn holsters with belt-clip have been designed to maintain ~ 19 mm separation distance from body.

Note 4: For Hot Spot mode any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.

Note 5: Declared conducted power is the maximum possible power determined by the manufacturer

Measured/Extrapolated SAR Values - Hotspot/Body-Worn - WCDMA FDD V 850 MHz								
Ch.	Freq. (MHz)	spacing (cm)/holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
Hotspot								
4132	826.4	1.0	Back					0.00
4182	836.4	1.0	Back	23.5	23.2	-0.01	0.43	0.46
4233	846.6	1.0	Back					0.00
4182	836.4	1.0	Front	23.5	23.2	0.07	0.40	0.43
4182	836.4	1.0	Left	23.5	23.2	0.09	0.40	0.43
4182	836.4	1.0	Right	23.5	23.2	0.07	0.33	0.35
4182	836.4	1.0	Bottom	23.5	23.2	0.00	0.16	0.17
4182	836.4	1.0	+HS					0.00
Body-worn								
4182	836.4	1.5	Back	23.5	23.2	-0.03	0.36	0.39
4182	836.4	1.5	Front	23.5	23.2	0.00	0.37	0.40
4182	836.4	Holster	Front	23.5	23.2	0.08	0.29	0.31

Table 11.2-4 SAR results for WCDMA FDD V body-worn and Hotspot configurations


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3			82(89)	
Author Data	Dates of Test		Test Report No		FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014		RTS-6046-1310-25 Rev 3		L6ARFV120LW	

Measured/Extrapolated SAR Values - Head - LTE Band 4 1800 MHz											
Channel	Freq. (MHz)	Spacing (cm)/ Holster	Mod.	RB #	RB Offset	Side facing phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
							Declared	Measured		Measured	Extrapolated
Hotspot											
20050	1720.0	1.0	QPSK	1	50	Back	23.0	22.6	-0.04	0.81	0.89
20175	1732.5	1.0	QPSK	1	0	Back	23.0	22.4	0.03	0.87	1.00
20175	1732.5	1.0	QPSK	1	0	Back(2nd)	23.0	22.4	0.05	0.90	1.03
20300	1745.0	1.0	QPSK	1	50	Back	23.0	22.4	0.06	0.76	0.87
20050	1720.0	1.0	QPSK	50	0	Back	22.0	21.6	-0.07	0.63	0.69
20050	1720.0	1.0	QPSK	100	0	Back	22.0	21.4	0.03	0.63	0.72
20050	1720.0	1.0	QPSK	1	50	Front	23.0	22.6	0.05	0.73	0.80
20050	1720.0	1.0	QPSK	1	50	Left	23.0	22.6	0.02	0.42	0.46
20050	1720.0	1.0	QPSK	1	50	Right	23.0	22.6	-0.12	0.15	0.16
20050	1720.0	1.0	QPSK	1	50	Bottom	23.0	22.6	-0.01	0.39	0.43
20050	1720.0	1.0	QPSK	1	50	+HS					0.00
Body-worn											
20050	1720.0	1.5	QPSK	1	50	Back	23.0	22.6	0.07	0.51	0.56
20050	1720.0	1.5	QPSK	1	50	Front	23.0	22.6	0.06	0.46	0.50
20050	1720.0	Holster	QPSK	1	50	Back	23.0	22.6	-0.10	0.27	0.30

Table 11.2-5 SAR results for LTE band 4 body-worn and Hotspot configurations


Measured/Extrapolated SAR Values - Hotspot/Body-Worn - WCDMA FDD IV 1800MHz								
Ch.	Freq. (MHz)	spacing (cm)/ holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
Hotspot								
1312	1712.4	1.0	Back	23.0	23.0	0.01	1.10	1.10
1312	1712.4	1.0	Back(2nd)	23.0	23.0	0.04	1.11	1.11
1413	1732.6	1.0	Back	23.0	23.0	-0.05	0.97	0.97
1513	1752.6	1.0	Back	23.0	23.0	0.01	1.06	1.06
1312	1712.4	1.0	Front	23.0	23.0	0.14	0.99	0.99
1413	1732.6	1.0	Front	23.0	23.0	0.10	0.91	0.91
1513	1752.6	1.0	Front	23.0	23.0	0.03	0.98	0.98
1413	1732.6	1.0	Left	23.0	23.0	-0.01	0.49	0.49
1413	1732.6	1.0	Right	23.0	23.0	-0.06	0.16	0.16
1413	1732.6	1.0	Bottom	23.0	23.0	-0.10	0.43	0.43
1312	1712.4	1.0	Back+HS					0.00
Body-worn								
1413	1732.6	1.5	Back	23.0	23.0	-0.05	0.55	0.55
1413	1732.6	1.5	Front	23.0	23.0	-0.03	0.53	0.53
1413	1732.6	Holster	Back	23.0	23.0	0.00	0.34	0.34

Table 11.2-6 SAR results for WCDMA FDD IV body-worn and Hotspot configurations

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 83(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

Measured/Extrapolated SAR Values - Hotspot/Body-Worn - LTE Band 2 1900 MHz											
Channel	Freq. (MHz)	Spacing (cm)/ Holster	Mod.	RB #	RB Offset	Side facing phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
							Declared	Measured		Measured	Extrapolated
Hotspot											
18700	1860	1.0	QPSK	1	50	Back	22.5	22.4	-0.08	0.74	0.76
18900	1880	1.0	QPSK	1	99	Back					0.00
19100	1900	1.0	QPSK	1	50	Back					0.00
18700	1860	1.0	QPSK	50	50	Back	21.5	21.3	0.07	0.53	0.55
18700	1860	1.0	QPSK	100	0	Back					0.00
18700	1860	1.0	QPSK	1	50	Front	22.5	22.4	-0.04	0.62	0.63
18700	1860	1.0	QPSK	1	50	Left	22.5	22.4	0.01	0.32	0.33
18700	1860	1.0	QPSK	1	50	Right	22.5	22.4	0.00	0.08	0.08
18700	1860	1.0	QPSK	1	50	Bottom	22.5	22.4	0.01	0.72	0.74
18700	1860	1.0	QPSK	1	50	+HS					0.00
Body-worn											
18700	1860	1.5	QPSK	1	50	Back	22.5	22.4	0.02	0.42	0.43
18700	1860	1.5	QPSK	1	50	Front	22.5	22.4	0.07	0.35	0.36
18700	1860	Holster	QPSK	1	50	Back	22.5	22.4	-0.05	0.32	0.33

Table 11.2-7 SAR results for LTE Band 2 body-worn and Hotspot configurations


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 84(89)	
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW		

Measured/Extrapolated SAR Values - Hotspot/Body-Worn - GSM/EDGE/GPRS 1900 MHz									
Ch.	Freq. (MHz)	Time Slots	spacing (cm)/holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
					Declared	Measured		Measured	Extrapolated
Hotspot									
512	1850.2	1	1.0	Back					0.00
661	1880.0	1	1.0	Back	31.0	29.9	0.19	0.48	0.62
810	1909.8	1	1.0	Back					0.00
661	1880.0	2	1.0	Back	28.5	27.7	0.02	0.41	0.49
661	1880.0	3	1.0	Back	26.5	25.3	0.06	0.42	0.55
661	1880.0	4	1.0	Back	25.0	24.8	0.06	0.40	0.42
661	1880.0	1	1.0	Front	31.0	29.9	0.02	0.34	0.44
661	1880.0	1	1.0	Left	31.0	29.9	0.01	0.17	0.22
661	1880.0	1	1.0	Right	31.0	29.9	0.06	0.05	0.06
661	1880.0	1	1.0	Bottom	31.0	29.9	-0.07	0.45	0.58
661	1880.0	1	1.0	+HS					0.00
Body-worn									
661	1880.0	1	1.5	Back	31.0	29.9	-0.02	0.29	0.37
661	1880.0	1	1.5	Front	31.0	29.9	0.04	0.18	0.23
661	1880.0	1	Holster	Back	31.0	29.9	0.04	0.18	0.23

Table 11.2-8 SAR results for GPRS/EDGE 1900 body-worn and Hotspot configurations

Measured/Extrapolated SAR Values - Hotspot/Body-Worn - WCDMA FDD II 1900 MHz								
Ch.	Freq. (MHz)	spacing (cm)/ holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
Hotspot								
9262	1852.4	1.0	Back	23.0	22.7	-0.02	0.99	1.06
9262	1852.4	1.0	Back*	23.0	22.7	0.06	0.98	1.05
9400	1880.0	1.0	Back	23.0	22.6	-0.12	0.85	0.93
9538	1907.6	1.0	Back	23.0	22.9	0.01	0.96	0.98
9400	1880.0	1.0	Front	23.0	22.6	0.09	0.54	0.59
9400	1880.0	1.0	Left	23.0	22.6	0.09	0.08	0.09
9400	1880.0	1.0	Right	23.0	22.6	0.08	0.29	0.32
9400	1880.0	1.0	Bottom	23.0	22.6	0.02	0.67	0.73
9400	1880.0	1.0	+HS					0.00
Body-worn								
9400	1880.0	1.5	Back	23.0	22.6	-0.05	0.42	0.46
9400	1880.0	1.5	Front	23.0	22.6	-0.03	0.27	0.30
9400	1880.0	Holster	Back	23.0	22.6	-0.15	0.25	0.27

Table 11.2-9 SAR results for WCDMA FDD II body-worn and Hotspot configurations

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		85(89)	
Author Data	Dates of Test		Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014		RTS-6046-1310-25 Rev 3	L6ARFV120LW	


Measured/Extrapolated SAR Values - Hotspot/Body-Worn - 802.11b/g 2450 MHz									
Ch.	Freq. (MHz)	spacing (cm)/ holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)		10g SAR (W/Kg)
				Declared	Measured		Measured	Extrapolated	Extrapolated
Hotspot									
1 (g)	2412	1.0	Back					0.00	
6 (g)	2437	1.0	Back	15.5	15.4	0.09	0.06	0.06	0.03
11 (g)	2462	1.0	Back					0.00	
6 (g)	2437	1.0	Front	15.5	15.4	-0.02	0.02	0.02	0.01
6 (g)	2437	1.0	Left	15.5	15.4	-0.03	0.06	0.06	0.03
6 (g)	2437	1.0	Right	15.5	15.4	0.02	0.00	0.00	0.00
6 (g)	2437	1.0	Top	15.5	15.4	-0.04	0.00	0.00	0.00
6 (g)	2437	1.0	Bottom	15.5	15.4	-0.18	0.00	0.00	0.00
6 (g)	2437	1.0	+HS					0.00	
Body-worn									
6 (b)	2437	1.5	Back	20.5	19.8	0.18	0.08	0.09	0.04
6 (b)	2437	1.5	Front	20.5	19.8	0.54	0.03	0.04	0.02
6 (b)	2437	Holster	Back	20.5	19.8	-0.13	0.05	0.06	0.03

Table 11.2-10 SAR results for Wi-Fi/WLAN/802.11b body-worn and Hotspot configurations

Note: There is fixed power reduction on 802.11b/g/n in hotspot mode. Power reduction is triggered when device is set to hotspot mode.


Measured/Extrapolated SAR Values - Hotspot/Body-Worn - Bluetooth 2450 MHz								
Ch.	Freq. (MHz)	spacing (cm)/holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
Hotspot								
2402	0	1.0	Back					0.00
2441	39	1.0	Back	9.8	9.8	-0.15	0.01	0.01
2480	78	1.0	Back					0.00
2441	39	1.0	Front					0.00
2441	39	1.0	Left					0.00
2441	39	1.0	Right					0.00
2441	39	1.0	Top					0.00
2441	39	1.0	Bottom					0.00
2441	39	1.0	+HS					0.00
Body-worn								
2441	39	1.5	Back	9.8	9.8	0.01	0.01	0.01
2441	39	1.5	Front					0.00
2441	39	Holster	Back					0.00

Table 11.2-11 SAR results for Bluetooth body-worn and Hotspot configurations

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		86(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

Measured/Extrapolated SAR Values - Body-Worn - 802.11a 5000 MHz Full Power								
Ch.	Freq. (MHz)	spacing (cm)/holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
36	5180	1.5	Back	15.0	13.1	0.56	0.33	0.51
40	5200	1.5	Back					0.00
44	5220	1.5	Back					0.00
48	5240	1.5	Back					0.00
52	5260	1.5	Back	16.5	14.8	-0.11	0.45	0.67
56	5280	1.5	Back					0.00
60	5300	1.5	Back					0.00
64	5320	1.5	Back					0.00
104	5520	1.5	Back	19.0	17.3	0.08	0.73	1.08
104	5520	1.5	Back(2nd)	19.0	17.3	-0.07	0.73	1.08
116	5580	1.5	Back	19.0	17.2	0.04	0.66	1.00
124	5620	1.5	Back	19.0	17.1	-0.05	0.62	0.96
136	5680	1.5	Back	19.0	17.0	0.49	0.50	0.79
140	5700	1.5	Back					0.00
149	5745	1.5	Back					0.00
153	5765	1.5	Back	18.5	16.6	-0.15	0.35	0.54
157	5785	1.5	Back					0.00
161	5805	1.5	Back					0.00
165	5825	1.5	Back					0.00
104	5520	1.5	Front	19.0	17.3	0.13	0.04	0.06
104	5520	Holster	Back	19.0	17.3	-0.15	0.30	0.44
104	5520	Holster	Front					0.00


Table 11.2-12a SAR results for Wi-Fi/WLAN/802.11a body-worn configurations with full power

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		87(89)	
Author Data	Dates of Test	Test Report No	FCC ID:		
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	RTS-6046-1310-25 Rev 3	L6ARFV120LW		

Measured/Extrapolated SAR Values - Body-Worn - 802.11a 5000 MHz Simultaneous Transmission Reduced Power Level								
Ch.	Freq. (MHz)	spacing (cm)/ holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Measured	Extrapolated
36	5180	1.5	Back					0.00
40	5200	1.5	Back					0.00
44	5220	1.5	Back					0.00
48	5240	1.5	Back					0.00
52	5260	1.5	Back					0.00
56	5280	1.5	Back					0.00
60	5300	1.5	Back					0.00
64	5320	1.5	Back					0.00
104	5520	1.5	Back	16.5	15.0	0.02	0.45	0.64
116	5580	1.5	Back	16.5	14.8	0.42	0.39	0.58
124	5620	1.5	Back	16.5	14.7	0.14	0.32	0.48
136	5680	1.5	Back	16.5	14.7	0.01	0.28	0.42
140	5700	1.5	Back					0.00
149	5745	1.5	Back					0.00
153	5765	1.5	Back					0.00
157	5785	1.5	Back					0.00
161	5805	1.5	Back					0.00
165	5825	1.5	Back					0.00
104	5520	1.5	Front					0.00
104	5520	Holster	Back					0.00
104	5520	Holster	Front					0.00
		1.5	+HS					0.00

Table 11.2-12b SAR results for Wi-Fi/WLAN/802.11a body-worn configurations in reduced power level for Simultaneous Transmission when cellular mode/band is active.

Note: There is fixed power reduction on 802.11a/n when transmitting simultaneously with cellular mode/band

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		88(89)	
Author Data	Dates of Test		Test Report No	FCC ID:	
Andrew Becker	July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014		RTS-6046-1310-25 Rev 3	L6ARFV120LW	


Measured/Extrapolated SAR Values - Hotspot - 802.11a 5000-6000 MHz								
Ch.	Freq. (MHz)	spacing (cm)/holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Extrapolated	Reported
36*	5180	1.0	Back	11.0	10.3	0.03	0.51	0.59
40	5200	1.0	Back					0.00
44	5220	1.0	Back					0.00
48*	5240	1.0	Back					0.00
149*	5745	1.0	Back	11.0	10.3	0.11	0.14	0.16
153	5765	1.0	Back					0.00
157*	5785	1.0	Back					0.00
161	5805	1.0	Back					0.00
165*	5825	1.0	Back					0.00
36*	5180	1.0	Front	11.0	10.3	0.06	0.03	0.03
36*	5180	1.0	Left	11.0	10.3	-0.09	0.24	0.28
36*	5180	1.0	Right					0.00
36*	5180	1.0	Top					0.00

Table 11.2-13 SAR results for Wi-Fi/WLAN/802.11a Hotspot configurations measured using BlackBerry model RFW121LW

Note 1: Tested only highest output power channel per band

Note 2: * denotes the default channels of each sub band to be tested when reported 1g SAR ≥ 0.8 W/kg.

Note 3: 802.11a/n Hotspot mode does not support channels 52-136.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFV121LW Rev 3		Page 89(89)
Author Data Andrew Becker	Dates of Test July 12 – October 16, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1310-25 Rev 3	FCC ID: L6ARFV120LW	

12.0 REFERENCES

- [1] DASY 5 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL, Schmid & Partner Engineering AG.
- [2] FCC 47 CRF Part 2.1093, Radiofrequency radiation exposure evaluation: portable devices. June 18, 2014.
- [3] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [4] Health Canada, Safety Code 6, 2009: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.
- [5] IEEE C95.1-1992, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [6] IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [7] IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [8] KDB 248227 D01 v01r02, May 2007: FCC OET SAR Measurement Procedures for 802.11 a/b/g Transmitters.
- [9] KDB 447498 D01 v05r02, Feb 2014: FCC OET Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.
- [10] KDB 648474 D04 v01r02, Dec 2013: FCC OET SAR Evaluation Considerations for Wireless Handsets.
- [11] KDB 865664 D01 v01r03, Feb 2014: FCC OET SAR Measurement Requirements for 100 MHz to 6 GHz.
- [12] KDB 865664 D02 v01r01, May 2013: FCC OET RF Exposure Compliance Reporting and Documentation Considerations.
- [13] KDB 941225 D01 v03r00, Oct 2014: FCC OET 3G SAR Measurement Procedures.
- [14] KDB 941225 D05 v02r03, Dec 2013: FCC OET SAR Evaluation Considerations for LTE Devices.
- [15] KDB 941225 D05A v01r01, Aug 2014: FCC OET Rel.10 LTE SAR Test Guidance and KDB Inquires.
- [16] KDB 941225 D06 v02r00, Oct 2014: FCC OET SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities.
- [17] 3GPP TS 36.521-1 V10.0.0 (2011-12): Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification; Radio transmission and reception; Part 1: Conformance testing.
- [18] RSS-102, issue 4-2010: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields.
- [19] ICNIRP, International Commission on Non-Ionizing Radiation Protection (2009), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [20] IEC 62209-1, First Edition-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).
- [21] IEC 62209-2, Edition 1.0-2010: Human exposure to radio frequency fields from hand-held and body-mount wireless communication devices – Human Models, instrumentation, and procedures - part 2 - procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).