



FCC TEST REPORT

FCC ID:2A6FW-Y813BT

Report Number.....: **ZKT-24122419363E-2**

Date of Test..... Dec. 24, 2024 to Dec. 31, 2024

Date of issue.....: Dec. 31, 2024

Total number of pages..... 71

Test Result: PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Xiamen Print Future Technology Co.,Ltd.

Address Room 701, No. 55 Dongling Road, Houxi Town, Jimei District, Xiamen City, Fujian Province, China

Manufacturer's name: Xiamen Print Future Technology Co.,Ltd.

Address Room 701, No. 55 Dongling Road, Houxi Town, Jimei District, Xiamen City, Fujian Province, China

Test specification:

Standard..... FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-112_V0**Test Report Form(s) Originator.....: ZKT Testing****Master TRF: Dated: 2020-01-06**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Thermal Label Printer

Trademark: N/A

Model/Type reference.....: Y813BT
See page 8 for more modelRatings.....: Input: 24V  2.5A, 60W
AC/DC Adapter Input: 100-240V ~ 50/60Hz, 1.5A



Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 TEST SETUP CONFIGURATION	10
3.3 SUPPORT EQUIPMENT	10
3.4 TEST MODE	10
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSIONS	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSIONS	21
4.2.1 RADIATED EMISSION LIMITS	21
4.2.2 TEST PROCEDURE	21
4.2.3 DEVIATION FROM TEST STANDARD	22
4.2.4 TEST SETUP	22
4.2.5 EUT OPERATING CONDITIONS	23
4.2.6 TEST RESULTS	23
5. RADIATED BAND EMISSION MEASUREMENT	36
5.1 TEST REQUIREMENT:	36
5.2 TEST PROCEDURE	36
5.3 DEVIATION FROM TEST STANDARD	37
5.4 TEST SETUP	37
5.5 EUT OPERATING CONDITIONS	37
5.6 TEST RESULT	38
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	40
6.1 LIMIT	40
6.2 TEST SETUP	40
6.3 TEST PROCEDURE	40
6.4 DEVIATION FROM STANDARD	40
6.5 TEST RESULT	41
7. 20DB OCCUPIED BANDWIDTH	47
7.1 TEST SETUP	47
7.2 LIMIT	47
7.3 TEST PROCEDURE	47
7.4 DEVIATION FROM STANDARD	47
7.5 TEST RESULT	48
8. MAXIMUM PEAK OUTPUT POWER	52
8.1 BLOCK DIAGRAM OF TEST SETUP	52
8.2 LIMIT	52
8.3 TEST PROCEDURE	52
8.4 DEVIATION FROM STANDARD	52
8.5 TEST RESULT	53
9. HOPPING CHANNEL SEPARATION	57
9.1 TEST SETUP	57
9.2 TEST PROCEDURE	57
9.3 DEVIATION FROM STANDARD	57



9.4 TEST RESULT	58
10.NUMBER OF HOPPING FREQUENCY	62
10.1 TEST SETUP	62
10.2 TEST PROCEDURE	62
10.3 DEVIATION FROM STANDARD	62
10.4 TEST RESULT	63
11. DWELL TIME	65
11.1 TEST SETUP	65
11.2 TEST PROCEDURE	65
11.3 DEVIATION FROM STANDARD	65
11.4 TEST RESULT	66
12. ANTENNA REQUIREMENT	70
13. TEST SETUP PHOTO	71
14. EUT CONSTRUCTIONAL DETAILS	71



1. VERSION

Report No.	Version	Description	Approved
ZKT-24122419363E-2	Rev.01	Initial issue of report	Dec. 31, 2024



2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted Emissions and Band Edge	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Thermal Label Printer
Model No.:	Y813BT
Serial No.:	Y813, Y814, Y814BT, A813B, B813, C813B, D813B, E813B, F813B, G813B, H813B, J813B, K813B, L813B, M813B, N813B, P813B, Q813B, S813B, Y812BT, Y812, A812B, B812, C812B, D812B, E812B, F812B, G812B, H812B, J812B, K812B, L812B, M812B, N812B, P812B, Q812B, S812B, Y811BT, Y811, Y810BT, Y810, P-810, P-810B, ITPP-130B, ITPP130, PR40, CTP800BD, S811B
Model Different.:	All models are the same circuit and RF module, only the external shape and model name are different, as follows: The following appearance is consistent: Y811BT, Y811, Y810BT, Y810, P-810, P-810B, ITPP-130B, ITPP130, PR40, CTP800BD, S811B The following appearance is consistent: Y812BT, Y812, A812B, B812, C812B, D812B, E812B, F812B, G812B, H812B, J812B, K812B, L812B, M812B, N812B, P812B, Q812B, S812B The following appearance is consistent: Y813BT, Y813, Y814, Y814BT, A813B, B813, C813B, D813B, E813B, F813B, G813B, H813B, J813B, K813B, L813B, M813B, N813B, P813B, Q813B, S813B
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Channel Numbers:	79
Channel Spacing:	1MHz
Operation Frequency:	2402MHz~2480MHz
Modulation Technology:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	PCB antenna
Antenna gain:	3.14dBi
Power supply:	Input: 24V $\overline{=}$ 2.5A, 60W
AC/DC Adapter:	Input: 100-240V ~ 50/60Hz, 1.5A Output: 24V $\overline{=}$ 2.5A, 60W
AC/DC Adapter Model 1:	ADP-60D24
AC/DC Adapter Model 2:	XH2400-2500
AC/DC Adapter Model 3:	KL-D240250-J2



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz




3.2 TEST SETUP CONFIGURATION

Conducted Emission



Radiated Emission



Conducted Spurious



3.3 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Thermal Label Printer	N/A	Y813BT	N/A	EUT
E-2	AC/DC Adapter 1	DAJING	ADP-60D24	N/A	Auxiliary
	AC/DC Adapter 2	XUNHENG	XH2400-2500	N/A	Auxiliary
	AC/DC Adapter 3	KLEC	KL-D240250-J2	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 TEST MODE

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	BR BlueletSuite_v6_0
Power level setup	7dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektronik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSIONS

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

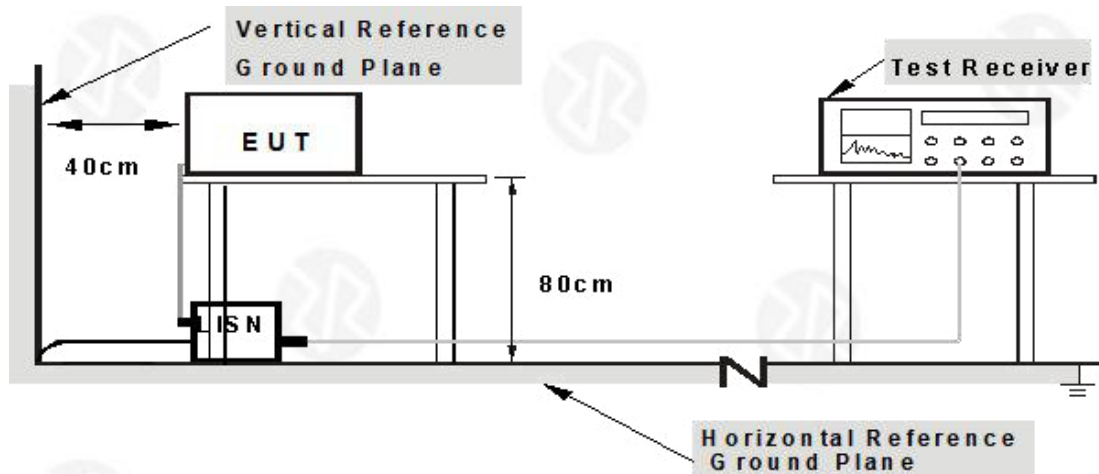

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

4.1.6.1 EUT test used AC/DC Adapter 1:

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	GFSK 1-DH1 - 2402MHz

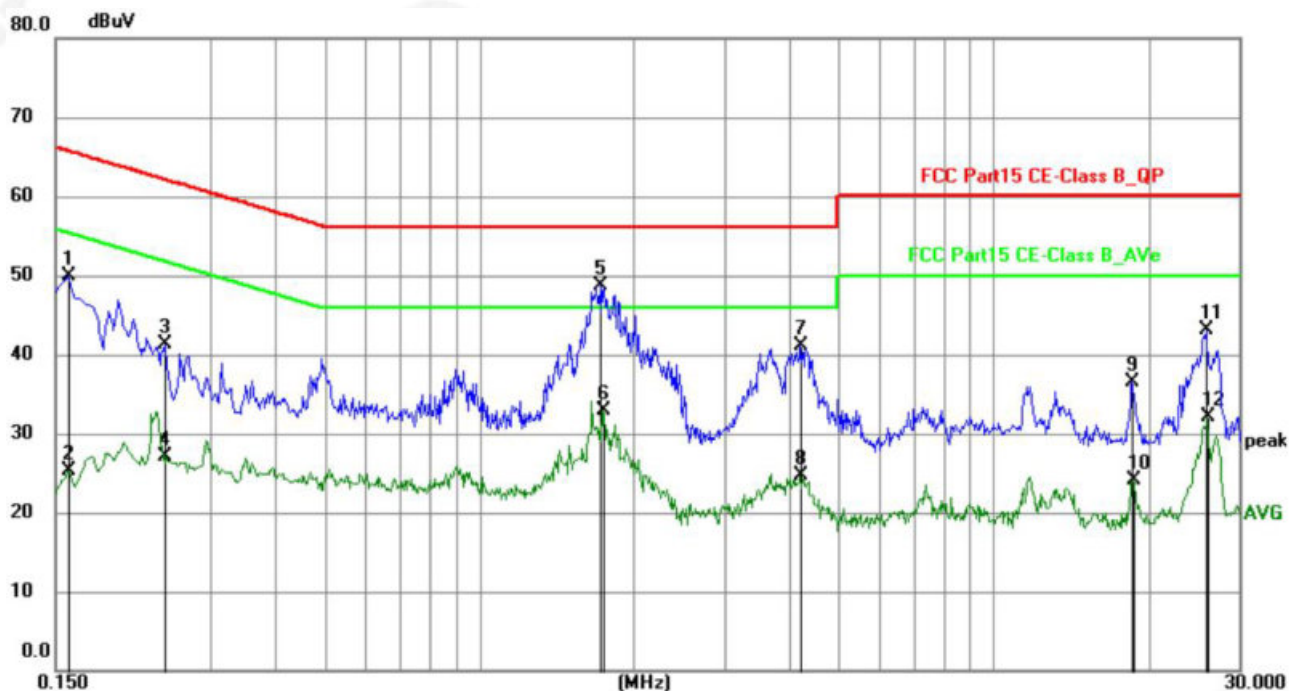


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	29.67	20.22	49.89	65.52	-15.63	QP	P	
2	0.1590	4.99	20.22	25.21	55.52	-30.31	AVG	P	
3	0.2444	20.98	20.37	41.35	61.95	-20.60	QP	P	
4	0.2454	6.77	20.37	27.14	51.91	-24.77	AVG	P	
5	1.7249	28.37	20.30	48.67	56.00	-7.33	QP	P	
6	1.7422	12.66	20.30	32.96	46.00	-13.04	AVG	P	
7	4.2045	20.78	20.35	41.13	56.00	-14.87	QP	P	
8	4.2045	4.29	20.35	24.64	46.00	-21.36	AVG	P	
9	18.5910	15.95	20.50	36.45	60.00	-23.55	QP	P	
10	18.6356	3.68	20.50	24.18	50.00	-25.82	AVG	P	
11	25.9435	22.50	20.65	43.15	60.00	-16.85	QP	P	
12	26.0200	11.36	20.65	32.01	50.00	-17.99	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liscn factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	GFSK 1-DH1 - 2402MHz

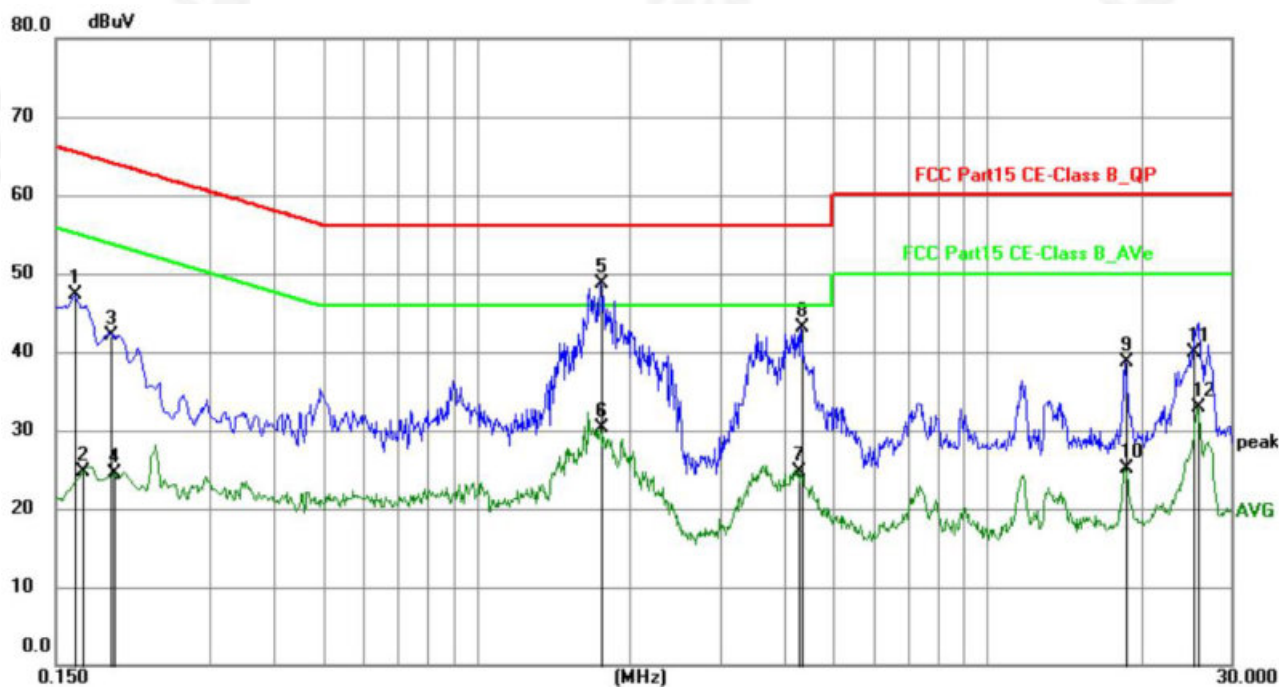

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	27.10	20.22	47.32	65.28	-17.96	QP	P	
2	0.1693	4.49	20.25	24.74	54.99	-30.25	AVG	P	
3	0.1922	21.86	20.34	42.20	63.94	-21.74	QP	P	
4	0.1949	4.13	20.35	24.48	53.83	-29.35	AVG	P	
5	1.7519	28.37	20.30	48.67	56.00	-7.33	QP	P	
6	1.7519	10.06	20.30	30.36	46.00	-15.64	AVG	P	
7	4.2675	4.29	20.34	24.63	46.00	-21.37	AVG	P	
8	4.3170	22.75	20.34	43.09	56.00	-12.91	QP	P	
9	18.6493	18.15	20.52	38.67	60.00	-21.33	QP	P	
10	18.6493	4.50	20.52	25.02	50.00	-24.98	AVG	P	
11	25.2774	19.32	20.66	39.98	60.00	-20.02	QP	P	
12	25.7591	12.18	20.68	32.86	50.00	-17.14	AVG	P	


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liss factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



4.1.6.1 EUT test used AC/DC Adapter 2:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	GFSK 1-DH1 - 2402MHz

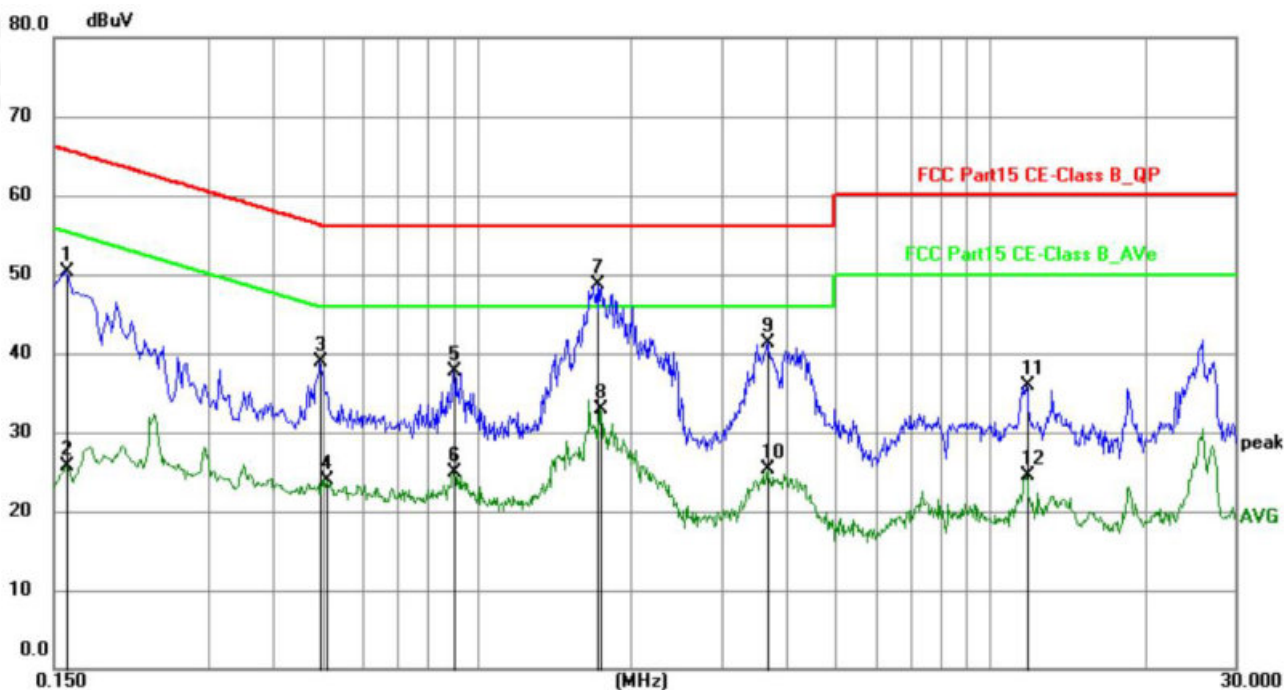


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	30.17	20.22	50.39	65.52	-15.13	QP	P	
2	0.1590	5.49	20.22	25.71	55.52	-29.81	AVG	P	
3	0.4964	18.67	20.30	38.97	56.06	-17.09	QP	P	
4	0.5100	3.69	20.30	23.99	46.00	-22.01	AVG	P	
5	0.9012	17.33	20.30	37.63	56.00	-18.37	QP	P	
6	0.9012	4.63	20.30	24.93	46.00	-21.07	AVG	P	
7	1.7249	28.37	20.30	48.67	56.00	-7.33	QP	P	
8	1.7421	12.66	20.30	32.96	46.00	-13.04	AVG	P	
9	3.6825	20.95	20.34	41.29	56.00	-14.71	QP	P	
10	3.6825	4.98	20.34	25.32	46.00	-20.68	AVG	P	
11	11.7735	15.49	20.47	35.96	60.00	-24.04	QP	P	
12	11.7735	4.10	20.47	24.57	50.00	-25.43	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liss factor + Cable loss factor + limiter factor.
5. Margin = Measurement Level - Limit.
6. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	GFSK 1-DH1 - 2402MHz

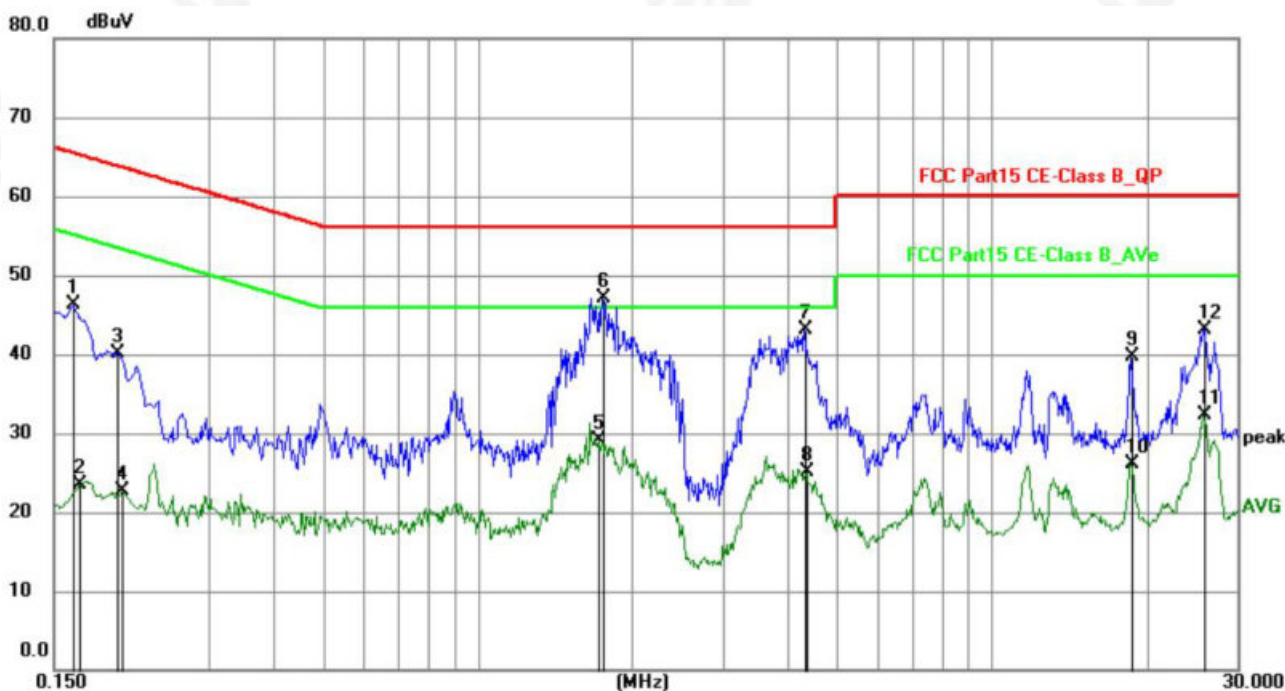

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	26.10	20.22	46.32	65.28	-18.96	QP	P	
2	0.1680	3.19	20.24	23.43	55.06	-31.63	AVG	P	
3	0.1995	19.64	20.37	40.01	63.63	-23.62	QP	P	
4	0.2038	2.34	20.37	22.71	53.45	-30.74	AVG	P	
5	1.7200	8.77	20.30	29.07	46.00	-16.93	AVG	P	
6	1.7519	26.87	20.30	47.17	56.00	-8.83	QP	P	
7	4.3170	22.75	20.34	43.09	56.00	-12.91	QP	P	
8	4.3665	4.70	20.34	25.04	46.00	-20.96	AVG	P	
9	18.6493	19.15	20.52	39.67	60.00	-20.33	QP	P	
10	18.6493	5.50	20.52	26.02	50.00	-23.98	AVG	P	
11	25.7591	11.68	20.68	32.36	50.00	-17.64	AVG	P	
12	25.9573	22.43	20.68	43.11	60.00	-16.89	QP	P	


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lisn factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



4.1.6.1 EUT test used AC/DC Adapter 3:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	GFSK 1-DH1 - 2402MHz

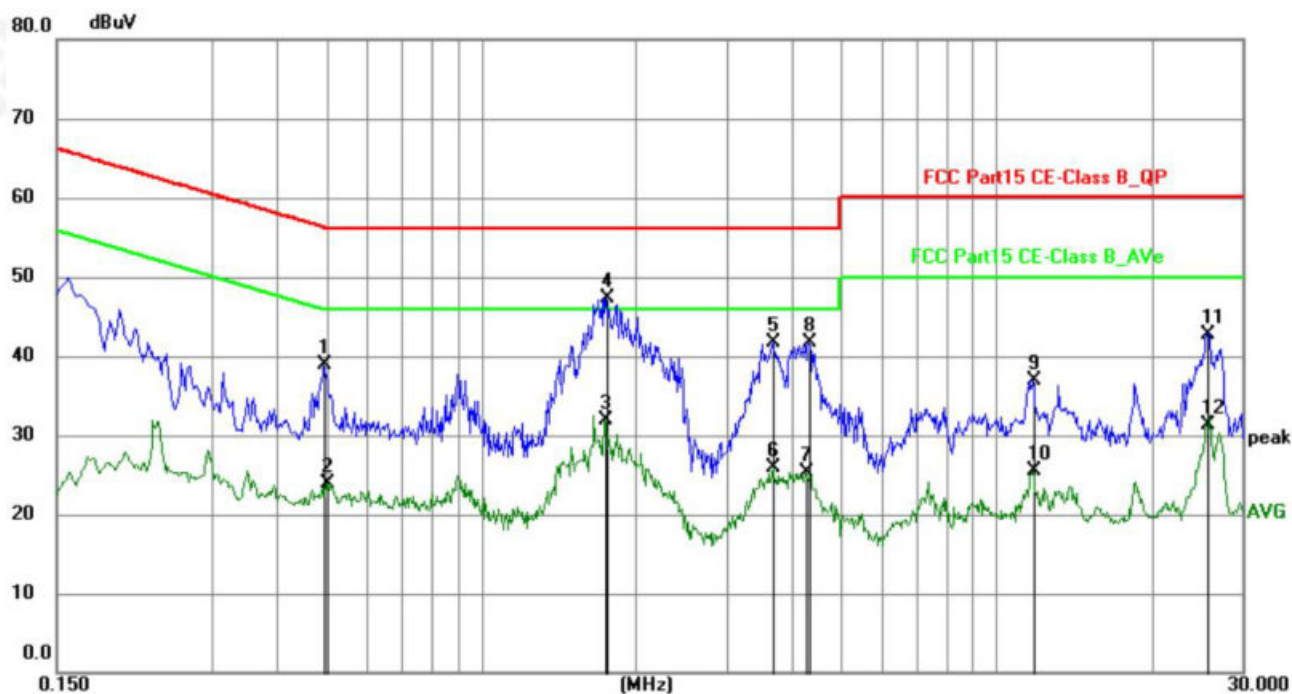


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4964	18.67	20.30	38.97	56.06	-17.09	QP	P	
2	0.5010	3.64	20.30	23.94	46.00	-22.06	AVG	P	
3	1.7420	11.66	20.30	31.96	46.00	-14.04	AVG	P	
4	1.7519	26.99	20.30	47.29	56.00	-8.71	QP	P	
5	3.6825	21.45	20.34	41.79	56.00	-14.21	QP	P	
6	3.6825	5.48	20.34	25.82	46.00	-20.18	AVG	P	
7	4.2629	4.90	20.35	25.25	46.00	-20.75	AVG	P	
8	4.3215	21.36	20.35	41.71	56.00	-14.29	QP	P	
9	11.7735	16.49	20.47	36.96	60.00	-23.04	QP	P	
10	11.7735	5.10	20.47	25.57	50.00	-24.43	AVG	P	
11	25.7099	22.10	20.64	42.74	60.00	-17.26	QP	P	
12	25.7099	10.71	20.64	31.35	50.00	-18.65	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liss factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	GFSK 1-DH1 - 2402MHz

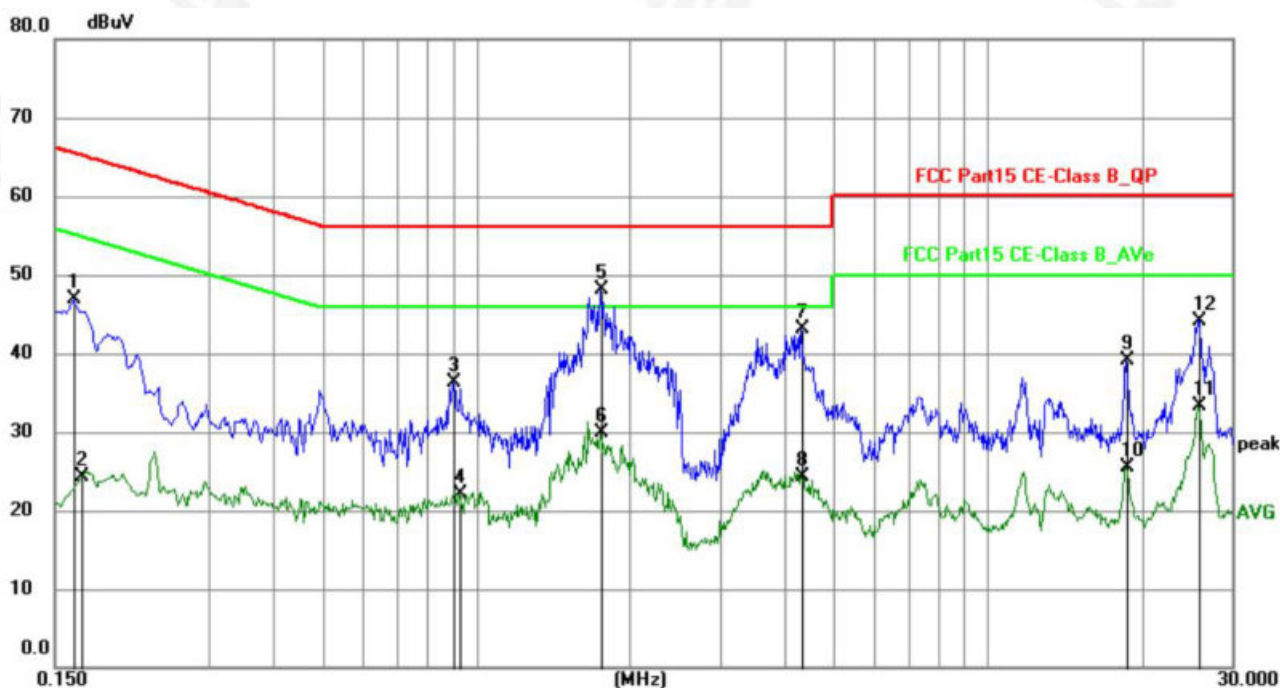

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	26.60	20.22	46.82	65.28	-18.46	QP	P	
2	0.1693	3.99	20.25	24.24	54.99	-30.75	AVG	P	
3	0.9012	15.99	20.30	36.29	56.00	-19.71	QP	P	
4	0.9239	1.89	20.30	22.19	46.00	-23.81	AVG	P	
5	1.7519	27.87	20.30	48.17	56.00	-7.83	QP	P	
6	1.7519	9.56	20.30	29.86	46.00	-16.14	AVG	P	
7	4.3170	22.75	20.34	43.09	56.00	-12.91	QP	P	
8	4.3170	4.00	20.34	24.34	46.00	-21.66	AVG	P	
9	18.6493	18.65	20.52	39.17	60.00	-20.83	QP	P	
10	18.6493	5.00	20.52	25.52	50.00	-24.48	AVG	P	
11	25.7591	12.68	20.68	33.36	50.00	-16.64	AVG	P	
12	25.9573	23.43	20.68	44.11	60.00	-15.89	QP	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Liss factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



4.2 RADIATED EMISSIONS

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	MX5Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.



- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

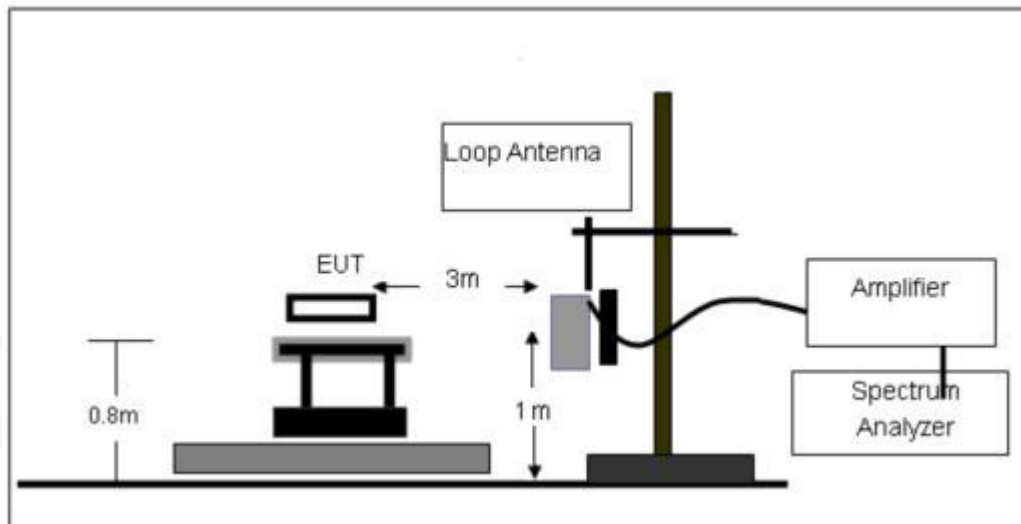




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

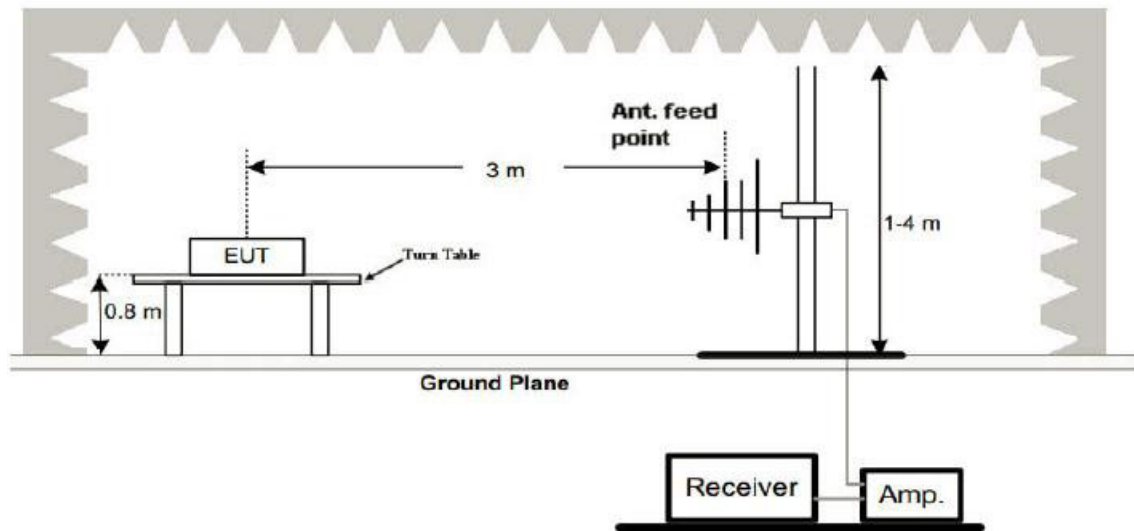

(C) Radiated Emission Test-Up Frequency Above 1GHz

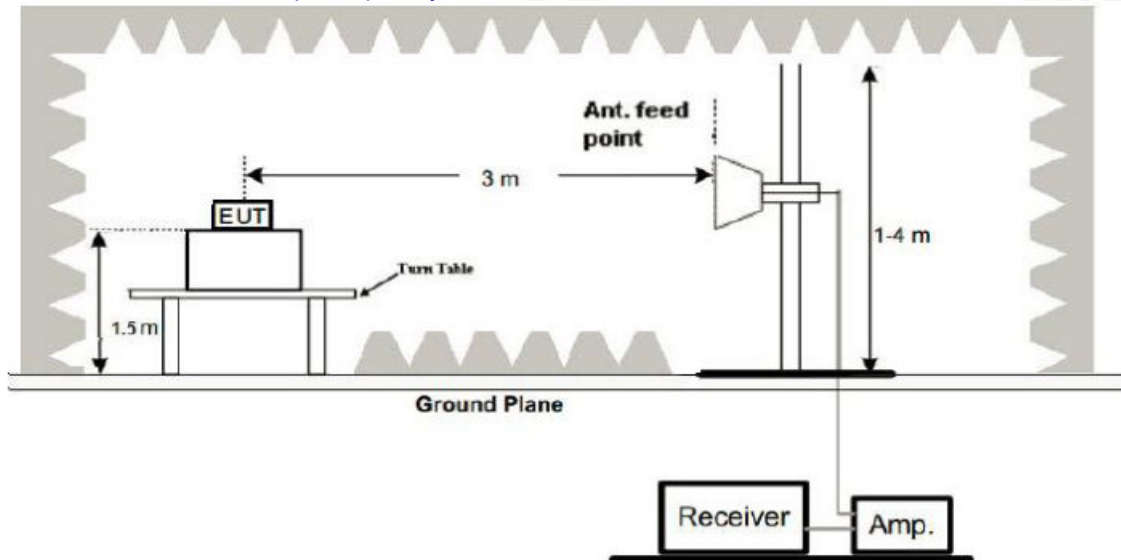

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

EUT test used AC/DC Adapter 1:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 24V	Test Mode :	GFSK 1-DH1 - 2402MHz

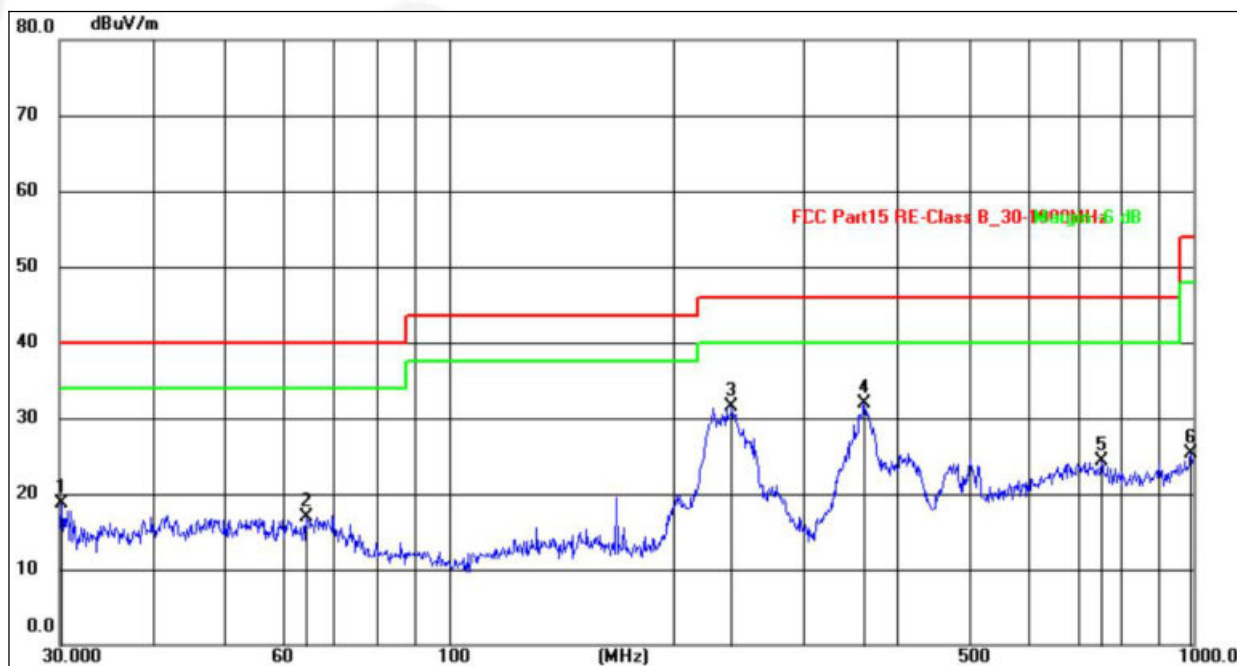


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.2104	32.80	-14.15	18.65	40.00	-21.35	QP
2	64.4330	32.30	-15.31	16.99	40.00	-23.01	QP
3	239.9873	47.52	-15.92	31.60	46.00	-14.40	QP
4	361.7137	48.18	-16.25	31.93	46.00	-14.07	QP
5	752.7431	30.76	-6.55	24.21	46.00	-21.79	QP
6	993.0113	30.00	-4.71	25.29	54.00	-28.71	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin= Measurement Level-Limit.
7. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 24V	Test Mode :	GFSK 1-DH1 - 2402MHz

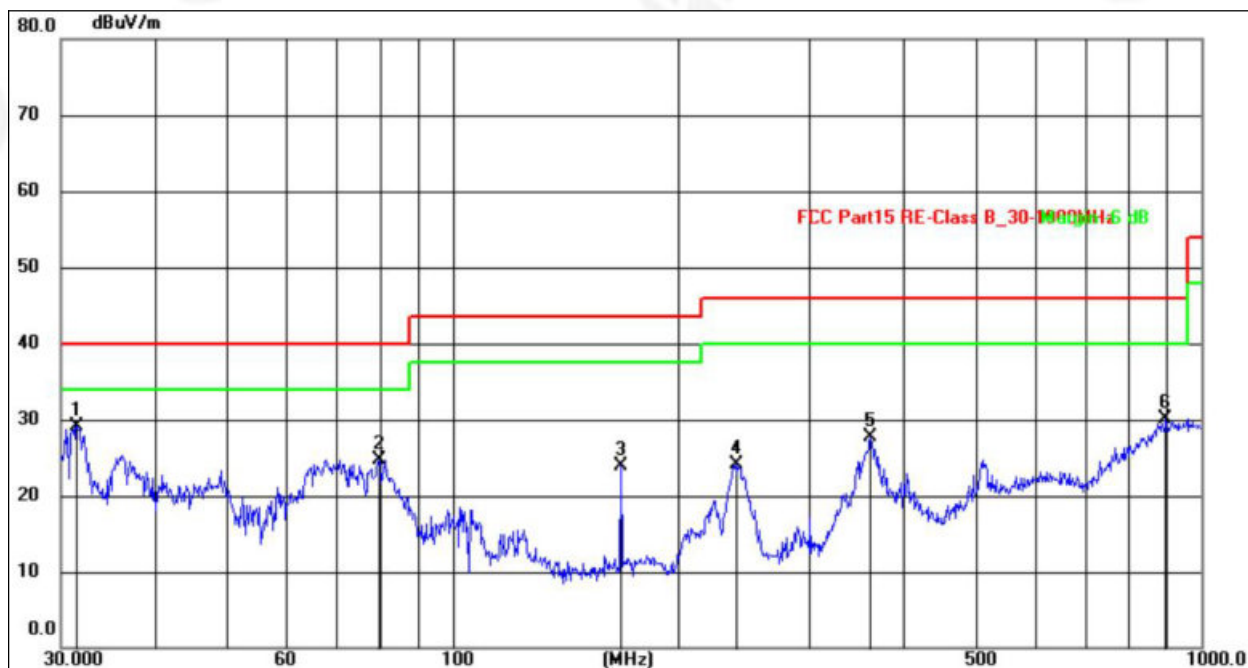

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.5091	47.22	-18.08	29.14	40.00	-10.86	QP
2	79.8002	46.39	-21.70	24.69	40.00	-15.31	QP
3	167.8240	43.78	-19.81	23.97	43.50	-19.53	QP
4	239.1468	43.94	-19.92	24.02	46.00	-21.98	QP
5	361.7137	43.50	-15.82	27.68	46.00	-18.32	QP
6	896.9963	30.66	-0.52	30.14	46.00	-15.86	QP


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin= Measurement Level-Limit.
7. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



EUT test used AC/DC Adapter 2:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 24V	Test Mode :	GFSK 1-DH1 - 2402MHz

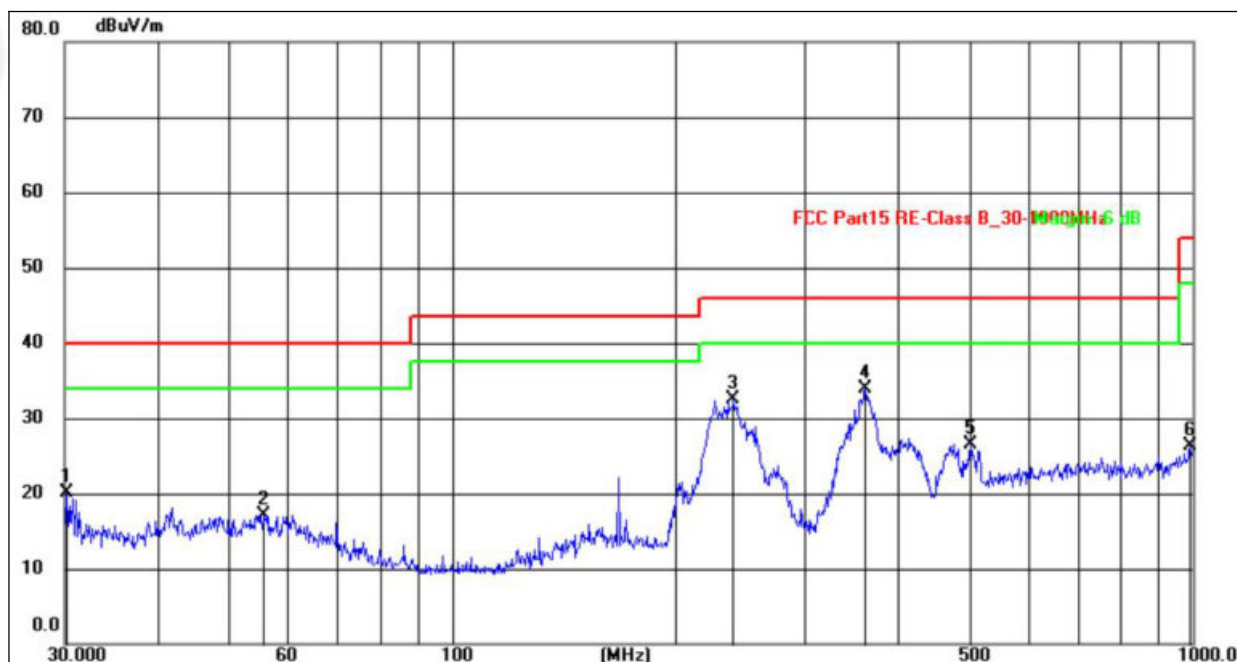


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.2103	34.30	-14.15	20.15	40.00	-19.85	QP
2	55.6092	31.16	-14.04	17.12	40.00	-22.88	QP
3	239.9873	48.52	-15.92	32.60	46.00	-13.40	QP
4	361.7137	50.18	-16.25	33.93	46.00	-12.07	QP
5	501.1788	37.50	-11.00	26.50	46.00	-19.50	QP
6	993.0113	31.00	-4.71	26.29	54.00	-27.71	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin= Measurement Level-Limit.
7. The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 24V	Test Mode :	GFSK 1-DH1 - 2402MHz

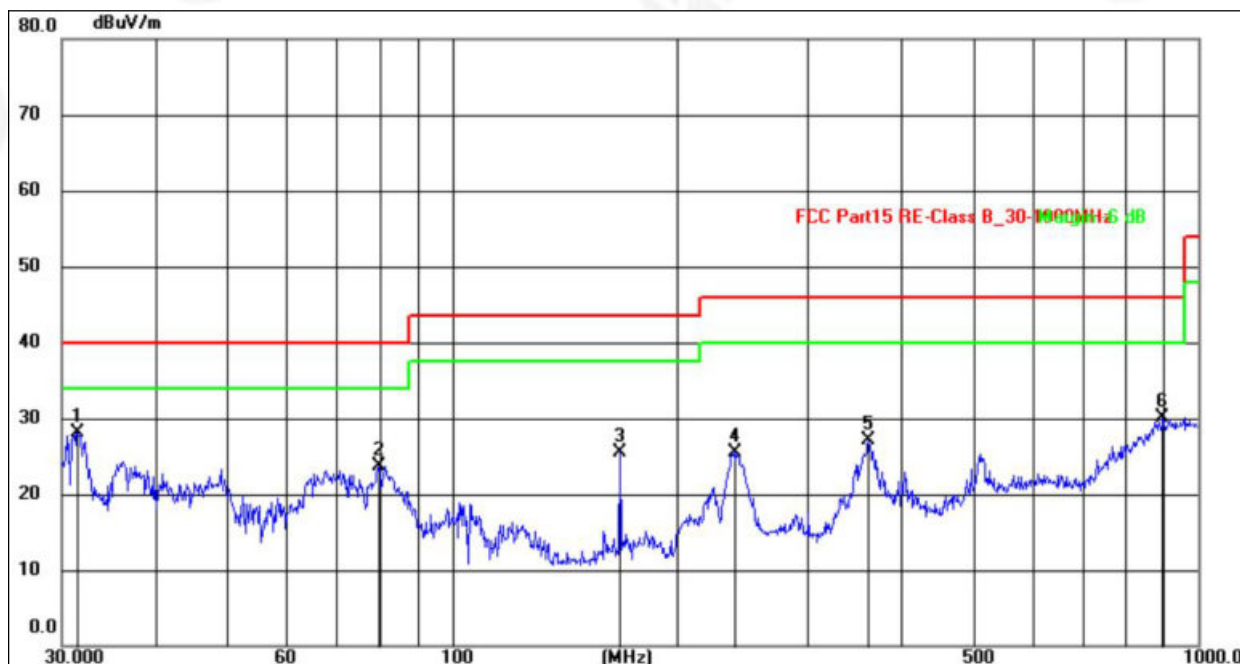

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.5091	46.22	-18.08	28.14	40.00	-11.86	QP
2	79.8002	45.39	-21.70	23.69	40.00	-16.31	QP
3	167.8240	45.28	-19.81	25.47	43.50	-18.03	QP
4	239.1468	45.44	-19.92	25.52	46.00	-20.48	QP
5	361.7137	43.00	-15.82	27.18	46.00	-18.82	QP
6	896.9963	30.66	-0.52	30.14	46.00	-15.86	QP


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin= Measurement Level-Limit.
- 7.The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



EUT test used AC/DC Adapter 3:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 24V	Test Mode :	GFSK 1-DH1 - 2402MHz

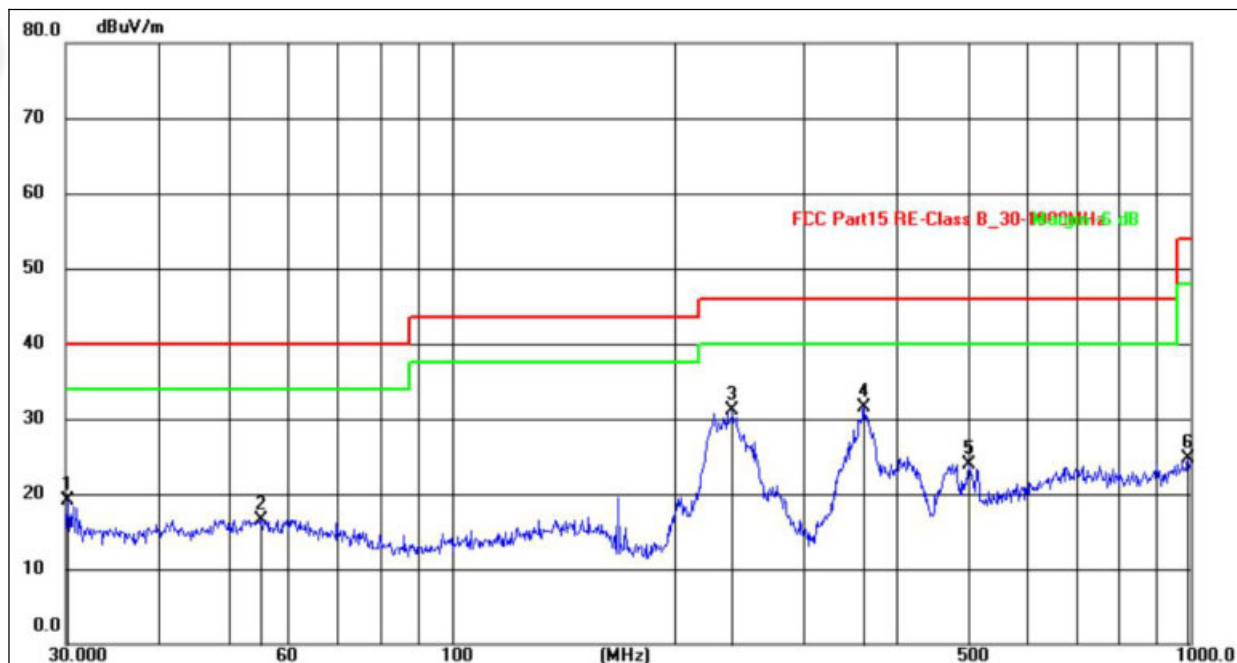


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.2103	33.30	-14.15	19.15	40.00	-20.85	QP
2	55.2207	30.52	-14.03	16.49	40.00	-23.51	QP
3	239.9873	47.02	-15.92	31.10	46.00	-14.90	QP
4	361.7137	47.68	-16.25	31.43	46.00	-14.57	QP
5	501.1788	35.00	-11.00	24.00	46.00	-22.00	QP
6	993.0113	29.50	-4.71	24.79	54.00	-29.21	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin= Measurement Level-Limit.
- 7.The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 24V	Test Mode :	GFSK 1-DH1 - 2402MHz

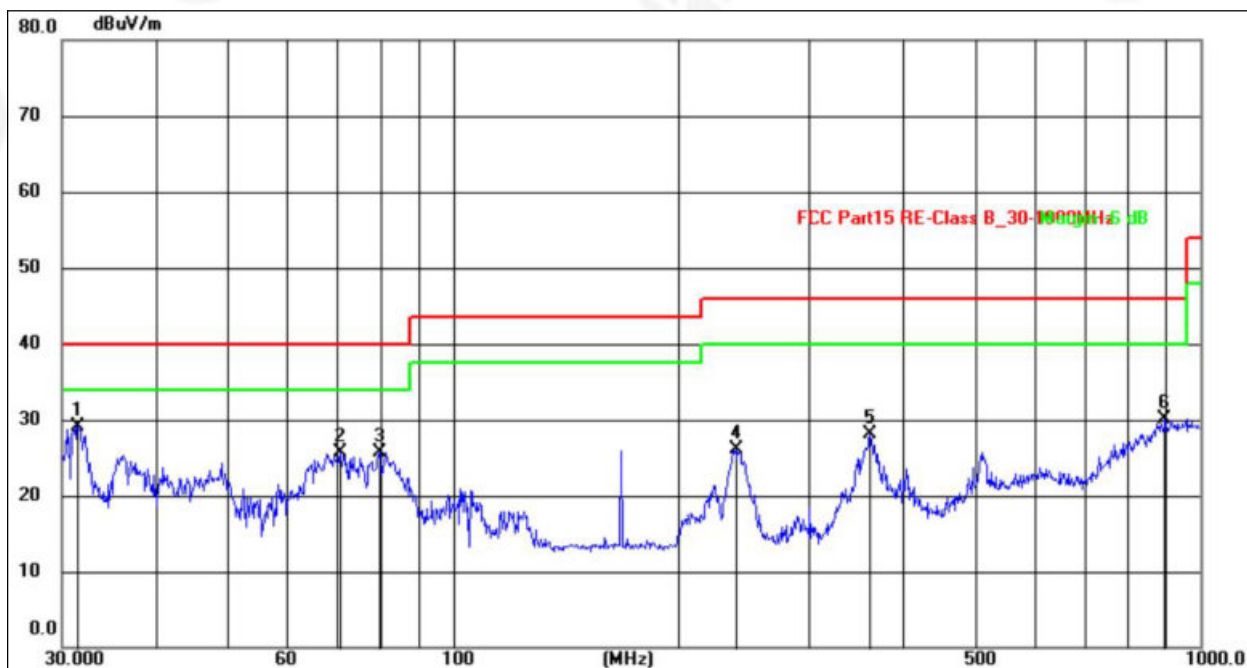

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.5091	47.22	-18.08	29.14	40.00	-10.86	QP
2	70.5835	44.99	-19.38	25.61	40.00	-14.39	QP
3	79.8002	47.39	-21.70	25.69	40.00	-14.31	QP
4	239.1468	45.94	-19.92	26.02	46.00	-19.98	QP
5	361.7137	44.00	-15.82	28.18	46.00	-17.82	QP
6	896.9963	30.66	-0.52	30.14	46.00	-15.86	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin= Measurement Level-Limit.
- 7.The test data shows only the worst case GFSK 1-DH1 - 2402MHz.



1GHz~25GHz (EUT test used AC/DC Adapter 1)

GFSK - 1-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.43	30.55	5.77	24.66	50.31	74.00	-23.69	PK
V	4804.00	43.11	30.55	5.77	24.66	42.99	54.00	-11.01	AV
V	7206.00	53.62	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7206.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	9608.00	53.53	30.85	7.45	24.69	54.82	74.00	-19.18	PK
V	9608.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
V	12010.00	52.27	31.02	8.99	25.57	55.81	74.00	-18.19	PK
V	12010.00	43.56	31.02	8.99	25.57	47.10	54.00	-6.90	AV
H	4804.00	52.76	30.55	5.77	24.66	52.64	74.00	-21.36	PK
H	4804.00	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
H	7206.00	54.54	30.33	6.32	24.55	55.08	74.00	-18.92	PK
H	7206.00	43.35	30.33	6.32	24.55	43.89	54.00	-10.11	AV
H	9608.00	52.38	30.85	7.45	24.69	53.67	74.00	-20.33	PK
H	9608.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
H	12010.00	53.02	31.02	8.99	25.57	56.56	74.00	-17.44	PK
H	12010.00	43.93	31.02	8.99	25.57	47.47	54.00	-6.53	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	54.54	30.55	5.77	24.66	54.42	74.00	-19.58	PK
V	4882.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
V	7323.00	51.74	30.33	6.32	24.55	52.28	74.00	-21.72	PK
V	7323.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	9764.00	51.52	30.85	7.45	24.69	52.81	74.00	-21.19	PK
V	9764.00	43.43	30.85	7.45	24.69	44.72	54.00	-9.28	AV
V	12205.00	50.39	31.02	8.99	25.57	53.93	74.00	-20.07	PK
V	12205.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV
H	4882.00	53.13	30.55	5.77	24.66	53.01	74.00	-20.99	PK
H	4882.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
H	7323.00	54.38	30.33	6.32	24.55	54.92	74.00	-19.08	PK
H	7323.00	43.13	30.33	6.32	24.55	43.67	54.00	-10.33	AV
H	9764.00	54.15	30.85	7.45	24.69	55.44	74.00	-18.56	PK
H	9764.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
H	12205.00	54.18	31.02	8.99	25.57	57.72	74.00	-16.28	PK
H	12205.00	43.97	31.02	8.99	25.57	47.51	54.00	-6.49	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	51.11	30.55	5.77	24.66	50.99	74.00	-23.01	PK
V	4960.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
V	7440.00	51.25	30.33	6.32	24.55	51.79	74.00	-22.21	PK
V	7440.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9920.00	51.09	30.85	7.45	24.69	52.38	74.00	-21.62	PK
V	9920.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	12400.00	53.71	31.02	8.99	25.57	57.25	74.00	-16.75	PK
V	12400.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV
H	4960.00	52.25	30.55	5.77	24.66	52.13	74.00	-21.87	PK
H	4960.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
H	7440.00	54.81	30.33	6.32	24.55	55.35	74.00	-18.65	PK
H	7440.00	43.41	30.33	6.32	24.55	43.95	54.00	-10.05	AV
H	9920.00	53.30	30.85	7.45	24.69	54.59	74.00	-19.41	PK
H	9920.00	43.57	30.85	7.45	24.69	44.86	54.00	-9.14	AV
H	12400.00	50.95	31.02	8.99	25.57	54.49	74.00	-19.51	PK
H	12400.00	43.41	31.02	8.99	25.57	46.95	54.00	-7.05	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
2. Margin= Emission Level - Limit
3. If peak below the average limit, the average emission was no test.
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Only the worst test data recorded is AC / DC Adapter 1.

 $\pi/4$ -DQPSK - 2-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	53.70	30.55	5.77	24.66	53.58	74.00	-20.42	PK
V	4804.00	43.68	30.55	5.77	24.66	43.56	54.00	-10.44	AV
V	7206.00	54.69	30.33	6.32	24.55	55.23	74.00	-18.77	PK
V	7206.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
V	9608.00	54.22	30.85	7.45	24.69	55.51	74.00	-18.49	PK
V	9608.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
V	12010.00	53.35	31.02	8.99	25.57	56.89	74.00	-17.11	PK
V	12010.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV
H	4804.00	51.05	30.55	5.77	24.66	50.93	74.00	-23.07	PK
H	4804.00	43.68	30.55	5.77	24.66	43.56	54.00	-10.44	AV
H	7206.00	53.62	30.33	6.32	24.55	54.16	74.00	-19.84	PK
H	7206.00	43.19	30.33	6.32	24.55	43.73	54.00	-10.27	AV
H	9608.00	52.33	30.85	7.45	24.69	53.62	74.00	-20.38	PK
H	9608.00	43.17	30.85	7.45	24.69	44.46	54.00	-9.54	AV
H	12010.00	53.29	31.02	8.99	25.57	56.83	74.00	-17.17	PK
H	12010.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	51.16	30.55	5.77	24.66	51.04	74.00	-22.96	PK
V	4882.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
V	7323.00	50.23	30.33	6.32	24.55	50.77	74.00	-23.23	PK
V	7323.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
V	9764.00	52.24	30.85	7.45	24.69	53.53	74.00	-20.47	PK
V	9764.00	43.87	30.85	7.45	24.69	45.16	54.00	-8.84	AV
V	12205.00	53.81	31.02	8.99	25.57	57.35	74.00	-16.65	PK
V	12205.00	43.95	31.02	8.99	25.57	47.49	54.00	-6.51	AV
H	4882.00	51.04	30.55	5.77	24.66	50.92	74.00	-23.08	PK
H	4882.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
H	7323.00	51.39	30.33	6.32	24.55	51.93	74.00	-22.07	PK
H	7323.00	43.67	30.33	6.32	24.55	44.21	54.00	-9.79	AV
H	9764.00	52.07	30.85	7.45	24.69	53.36	74.00	-20.64	PK
H	9764.00	43.17	30.85	7.45	24.69	44.46	54.00	-9.54	AV
H	12205.00	54.54	31.02	8.99	25.57	58.08	74.00	-15.92	PK
H	12205.00	43.31	31.02	8.99	25.57	46.85	54.00	-7.15	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	50.61	30.55	5.77	24.66	50.49	74.00	-23.51	PK
V	4960.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	7440.00	54.18	30.33	6.32	24.55	54.72	74.00	-19.28	PK
V	7440.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
V	9920.00	54.86	30.85	7.45	24.69	56.15	74.00	-17.85	PK
V	9920.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
V	12400.00	53.83	31.02	8.99	25.57	57.37	74.00	-16.63	PK
V	12400.00	43.49	31.02	8.99	25.57	47.03	54.00	-6.97	AV
H	4960.00	54.14	30.55	5.77	24.66	54.02	74.00	-19.98	PK
H	4960.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
H	7440.00	51.38	30.33	6.32	24.55	51.92	74.00	-22.08	PK
H	7440.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
H	9920.00	50.79	30.85	7.45	24.69	52.08	74.00	-21.92	PK
H	9920.00	43.87	30.85	7.45	24.69	45.16	54.00	-8.84	AV
H	12400.00	53.19	31.02	8.99	25.57	56.73	74.00	-17.27	PK
H	12400.00	43.61	31.02	8.99	25.57	47.15	54.00	-6.85	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
2. Margin= Emission Level - Limit
3. If peak below the average limit, the average emission was no test.
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Only the worst test data recorded is AC / DC Adapter 1.



8-DPSK - 3-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.49	30.55	5.77	24.66	52.37	74.00	-21.63	PK
V	4804.00	43.23	30.55	5.77	24.66	43.11	54.00	-10.89	AV
V	7206.00	53.01	30.33	6.32	24.55	53.55	74.00	-20.45	PK
V	7206.00	43.82	30.33	6.32	24.55	44.36	54.00	-9.64	AV
V	9608.00	54.24	30.85	7.45	24.69	55.53	74.00	-18.47	PK
V	9608.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
V	12010.00	54.82	31.02	8.99	25.57	58.36	74.00	-15.64	PK
V	12010.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV
H	4804.00	54.30	30.55	5.77	24.66	54.18	74.00	-19.82	PK
H	4804.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
H	7206.00	52.50	30.33	6.32	24.55	53.04	74.00	-20.96	PK
H	7206.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
H	9608.00	54.94	30.85	7.45	24.69	56.23	74.00	-17.77	PK
H	9608.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
H	12010.00	50.10	31.02	8.99	25.57	53.64	74.00	-20.36	PK
H	12010.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.86	30.55	5.77	24.66	50.74	74.00	-23.26	PK
V	4882.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
V	7323.00	53.04	30.33	6.32	24.55	53.58	74.00	-20.42	PK
V	7323.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
V	9764.00	51.63	30.85	7.45	24.69	52.92	74.00	-21.08	PK
V	9764.00	43.68	30.85	7.45	24.69	44.97	54.00	-9.03	AV
V	12205.00	50.60	31.02	8.99	25.57	54.14	74.00	-19.86	PK
V	12205.00	43.28	31.02	8.99	25.57	46.82	54.00	-7.18	AV
H	4882.00	50.95	30.55	5.77	24.66	50.83	74.00	-23.17	PK
H	4882.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
H	7323.00	50.12	30.33	6.32	24.55	50.66	74.00	-23.34	PK
H	7323.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
H	9764.00	51.27	30.85	7.45	24.69	52.56	74.00	-21.44	PK
H	9764.00	43.58	30.85	7.45	24.69	44.87	54.00	-9.13	AV
H	12205.00	51.72	31.02	8.99	25.57	55.26	74.00	-18.74	PK
H	12205.00	43.55	31.02	8.99	25.57	47.09	54.00	-6.91	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.66	30.55	5.77	24.66	54.54	74.00	-19.46	PK
V	4960.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
V	7440.00	52.34	30.33	6.32	24.55	52.88	74.00	-21.12	PK
V	7440.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
V	9920.00	52.09	30.85	7.45	24.69	53.38	74.00	-20.62	PK
V	9920.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
V	12400.00	53.47	31.02	8.99	25.57	57.01	74.00	-16.99	PK
V	12400.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV
H	4960.00	52.88	30.55	5.77	24.66	52.76	74.00	-21.24	PK
H	4960.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
H	7440.00	54.52	30.33	6.32	24.55	55.06	74.00	-18.94	PK
H	7440.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
H	9920.00	50.50	30.85	7.45	24.69	51.79	74.00	-22.21	PK
H	9920.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	12400.00	52.83	31.02	8.99	25.57	56.37	74.00	-17.63	PK
H	12400.00	43.77	31.02	8.99	25.57	47.31	54.00	-6.69	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
2. Margin= Emission Level - Limit
3. If peak below the average limit, the average emission was no test.
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Only the worst test data recorded is AC / DC Adapter 1.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2390MHz
Stop Frequency	2500MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 3MHz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 0.8meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

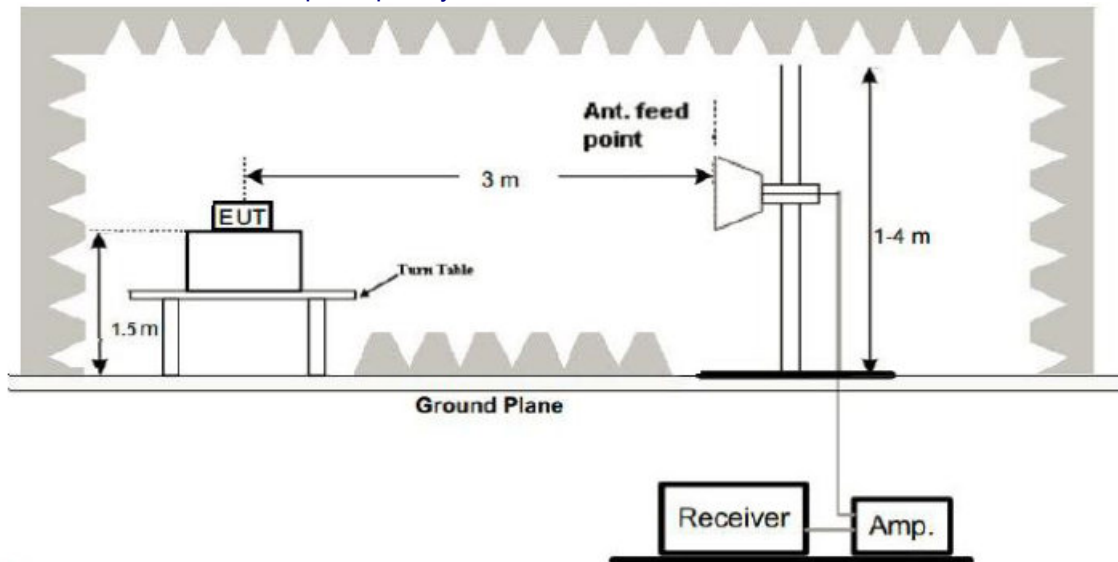

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

EUT test used AC/DC Adapter 1

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
GFSK 1-DH1	Low Channel: 2402MHz										
	H	2390.00	53.93	30.22	4.85	23.98	52.54	74.00	-21.46	PK	PASS
	H	2390.00	44.52	30.22	4.85	23.98	43.13	54.00	-10.87	AV	PASS
	H	2400.00	53.90	30.22	4.85	23.98	52.51	74.00	-21.49	PK	PASS
	H	2400.00	44.67	30.22	4.85	23.98	43.28	54.00	-10.72	AV	PASS
	V	2390.00	54.26	30.22	4.85	23.98	52.87	74.00	-21.13	PK	PASS
	V	2390.00	44.65	30.22	4.85	23.98	43.26	54.00	-10.74	AV	PASS
	V	2400.00	54.28	30.22	4.85	23.98	52.89	74.00	-21.11	PK	PASS
	V	2400.00	44.40	30.22	4.85	23.98	43.01	54.00	-10.99	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	54.04	30.22	4.85	23.98	52.65	74.00	-21.35	Pk	PASS
	H	2483.50	44.72	30.22	4.85	23.98	43.33	54.00	-10.67	AV	PASS
	H	2500.00	54.48	30.22	4.85	23.98	53.09	74.00	-20.91	Pk	PASS
	H	2500.00	44.06	30.22	4.85	23.98	42.67	54.00	-11.33	AV	PASS
	V	2483.50	53.99	30.22	4.85	23.98	52.60	74.00	-21.40	Pk	PASS
	V	2483.50	44.08	30.22	4.85	23.98	42.69	54.00	-11.31	AV	PASS
	V	2500.00	54.83	30.22	4.85	23.98	53.44	74.00	-20.56	Pk	PASS
	V	2500.00	44.88	30.22	4.85	23.98	43.49	54.00	-10.51	AV	PASS
π/4-DQ PSK 2-DH1	Low Channel: 2402MHz										
	H	2390.00	53.09	30.22	4.85	23.98	51.70	74.00	-22.30	PK	PASS
	H	2390.00	44.90	30.22	4.85	23.98	43.51	54.00	-10.49	AV	PASS
	H	2400.00	53.82	30.22	4.85	23.98	52.43	74.00	-21.57	PK	PASS
	H	2400.00	44.02	30.22	4.85	23.98	42.63	54.00	-11.37	AV	PASS
	V	2390.00	54.29	30.22	4.85	23.98	52.90	74.00	-21.10	PK	PASS
	V	2390.00	44.71	30.22	4.85	23.98	43.32	54.00	-10.68	AV	PASS
	V	2400.00	54.97	30.22	4.85	23.98	53.58	74.00	-20.42	PK	PASS
	V	2400.00	44.21	30.22	4.85	23.98	42.82	54.00	-11.18	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	53.80	30.22	4.85	23.98	52.41	74.00	-21.59	PK	PASS
	H	2483.50	44.09	30.22	4.85	23.98	42.70	54.00	-11.30	AV	PASS
	H	2500.00	54.79	30.22	4.85	23.98	53.40	74.00	-20.60	PK	PASS
	H	2500.00	44.74	30.22	4.85	23.98	43.35	54.00	-10.65	AV	PASS
	V	2483.50	53.87	30.22	4.85	23.98	52.48	74.00	-21.52	PK	PASS
	V	2483.50	44.32	30.22	4.85	23.98	42.93	54.00	-11.07	AV	PASS
	V	2500.00	54.22	30.22	4.85	23.98	52.83	74.00	-21.17	PK	PASS
	V	2500.00	44.75	30.22	4.85	23.98	43.36	54.00	-10.64	AV	PASS
Remark:											
1.Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											
2.Only the worst test data recorded is AC / DC Adapter 1.											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBUV/m)	Limit (dBU V/m)	Margin (dB)	Detect or Type	Result
8-DPSK 3-DH1	Low Channel: 2402MHz										
	H	2390.00	53.04	30.22	4.85	23.98	51.65	74.00	-22.35	PK	PASS
	H	2390.00	44.42	30.22	4.85	23.98	43.03	54.00	-10.97	AV	PASS
	H	2400.00	54.93	30.22	4.85	23.98	53.54	74.00	-20.46	PK	PASS
	H	2400.00	44.50	30.22	4.85	23.98	43.11	54.00	-10.89	AV	PASS
	V	2390.00	53.85	30.22	4.85	23.98	52.46	74.00	-21.54	PK	PASS
	V	2390.00	44.93	30.22	4.85	23.98	43.54	54.00	-10.46	AV	PASS
	V	2400.00	53.65	30.22	4.85	23.98	52.26	74.00	-21.74	PK	PASS
	V	2400.00	44.12	30.22	4.85	23.98	42.73	54.00	-11.27	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	53.36	30.22	4.85	23.98	51.97	74.00	-22.03	Pk	PASS
	H	2483.50	44.03	30.22	4.85	23.98	42.64	54.00	-11.36	AV	PASS
	H	2500.00	54.49	30.22	4.85	23.98	53.10	74.00	-20.90	Pk	PASS
	H	2500.00	44.72	30.22	4.85	23.98	43.33	54.00	-10.67	AV	PASS
	V	2483.50	53.24	30.22	4.85	23.98	51.85	74.00	-22.15	Pk	PASS
	V	2483.50	44.68	30.22	4.85	23.98	43.29	54.00	-10.71	AV	PASS
	V	2500.00	53.49	30.22	4.85	23.98	52.10	74.00	-21.90	Pk	PASS
	V	2500.00	44.46	30.22	4.85	23.98	43.07	54.00	-10.93	AV	PASS
Remark: 1.Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2.Only the worst test data recorded is AC / DC Adapter 1.											



6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 LIMIT

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 TEST SETUP



6.3 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.



6.4 DEVIATION FROM STANDARD

No deviation.





6.5 TEST RESULT



GFSK - 1-DH1 Lowest channel

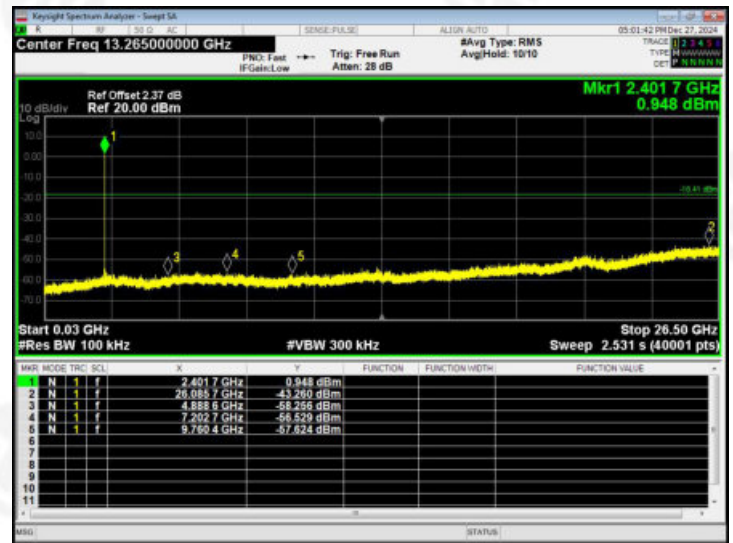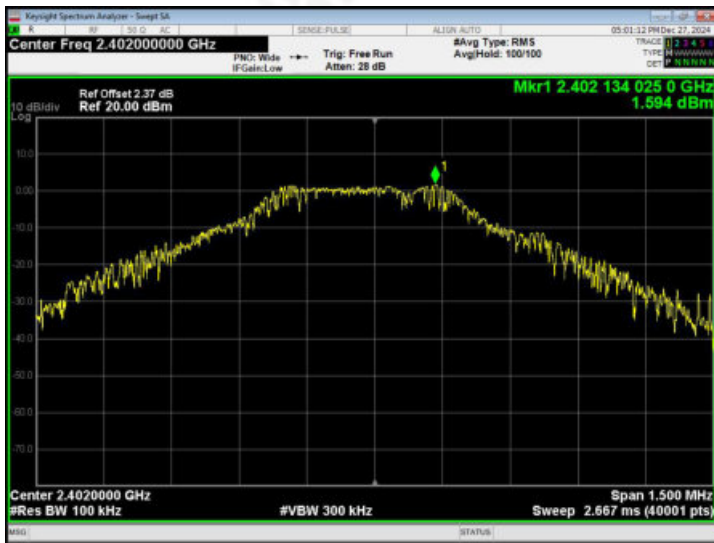

Middle channel

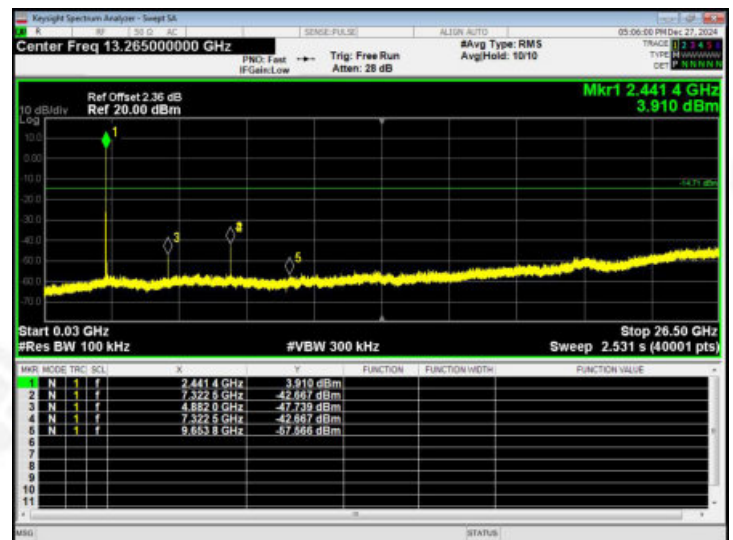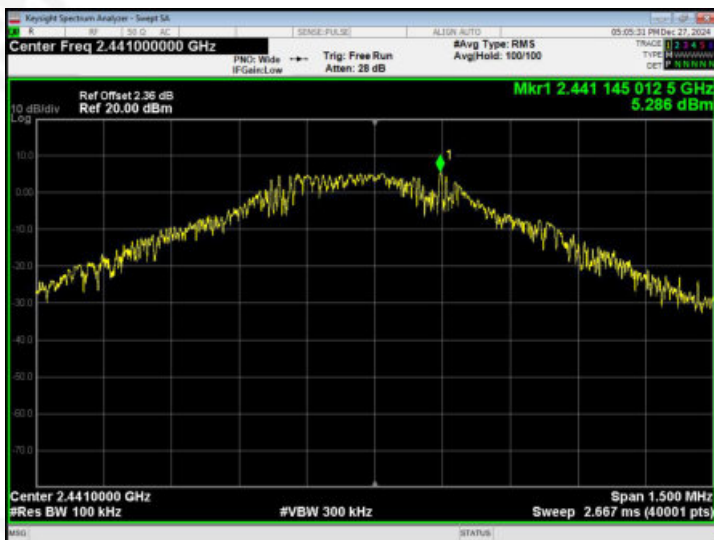

Highest channel

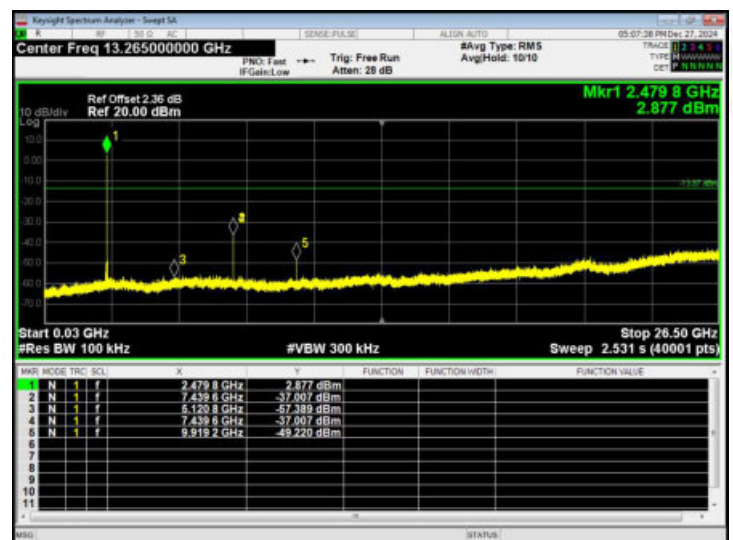
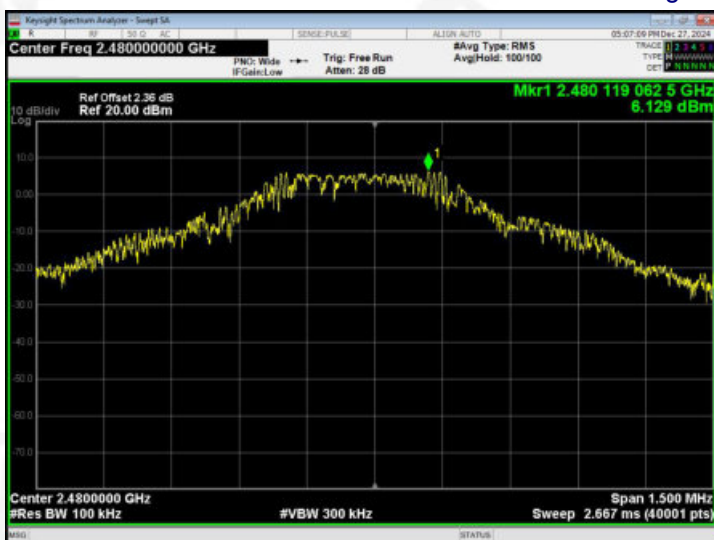


30MHz~26.5GHz




$\pi/4$ -DQPSK - 2-DH1



Lowest channel

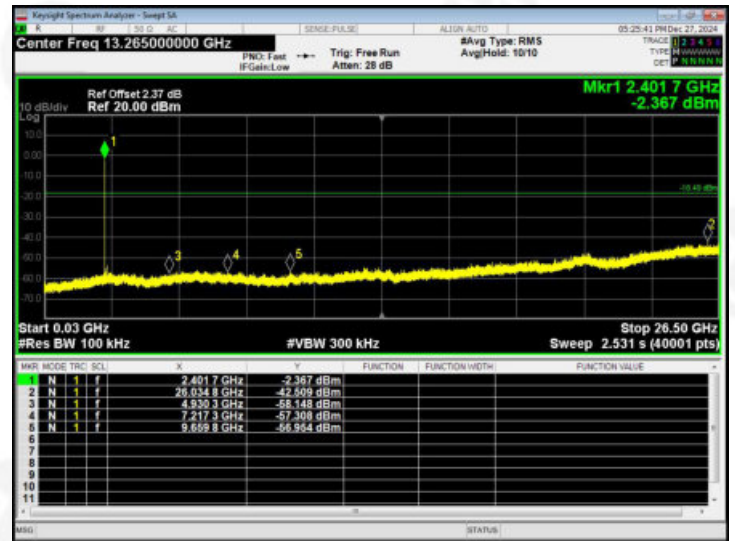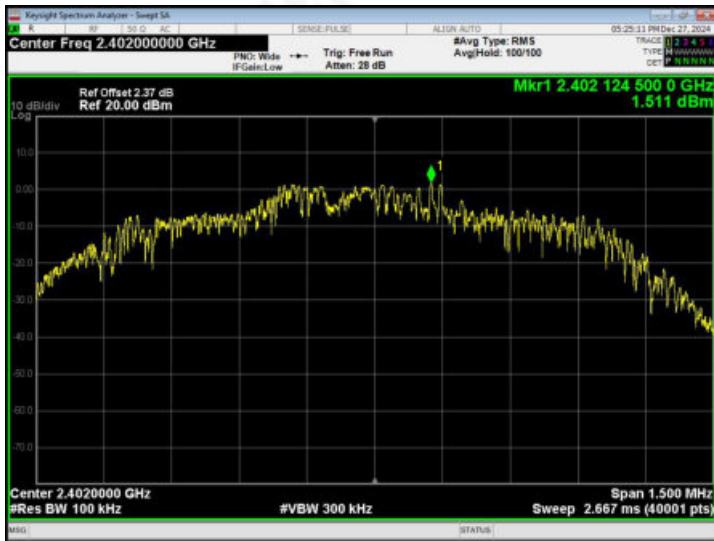

Middle channel

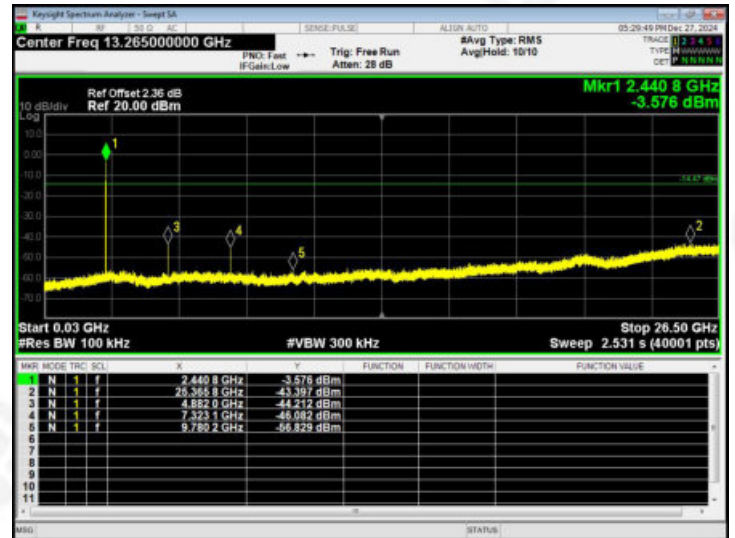

Highest channel

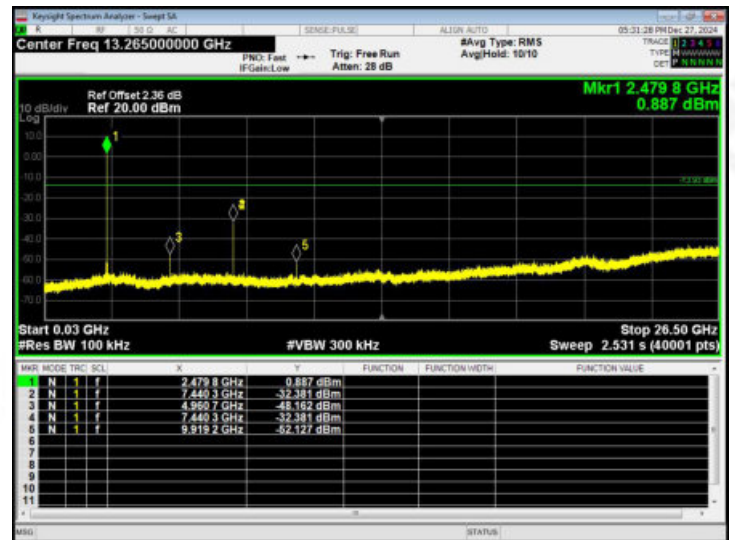
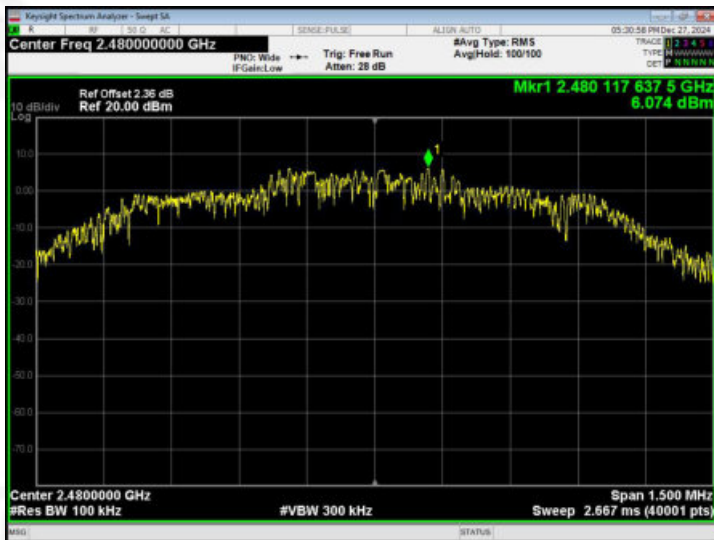


30MHz~26.5GHz





8-DPSK - 3-DH1



Lowest channel

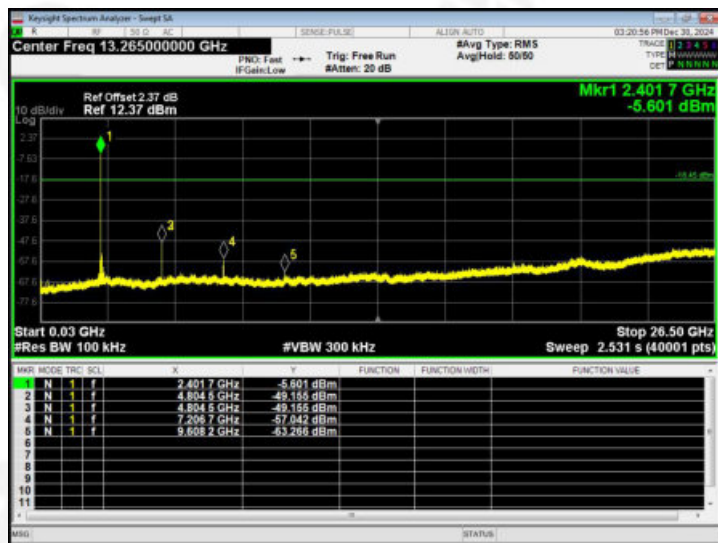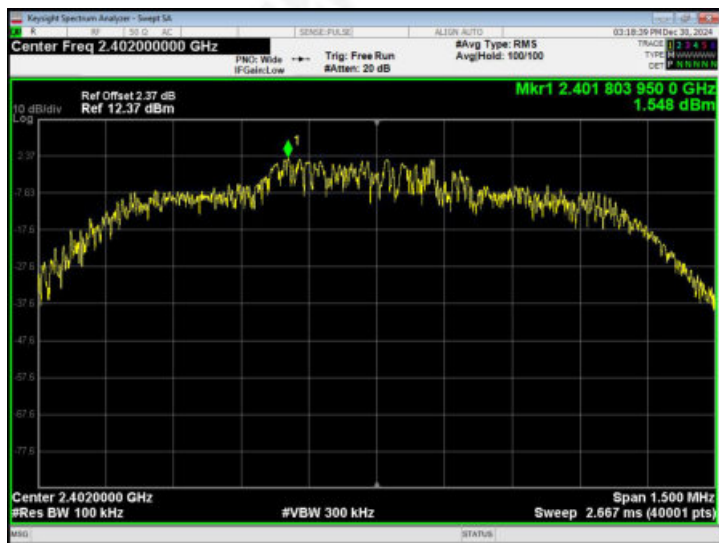

Middle channel

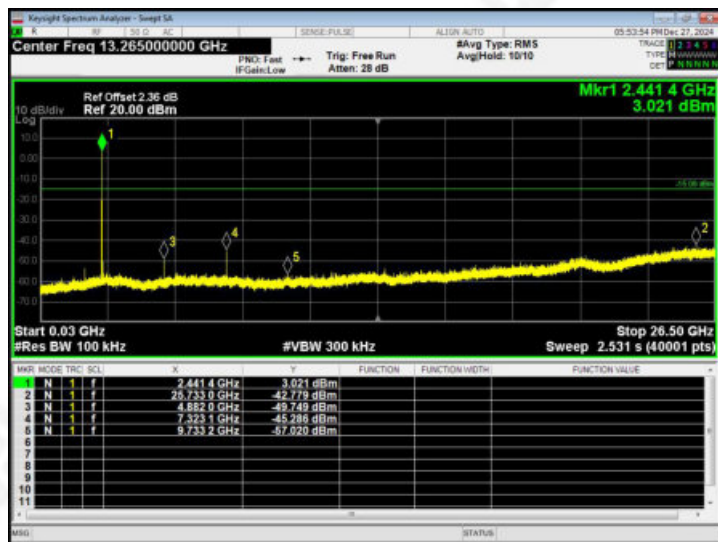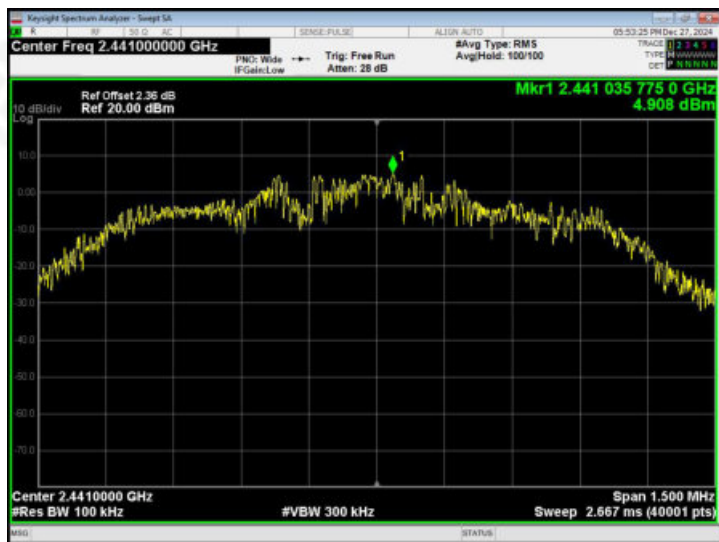

Highest channel

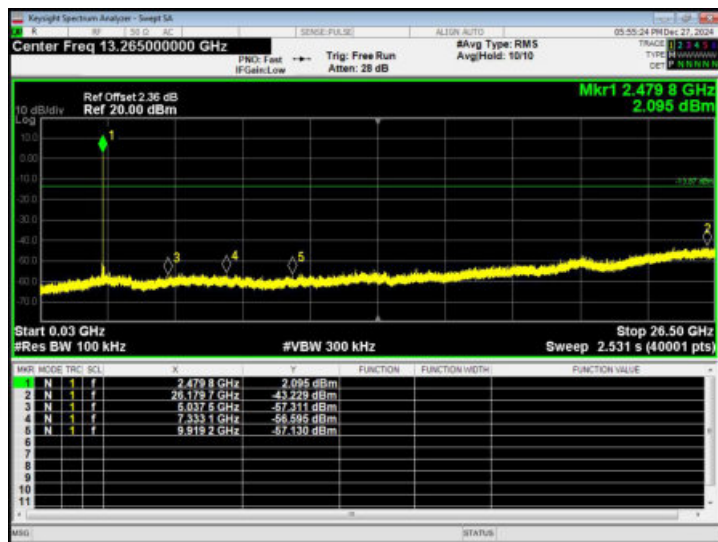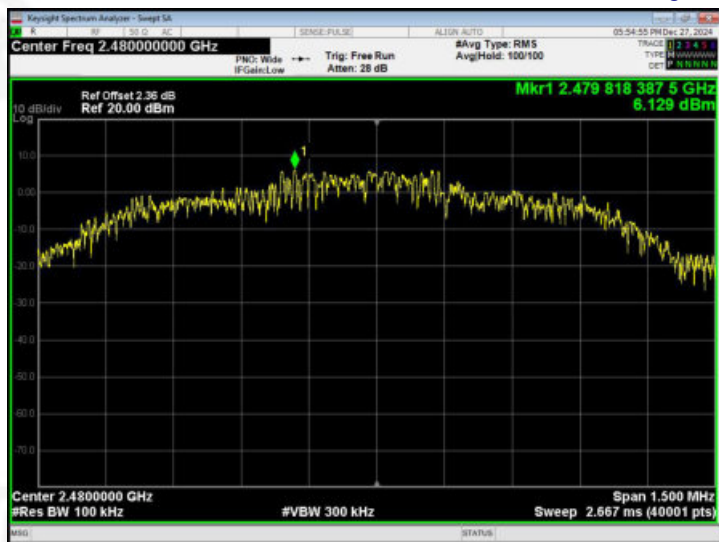


30MHz~26.5GHz




GFSK - 1-DH1


No-hopping Band edge-left side

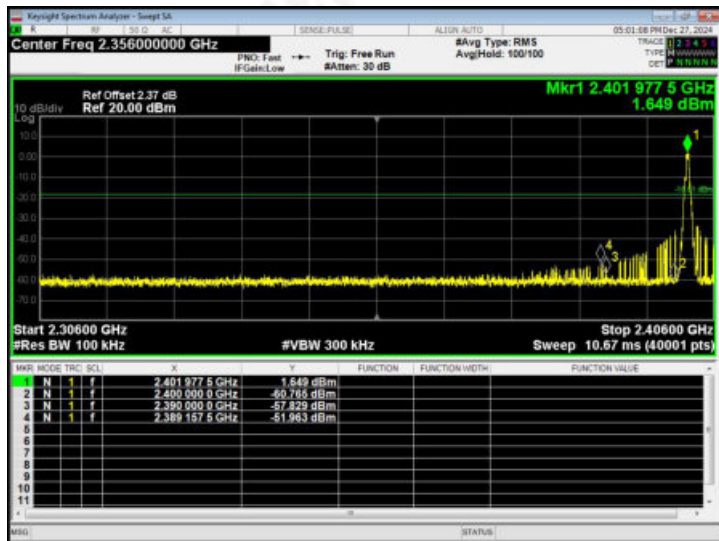


No-hopping Band edge-right side

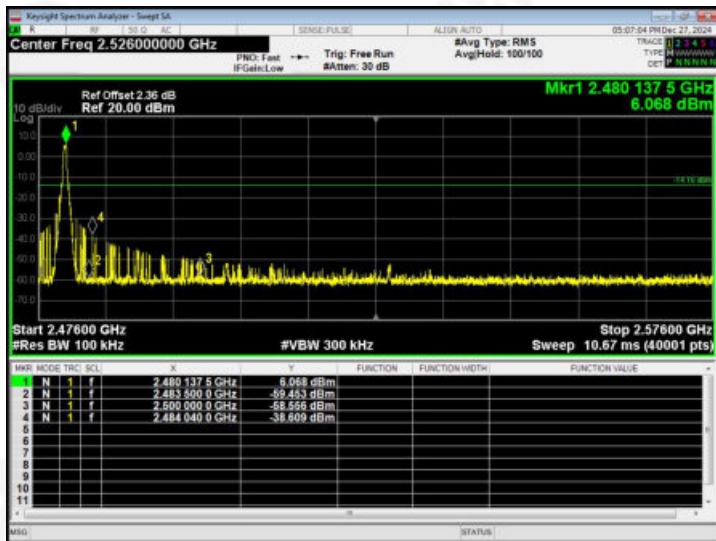

Hopping Band edge-left side

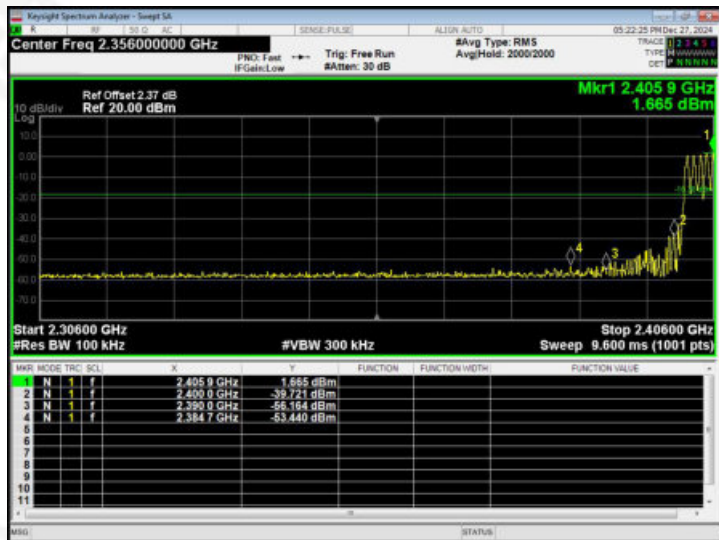


Hopping Band edge-right side

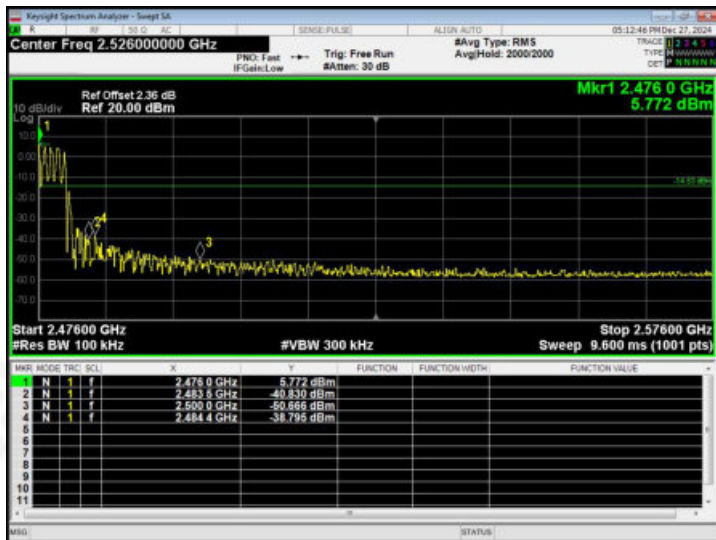




$\pi/4$ -DQPSK - 2-DH1


No-hopping Band edge-left side

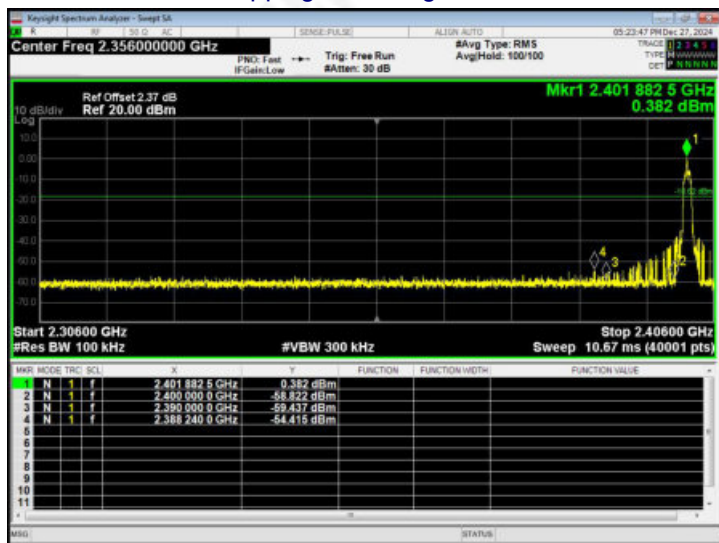


No-hopping Band edge-right side

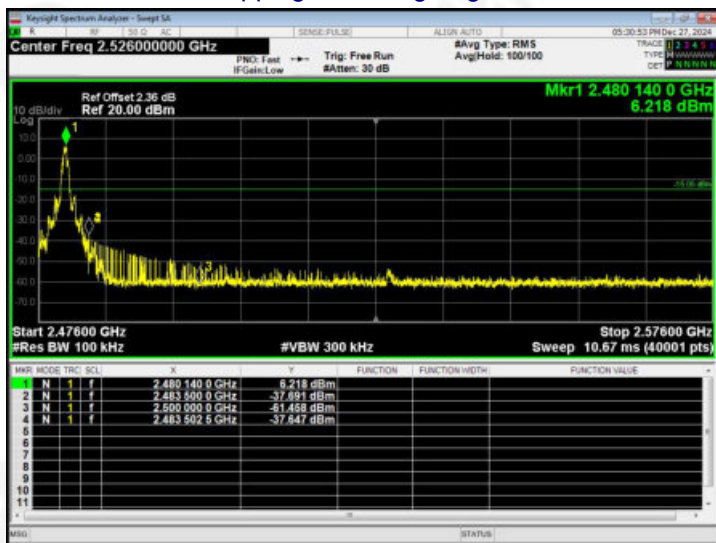

Hopping Band edge-left side

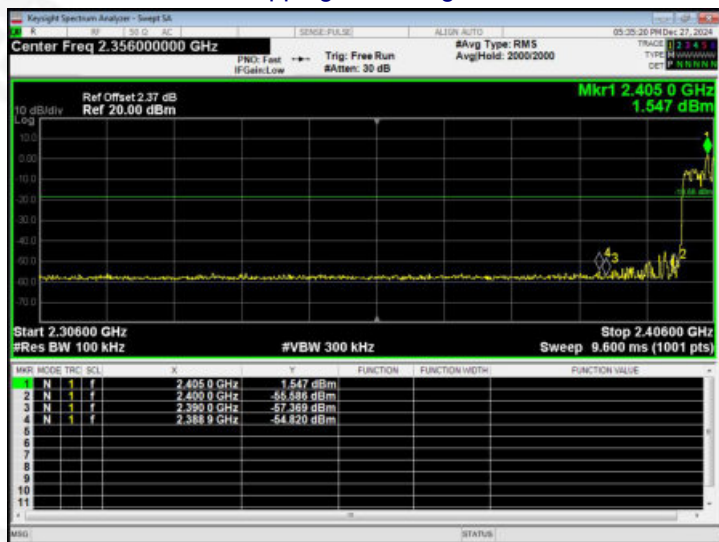


Hopping Band edge-right side

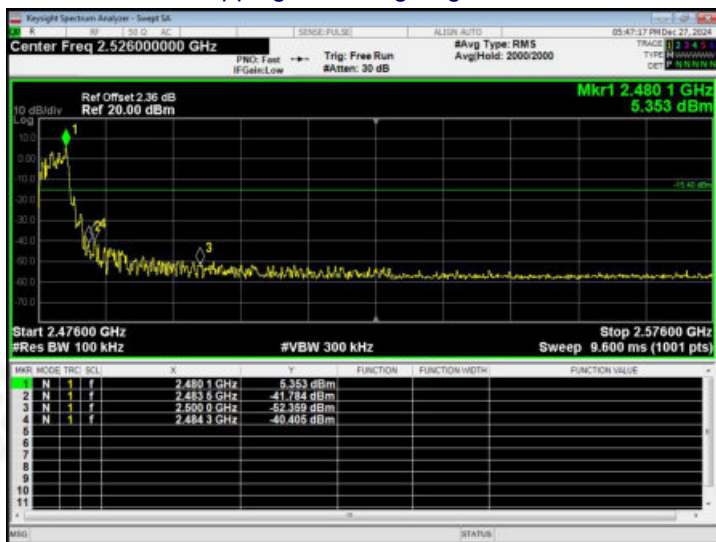




8-DPSK - 3-DH1


No-hopping Band edge-left side

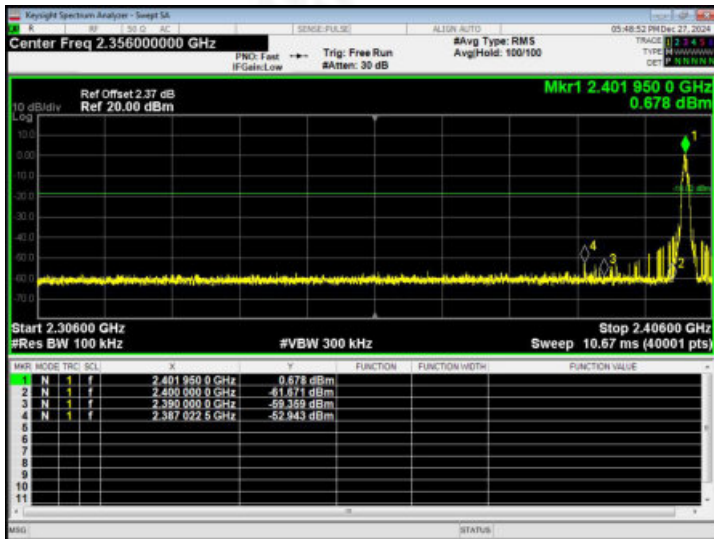


No-hopping Band edge-right side

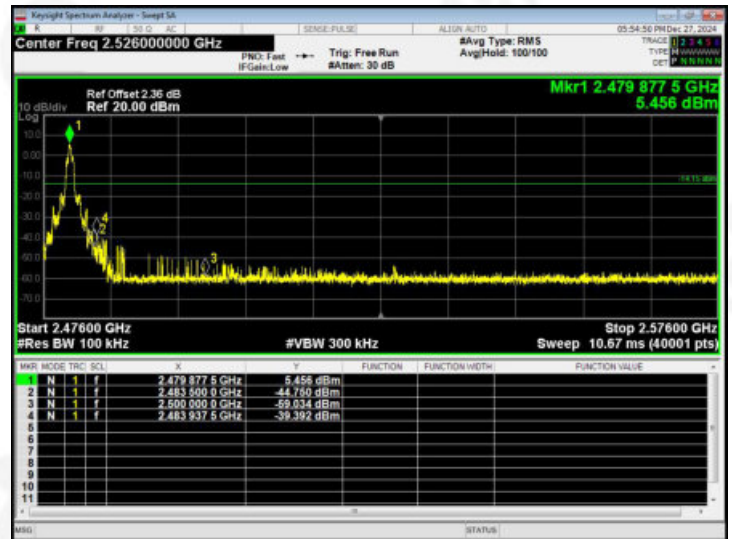

Hopping Band edge-left side

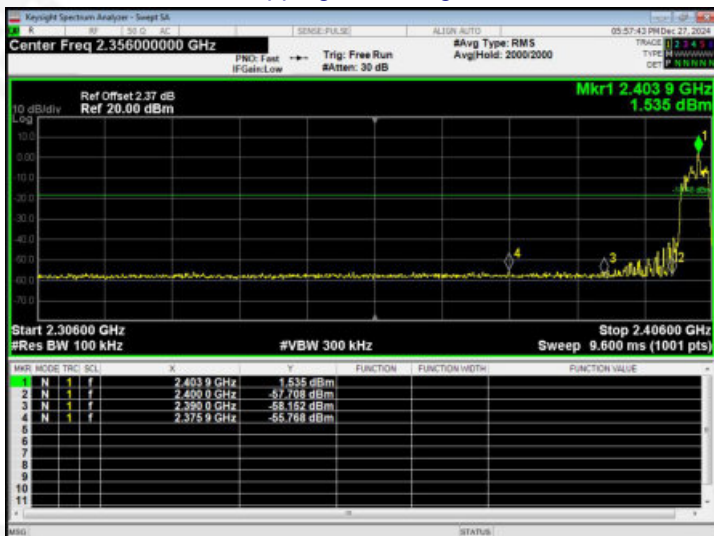

Hopping Band edge-right side

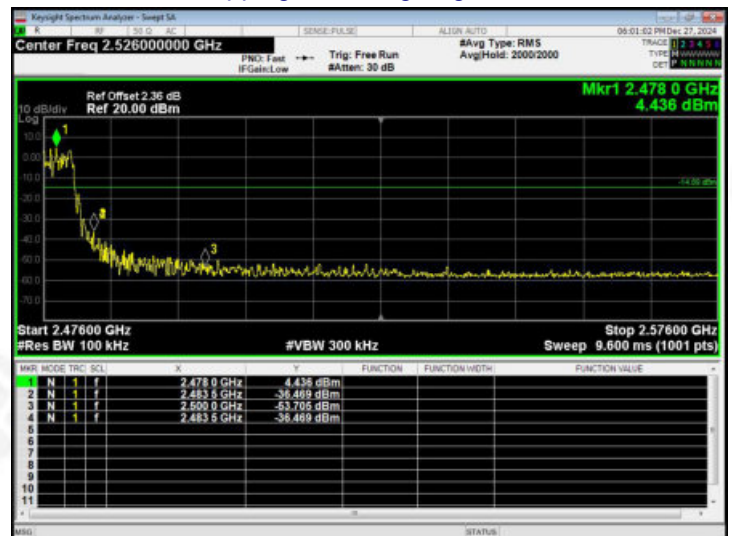



7. 20DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 TEST SETUP



7.2 LIMIT

N/A

7.3 TEST PROCEDURE

- Set RBW = 30 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.




7.5 TEST RESULT


Modulation	Packet	Test Channel	20dB Occupied Bandwidth (MHz)	Result
GFSK	1-DH1	Lowest	0.8812	Pass
		Middle	0.8778	
		Highest	0.9644	
$\pi/4$ -DQPSK	2-DH1	Lowest	1.157	Pass
		Middle	1.190	
		Highest	1.276	
8-DPSK	3-DH1	Lowest	1.171	Pass
		Middle	1.161	
		Highest	1.272	



GFSK - 1-DH1 Test plots Low Channel

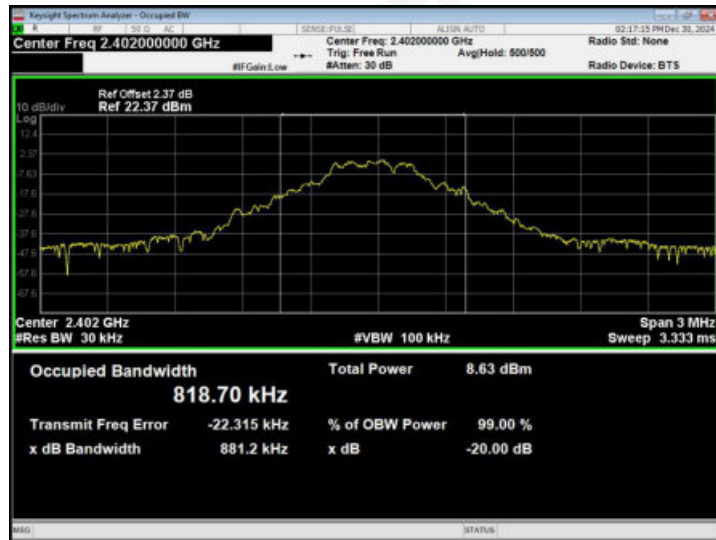

Middle Channel

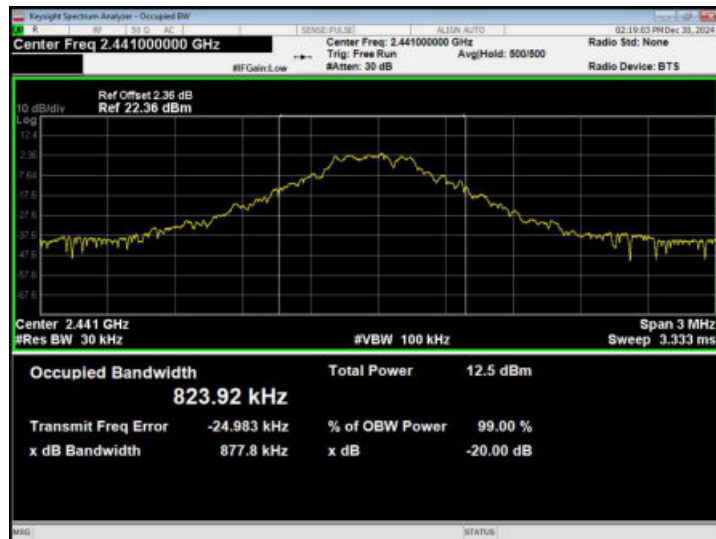

High Channel





$\pi/4$ -DQPSK - 2-DH1 Test plots
Low Channel



Middle Channel



High Channel





8-DPSK - 3-DH1 Test plots

Low Channel



Middle Channel



High Channel





8. MAXIMUM PEAK OUTPUT POWER

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	GFSK: 30dBm $\pi/4$ -DQPSK & 8-DPSK: 20.97 dBm

8.1 BLOCK DIAGRAM OF TEST SETUP



8.2 LIMIT

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 TEST PROCEDURE

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Set the RBW = 2MHz.
 - b) Set VBW = 6MHz.
 - c) Set span = 10MHz.
 - d) Sweep time = auto couple.
 - e) Detector = peak.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use peak marker function to determine the peak amplitude level.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.




8.5 TEST RESULT


Modulation	Packet	Test Channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	1-DH1	Lowest	2.091	30.00	Pass
		Middle	5.880		
		Highest	6.262		
$\pi/4$ -DQPSK	2-DH1	Lowest	2.047	21.00	Pass
		Middle	5.915		
		Highest	6.285		
8-DPSK	3-DH1	Lowest	1.946	21.00	Pass
		Middle	5.817		
		Highest	6.165		




GFSK - 1-DH1 Test plots
Low Channel

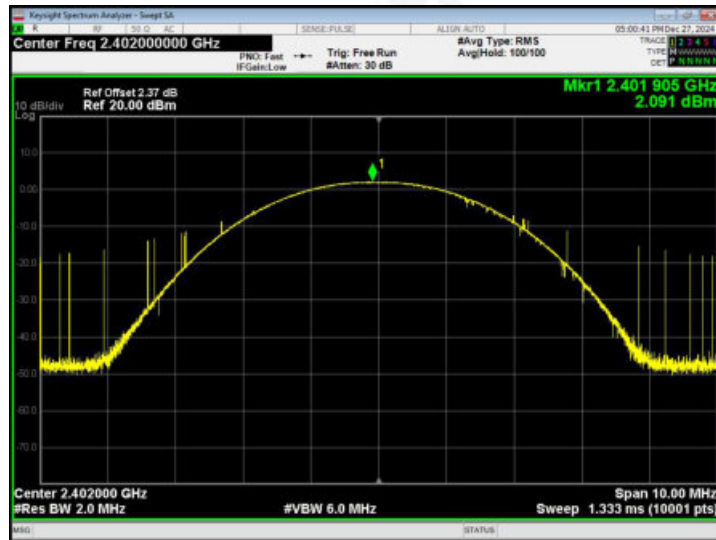

Middle Channel

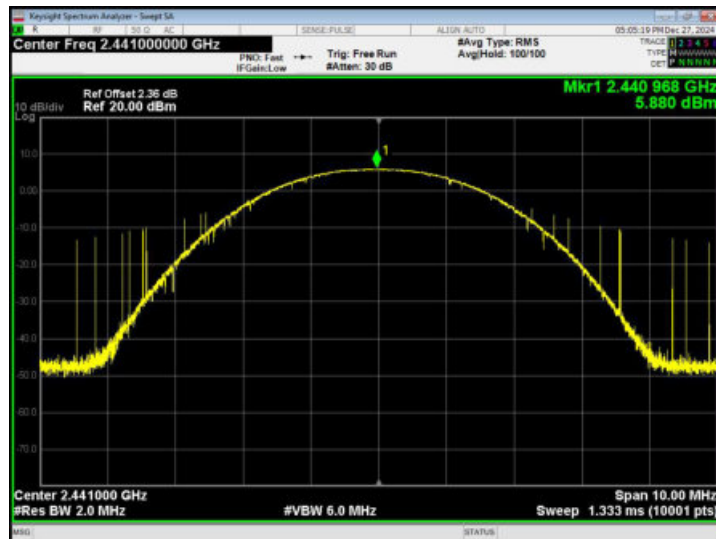


High Channel

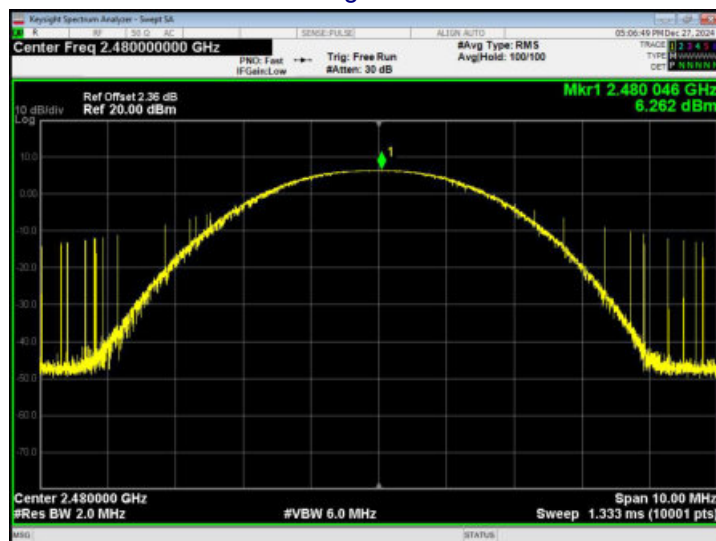


 $\pi/4$ -DQPSK - 2-DH1 Test plots


Low Channel

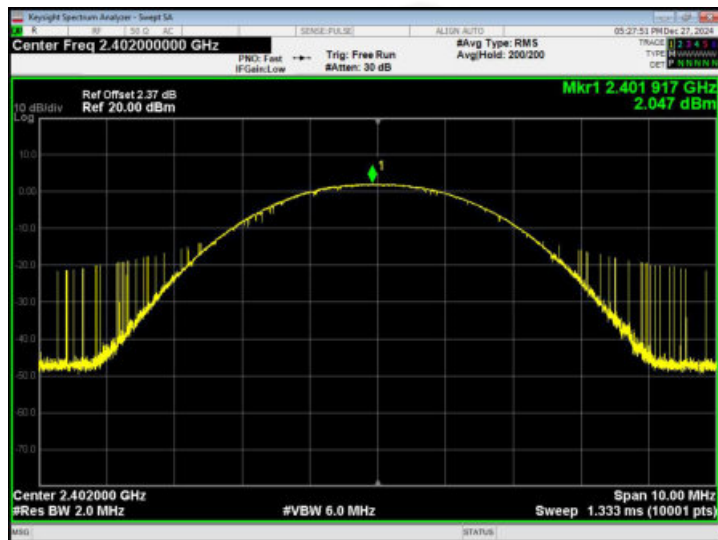

Middle Channel

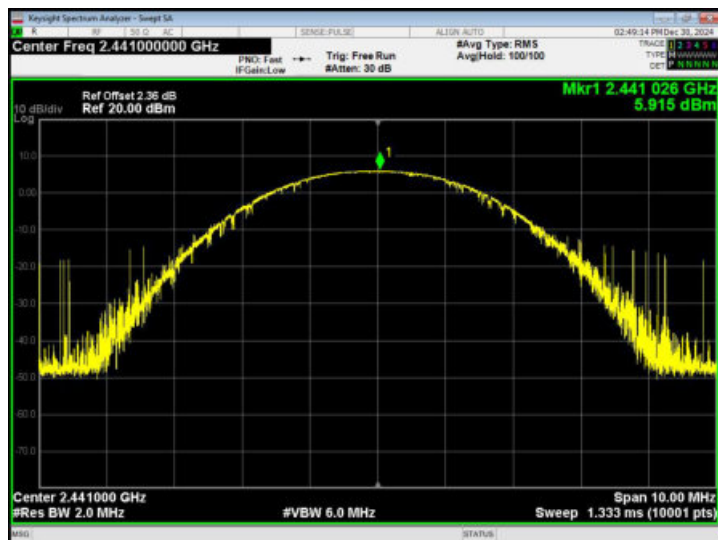


High Channel

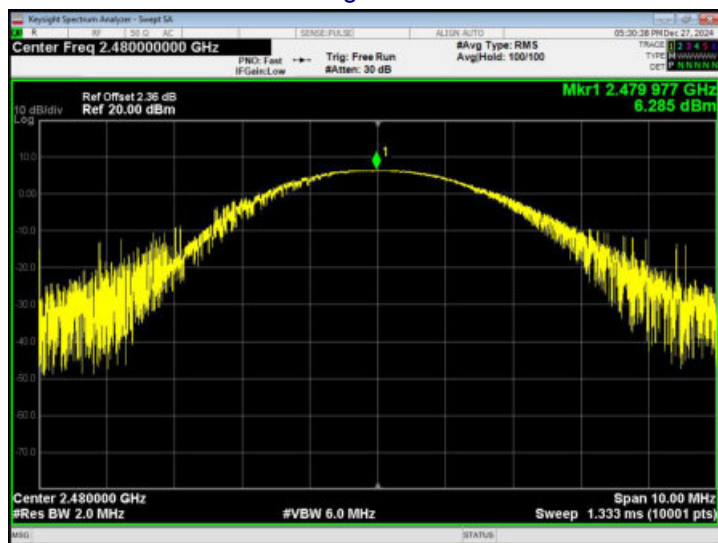




8-DPSK - 3-DH1 Test plots


Low Channel

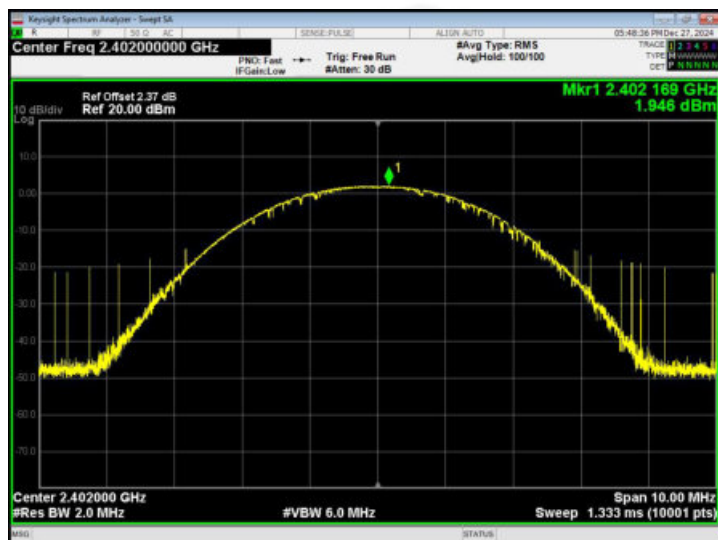

Middle Channel

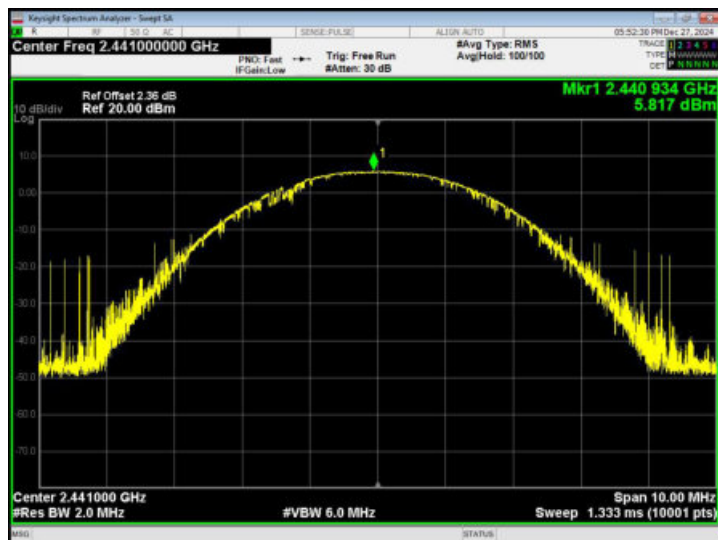

High Channel

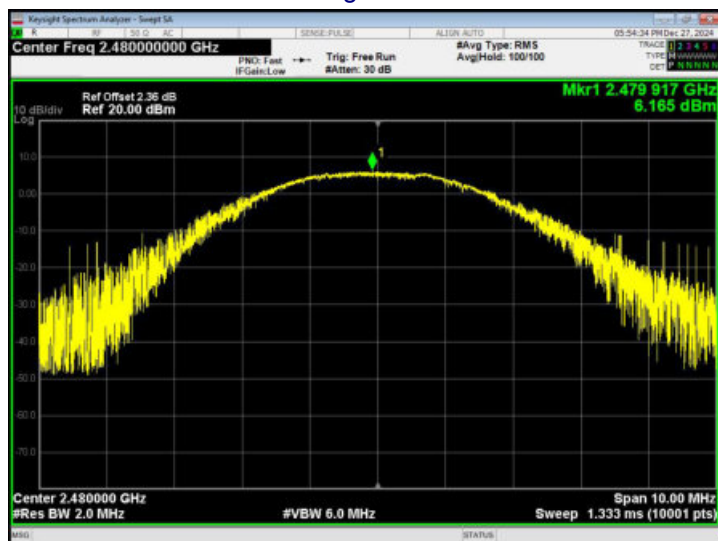




9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB Bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB Bandwidth (whichever is greater)

9.1 TEST SETUP

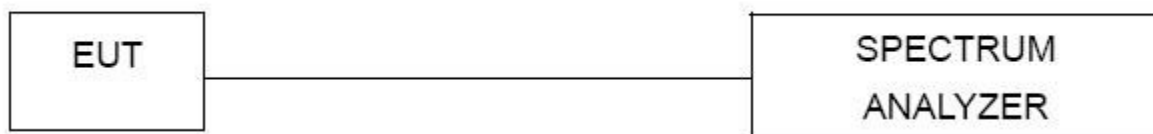

9.2 TEST PROCEDURE

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) RBW = 30kHz.
 - b) VBW = 100kHz.
 - c) Span = 3MHz.
 - d) Sweep = auto.
 - e) Detector Function = Peak.
 - f) Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 TEST RESULT

Modulation	Packet	Test Channel	Separation (MHz)	Limit (MHz)	Result
GFSK	1-DH1	Low	1.152	0.8812	PASS
		Middle	1.095	0.8778	PASS
		High	1.092	0.9644	PASS
$\pi/4$ -DQPSK	2-DH1	Low	0.987	0.7713	PASS
		Middle	1.107	0.7933	PASS
		High	1.032	0.8507	PASS
8-DPSK	3-DH1	Low	1.029	0.7807	PASS
		Middle	1.164	0.7740	PASS
		High	1.167	0.8480	PASS



GFSK - 1-DH1 Test plots

Low Channel



Middle Channel




High Channel






$\pi/4$ -DQPSK - 2-DH1 Test plots
Low Channel

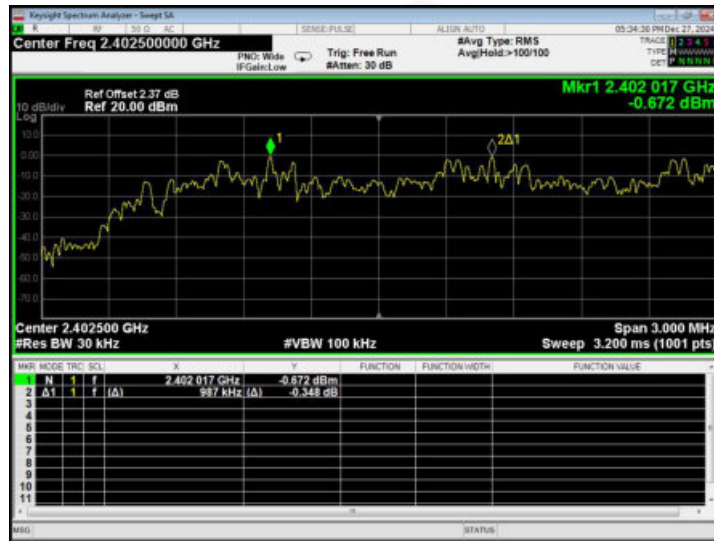

Middle Channel

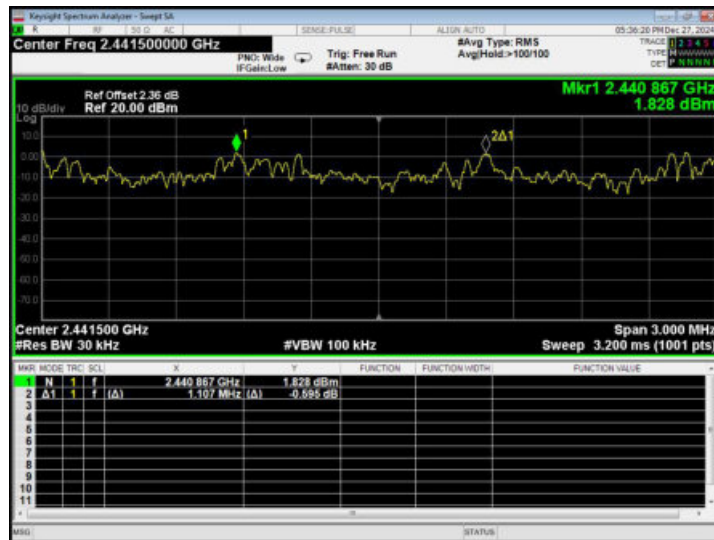

High Channel






8-DPSK - 3-DH1 Test plots


Low Channel



Middle Channel

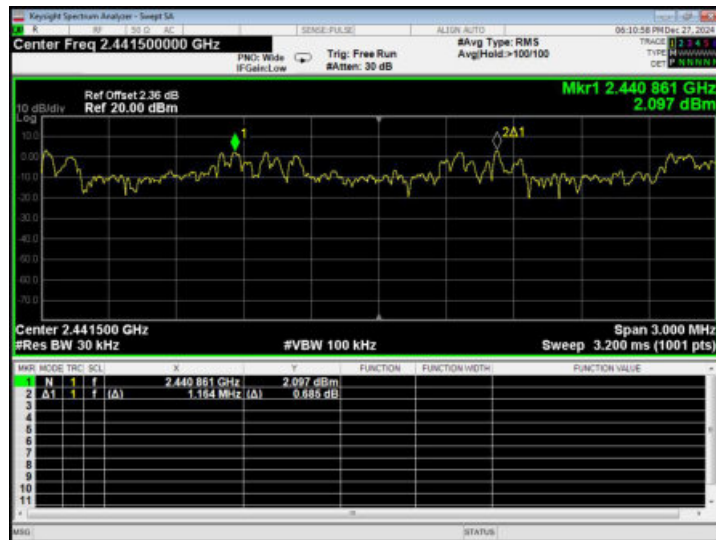

High Channel

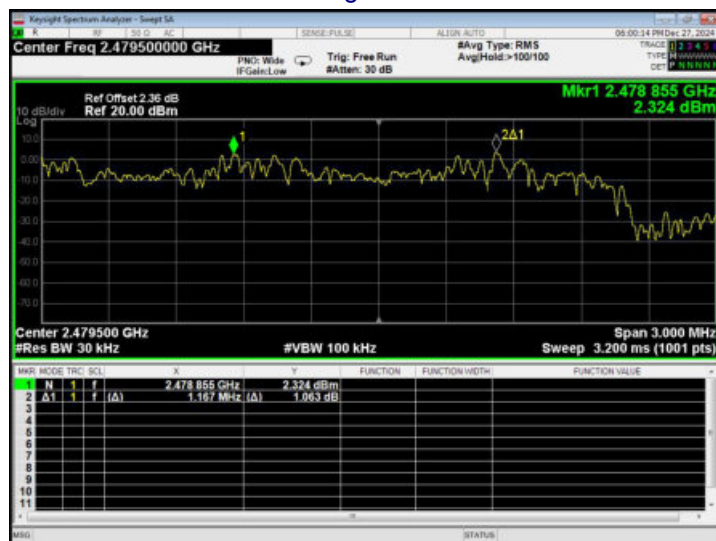



10. NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 Channels

10.1 TEST SETUP



10.2 TEST PROCEDURE

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) RBW = 100kHz.
 - b) VBW = 300kHz.
 - c) Sweep = auto.
 - d) Detector Function = peak.
 - e) Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD


No deviation.




10.4 TEST RESULT

Modulation	Packet	Hopping Number	Limit	Result
GFSK	1-DH1	79	15	Pass
$\pi/4$ -DQPSK	2-DH1	79	15	Pass
8-DPSK	3-DH1	79	15	Pass

GFSK - 1-DH1 Test Plots

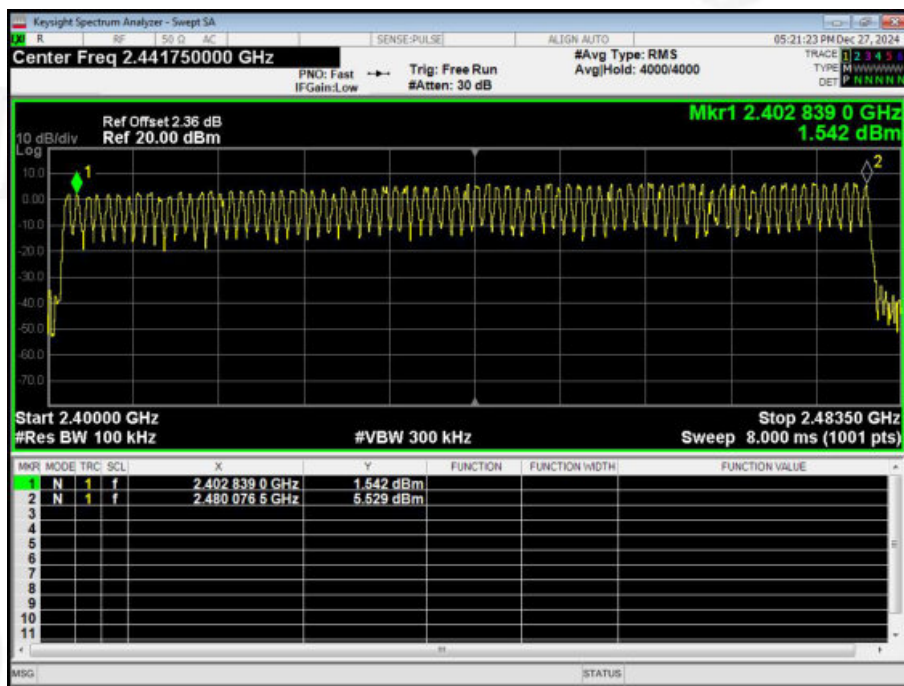


$\pi/4$ -DQPSK - 2-DH1 Test Plots

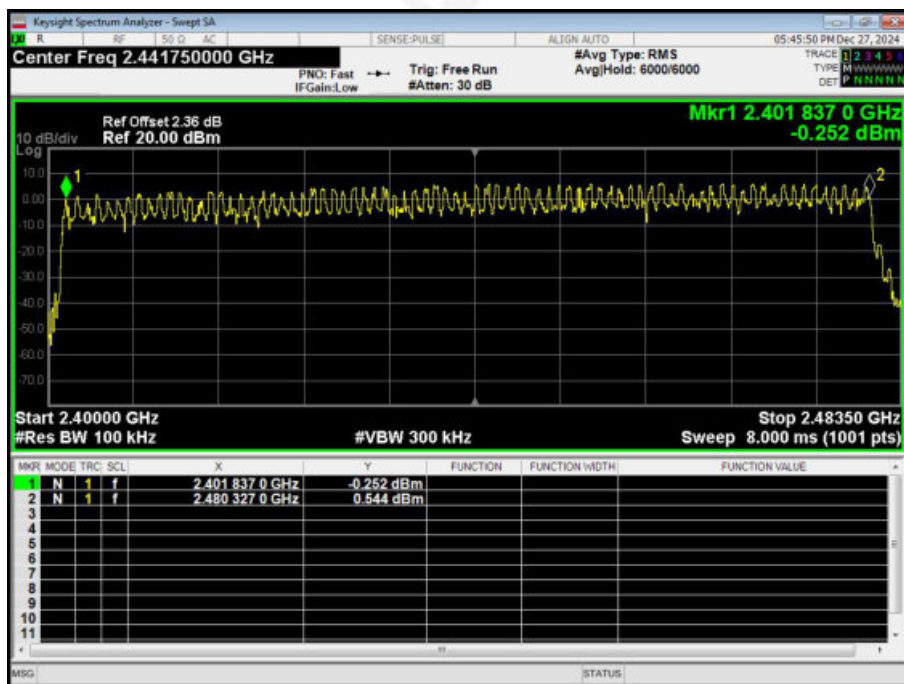



8-DPSK - 3-DH1 Test Plots

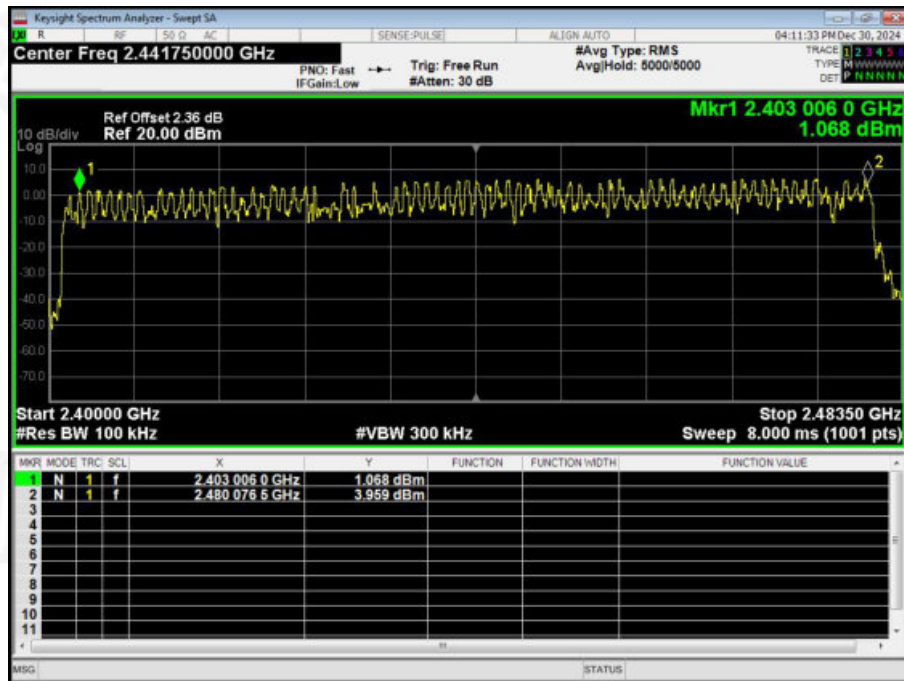



11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 TEST SETUP



11.2 TEST PROCEDURE

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 TEST RESULT

GFSK mode:

Frequency	Packet	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Result
2441MHz	1-DH1	0.381	121.920	400	Pass
2441MHz	1-DH3	1.637	261.920	400	Pass
2441MHz	1-DH5	2.886	307.840	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.381(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 121.920\text{ms}$ CH:2441MHz time slot= $1.637(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 261.920\text{ms}$ CH:2441MHz time slot= $2.886(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 307.840\text{ms}$ $\pi/4$ -DQPSK mode:

Frequency	Packet	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Result
2441MHz	2-DH1	0.391	125.120	400	Pass
2441MHz	2-DH3	1.644	263.040	400	Pass
2441MHz	2-DH5	2.892	308.480	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.391(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 125.120\text{ms}$ CH:2441MHz time slot= $1.644(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 263.040\text{ms}$ CH:2441MHz time slot= $2.892(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 308.480\text{ms}$

8-DPSK mode:

Frequency	Packet	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Result
2441MHz	3-DH1	0.391	125.120	400	Pass
2441MHz	3-DH3	1.641	262.560	400	Pass
2441MHz	3-DH5	2.892	308.480	400	Pass

Remarks:


The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow


CH:2441MHz time slot= $0.391(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 125.120\text{ms}$ CH:2441MHz time slot= $1.641(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 262.560\text{ms}$ CH:2441MHz time slot= $2.892(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 308.480\text{ms}$




GFSK Test Plots
1-DH1 Middle Channel

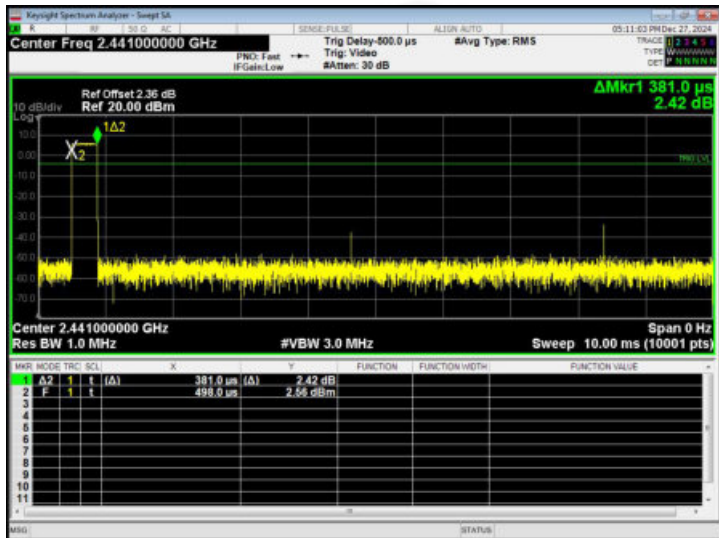

1-DH3 Middle Channel

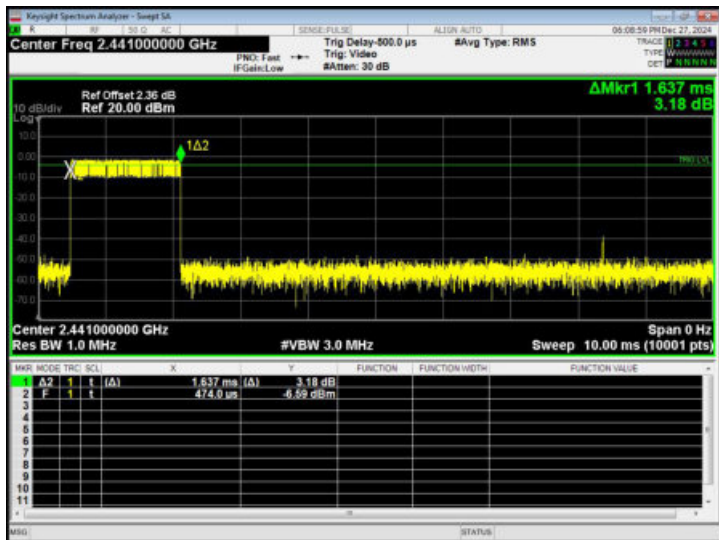


1-DH5 Middle Channel

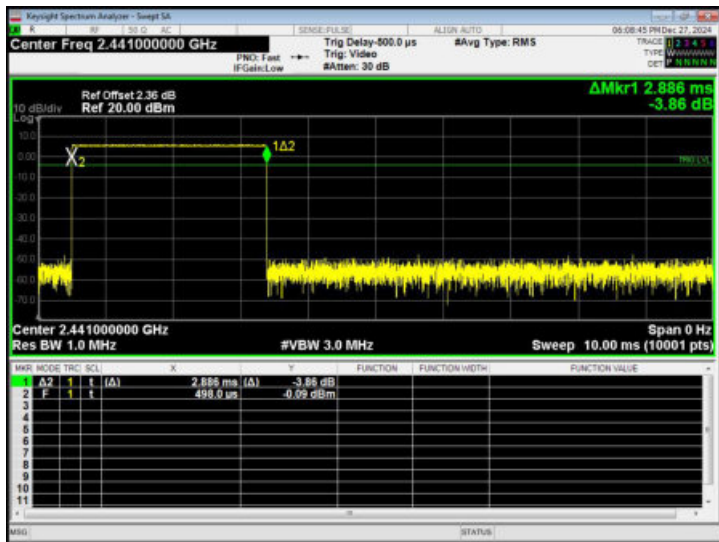


 $\pi/4$ -DQPSK Test Plots

2-DH1 Middle Channel

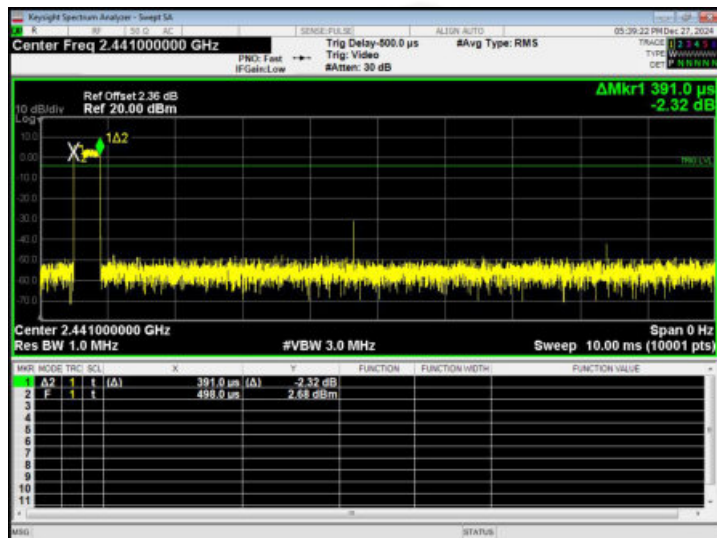

2-DH3 Middle Channel

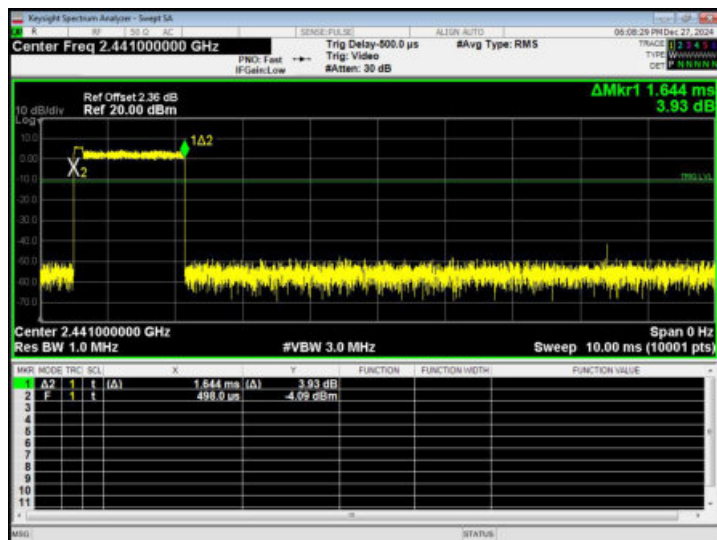


2-DH5 Middle Channel







8-DPSK Test Plots 3-DH1 Middle Channel

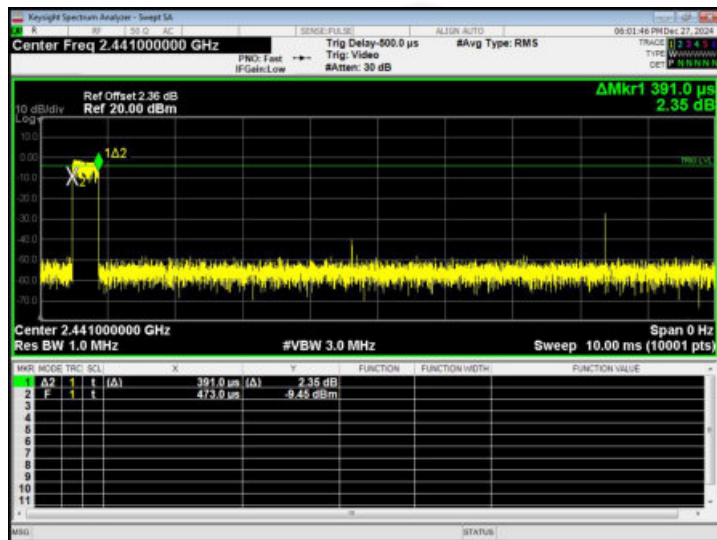

3-DH3 Middle Channel

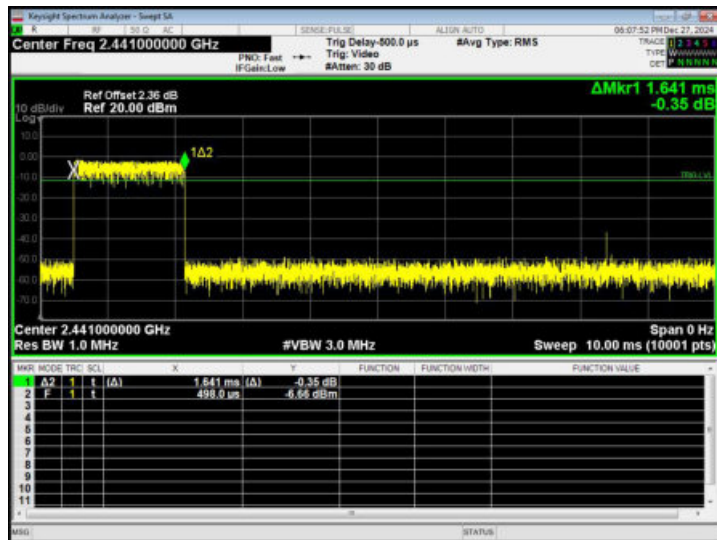

3-DH5 Middle Channel

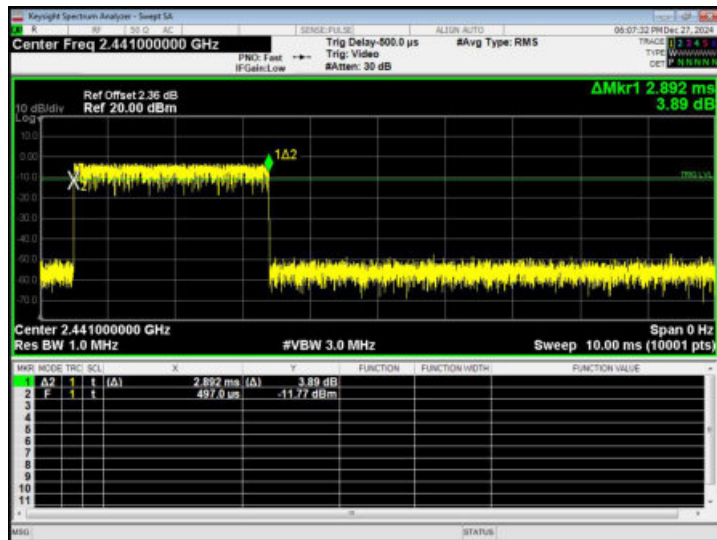



12. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antennas is 3.14dBi, reference to the appendix II for details.	



13. TEST SETUP PHOTO

Reference to the appendix I for details.

14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****