


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11B 2462

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 18

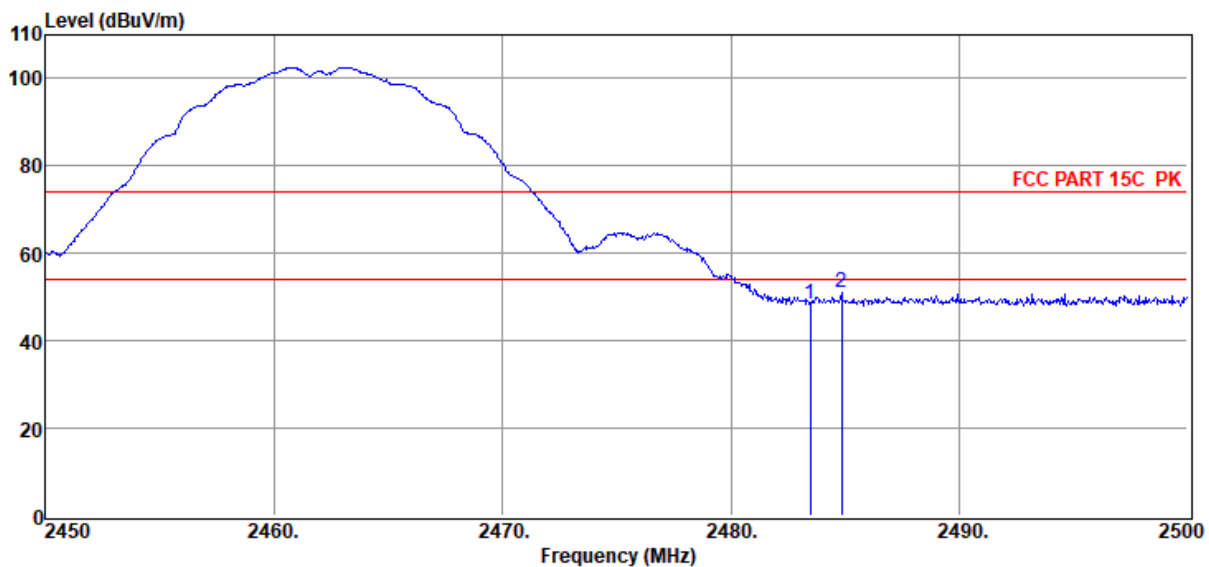

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.96	27.57	39.64	1.74	0.73	48.36	74.00	-25.64	Peak	VERTICAL
2	2484.85	50.55	27.57	39.64	1.74	0.73	50.95	74.00	-23.05	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11G 2412

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 19

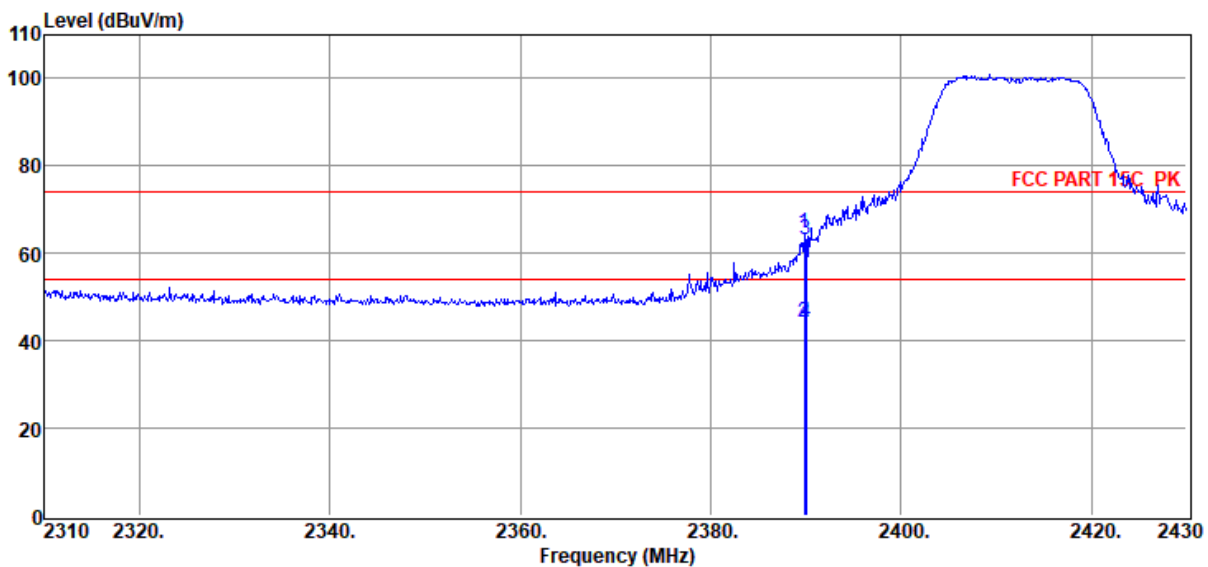

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.80	64.52	27.40	39.59	1.71	0.72	64.76	74.00	-9.24	Peak	HORIZONTAL
2	2389.80	44.15	27.40	39.59	1.71	0.72	44.39	54.00	-9.61	Average	HORIZONTAL
3	2390.04	63.04	27.40	39.60	1.71	0.72	63.27	74.00	-10.73	Peak	HORIZONTAL
4	2390.04	44.10	27.40	39.60	1.71	0.72	44.33	54.00	-9.67	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11G 2412

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 20

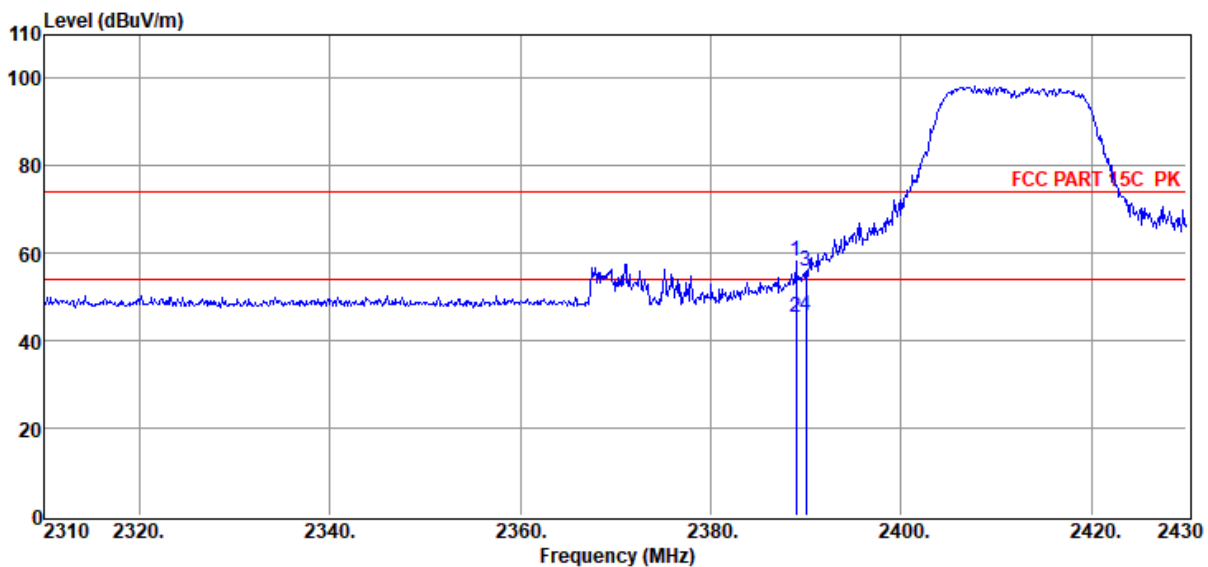

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.96	58.10	27.40	39.59	1.71	0.72	58.34	74.00	-15.66	Peak	VERTICAL
2	2388.96	44.96	27.40	39.59	1.71	0.72	45.20	54.00	-8.80	Average	VERTICAL
3	2390.04	55.78	27.40	39.60	1.71	0.72	56.01	74.00	-17.99	Peak	VERTICAL
4	2390.04	45.57	27.40	39.60	1.71	0.72	45.80	54.00	-8.20	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11G 2462

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 21

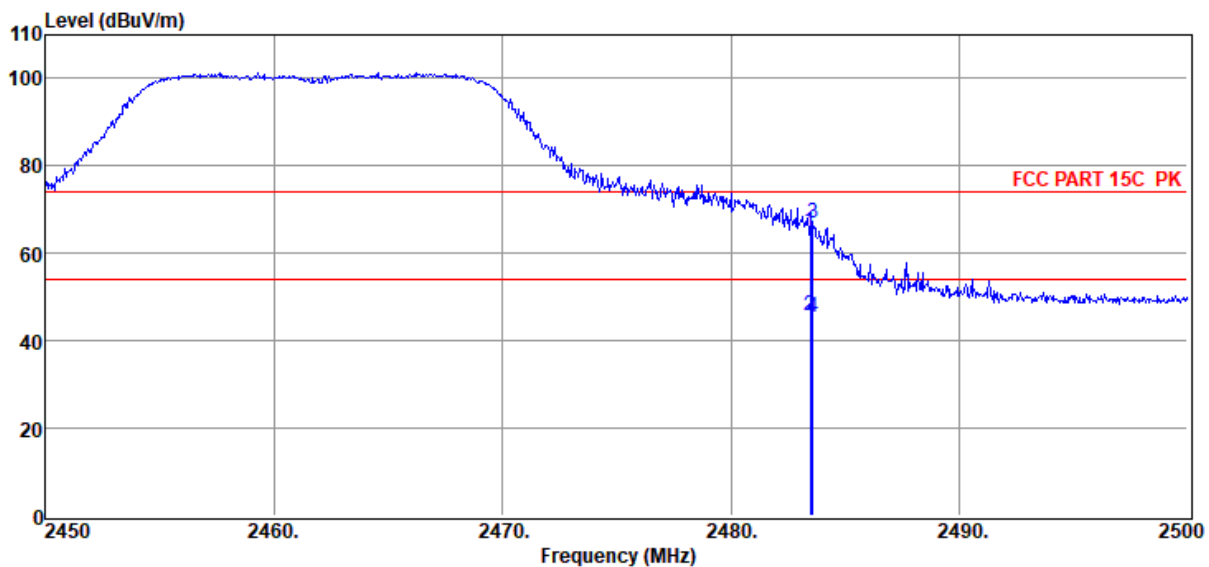

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	64.75	27.57	39.64	1.74	0.73	65.15	74.00	-8.85	Peak	HORIZONTAL
2	2483.50	45.27	27.57	39.64	1.74	0.73	45.67	54.00	-8.33	Average	HORIZONTAL
3	2483.60	66.53	27.57	39.64	1.74	0.73	66.93	74.00	-7.07	Peak	HORIZONTAL
4	2483.60	45.06	27.57	39.64	1.74	0.73	45.46	54.00	-8.54	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11G 2462

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 22

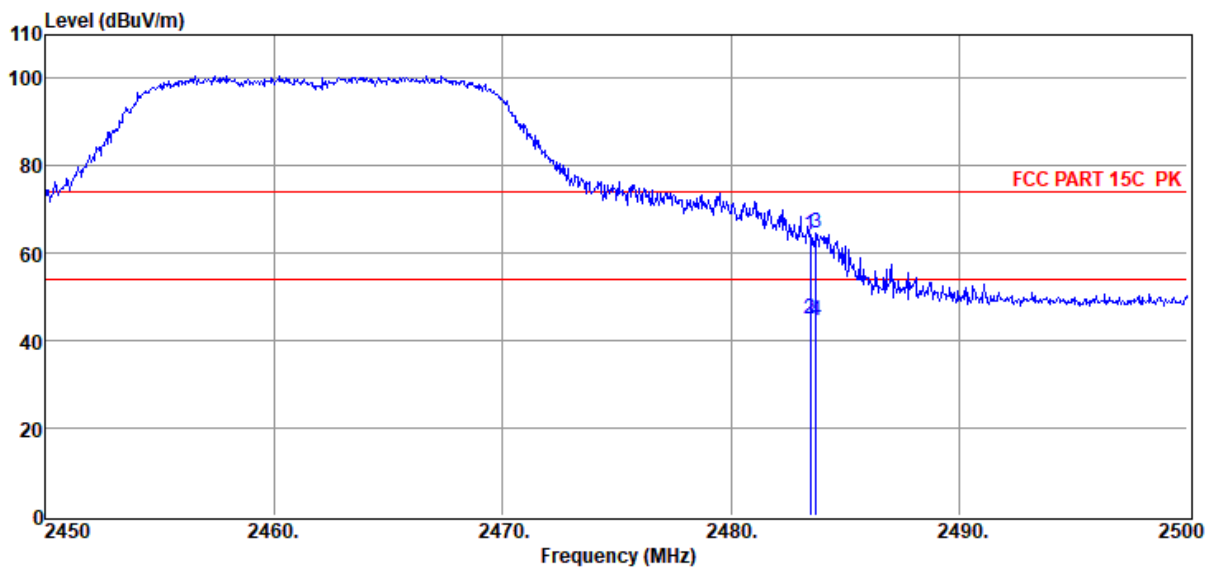

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	63.88	27.57	39.64	1.74	0.73	64.28	74.00	-9.72	Peak	VERTICAL
2	2483.50	44.52	27.57	39.64	1.74	0.73	44.92	54.00	-9.08	Average	VERTICAL
3	2483.75	64.18	27.57	39.64	1.74	0.73	64.58	74.00	-9.42	Peak	VERTICAL
4	2483.75	44.05	27.57	39.64	1.74	0.73	44.45	54.00	-9.55	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N20 2412

Data: 23

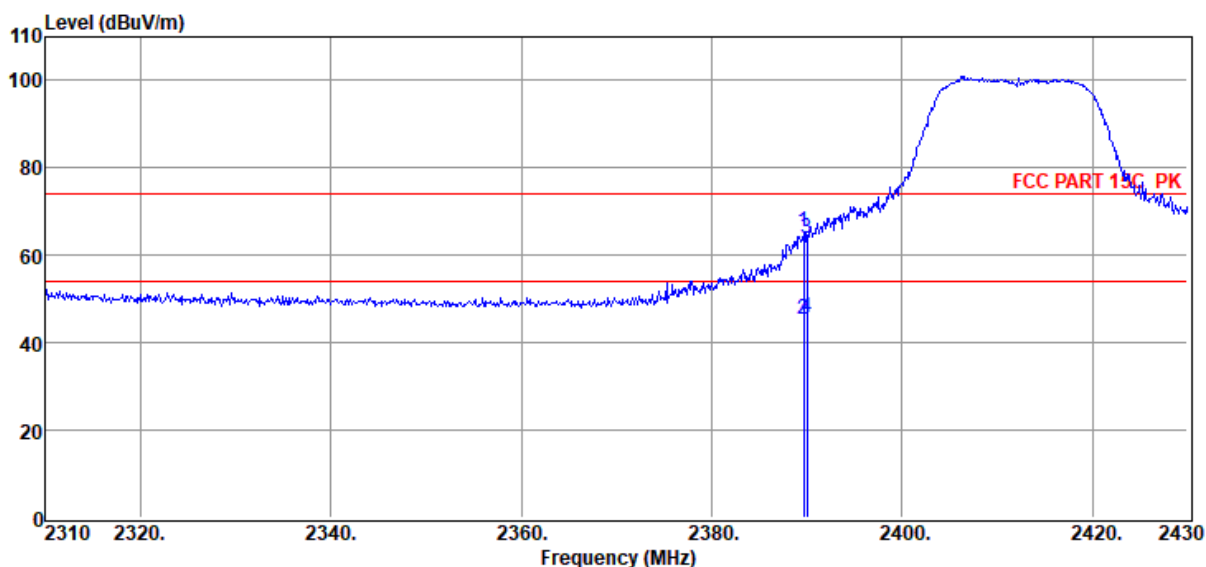

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.68	65.10	27.40	39.59	1.71	0.72	65.34	74.00	-8.66	Peak	HORIZONTAL
2	2389.68	45.31	27.40	39.59	1.71	0.72	45.55	54.00	-8.45	Average	HORIZONTAL
3	2390.04	63.63	27.40	39.60	1.71	0.72	63.86	74.00	-10.14	Peak	HORIZONTAL
4	2390.04	45.40	27.40	39.60	1.71	0.72	45.63	54.00	-8.37	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11N20 2412

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 24

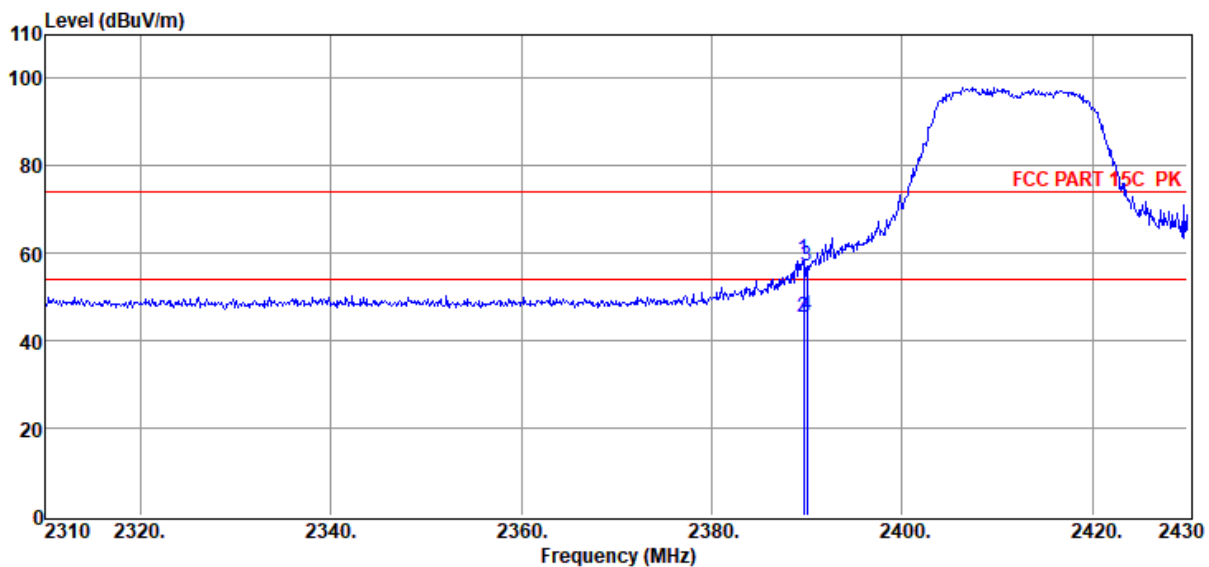

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.68	58.19	27.40	39.59	1.71	0.72	58.43	74.00	-15.57	Peak	VERTICAL
2	2389.68	45.19	27.40	39.59	1.71	0.72	45.43	54.00	-8.57	Average	VERTICAL
3	2390.04	57.02	27.40	39.60	1.71	0.72	57.25	74.00	-16.75	Peak	VERTICAL
4	2390.04	45.45	27.40	39.60	1.71	0.72	45.68	54.00	-8.32	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N20 2462

Data: 25

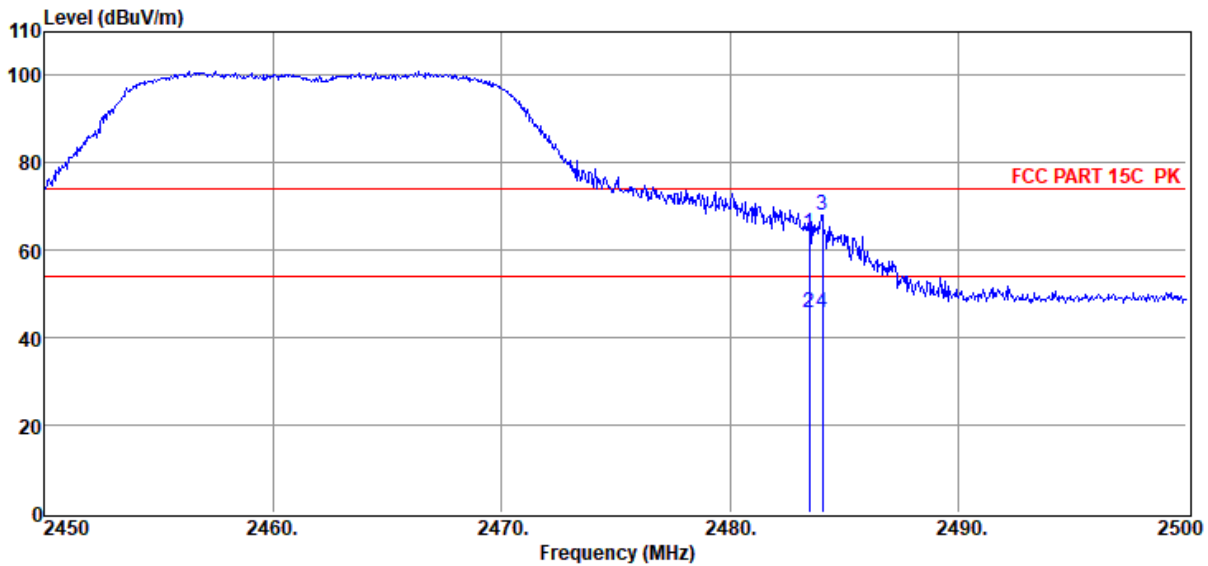

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	63.41	27.57	39.64	1.74	0.73	63.81	74.00	-10.19	Peak	HORIZONTAL
2	2483.50	45.46	27.57	39.64	1.74	0.73	45.86	54.00	-8.14	Average	HORIZONTAL
3	2484.05	67.82	27.57	39.64	1.74	0.73	68.22	74.00	-5.78	Peak	HORIZONTAL
4	2484.05	45.39	27.57	39.64	1.74	0.73	45.79	54.00	-8.21	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N20 2462

Data: 26

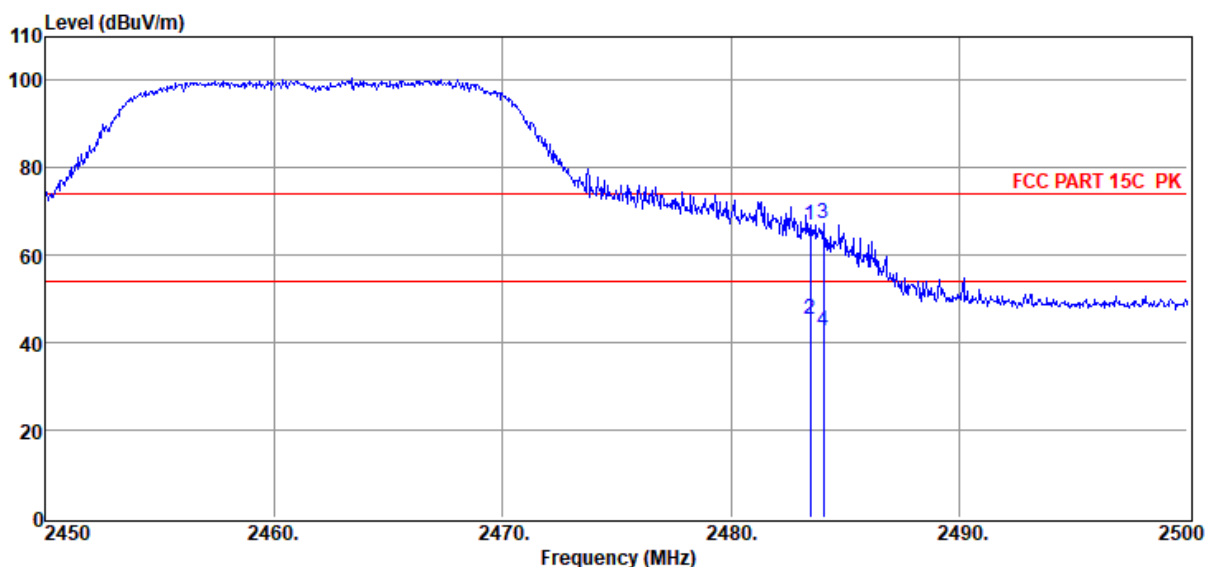

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	66.59	27.57	39.64	1.74	0.73	66.99	74.00	-7.01	Peak	VERTICAL
2	2483.50	44.81	27.57	39.64	1.74	0.73	45.21	54.00	-8.79	Average	VERTICAL
3	2484.05	66.80	27.57	39.64	1.74	0.73	67.20	74.00	-6.80	Peak	VERTICAL
4	2484.05	42.35	27.57	39.64	1.74	0.73	42.75	54.00	-11.25	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2412

Data: 27

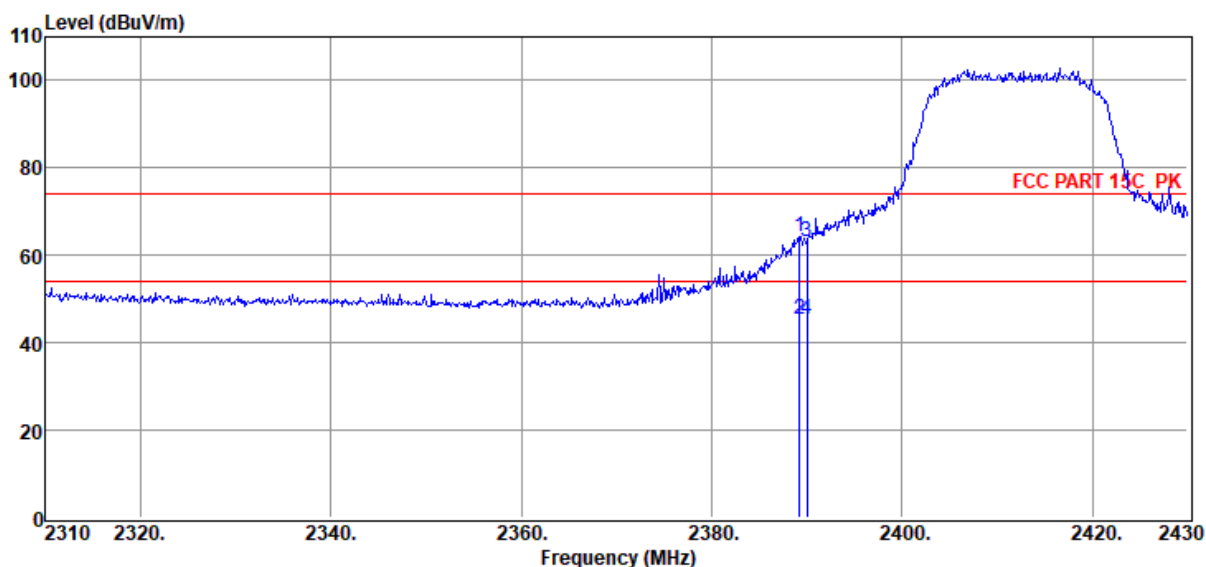

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.20	63.99	27.40	39.59	1.71	0.72	64.23	74.00	-9.77	Peak	HORIZONTAL
2	2389.20	45.22	27.40	39.59	1.71	0.72	45.46	54.00	-8.54	Average	HORIZONTAL
3	2390.04	62.93	27.40	39.60	1.71	0.72	63.16	74.00	-10.84	Peak	HORIZONTAL
4	2390.04	45.00	27.40	39.60	1.71	0.72	45.23	54.00	-8.77	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2412

Data: 28

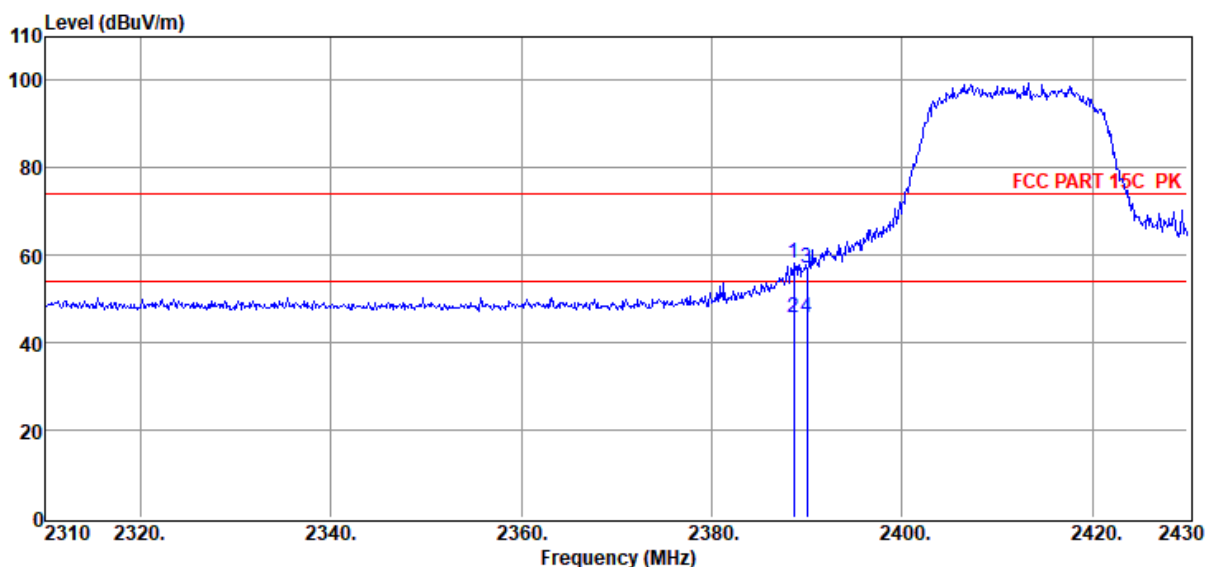

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2388.60	58.08	27.40	39.59	1.71	0.72	58.32	74.00	-15.68	Peak	VERTICAL
2	2388.60	45.61	27.40	39.59	1.71	0.72	45.85	54.00	-8.15	Average	VERTICAL
3	2390.04	56.99	27.40	39.60	1.71	0.72	57.22	74.00	-16.78	Peak	VERTICAL
4	2390.04	45.49	27.40	39.60	1.71	0.72	45.72	54.00	-8.28	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11AX20 2462

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 29

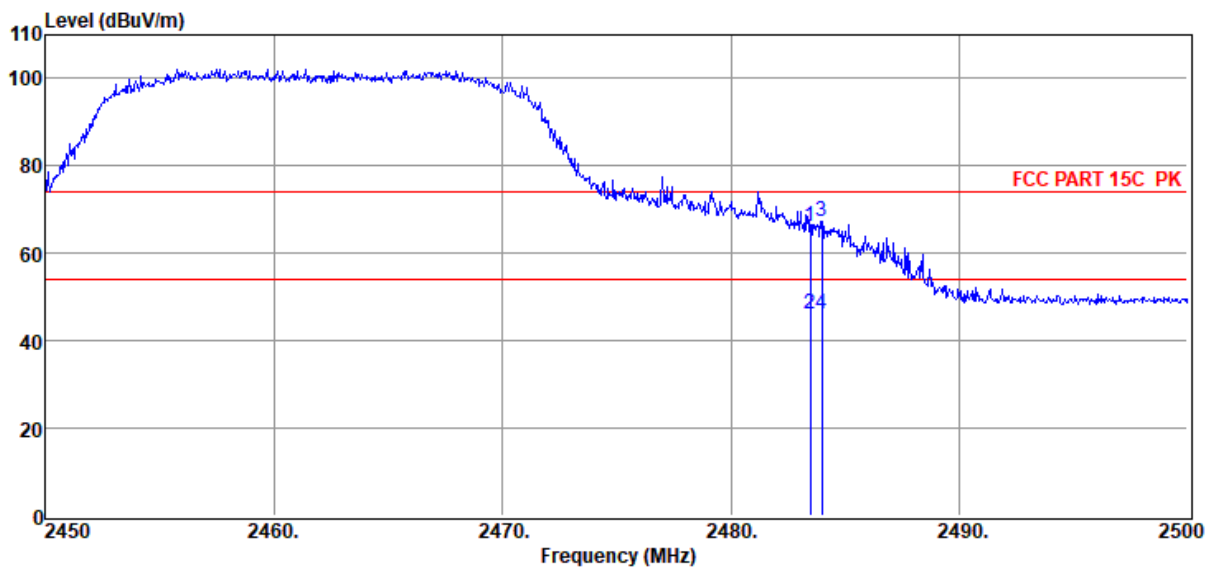

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	65.65	27.57	39.64	1.74	0.73	66.05	74.00	-7.95	Peak	HORIZONTAL
2	2483.50	45.63	27.57	39.64	1.74	0.73	46.03	54.00	-7.97	Average	HORIZONTAL
3	2484.00	66.79	27.57	39.64	1.74	0.73	67.19	74.00	-6.81	Peak	HORIZONTAL
4	2484.00	45.74	27.57	39.64	1.74	0.73	46.14	54.00	-7.86	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2462

Data: 30

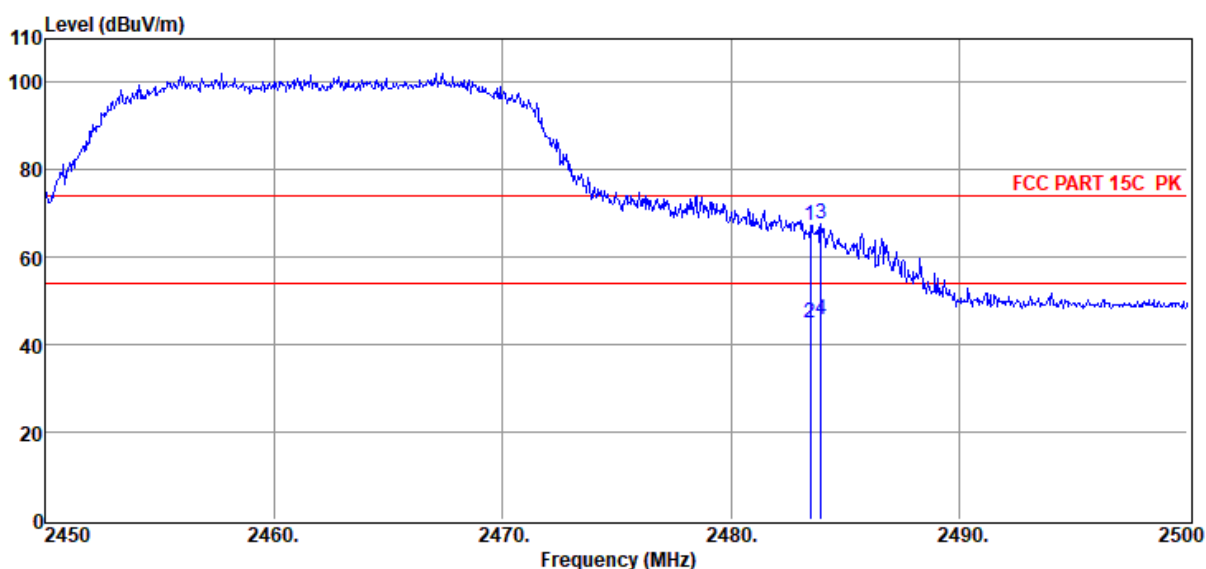

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	67.06	27.57	39.64	1.74	0.73	67.46	74.00	-6.54	Peak	VERTICAL
2	2483.50	44.77	27.57	39.64	1.74	0.73	45.17	54.00	-8.83	Average	VERTICAL
3	2483.95	67.30	27.57	39.64	1.74	0.73	67.70	74.00	-6.30	Peak	VERTICAL
4	2483.95	45.44	27.57	39.64	1.74	0.73	45.84	54.00	-8.16	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC
ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N40 2422

Data: 31

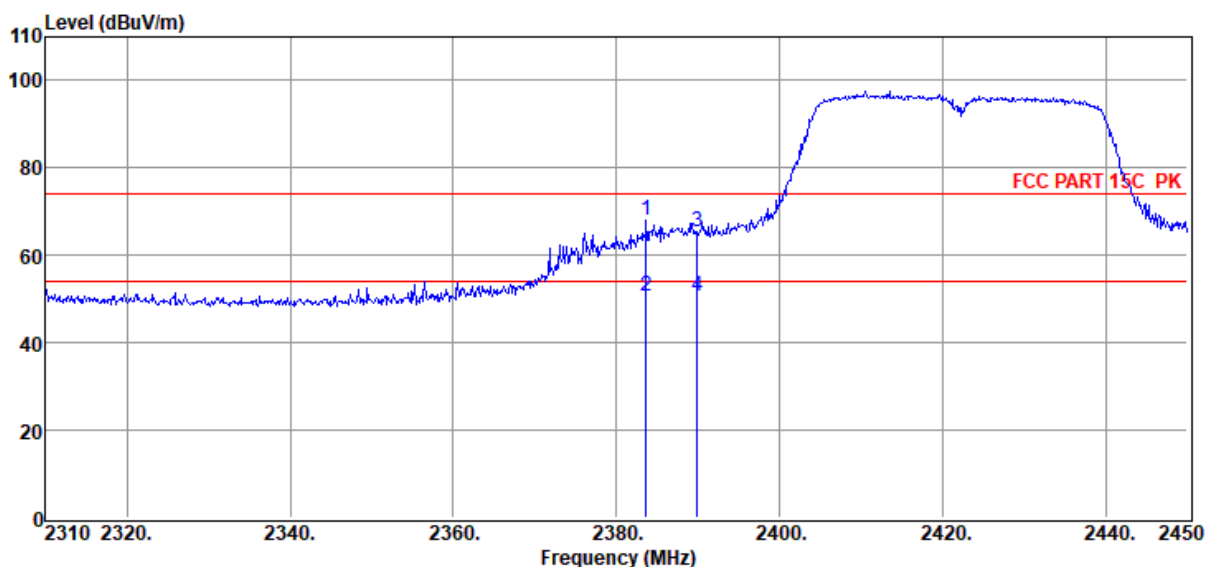

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.64	67.82	27.39	39.59	1.71	0.72	68.05	74.00	-5.95	Peak	HORIZONTAL
2	2383.64	50.57	27.39	39.59	1.71	0.72	50.80	54.00	-3.20	Average	HORIZONTAL
3	2389.94	65.06	27.40	39.59	1.71	0.72	65.30	74.00	-8.70	Peak	HORIZONTAL
4	2389.94	50.24	27.40	39.59	1.71	0.72	50.48	54.00	-3.52	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11N40 2422

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 32

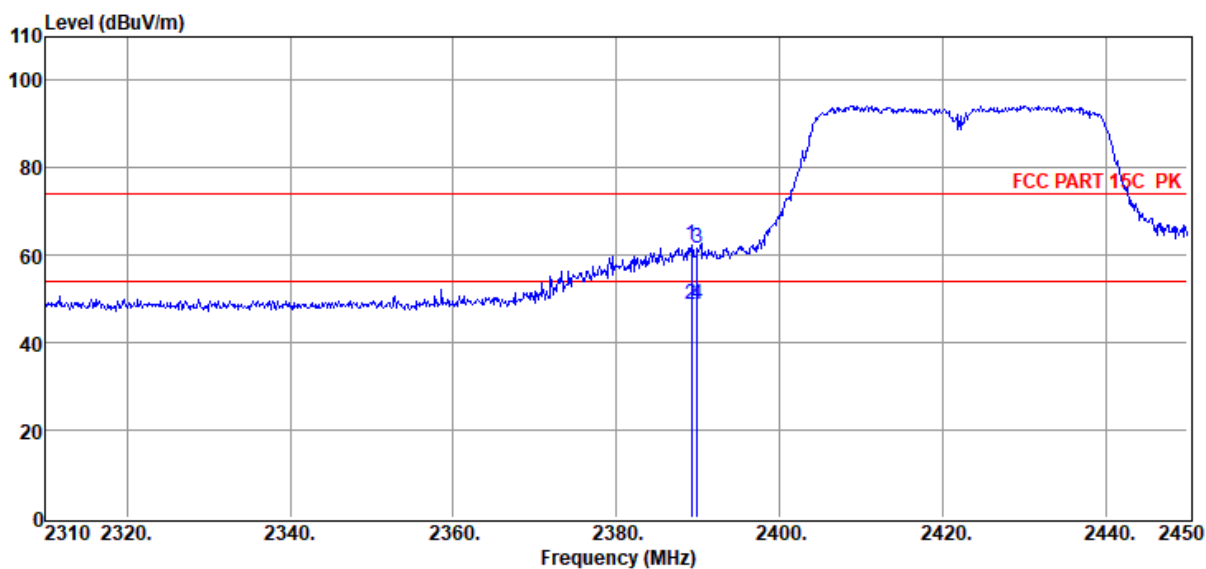

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.24	62.26	27.40	39.59	1.71	0.72	62.50	74.00	-11.50	Peak	VERTICAL
2	2389.24	48.49	27.40	39.59	1.71	0.72	48.73	54.00	-5.27	Average	VERTICAL
3	2389.94	61.53	27.40	39.59	1.71	0.72	61.77	74.00	-12.23	Peak	VERTICAL
4	2389.94	48.53	27.40	39.59	1.71	0.72	48.77	54.00	-5.23	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N40 2452

Data: 34

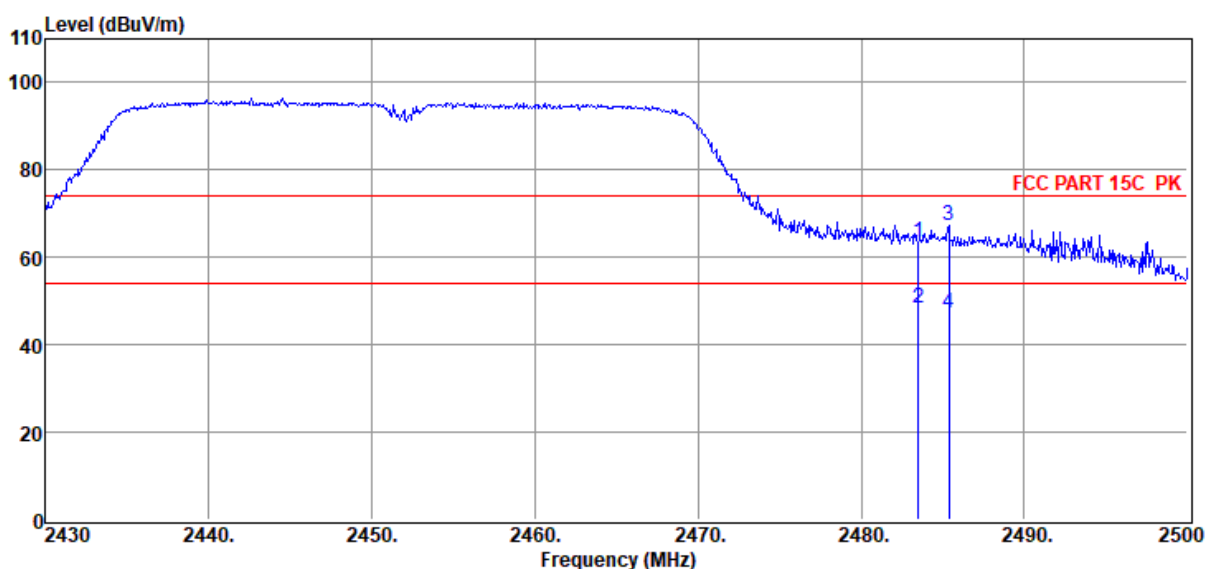

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.48	63.15	27.57	39.64	1.74	0.73	63.55	74.00	-10.45	Peak	HORIZONTAL
2	2483.48	47.86	27.57	39.64	1.74	0.73	48.26	54.00	-5.74	Average	HORIZONTAL
3	2485.37	67.07	27.57	39.64	1.74	0.73	67.47	74.00	-6.53	Peak	HORIZONTAL
4	2485.37	46.81	27.57	39.64	1.74	0.73	47.21	54.00	-6.79	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N40 2452

Data: 35

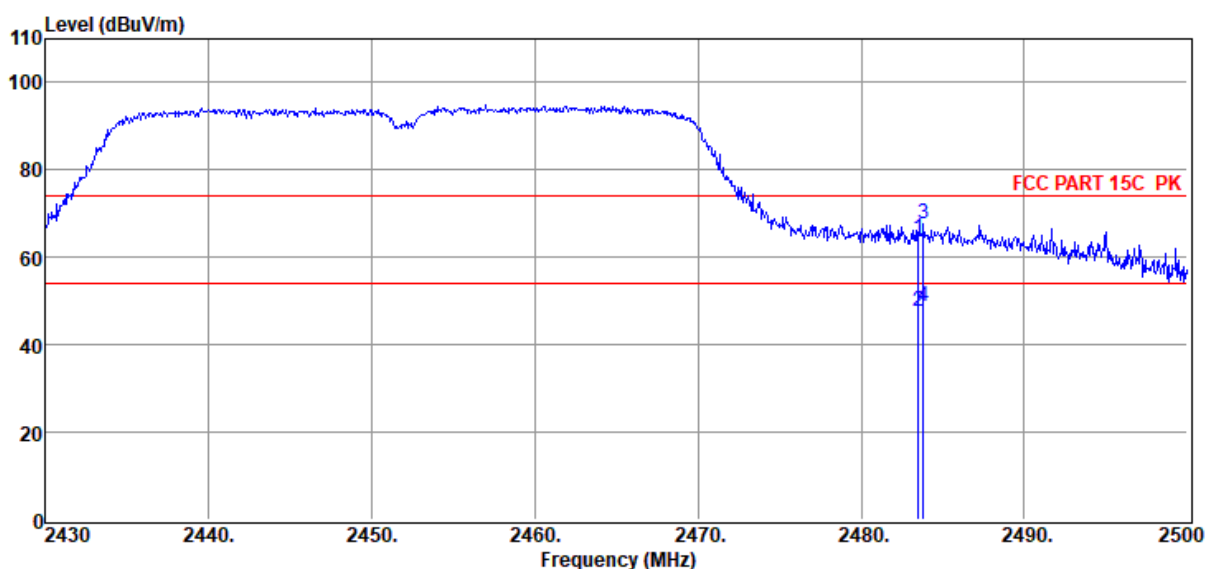

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.48	63.89	27.57	39.64	1.74	0.73	64.29	74.00	-9.71	Peak	VERTICAL
2	2483.48	47.30	27.57	39.64	1.74	0.73	47.70	54.00	-6.30	Average	VERTICAL
3	2483.83	67.41	27.57	39.64	1.74	0.73	67.81	74.00	-6.19	Peak	VERTICAL
4	2483.83	48.35	27.57	39.64	1.74	0.73	48.75	54.00	-5.25	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX40 2422

Data: 36

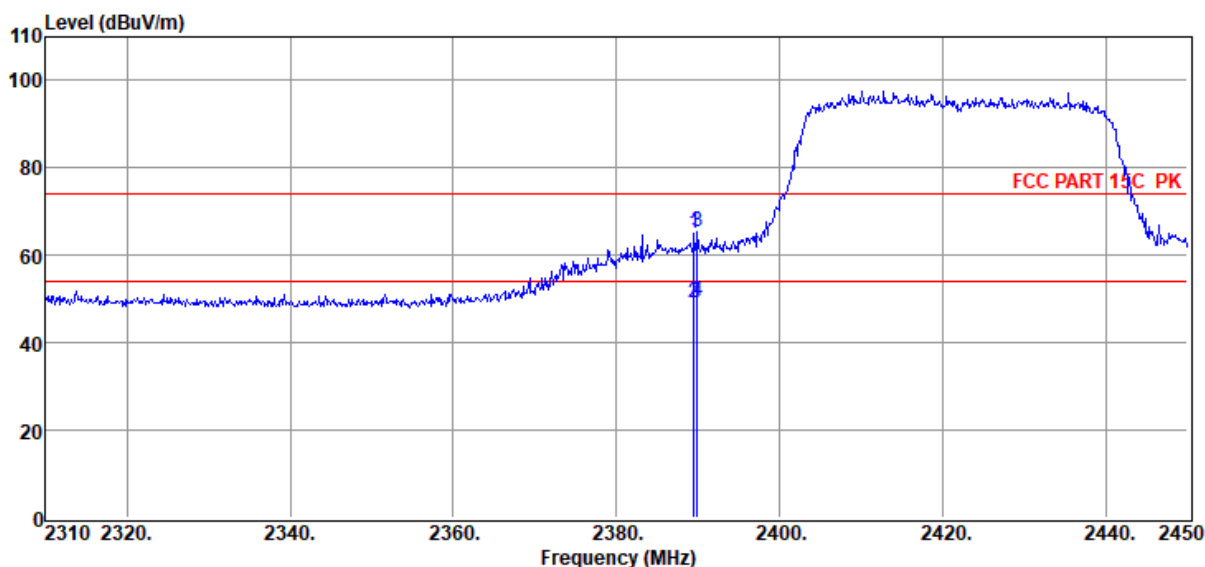

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.52	64.90	27.40	39.59	1.71	0.72	65.14	74.00	-8.86	Peak	HORIZONTAL
2	2389.52	48.86	27.40	39.59	1.71	0.72	49.10	54.00	-4.90	Average	HORIZONTAL
3	2389.94	65.22	27.40	39.59	1.71	0.72	65.46	74.00	-8.54	Peak	HORIZONTAL
4	2389.94	49.29	27.40	39.59	1.71	0.72	49.53	54.00	-4.47	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX40 2422

Data: 37

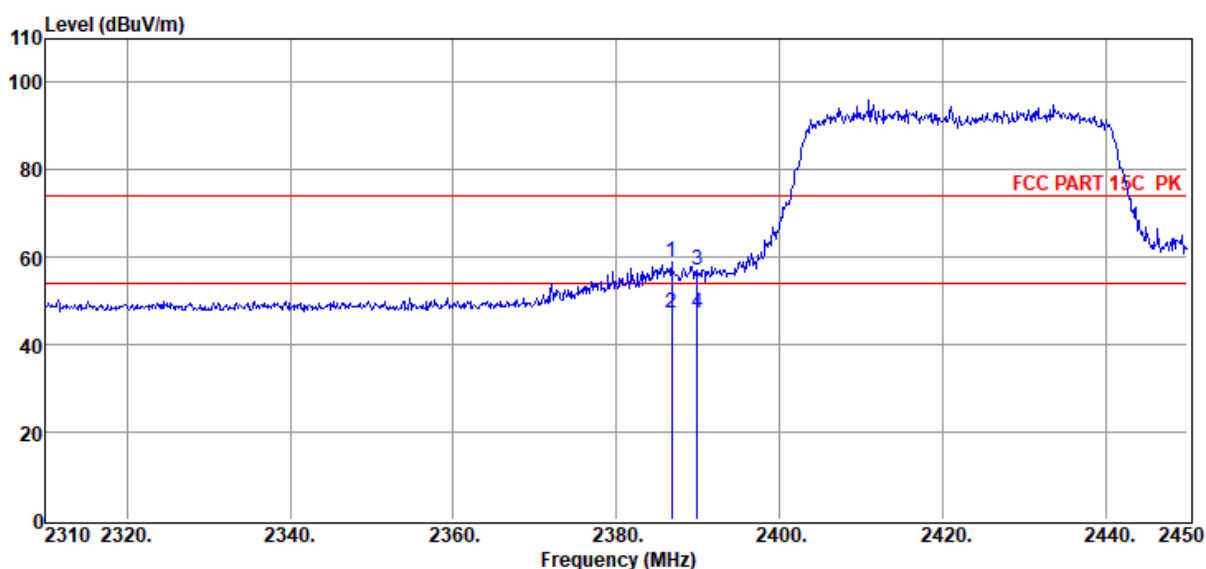

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2386.72	58.78	27.40	39.59	1.71	0.72	59.02	74.00	-14.98	Peak	VERTICAL
2	2386.72	47.19	27.40	39.59	1.71	0.72	47.43	54.00	-6.57	Average	VERTICAL
3	2389.94	56.91	27.40	39.59	1.71	0.72	57.15	74.00	-16.85	Peak	VERTICAL
4	2389.94	46.96	27.40	39.59	1.71	0.72	47.20	54.00	-6.80	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-17
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa
Memo : 11AX40 2452

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Data: 38

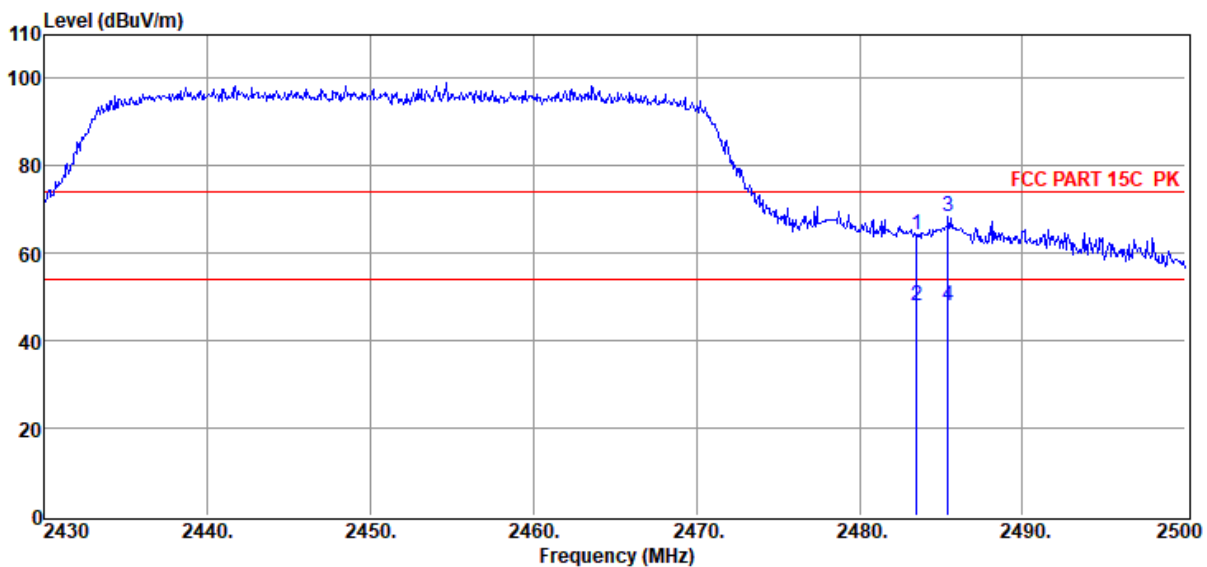

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.48	63.82	27.57	39.64	1.74	0.73	64.22	74.00	-9.78	Peak	HORIZONTAL
2	2483.48	47.64	27.57	39.64	1.74	0.73	48.04	54.00	-5.96	Average	HORIZONTAL
3	2485.44	67.98	27.57	39.64	1.74	0.73	68.38	74.00	-5.62	Peak	HORIZONTAL
4	2485.44	47.76	27.57	39.64	1.74	0.73	48.16	54.00	-5.84	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\FCC ABOVE 1G - 2.4GWIFI.EM6

Test Date : 2022-08-17

Tested By : Bairong

EUT : Integrated video conference terminal

Model Number : UC S15

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22°C,Humi:59.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX40 2452

Data: 39

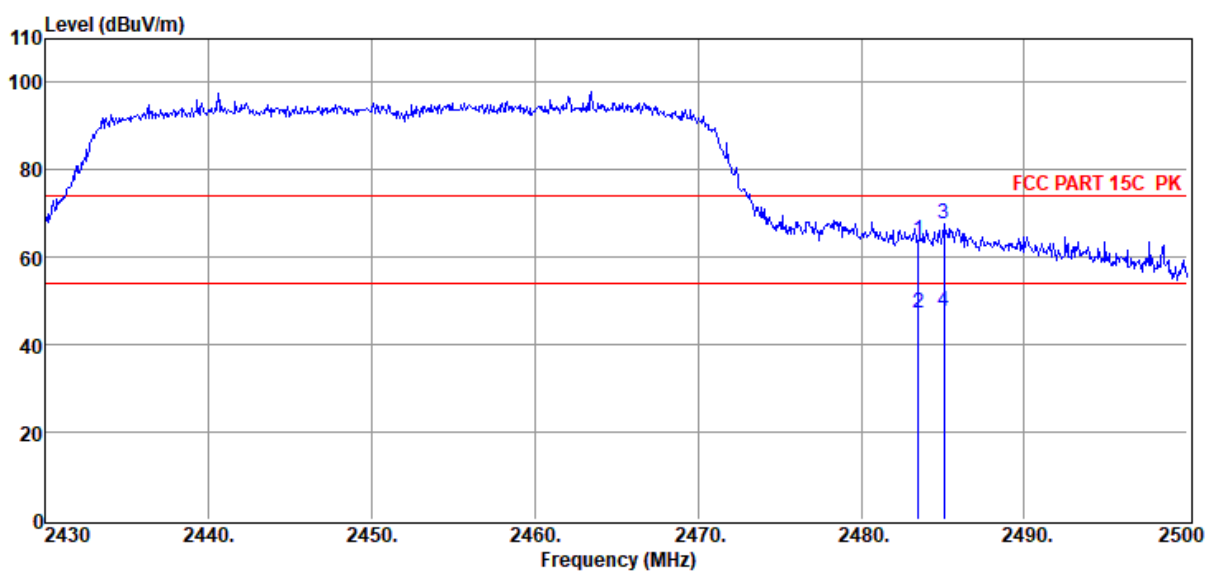

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.48	63.45	27.57	39.64	1.74	0.73	63.85	74.00	-10.15	Peak	VERTICAL
2	2483.48	46.98	27.57	39.64	1.74	0.73	47.38	54.00	-6.62	Average	VERTICAL
3	2485.09	67.27	27.57	39.64	1.74	0.73	67.67	74.00	-6.33	Peak	VERTICAL
4	2485.09	47.20	27.57	39.64	1.74	0.73	47.60	54.00	-6.40	Average	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

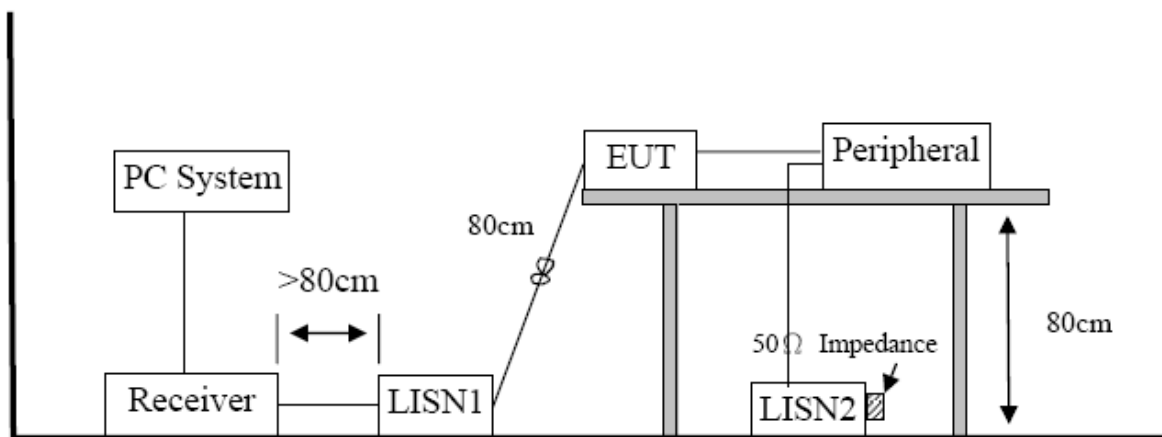

11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test Result

Pass. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means peak detection; "----" means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2022 CE report date\Q22062203-2E UCS15\FCC.EM6**
Test Date : 2022-08-16 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : TX mode
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/NEUTRAL
Memo : 2.4GWIFI

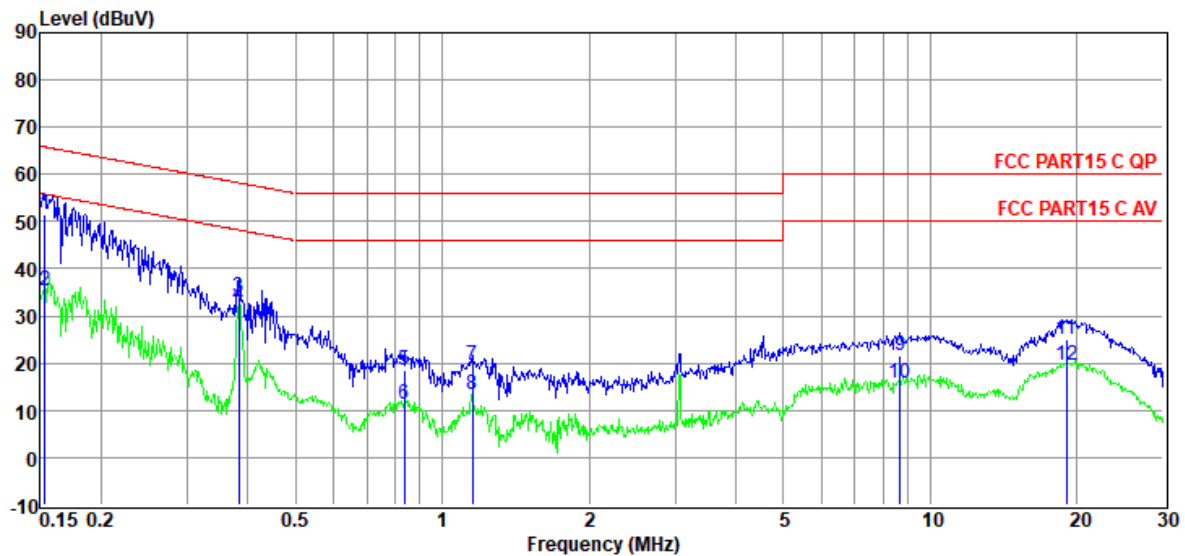


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	31.93	9.80	0.01	9.92	51.66	65.82	-14.16	QP	NEUTRAL
2	0.15	15.71	9.80	0.01	9.92	35.44	55.82	-20.38	Average	NEUTRAL
3	0.38	14.58	9.59	0.02	9.91	34.10	58.21	-24.11	QP	NEUTRAL
4	0.38	12.91	9.59	0.02	9.91	32.43	48.21	-15.78	Average	NEUTRAL
5	0.83	-1.07	9.75	0.03	9.90	18.61	56.00	-37.39	QP	NEUTRAL
6	0.83	-8.40	9.75	0.03	9.90	11.28	46.00	-34.72	Average	NEUTRAL
7	1.15	-0.17	9.68	0.03	9.89	19.43	56.00	-36.57	QP	NEUTRAL
8	1.15	-6.19	9.68	0.03	9.89	13.41	46.00	-32.59	Average	NEUTRAL
9	8.68	1.72	9.72	0.10	9.94	21.48	60.00	-38.52	QP	NEUTRAL
10	8.68	-3.87	9.72	0.10	9.94	15.89	50.00	-34.11	Average	NEUTRAL
11	19.02	5.07	9.77	0.17	9.95	24.96	60.00	-35.04	QP	NEUTRAL
12	19.02	-0.23	9.77	0.17	9.95	19.66	50.00	-30.34	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2022 CE report date\Q22062203-2E UCS15\FCC.EM6**
Test Date : 2022-08-16 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : TX mode
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/LINE
Memo : 2.4GWIFI

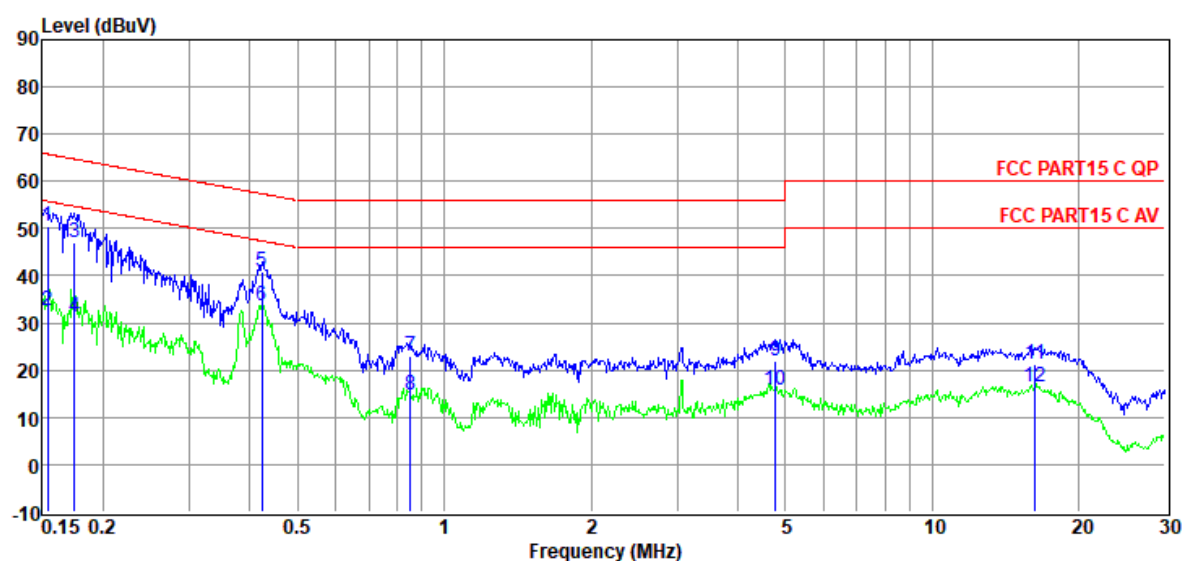

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	30.82	9.62	0.01	9.92	50.37	65.78	-15.41	QP	LINE
2	0.15	13.07	9.62	0.01	9.92	32.62	55.78	-23.16	Average	LINE
3	0.17	27.49	9.71	0.01	9.92	47.13	64.72	-17.59	QP	LINE
4	0.17	11.73	9.71	0.01	9.92	31.37	54.72	-23.35	Average	LINE
5	0.42	21.23	9.64	0.02	9.91	40.80	57.37	-16.57	QP	LINE
6	0.42	13.93	9.64	0.02	9.91	33.50	47.37	-13.87	Average	LINE
7	0.85	3.57	9.56	0.03	9.90	23.06	56.00	-32.94	QP	LINE
8	0.85	-4.75	9.56	0.03	9.90	14.74	46.00	-31.26	Average	LINE
9	4.77	2.52	9.57	0.06	9.93	22.08	56.00	-33.92	QP	LINE
10	4.77	-3.91	9.57	0.06	9.93	15.65	46.00	-30.35	Average	LINE
11	16.23	1.37	9.75	0.15	9.94	21.21	60.00	-38.79	QP	LINE
12	16.23	-3.35	9.75	0.15	9.94	16.49	50.00	-33.51	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2. Result

The product is that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.9 dBi.