

# FCC Measurement/Technical Report on Telematic Unit CONBOX-HIGH

FCC ID: T8GP114  
IC: 6434A-P114

**Test Report Reference:** MDE\_HARMAN\_1736\_FCCb\_rev1

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**

Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

**Geschäftsführer/**

**Managing Directors:**

Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

**Registergericht/registered:**

Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas  
Group Company*

*www.7layers.com*

## Table of Contents

<b>1</b>	<b>Applied Standards and Test Summary</b>	<b>4</b>
1.1	Applied Standards	4
1.2	FCC-IC Correlation Table	5
1.3	Measurement Summary / Signatures	6
<b>2</b>	<b>Revision History</b>	<b>10</b>
<b>3</b>	<b>Administrative Data</b>	<b>11</b>
3.1	Testing Laboratory	11
3.2	Project Data	11
3.3	Applicant Data	11
3.4	Manufacturer Data	12
<b>4</b>	<b>Test object Data</b>	<b>13</b>
4.1	General EUT Description	13
4.2	EUT Main components	14
4.3	Ancillary Equipment	15
4.4	Auxiliary Equipment	15
4.5	EUT Setups	15
4.6	Operating Modes	16
4.7	Product labelling	16
<b>5</b>	<b>Test Results</b>	<b>17</b>
5.1	Occupied Bandwidth (6 dB)	17
5.2	Occupied Bandwidth (99%)	20
5.3	Peak Power Output	23
5.4	Spurious RF Conducted Emissions	26
5.5	Transmitter Spurious Radiated Emissions	29
5.6	Band Edge Compliance Conducted	37
5.7	Band Edge Compliance Radiated	41
5.8	Power Density	45
<b>6</b>	<b>Test Equipment</b>	<b>48</b>
<b>7</b>	<b>Antenna Factors, Cable Loss and Sample Calculations</b>	<b>51</b>
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	51
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	52
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	53
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	54
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	55
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	56
<b>8</b>	<b>Setup Drawings</b>	<b>57</b>

<b>9</b>	<b>Measurement Uncertainties</b>	<b>58</b>
<b>10</b>	<b>Photo Report</b>	<b>58</b>

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator.

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-18 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

#### **Note:**

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05, 2018-08-24". ANSI C63.10-2013 is applied.

## Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

### 1.2 FCC-IC CORRELATION TABLE

#### Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC

##### DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 2: 5.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 2: 5.4 (d)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 2: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 2: 5.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5: 8.3
Receiver spurious emissions	–	–

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### 47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

#### § 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10

#### Final Result

#### OP-Mode

Radio Technology, Operating Frequency

Bluetooth LE, high

Bluetooth LE, low

Bluetooth LE, mid

WLAN b, high

WLAN b, low

WLAN b, mid

WLAN g, high

WLAN g, low

WLAN g, mid

WLAN n 20 MHz, high

WLAN n 20 MHz, low

WLAN n 20 MHz, mid

#### Setup

#### FCC

#### IC

S01\_AF02

Passed

Passed

S01\_AF02

Passed

Passed

S01\_AF02

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

S01\_AB01

Passed

Passed

#### 47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

#### IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10

#### Final Result

#### OP-Mode

Radio Technology, Operating Frequency

Bluetooth LE, high

Bluetooth LE, low

Bluetooth LE, mid

WLAN b, high

WLAN b, low

WLAN b, mid

WLAN g, high

WLAN g, low

WLAN g, mid

WLAN n 20 MHz, high

WLAN n 20 MHz, low

WLAN n 20 MHz, mid

#### Setup

#### FCC

#### IC

S01\_AF02

N/A

Passed

S01\_AF02

N/A

Passed

S01\_AF02

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

S01\_AB01

N/A

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (b) (3)**

Peak Power Output

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Measurement method

	Setup	FCC	IC
Bluetooth LE, high, conducted	S01_AF02	Passed	Passed
Bluetooth LE, low, conducted	S01_AF02	Passed	Passed
Bluetooth LE, mid, conducted	S01_AF02	Passed	Passed
WLAN b, high, conducted	S01_AB01	Passed	Passed
WLAN b, low, conducted	S01_AB01	Passed	Passed
WLAN b, mid, conducted	S01_AB01	Passed	Passed
WLAN g, high, conducted	S01_AB01	Passed	Passed
WLAN g, low, conducted	S01_AB01	Passed	Passed
WLAN g, mid, conducted	S01_AB01	Passed	Passed
WLAN n 20 MHz, high, conducted	S01_AB01	Passed	Passed
WLAN n 20 MHz, low, conducted	S01_AB01	Passed	Passed
WLAN n 20 MHz, mid, conducted	S01_AB01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency

	Setup	FCC	IC
Bluetooth LE, high	S01_AF02	Passed	Passed
Bluetooth LE, low	S01_AF02	Passed	Passed
Bluetooth LE, mid	S01_AF02	Passed	Passed
WLAN b, high	S01_AB01	Passed	Passed
WLAN b, low	S01_AB01	Passed	Passed
WLAN b, mid	S01_AB01	Passed	Passed
WLAN g, high	S01_AB01	Passed	Passed
WLAN g, low	S01_AB01	Passed	Passed
WLAN g, mid	S01_AB01	Passed	Passed
WLAN n 20 MHz, high	S01_AB01	Passed	Passed
WLAN n 20 MHz, low	S01_AB01	Passed	Passed
WLAN n 20 MHz, mid	S01_AB01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Measurement range

	Setup	FCC	IC
Bluetooth LE, high, 1 GHz - 26 GHz	S02_AH02	Passed	Passed
Bluetooth LE, high, 30 MHz - 1 GHz	S02_AF02	Passed	Passed
Bluetooth LE, low, 1 GHz - 26 GHz	S02_AH02	Passed	Passed
Bluetooth LE, low, 30 MHz - 1 GHz	S02_AF02	Passed	Passed
Bluetooth LE, mid, 1 GHz - 26 GHz	S02_AH02	Passed	Passed
Bluetooth LE, mid, 30 MHz - 1 GHz	S02_AF02	Passed	Passed
Bluetooth LE, mid, 9 kHz - 30 MHz	S02_AF02	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz	S02_AE02	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz	S02_AE02	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz	S02_AE02	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz	S02_AE02	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz	S02_AE02	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz	S02_AE02	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz	S02_AE02	Passed	Passed
WLAN g, high, 1 GHz - 8 GHz	S02_AE02	Passed	Passed
WLAN g, low, 1 GHz - 8 GHz	S02_AE02	Passed	Passed
WLAN g, mid, 1 GHz - 8 GHz	S02_AE02	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Band Edge

	Setup	FCC	IC
Bluetooth LE, high, high	S01_AF02	Passed	Passed
Bluetooth LE, low, low	S01_AF02	Passed	Passed
WLAN b, high, high	S01_AB01	Passed	Passed
WLAN b, low, low	S01_AB01	Passed	Passed
WLAN g, high, high	S01_AB01	Passed	Passed
WLAN g, low, low	S01_AB01	Passed	Passed
WLAN n 20 MHz, high, high	S01_AB01	Passed	Passed
WLAN n 20 MHz, low, low	S01_AB01	Passed	Passed



#### 47 CFR CHAPTER I FCC PART 15 Subpart C

#### § 15.247 (d)

##### §15.247

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10

#### Final Result

##### OP-Mode

Radio Technology, Operating Frequency, Band Edge

Bluetooth LE, high, high

WLAN b, high, high

WLAN g, high, high

WLAN n 20 MHz, high, high

##### Setup

S02\_AH02

S02\_AE02

S02\_AE02

S02\_AE02

##### FCC

Passed

Passed

Passed

Passed

##### IC

Passed

Passed

Passed

Passed

#### 47 CFR CHAPTER I FCC PART 15 Subpart C

#### § 15.247 (e)

##### §15.247

Power Density

The measurement was performed according to ANSI C63.10

#### Final Result

##### OP-Mode

Radio Technology, Operating Frequency

Bluetooth LE, high

Bluetooth LE, low

Bluetooth LE, mid

WLAN b, high

WLAN b, low

WLAN b, mid

WLAN g, high

WLAN g, low

WLAN g, mid

WLAN n 20 MHz, high

WLAN n 20 MHz, low

WLAN n 20 MHz, mid

##### Setup

S01\_AF02

S01\_AF02

S01\_AF02

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

##### FCC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

##### IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

N/A: Not applicable

N/P: Not performed

## 2 REVISION HISTORY

Report version control			
Version	Release date	Change Description	Version validity
initial	2019-04-16	--	valid
rev1	2019-05-14	Changed referenced version of 47 CFR Ch.1 Parts 2 and 15 edition to 2018	valid

COMMENT: -



(responsible for accreditation scope)  
Dipl.-Ing. Marco Kullik



(responsible for testing and report)  
Dipl.-Ing. Daniel Gall



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

### 3 ADMINISTRATIVE DATA

#### 3.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-00  
FCC Designation Number: DE0015  
FCC Test Firm Registration: 929146  
ISED CAB Identifier: DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik  
Report Template Version: 2019-02-12

#### 3.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2019-05-14  
Testing Period: 2018-03-12 to 2019-04-10

#### 3.3 APPLICANT DATA

Company Name: HARMAN BECKER Automotive Systems GmbH  
Address: Becker-Goering-Str. 16  
76307 Karlsbad  
Germany  
Contact Person: Stefan Blaschek

### 3.4 MANUFACTURER DATA

Company Name:	HARMAN BECKER Automotive Systems GmbH
Address:	Becker-Goering-Str. 16 76307 Karlsbad Germany
Contact Person:	Stefan Blaschek

## 4 TEST OBJECT DATA

### 4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Telematic system with BT, WLAN, GNSS, GSM, UMTS, LTE
Product name	CONBOX-HIGH
Type	CONBOX-HIGH
<b>Declared EUT data by the supplier</b>	
Voltage Type	DC
Voltage Level	12 V
Tested Modulation Type	BT LE: GFSK WLANb: DSSS WLAN g/n: OFDM
Specific product description for the EUT	In the 2.4 GHz band the EUT has integrated Bluetooth, Bluetooth Low Energy and WLAN functionality. Relevant for this report is the Bluetooth Low Energy and the WLAN transmitter. The WLAN transmitter supports WLAN mode b/g/n in 20 MHz bandwidth. The antenna gain for the external antennas in the 2.4 GHz band is: -0.1 dBi
The EUT provides the following ports:	Enclosure Cable Harness incl. DC (unshielded) Antenna Port Cellular (4 Antennas, shielded) Antenna Port WLAN/BT/BT LE (3 Antennas, shielded) Antenna Port GNSS (1 Antenna, shielded)
Tested datarates	BT LE: 1Mbps WLAN mode b: 1 Mbps WLAN mode g: 6 Mbps WLAN mode n: MCS0

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

#### 4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT af02	DE1009043af02	
Sample Parameter	Value	
Serial No.	P114H70JB001194	
HW Version	EC983	
SW Version	Z025	
Comment		

Sample Name	Sample Code	Description
EUT ae02	DE1009043ae02	
Sample Parameter	Value	
Serial No.	A975J20JB000071	
HW Version	EC995	
SW Version	Y025	
Comment		

Sample Name	Sample Code	Description
EUT ah02	DE1009043ah02	
Sample Parameter	Value	
Serial No.	P114H40JB001164	
HW Version	EC983	
SW Version	Y025	
Comment		

Sample Name	Sample Code	Description
EUT ab01	DE1009043ab01	
Sample Parameter	Value	
Serial No.	P114H00JB001124	
HW Version	EC983	
SW Version	Z025	
Comment		

NOTE: The short description is used to simplify the identification of the EUT in this test report.

#### 4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

#### 4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX1	4M0.035.507, 09/18, - , 00052/00056/00191/00037	4 external cellular antennas
AUX2	4N0 035 500, 47/17, -, -	3 external WLAN/BT antennas
AUX3	Hirschmann, -	External GNSS antenna

#### 4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AB01	EUT ab01,	Conducted Setup
S02_AE02	EUT ae02, AUX1, AUX2, AUX3	Radiated Setup
S01_AF02	EUT af02,	Conducted Setup
S02_AF02	EUT af02, AUX1, AUX2, AUX3	Radiated Setup
S02_AH02	EUT ah02, AUX1, AUX2, AUX3	Radiated Setup

## 4.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

### 4.6.1 TEST CHANNELS

**WLAN**  
**20 MHz Test Channels:**  
**Channel:**  
**Frequency [MHz]**

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
1	6	11
2412	2437	2462

**BT LE Test Channels:**  
**Channel:**  
**Frequency [MHz]**

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	19	39
2402	2440	2480

## 4.7 PRODUCT LABELLING

### 4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

### 4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.



## 5 TEST RESULTS

### 5.1 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

#### 5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram

#### 5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.1.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE GFSK

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	0.75	0.5	0.25
	19	2440	0.75	0.5	0.25
	39	2480	0.73	0.5	0.23

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	9.3	0.5	8.8
	6	2437	9.3	0.5	8.8
	11	2462	9.3	0.5	8.8

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.5	0.5	16.0
	6	2437	16.5	0.5	16.0
	11	2462	16.5	0.5	16.0


WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.7	0.5	17.2
	6	2437	17.5	0.5	17.0
	11	2462	17.7	0.5	17.2

Remark: Please see next sub-clause for the measurement plot.


#### 5.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = high  
(S01\_AF02)

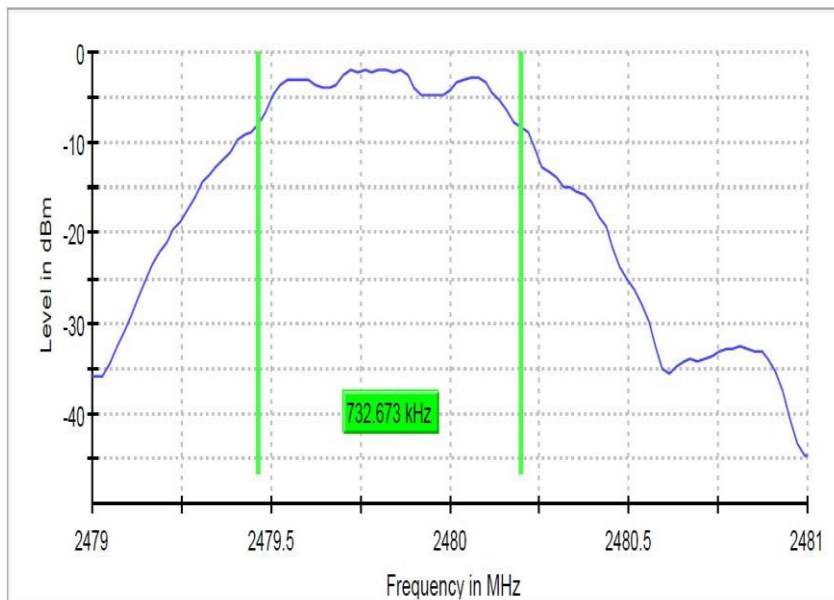

Setting	Instrument Value
Start Frequency	2.47900 GHz
Stop Frequency	2.48100 GHz
Span	2.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	101
Sweptime	18.938 $\mu$ s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	20 / max. 150
Stable	5 / 5
Max Stable Difference	0.31 dB

Radio Technology = WLAN b, Operating Frequency = mid  
(S01\_AB01)

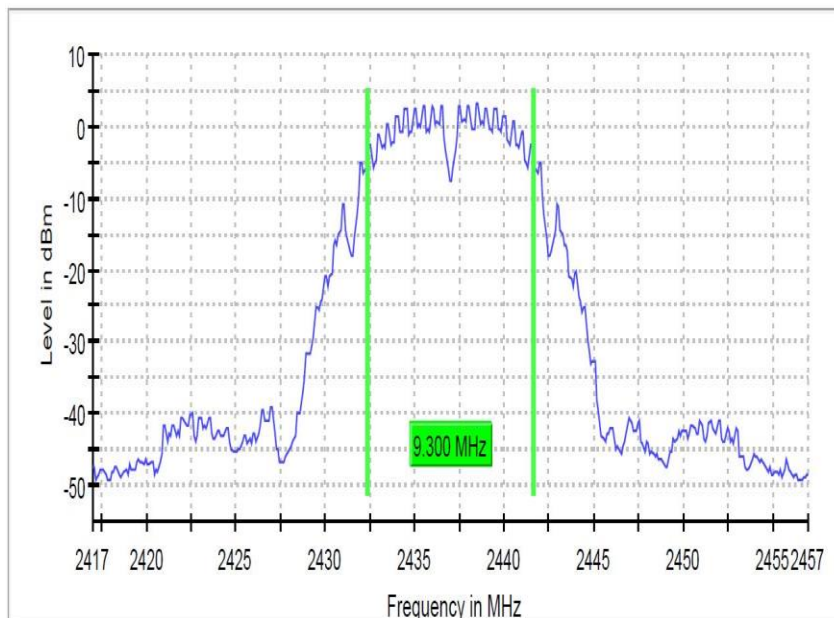

Setting	Instrument Value
Start Frequency	2.41700 GHz
Stop Frequency	2.45700 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	400
Sweptime	56.886 $\mu$ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	13 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

#### 5.1.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.2 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram.

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

### 5.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

### 5.2.3 TEST PROTOCOL

Ambient temperature: 25 °C  
Air Pressure: 1010 hPa  
Humidity: 37 %  
BT LE

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.0
	19	2440	1.0
	39	2480	1.0

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	11.3
	6	2437	11.5
	11	2462	11.5

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.5
	6	2437	17.4
	11	2462	17.4


WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	18.5
	6	2437	18.5
	11	2462	18.6


Remark: Please see next sub-clause for the measurement plot.

#### 5.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = mid  
(S01\_AF02)

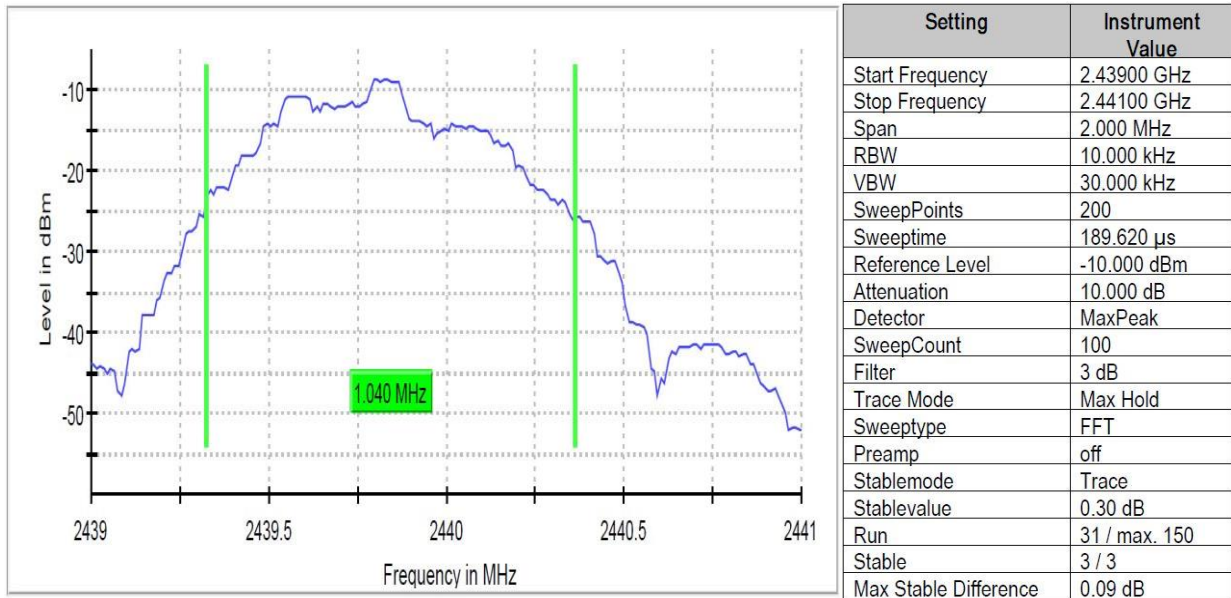

Radio Technology = WLAN n 20 MHz, Operating Frequency = high  
(S01\_AB01)

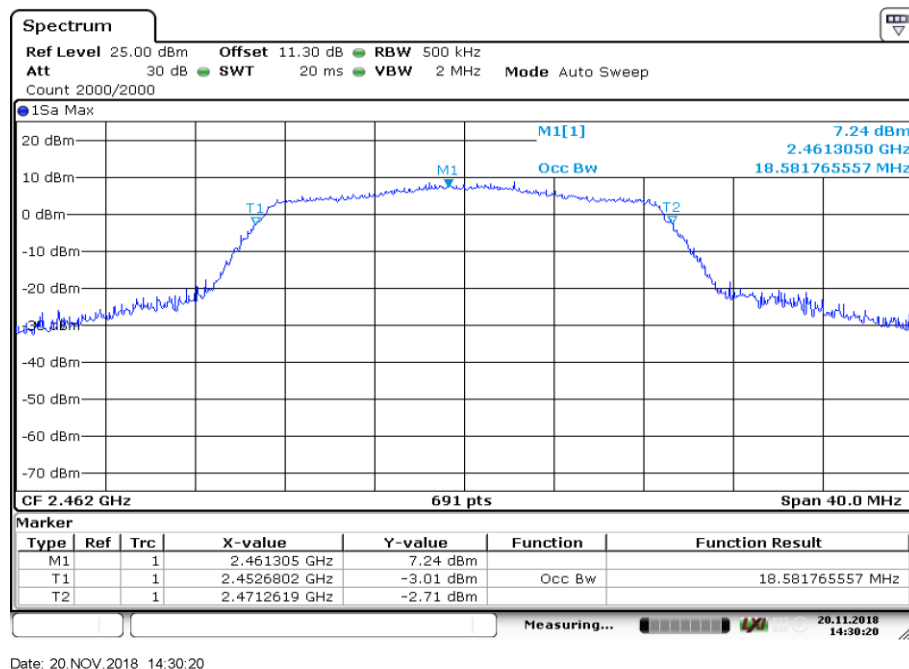

#### 5.2.5 TEST EQUIPMENT USED

- R&S TS8997

### 5.3 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

#### 5.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings BT LE:  
Please see diagram.

For the WLAN measurements a gated RF average-reading power meter was used.

#### 5.3.2 TEST REQUIREMENTS / LIMITS

**DTS devices:**

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

=> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

**Frequency Hopping Systems:**

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor:  $\text{Limit (dBm)} = 10 \log (\text{Limit (W)}/1\text{mW})$

#### 5.3.3 TEST PROTOCOL

Ambient temperature: 25 °C  
Air Pressure: 1010 hPa  
Humidity: 37 %



BT LE

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	-1.7	30.0	31.7	-1.6
	19	2440	-1.9	30.0	31.9	-1.8
	39	2480	-2.0	30.0	32.0	-1.9

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	11.3	30.0	18.7	11.4
	6	2437	11.7	30.0	18.3	11.8
	11	2462	12.0	30.0	18.0	12.1

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	11.6	30.0	18.4	11.7
	6	2437	11.8	30.0	18.2	11.9
	11	2462	12.1	30.0	17.9	12.2


WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	11.9	30.0	18.1	12.0
	6	2437	12.3	30.0	17.7	12.4
	11	2462	12.6	30.0	17.4	12.7

Remark: Please see next sub-clause for the measurement plot.

#### 5.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = low, Measurement method = conducted (S01\_AF02)

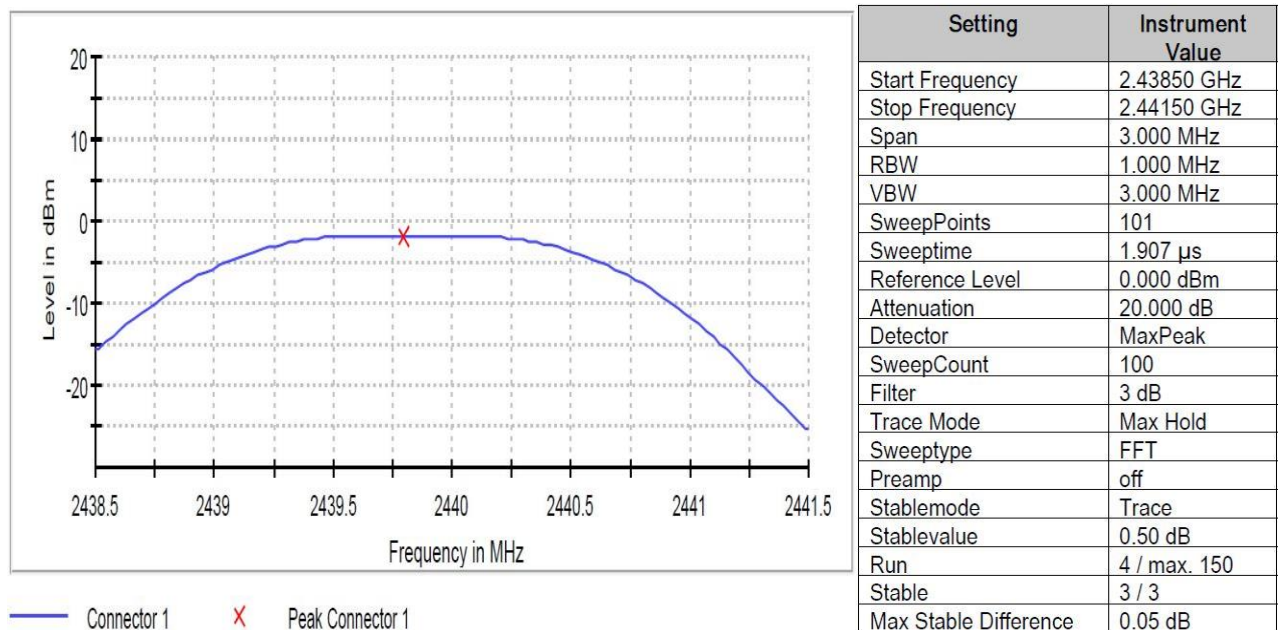

Note: No plots for the WLAN results are given since a power meter was used.



#### 5.3.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: 2
- Sweep Time: 330 s
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted" (low and high frequency) and 6 dB BW test (mid frequency). This value is used to calculate the 20 or 30 dBc limit.

### 5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE GFSK

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	20 dBc Limit [dBm]	Margin to Limit [dB]
0	2402	-	-	PEAK	100	-1.7	-21.7	>20
19	2440	-	-	PEAK	100	-1.9	-21.9	>20
39	2480	-	-	PEAK	100	-2.2	-22.2	>20

WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	30dBc Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	2.9	-27.1	>10
6	2437	-	-	PEAK	100	3.2	-26.8	>10
11	2462	-	-	PEAK	100	3.7	-26.3	>10

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	30dBc Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	-0.1	-30.1	>10
6	2437	-	-	PEAK	100	0.4	-29.6	>10
11	2462	-	-	PEAK	100	0.6	-29.4	>10


WLAN n-Mode; 20 MHz; MCS0

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	30dBc Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	-0.1	-30.1	>10
6	2437	-	-	PEAK	100	0.4	-29.6	>10
11	2462	-	-	PEAK	100	0.5	-29.5	>10

Remark: Please see next sub-clause for the measurement plot.


#### 5.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = high  
(S01\_AF02)

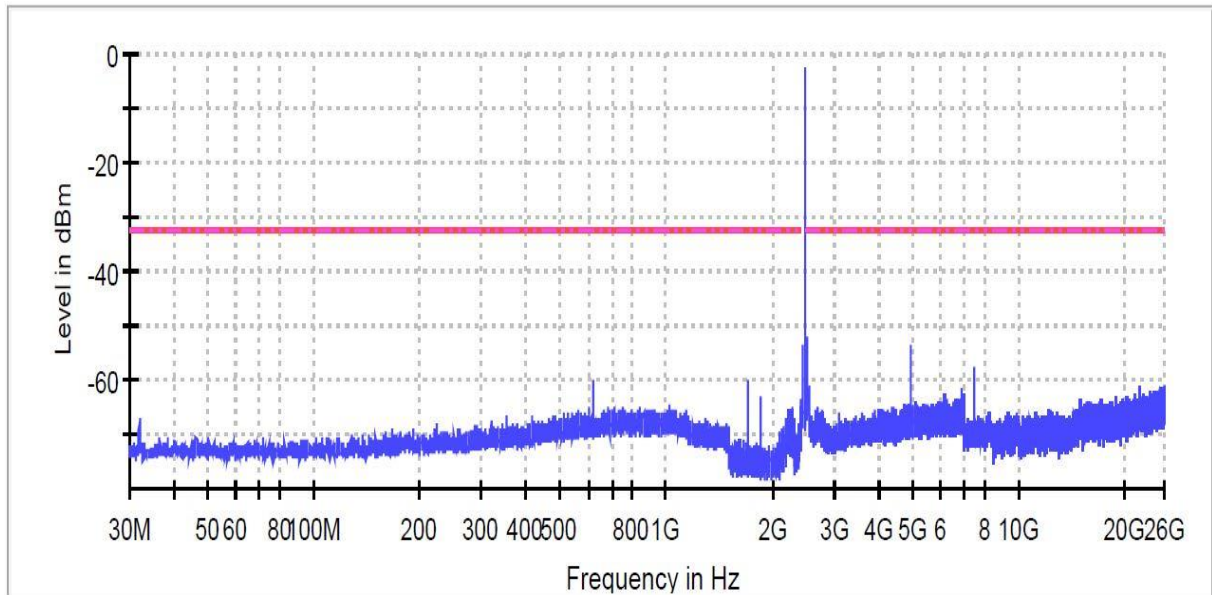

— Limit — Sum Level - - - Threshold X Critical X Final Critical

Radio Technology = WLAN n-Mode, Operating Frequency = mid  
(S01\_AK05)

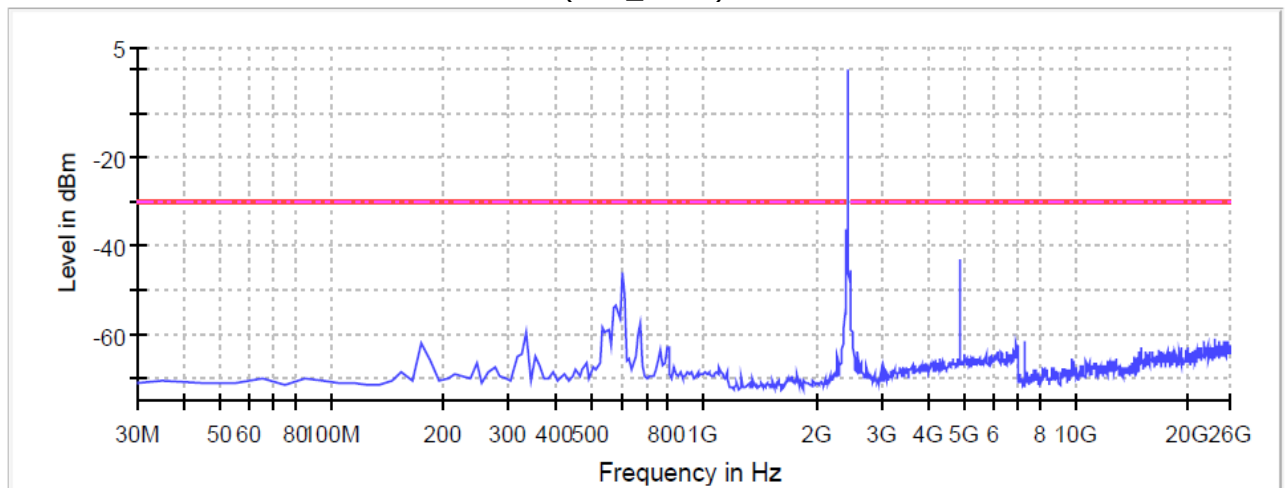

— Limit — Sum Level - - - Threshold X Critical X Final Critical

#### 5.4.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.5 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.5.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### 1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

##### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

#### 2. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2: Adjustment measurement**

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^{\circ}$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

### **Step 3: Final measurement with QP detector**

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

## **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^{\circ}$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^{\circ}$ .

### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^{\circ}$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

### Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

## 5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)	Limits ( $\text{dB}\mu\text{V}/\text{m}$ )
0.009 – 0.49	$2400/F(\text{kHz})@300\text{m}$	3	$(48.5 - 13.8)@300\text{m}$
0.49 – 1.705	$24000/F(\text{kHz})@30\text{m}$	3	$(33.8 - 23.0)@30\text{m}$
1.705 – 30	$30@30\text{m}$	3	$29.5@30\text{m}$

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)	Limits ( $\text{dB}\mu\text{V}/\text{m}$ )
30 – 88	$100@3\text{m}$	3	$40.0@3\text{m}$
88 – 216	$150@3\text{m}$	3	$43.5@3\text{m}$
216 – 960	$200@3\text{m}$	3	$46.0@3\text{m}$
960 – 26000	$500@3\text{m}$	3	$54.0@3\text{m}$
26000 – 40000	$500@3\text{m}$	1	$54.0@3\text{m}$

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit} (\text{dB}\mu\text{V}/\text{m}) = 20 \log (\text{Limit} (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$

### 5.5.3 TEST PROTOCOL

Ambient temperature: 23 - 24 °C  
 Air Pressure: 1006–1018 hPa  
 Humidity: 28–35 %  
 BT low Energy  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
39	2480	125.0	33.6	QP	120	43.5	9.9	RB

WLAN b-Mode; 20 MHz; 1 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2497.0	56.0	PEAK	1000	74.0	18.0	RB
11	2462	2497.3	37.5	AV	1000	54.0	16.5	RB

WLAN g-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB


Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
1	2412	2390.0	63.3	PEAK	1000	74.0	10.7	RB
1	2412	2390.0	47.3	AV	1000	54.0	6.7	RB
1	2412	2497.9	56.6	PEAK	1000	74.0	17.4	RB
1	2412	2498.0	36.3	AV	1000	54.0	17.7	RB

Remark: Please see next sub-clause for the measurement plot.



#### 5.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = Bluetooth LE, Operating Frequency = high, Measurement range = 30 MHz  
- 1 GHz  
(S01\_AF02)

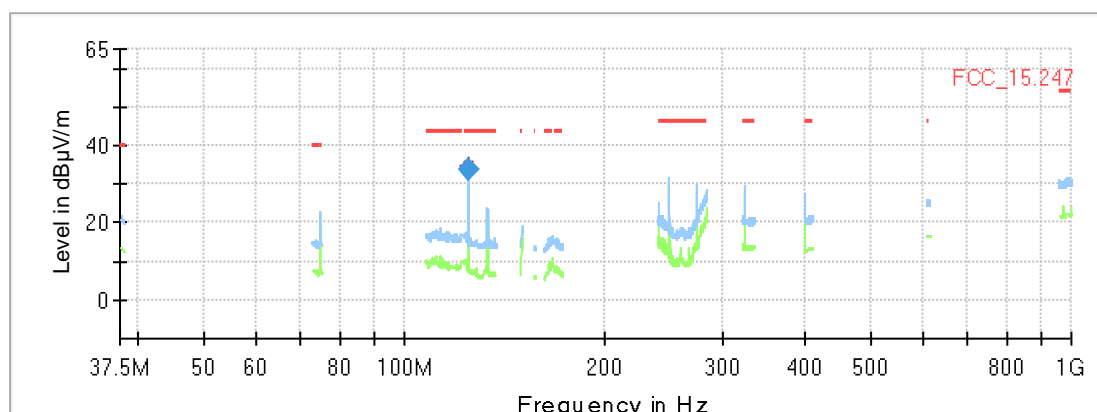

#### Final\_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
125.010000	33.57	43.50	9.93	1000.0	120.000	105.0	V	77.0	11.0		---

Radio Technology = Bluetooth LE, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz  
(S01\_AH02)

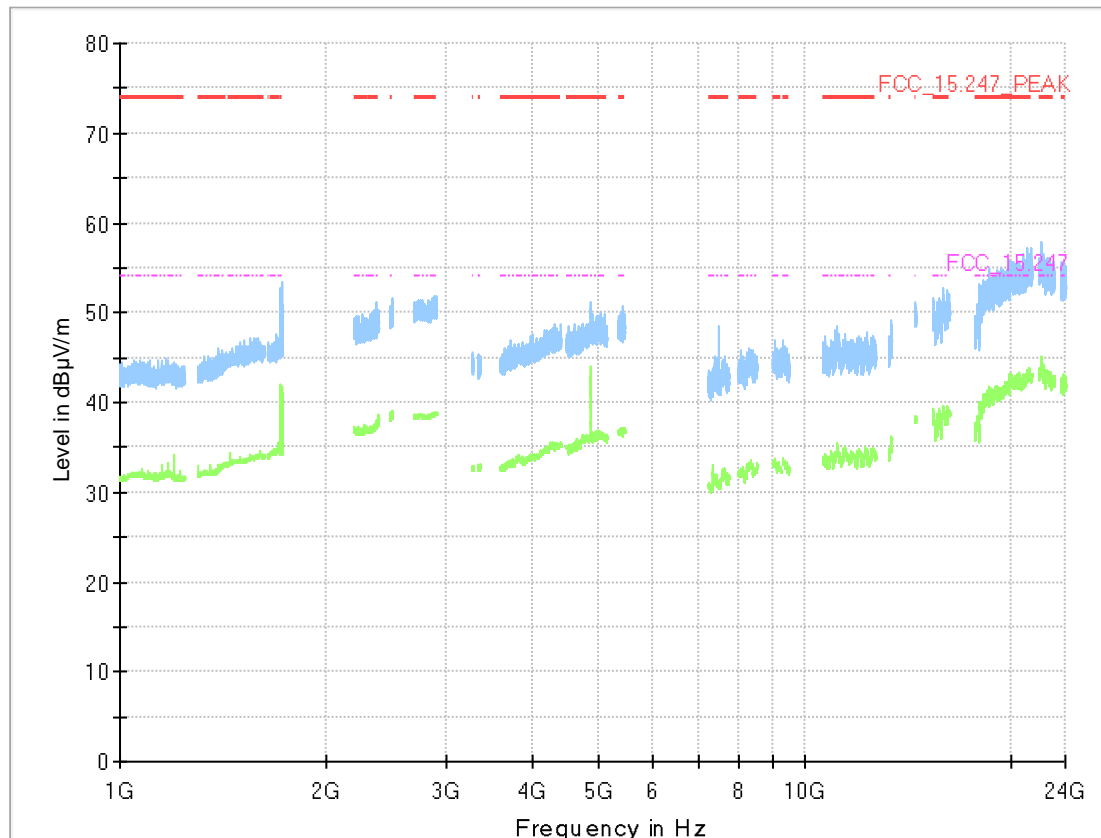


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
---	---	---	---	---	---	---	---	---	---	---

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
---	---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz  
(S01\_AE02)

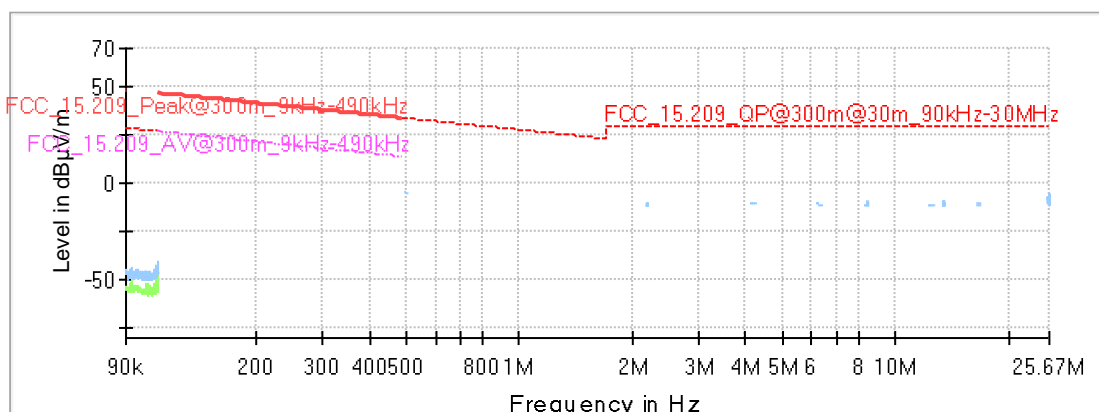

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 30 MHz - 1 GHz  
(S01\_AE02)

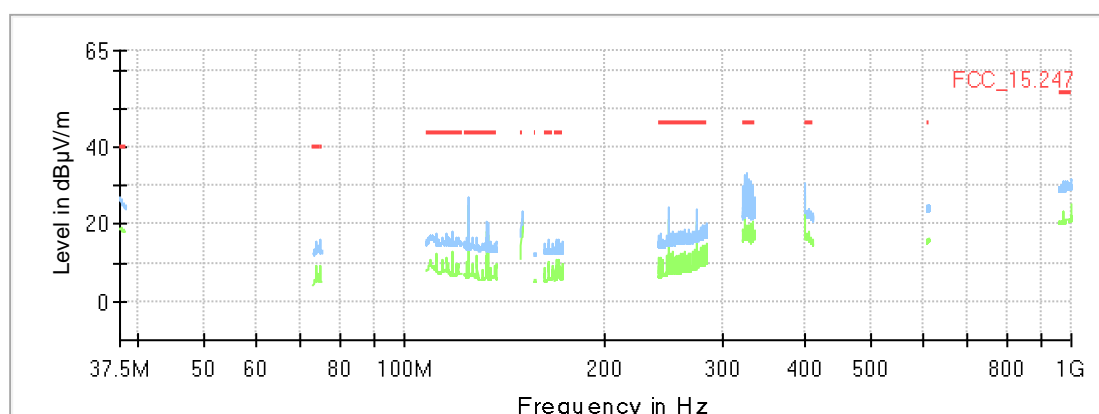

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---

Radio Technology = WLAN g, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz  
(S01\_AE02)

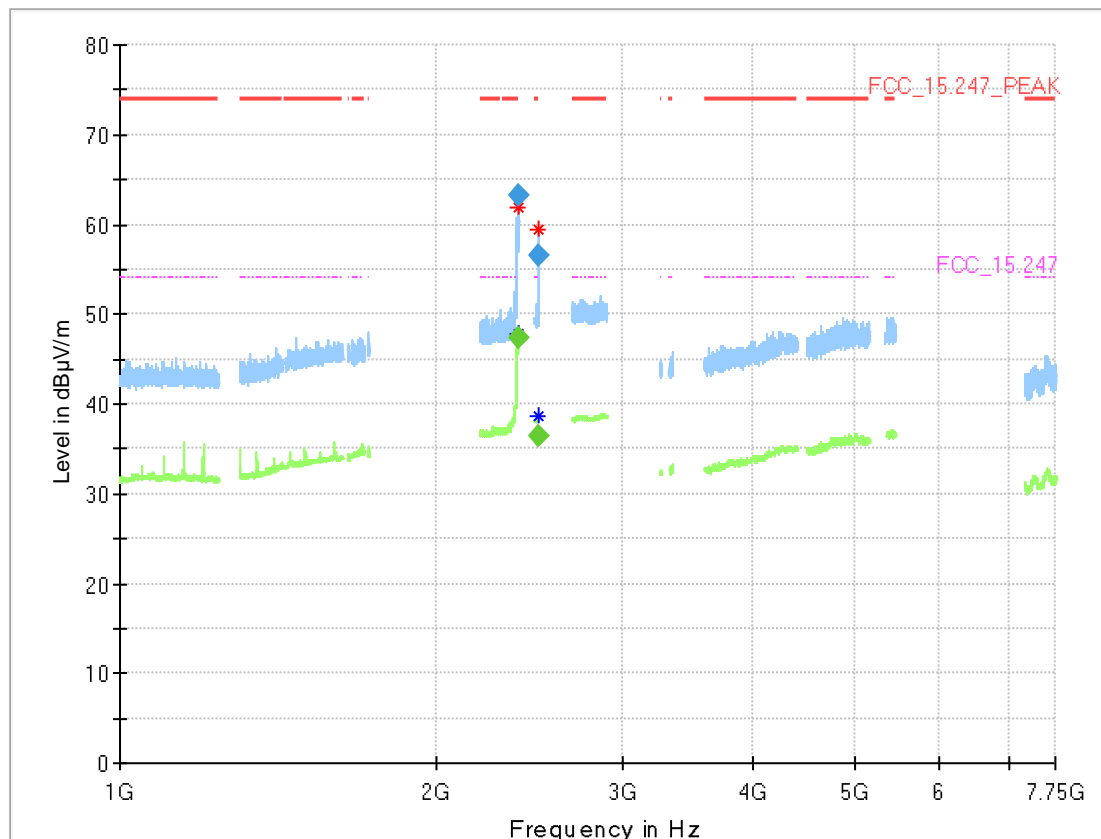

### Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2390.000	61.8	---	74.00	12.19	---	---	150.0	V	-95.0	78.0
2390.000	---	47.7	54.00	6.27	---	---	150.0	V	-117.0	78.0
2497.938	59.4	---	74.00	14.57	---	---	150.0	V	-32.0	105.0
2498.020	---	38.7	54.00	15.25	---	---	150.0	V	-36.0	100.0

### Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2390.000	---	47.3	54.00	6.68	1000.0	1000.000	150.0	V	-117.0	78.0
2390.000	63.3	---	74.00	10.73	1000.0	1000.000	150.0	V	-95.0	78.0
2497.938	56.6	---	74.00	17.44	1000.0	1000.000	150.0	V	-32.0	105.0
2498.020	---	36.3	54.00	17.67	1000.0	1000.000	150.0	V	-36.0	100.0

### 5.5.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5.6 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions". The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram.

### 5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

### 5.6.3 TEST PROTOCOL

Ambient temperature: 25 °C  
Air Pressure: 1010 hPa  
Humidity: 37 %  
BT LE GFSK

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	20 dBc Limit [dBm]	Margin to Limit [dB]
0	2402	2400.0	-41.0	PEAK	100	2.9	-27.1	13.9
39	2480	2483.5	-46.5	PEAK	100	3.7	-26.3	20.2

WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	30 dBc Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-41.2	PEAK	100	2.5	-27.5	13.7
11	2462	2483.5	-46.6	PEAK	100	2.7	-27.3	19.3

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	30 dBc Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-35.1	PEAK	100	-0.1	-30.1	5.0
11	2462	2483.5	-43.8	PEAK	100	0.6	-29.4	14.4


WLAN n-Mode; 20 MHz; MCS0

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	30 dBc Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-34.8	PEAK	100	-0.1	-30.1	4.7
11	2462	2483.5	-42.9	PEAK	100	0.5	-29.5	13.4

Remark: Please see next sub-clause for the measurement plot.

#### 5.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = low, Band Edge = low (S01\_AF02)

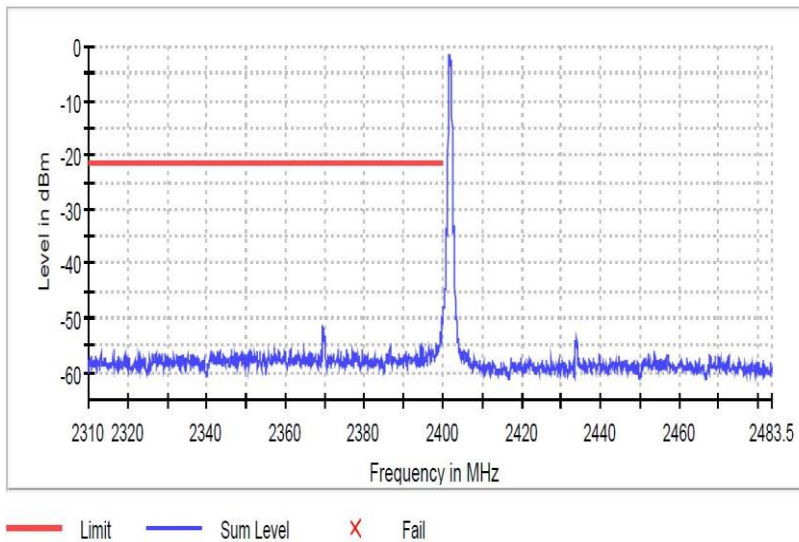


##### Inband Peak

Frequency (MHz)	Level (dBm)
2401.825000	-1.7

##### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-49.2	27.5	-21.7	PASS
2399.925000	-49.9	28.3	-21.7	PASS
2399.775000	-50.1	28.4	-21.7	PASS
2399.825000	-50.2	28.6	-21.7	PASS
2399.725000	-51.0	29.3	-21.7	PASS
2399.875000	-51.4	29.7	-21.7	PASS
2399.675000	-51.4	29.8	-21.7	PASS
2369.525000	-51.8	30.1	-21.7	PASS
2369.775000	-52.0	30.3	-21.7	PASS
2369.575000	-52.1	30.4	-21.7	PASS
2369.725000	-52.1	30.5	-21.7	PASS
2399.325000	-52.4	30.7	-21.7	PASS
2399.275000	-52.7	31.0	-21.7	PASS
2369.825000	-52.7	31.0	-21.7	PASS
2369.625000	-52.8	31.2	-21.7	PASS

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low (S01\_AB01)

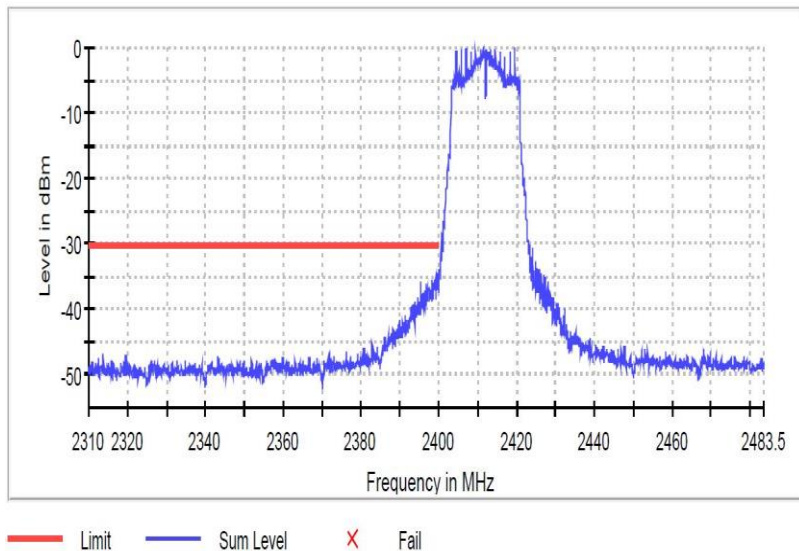


##### Inband Peak

Frequency (MHz)	Level (dBm)
2419.525000	-0.1

##### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-34.8	4.7	-30.1	PASS
2399.825000	-34.9	4.8	-30.1	PASS
2399.175000	-35.1	5.0	-30.1	PASS
2399.125000	-35.2	5.1	-30.1	PASS
2398.875000	-35.2	5.1	-30.1	PASS
2398.225000	-35.2	5.1	-30.1	PASS
2399.225000	-35.4	5.3	-30.1	PASS
2399.525000	-35.4	5.3	-30.1	PASS
2398.275000	-35.6	5.4	-30.1	PASS
2399.875000	-35.6	5.5	-30.1	PASS
2395.375000	-35.7	5.6	-30.1	PASS
2398.975000	-35.7	5.6	-30.1	PASS
2398.925000	-35.7	5.6	-30.1	PASS
2398.175000	-35.7	5.6	-30.1	PASS
2399.275000	-35.8	5.6	-30.1	PASS

Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high  
(S01\_AB01)

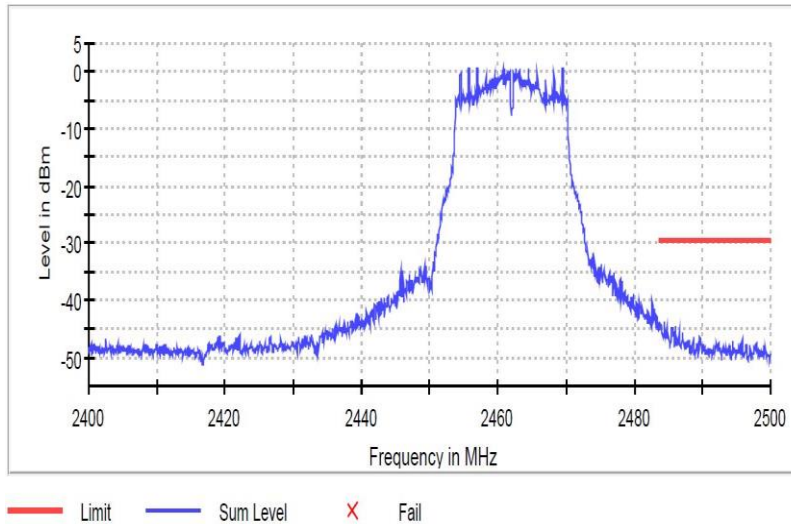

#### Inband Peak

Frequency (MHz)	Level (dBm)
2455.725000	0.6

#### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2484.425000	-43.8	14.4	-29.4	PASS
2483.875000	-44.1	14.7	-29.4	PASS
2484.475000	-44.4	15.0	-29.4	PASS
2486.025000	-44.4	15.0	-29.4	PASS
2483.925000	-44.6	15.2	-29.4	PASS
2483.625000	-44.7	15.3	-29.4	PASS
2484.725000	-44.7	15.3	-29.4	PASS
2483.725000	-44.7	15.3	-29.4	PASS
2484.025000	-44.7	15.3	-29.4	PASS
2483.775000	-44.7	15.3	-29.4	PASS
2483.575000	-44.8	15.4	-29.4	PASS
2484.375000	-44.8	15.4	-29.4	PASS
2485.975000	-44.9	15.5	-29.4	PASS
2485.525000	-45.0	15.6	-29.4	PASS
2485.475000	-45.0	15.6	-29.4	PASS

### 5.6.5 TEST EQUIPMENT USED

- R&S TS8997



## 5.7 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.7.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

### 5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

### 5.7.3 TEST PROTOCOL

Ambient temperature: 22–23 °C  
 Air Pressure: 989 - 1001 hPa  
 Humidity: 29–30 %  
 BT LE GFSK  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
39	2480	2483.5	54.3	PEAK	1000	74.0	19.7	BE
39	2480	2483.5	36.5	AV	1000	54.0	17.5	BE

WLAN b-Mode; 20 MHz; 1 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	55.0	PEAK	1000	74.0	19.0	BE
11	2462	2483.5	41.6	AV	1000	54.0	12.4	BE

WLAN g-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	63.6	PEAK	1000	74.0	10.4	BE
11	2462	2483.5	43.7	AV	1000	54.0	10.3	BE


WLAN n-Mode; 20 MHz; MCS0  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	64.3	PEAK	1000	74.0	9.7	BE
11	2462	2483.5	45.5	AV	1000	54.0	8.5	BE

Remark: Please see next sub-clause for the measurement plot.

#### 5.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = high, Band Edge = high (S01\_AH02)

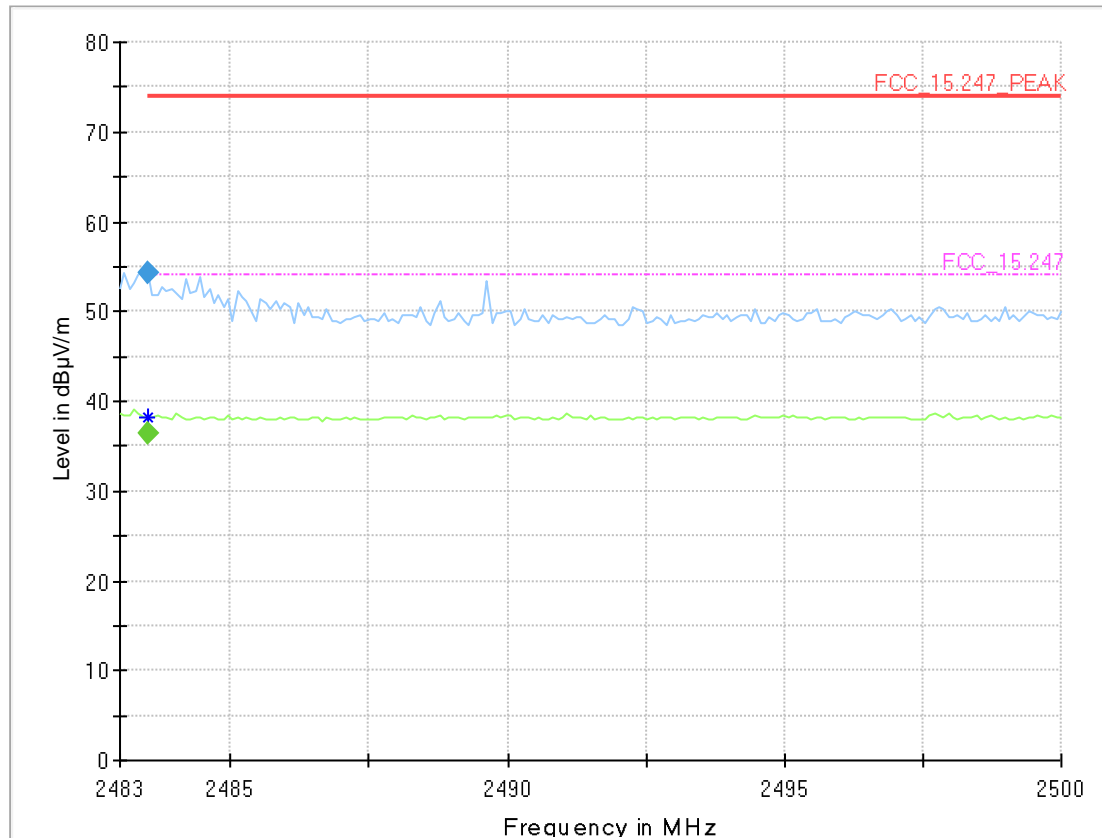


#### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2483.510	54.4	---	74.00	19.59	---	---	150.0	V	-5.0	105.0
2483.510	---	38.2	54.00	15.81	---	---	150.0	V	-180.0	80.0

#### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2483.510	---	36.5	54.00	17.50	1000.0	1000.000	150.0	V	-180.0	80.0
2483.510	54.3	---	74.00	19.72	1000.0	1000.000	150.0	V	-5.0	105.0

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high  
(S01\_AE02)

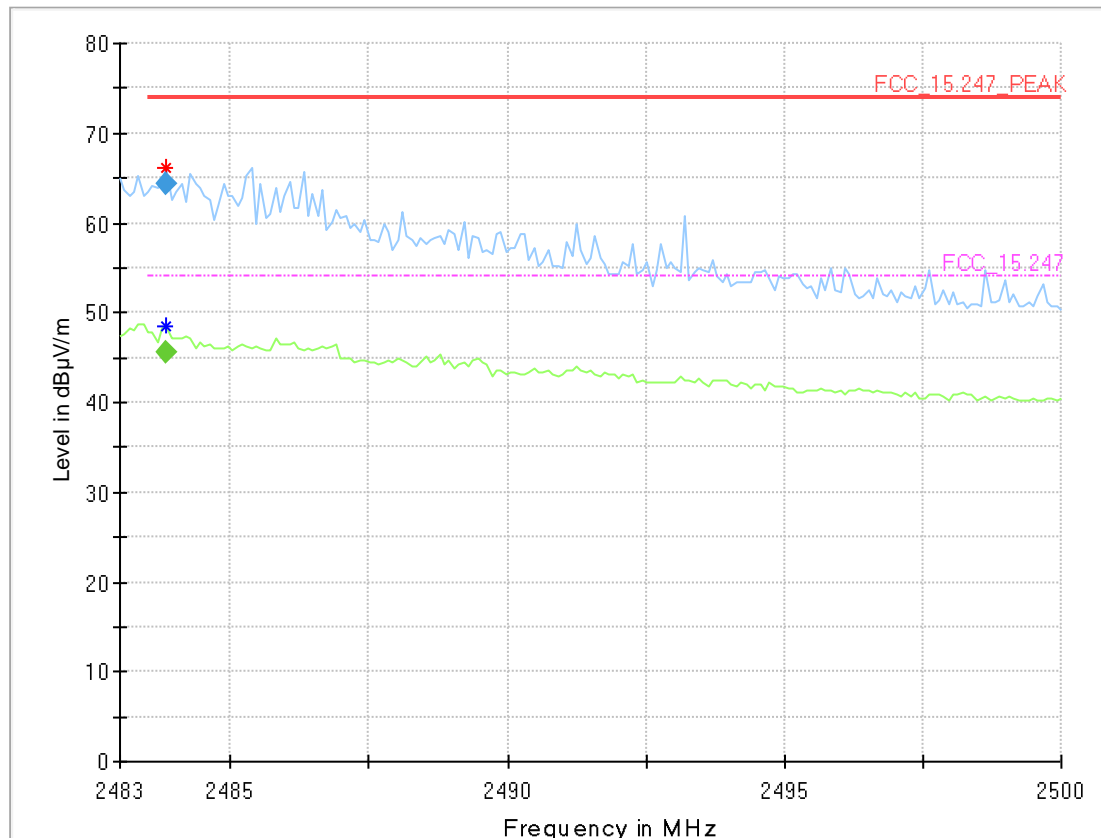

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2483.850	66.2	---	74.00	7.75	---	---	150.0	H	19.0	88.0
2483.850	---	48.4	54.00	5.58	---	---	150.0	H	121.0	-15.0

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2483.850	---	45.5	54.00	8.52	1000.0	1000.000	150.0	H	121.0	-15.0
2483.850	64.3	---	74.00	9.69	1000.0	1000.000	150.0	H	19.0	88.0

### 5.7.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5.8 POWER DENSITY

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram.

### 5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques.

...

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

### 5.8.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE

Band	Channel No.	Frequency [MHz]	Power Density [dBm/10kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz	0	2402	-8.2	8.0	16.2
ISM	19	2440	-8.5	8.0	16.5
	39	2480	-7.2	8.0	15.2

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/100kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz	1	2412	-6.2	8.0	14.2
ISM	6	2437	-5.5	8.0	13.5
	11	2462	-5.3	8.0	13.3

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/100kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz	1	2412	-6.4	8.0	14.4
ISM	6	2437	-6.2	8.0	14.2
	11	2462	-5.8	8.0	13.8


WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Power Density [dBm/100kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz	1	2412	-6.4	8.0	14.4
ISM	6	2437	-6.1	8.0	14.1
	11	2462	-5.7	8.0	13.7

Remark: Please see next sub-clause for the measurement plot.

#### 5.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = Bluetooth LE, Operating Frequency = high  
(S01\_AF02)

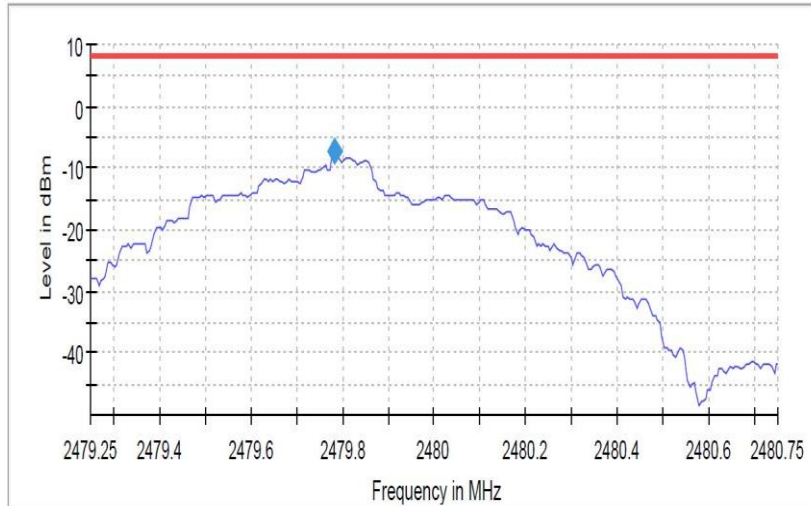

— Limit — Sum Level ◆ PSD

Setting	Instrument Value
Start Frequency	2.47925 GHz
Stop Frequency	2.48075 GHz
Span	1.500 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	300
SweepTime	1.500 ms
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	15 / max. 150
Stable	2 / 2
Max Stable Difference	0.45 dB

Radio Technology = WLAN b, Operating Frequency = high  
(S01\_AB01)

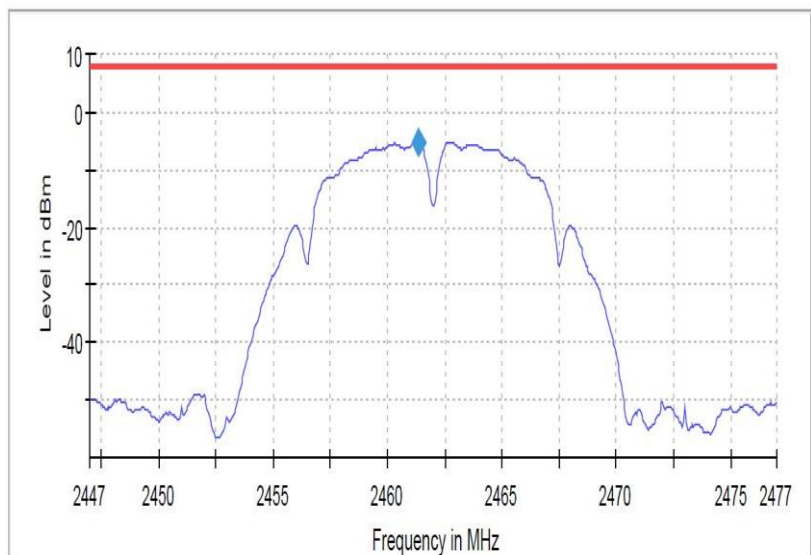

— Limit — Sum Level ◆ PSD

Setting	Instrument Value
Start Frequency	2.44700 GHz
Stop Frequency	2.47700 GHz
Span	30.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	600
SweepTime	3.000 s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	RMS
SweepCount	1
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	6 / max. 150
Stable	3 / 3
Max Stable Difference	0.35 dB

#### 5.8.5 TEST EQUIPMENT USED

- R&S TS8997

## 6 TEST EQUIPMENT

1 R&S TS8997  
EN300328/301893 Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
1.2	MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2018-07	2019-07
1.3	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
1.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2018-04	2020-04
1.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
1.6	VHF-3100+	High Pass Filter		-		
1.7	VT 4002	Temperature Chamber	Vötsch	58566002150010	2018-04	2020-04
1.8	A8455-4	4 Way Power Divider (SMA)		-		
1.9	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufth Mess- und Regeltechnik GmbH	7482	2017-03	2019-03
1.10	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2016-10	2019-10
1.11	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz	101158	2018-05	2021-05

2 Radiated Emissions  
Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	NRV-Z1	Sensor Head A	Rohde & Schwarz GmbH & Co. KG	827753/005	2018-07	2019-07
2.2	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2018-10	2020-10
2.3	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufth Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
2.4	ESW44	EMI Test Receiver	Rohde & Schwarz GmbH & Co. KG	101603	2018-05	2019-05
2.5	Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	Frankonia	none	2018-06	2020-06
2.6	FS-Z60	Harmonic Mixer 40 - 60 GHz	Rohde & Schwarz Messgerätebau GmbH	100178	2016-12	2019-12



Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.7	FS-Z220	Harmonic Mixer 140 - 220 GHz	Rohde & Schwarz Messgerätebau GmbH	101005	2017-03	2020-03
2.8	SGH-05	Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz)	RPG-Radiometer Physics GmbH	075		
2.9	HL 562	Ultralog new biconicals	Rohde & Schwarz	830547/003	2018-07	2021-07
2.10	5HC2700/12750-1.5-KK	High Pass Filter	Trilithic	9942012		
2.11	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
2.12	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2018-06	2020-06
2.13	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
2.14	NRVD	Power Meter	Rohde & Schwarz GmbH & Co. KG	828110/016	2018-07	2019-07
2.15	HF 906	Double-ridged horn	Rohde & Schwarz	357357/002	2018-09	2021-09
2.16	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
2.17	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2019-02	2021-02
2.18	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
2.19	SGH-19	Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)	RPG-Radiometer Physics GmbH	093		
2.20	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
2.21	4HC1600/12750-1.5-KK	High Pass Filter	Trilithic	9942011		
2.22	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
2.23	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
2.24	TT 1.5 WI	Turn Table	Maturo GmbH	-		
2.25	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz	100609	2016-04	2019-04
2.26	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03
2.27	FS-Z325	Harmonic Mixer 220 - 325 GHz	Rohde & Schwarz Messgerätebau GmbH	101006	2017-03	2020-03

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.28	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
2.29	SGH-08	Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)	RPG-Radiometer Physics GmbH	064		
2.30	SGH-12	Standard Gain / Pyramidal HornAntenna (60 - 90 GHz)	RPG-Radiometer Physics GmbH	326		
2.31	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008		
2.32	FS-Z140	Harmonic Mixer 90 -140 GHz	Rohde & Schwarz Messgerätebau GmbH	101007	2017-02	2020-02
2.33	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
2.34	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2017-03	2019-03
2.35	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2019-01	2020-01
2.36	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
2.37	AS 620 P	Antenna mast	HD GmbH	620/37		
2.38	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709		
2.39	SGH-03	Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz)	RPG-Radiometer Physics GmbH	060		
2.40	FS-Z90	Harmonic Mixer 60 - 90 GHz	Rohde & Schwarz Messgerätebau GmbH	101686	2017-03	2020-03
2.41	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01
2.42	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
2.43	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
2.44	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/11920513		
2.45	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2018-07	2021-07

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3- Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

#### Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

## 7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF	Corr.	cable loss 1	cable loss 2	cable loss 3	cable loss 4	distance corr.	d <sub>Limit</sub>	d <sub>used</sub>
MHz	dB (1/m)	dB	(inside chamber)	(outside chamber)	(switch unit)	(to receiver)	(-40 dB/decade)	(meas. distance (limit))	(meas. distance (used))
			dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

### 7.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

( $d_{\text{Limit}} = 3 \text{ m}$ )

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	$d_{\text{Limit}}$ (meas. distance (limit))	$d_{\text{used}}$ (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

( $d_{\text{Limit}} = 10 \text{ m}$ )

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

#### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$   
 $U$  = Receiver reading  
 $\text{AF}$  = Antenna factor  
 $\text{Corr.}$  = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)  
distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$   
Linear interpolation will be used for frequencies in between the values in the table.  
Tables show an extract of values.

## 7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

## 7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d <sub>Limit</sub> (meas. distance (limit) m	d <sub>used</sub> (meas. distance (used) m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.


distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.


Table shows an extract of values.



## 8 SETUP DRAWINGS

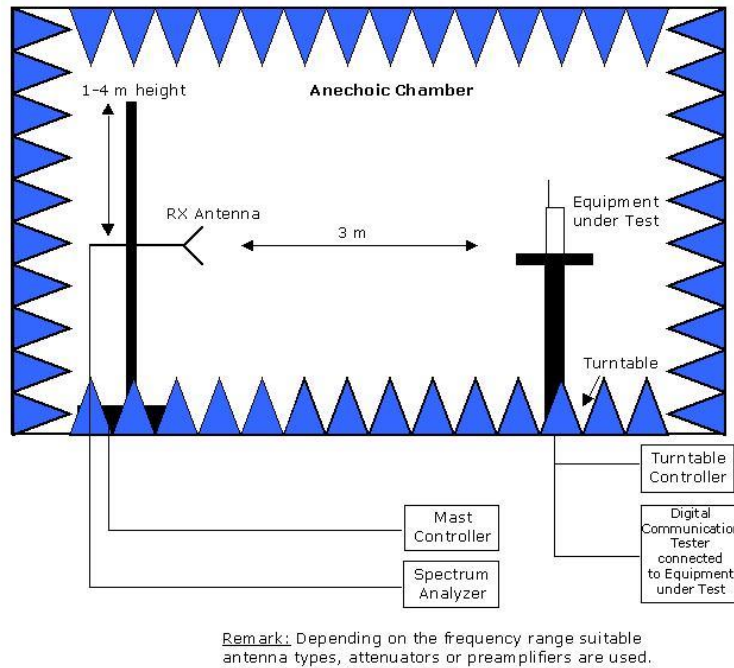

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.

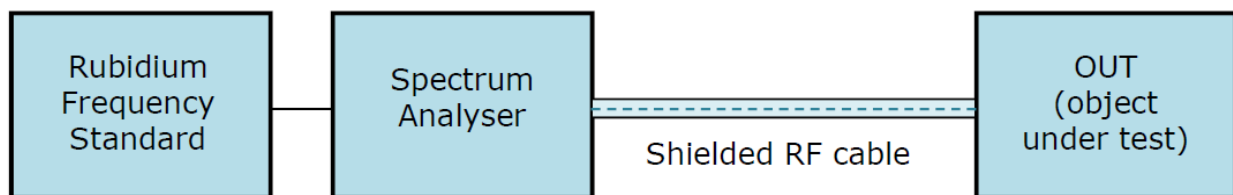

**Drawing 2:** Setup for conducted radio tests.

## 9 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	$\pm 3.4$ dB
Field Strength of spurious radiation	Power	$\pm 5.5$ dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	$\pm 2.9$ dB $\pm 11.2$ kHz
Conducted Output Power	Power	$\pm 2.2$ dB
Band Edge Compliance	Power Frequency	$\pm 2.2$ dB $\pm 11.2$ kHz
Frequency Stability	Frequency	$\pm 25$ Hz
Power Spectral Density	Power	$\pm 2.2$ dB

## 10 PHOTO REPORT

Please see separate photo report.