


Appendix B


Peak Output Power

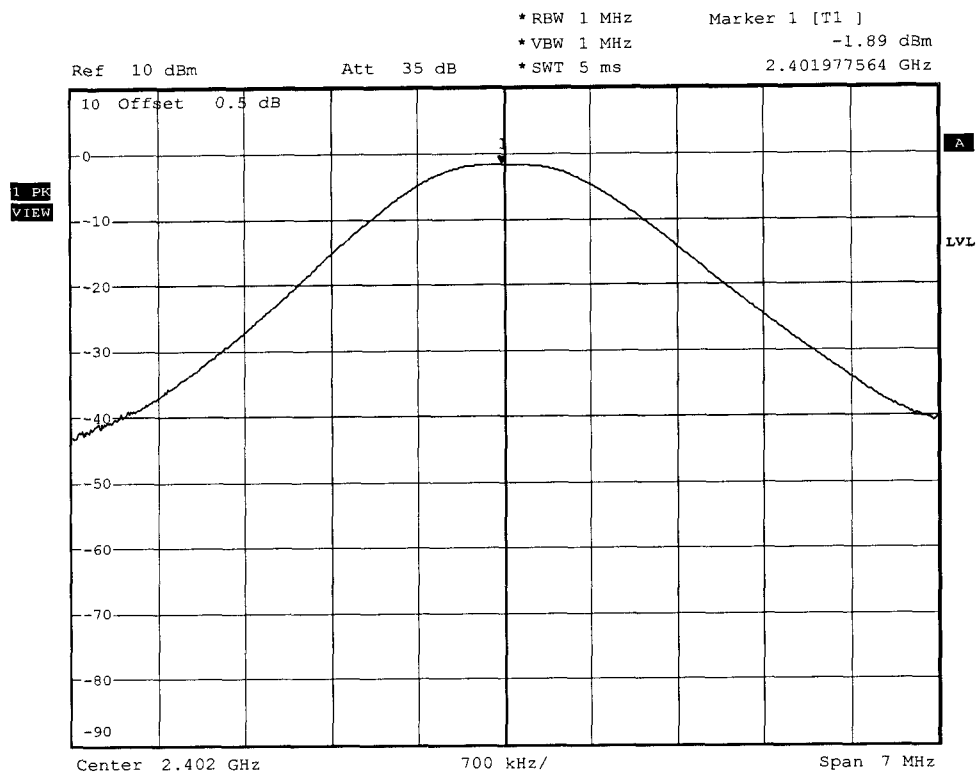


Peak Output Power conducted Ch.: 0 Unom=12 V DC

CK III SLR USA HFP


Date: 4.NOV.2005 08:54:04

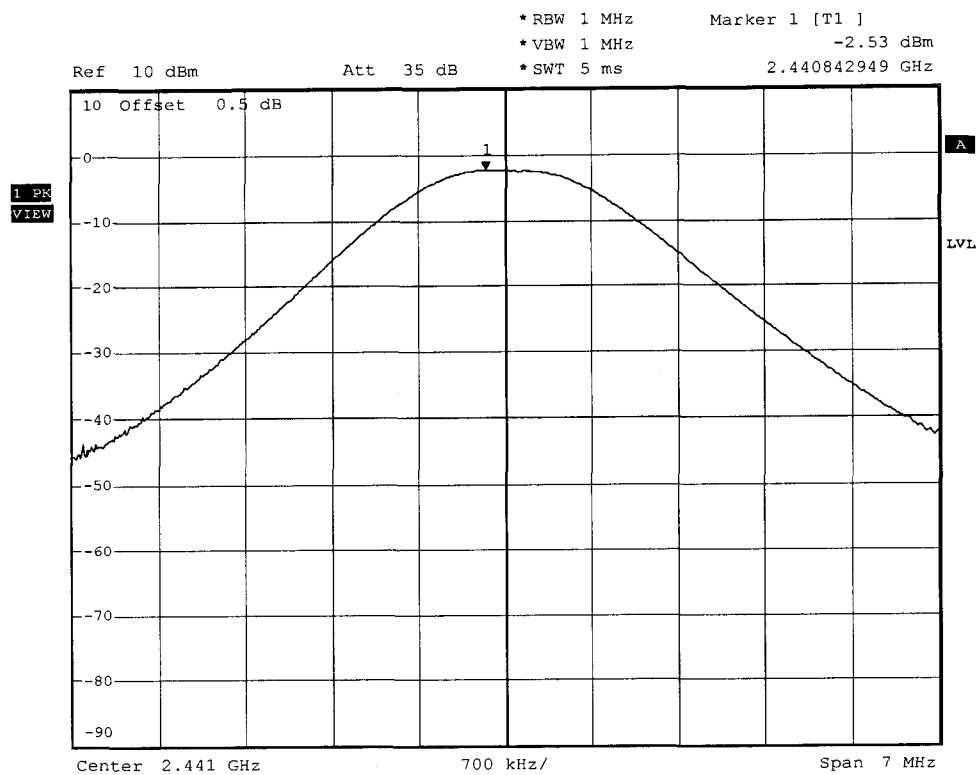


Peak Output Power conducted Ch.: 39 Unom=12 V DC
CK III SLR USA HFP
Date: 4.NOV.2005 08:56:28

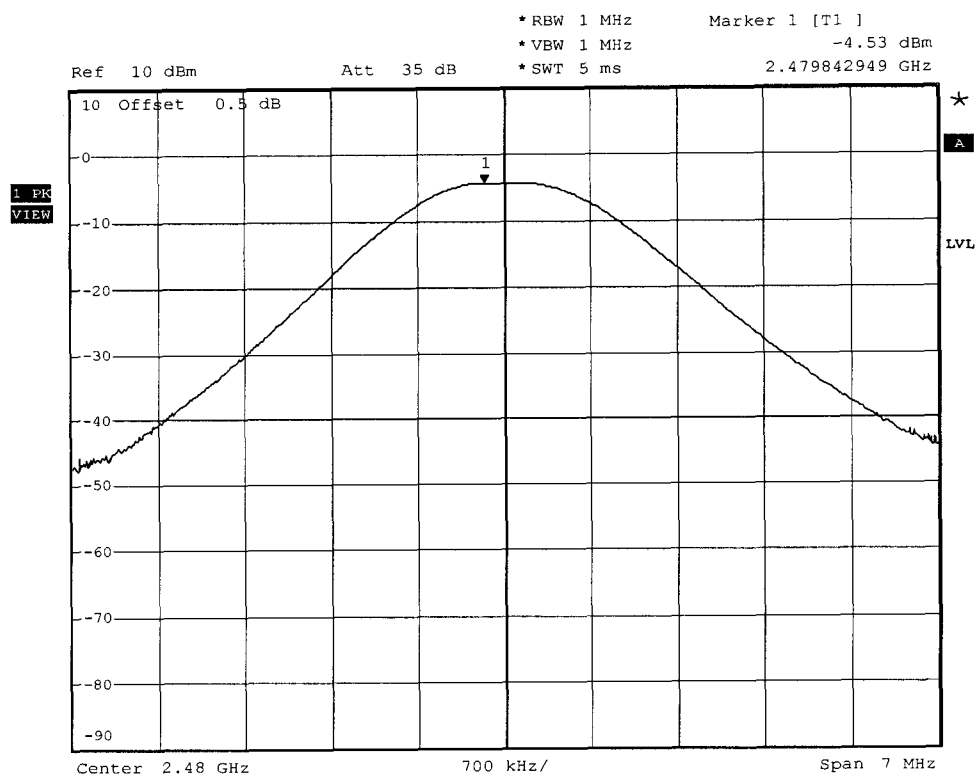

Peak Output Power conducted Ch.: 78 Unom=12 V DC
CK III SLR USA HFP
Date: 4.NOV.2005 08:57:35

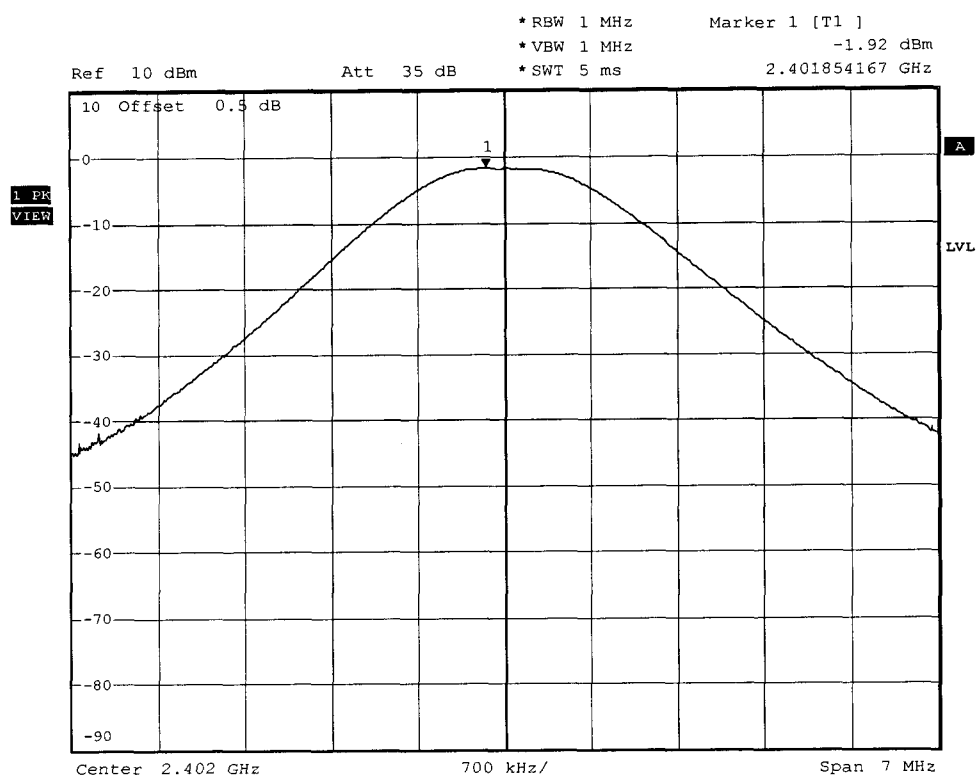


Peak Output Power conducted Ch.: 0 Umin=10 V DC
CK III SLR USA HFP
Date: 4.NOV.2005 09:06:56

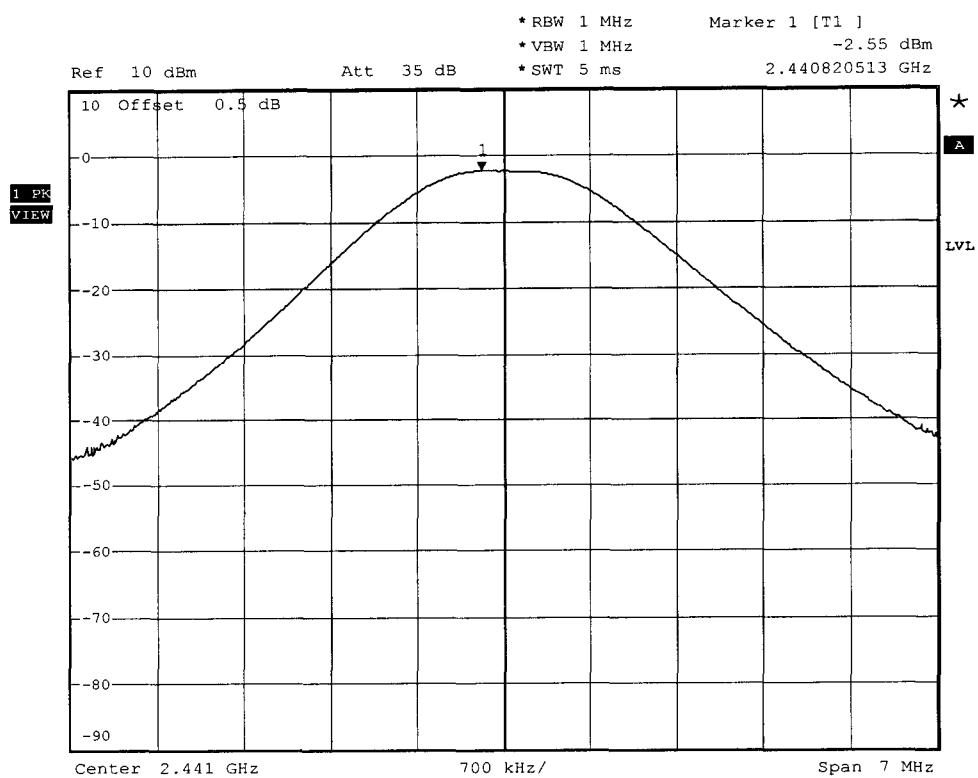


Peak Output Power conducted Ch.: 39 Umin=10 V DC

CK III SLR USA HFP

Date: 4.NOV.2005 09:04:18

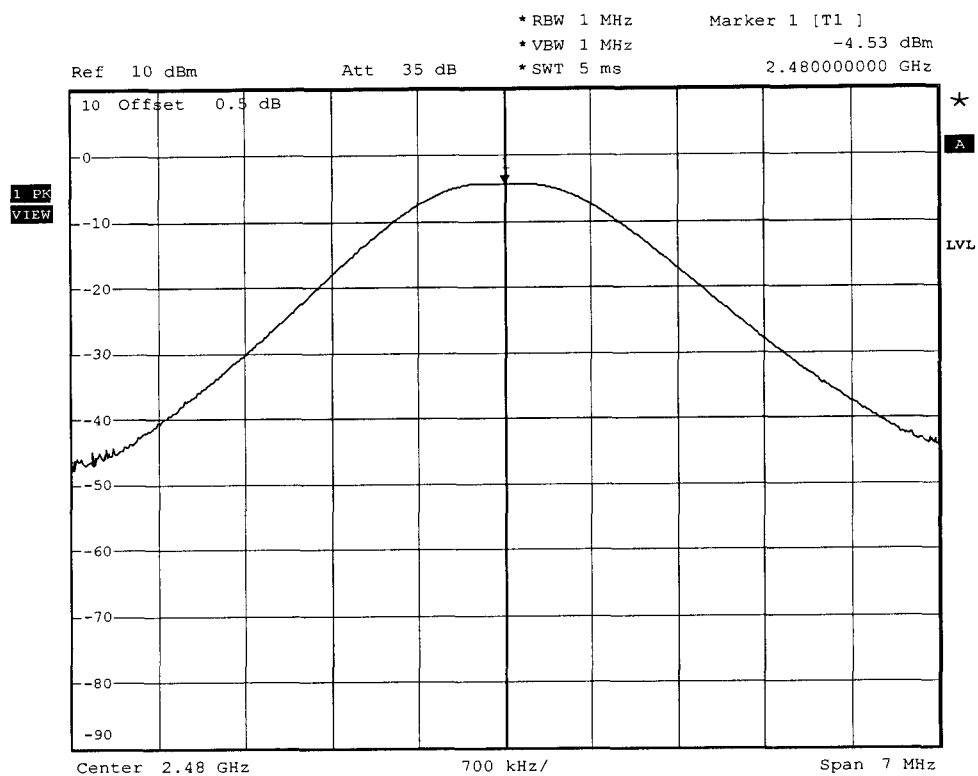


Peak Output Power conducted Ch.: 78 Umin=10 V DC
CK III SLR USA HFP
Date: 4.NOV.2005 09:03:24

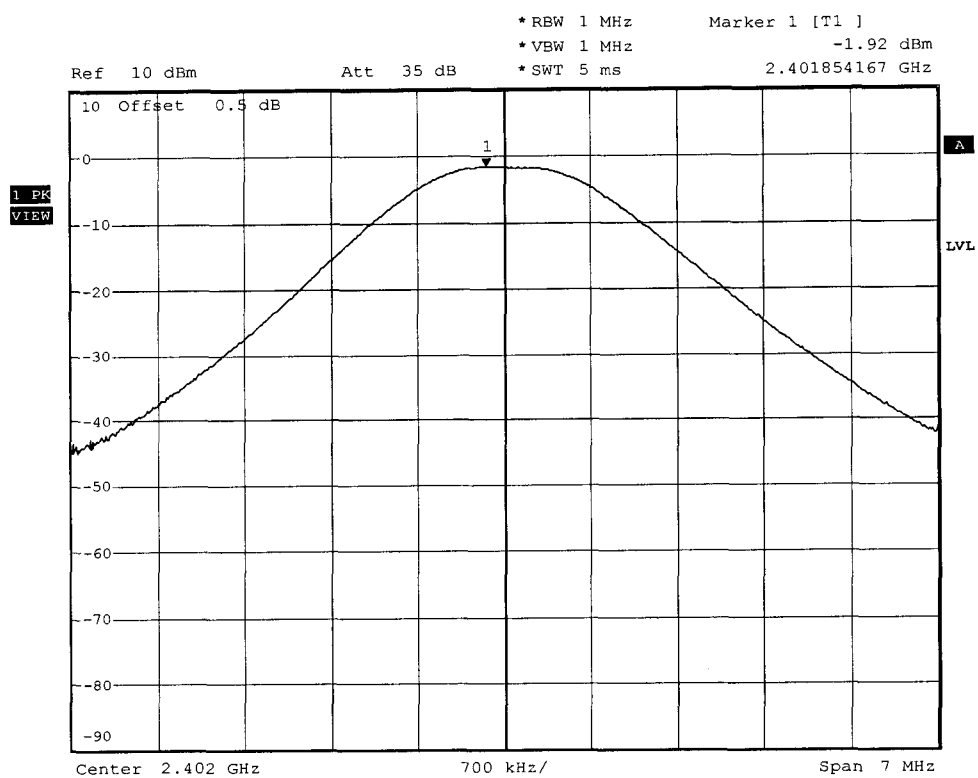


Peak Output Power conducted Ch.: 0 Umax=16 V DC

CK III SLR USA HFP

Date: 4.NOV.2005 09:14:50

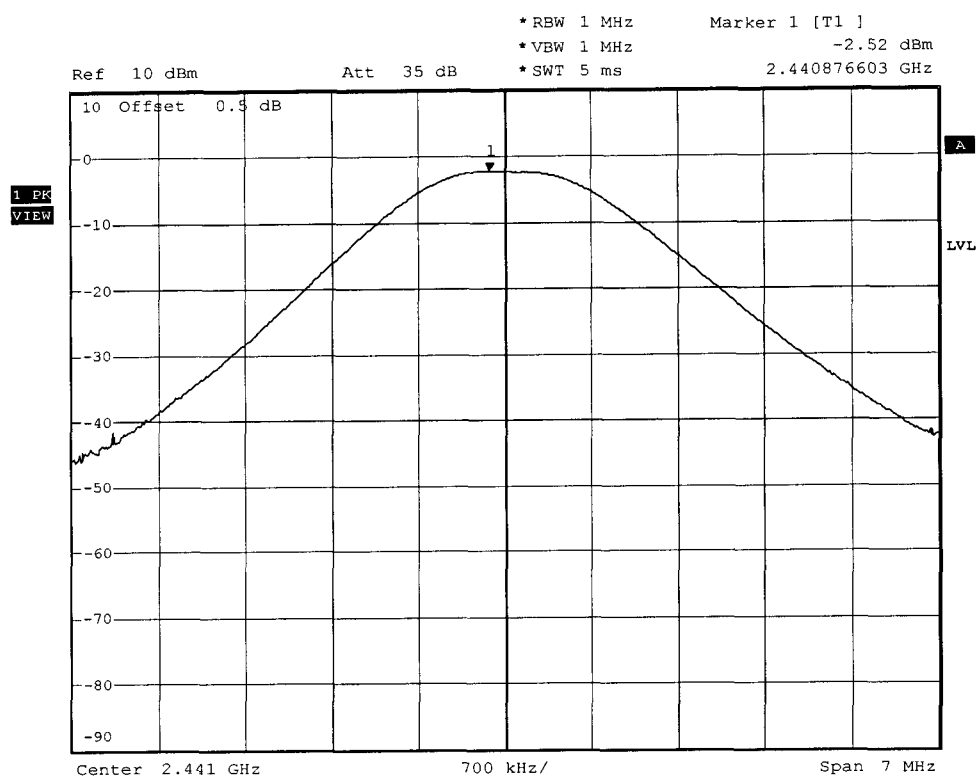

Peak Output Power conducted Ch.: 39 Umax=16 V DC
CK III SLR USA HFP
Date: 4.NOV.2005 09:15:38

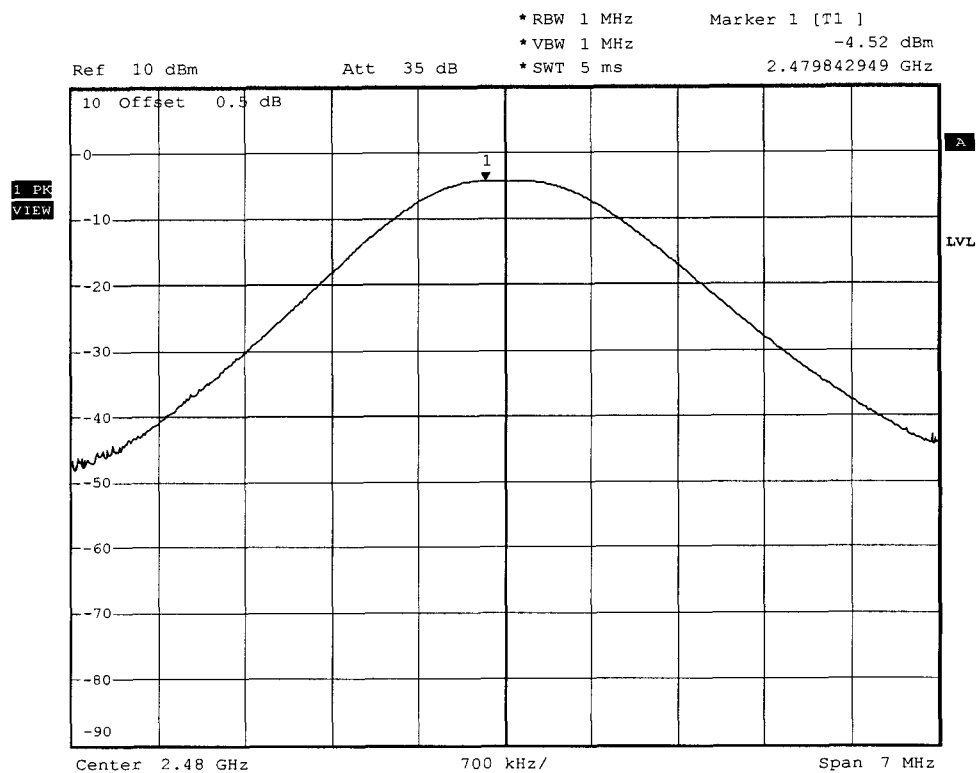

Peak Output Power conducted Ch.: 78 Umax=16 V DC

CK III SLR USA HFP

Date: 4.NOV.2005 09:16:24


Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 89.51dBµV/m, RBW: 100kHz

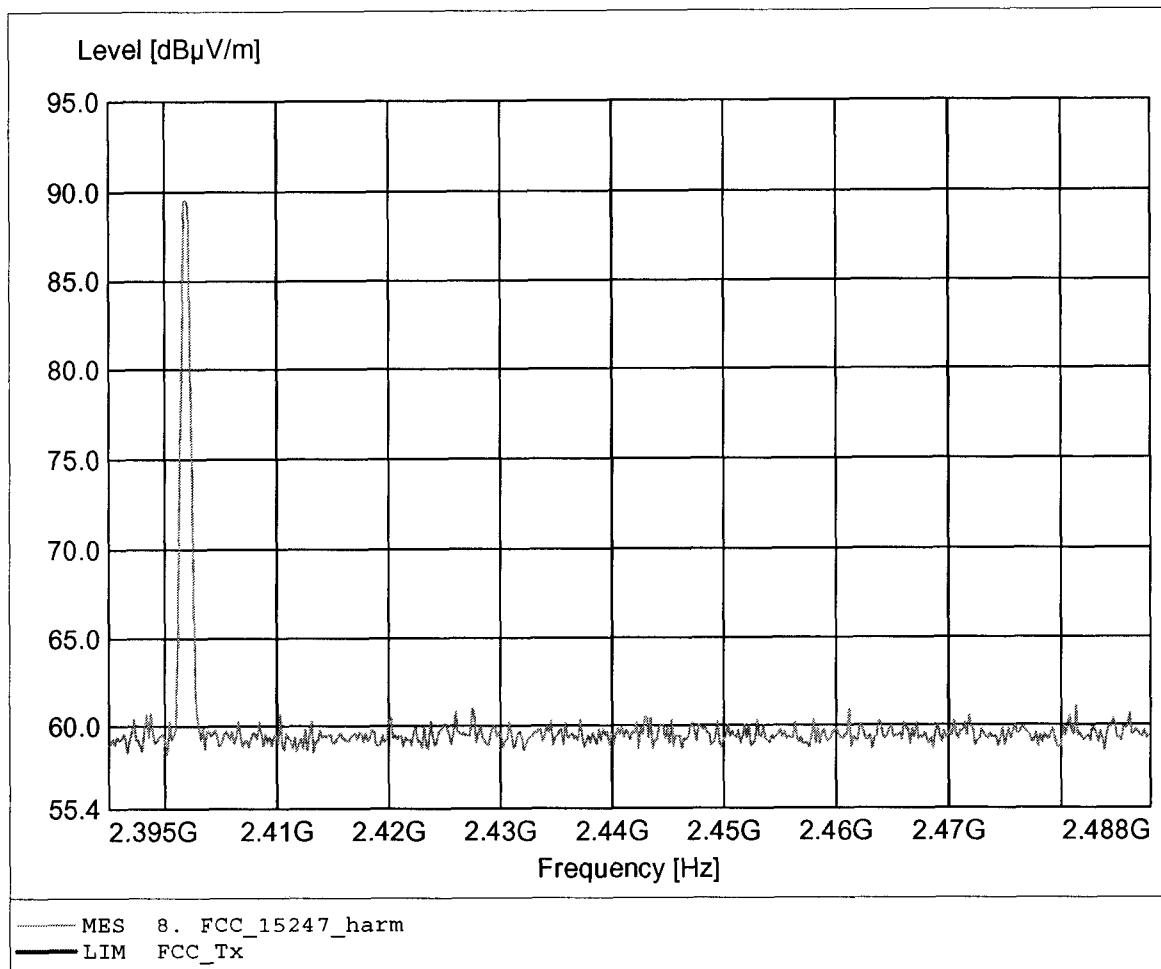

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 41.924MHz, Emax: 41.30dBµV/m, RBW: 100kHz

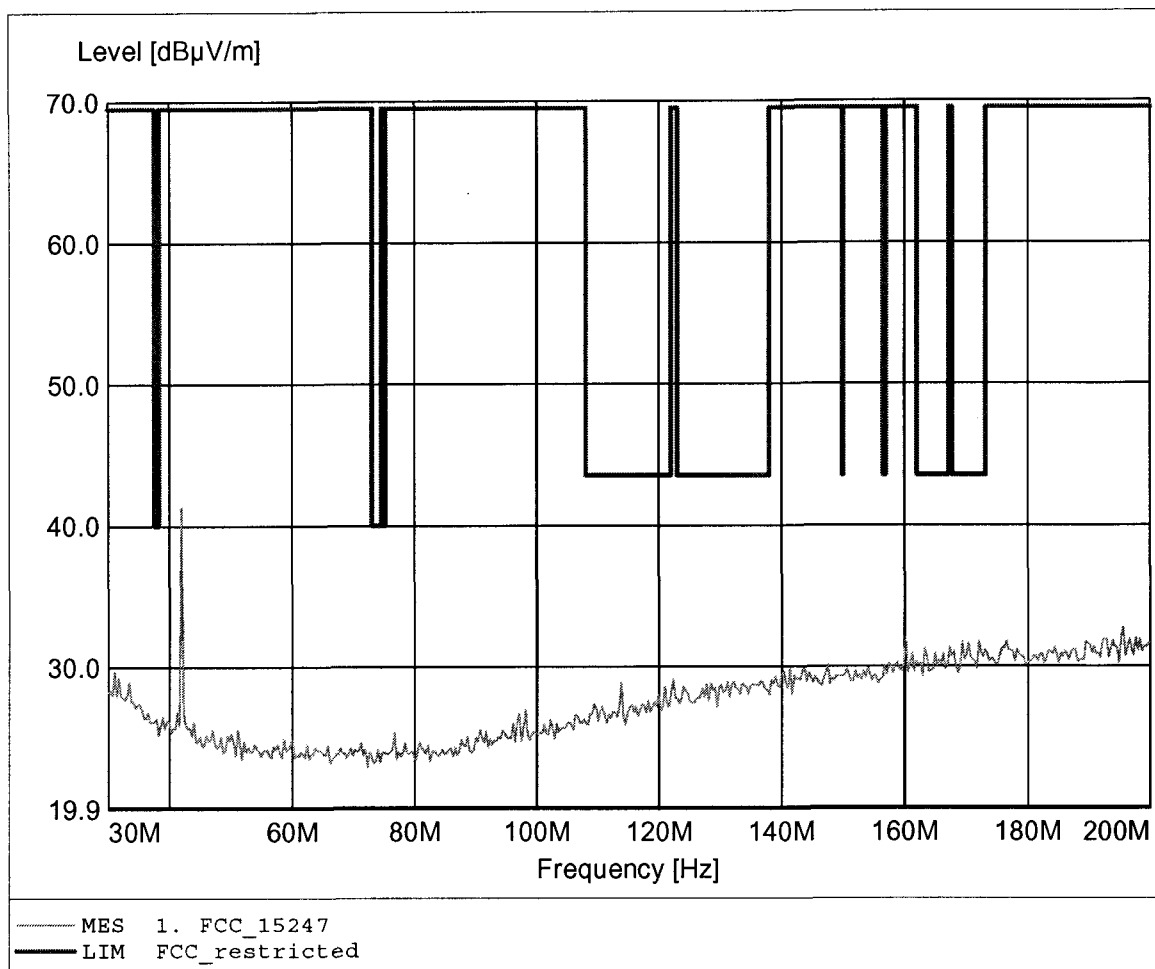

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.032MHz, Emax: 32.59dBµV/m, RBW: 100kHz

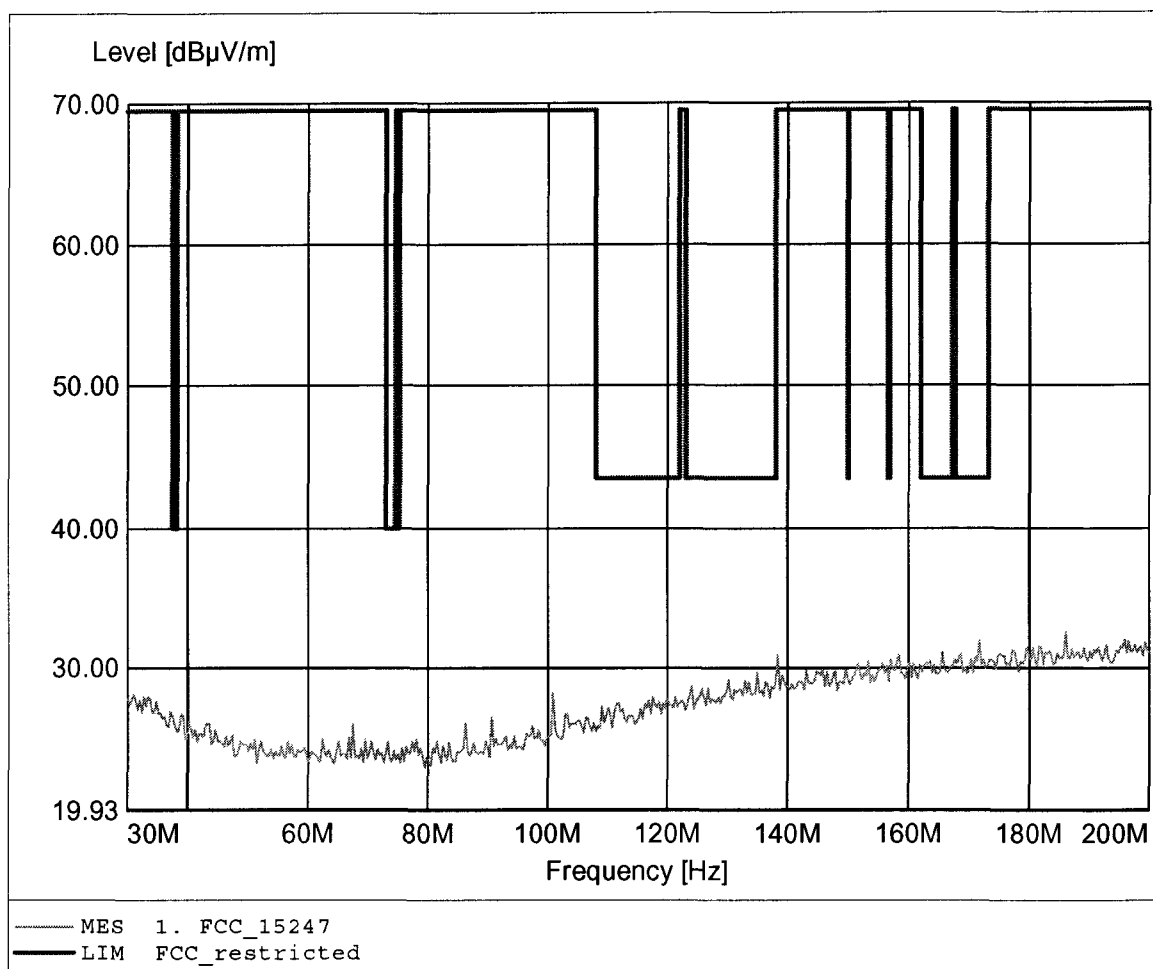

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 802.806MHz, Emax: 34.37dBµV/m, RBW: 100kHz

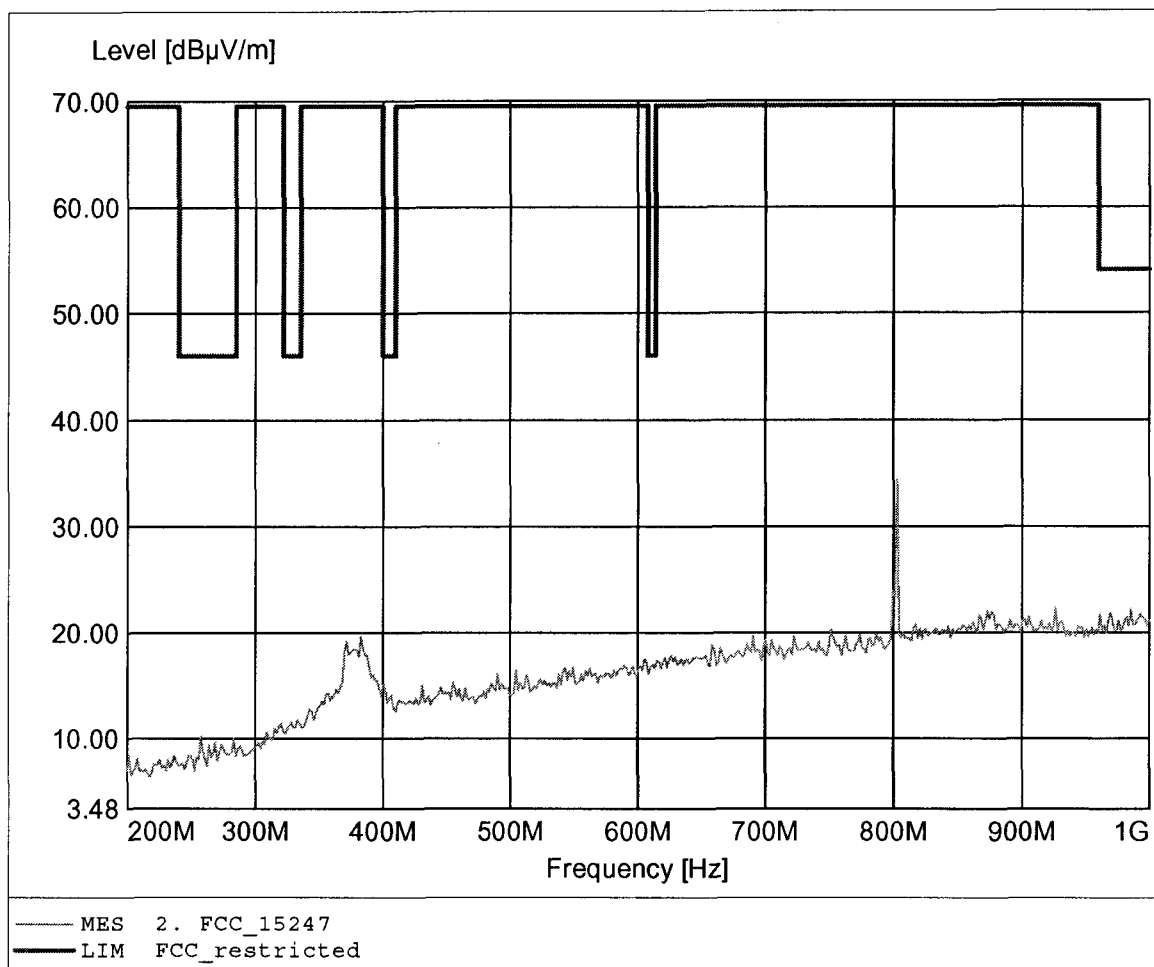

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 802.806MHz, Emax: 28.65dBμV/m, RBW: 100kHz

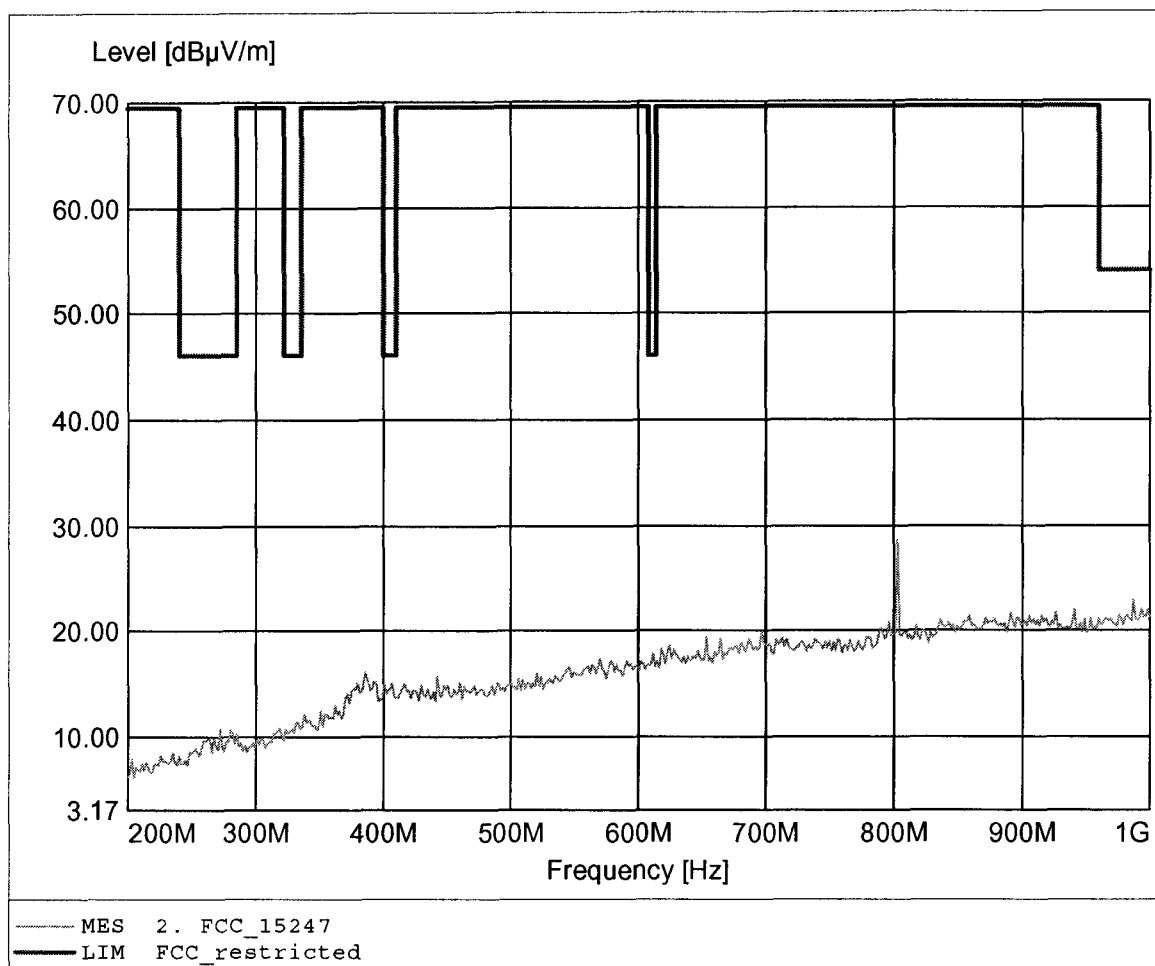

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.869GHz, Emax: 43.02dBuV/m, RBW: 1MHz

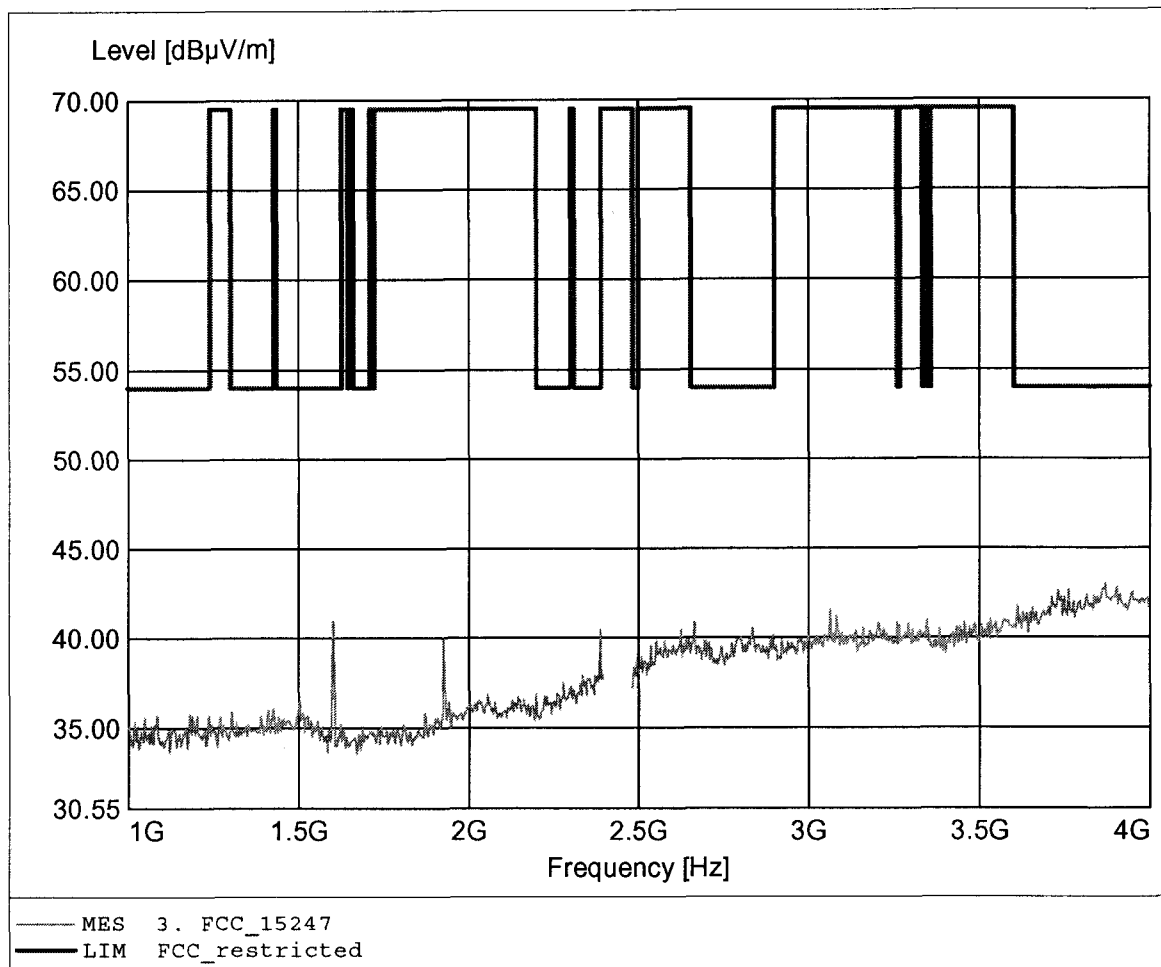

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.994GHz, Emax: 42.90dBµV/m, RBW: 1MHz

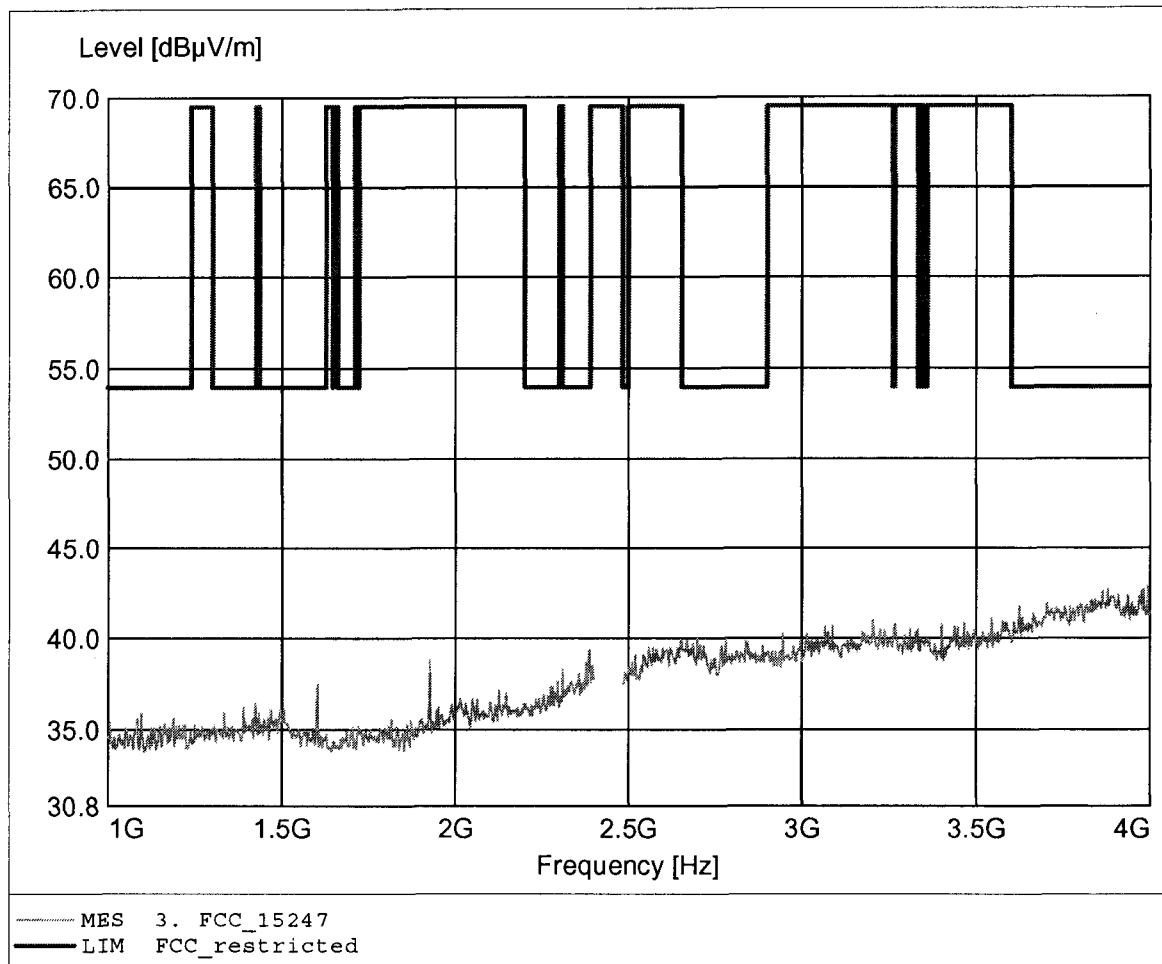

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 47.04dBuV/m, RBW: 1MHz

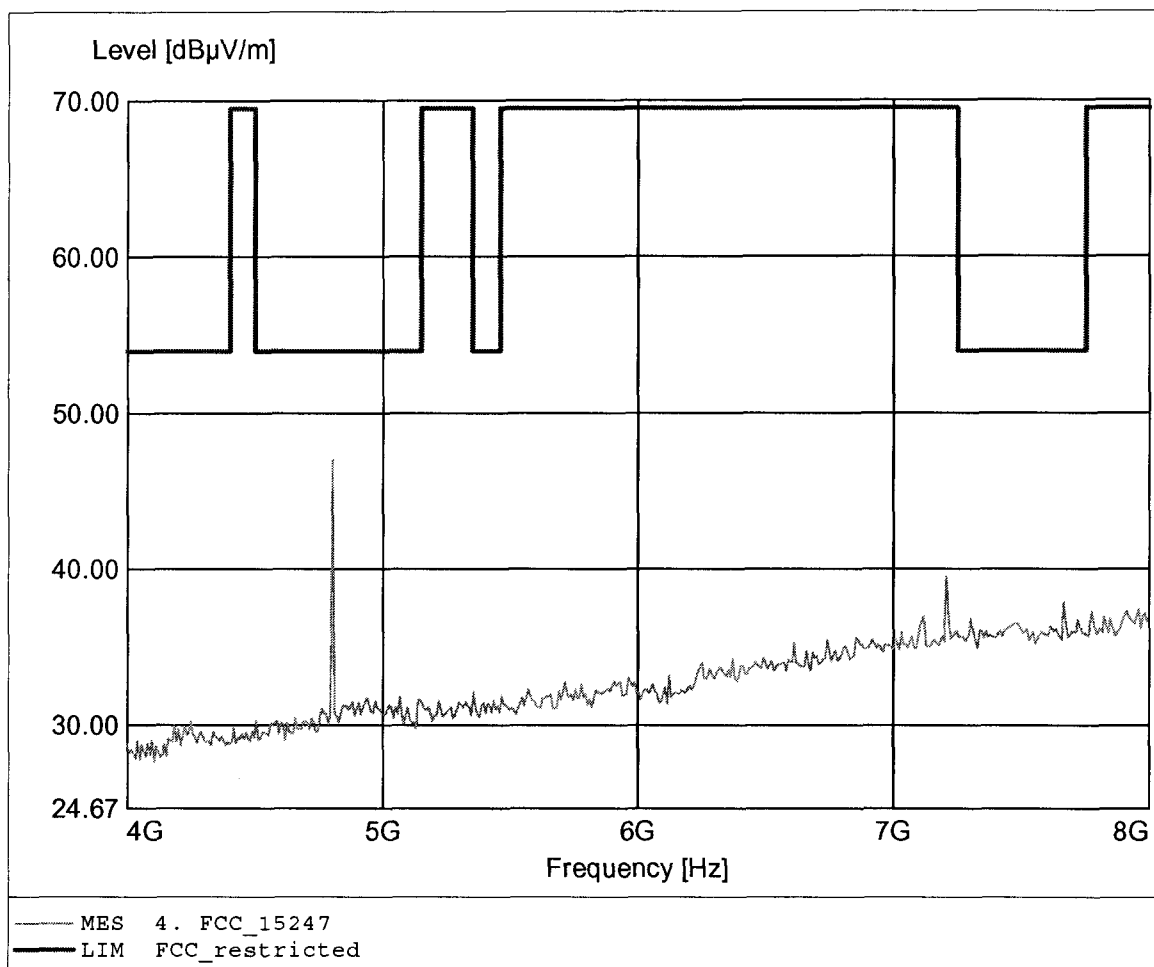

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 43.72dBμV/m, RBW: 1MHz

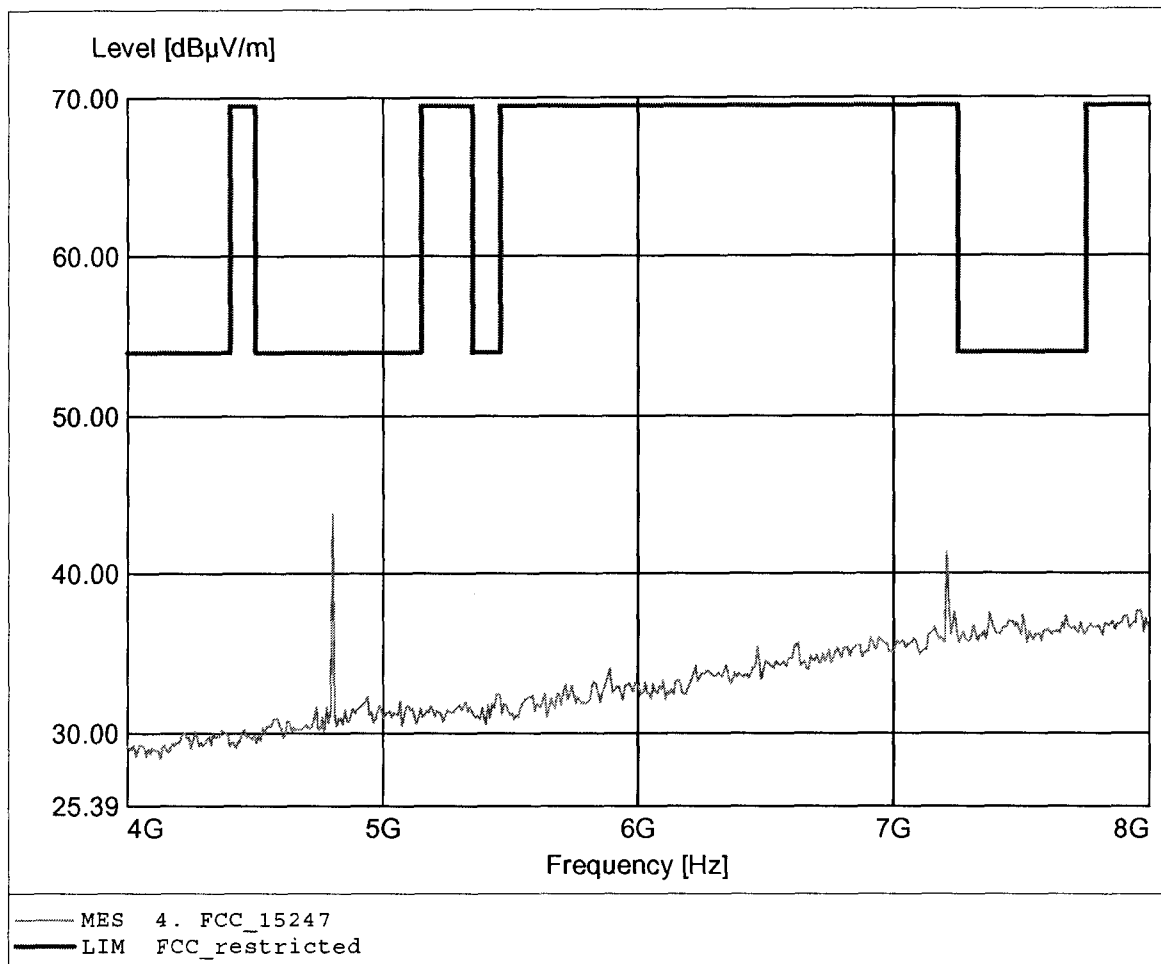

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.485GHz, Emax: 40.87dBμV/m, RBW: 1MHz

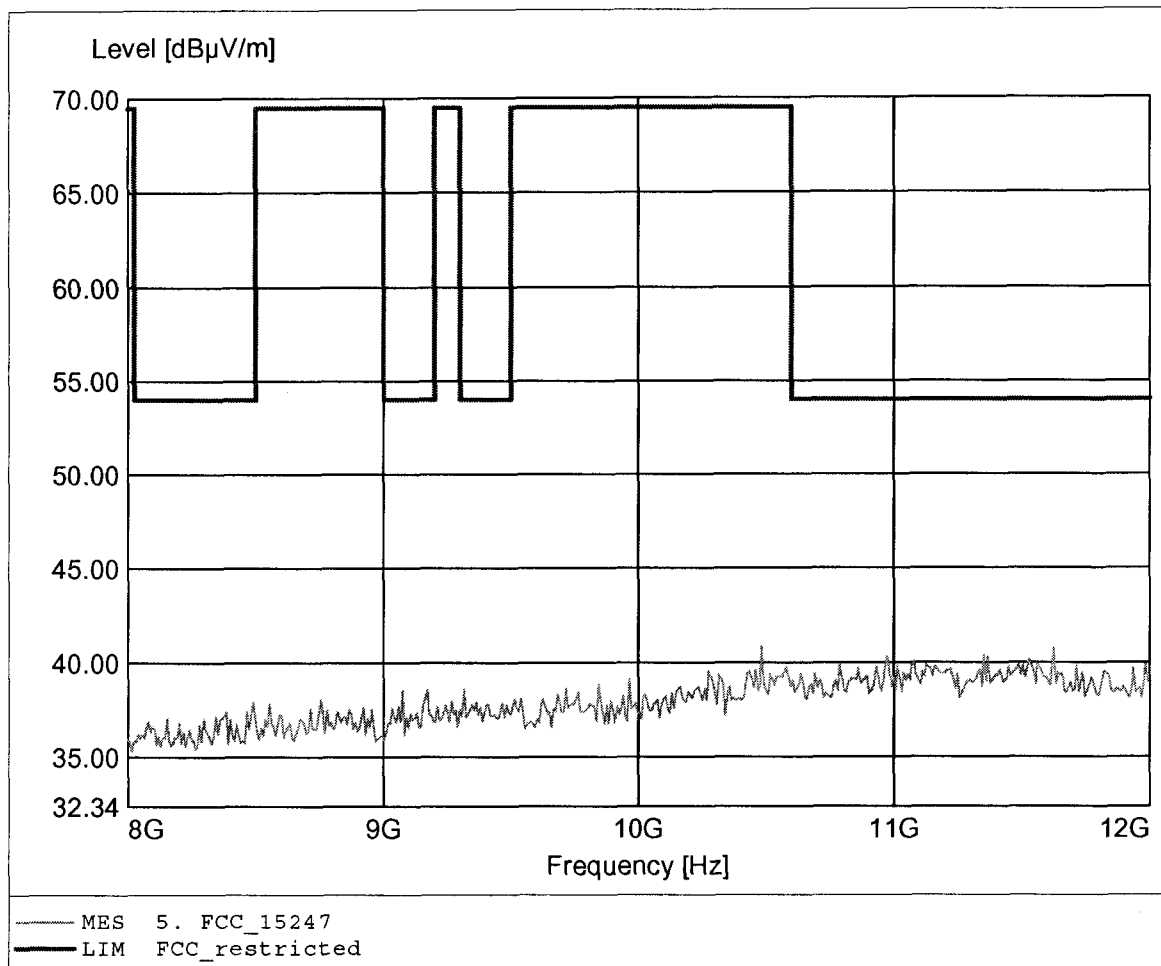

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.998GHz, Emax: 41.49dBμV/m, RBW: 1MHz

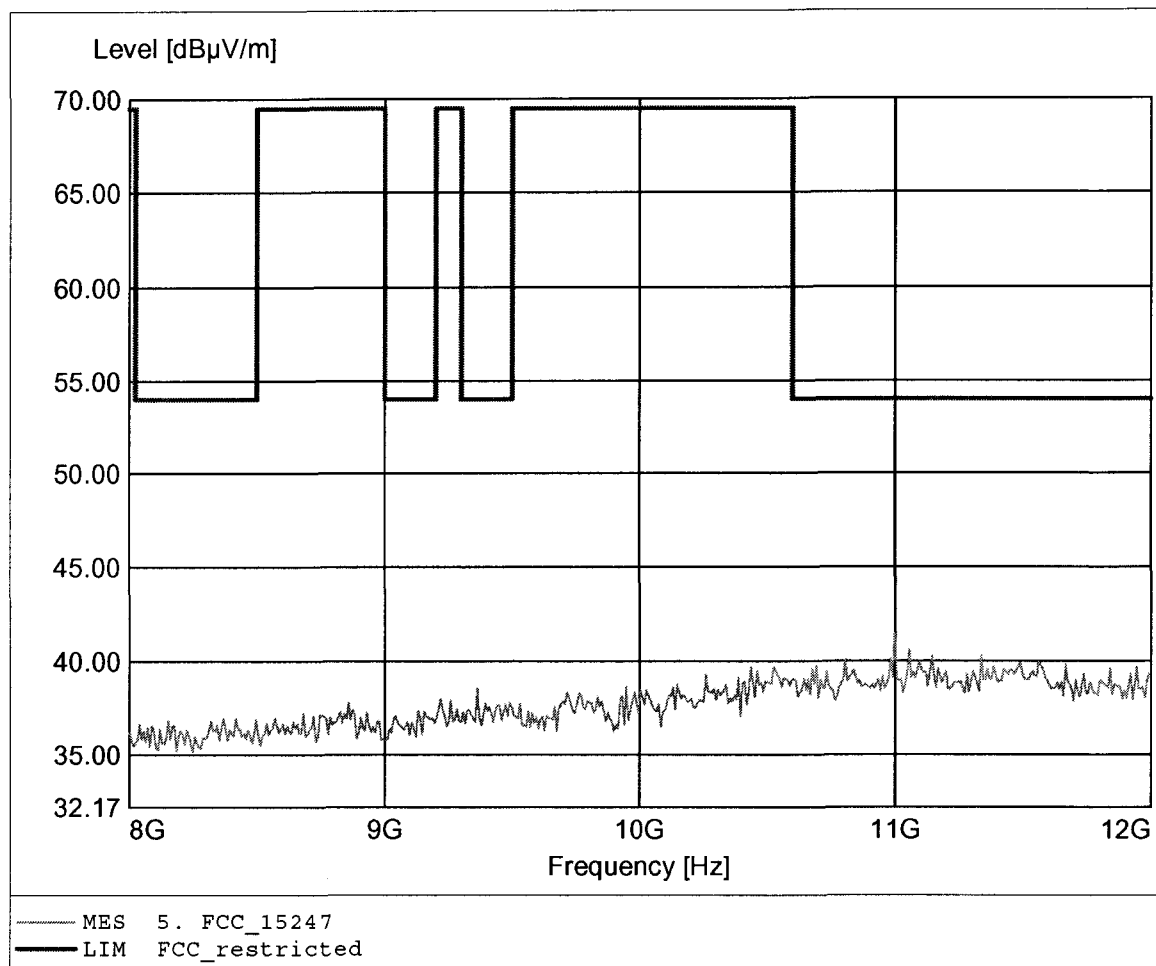

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.325GHz, Emax: 43.29dBµV/m, RBW: 1MHz

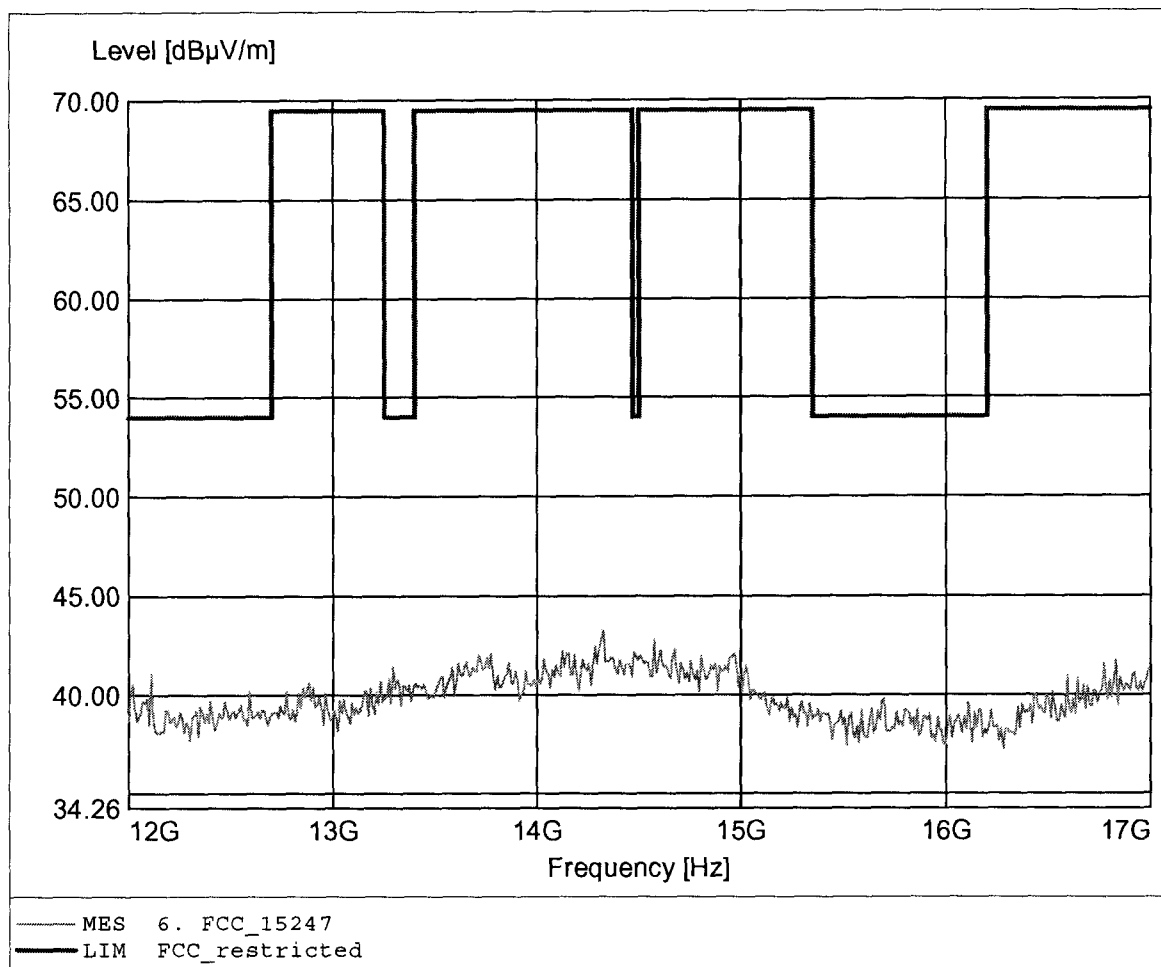

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.064GHz, Emax: 42.56dBµV/m, RBW: 1MHz

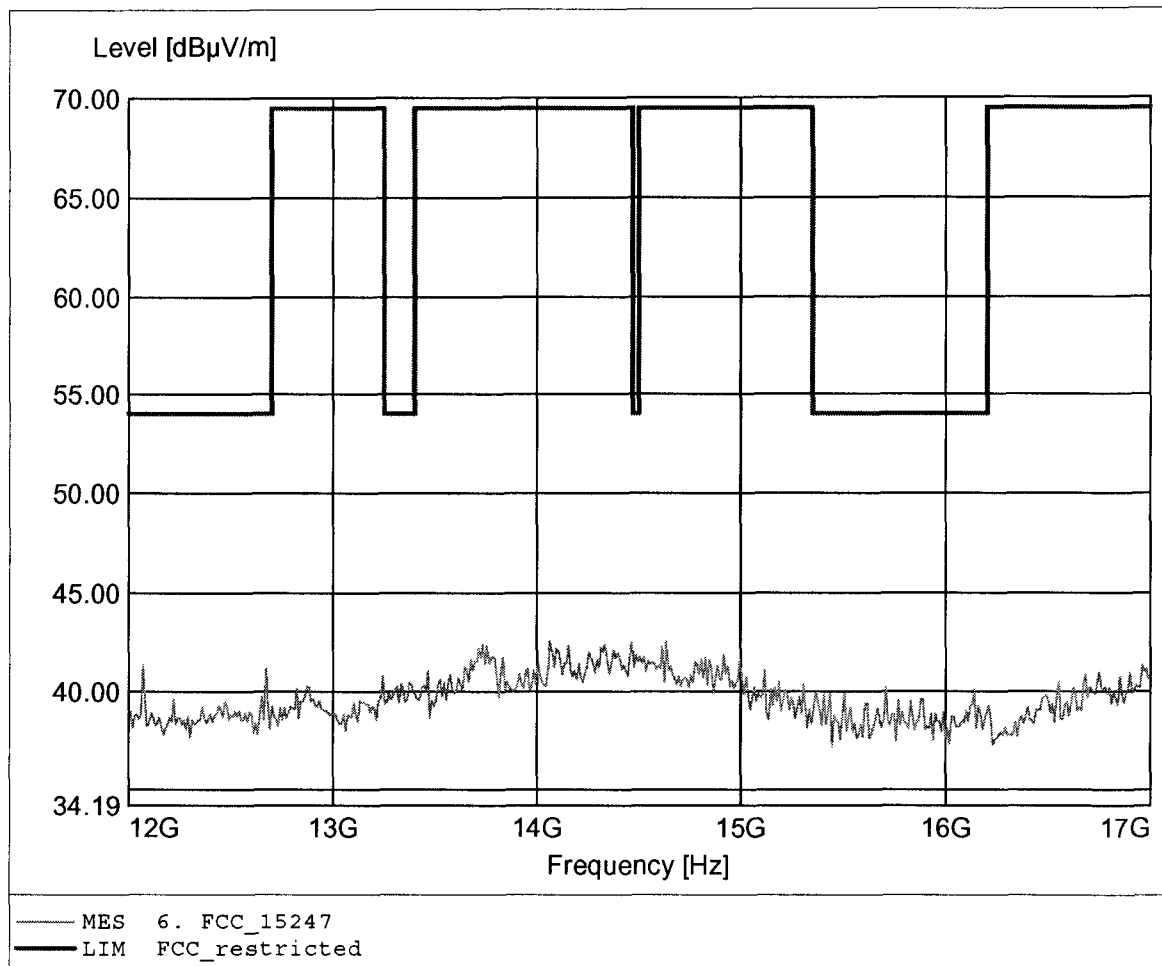

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 43.64dBμV/m, RBW: 1MHz

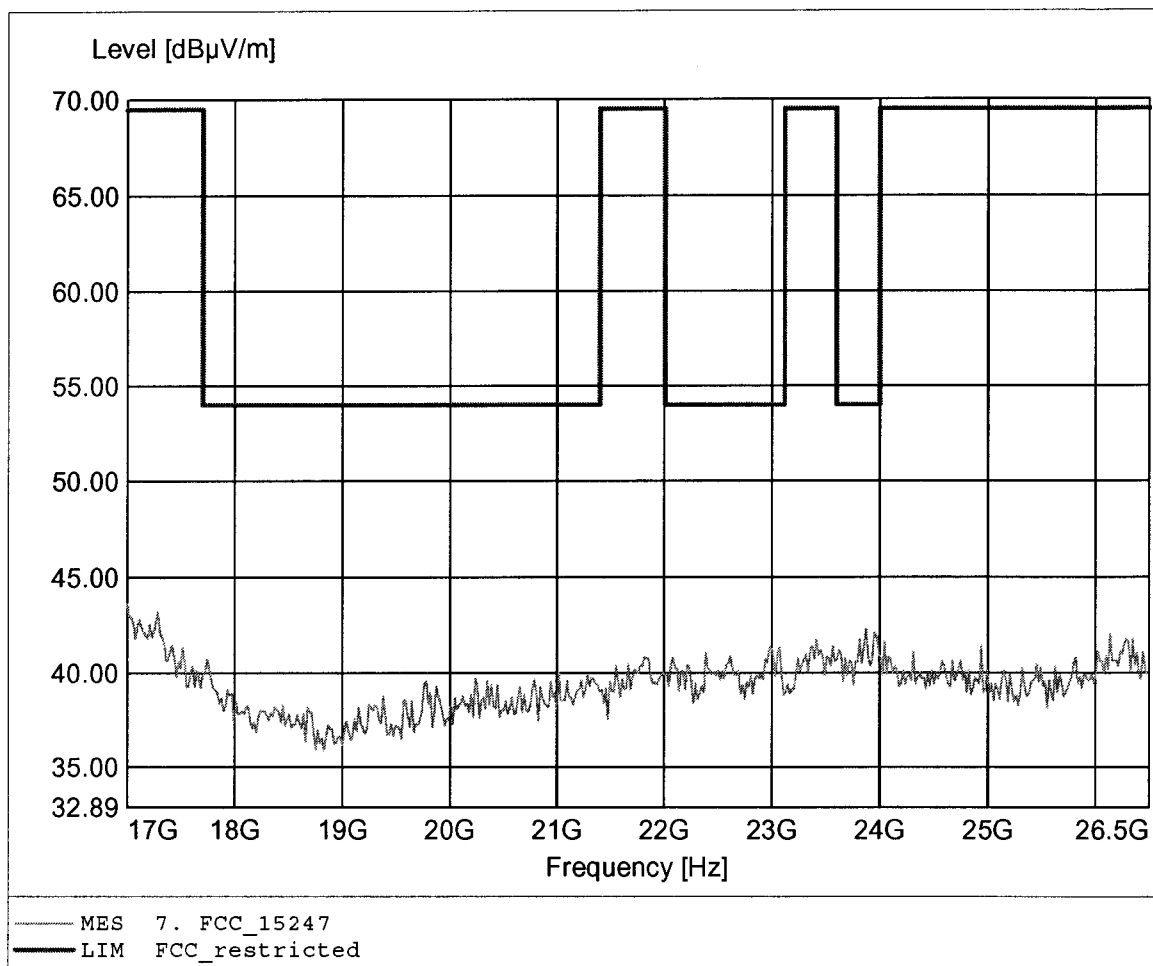

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 43.69dBuV/m, RBW: 1MHz

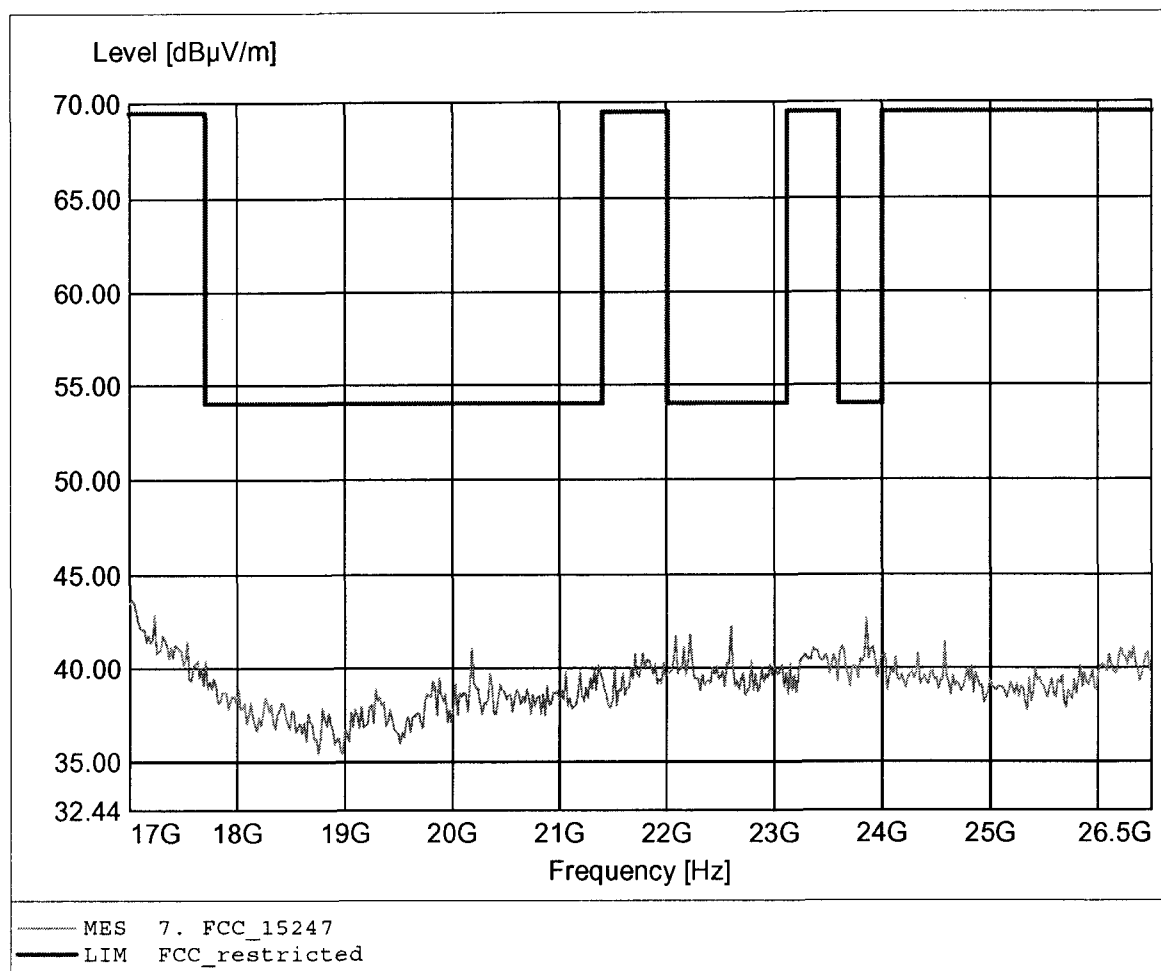

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 32.79dBµV/m, RBW: 100kHz

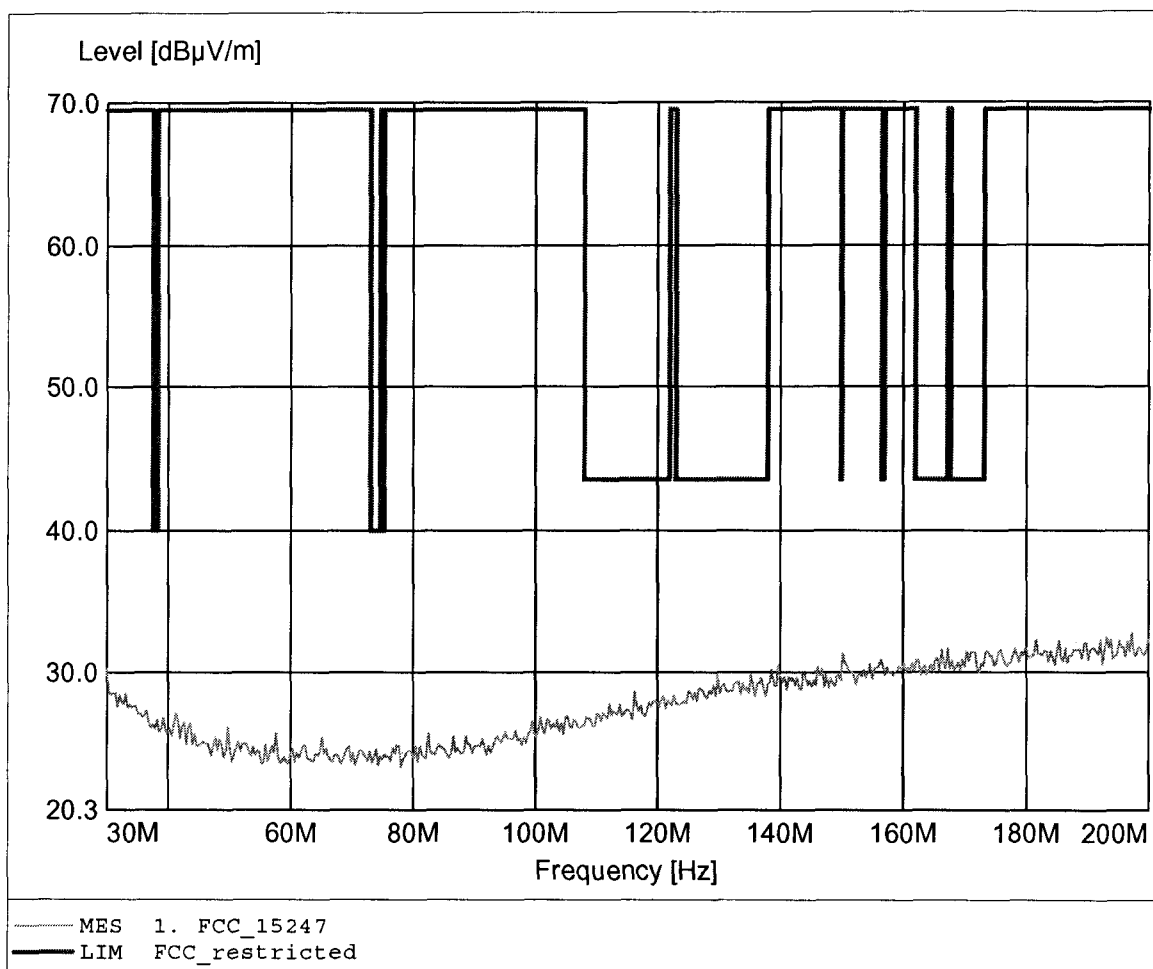

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.59dBμV/m, RBW: 100kHz

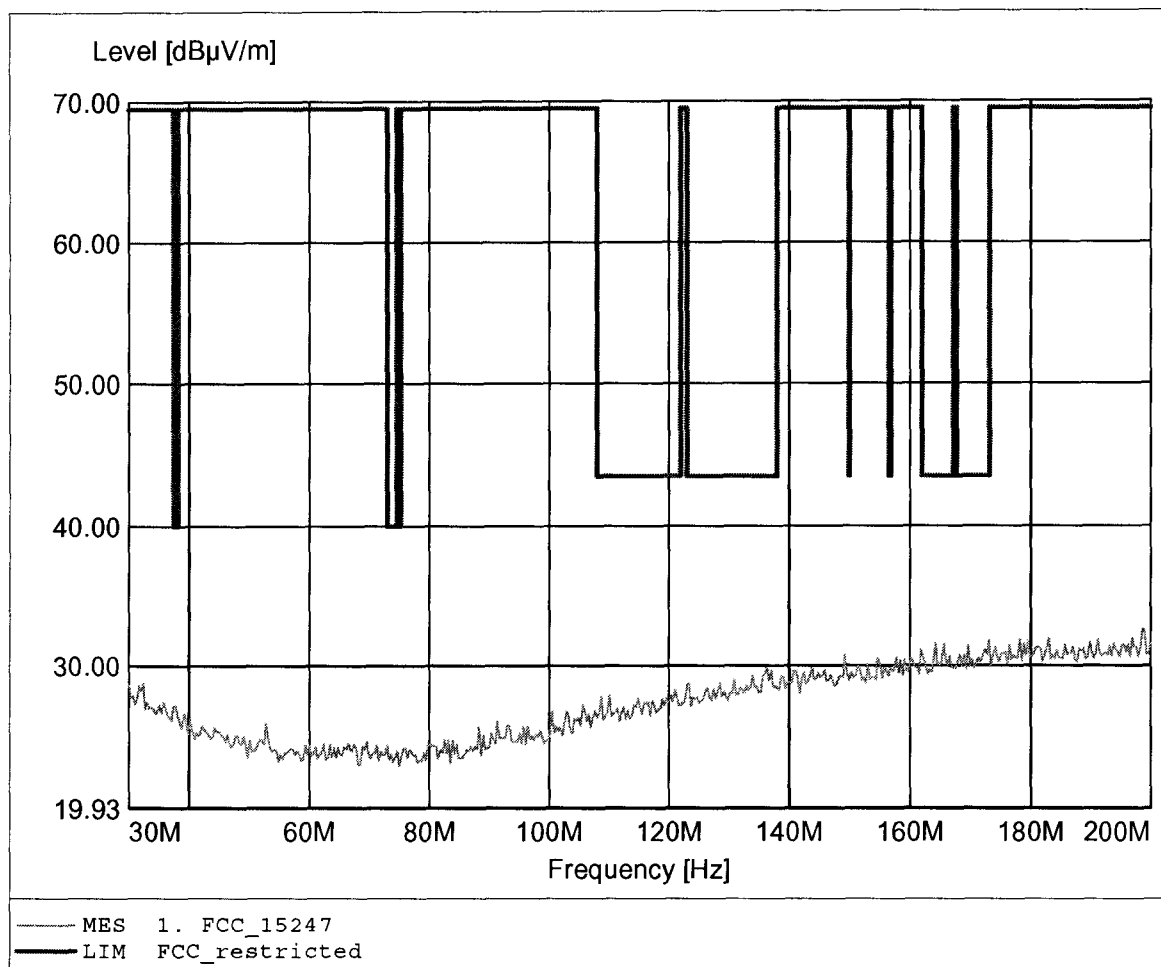

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 815.631MHz, Emax: 33.18dBµV/m, RBW: 100kHz

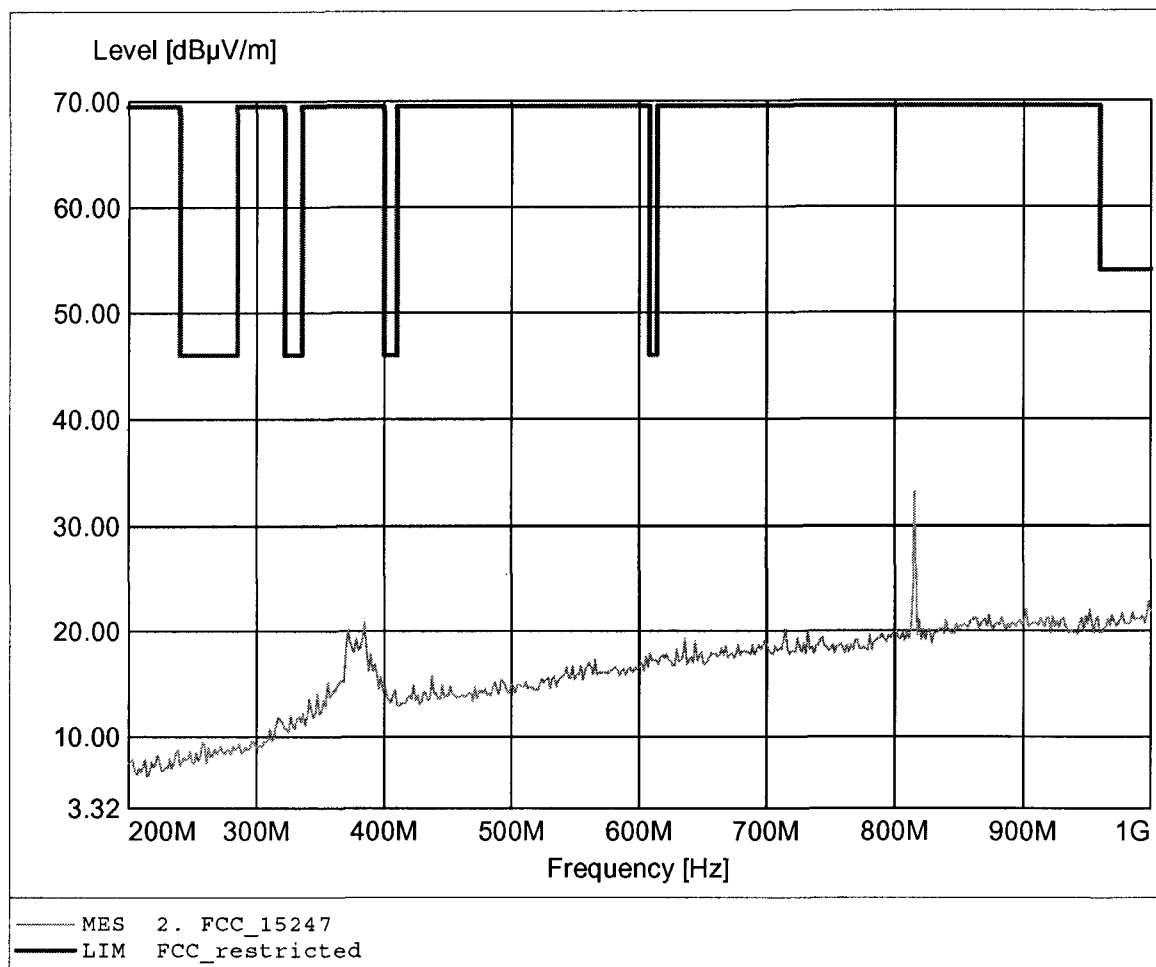

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 815.631MHz, Emax: 28.50dBµV/m, RBW: 100kHz

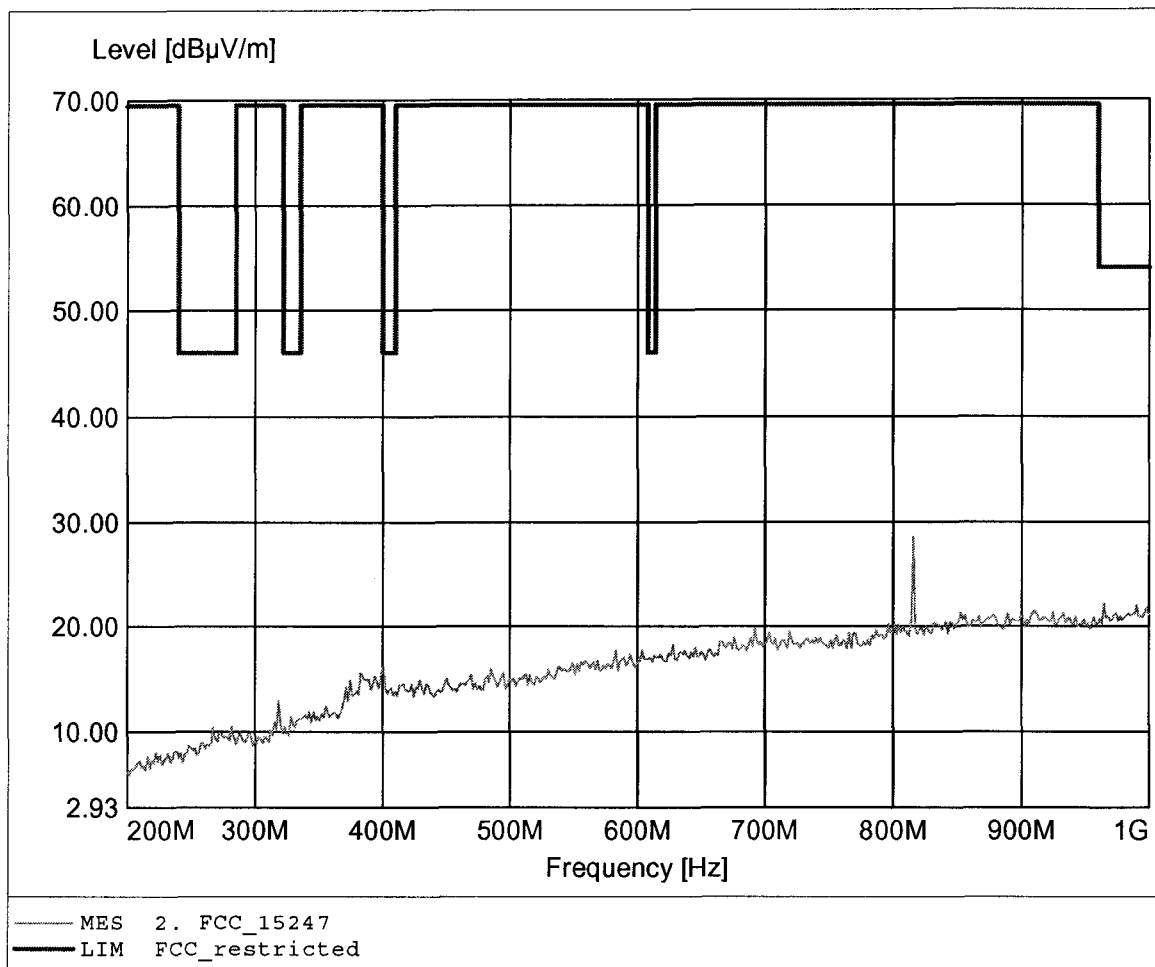

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.857GHz, Emax: 42.41dBuV/m, RBW: 1MHz

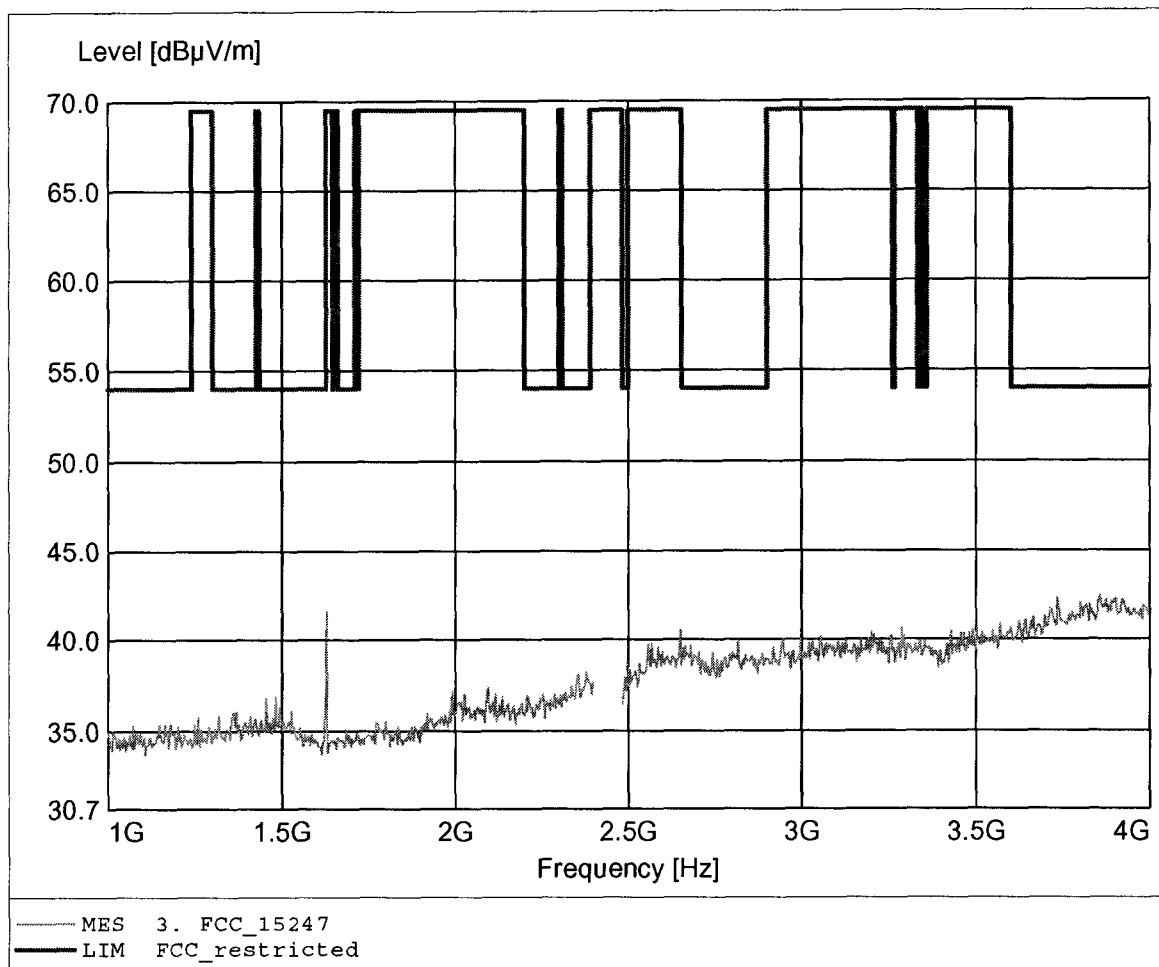

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.994GHz, Emax: 42.46dBuV/m, RBW: 1MHz

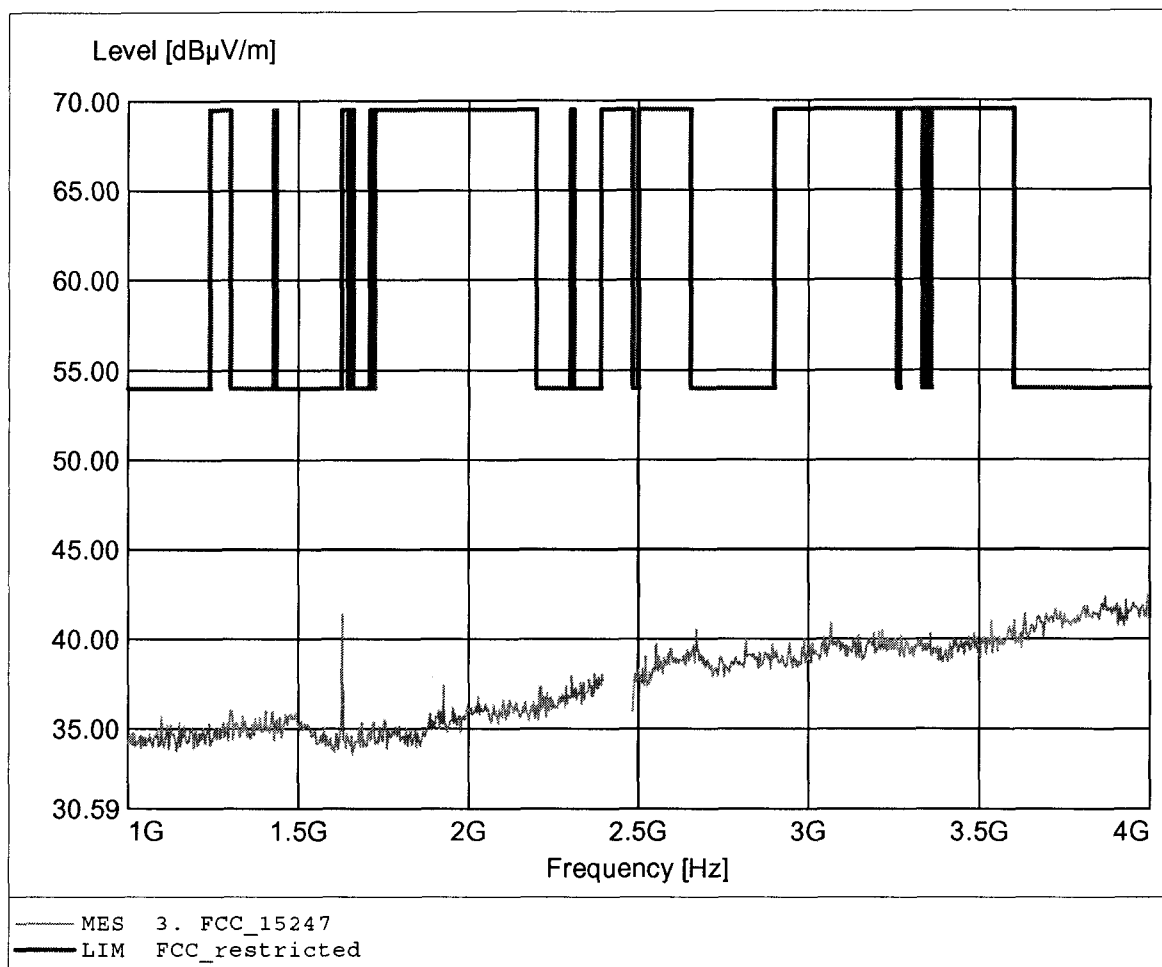

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 46.21dBµV/m, RBW: 1MHz

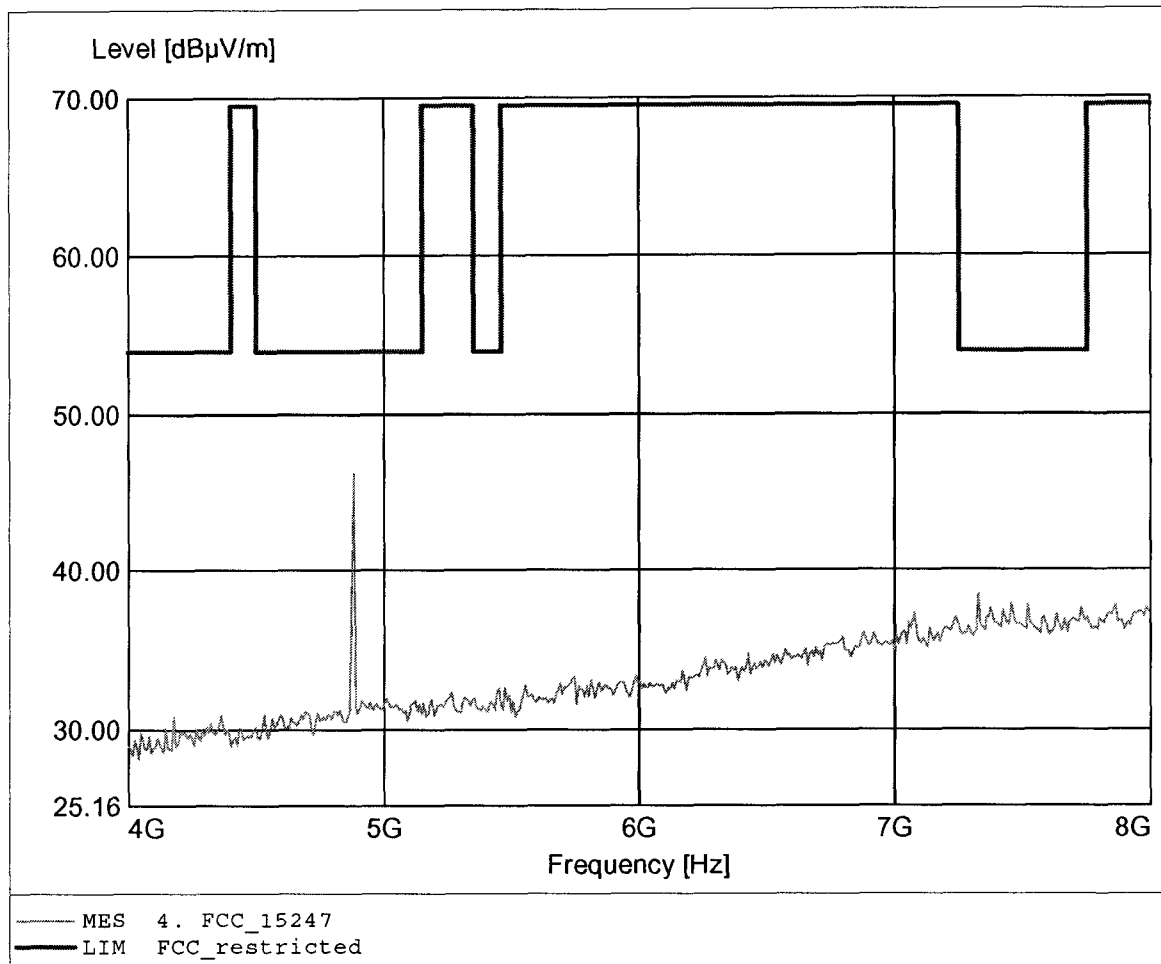

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 45.03dBμV/m, RBW: 1MHz

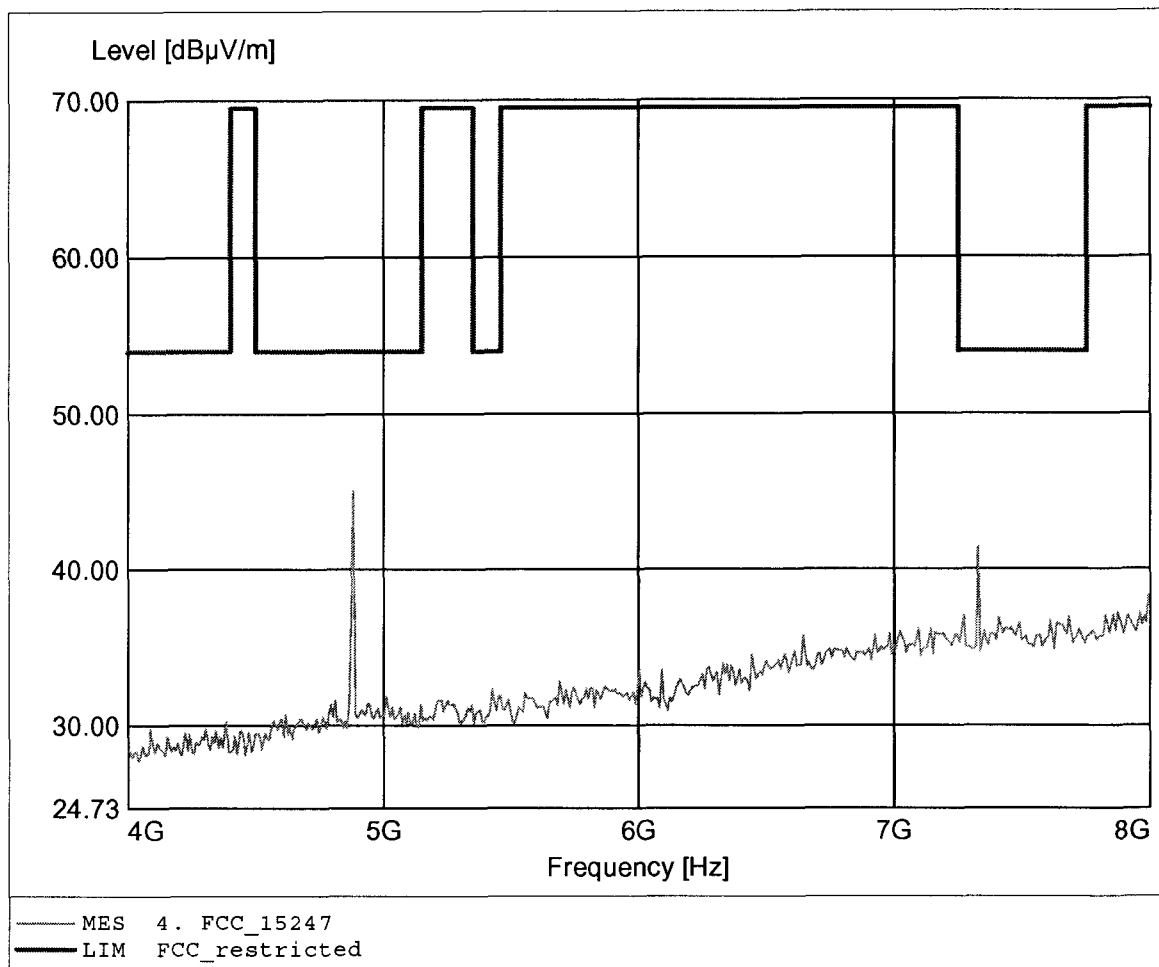

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.431GHz, Emax: 41.16dBμV/m, RBW: 1MHz

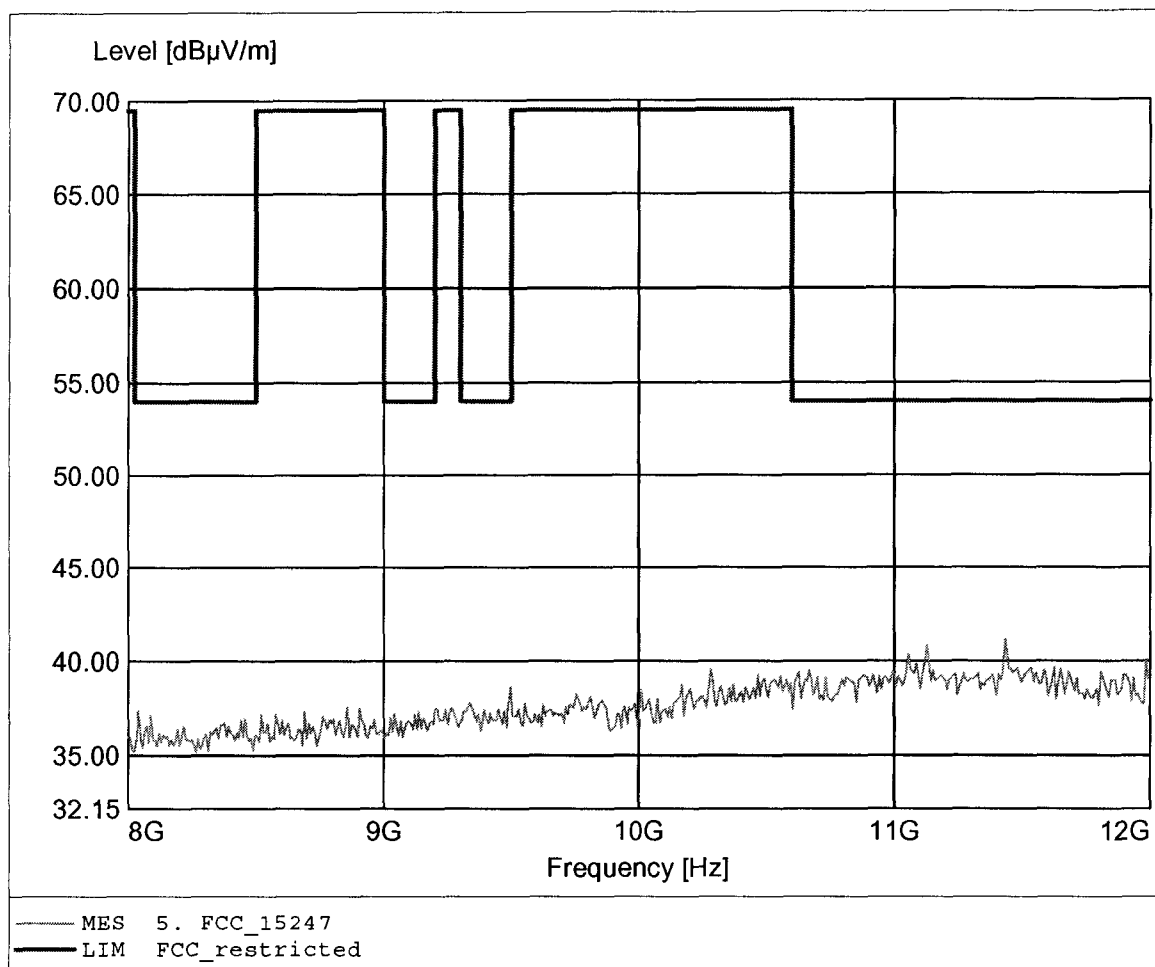

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.541GHz, Emax: 40.34dBµV/m, RBW: 1MHz

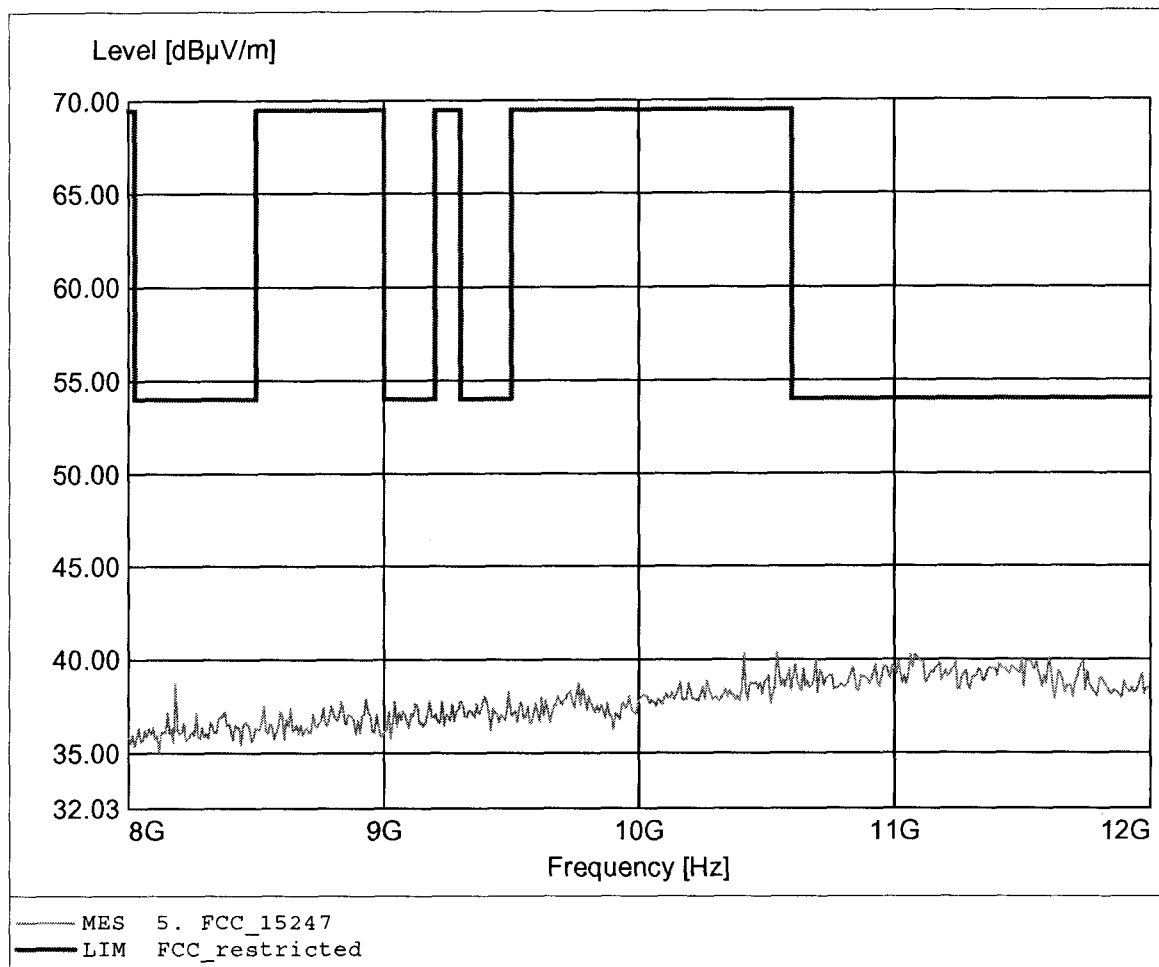

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.485GHz, Emax: 42.67dBμV/m, RBW: 1MHz

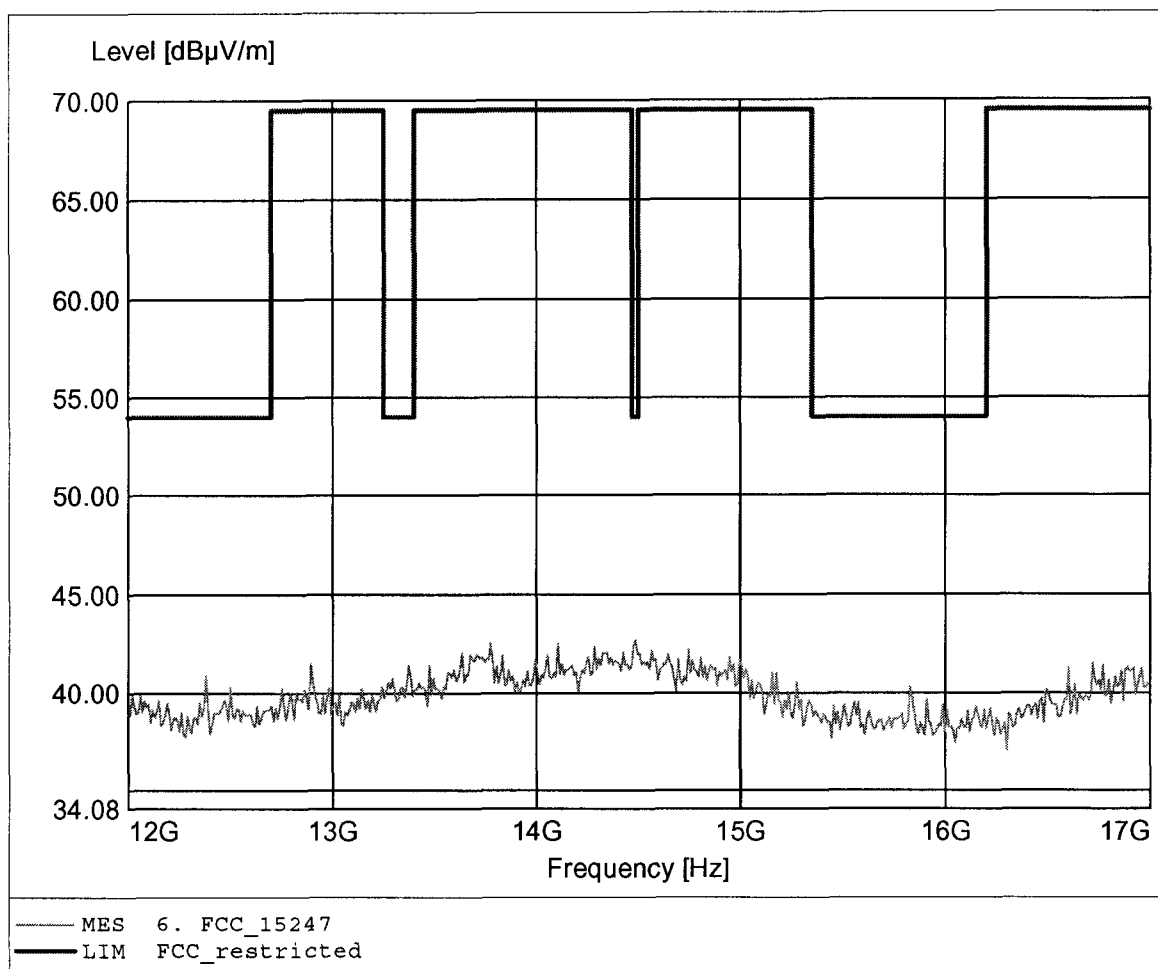

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.345GHz, Emax: 42.77dBµV/m, RBW: 1MHz

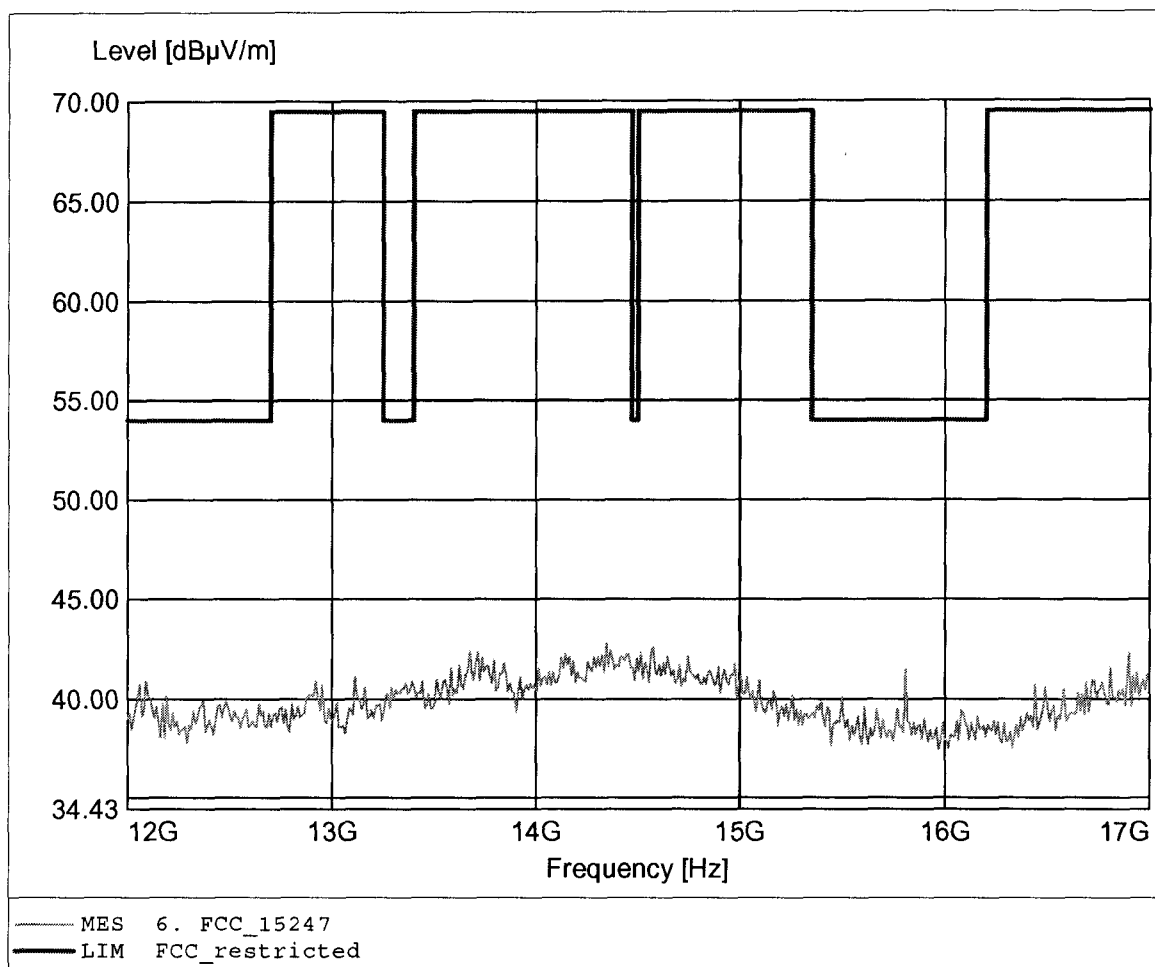

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.228GHz, Emax: 43.26dBuV/m, RBW: 1MHz

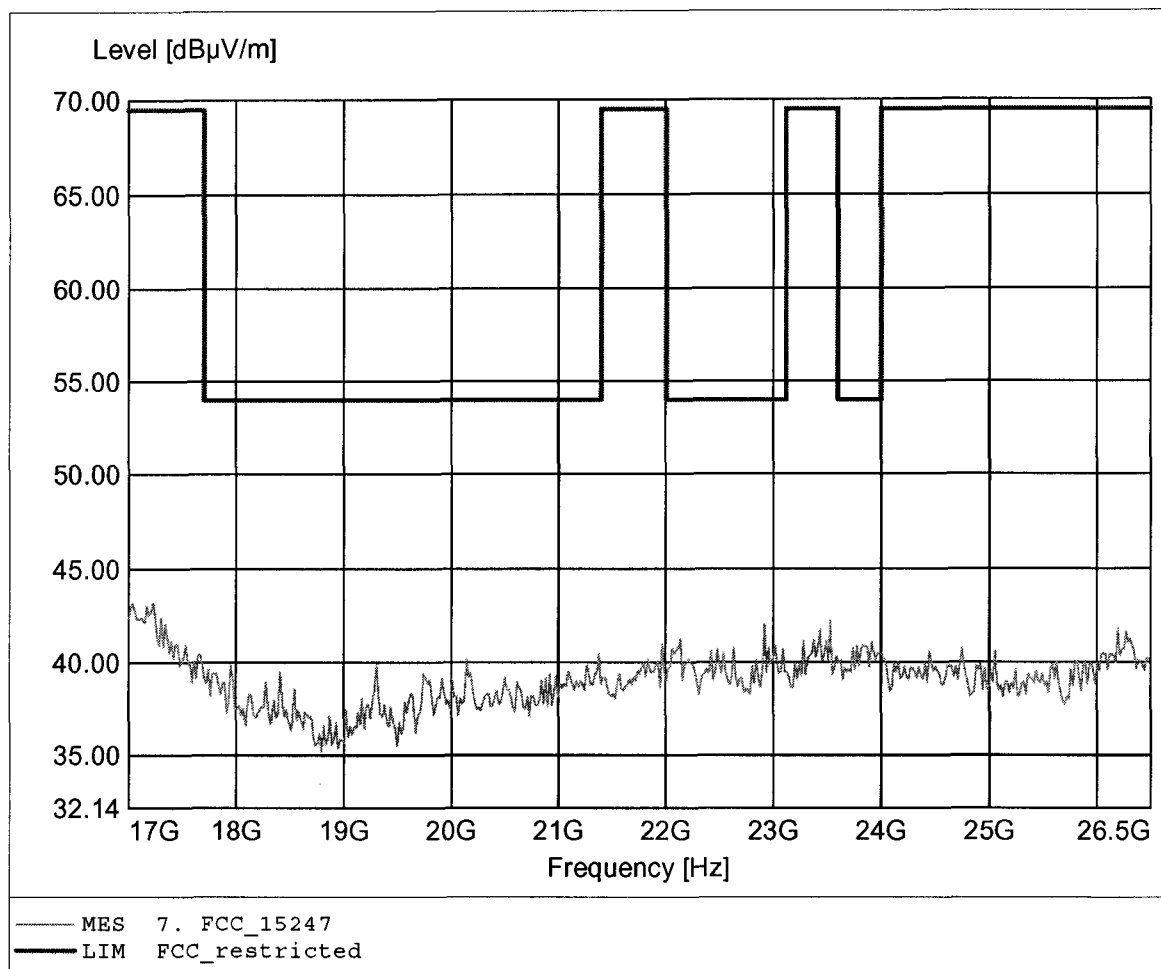

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 43.15dBμV/m, RBW: 1MHz

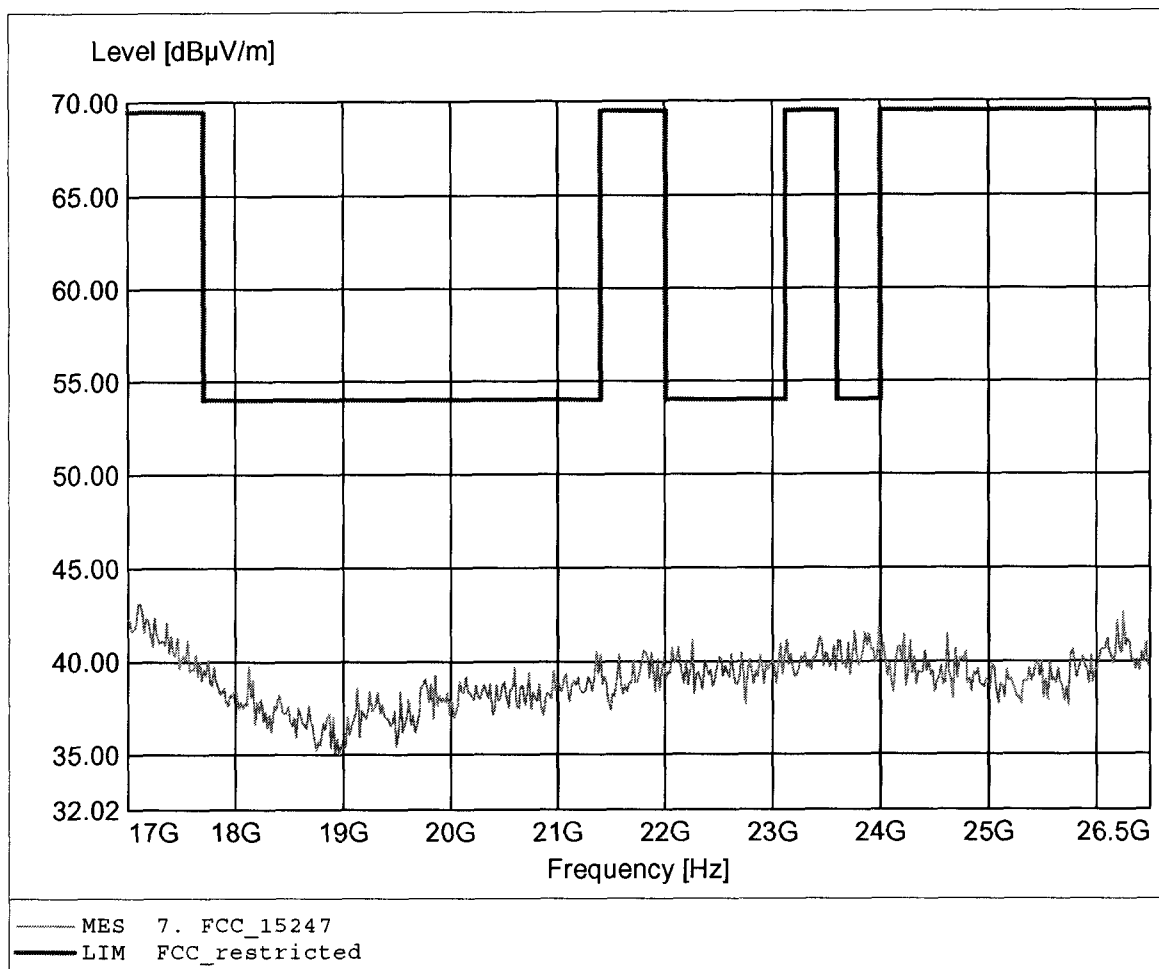

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.341MHz, Emax: 39.78dBuV/m, RBW: 100kHz

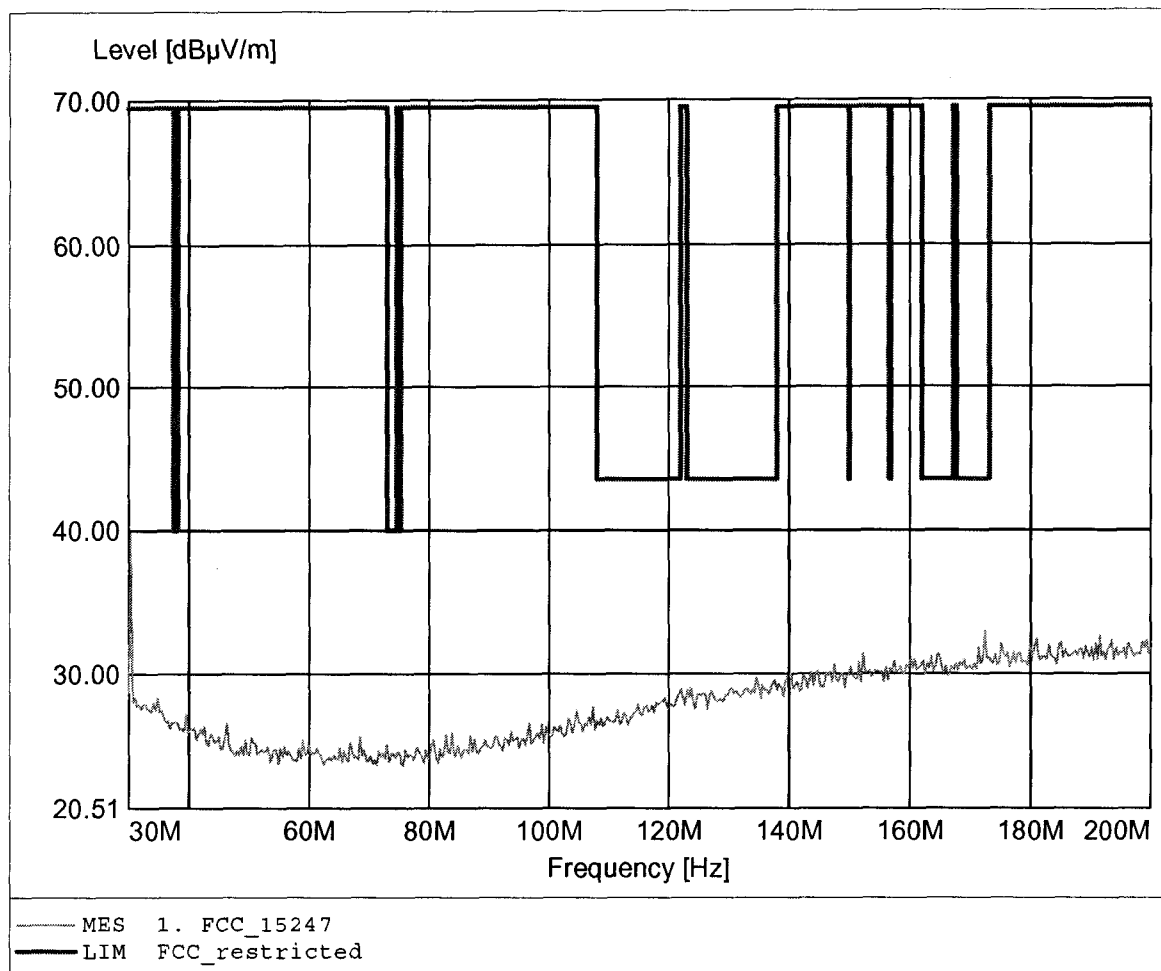

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.373MHz, Emax: 32.56dBµV/m, RBW: 100kHz

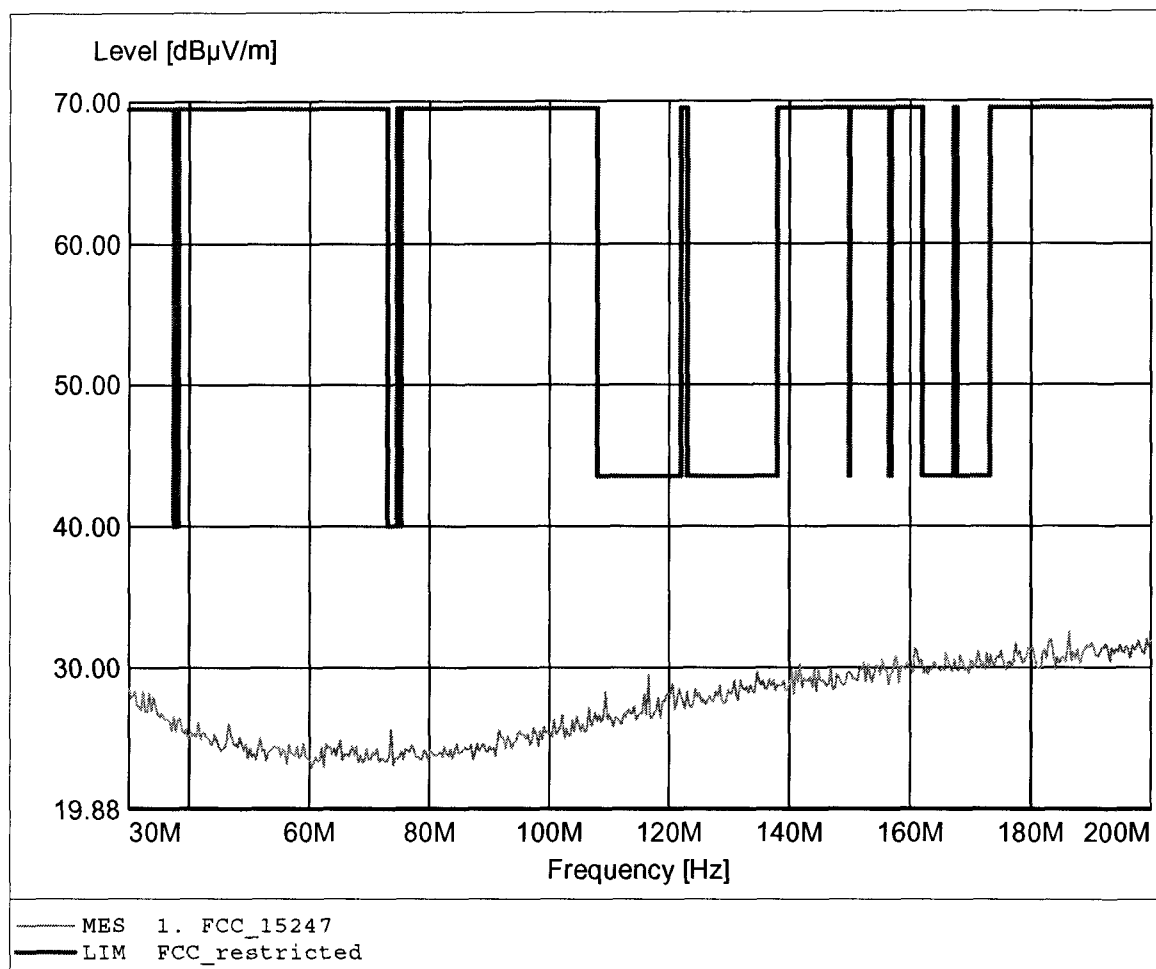

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 828.457MHz, Emax: 33.80dBµV/m, RBW: 100kHz

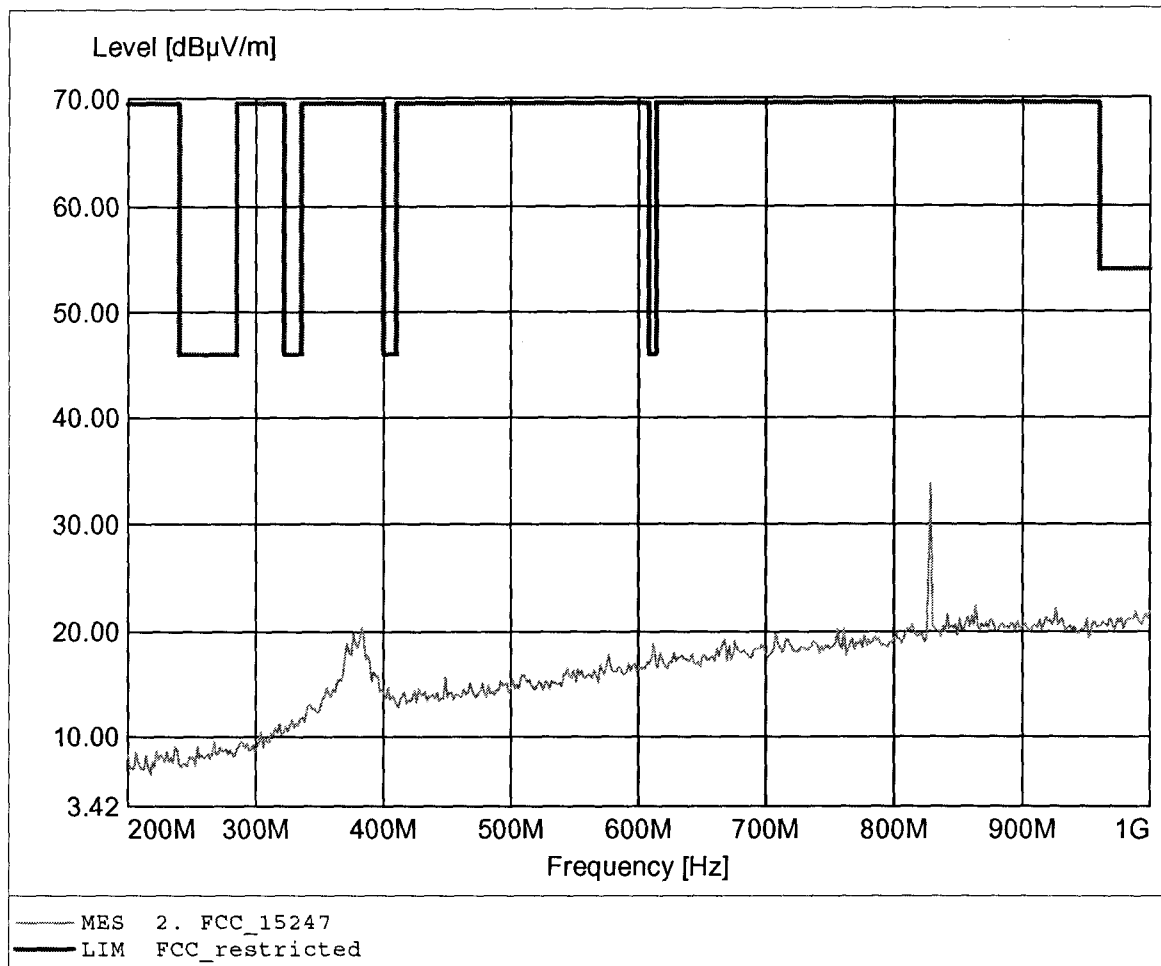

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 828.457MHz, Emax: 27.27dBµV/m, RBW: 100kHz

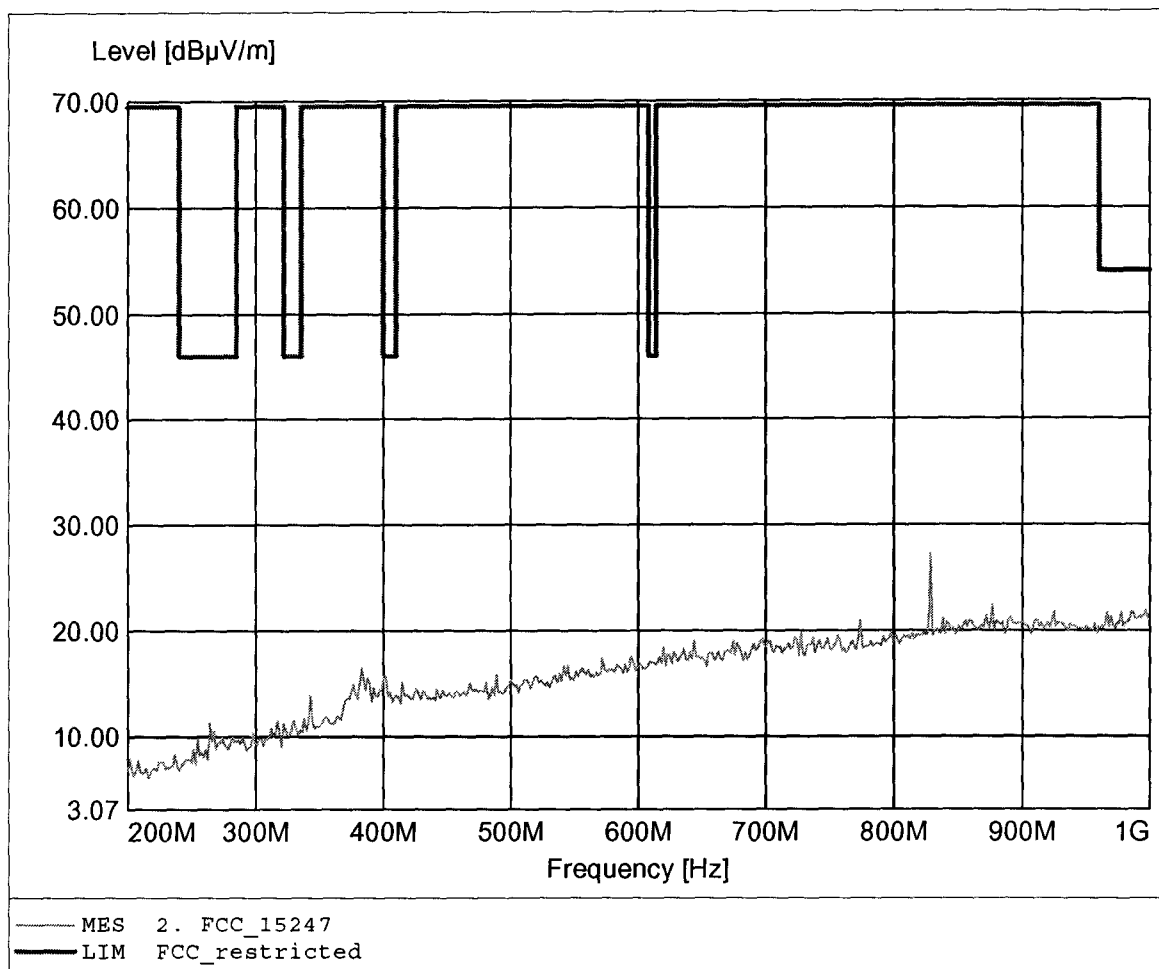

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.842GHz, Emax: 42.52dBμV/m, RBW: 1MHz

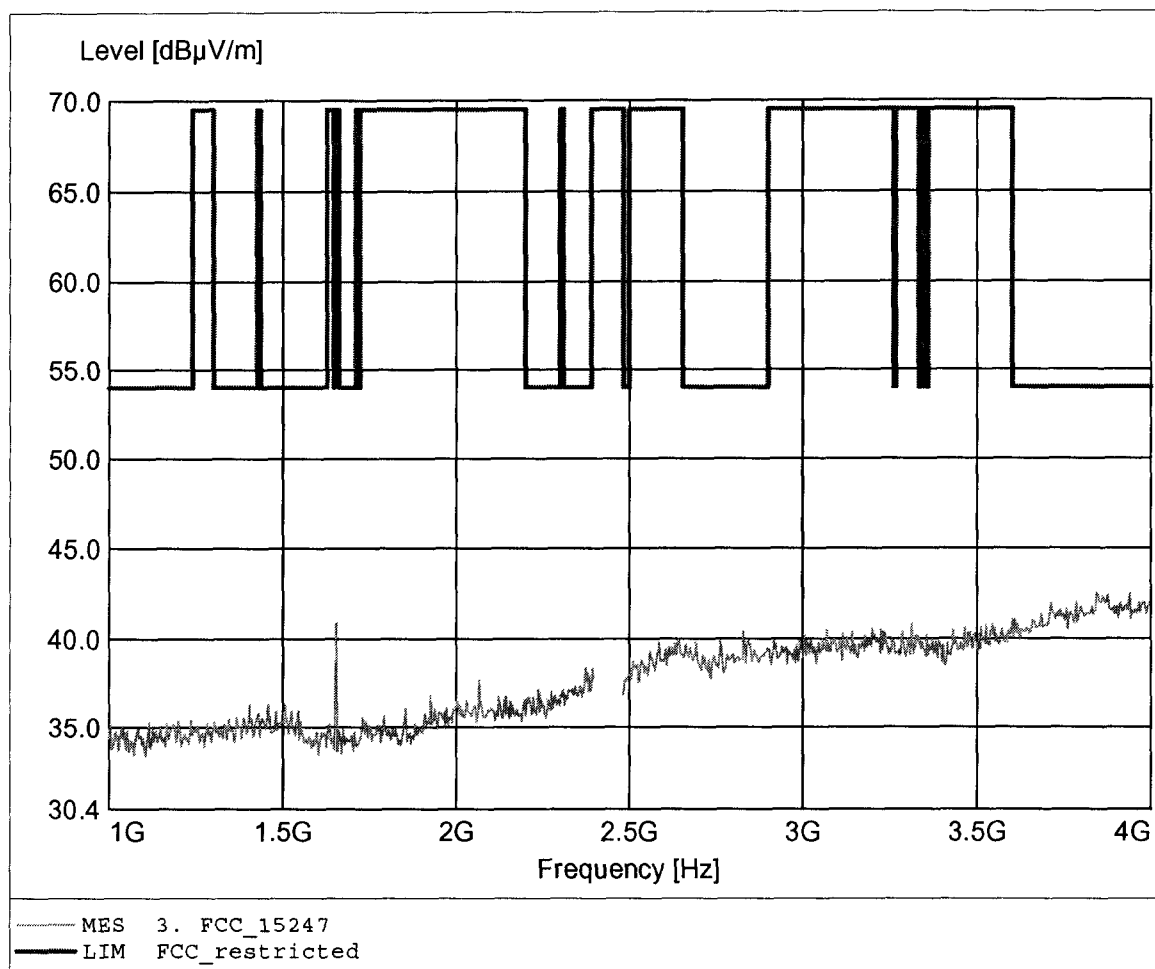

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.878GHz, Emax: 42.57dBμV/m, RBW: 1MHz

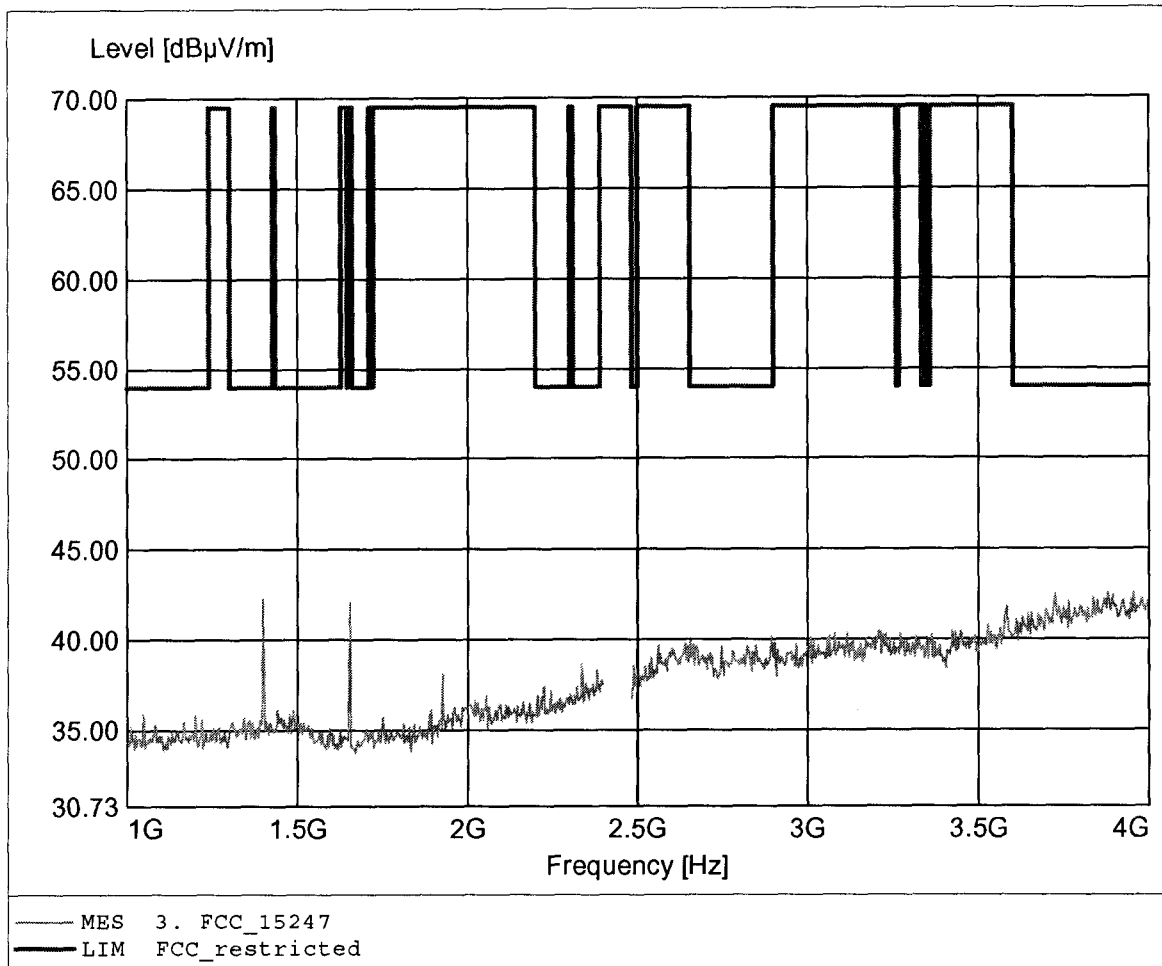

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 50.53dBμV/m, RBW: 1MHz

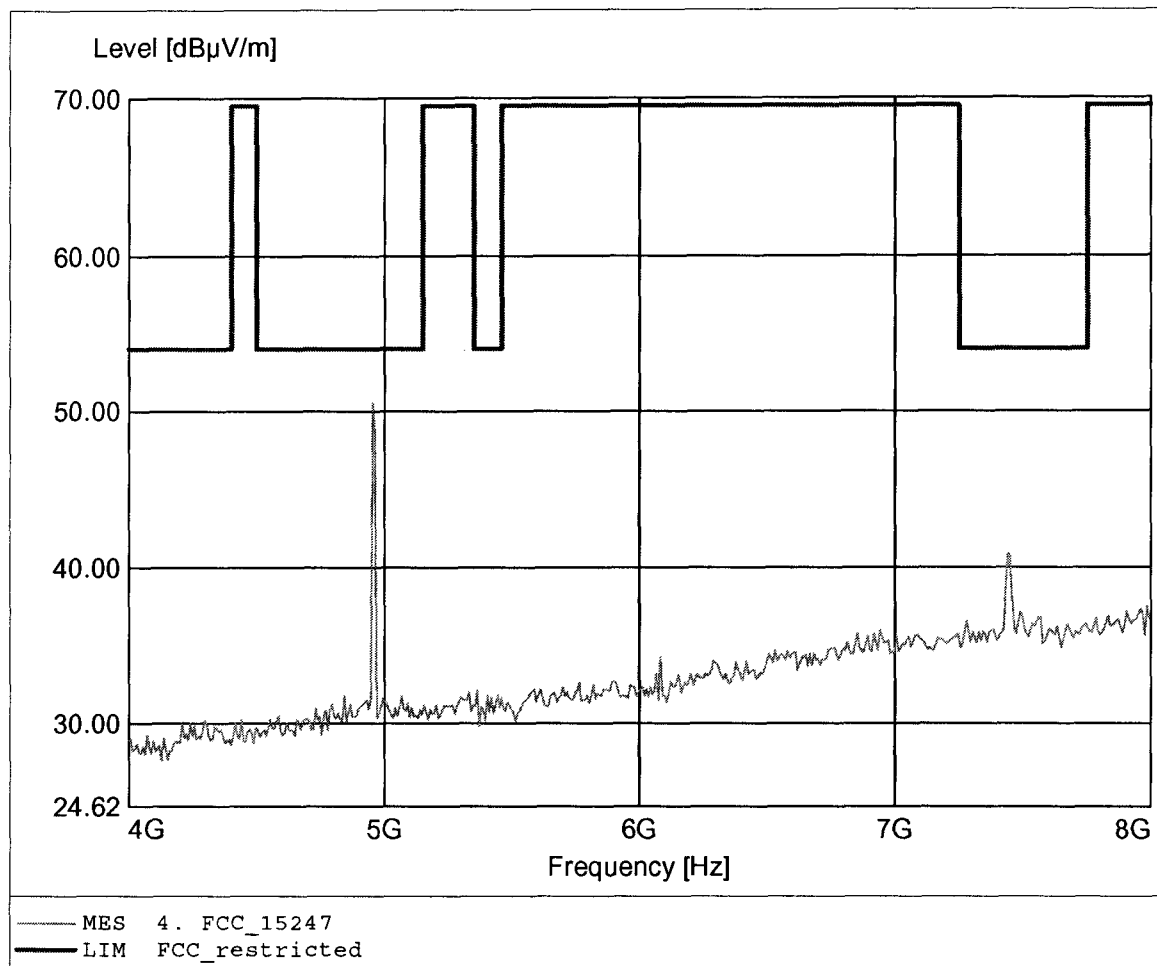

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 45.22dBμV/m, RBW: 1MHz

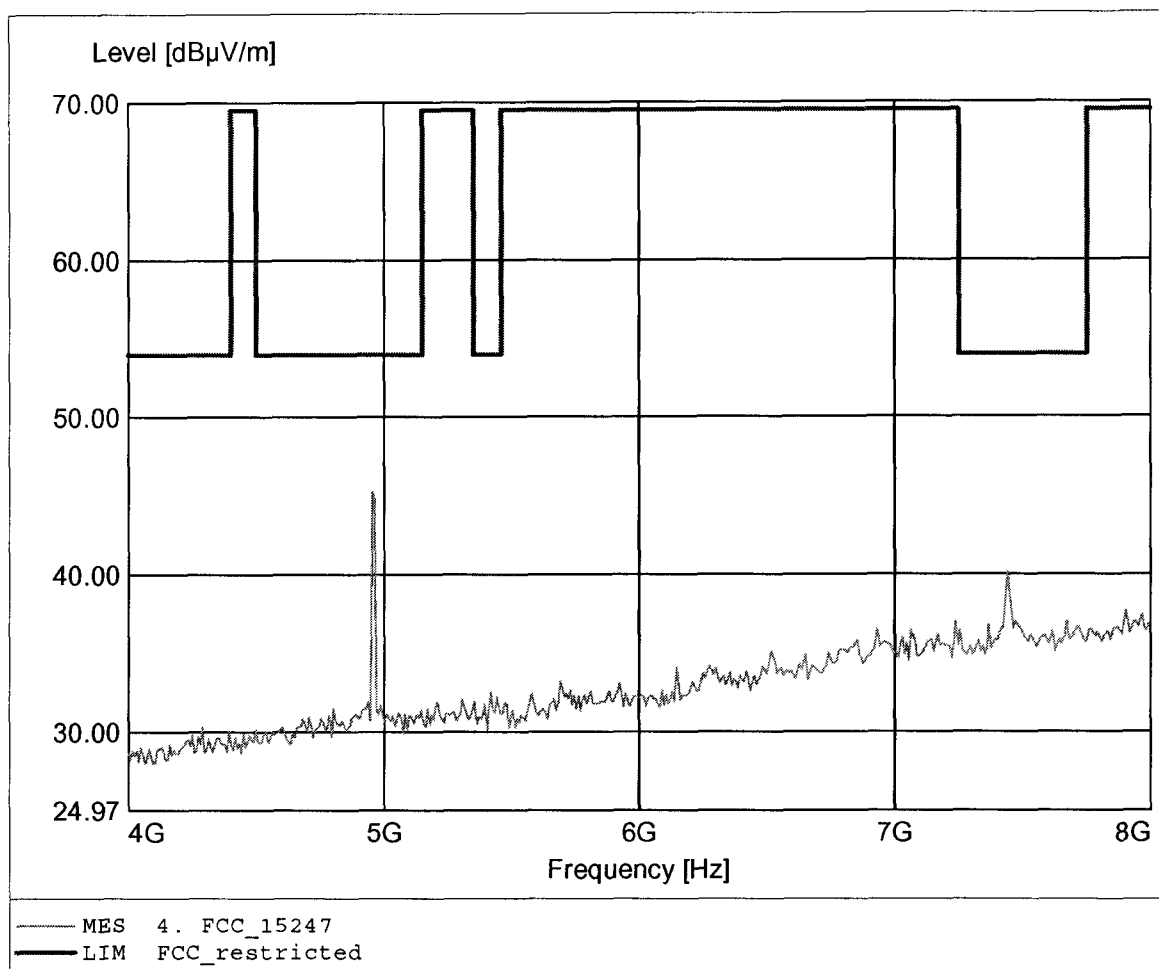

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.110GHz, Emax: 41.11dBμV/m, RBW: 1MHz

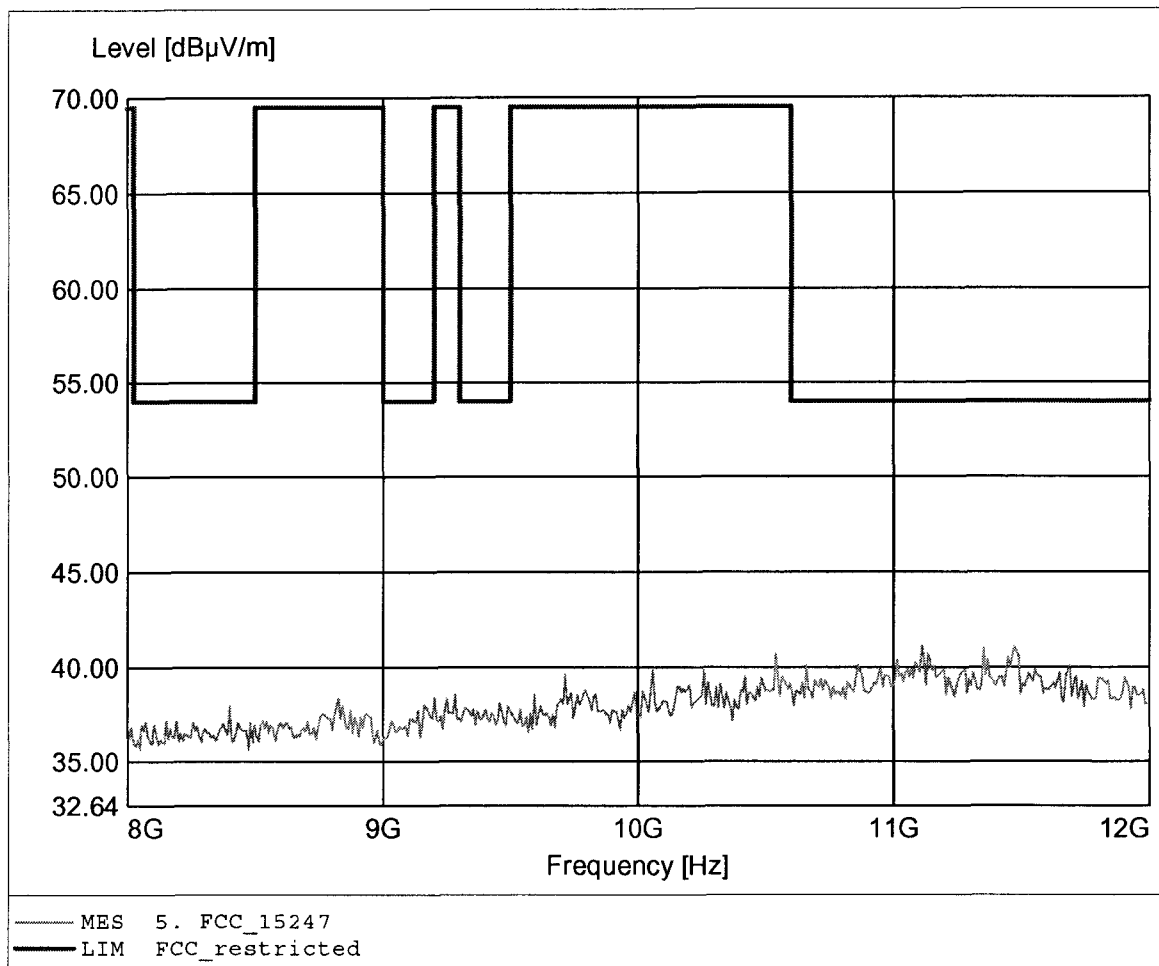

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.439GHz, Emax: 40.93dBμV/m, RBW: 1MHz

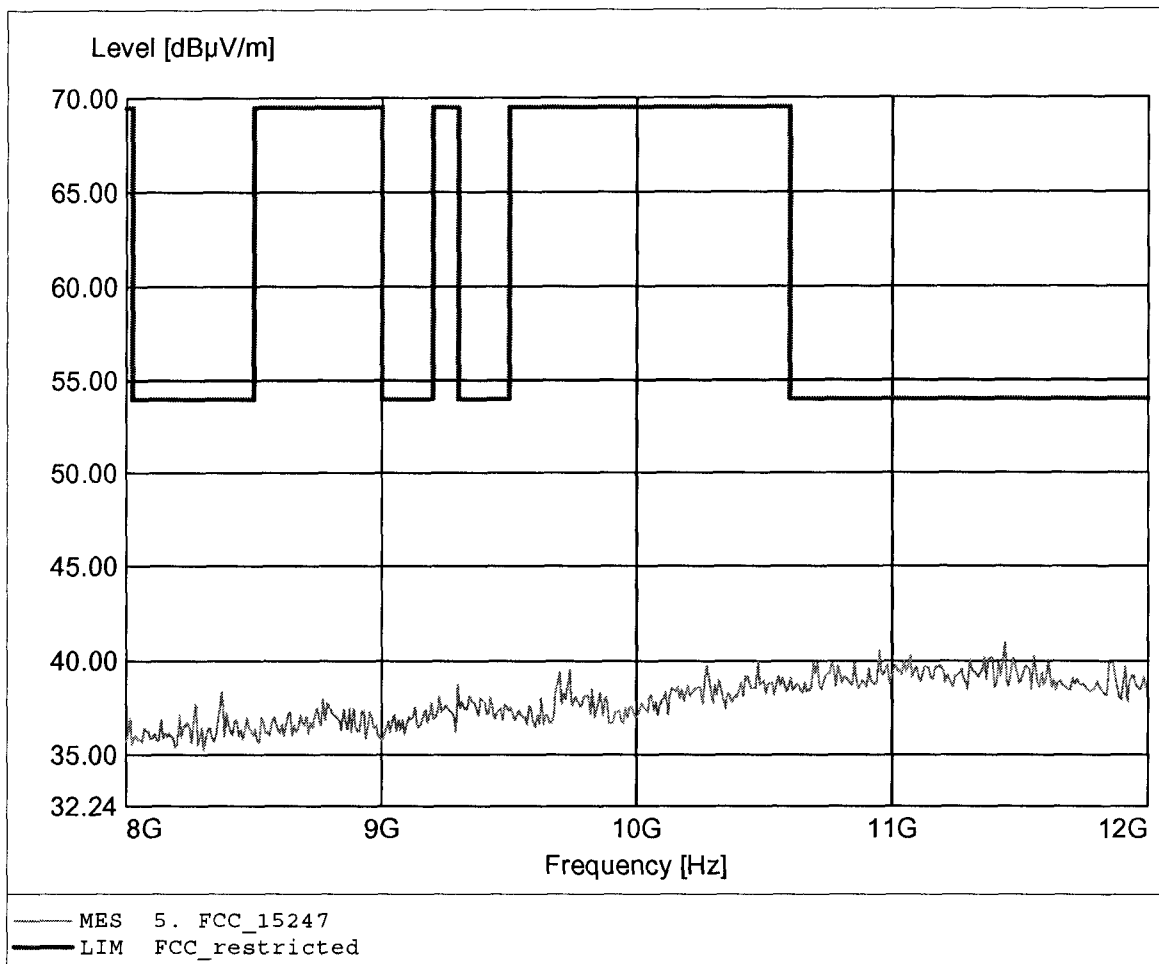

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.335GHz, Emax: 43.40dBµV/m, RBW: 1MHz

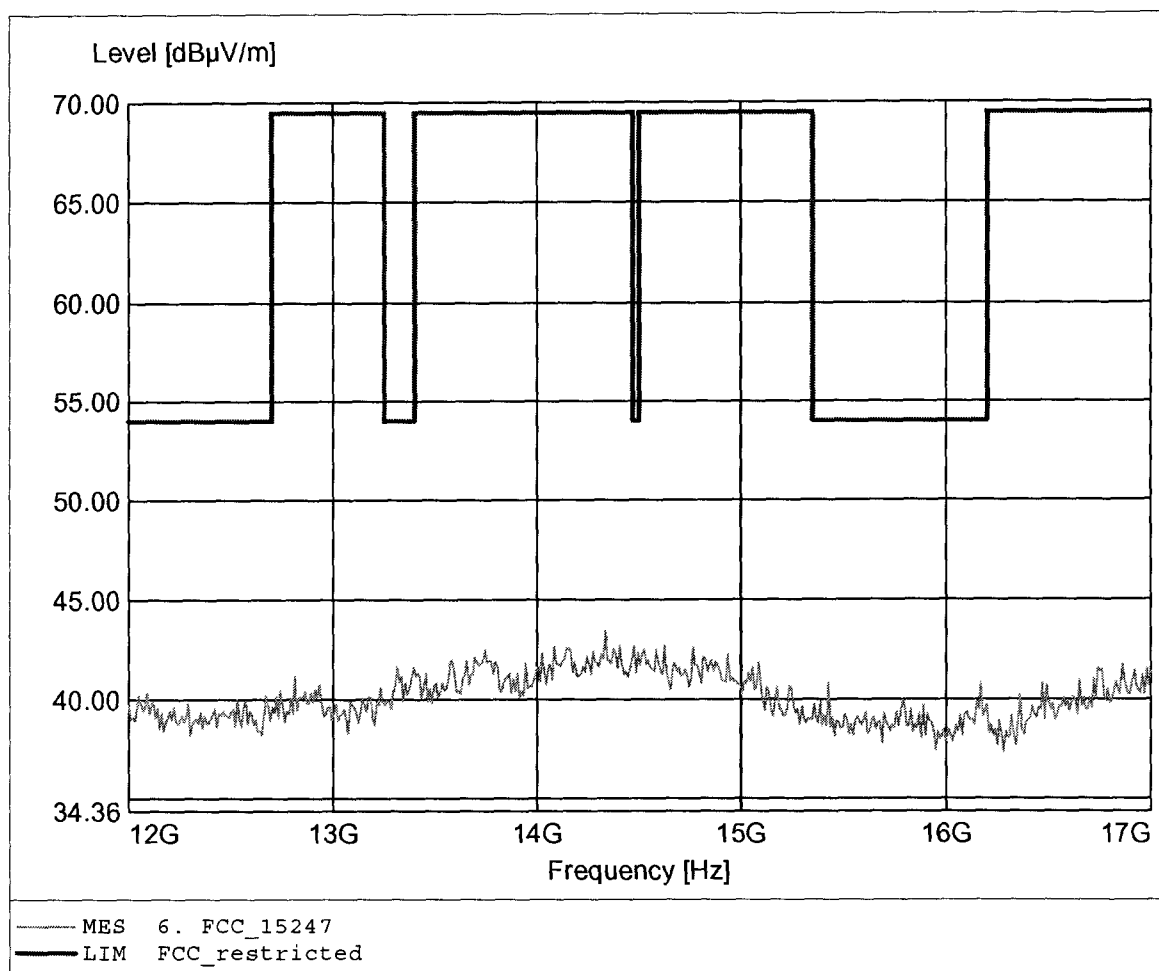

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.325GHz, Emax: 42.67dBµV/m, RBW: 1MHz

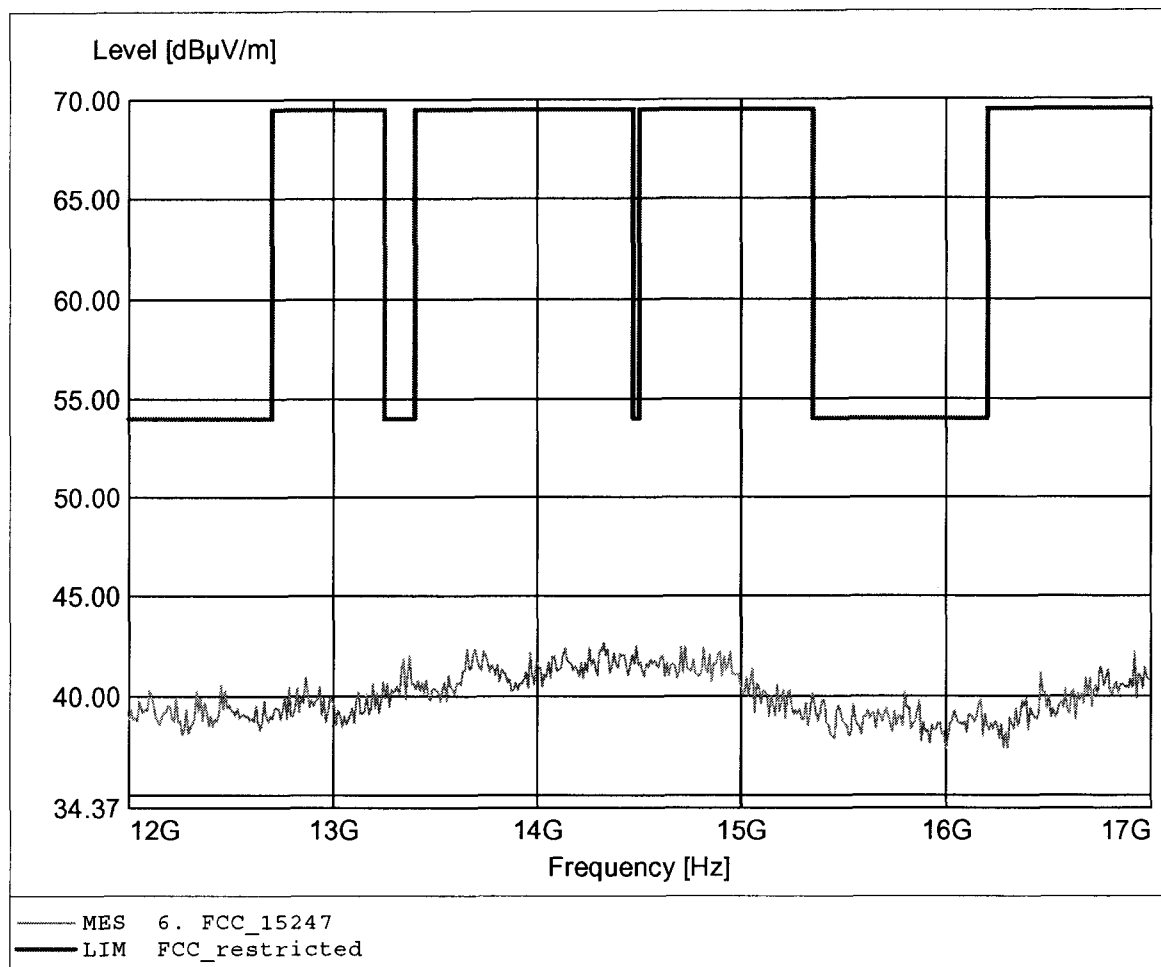

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 43.91dBµV/m, RBW: 1MHz

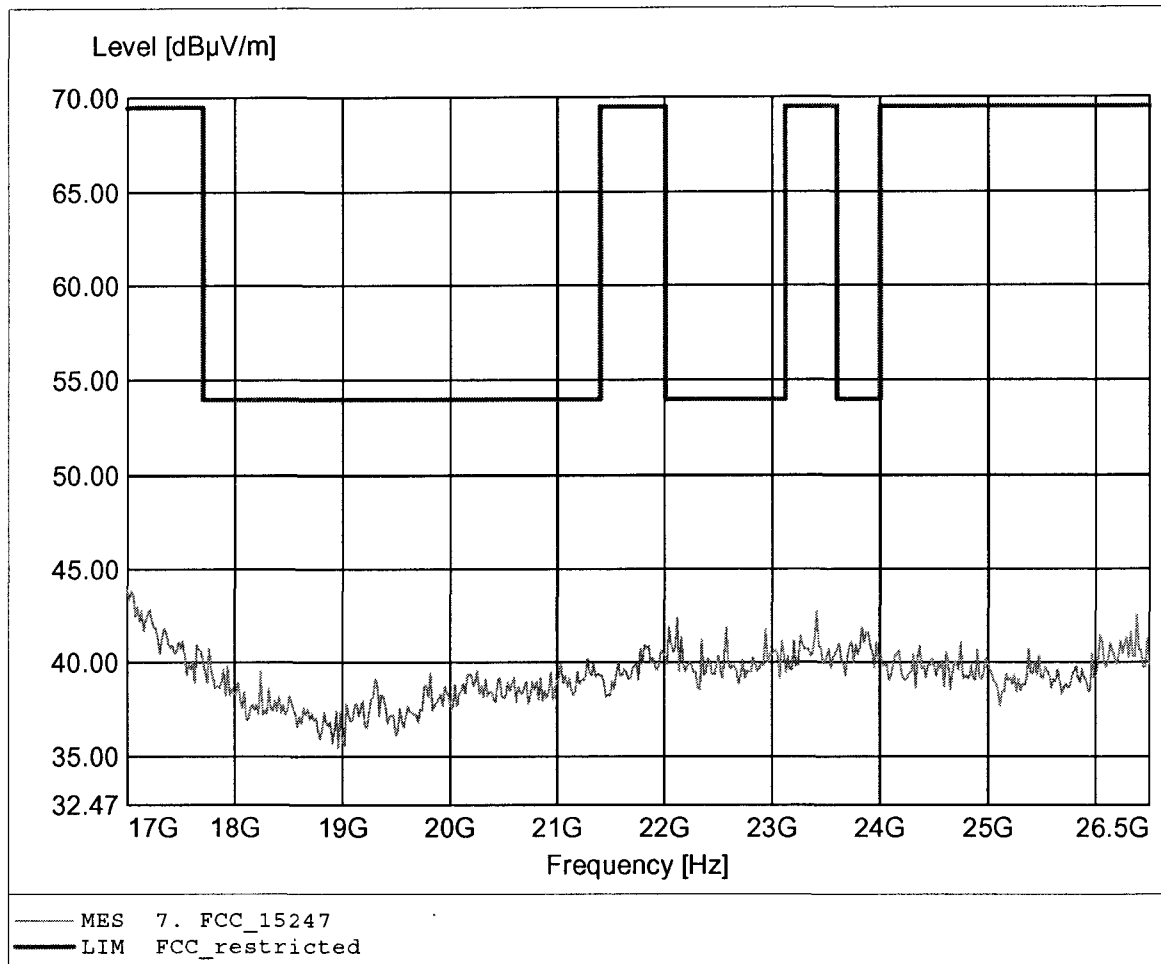

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: PEIKER acoustic GmbH & Co. KG
EUT: CK III SLR USA HFP
Model: CK III SLR USA HFP / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 12 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 44.06dBµV/m, RBW: 1MHz

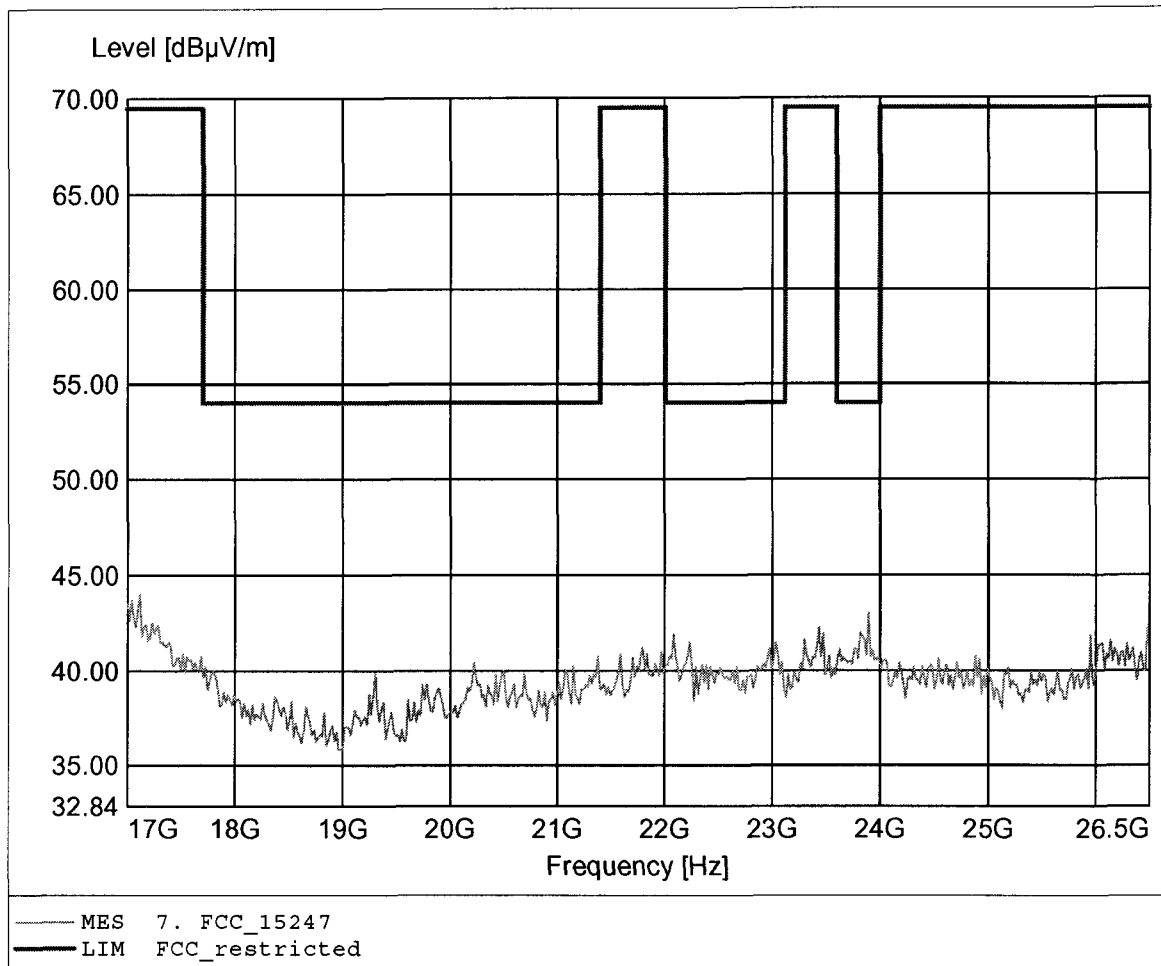


Appendix D

Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation

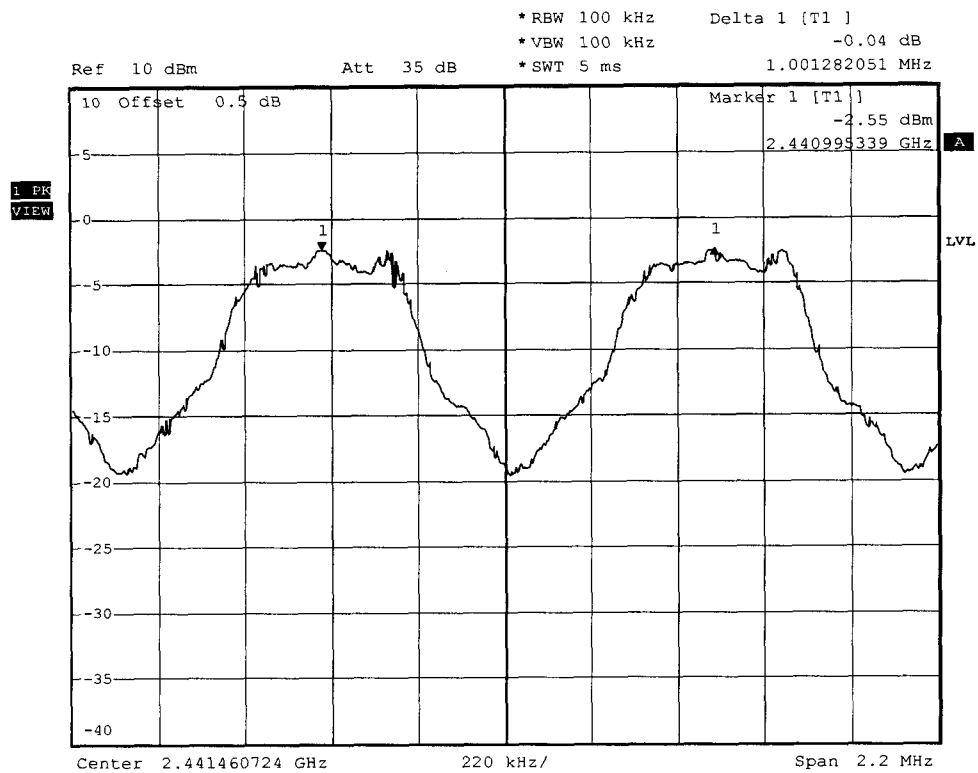


Carrier Frequency Separation

CK III SLR USA HFP

Date: 4.NOV.2005 12:24:36

Appendix F


Number of Hopping Frequencies

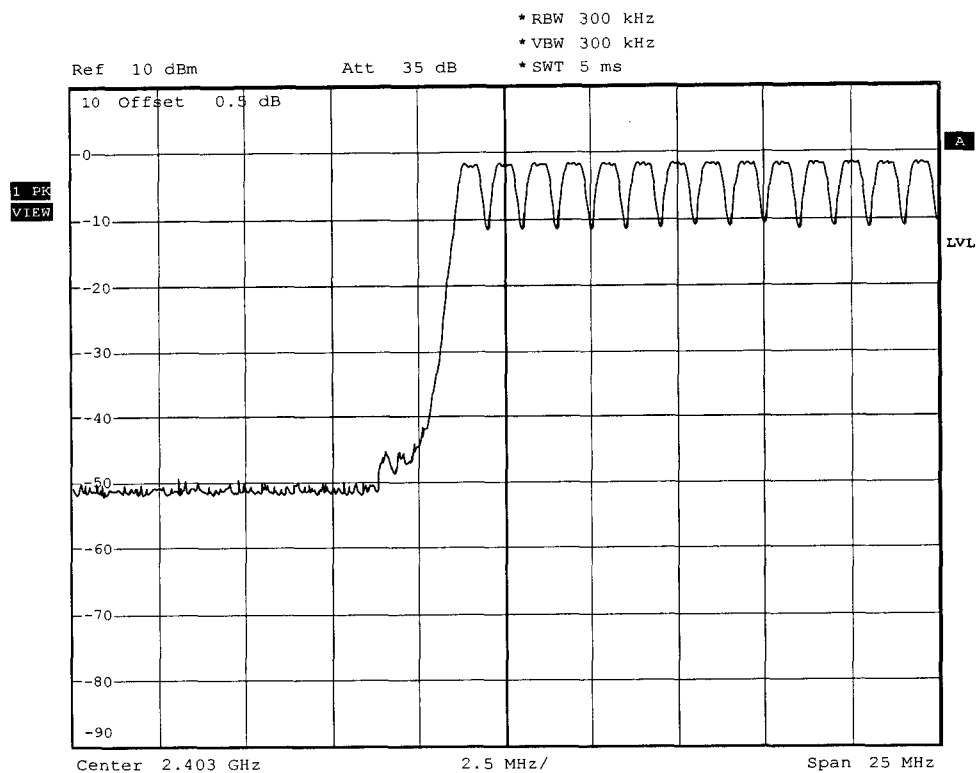

Number of Hopping Frequencies Ch.: 0-13

CK III SLR USA HFP


Date: 4.NOV.2005 12:57:12

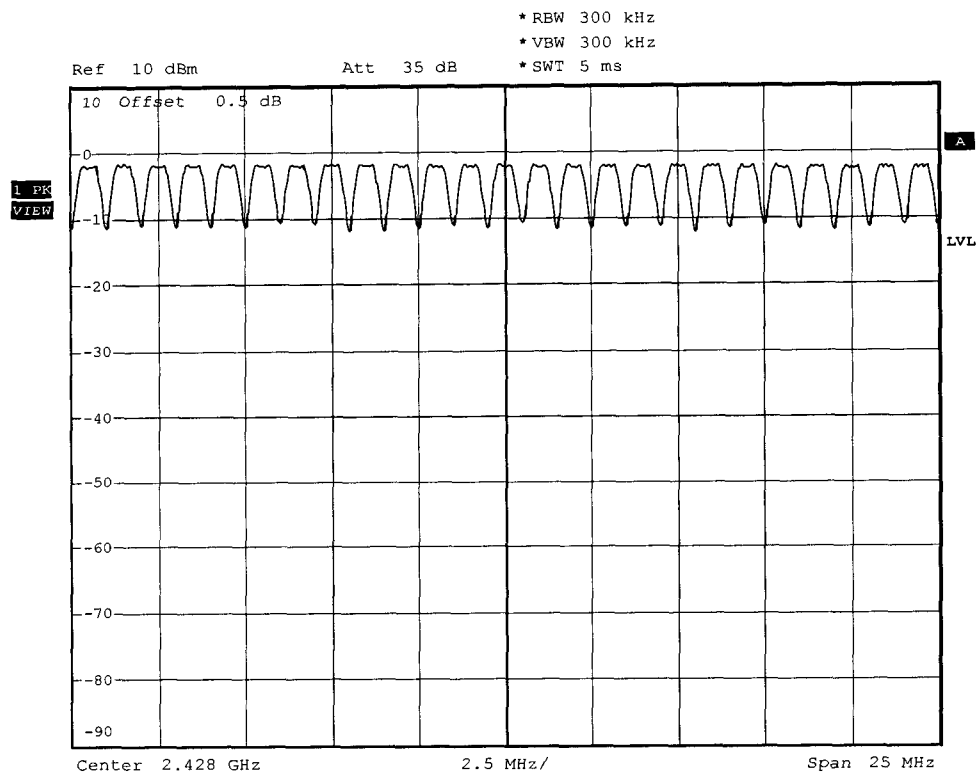

Number of Hopping Frequencies Ch.: 14-38

CK III SLR USA HFP


Date: 4.NOV.2005 13:00:02

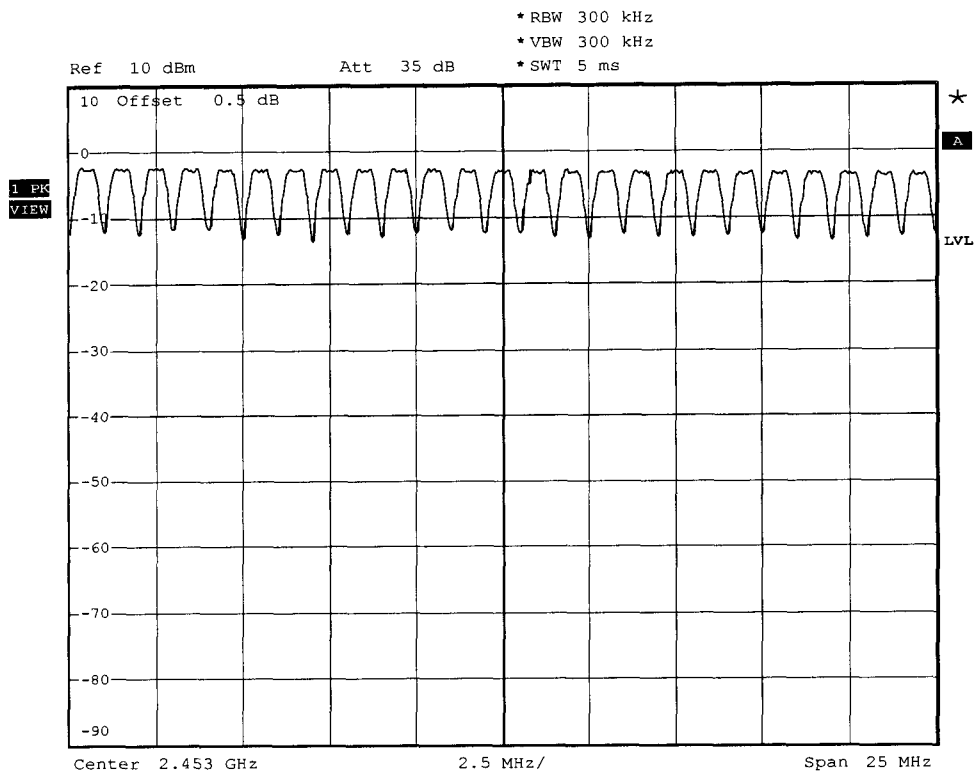

Number of Hopping Frequencies Ch.: 39-63

CK III SLR USA HFP


Date: 4.NOV.2005 13:01:31

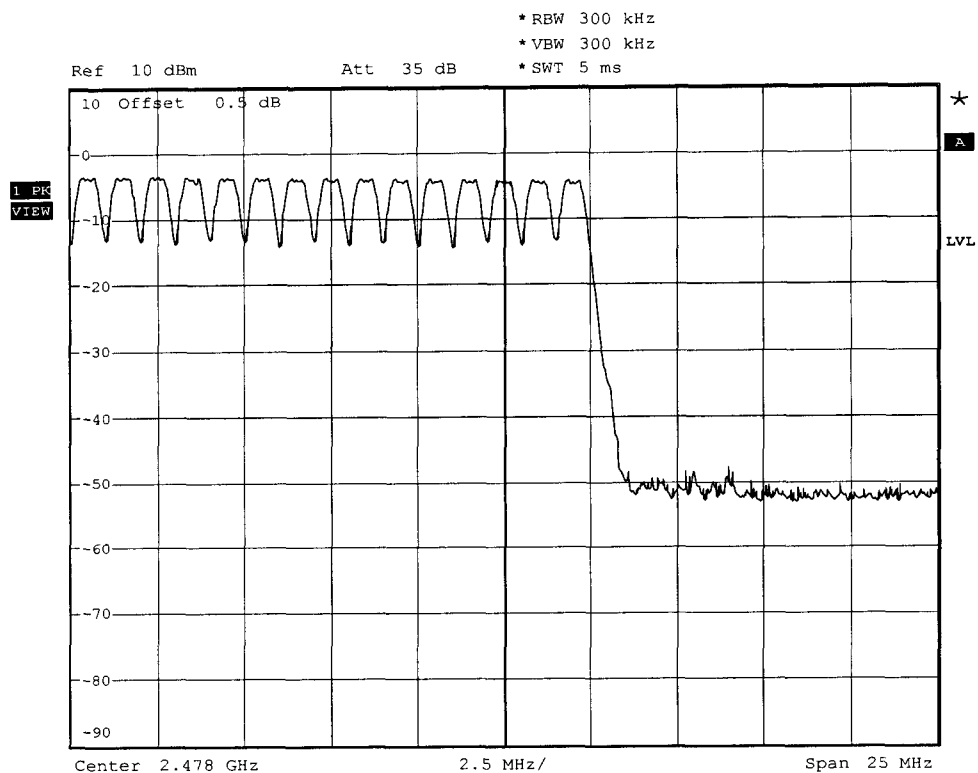

Number of Hopping Frequencies Ch.: 64-78

CK III SLR USA HFP


Date: 4.NOV.2005 13:03:01

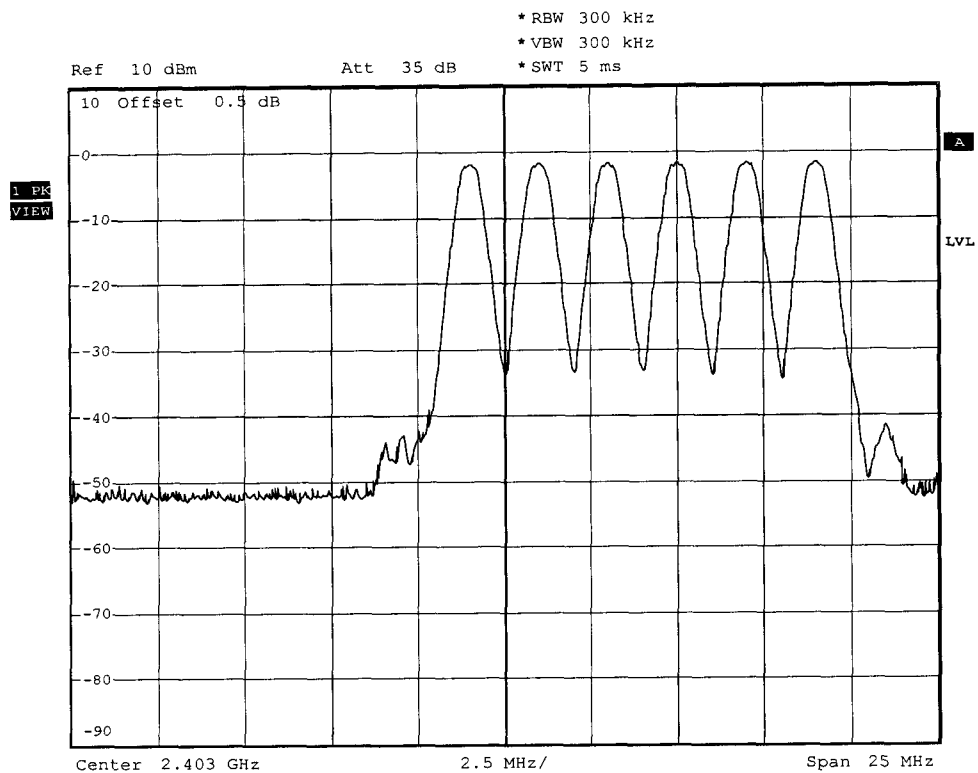

Number of Hopping Frequencies (Master Inquiry Mode)

CK III SLR USA HFP


Date: 4.NOV.2005 13:47:40

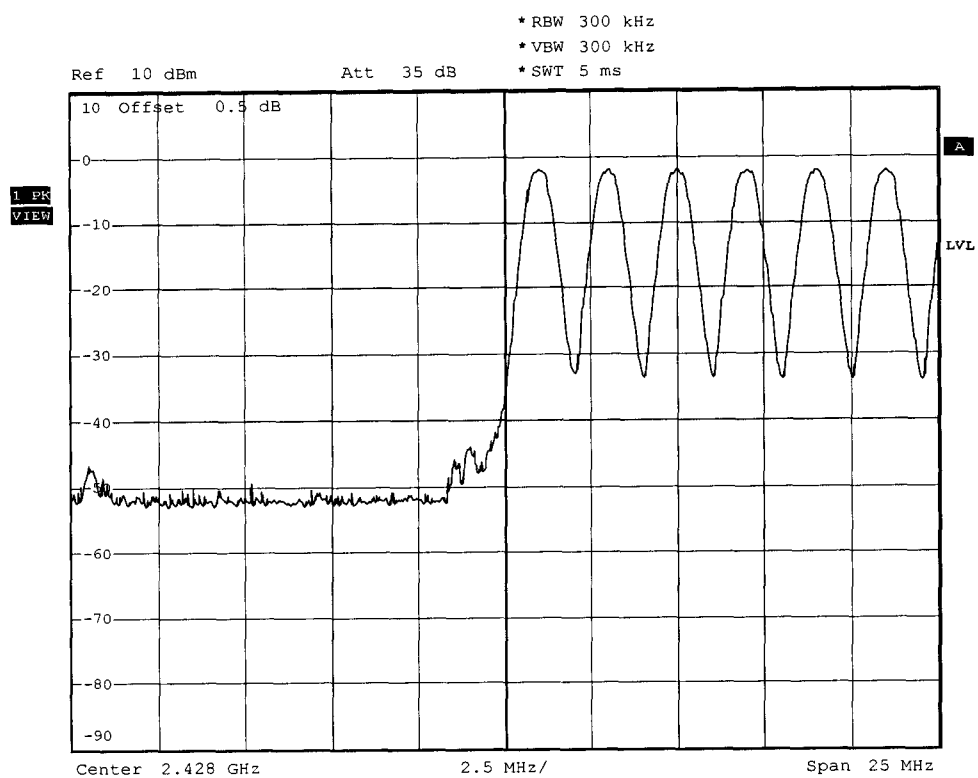

Number of Hopping Frequencies (Master Inquiry Mode)

CK III SLR USA HFP


Date: 4.NOV.2005 13:50:01

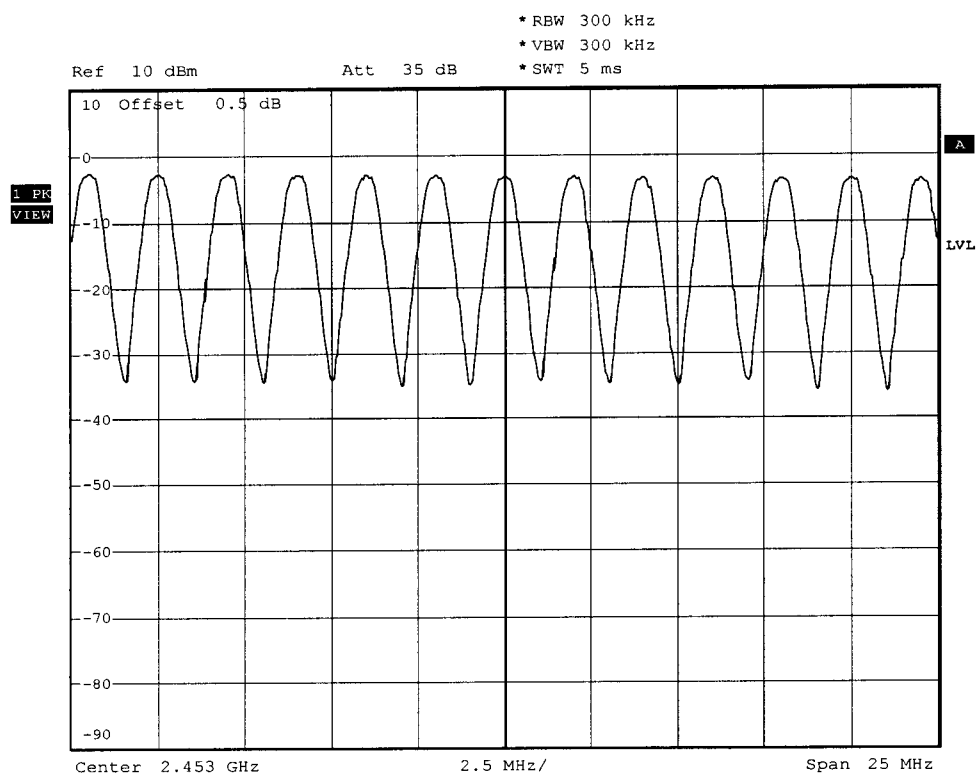

Number of Hopping Frequencies (Master Inquiry Mode)

CK III SLR USA HFP

Date: 4.NOV.2005 13:51:48

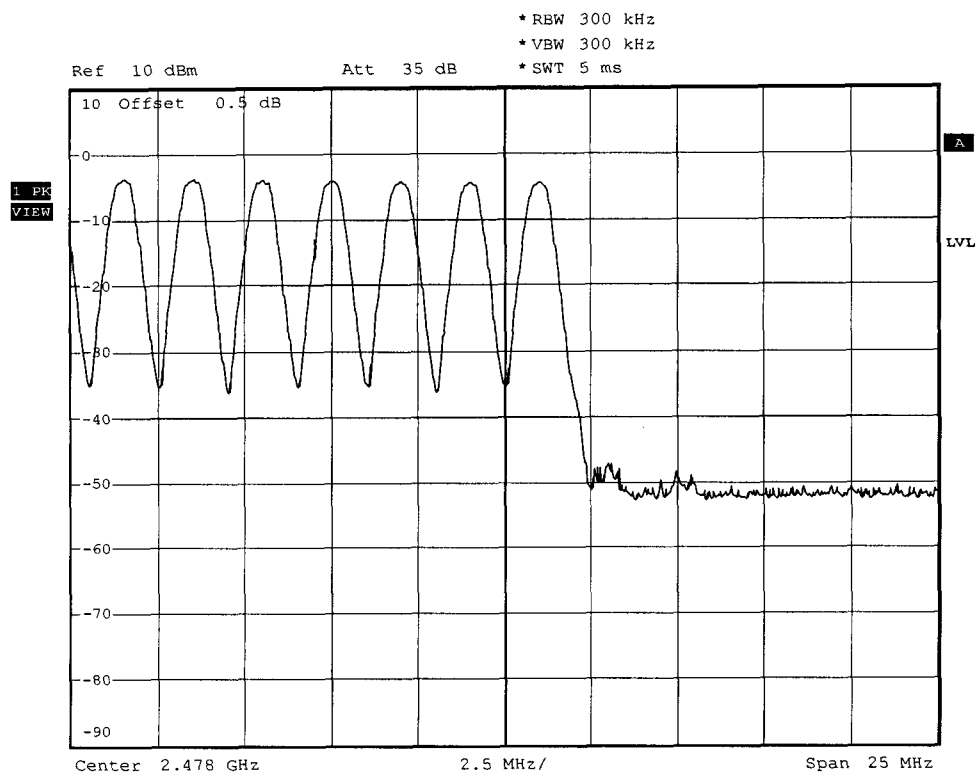


Number of Hopping Frequencies (Master Inquiry Mode)

CK III SLR USA HFP

Date: 4.NOV.2005 13:53:41

Appendix G


Time of Occupancy (Dwell Time)

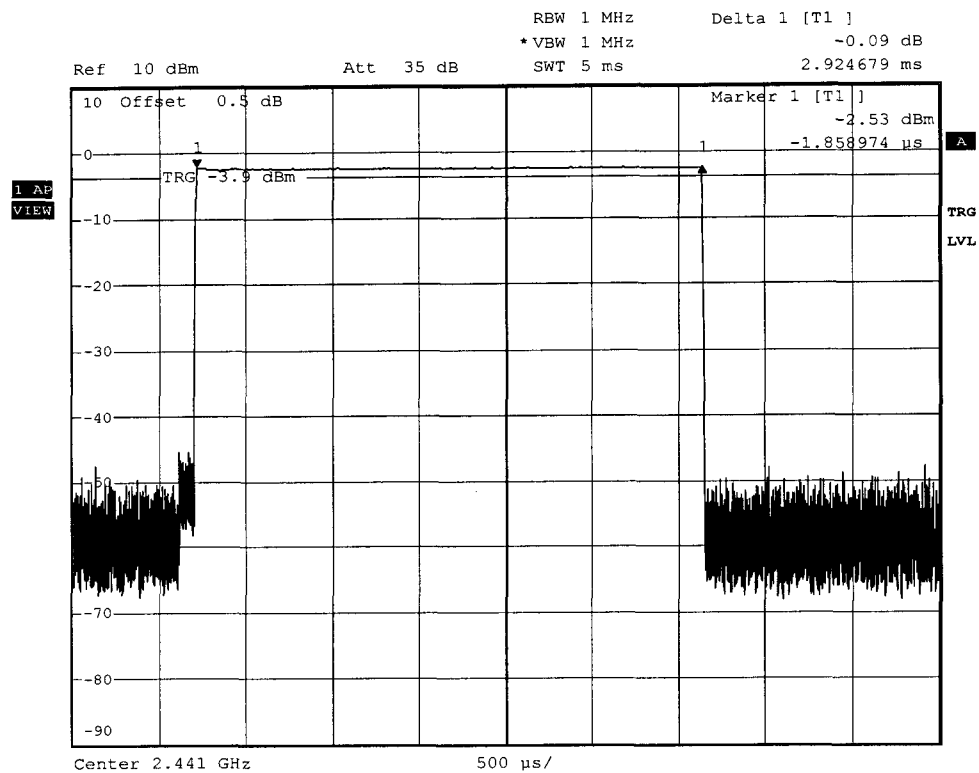

Time of Occupancy (Hopping DH5) 64 events*2.925ms=187.200 ms

CK III SLR USA HFP


Date: 4.NOV.2005 13:42:38

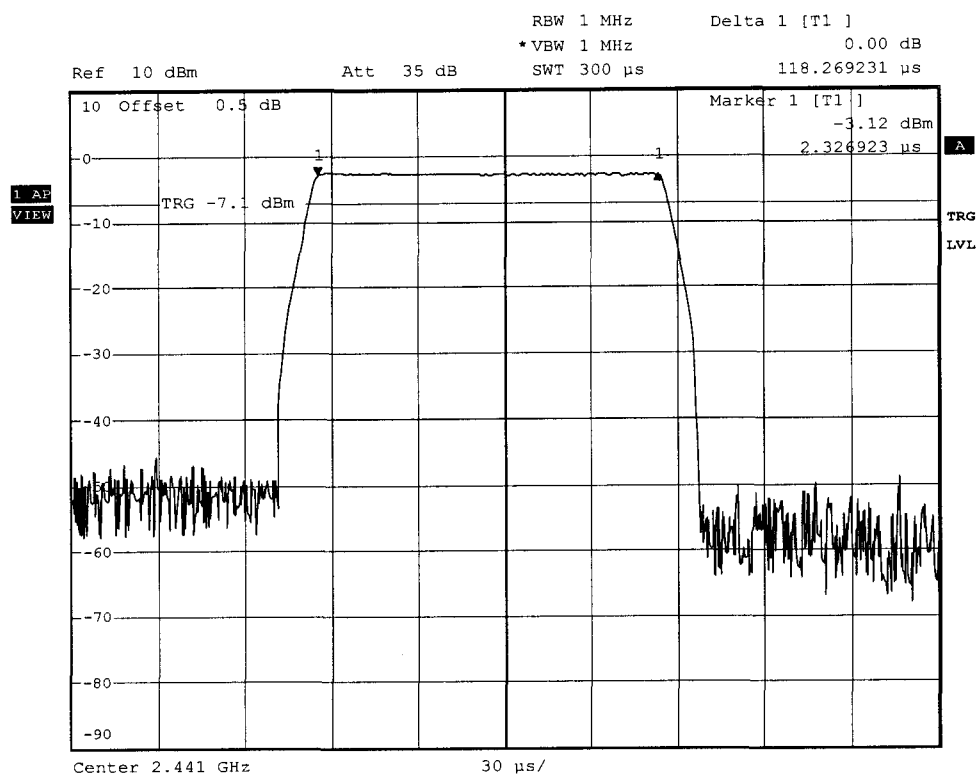

Time of Occupancy (Inquiry mode) 317 events*0.118ms=37.406ms

CK III SLR USA HFP

Date: 4.NOV.2005 14:03:32

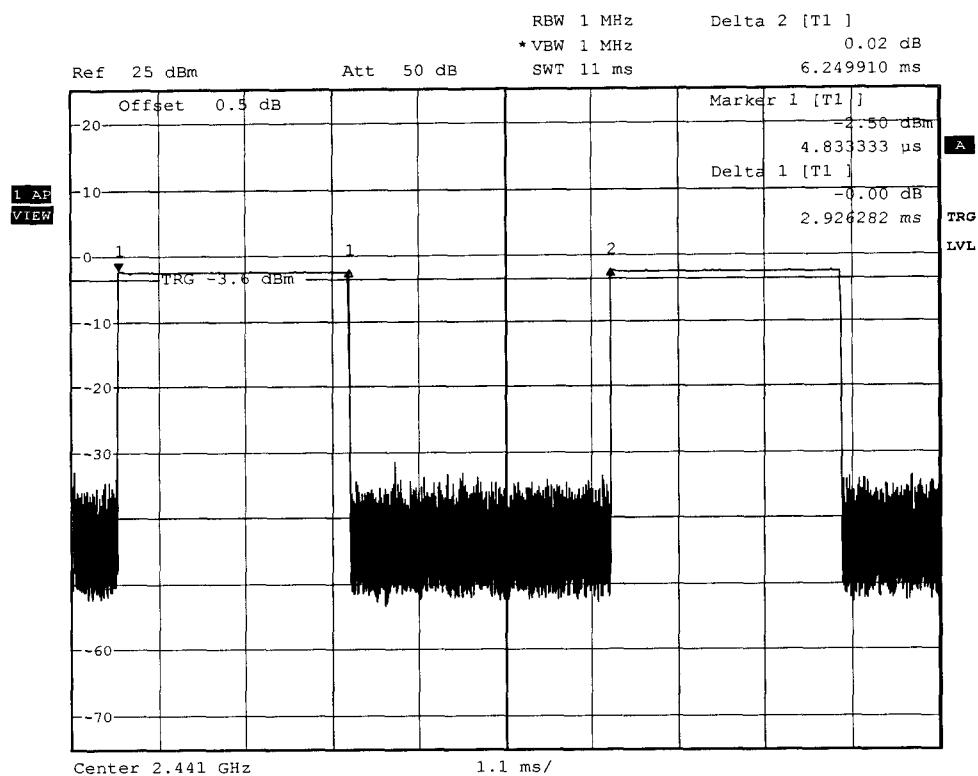


Duty Cycle

CK III SLR USA HFP


Date: 4.NOV.2005 11:39:10

Appendix H


20dB Bandwidth

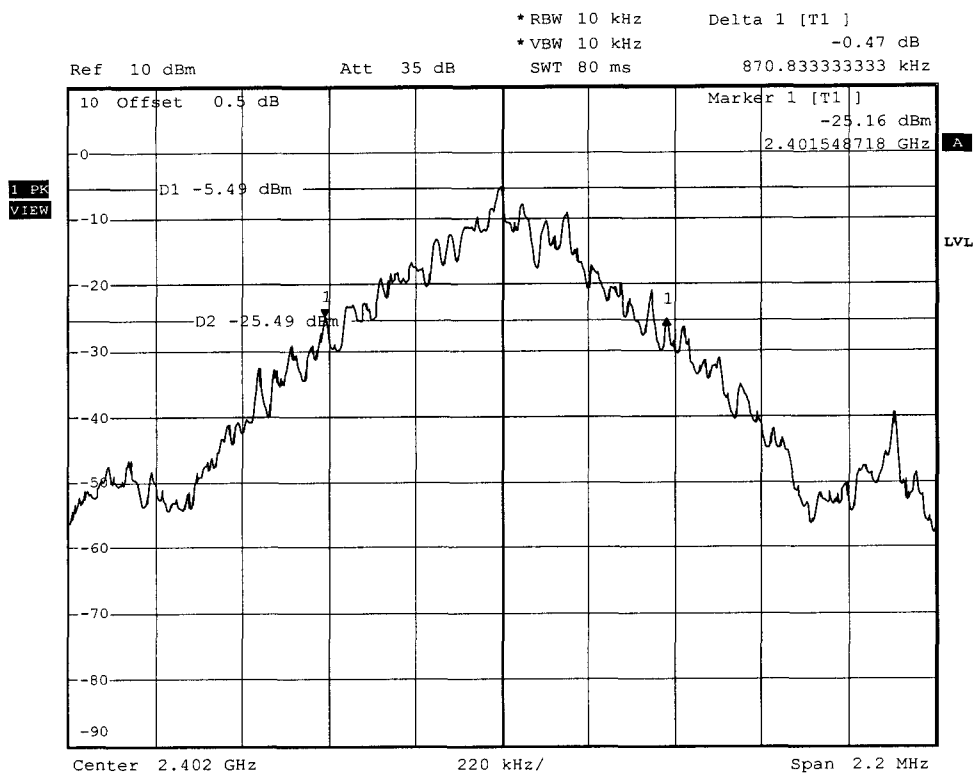

-20 dB Bandwidth Ch.: 0
 CK III SLR USA HFP
 Date: 4.NOV.2005 09:45:50

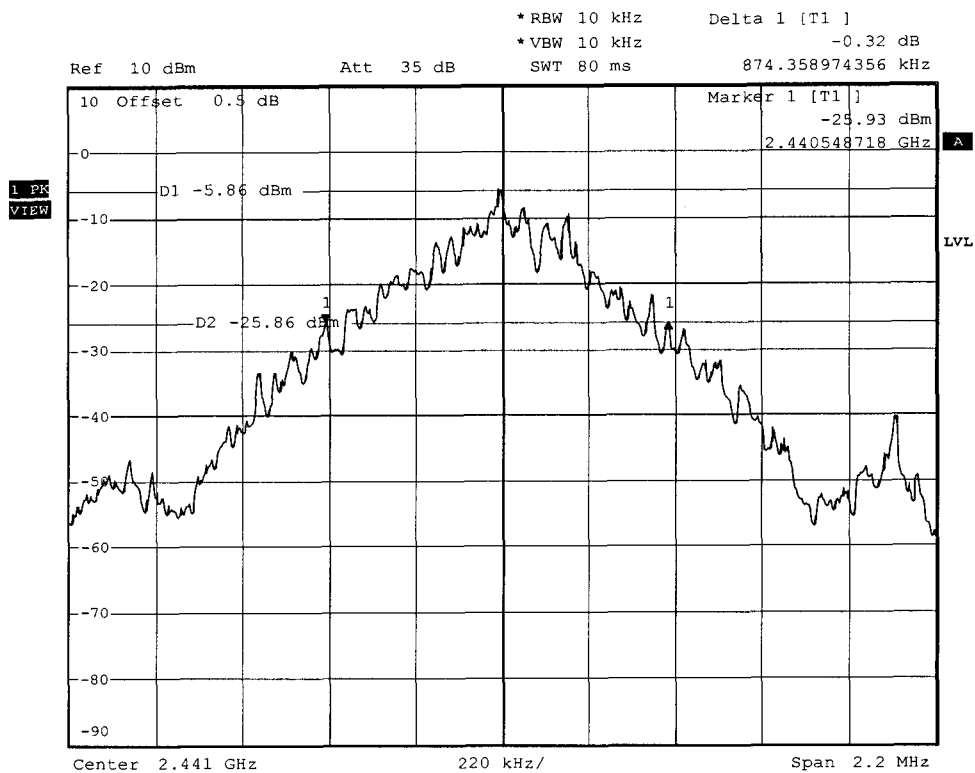


-20 dB Bandwidth Ch.: 39
CK III SLR USA HFP
Date: 4.NOV.2005 09:44:04

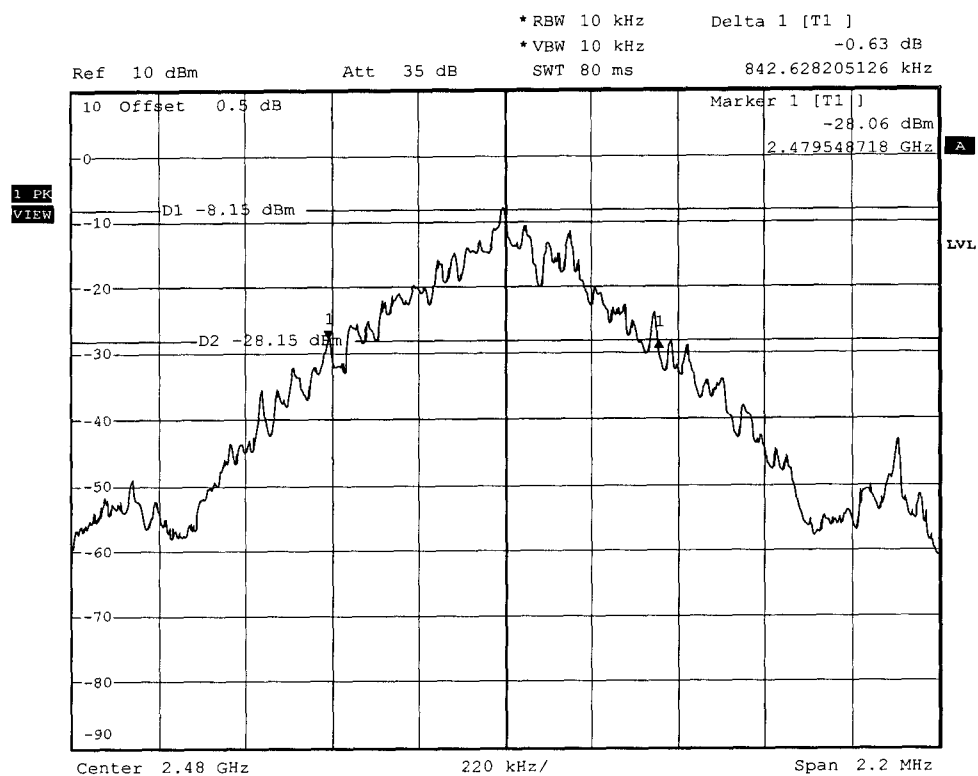

-20 dB Bandwidth Ch.: 78
CK III SLR USA HFP
Date: 4.NOV.2005 09:41:55

Appendix I


Band-edge Compliance of RF Emissions

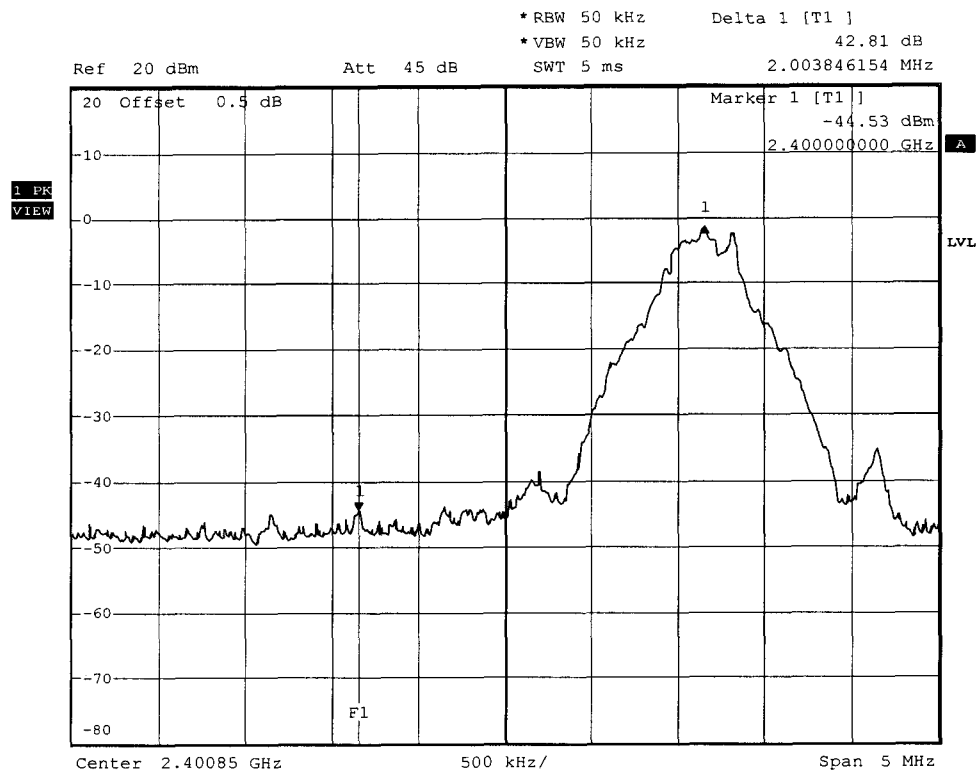


Band-edge Compliance (conducted, single frequency) Ch.: 0

CK III SLR USA HFP

Date: 4.NOV.2005 10:39:54

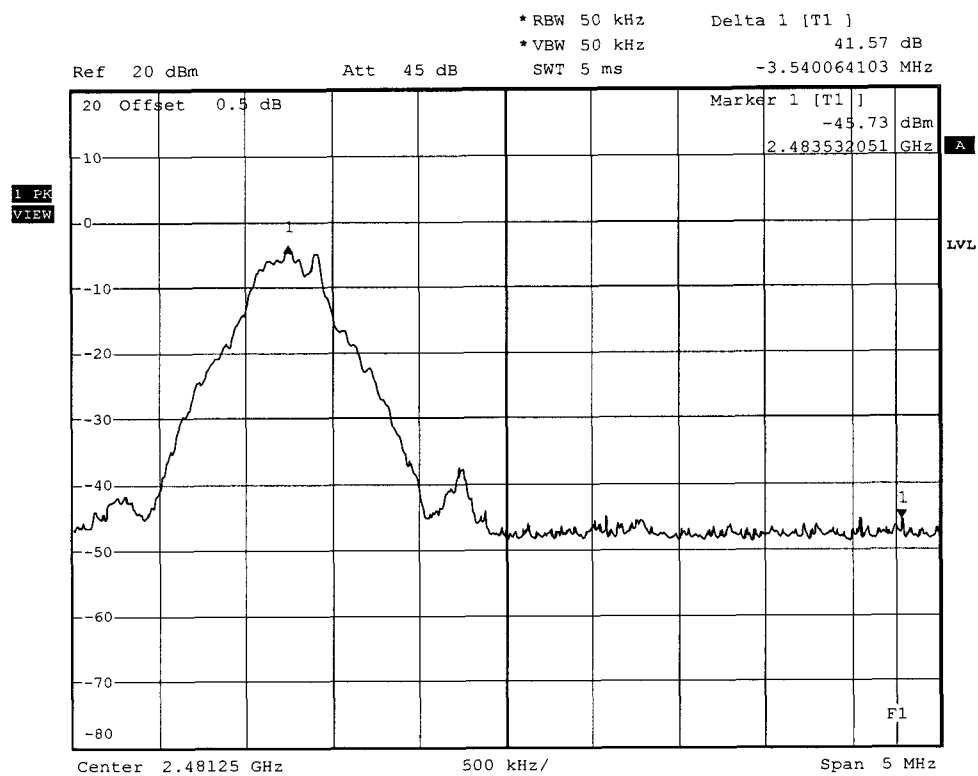


Band-edge Compliance (conducted, single frequency) Ch.: 78
CK III SLR USA HFP
Date: 4.NOV.2005 10:58:18

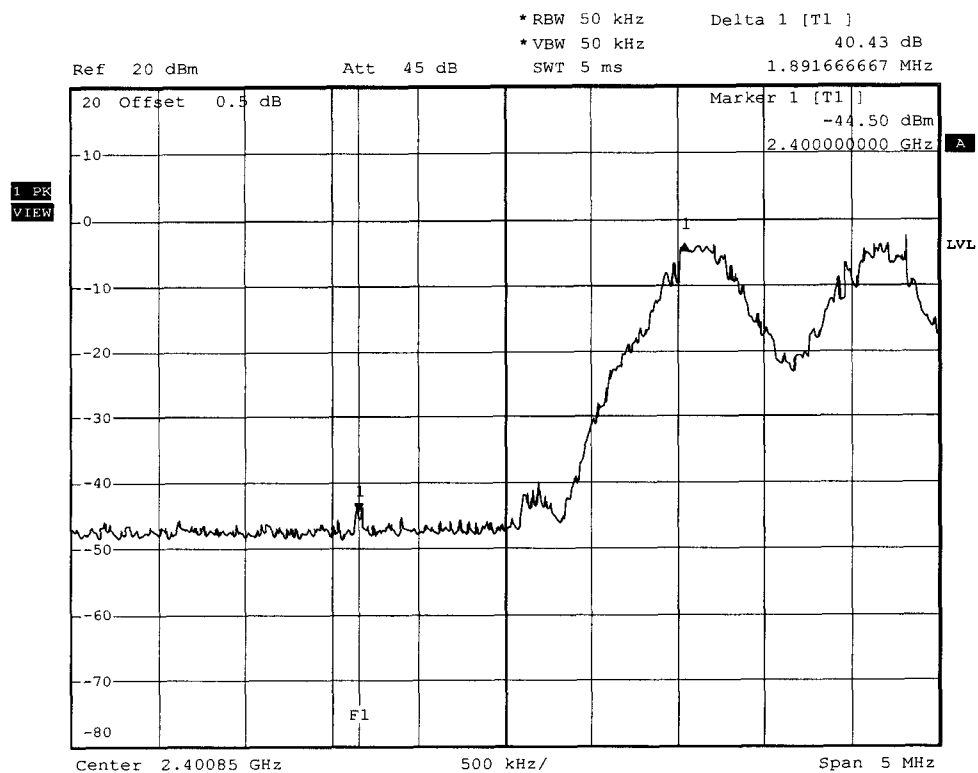

Band-edge Compliance (conducted, hopping mode) Ch.: 0

CK III SLR USA HFP

Date: 4.NOV.2005 10:44:35

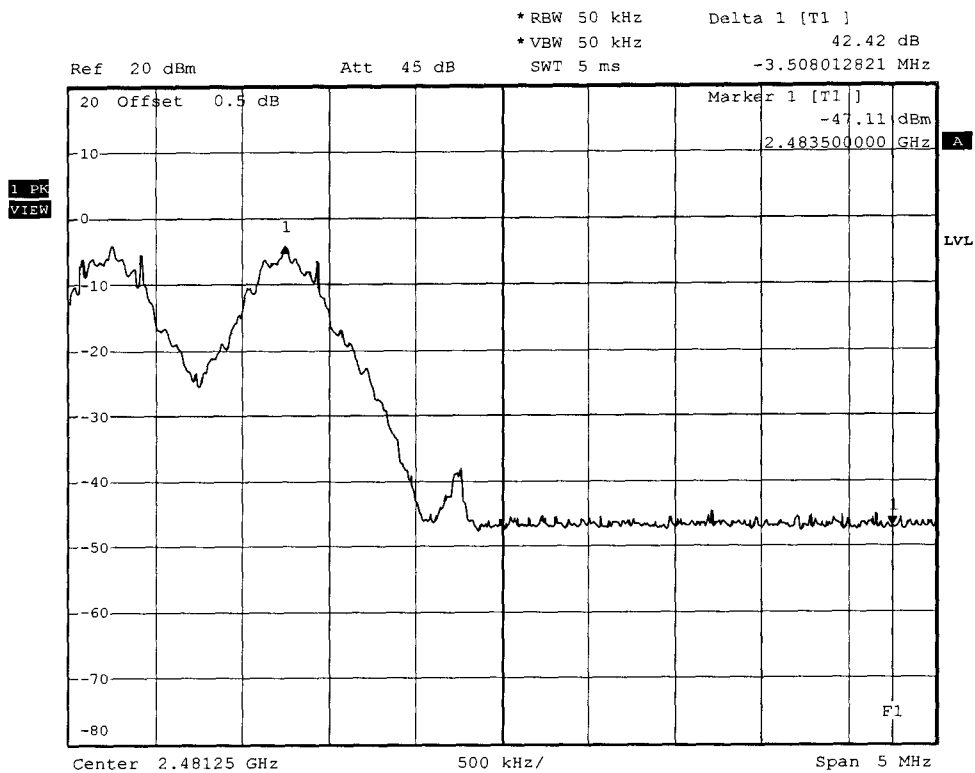

Band-edge Compliance (conducted, hopping mode) Ch.: 78

CK III SLR USA HFP

Date: 4.NOV.2005 10:56:06

Appendix J

Conducted Measurement at (AC) Power Line