



Appendix A: Test Results of Bluetooth LE & Conducted Emission

APPENDIX A: TEST RESULTS OF BLUETOOTH LE & CONDUCTED EMISSION.....	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX A.2: TEST RESULTS OF 6dB BANDWIDTH	5
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH.....	8
APPENDIX A.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	11
<i>Band Edge</i>	<i>11</i>
<i>Conducted Spurious Emission</i>	<i>13</i>
APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	20
<i>30 MHz - 1GHz</i>	<i>20</i>
<i>1GHz - 18GHz</i>	<i>22</i>
APPENDIX A.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	34
APPENDIX A.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	38

Appendix A.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-11.21	≤8.00	PASS
		2440	-12.37	≤8.00	PASS
		2480	-14.11	≤8.00	PASS
BLE_2M	Ant1	2402	-13.7	≤8.00	PASS
		2440	-14.85	≤8.00	PASS
		2480	-16.56	≤8.00	PASS

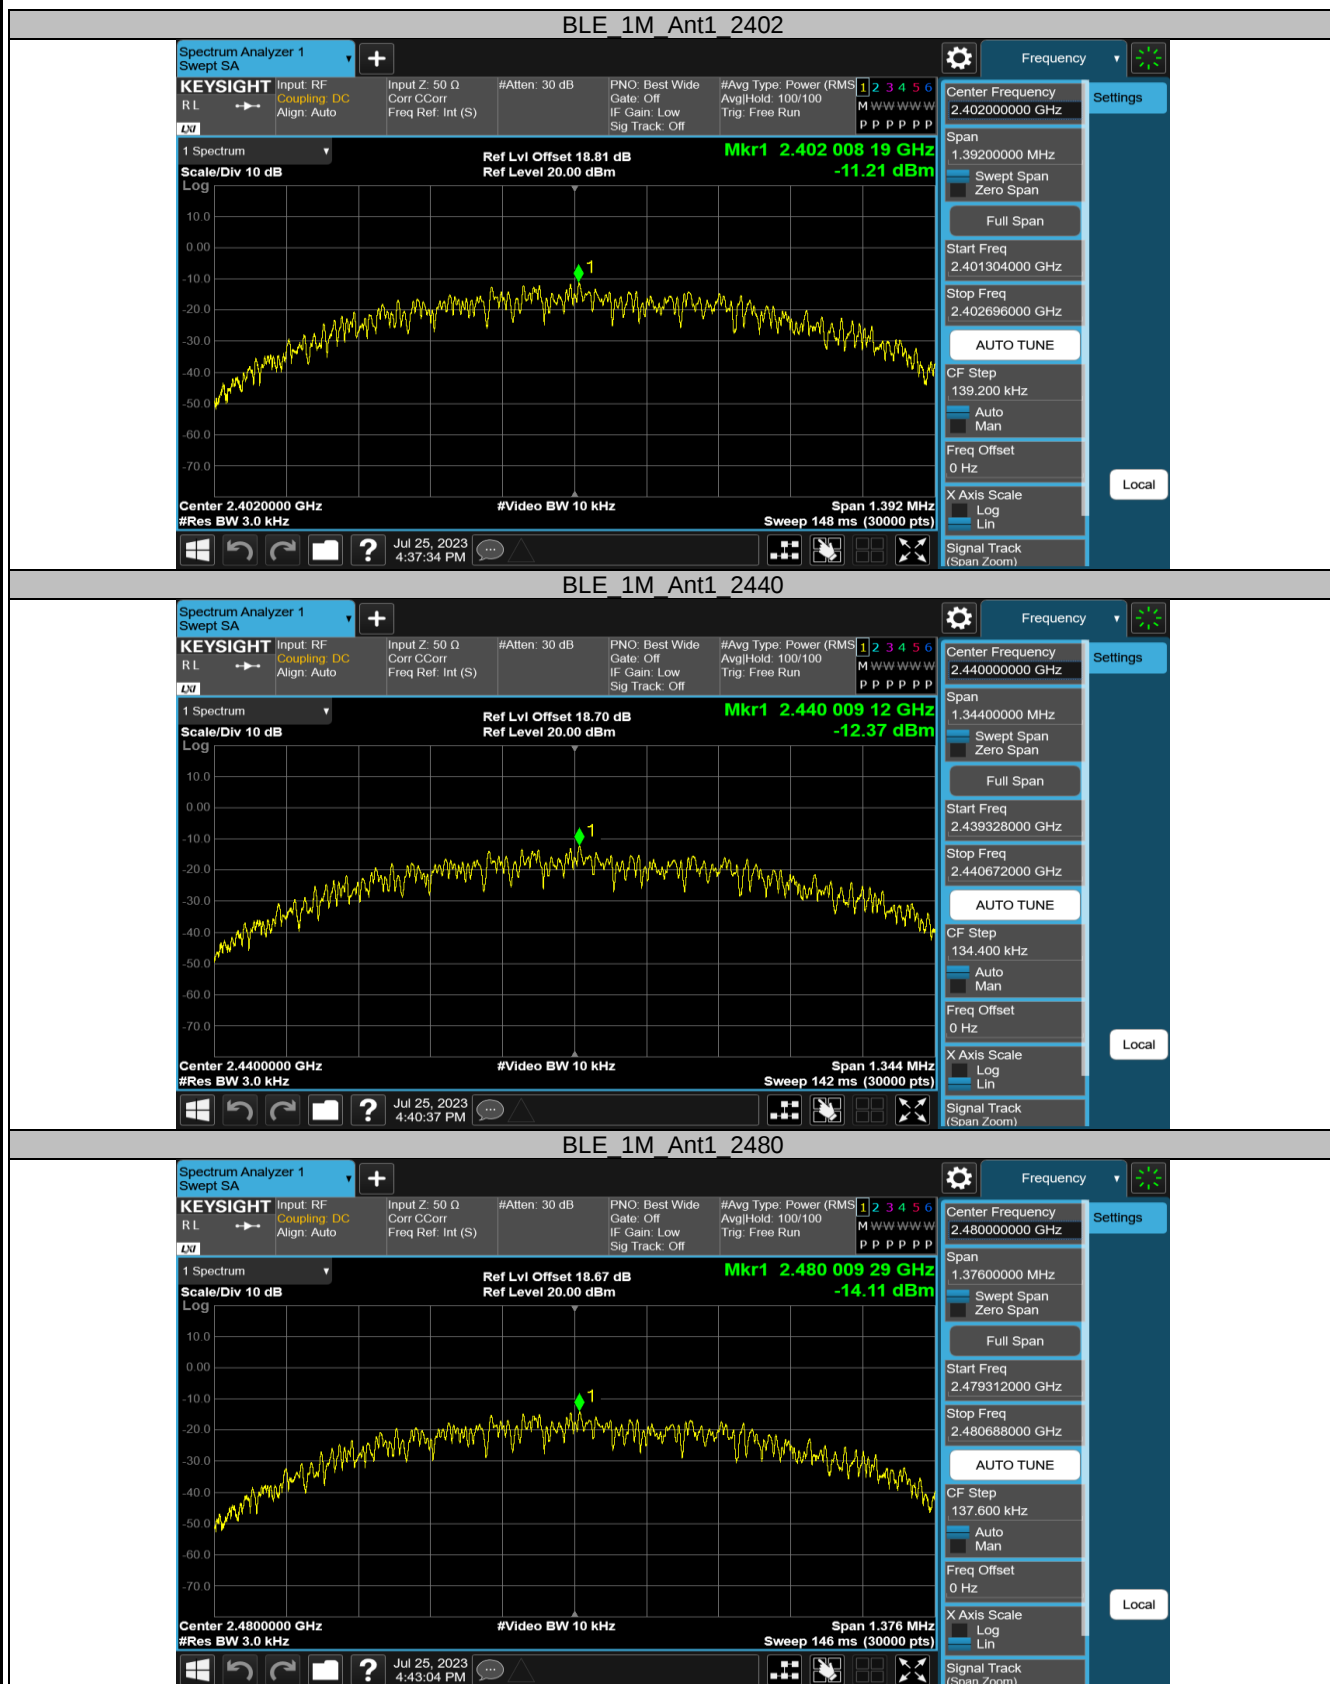


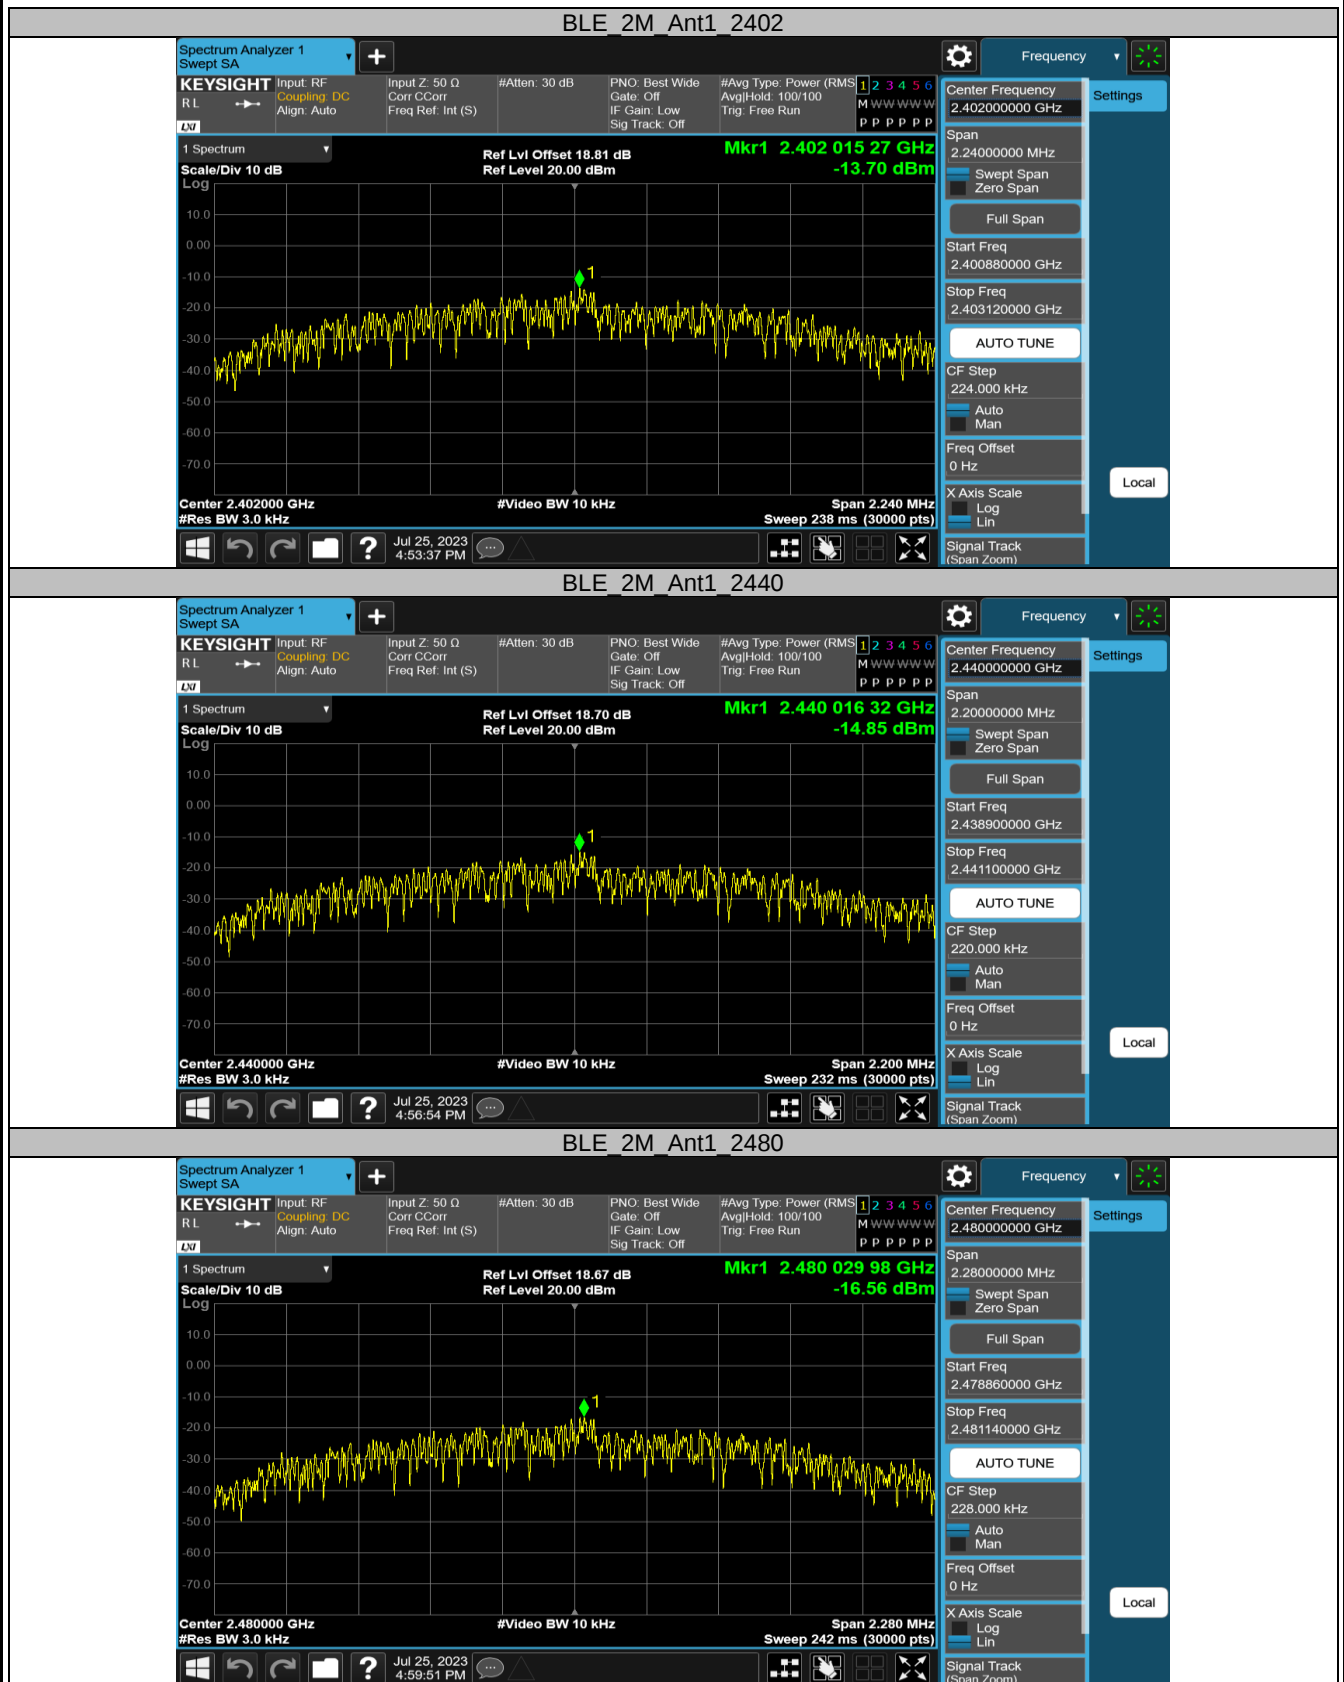

Appendix A.2: Test Results of 6dB Bandwidth


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.696	2401.680	2402.376	0.5	PASS
		2440	0.672	2439.700	2440.372	0.5	PASS
		2480	0.688	2479.676	2480.364	0.5	PASS
BLE_2M	Ant1	2402	1.120	2401.468	2402.588	0.5	PASS
		2440	1.100	2439.476	2440.576	0.5	PASS
		2480	1.140	2479.476	2480.616	0.5	PASS




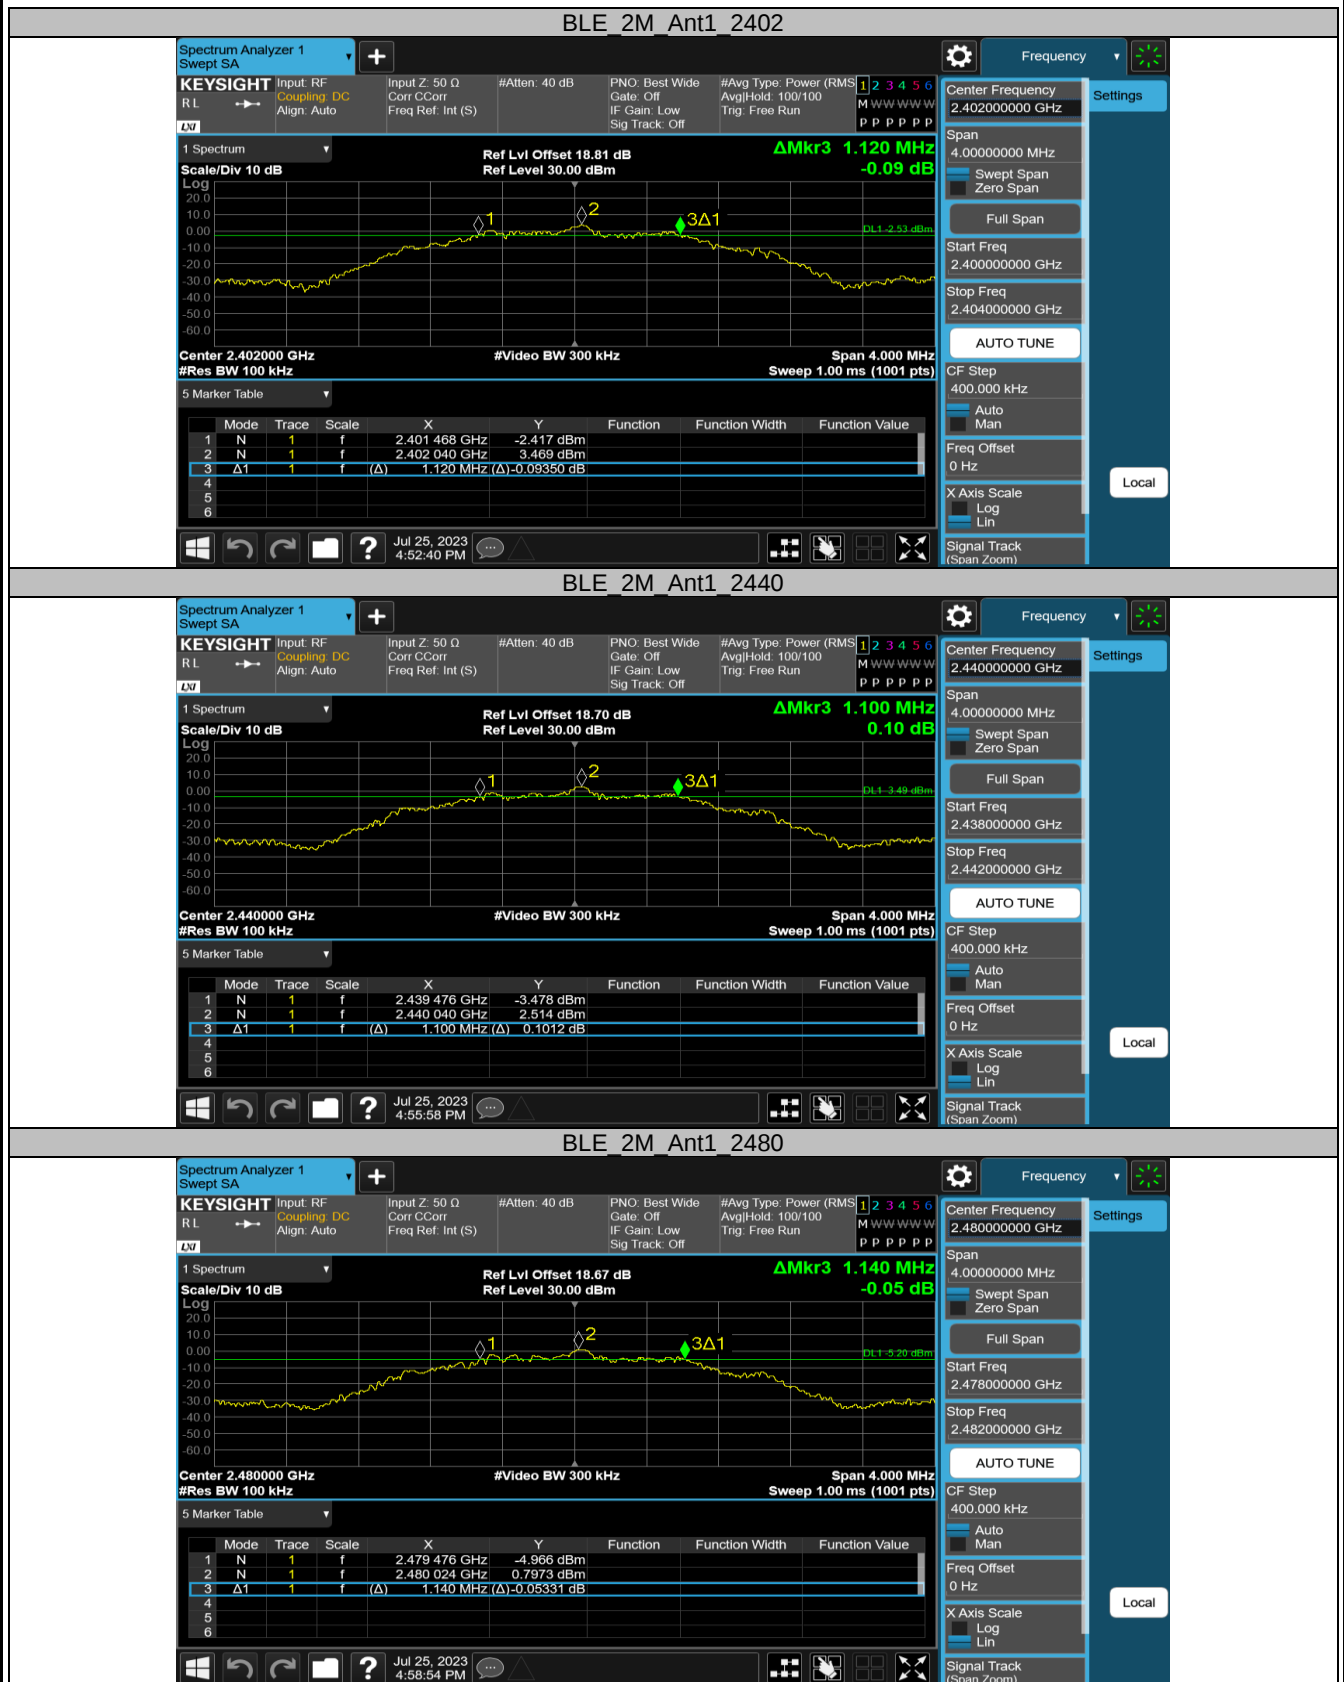

Appendix A.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0629	2401.5065	2402.5694	---	PASS
		2440	1.0675	2439.5059	2440.5734	---	PASS
		2480	1.0598	2479.5107	2480.5705	---	PASS
BLE_2M	Ant1	2402	2.0628	2401.0198	2403.0826	---	PASS
		2440	2.0756	2439.0092	2441.0848	---	PASS
		2480	2.0656	2479.0196	2481.0852	---	PASS

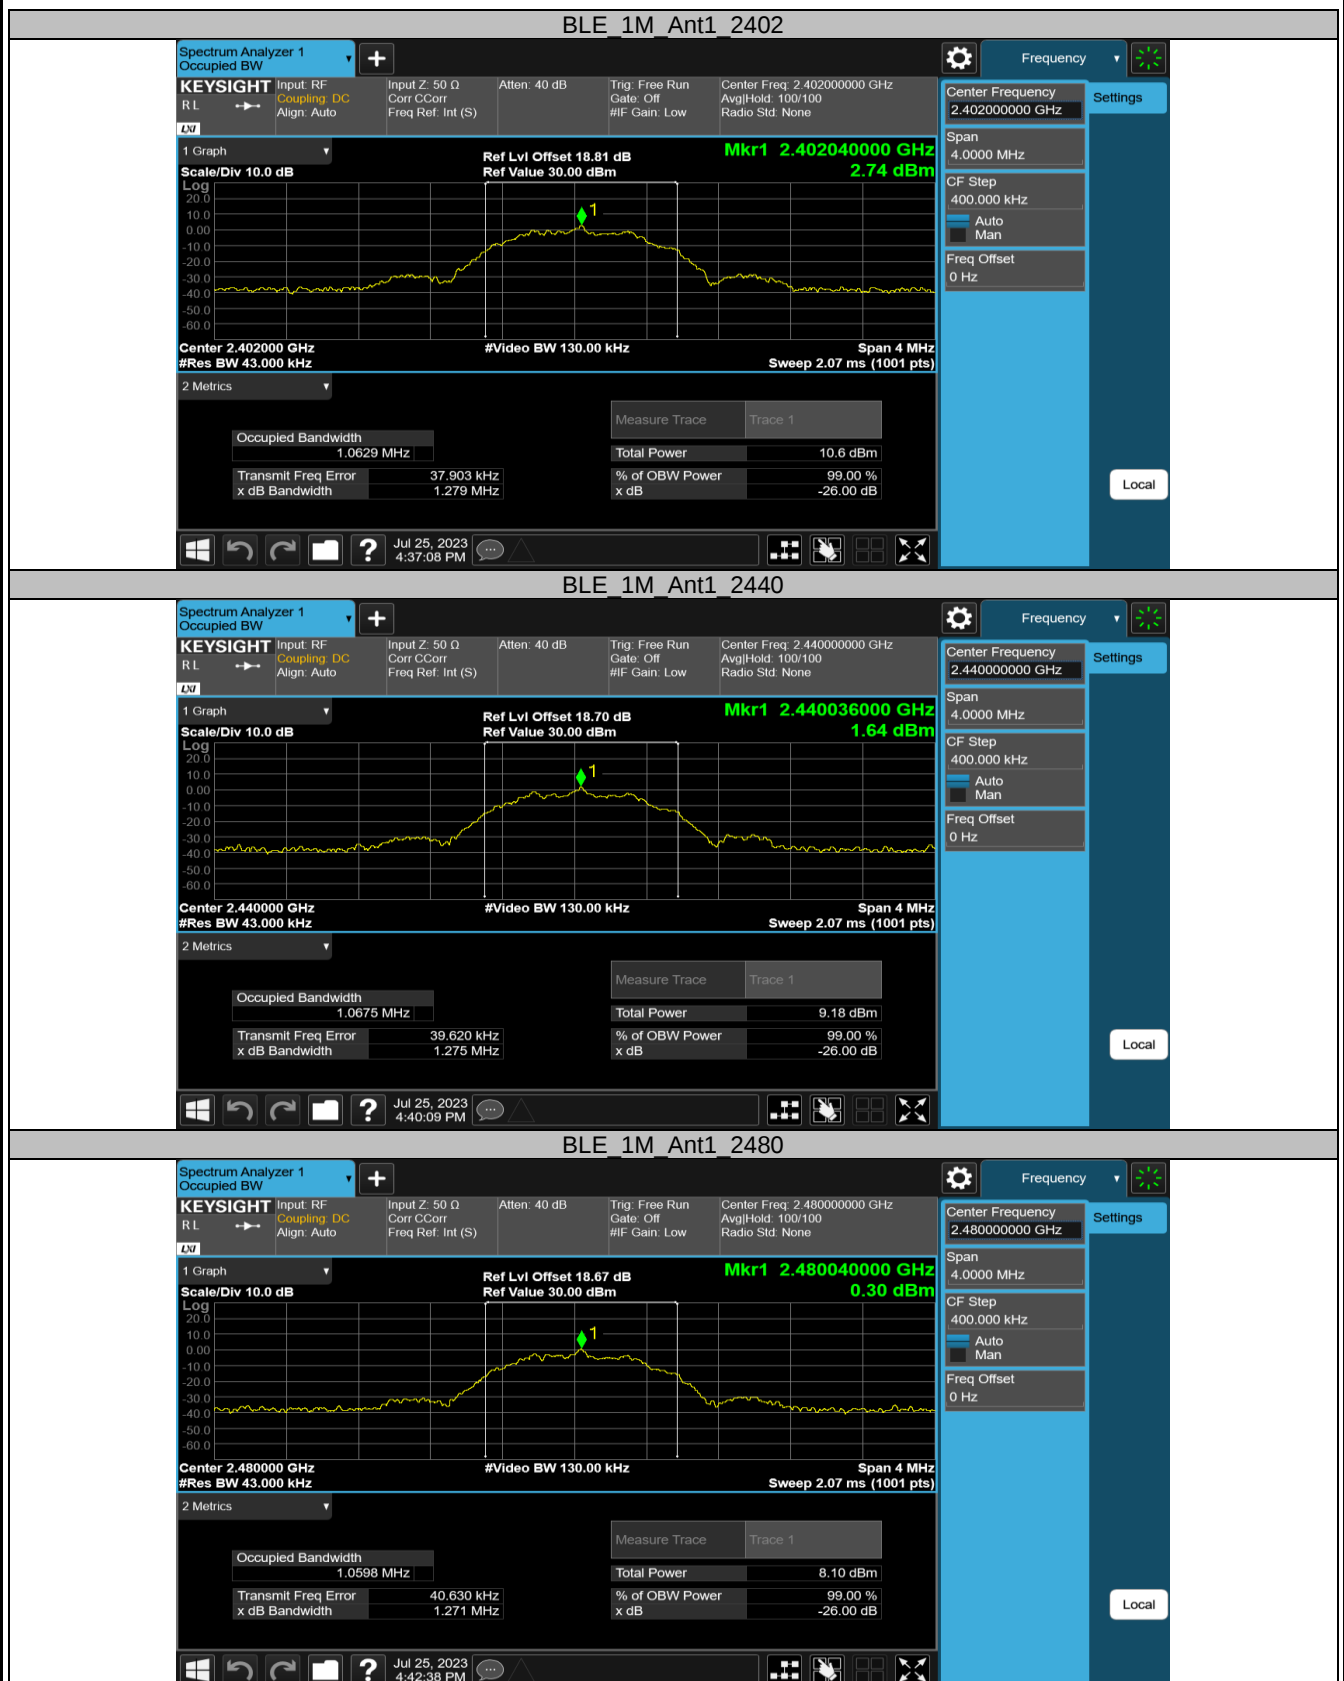


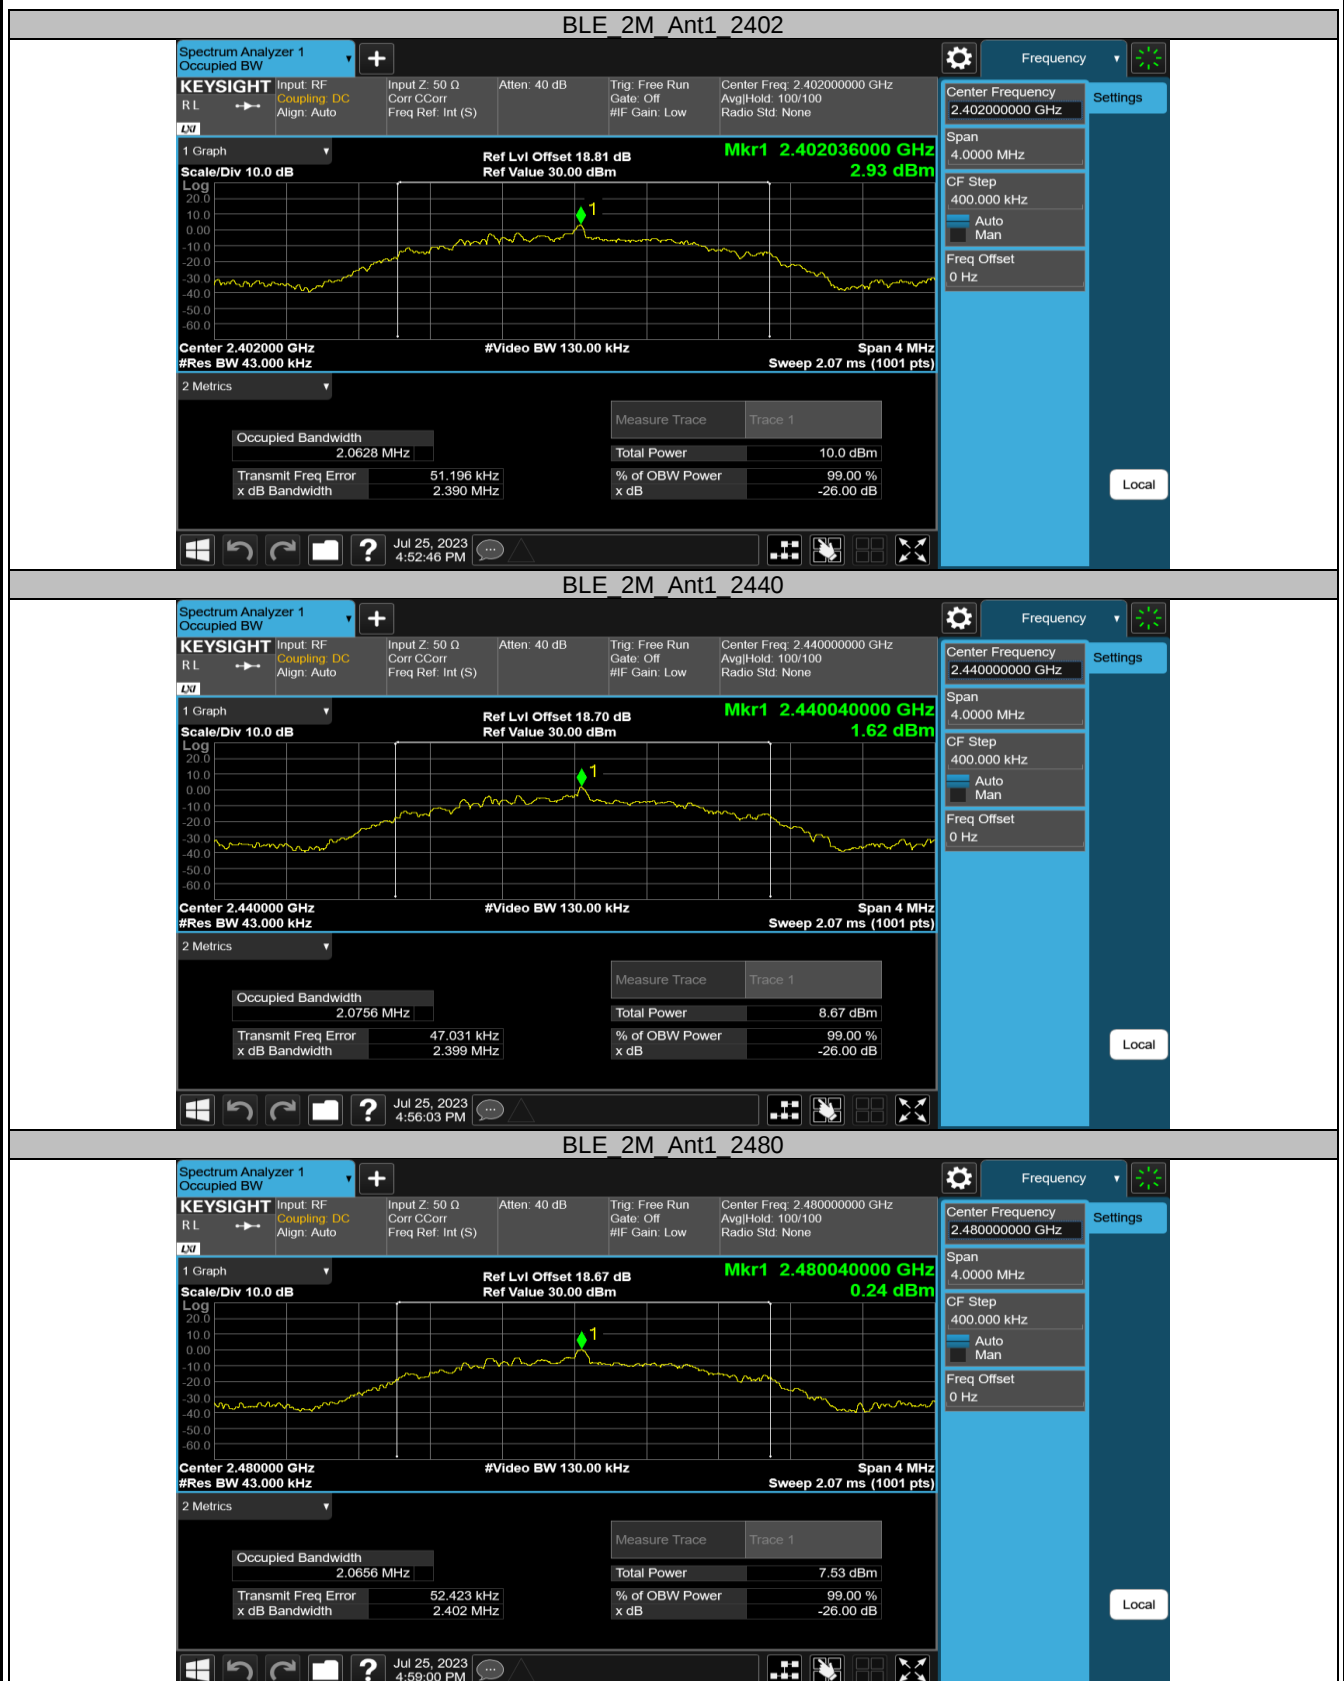


Appendix A.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	3.84	-43.37	≤-16.16	PASS
		High	2480	0.39	-41.17	≤-19.61	PASS
BLE_2M	Ant1	Low	2402	3.89	-28.95	≤-16.11	PASS
		High	2480	1.18	-44.98	≤-18.82	PASS

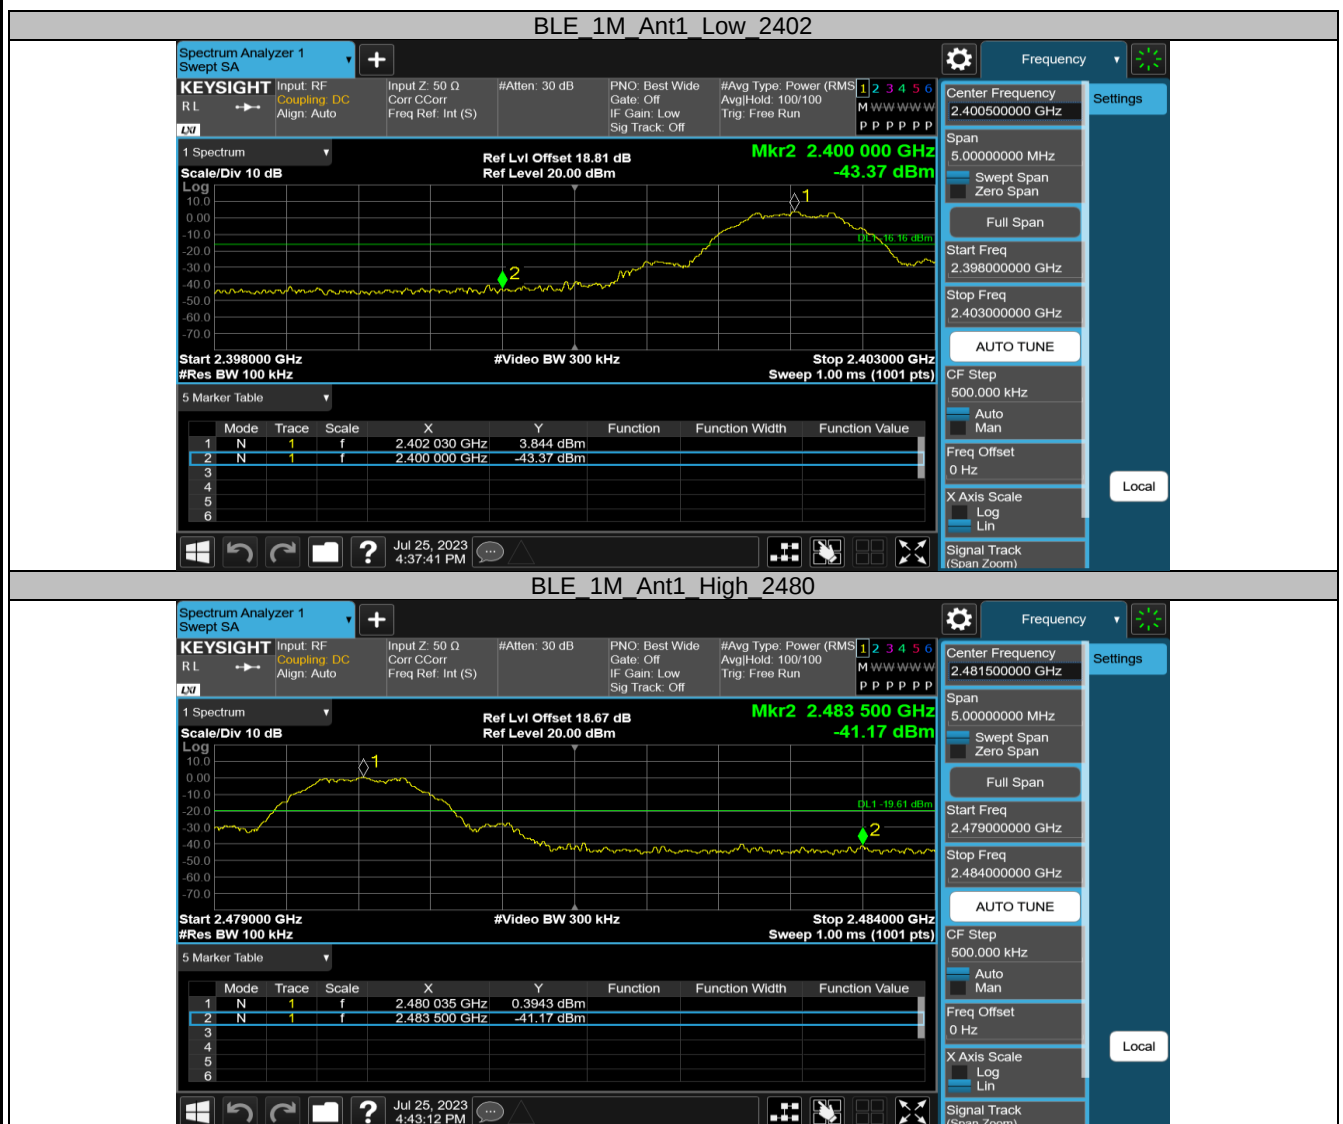

BLE_2M_Ant1_Low_2402

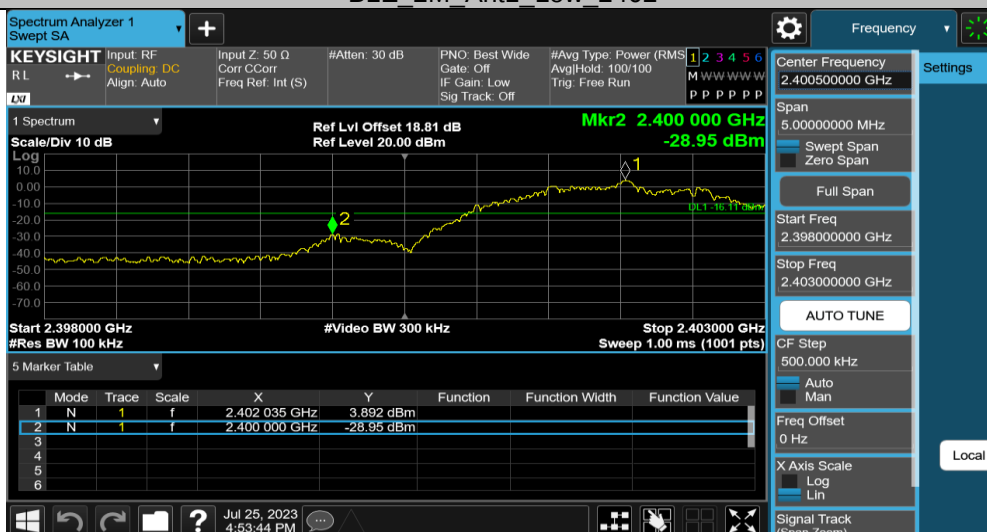

BLE_2M_Ant1_High_2480



Conducted Spurious Emission


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	3.79	3.79	---	PASS
			30~1000	3.79	-40.85	≤-16.21	PASS
			1000~26500	3.79	-32.36	≤-16.21	PASS
		2440	Reference	2.56	2.56	---	PASS
			30~1000	2.56	-41.71	≤-17.44	PASS
			1000~26500	2.56	-32.35	≤-17.44	PASS
		2480	Reference	1.16	1.16	---	PASS
			30~1000	1.16	-41.59	≤-18.84	PASS
			1000~26500	1.16	-32.05	≤-18.84	PASS
BLE_2M	Ant1	2402	Reference	3.48	3.48	---	PASS
			30~1000	3.48	-40.67	≤-16.52	PASS
			1000~26500	3.48	-32.49	≤-16.52	PASS
		2440	Reference	2.40	2.40	---	PASS
			30~1000	2.40	-40.72	≤-17.6	PASS
			1000~26500	2.40	-32.05	≤-17.6	PASS
		2480	Reference	1.16	1.16	---	PASS
			30~1000	1.16	-41.27	≤-18.84	PASS
			1000~26500	1.16	-32.19	≤-18.84	PASS








BLE 1M Ant1 2480 30~1000

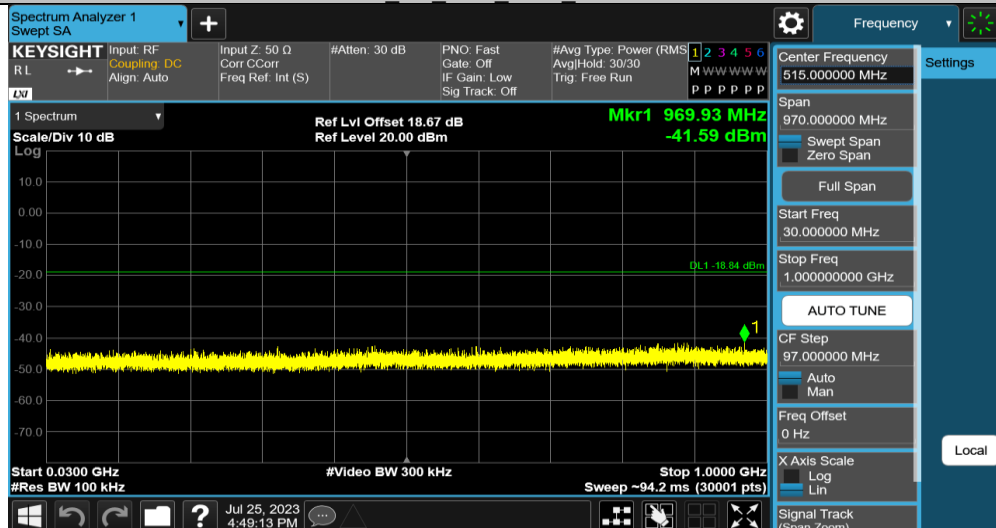


BLE 1M Ant1 2480 1000~26500

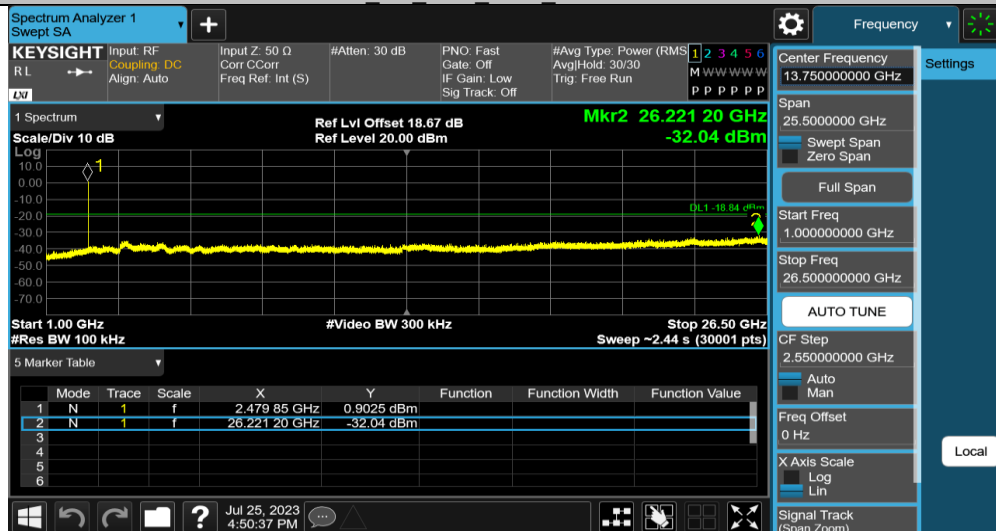


BLE 2M Ant1 2402 0~Reference



BLE 2M Ant1 2402 30~1000

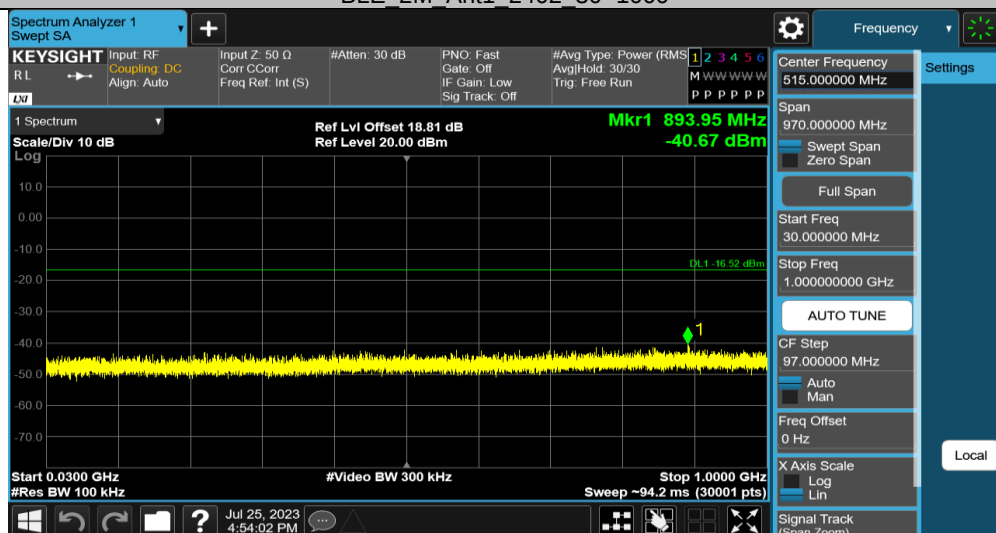

BLE 2M Ant1 2402 1000~26500

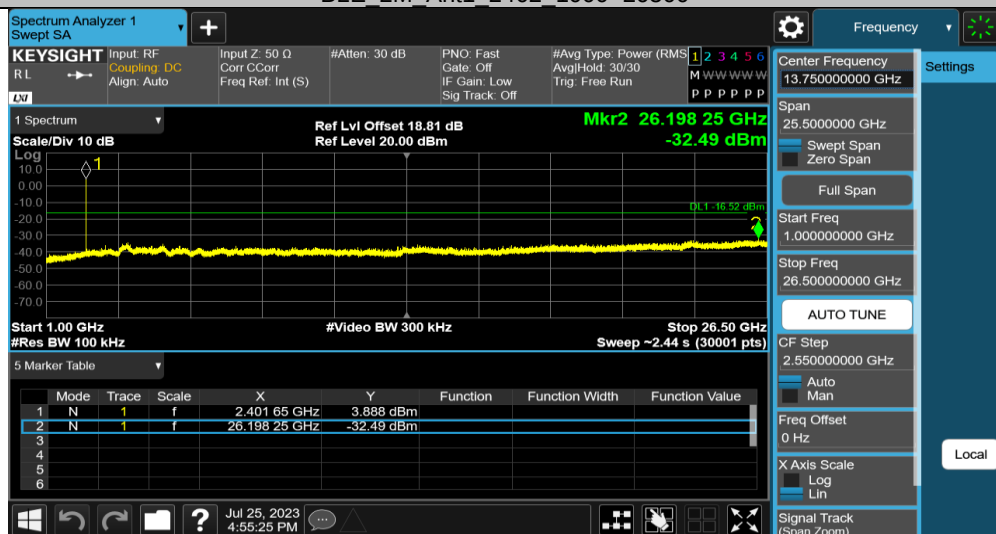


BLE 2M Ant1 2440 0~Reference



BLE 2M Ant1 2440 30~1000



BLE 2M Ant1 2440 1000~26500

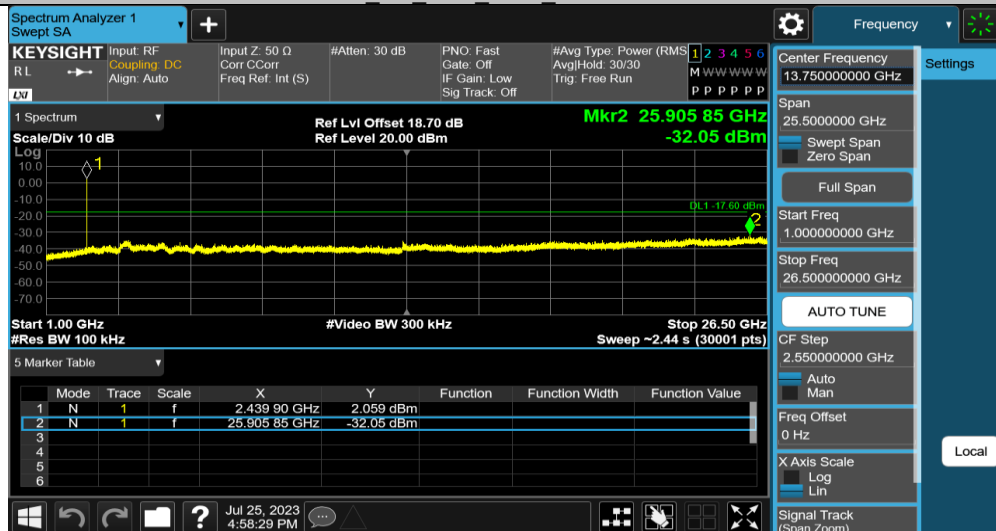

BLE 2M Ant1 2480 0~Reference



Appendix A.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	Typhur Wireless Thermometer(Probe)
Model:	WT03(Probe)
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168431635/A003497474-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

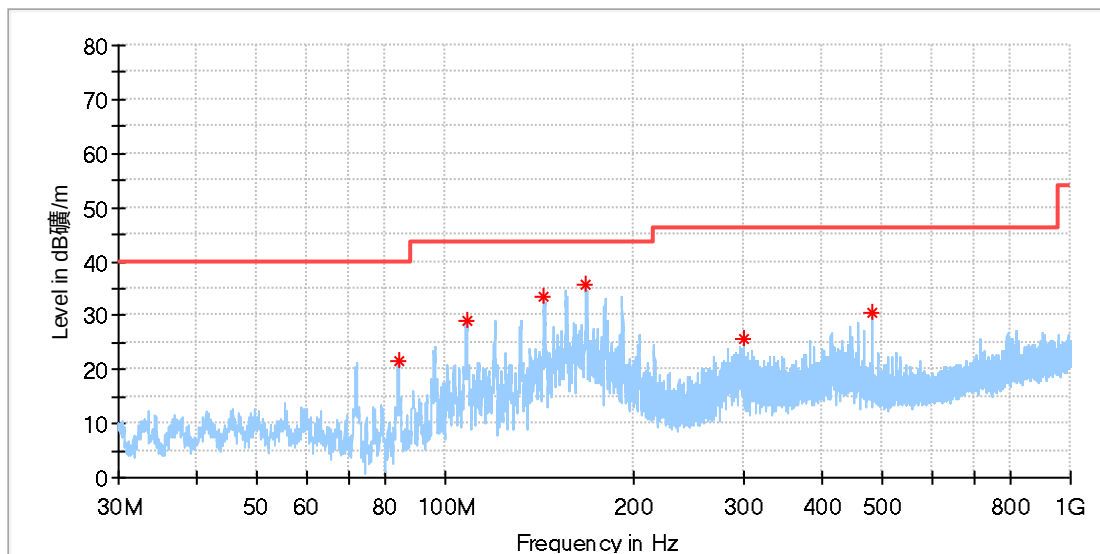

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
84.058846	21.74	40.00	18.26	100.0	H	167.0	-22.9
108.085000	29.05	43.50	14.45	100.0	H	0.0	-19.3
143.975000	33.58	43.50	9.92	100.0	H	0.0	-22.6
168.038462	35.60	43.50	7.90	100.0	H	0.0	-21.7
299.921154	25.67	46.00	20.33	100.0	H	224.0	-16.6
480.005385	30.58	46.00	15.42	100.0	H	334.0	-12.6

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

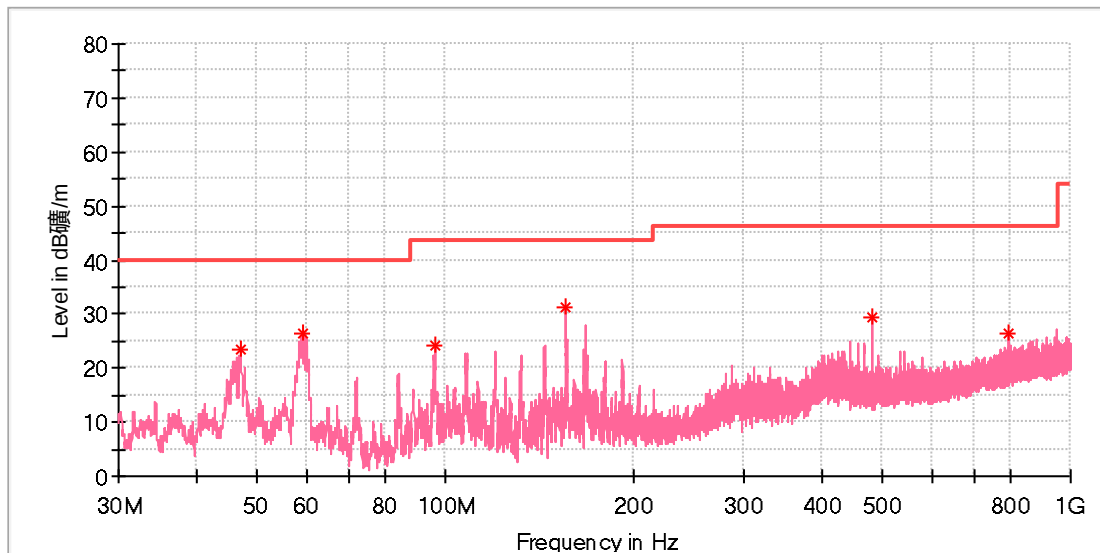

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.124231	23.36	40.00	16.64	100.0	V	226.0	-18.8
59.062692	26.34	40.00	13.66	100.0	V	128.0	-19.2
96.183846	24.22	43.50	19.28	100.0	V	297.0	-19.9
156.062692	31.17	43.50	12.33	100.0	V	70.0	-22.2
480.005385	29.56	46.00	16.44	100.0	V	287.0	-12.6
797.941539	26.31	46.00	19.69	100.0	V	175.0	-6.8

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Typhur Wireless Thermometer(Probe)
Model:	WT03(Probe)
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168431635/A003497474-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

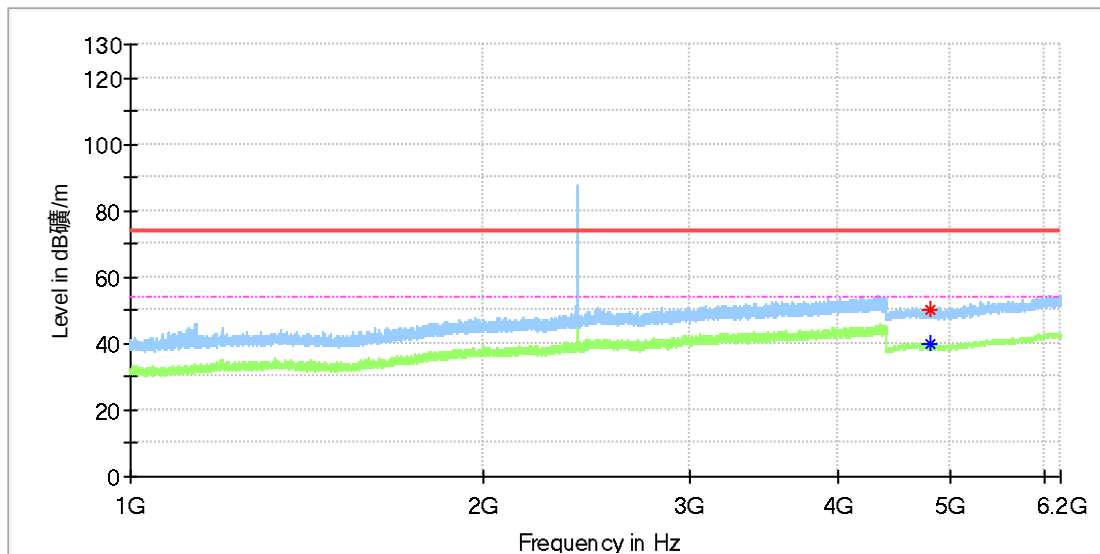

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4801.500000	---	39.89	54.00	14.11	150.0	H	0.0	11.8
4807.000000	50.25	---	74.00	23.75	150.0	H	269.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

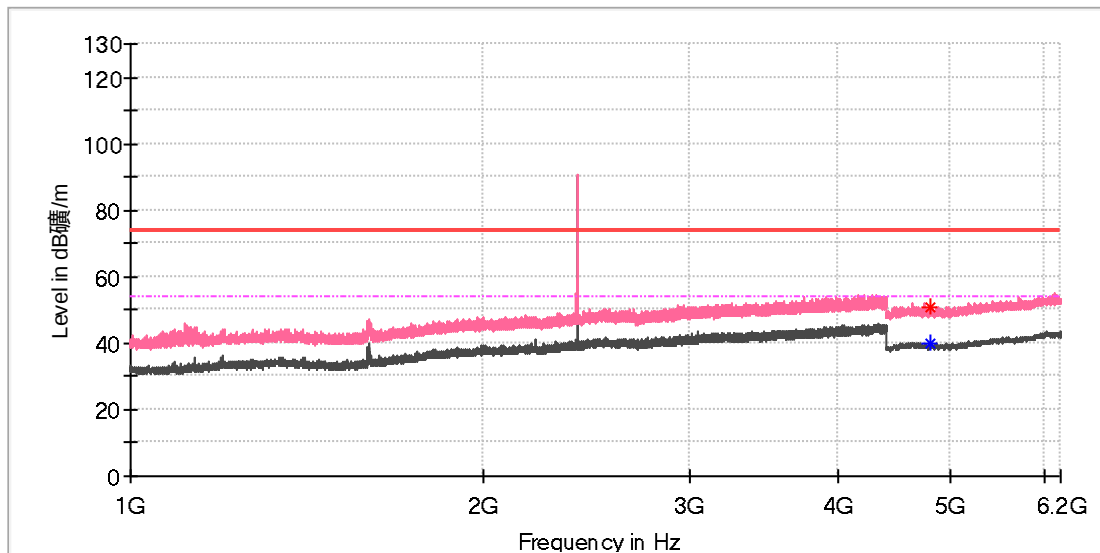

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4802.500000	---	39.63	54.00	14.37	150.0	V	6.0	11.8
4807.500000	50.74	---	74.00	23.26	150.0	V	70.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

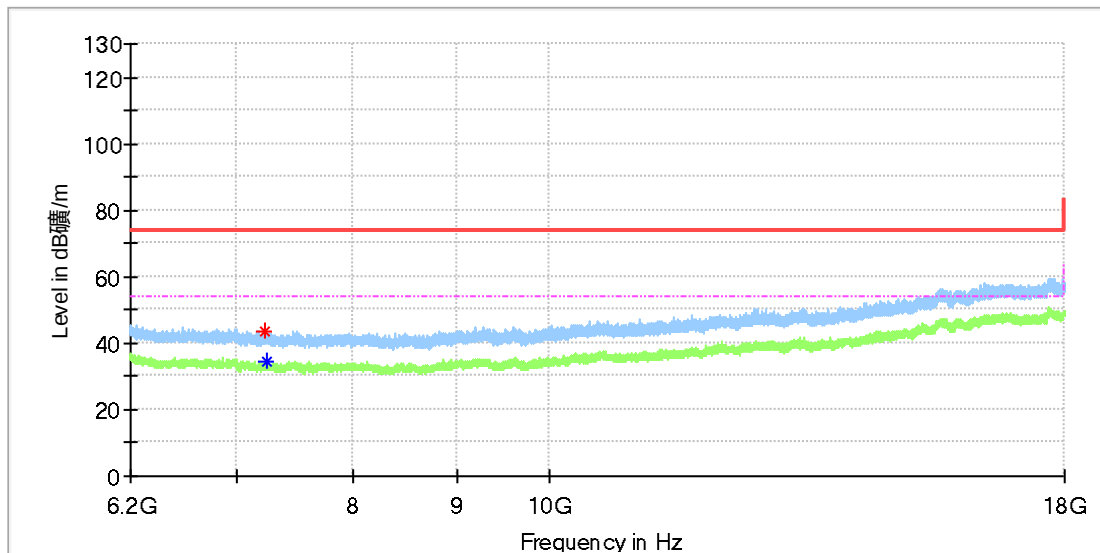

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7231.025000	43.47	---	74.00	30.53	150.0	H	250.0	8.6
7239.875000	---	34.28	54.00	19.72	150.0	H	311.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Typhur Wireless Thermometer(Probe)
Model:	WT03(Probe)
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168431635/A003497474-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

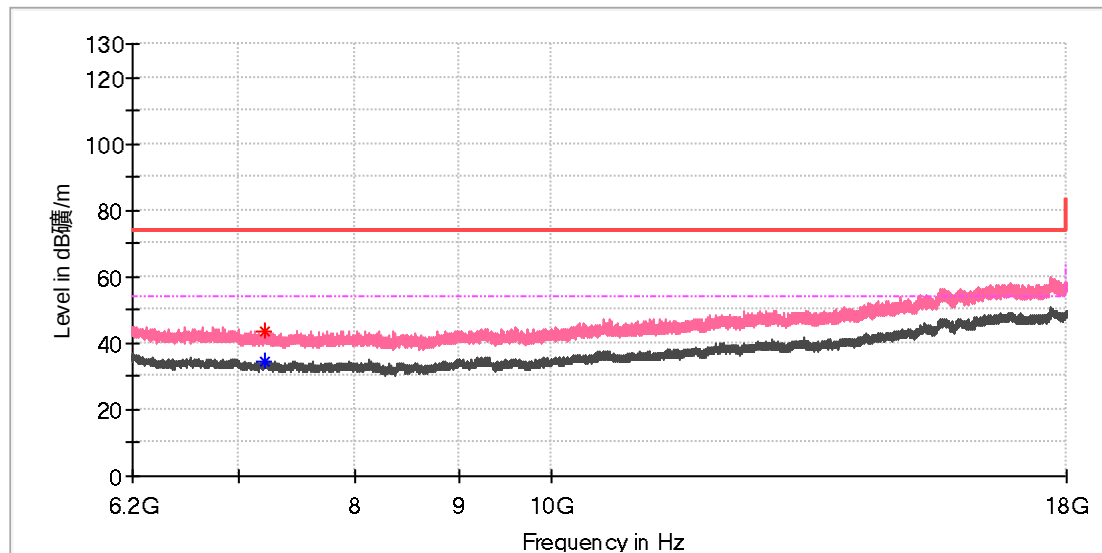

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7203.000000	---	34.24	54.00	19.76	150.0	V	51.0	8.8
7214.308333	43.45	---	74.00	30.55	150.0	V	88.0	8.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

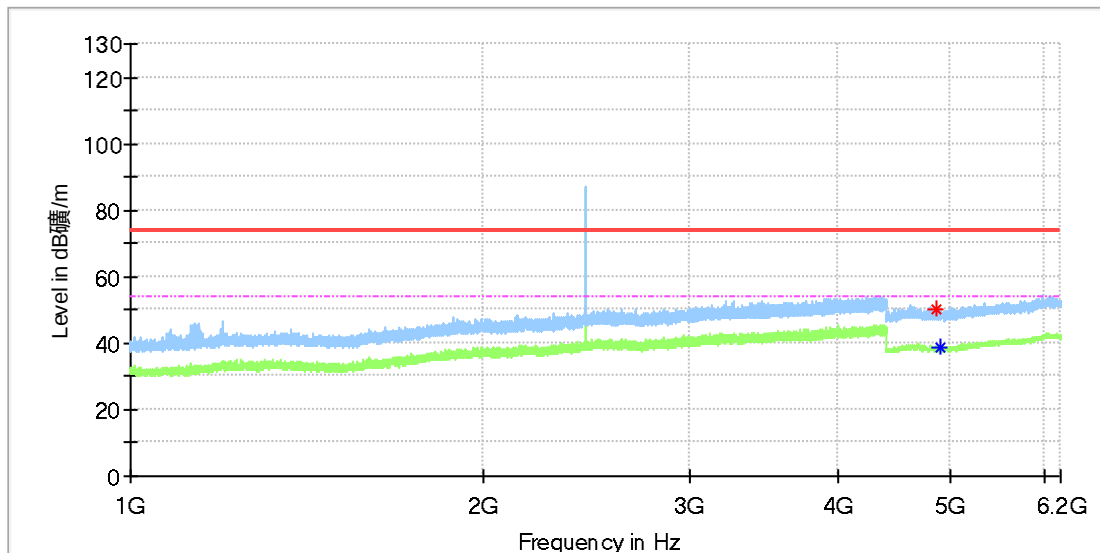

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4858.000000	50.37	---	74.00	23.63	150.0	H	124.0	11.8
4899.000000	---	39.00	54.00	15.00	150.0	H	178.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

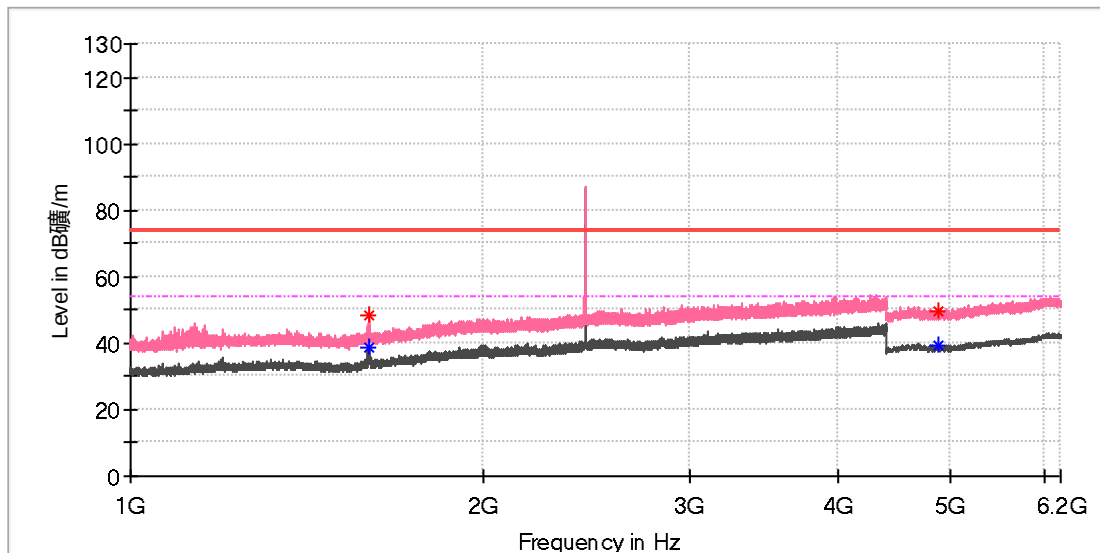

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1593.640000	---	38.86	54.00	15.14	150.0	V	272.0	2.0
1594.830000	48.19	---	74.00	25.82	150.0	V	281.0	2.0
4875.500000	---	39.03	54.00	14.97	150.0	V	73.0	11.8
4876.500000	49.73	---	74.00	24.27	150.0	V	304.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

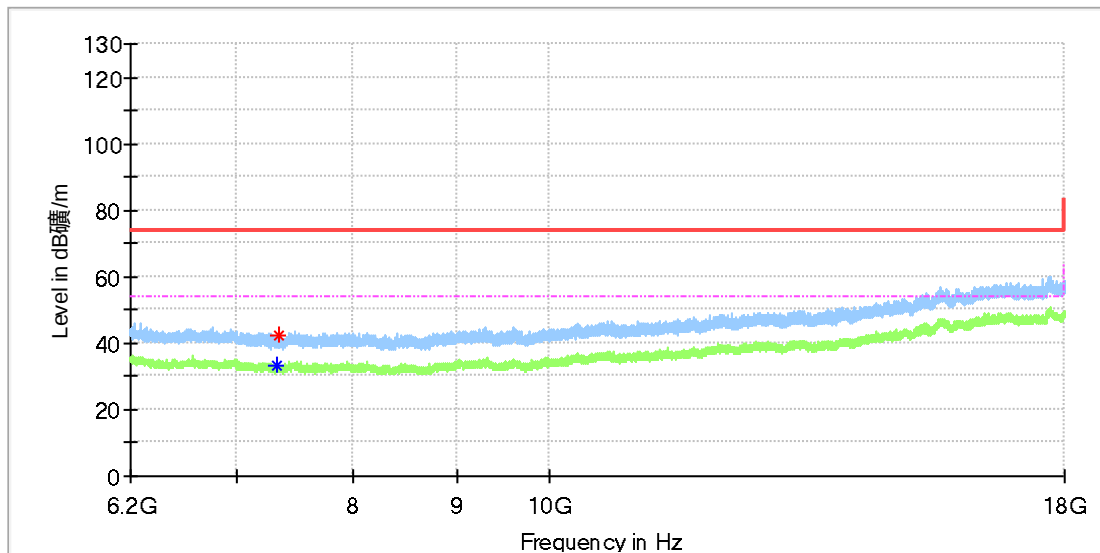

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7332.800000	---	33.23	54.00	20.77	150.0	H	253.0	8.1
7340.666667	42.19	---	74.00	31.81	150.0	H	54.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

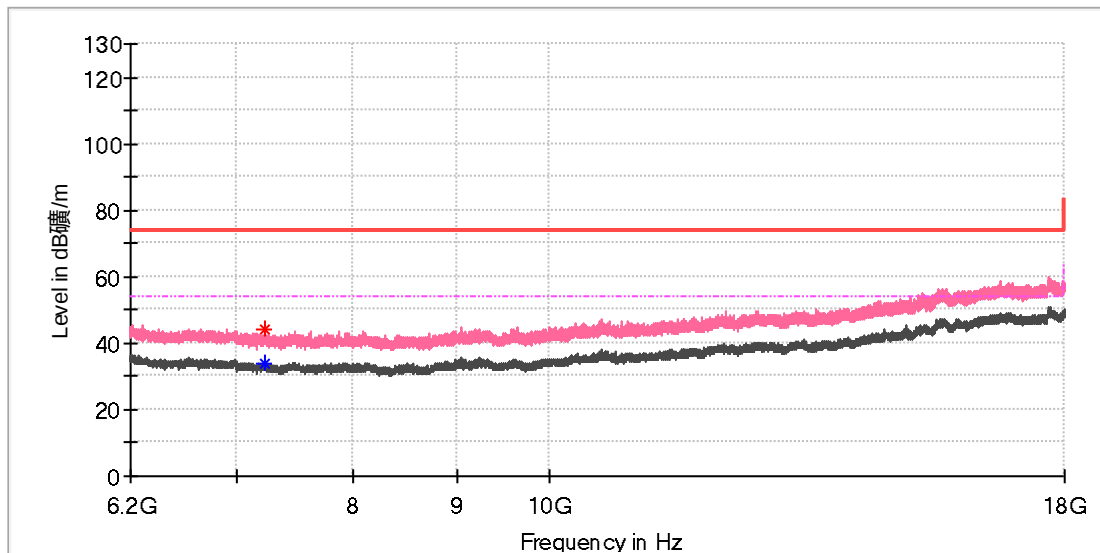

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7232.500000	44.30	---	74.00	29.70	150.0	V	233.0	8.6
7234.958333	---	34.05	54.00	19.95	150.0	V	127.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_High channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

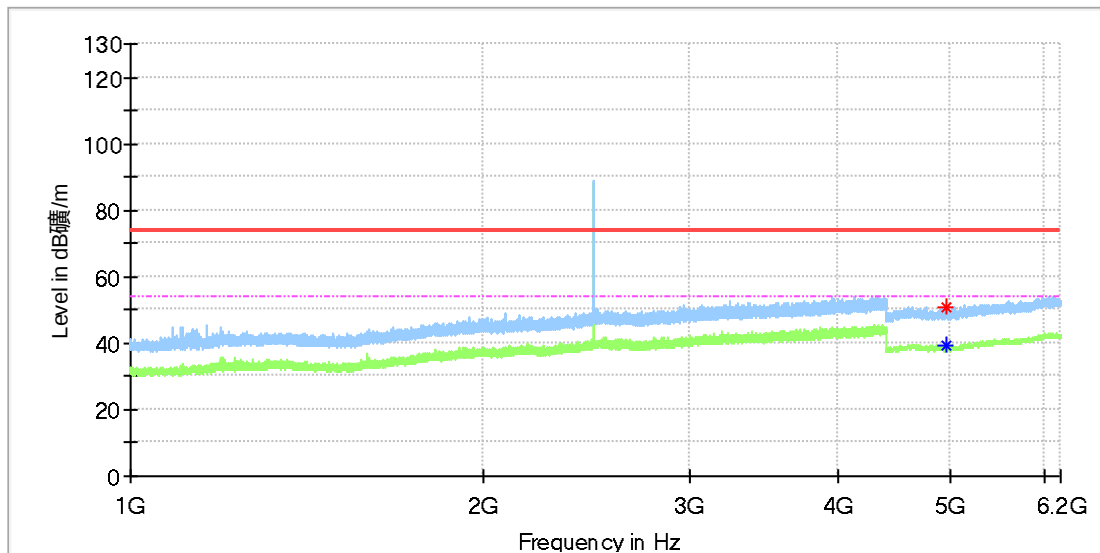

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4950.500000	50.51	---	74.00	23.49	150.0	H	251.0	11.8
4958.500000	---	39.48	54.00	14.52	150.0	H	322.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_High channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

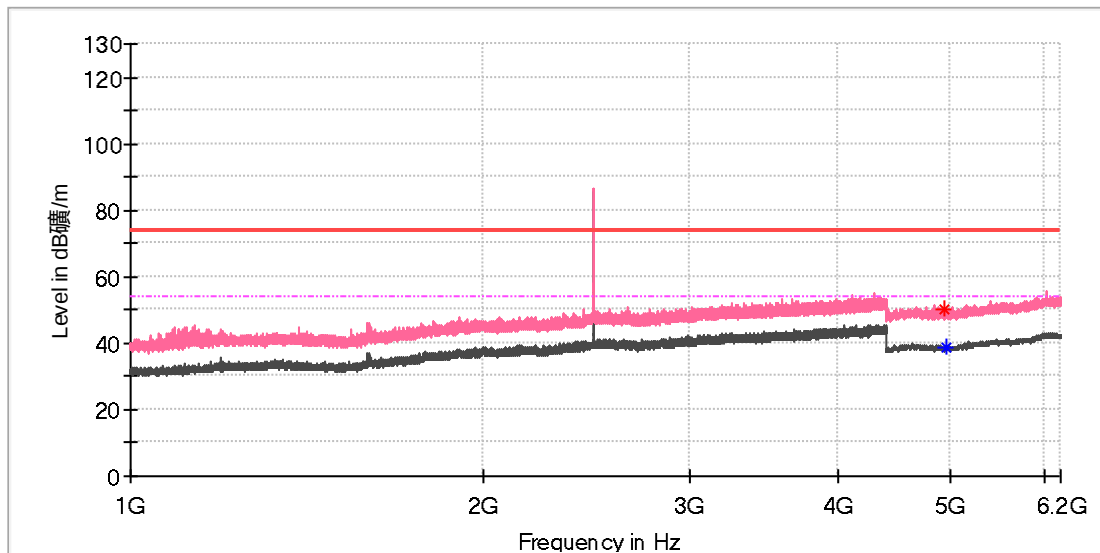

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4942.000000	50.28	---	74.00	23.72	150.0	V	301.0	11.8
4958.000000	---	38.93	54.00	15.07	150.0	V	252.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_High channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

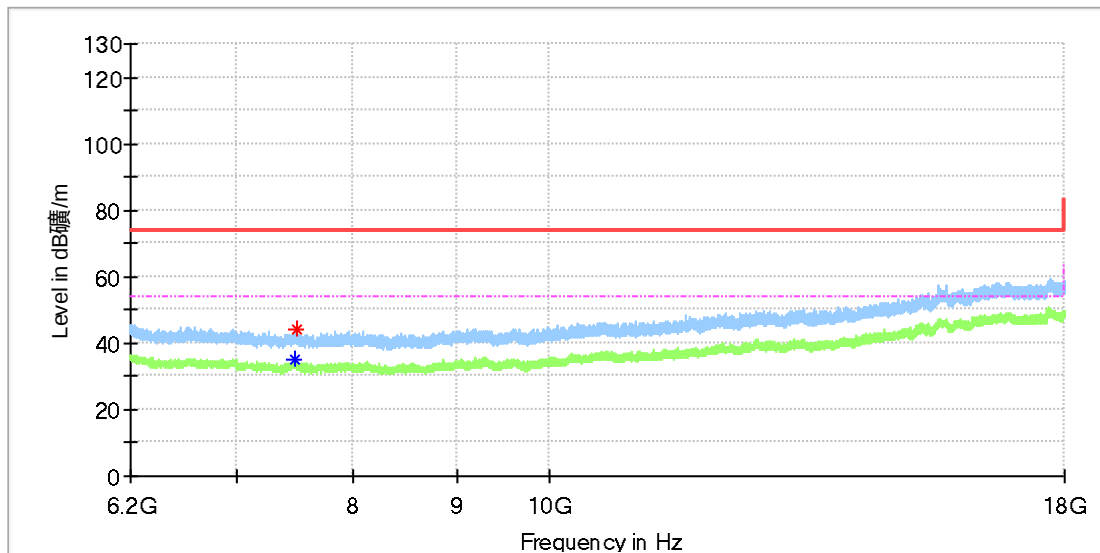

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7477.350000	---	34.77	54.00	19.23	150.0	H	202.0	8.6
7492.591667	43.93	---	74.00	30.07	150.0	H	155.0	8.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_High channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

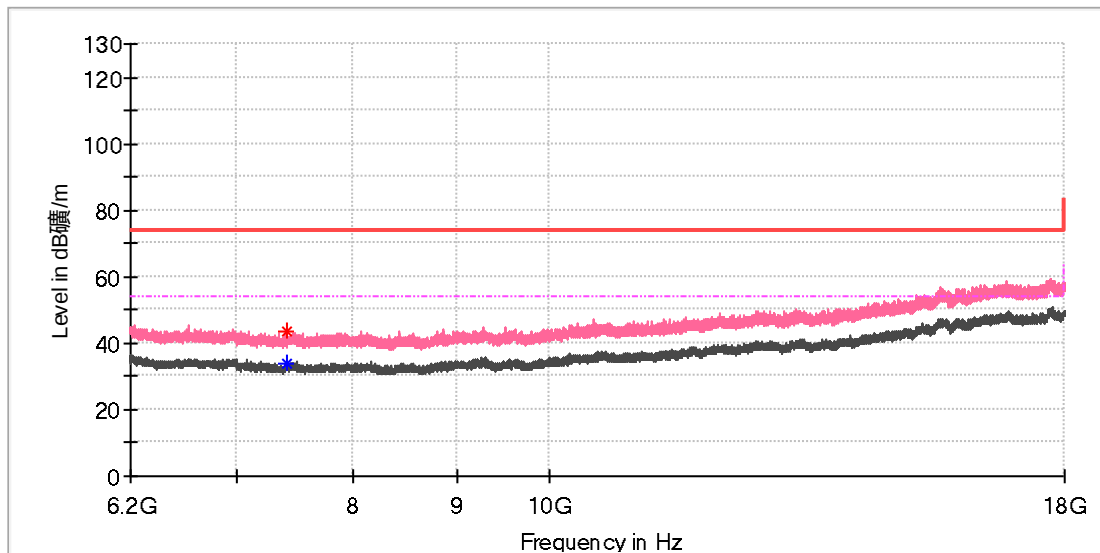

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7406.058333	43.31	---	74.00	30.69	150.0	V	240.0	8.3
7408.025000	---	33.89	54.00	20.11	150.0	V	0.0	8.3


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Typhur Wireless Thermometer(Probe)
Model:	WT03(Probe)
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168431635/A003497474-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

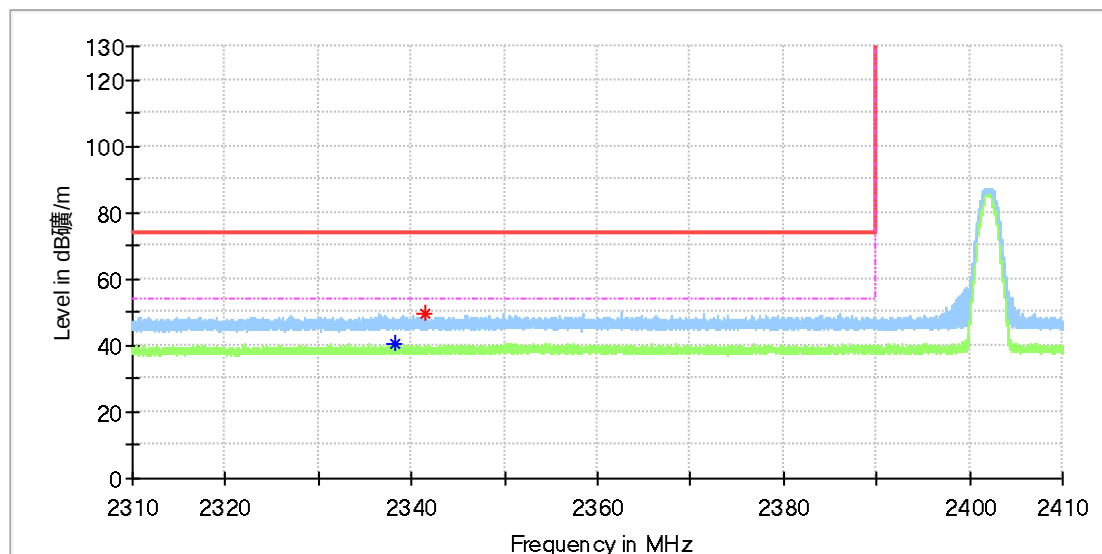

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.295000	---	40.64	54.00	13.36	150.0	H	63.0	6.8
2341.430000	49.34	---	74.00	24.66	150.0	H	0.0	6.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

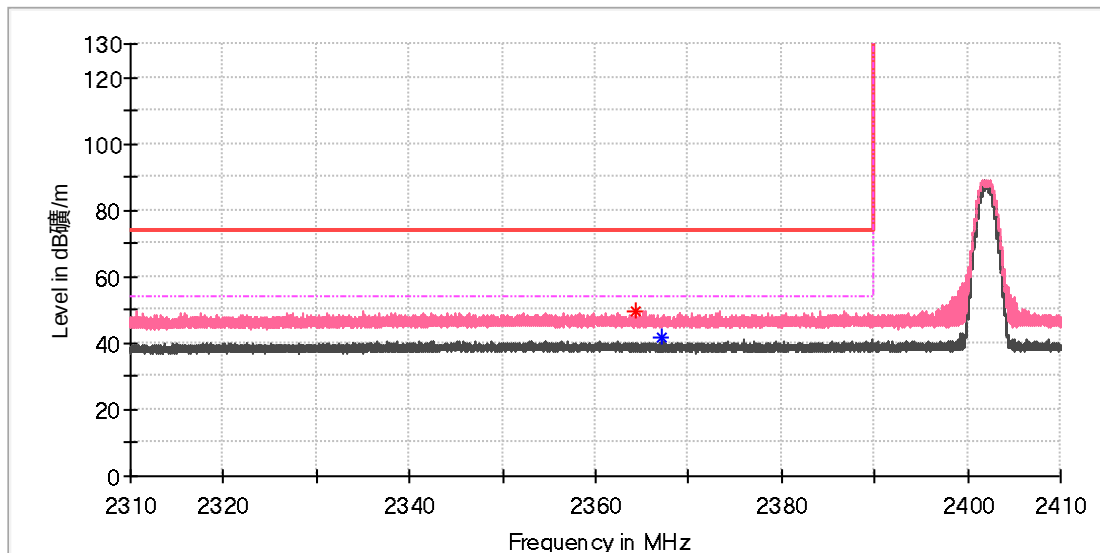

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2364.280000	49.67	---	74.00	24.33	150.0	V	0.0	6.9
2367.050000	---	41.49	54.00	12.51	150.0	V	111.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Typhur Wireless Thermometer(Probe)
Model:	WT03(Probe)
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168431635/A003497474-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

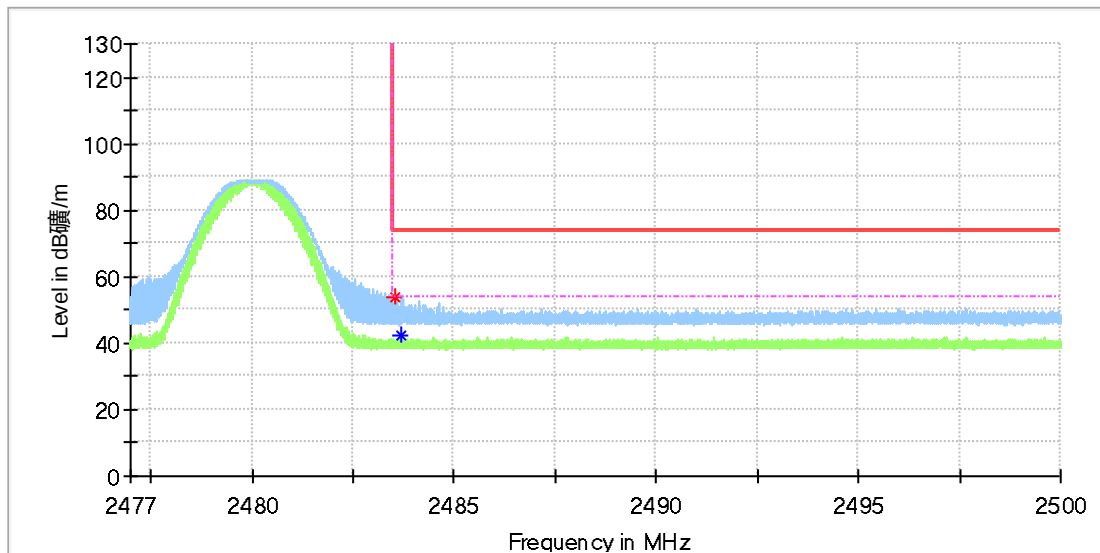

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.530850	54.10	---	74.00	19.90	150.0	H	14.0	7.4
2483.696450	---	42.23	54.00	11.77	150.0	H	346.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Typhur Wireless Thermometer(Probe)
Model: WT03(Probe)
Test Mode: BLE 1M_High channel
Order No/Sample No: 168431635/A003497474-002
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

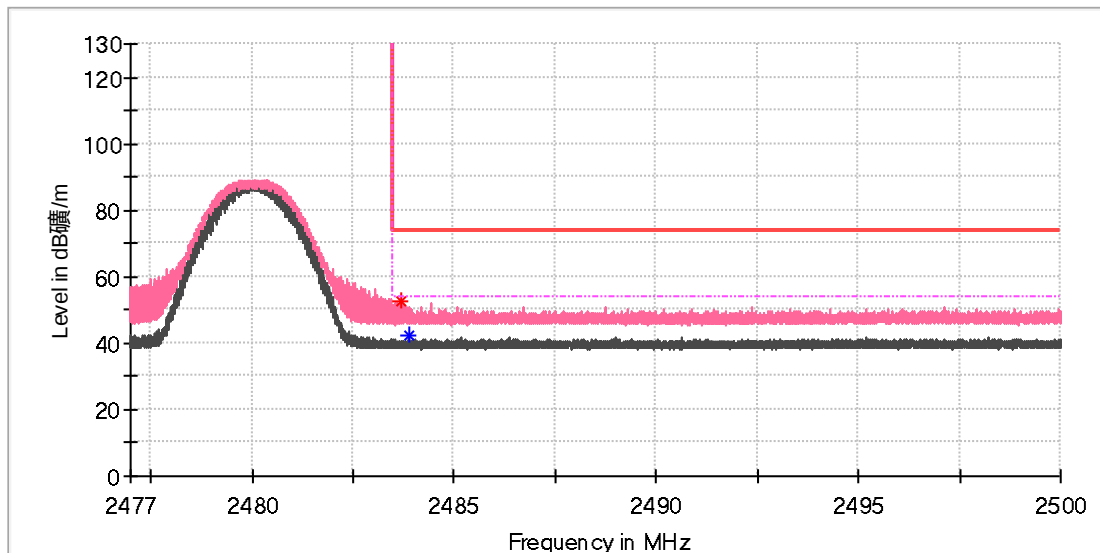

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.675750	52.43	---	74.00	21.57	150.0	V	247.0	7.4
2483.865500	---	42.04	54.00	11.96	150.0	V	272.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.7: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: Wireless Thermometer
Order Number: 168431635 130
Model: WT03
Test Mode: Normal working
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Guangshen cen/Gary Chen
Tem./Hum./Pressure: 23.6°C/51.5%/101kPa

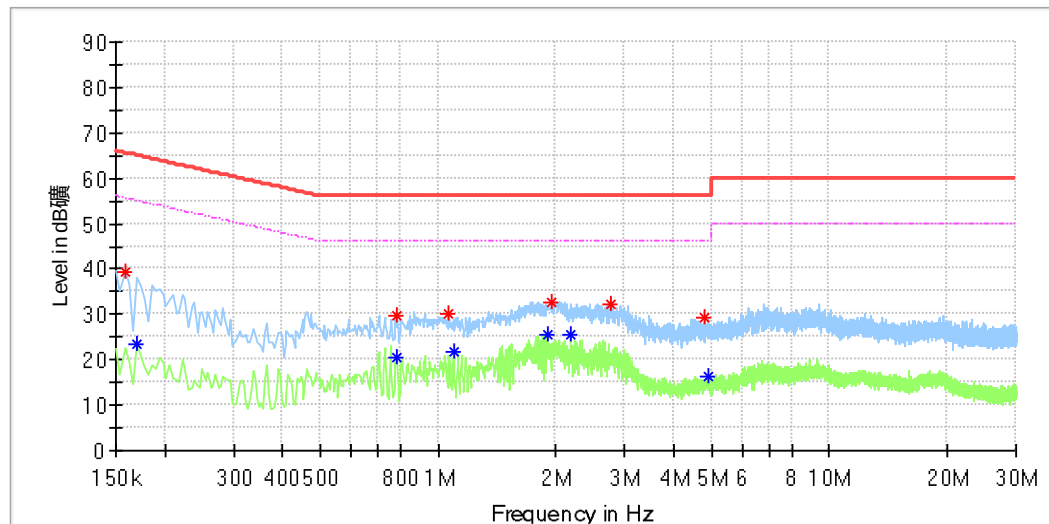


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.158000	39.21	---	65.57	26.35	L1	9.9
0.170000	---	23.57	54.96	31.39	L1	9.9
0.786000	29.57	---	56.00	26.43	L1	10.0
0.786000	---	20.45	46.00	25.55	L1	10.0
1.066000	30.01	---	56.00	25.99	L1	10.0
1.098000	---	21.90	46.00	24.10	L1	10.0
1.906000	---	25.66	46.00	20.34	L1	10.1
1.954000	32.86	---	56.00	23.14	L1	10.1
2.190000	---	25.33	46.00	20.67	L1	10.2
2.778000	32.43	---	56.00	23.57	L1	10.2
4.822000	29.19	---	56.00	26.81	L1	10.2
4.914000	---	16.47	46.00	29.53	L1	10.2

EUT Information

EUT Name: Wireless Thermometer
Order Number: 168431635 130
Model: WT03
Test Mode: Normal working
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Guangshen cen/Gary Chen
Tem./Hum./Pressure: 23.6°C/51.5%/101kPa

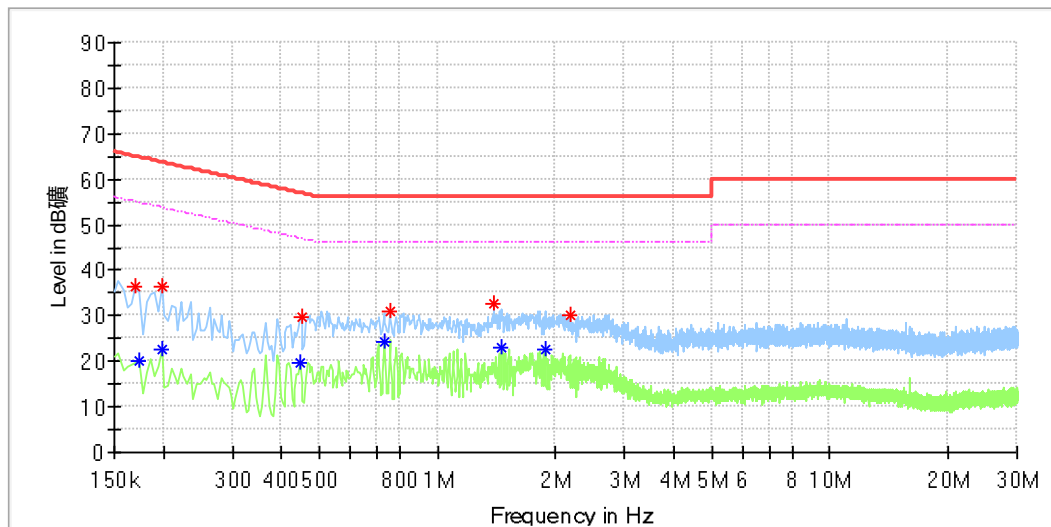

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.170000	36.35	---	64.96	28.61	N	9.8
0.174000	---	20.23	54.77	34.54	N	9.8
0.198000	---	22.75	53.69	30.95	N	9.8
0.198000	36.26	---	63.69	27.43	N	9.8
0.446000	---	19.56	46.95	27.39	N	9.8
0.450000	29.65	---	56.88	27.22	N	9.8
0.730000	---	24.19	46.00	21.81	N	9.8
0.754000	31.07	---	56.00	24.93	N	9.8
1.394000	32.56	---	56.00	23.44	N	9.8
1.462000	---	23.12	46.00	22.88	N	9.8
1.882000	---	22.60	46.00	23.40	N	9.8
2.170000	30.32	---	56.00	25.68	N	9.9