



TEST REPORT

Report Reference No	CHTEW19060104	Report verification:				
Project No	SHT1905024401EW					
FCC ID	2ASWWCORNC5					
Applicant's name:	XINCHUANGXIN INTERNATI	ONAL CO. LTD				
Address	ROOM 605 6/F, FA YUEN CC		IG 75-77 EA			
Address	YUEN STREET MONGKOK K		IG, 75-77 FA			
Manufacturer	Shenzhen Chiteng Technology	y Co.,Ltd				
Address:	Second Floor, Area A, Building Guanguang Road, Tangjia Co Guangming New District, Sher	mmunity, Gongming				
Test item description	Smart phone					
Trade Mark	CORN					
Model/Type reference:	.: C5					
Listed Model(s)						
Standard:	FCC CFR Title 47 Part 15 Subpart C Section 15.247					
Date of receipt of test sample:	May 16, 2019					
Date of testing	May 17, 2019- Jun 18, 2019					
Date of issue	Jun 19, 2019					
Result:	PASS					
Compiled by			5. 1.			
(Position+Printed name+Signature):	File administrators Silvia Li	>111	la D			
Supervised by		Silv Aaron	Fana			
(Position+Printed name+Signature):	Project Engineer Aaron Fang		J			
Approved by (Position+Printed name+Signature):	RF Manager Hans Hu	tom	stu			
	Ni manayer nans nu					
Testing Laboratory Name: :	: Shenzhen Huatongwei International Inspection Co., Ltd.					
Address:	: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China					
Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.						

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	TEST ENVIRONMENT	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9. 5.10.	Restricted band (radiated) Band edge and Spurious Emissions (conducted)	35 37
5.10. 5.11.	Spurious Emissions (radiated)	53
<u>6.</u>	TEST SETUP PHOTOS	57
7	EXTERANAL AND INTERNAL PHOTOS	58

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

<u>FCC Rules Part 15.247:</u> Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devicese

1.2. Report version

Revision No.	Date of issue	Description		
N/A 2019-06-19		Original		

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	PASS	Jiongsheng Feng
AC Power Line Conducted Emissions	15.207	PASS	Jiongsheng Feng
Conducted Peak Output Power	15.247 (b)(1)	Pass	Bruse.Li
20 dB Bandwidth	15.247 (a)(1)	Pass	Bruse.Li
Carrier Frequencies Separation	15.247 (a)(1)	Pass	Bruse.Li
Hopping Channel Number	15.247 (a)(1)	Pass	Bruse.Li
Dwell Time	15.247 (a)(1)	Pass	Bruse.Li
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass	Bruse.Li
Restricted band	15.247(d)/15.205	Pass	Bruse.Li
Radiated Emissions	15.247(d)/15.209	Pass	Bruse.Li

Note: The measurement uncertainty is not included in the test result.

3. <u>SUMMARY</u>

3.1. Client Information

Applicant: XINCHUANGXIN INTERNATIONAL CO.,LTD		
Address: ROOM 605 6/F, FA YUEN COMMERCIAL BUILDING, 75-77 FA Y STREET MONGKOK KL		
Manufacturer: Shenzhen Chiteng Technology Co.,Ltd		
Address:	Second Floor, Area A, Building 4, Huiye Technology Workshop, Guanguang Road, Tangjia Community, Gongming Street, Guangming New District, Shenzhen, Guangdong	

3.2. Product Description

Smart phone	
CORN	
C5	
-	
Conducted: 358046100103119 Radiated: 358046100103135	
DC 3.7V	
Model:CS001 Input:100-240Va.c., 50/60Hz, 0.15A Output:5.0Vd.c., 1.0A	
S9B_80MB_V3.0	
3506-b25-648-V01	
Supported BT4.0+EDR	
GFSK, π/4DQPSK, 8DPSK	
2402MHz~2480MHz	
79	
1MHz	
PIFA Antenna	
0.7dBi	

3.3. Operation state

Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
:	:
39	2441
:	:
77	2479
78	2480

> TEST MODE

For RF test items:

The engineering test program was provided and enabled to make EUT continuous transmit

For AC power line conducted emissions:

The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.

For Radiated suprious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

	/	Manufacturer:	/
		Model No.:	/
	1	Manufacturer:	/
	1	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96

4.5. Equipments Used during the Test

•	Conducted Emission					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
•	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
•	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
•	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
•	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
•	Test Software	R&S	ES-K1	N/A	N/A	N/A
0	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
0	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
0	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
0	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
0	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
0	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26

•	Radiated Emission-6th test site					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
•	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
•	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
•	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
•	Pre-Amplifer	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
•	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
•	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
•	Test Software	R&S	ES-K1	N/A	N/A	N/A
•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

•	Radiated emissi	on-7th test site				
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
•	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
•	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
•	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
•	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
•	Broadband Pre- amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
•	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
•	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
•	Test Software	Audix	E3	N/A	N/A	N/A

Shenzhen Huatongwei International Inspection Co., Ltd.

Page: 10 of 58

Issued: 2019-06-19

•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

•	RF Conducted Method												
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)							
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27							
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28							
0	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28							
0	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A							
0	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A							
0	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A							
0	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A							

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

<u>Requirement</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☑ Passed □ Not Applicable

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.207

	Limit (dBuV)				
Frequency range (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

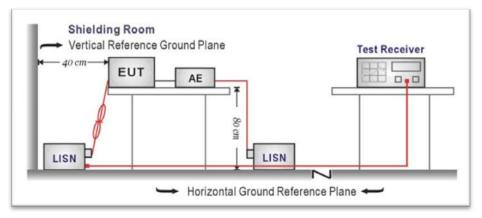

TEST PROCEDURE


- 1. The EUT was setup according to ANSI C63.10:2013 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.


TEST RESULTS

☑ Passed □ Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit Level

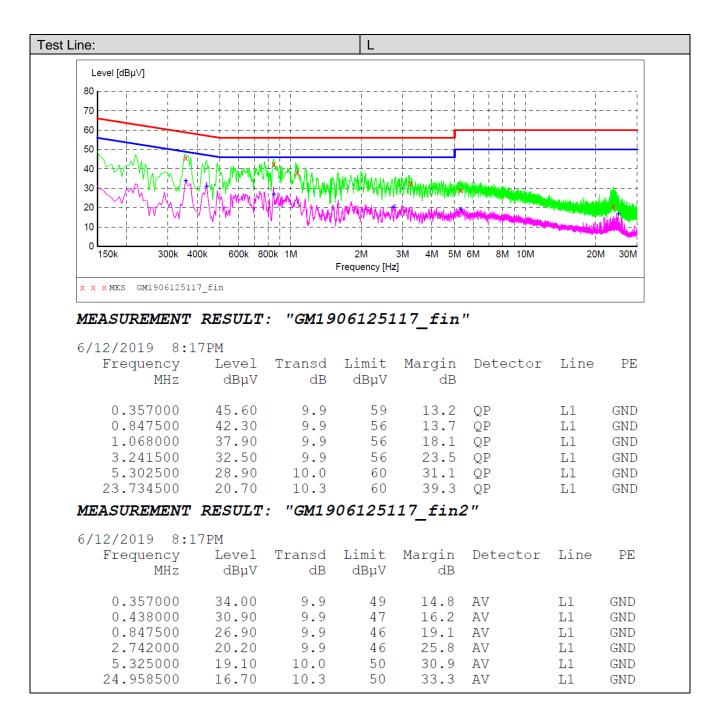

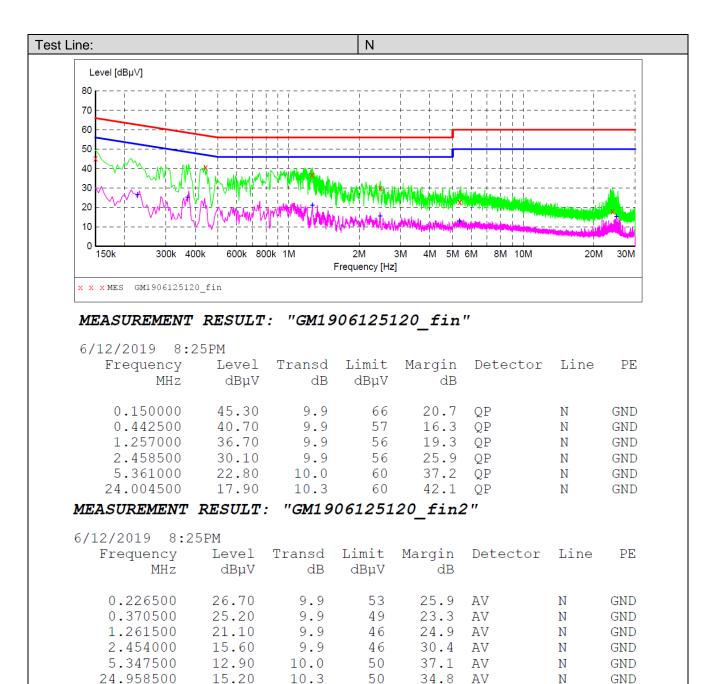


5.3. Conducted Peak Output Power

<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 nonoverlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

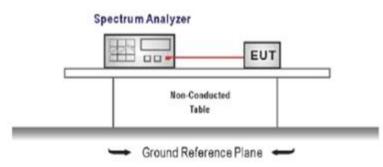

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW≥ the 20 dB bandwidth of the emission being measured, VBW≥RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3


TEST RESULTS

☑ Passed □ Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
	00	1.06		
GFSK	39	2.21	≤ 30.00	Pass
	78	2.73		
	00	0.95		
π/4DQPSK	39	1.75	≤ 21.00	Pass
	78	2.28		
	00	1.02		
8DPSK	39	1.86	≤ 21.00	Pass
	78	2.38		

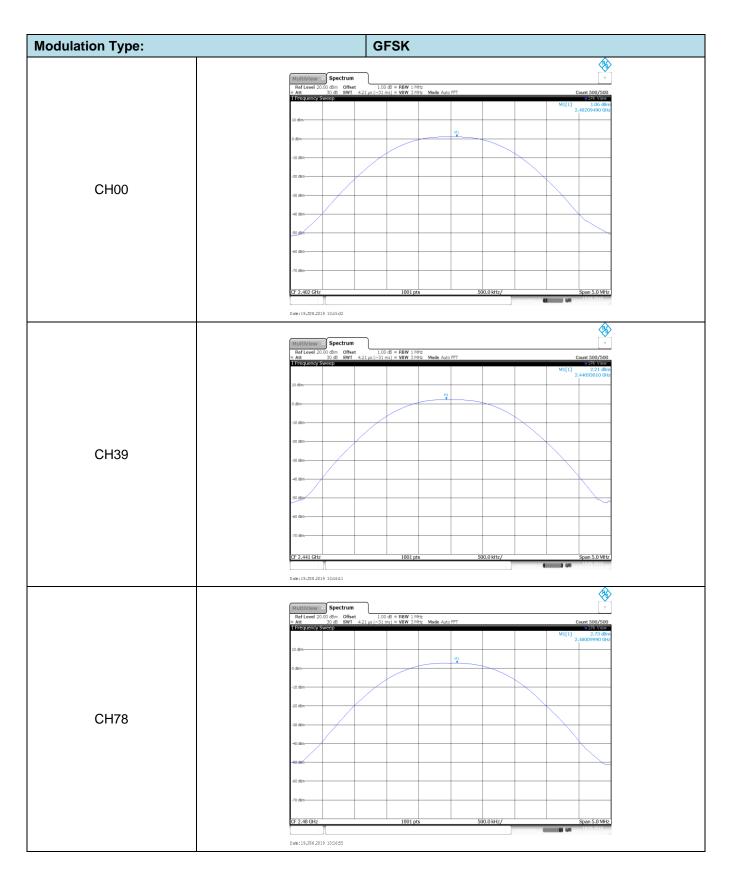

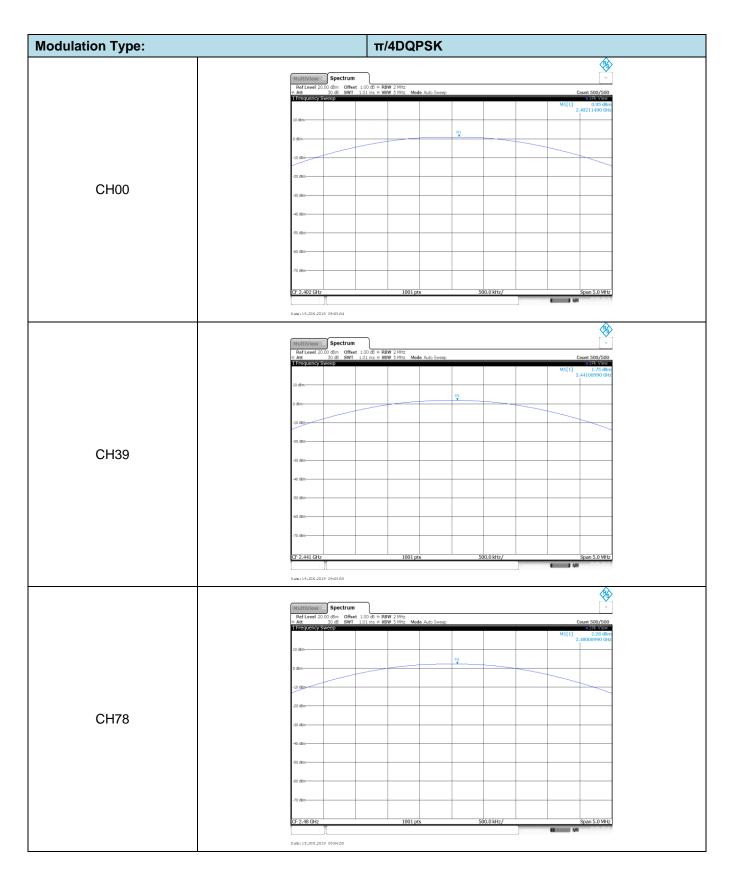

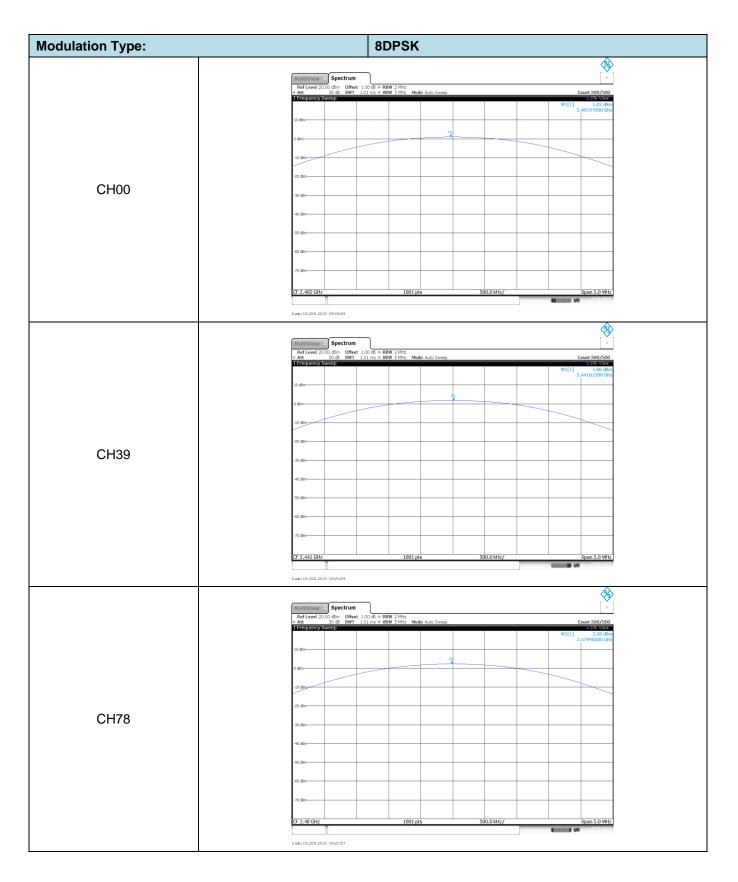


5.4. 20 dB Bandwidth

<u>LIMIT</u>

N/A

TEST CONFIGURATION

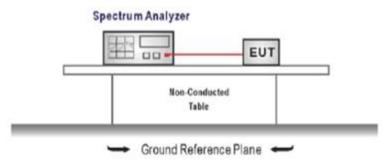

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW \ge 1% of the 20 dB bandwidth, VBW \ge RBW

Sweep = auto, Detector function = peak, Trace = max hold

4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS


🛛 Passed

Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
	00	0.93		
GFSK	39	0.93	-	Pass
	78	0.93		
	00	1.29		
π/4DQPSK	SK 39	1.29	-	Pass
	78	1.29		
	00	1.28		
8DPSK	39	1.28	-	Pass
	78	1.28		

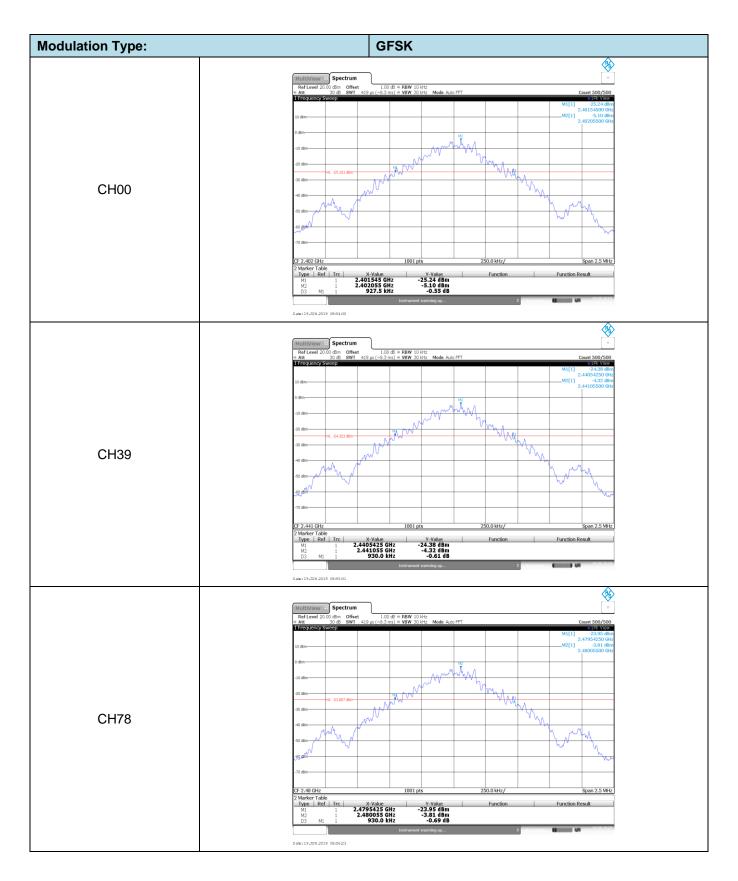

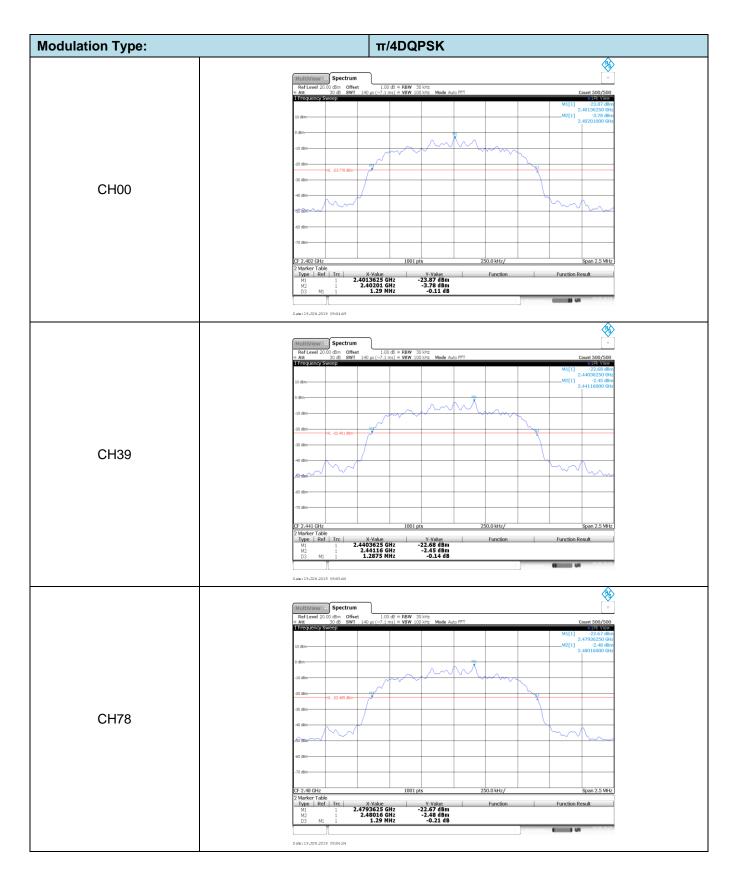

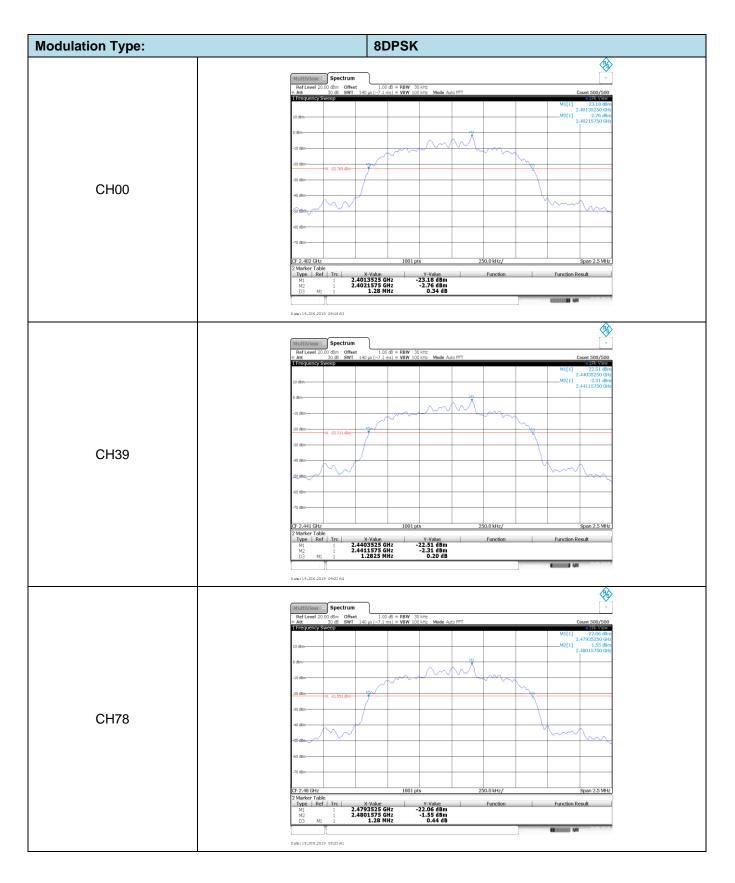

5.5. Carrier Frequencies Separation


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively,

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

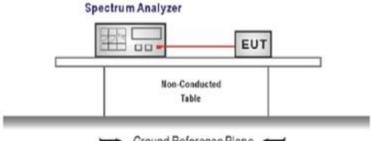

- Ground Reference Plane

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels RBW ≥ 1% of the span, VBW ≥ RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☑ Passed □ Not Applicable

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	≥0.93	Pass
π/4DQPSK	39	1.00	≥0.86	Pass
8DPSK	39	1.00	≥0.85	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4. π /4DQPSK limit = 2/3 * The maximum 20 dB Bandwidth for π /4DQPSK modulation on the section 5.4. 8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4

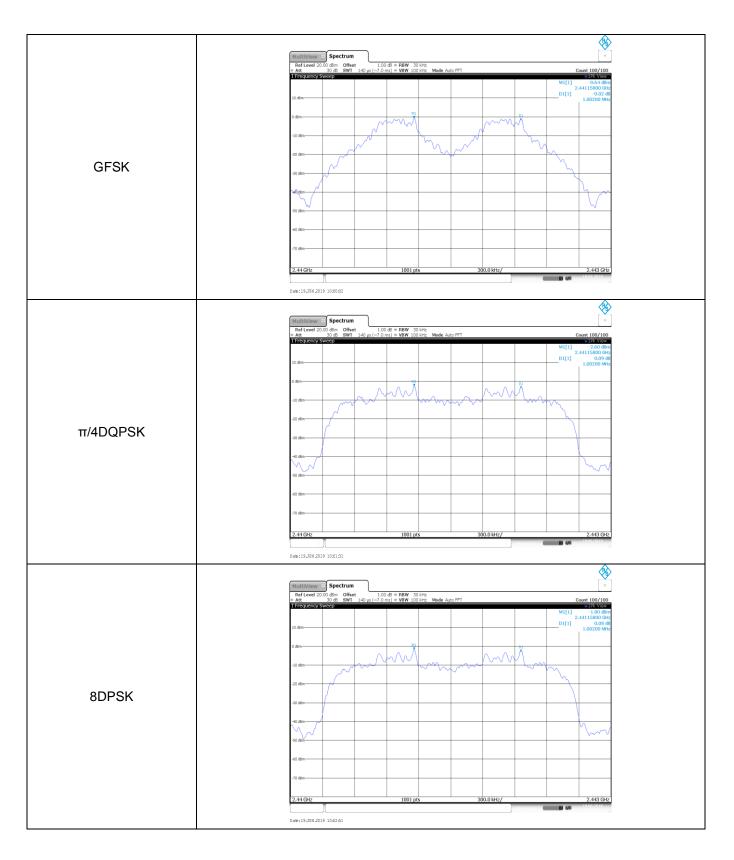


5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

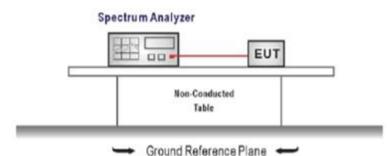

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings: Span = the frequency band of operation RBW ≥ 1% of the span, VBW ≥ RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☑ Passed □ Not Applicable

Modulation type	Channel number	Limit	Result	
GFSK	79			
π/4DQPSK	79	≥15.00	Pass	
8DPSK	79			

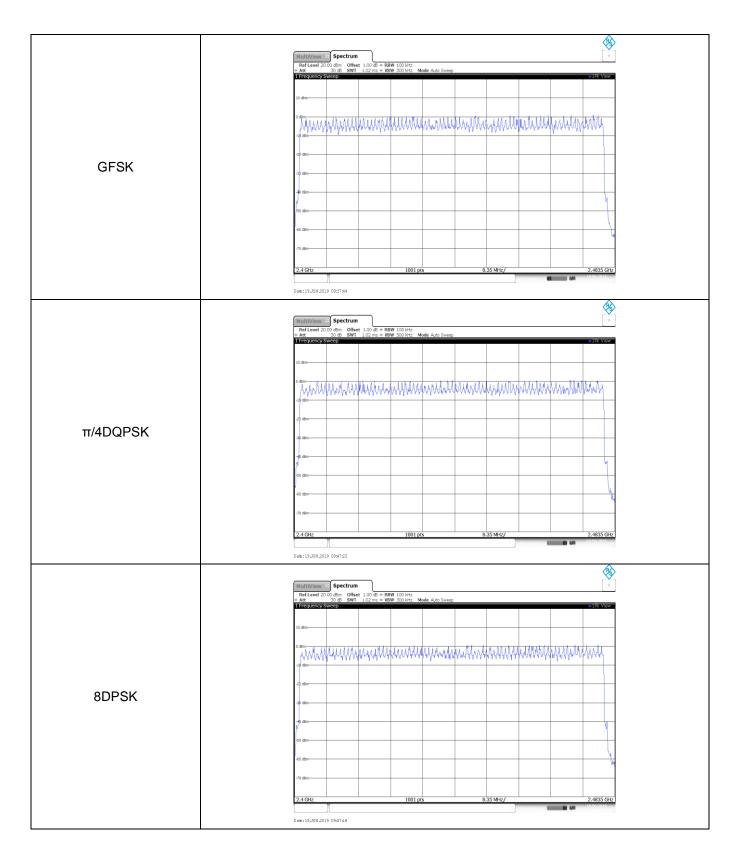


5.7. Dwell Time

<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

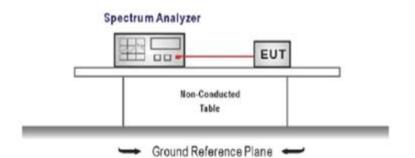

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW Sweep = as necessary to capture the entire dwell time per hopping channel, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3


TEST RESULTS


☑ Passed □ Not Applicable


Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result	
	DH1	0.38	314.00	0.12			
GFSK	DH3	1.63	157.00	0.26	≤ 0.40	Pass	
	DH5	1.52	104.00	0.16			
	2DH1	0.38	316.00	0.12			
π/4DQPSK	2DH3	1.63	154.00	0.25	≤ 0.40	Pass	
	2DH5	2.88	104.00	0.30			
	3DH1	0.38	316.00	0.12			
8DPSK	3DH3	1.63	167.00	0.27	≤ 0.40	Pass	
	3DH5 2.89		106.00	0.31			

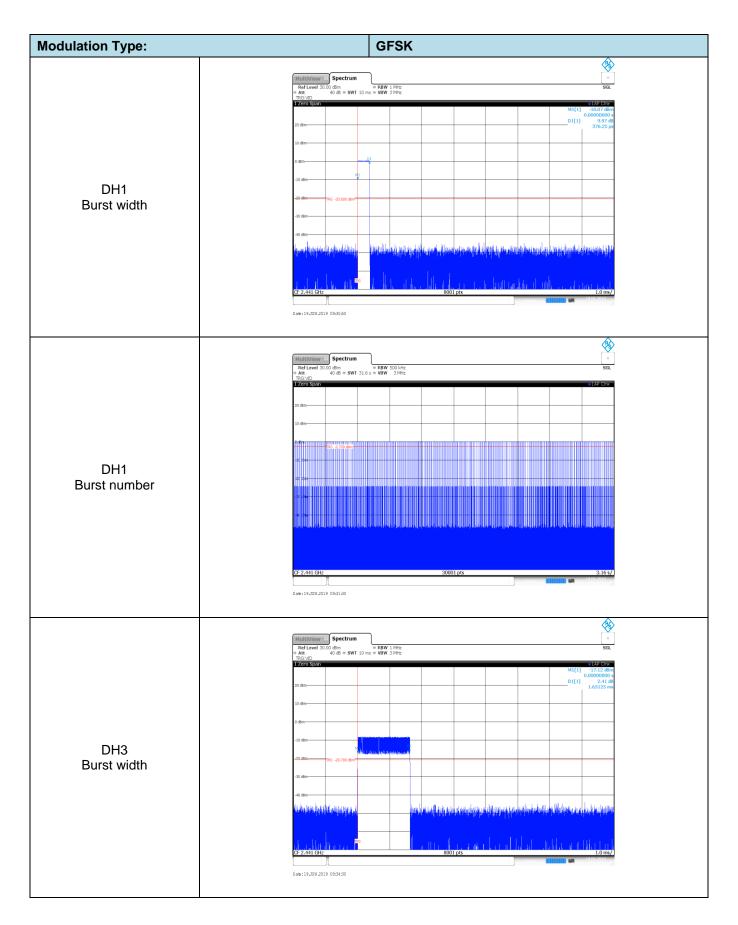


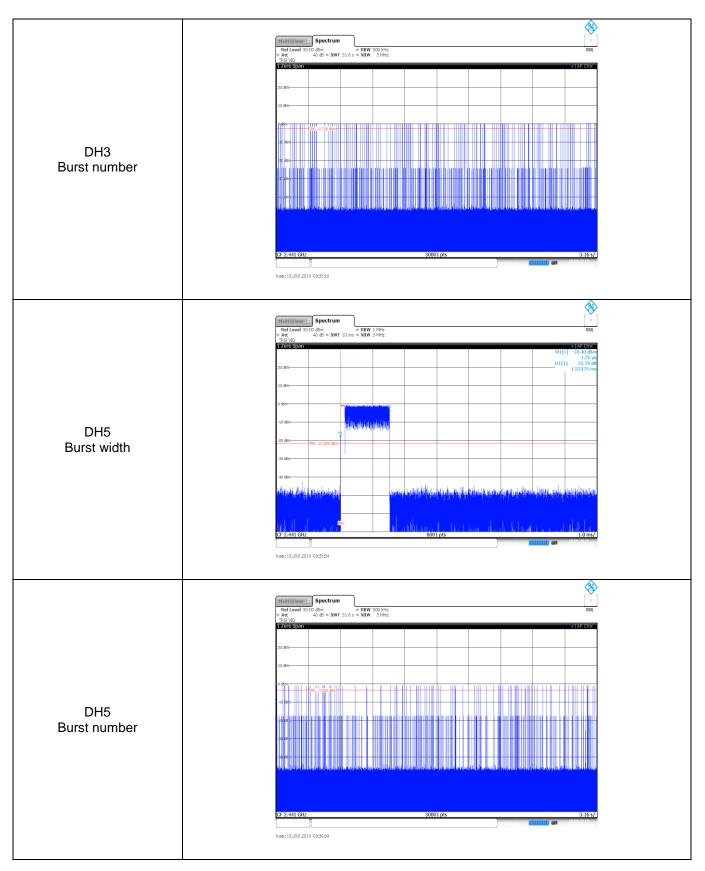

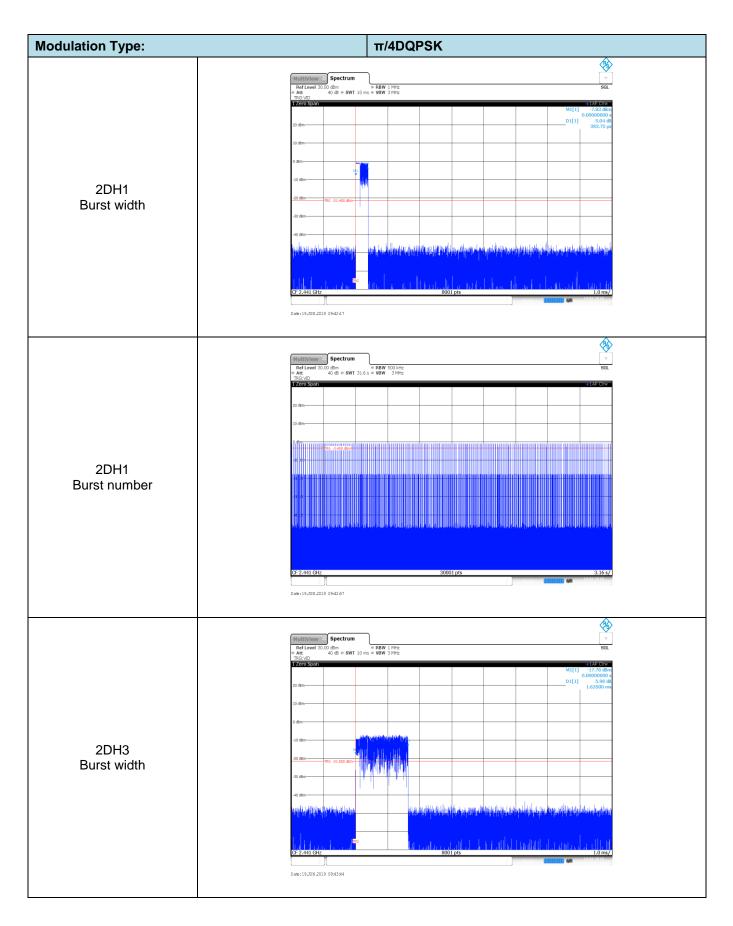

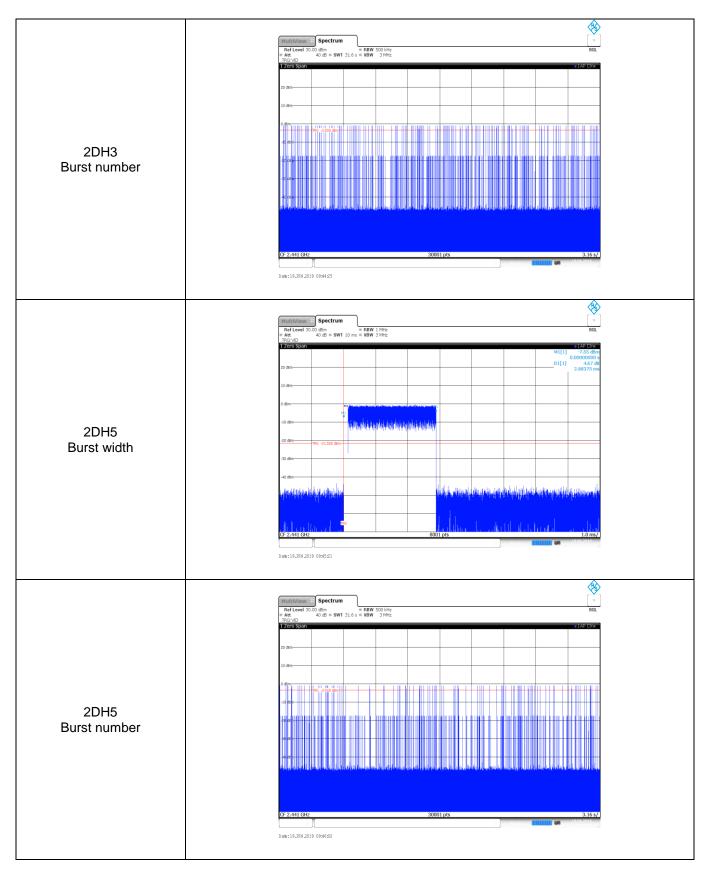

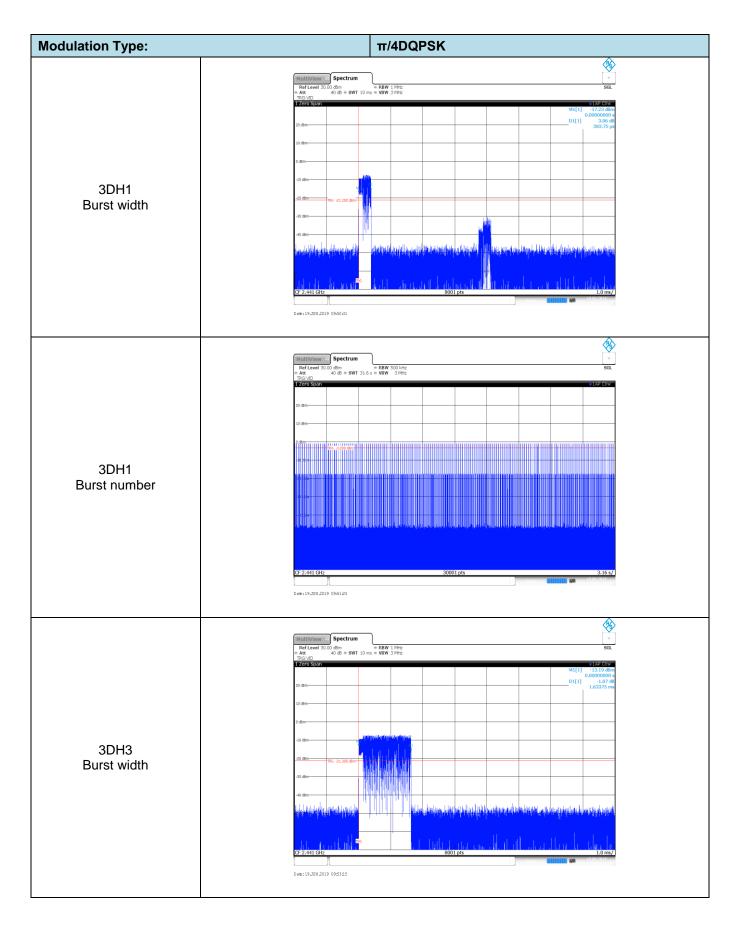

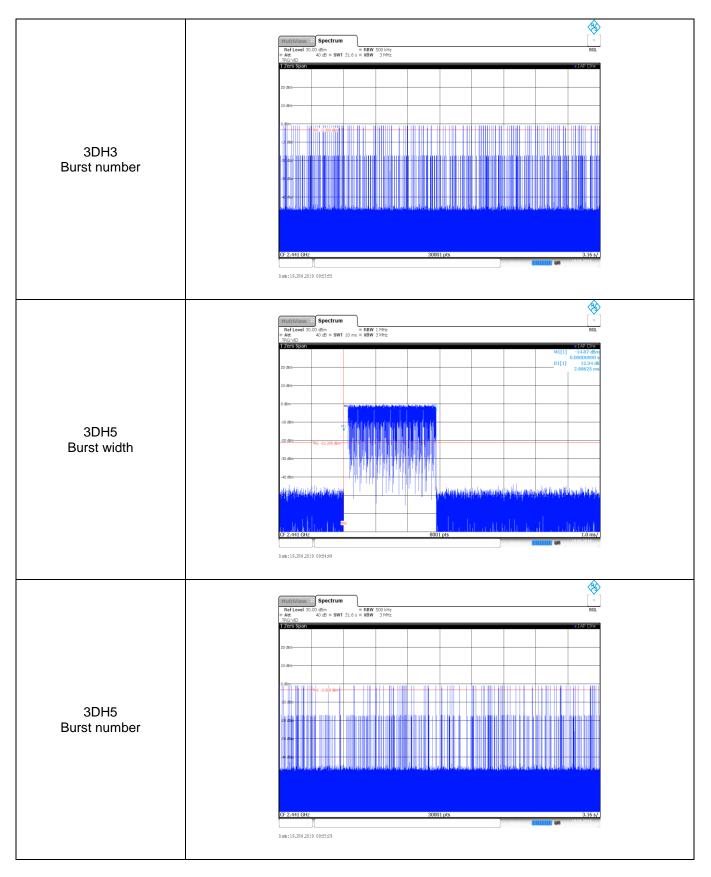

5.8. Pseudorandom Frequency Hopping Sequence


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to chan-nel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS

The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the friststage. The sequence begins with the frist one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:

0 2	2	4	6		62 6	4	78	1	73 75	77
Т	Т			 		7	1		 	Т
							1			L
							1			L
				 		3	1		 	

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

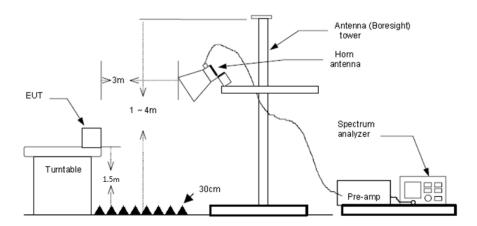

TEST PROCEDURE

- 1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow: RBW=1 MHz, VBW=3 MHz Peak detector for Peak value RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☑ Passed □ Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Test channe	el:				СН00					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value	
2310.00	34.83	28.05	6.62	37.59	31.91	74.00	-42.09	Horizontal	Peak	
2390.00	36.12	27.65	6.75	37.59	32.93	74.00	-41.07	Horizontal	Peak	
2310.00	34.37	28.05	6.62	37.59	31.45	74.00	-42.55	Vertical	Peak	
2390.00	37.98	27.65	6.75	37.59	34.79	74.00	-39.21	Vertical	Peak	
2310.00	22.48	28.05	6.62	37.59	19.56	54.00	-34.44	Horizontal	Average	
2390.00	22.72	27.65	6.75	37.59	19.53	54.00	-34.47	Horizontal	Average	
2310.00	22.42	28.05	6.62	37.59	19.50	54.00	-34.50	Vertical	Average	
2390.00	22.24	27.65	6.75	37.59	19.05	54.00	-34.95	Vertical	Average	


Test chann	el:				CH78					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value	
2483.50	60.44	27.26	6.83	37.59	56.94	74.00	-17.06	Horizontal	Peak	
2500.00	33.69	27.20	6.84	37.59	30.14	74.00	-43.86	Horizontal	Peak	
2483.50	62.60	27.26	6.83	37.59	59.10	74.00	-14.90	Vertical	Peak	
2500.00	35.74	27.20	6.84	37.59	32.19	74.00	-41.81	Vertical	Peak	
2483.50	25.29	27.26	6.83	37.59	21.79	54.00	-32.21	Horizontal	Average	
2500.00	21.05	27.20	6.84	37.59	17.50	54.00	-36.50	Horizontal	Average	
2483.50	25.76	27.26	6.83	37.59	22.26	54.00	-31.74	Vertical	Average	
2500.00	21.10	27.20	6.84	37.59	17.55	54.00	-36.45	Vertical	Average	

5.10. Band edge and Spurious Emissions (conducted)

<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

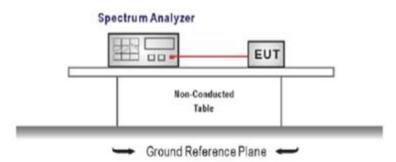

TEST PROCEDURE


- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings: RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic. Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


☑ Passed □ Not Applicable

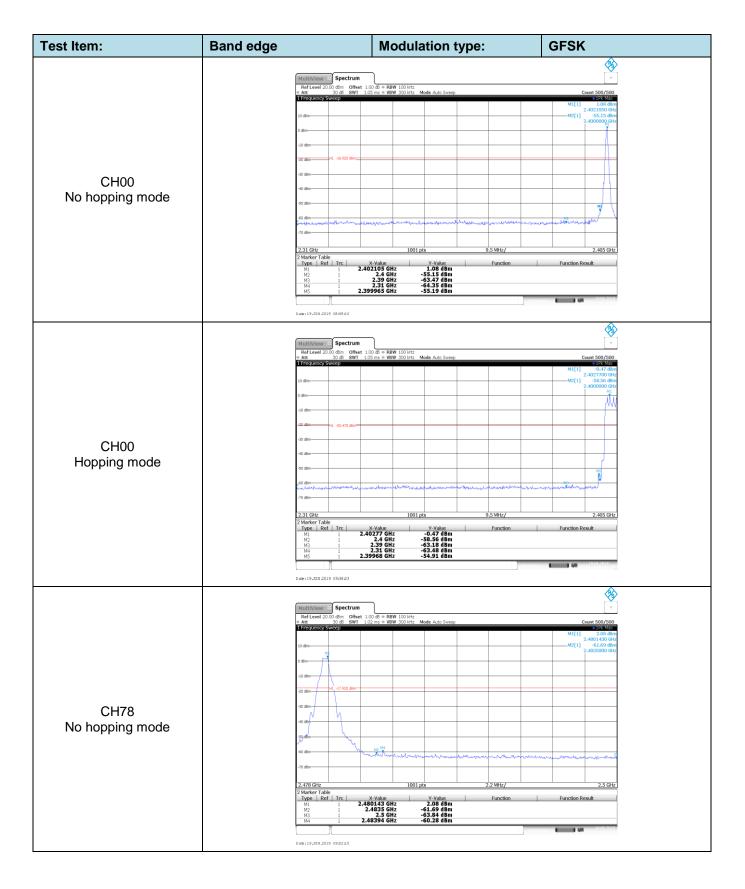

	Ref Level 20.00 dBm Offset 1.00 dB = RBW 100 kHz
	Att 30 dB SWT 1.02 ms # VBW 300 kHz Mode Auto Sweep Count 500/500 Ifrequency Sweep Ple Max
	bitm MI(1) 0.07 dim 12 dim 2478240 GHz 4640 dim 31 MI 4210 dim
	18 dbs
CH78	-32 data
CH78 Hopping mode	
	18 de
	2.478 GHz 1001 pts 2.2 MHz/ 2.5 GHz 2 Marker Table
	Value Y-Value Y-Value Function Function Result M1 1 2.478824 GHz 0.97 dBm Function Function Result M2 1 2.4835 GHz -64.04 dBm Function Function Result M3 1 2.5 GHz -63.73 dBm Function Function Result M4 1 2.49824 GHz -61.70 dBm Function Function Result

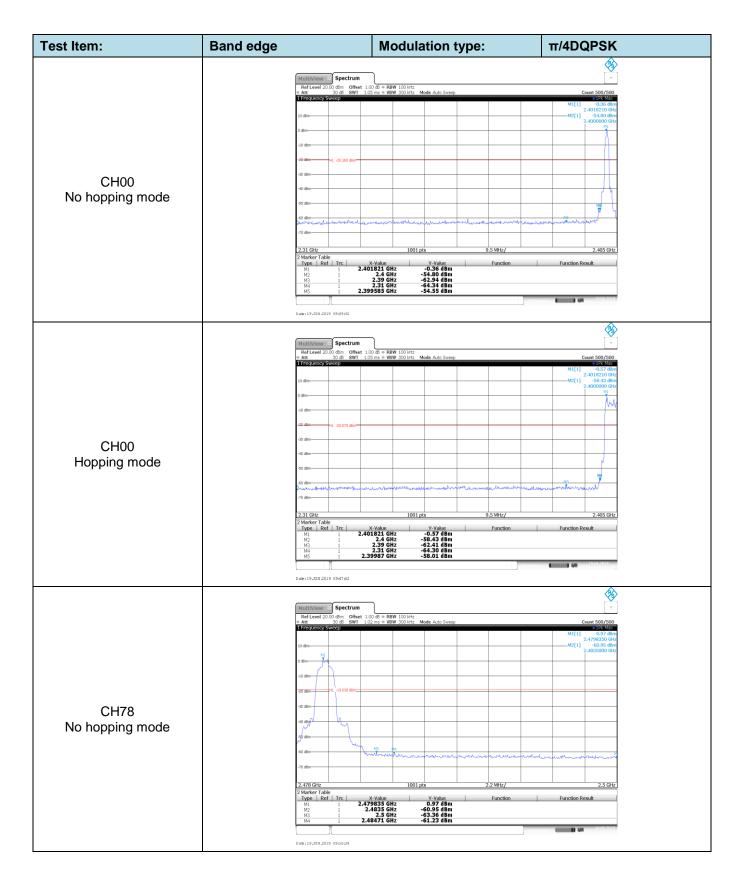



	MultiVirian Spectrum [*] Ref Level 20.00 dm Offset 1.00 dl = RBW 100 Hrt [*] e Att 30 db SWI 1.02 ms = VBW 300 Hrt Mode Auto Sweep Count.500/500 1 Frequency Sweep 91 Krs 91 Krs 91 Krs 91 Krs	
	M1[1] 0.36 min 10 dim	łz m
CH78 Hopping mode		
	Z-478 GHz 1001 pts 2.2 MHz/ 2.5 GHz 2 Marker Table Yyalue Function Function Result Mil 1 2.4783 GHz -3.6 d Bm Mil 1 2.4783 GHz -3.6 d Bm Mil 1 2.4783 GHz -3.6 d Bm Mil 1 2.4783 GHz -62.67 d Bm Mil 1 2.4584 GHz -63.67 d Bm Mil 1 2.4584 GHz -63.67 d Bm Mil 1 2.4584 GHz -61.91 d Bm	Z
	Dee:19.JDL2019 048.28	

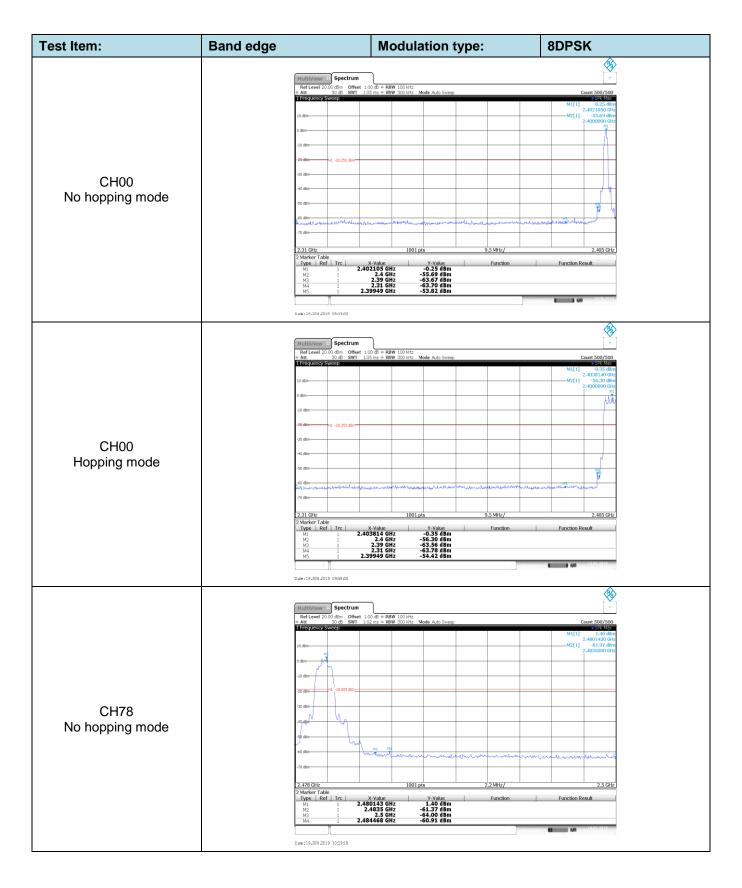



	MultiViruw E Spectrum Ref.red 2000 dbm Offset 100 db = BBW 100 Htr
CH78 Hoppig mode	Port Level 2000 mm Offset 100 mit Count 500/500 1 recellency Sweep Intel 200 mm One 100 mit 1 recellency Sweep Intel 200 mm One 100 mit 1 recellency Sweep Intel 200 mm One 100 mm 1 recellency Sweep Intel 200 mm One 100 mm 1 recellency Sweep Intel 200 mm One 100 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 10 mm Intel 200 mm Intel 200 mm Intel 200 mm 20
	M3 1 2.4853 GHz -63.16 dBm M3 1 2.5 GHz -63.26 dBm M4 1 2.48537 GHz -61.41 dBm Dat:19.2014.2019 09:5636


CH00 ference level	Test Item:	SE	Modulation type:	GFSK
CH00 ference level CH00 Hz-1000MHz CH00 Hz-26GHz CH00 Hz-26GHz		Multiviau Spectrum)	\$
CH00 ference level		Ref Level 30.00 dBm Offset 1.0 Att 30 dB SWT 1.04	0 d8 = RBW 100 kHz I ms = VBW 300 kHz Mode Auto Sweep	Count 100/100
CH00 ference level		1 Frequency sweep		
CH00 ference level		20 d8m		
CH00 ference level		10 dBm		
CH00 ference level		0 d8m		
CH00 Hz-1000MHz		-10 d8m		
CH00 Hz-1000MHz CH00 Hz-26GHz	CH00 Reference level	-20 dkm		
CH00 Hz-1000MHz CH00 Hz-200GHz		-30 dBm		
CH00 Hz-1000MHz		-40 dBm	N h	
CH00 Hz-1000MHz		-50 d8m		
CH00 Hz-1000MHz		and and	www.umandown humanan	manunan
CH00 Hz-1000MHz				
CH00 Hz~1000MHz		CF 2.402 GHz	1001 pts 3.0 MHz/	Span 30.0 MHz
CH00 Hz~1000MHz		Dama:19.JUN 2019 08:58:15		
CH00 Hz~1000MHz				()
CH00 Hz~1000MHz		MultiView E Spectrum Ref Level 20.00 dBm Offset 1.0	0 dB = RBW 100 kHz	Ţ
CH00 Hz~1000MHz		* Att 30.db SWT 30.1 1 Frequency Sweep	ms WBW 300 kHz Mode Auto Sweep	Count 10/10 19k MEx M1[1] -60.47 dBm
CH00 Hz~1000MHz		10 d8m		548.6580 MH
CH00 Hz~1000MHz		0 dBm		
CH00 Hz~1000MHz		-10 dBm		
CH00 Hz~1000MHz				
Hz~1000MHz	CH00			
CH00 GHz-26GHz	30MHz~1000MHz			
CH00 GHz~26GHz				
CH00 GH2~26GHz		-50 dbm		
CH00 GHz~26GHz		-60 dBm- Rindik Johnson (and a view de adaetie		
CH00 GHz~26GHz		-76 dBm		
CH00 GHz~26GHz		30.0 MHz	30001 pts 97.0 MHz/	1.0 GH
CH00 GHz~26GHz		Date: 19.JUN 2019 08:59:07		
CH00 GHz~26GHz				
CH00 Gen difference 200 gen ginne verse 300 stret worde Auto Sweep Count 10/1 11670Lent/V SWC0 0 gen difference 200 gen gen verse 300 stret worde Auto Sweep Count 10/1 11670Lent/V SWC0 0 gen difference 200 gen gen verse 300 stret worde Auto Sweep Count 10/1 30 gen difference 200 gen gen verse 300 stret worde Auto Sweep Count 10/1 30 gen difference 200 gen gen verse 300 stret worde Auto Sweep Count 10/1 30 gen difference 200 gen gen verse 300 stret worde Auto Sweep Count 10/1 30 gen difference 200 gen gen gen verse 300 stret worde Auto Sweep Count 10/1 30 gen difference 200 gen gen verse 300 stret worde Auto Sweep Count 10/1 30 gen difference 200 gen				8
CH00 Gan China Chi		Ref Level 20.00 dBm Offset 1.00 Att 30 dB SWT 250) dB = RBW 100 kHz ms = VBW 300 kHz Mode Auto Sweep	Count 10/10
CH00 GBn		1 Frequency Sweep		●1Pk Max
CH00 GHz~26GHz		10 dBm		
CH00 GHz~26GHz		0 d8m		
CH00 SHz~26GHz		-10 dbm		
GHz~26GHz		-20 dBm		
		-30 dBm-		
	1GHz~26GHz			
1.0 GHz 30001 pts 2.5 GHz/ 26.0 GH				A STATE OF THE STATE OF THE STATE
1.0 GHz 30001 pts 2.5 GHz/ 26.0 GF				
		-70 d8m		
		1.0 GHz	30001 pts 2.5 GHz/	26.0 GHz
Dam:19.JUN 2019 08:49:30		Dama: 19.JUN 2019 08:59:30		

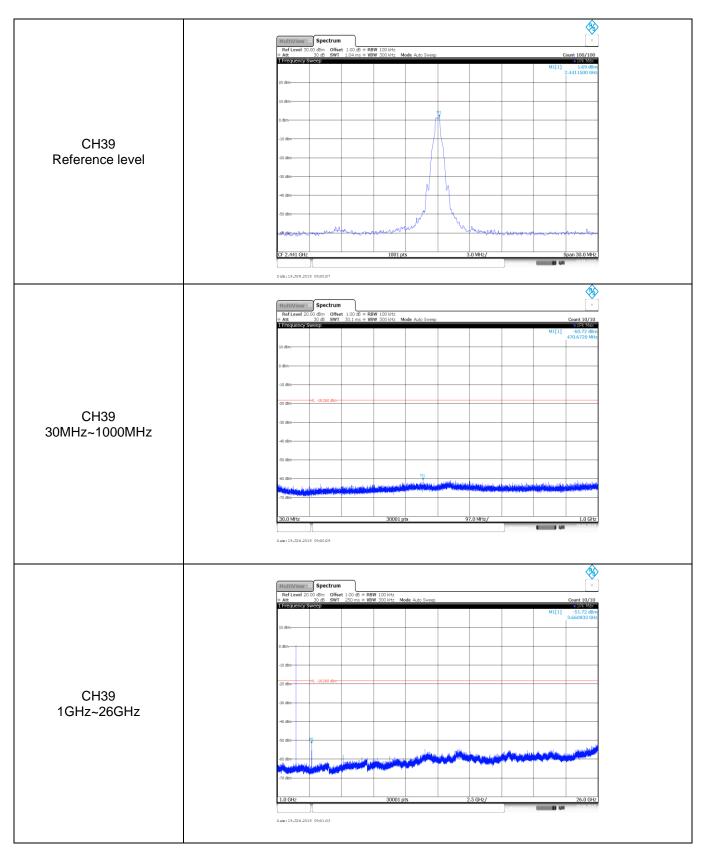


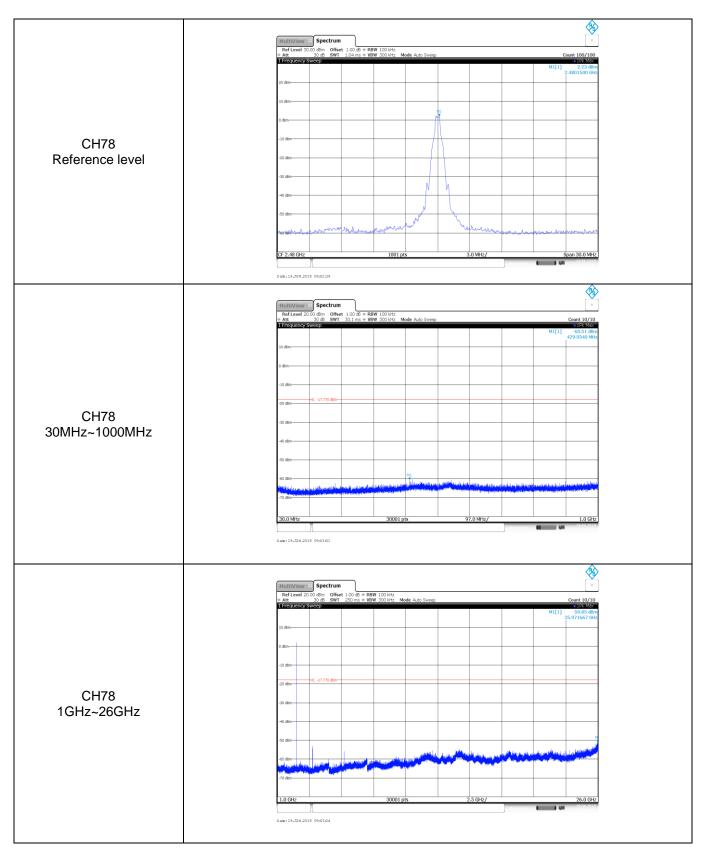


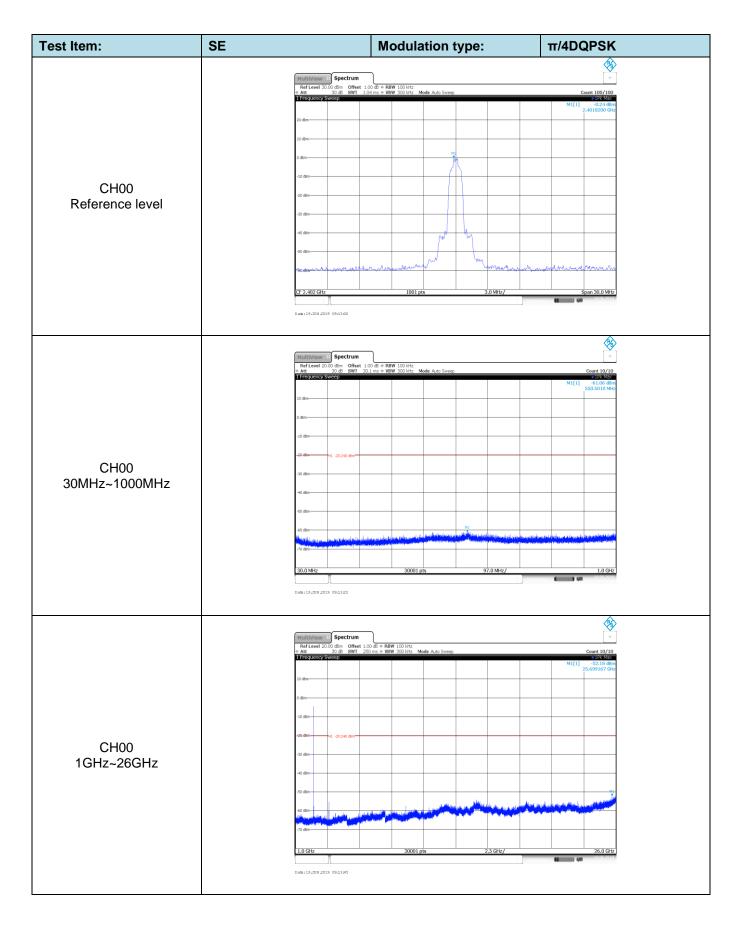


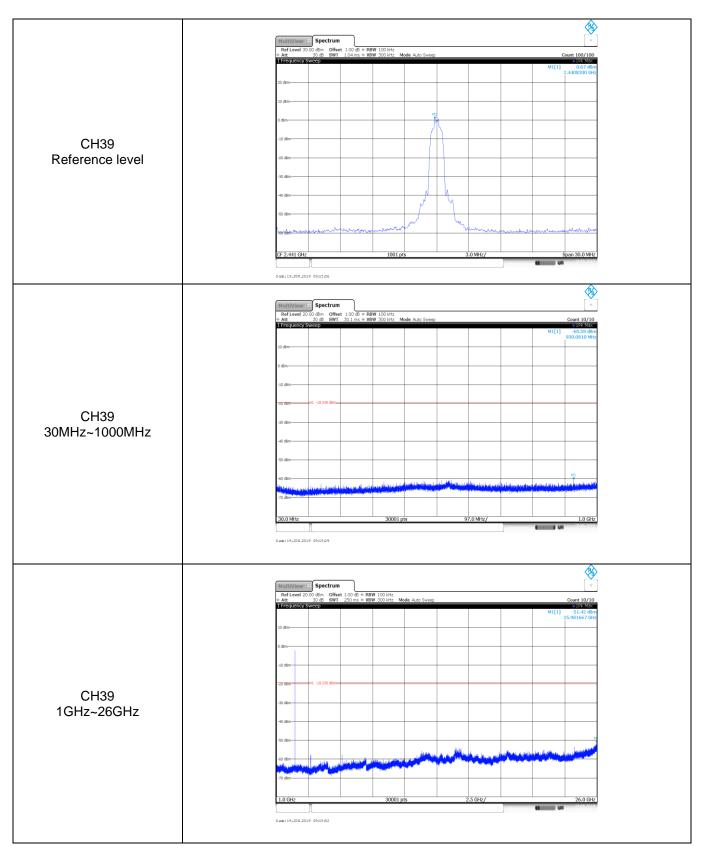

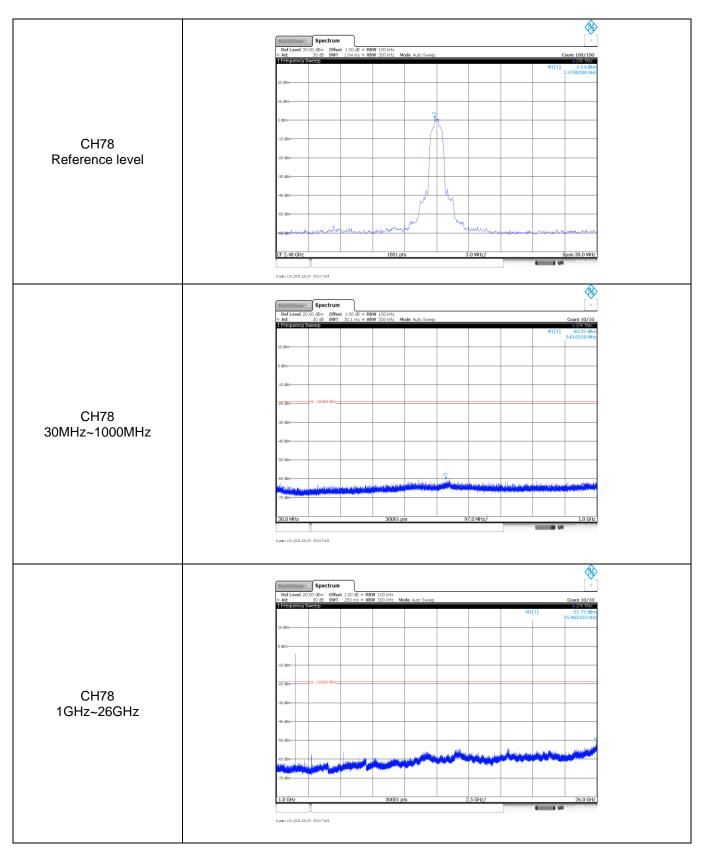

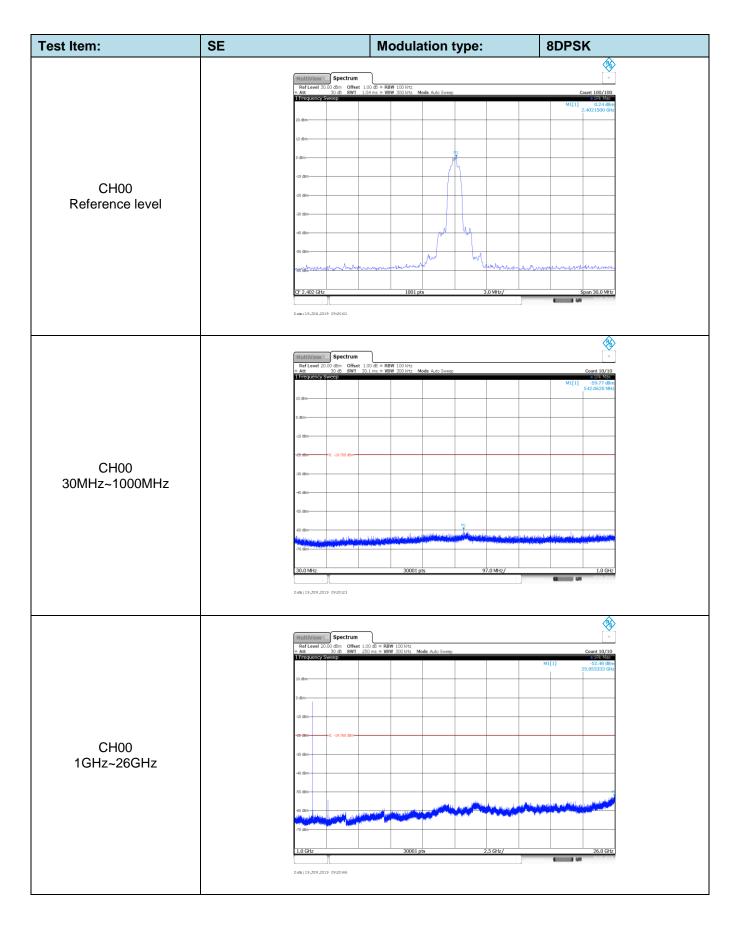

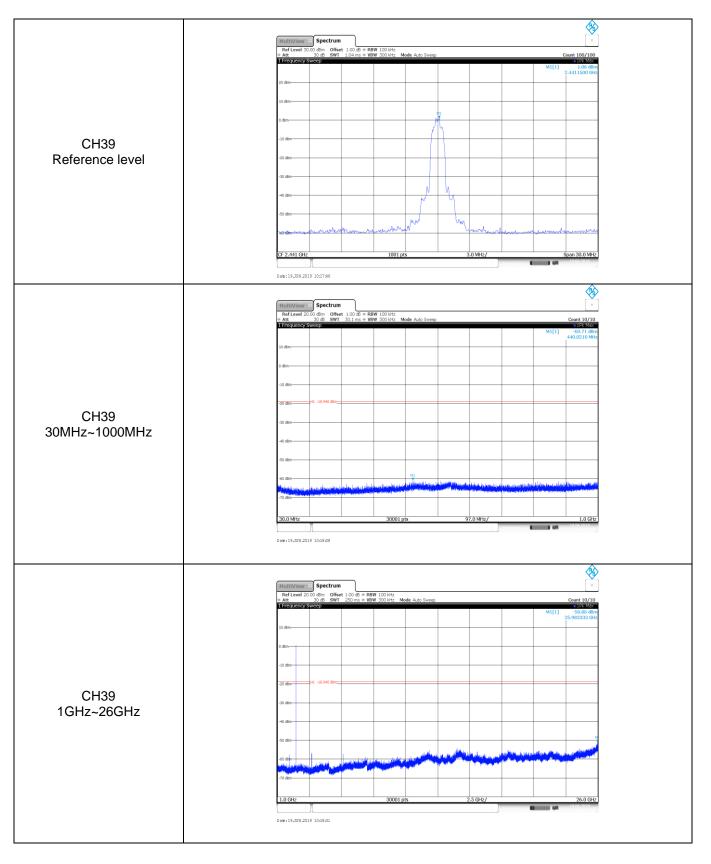

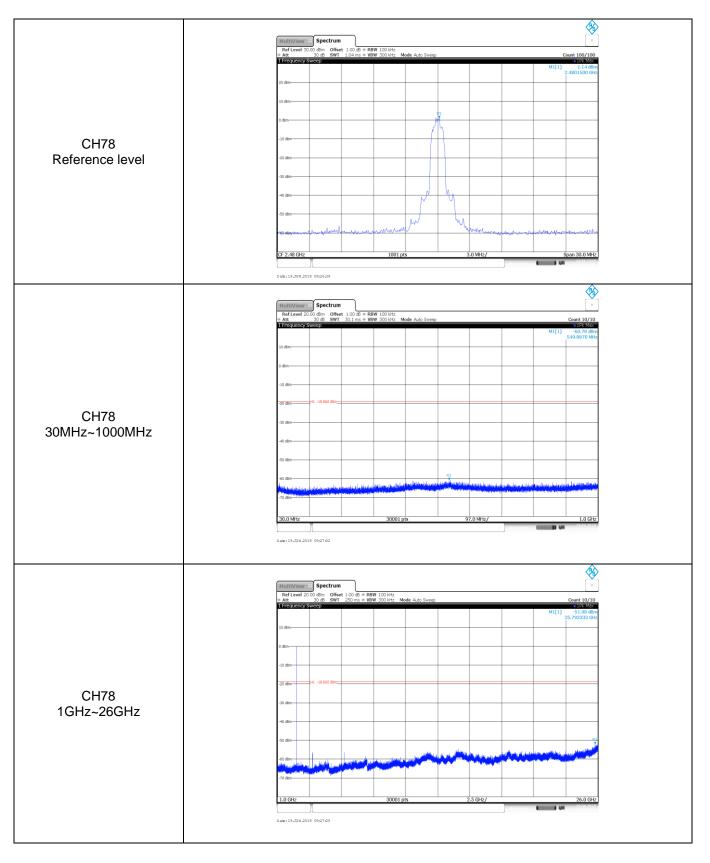

5.11. Spurious Emissions (radiated)


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


> Below 30 MHz

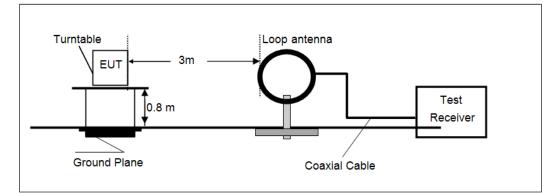

> 30 MHz ~1000 MHz

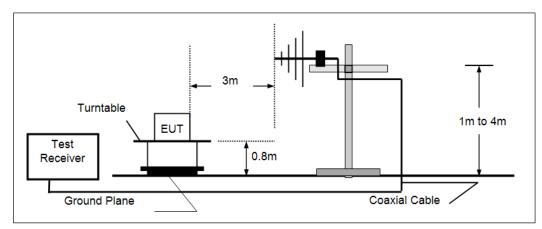

> Above 1 GHz

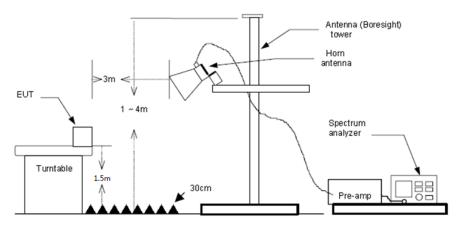

TEST PROCEDURE

- 1. The EUT was tested according to ANSI C63.10:2013.
- 2. The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detectoris 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

 (3) From 1 GHz to 10th harmonic: RBW=1 MHz, VBW=3 MHz Peak detector for Peak value RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☑ Passed □ Not Applicable

Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

➢ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


➢ 30 MHz ~ 1 GHz


937.920000

34.00

6.8

46.0

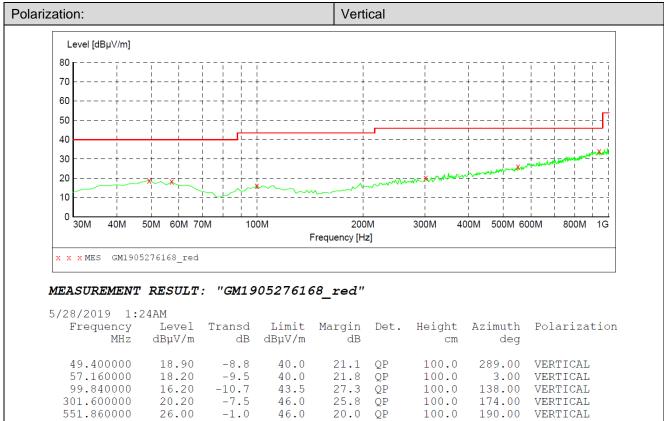

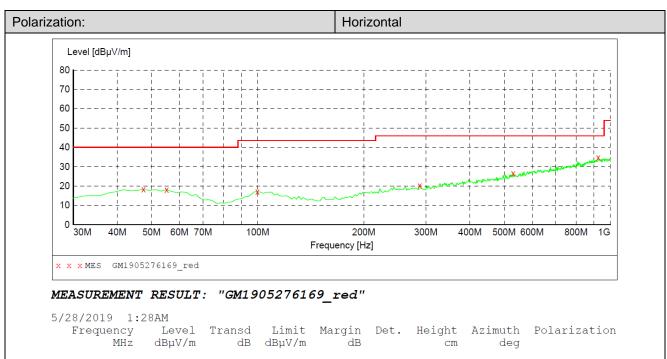

12.0 QP

100.0

339.00

VERTICAL

MHz	dBµV/m	dB	dBµV/m	dB	CM	deg		
47.460000 55.220000 99.840000 288.020000 530.520000	18.30 18.10 17.00 20.30 26.50	-8.9 -9.3 -10.7 -7.7 -1.4	40.0 40.0 43.5 46.0 46.0	21.7 QP 21.9 QP 26.5 QP 25.7 QP 19.5 QP	300.0 100.0 100.0 300.0 300.0	253.00 334.00 232.00 104.00 229.00	HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL	
924.340000	34.80	6.7	46.0	11.2 QP	300.0	140.00	HORIZONTAL	

➢ 1 GHz ~ 25 GHz

	CH00										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value		
1176.94	37.35	26.12	4.61	37.24	30.84	74.00	-43.16	Vertical	Peak		
2980.33	35.79	28.58	7.47	37.58	34.26	74.00	-39.74	Vertical	Peak		
5284.50	34.40	31.33	9.96	34.82	40.87	74.00	-33.13	Vertical	Peak		
8002.06	32.20	37.10	12.30	33.07	48.53	74.00	-25.47	Vertical	Peak		
1185.96	36.78	26.19	4.63	37.23	30.37	74.00	-43.63	Horizontal	Peak		
3151.99	35.33	28.80	7.66	37.44	34.35	74.00	-39.65	Horizontal	Peak		
4652.95	34.36	31.06	9.48	36.00	38.90	74.00	-35.10	Horizontal	Peak		
8549.59	33.20	37.10	12.88	32.92	50.26	74.00	-23.74	Horizontal	Peak		

	CH39										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value		
1150.28	37.50	25.91	4.55	37.25	30.71	74.00	-43.29	Vertical	Peak		
3184.25	35.93	28.80	7.70	37.41	35.02	74.00	-38.98	Vertical	Peak		
5490.18	33.44	31.86	10.19	34.44	41.05	74.00	-32.95	Vertical	Peak		
8002.06	33.34	37.10	12.30	33.07	49.67	74.00	-24.33	Vertical	Peak		
1195.05	37.26	26.26	4.65	37.23	30.94	74.00	-43.06	Horizontal	Peak		
3225.04	35.44	28.65	7.75	37.37	34.47	74.00	-39.53	Horizontal	Peak		
4652.95	34.74	31.06	9.48	36.00	39.28	74.00	-34.72	Horizontal	Peak		
8549.59	32.92	37.10	12.88	32.92	49.98	74.00	-24.02	Horizontal	Peak		

	CH78										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value		
1273.57	37.02	26.23	4.79	37.18	30.86	74.00	-43.14	Vertical	Peak		
3049.39	36.79	28.70	7.54	37.53	35.50	74.00	-38.50	Vertical	Peak		
4652.95	34.24	31.06	9.48	36.00	38.78	74.00	-35.22	Vertical	Peak		
8571.38	33.15	37.19	12.88	32.93	50.29	74.00	-23.71	Vertical	Peak		
1219.64	36.85	26.28	4.69	37.21	30.61	74.00	-43.39	Horizontal	Peak		
3026.20	36.61	28.65	7.51	37.56	35.21	74.00	-38.79	Horizontal	Peak		
5047.83	34.19	31.69	9.71	35.28	40.31	74.00	-33.69	Horizontal	Peak		
8022.46	32.77	37.08	12.35	33.06	49.14	74.00	-24.86	Horizontal	Peak		

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

3. The emission levels of other frequencies are very lower than the limit and not show in test report.

6. TEST SETUP PHOTOS


Conducted Emissions (AC Mains)

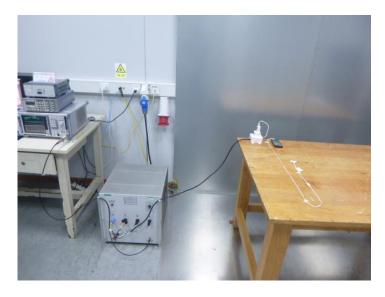

Radiated Emissions





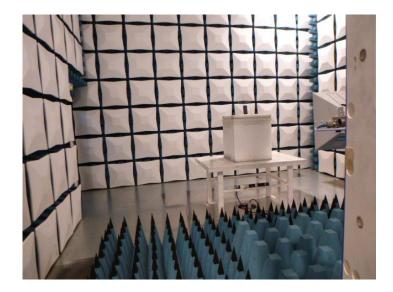

7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: CHTEW19060102

-----End of Report------