

FCC Radio Test Report

FCC ID: 2BCGWH500

Report No. : BTL-FCCP-1-2404G123
Equipment : Smart HomeBase
Model Name : Tapo H500
Brand Name : tp-link, tapo
Applicant : TP-LINK CORPORATION PTE. LTD.
Address : 7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987


Radio Function : WLAN 2.4 GHz

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2024/5/31
Date of Test : 2024/6/4 ~ 2024/6/26
Issued Date : 2024/9/14

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Poken Huang, Engineer

Approved by : 
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 DUTY CYCLE	8
2 GENERAL INFORMATION	9
2.1 DESCRIPTION OF EUT	9
2.2 TEST MODES	11
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 SUPPORT UNITS	13
3 AC POWER LINE CONDUCTED EMISSIONS TEST	14
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 DEVIATION FROM TEST STANDARD	14
3.4 TEST SETUP	15
3.5 TEST RESULT	15
4 RADIATED EMISSIONS TEST	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	17
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULT – 9KHZ TO 30 MHZ	19
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	19
4.8 TEST RESULT – ABOVE 1 GHZ	19
5 BANDWIDTH TEST	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM TEST STANDARD	20
5.4 TEST SETUP	20
5.5 EUT OPERATING CONDITIONS	20
5.6 TEST RESULT	20
6 OUTPUT POWER TEST	21
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM TEST STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATING CONDITIONS	21
6.6 TEST RESULT	21
7 POWER SPECTRAL DENSITY	22
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM TEST STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATING CONDITIONS	22
7.6 TEST RESULT	22

8	ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST	23
8.1	LIMIT	23
8.2	TEST PROCEDURE	23
8.3	DEVIATION FROM TEST STANDARD	23
8.4	TEST SETUP	23
8.5	EUT OPERATING CONDITIONS	23
8.6	TEST RESULT	23
9	LIST OF MEASURING EQUIPMENTS	24
10	EUT TEST PHOTO	26
11	EUT PHOTOS	26
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	27
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	32
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	35
APPENDIX D	BANDWIDTH	68
APPENDIX E	OUTPUT POWER	73
APPENDIX F	POWER SPECTRAL DENSITY	78
APPENDIX G	ANTENNA CONDUCTED SPURIOUS EMISSIONS	83

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2404G123	R00	Original Report.	2024/9/14	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX C APPENDIX D APPENDIX E	Pass	-----
15.247(a)	Bandwidth	APPENDIX E	Pass	-----
15.247(b)	Output Power	APPENDIX F	Pass	-----
15.247(e)	Power Spectral Density	APPENDIX G	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX H	Pass	-----
15.203	Antenna Requirement	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The device what use replaceable antennas with non-standard interfaces are considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

(FCC DN: TW0659)

☒ CB21 ☒ C06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C06	CISPR	150 kHz ~ 30MHz	2.4498

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U (dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test:

Test Item	U (dB)
Occupied Bandwidth	0.53
Output power	0.37
Power Spectral Density	0.66
Conducted Spurious emissions	0.53
Conducted Band edges	0.53

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.


1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 45%	AC 120V	Ken Lu
Radiated emissions below 1 GHz	25°C, 65%	AC 120V	Ken Lu
Radiated emissions above 1 GHz	25°C, 65%	AC 120V	Ken Lu
Bandwidth	24°C, 60%	AC 120V	Cheng Tsai
Output Power	24°C, 60%	AC 120V	Cheng Tsai
Power Spectral Density	24°C, 60%	AC 120V	Cheng Tsai
Antenna conducted Spurious Emission	24°C, 60%	AC 120V	Cheng Tsai


1.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.


Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11b	4.452	1	4.452	4.634	96.07%	0.17
IEEE 802.11g	1.448	1	1.448	1.528	94.76%	0.23
IEEE 802.11n (HT20)	1.352	1	1.352	1.488	90.86%	0.42
IEEE 802.11n (HT40)	0.675	1	0.675	0.815	82.82%	0.82

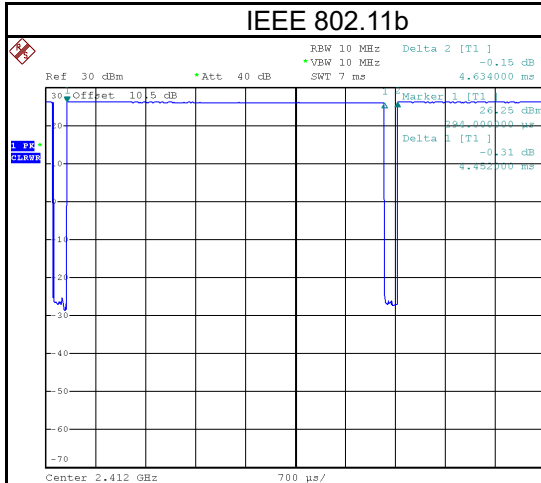


Date: 5.JUN.2024 14:18:07

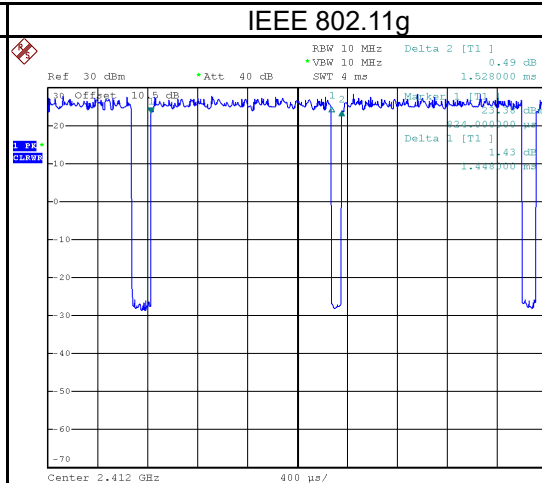

Date: 5.JUN.2024 14:21:47

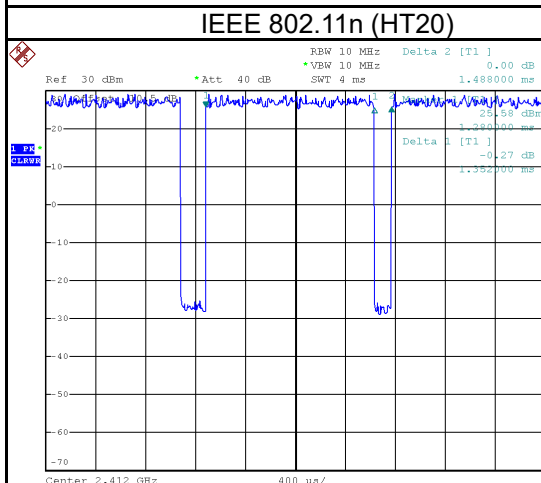

Date: 5.JUN.2024 14:25:55

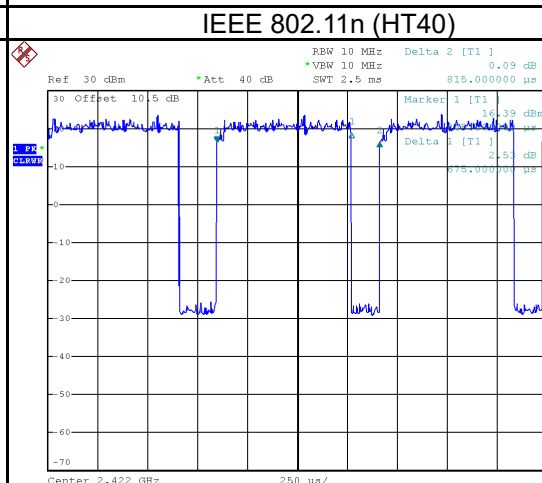

Date: 5.JUN.2024 14:32:26

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Smart HomeBase
Brand Name	tp-link, tapo
Model Name	Tapo H500
Model Difference	N/A
Software Version	1.X
Hardware Version	1.0
Power Source	DC Voltage supplied from AC adapter. Model: T120200-2B4
Power Rating	I/P: 100-240V~ 50/60Hz 0.8A O/P:12.0V  2.0A
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Technology	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Transfer Rate	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Output Power Max.	IEEE 802.11g: 29.03 dBm (0.7998 W)
Test Model	Tapo H500
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20)							
CH03 - CH09 for IEEE 802.11n(HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

(3) Table for Filed Antenna:

Ant.	Brand Name	P/N	Type	Connector	Gain (dBi)
1	TP-LINK CORPORATION PTE. LTD.	3101506738	Dipole	N/A	2.00
2	TP-LINK CORPORATION PTE. LTD.	3101506739	Dipole	N/A	2.00

NOTE:

- 1) The EUT incorporates a CDD function. Physically, the EUT provides two completed transmitters and receivers (2T2R).
- 2) For Output Power
For $N_{ANT} = 2 < 4$,
Direction gain = $G_{ANT} + 0 = 2.00 + 0 = 2.00$ dBi.
The Direction gain is less than 6 dBi, so output power limits will not be reduced.
- 3) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(4) Operating Mode and Antenna Configuration

TX Mode \ Operating Mode	2TX
IEEE 802.11b	V (Ant. 1+Ant. 2)
IEEE 802.11g	V (Ant. 1+Ant. 2)
IEEE 802.11n (HT20)	V (Ant. 1+Ant. 2)
IEEE 802.11n (HT40)	V (Ant. 1+Ant. 2)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11g	06	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11b	01/11	Bandedge
	TX Mode_ IEEE 802.11g		
	TX Mode_ IEEE 802.11n (HT20)		
	TX Mode_ IEEE 802.11n (HT40)	03/09	
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11b	01/06/11	Harmonic
	TX Mode_ IEEE 802.11g		
	TX Mode_ IEEE 802.11n (HT20)		
	TX Mode_ IEEE 802.11n (HT40)	03/06/09	
Transmitter Radiated Emissions (above 18GHz)	TX Mode_ IEEE 802.11g	06	-
Bandwidth & Output Power & Power Spectral Density & Antenna conducted Spurious Emission	TX Mode_ IEEE 802.11b	01/06/11	-
	TX Mode_ IEEE 802.11g		
	TX Mode_ IEEE 802.11n (HT20)		
	TX Mode_ IEEE 802.11n (HT40)	03/06/09	


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) For radiated emission below 1 GHz test, the IEEE 802.11g Mode Channel 06 is found to be the worst case and recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

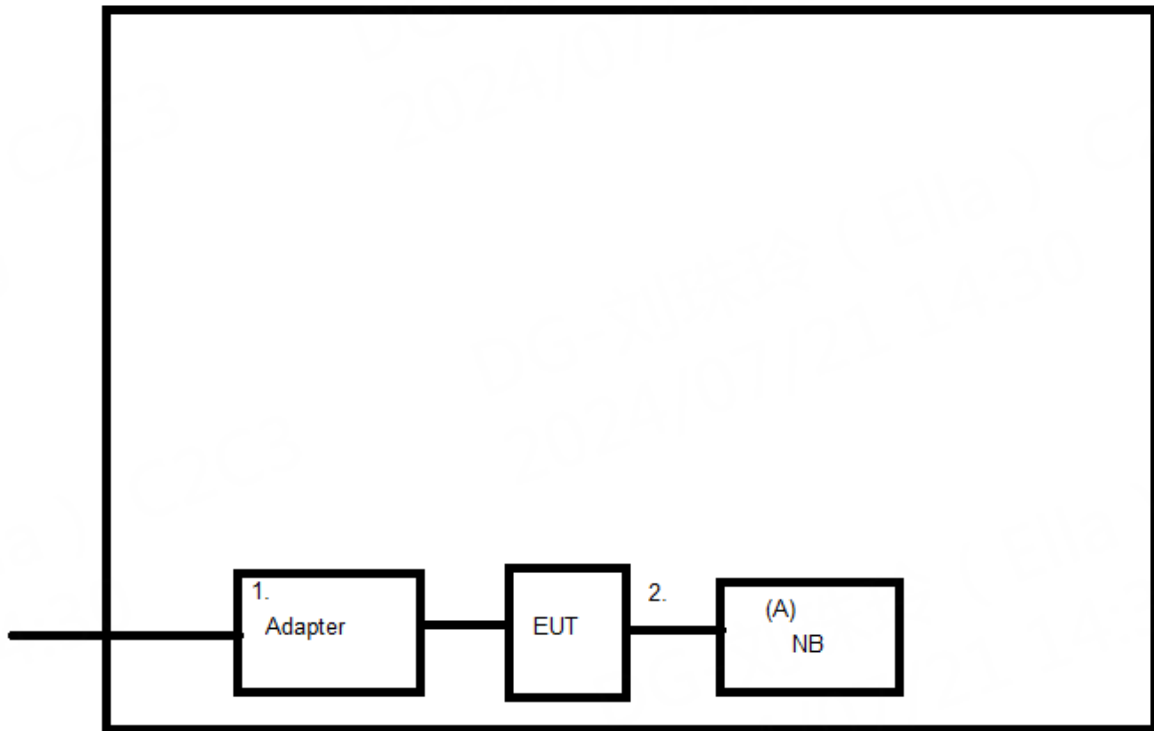

Radiated Emissions

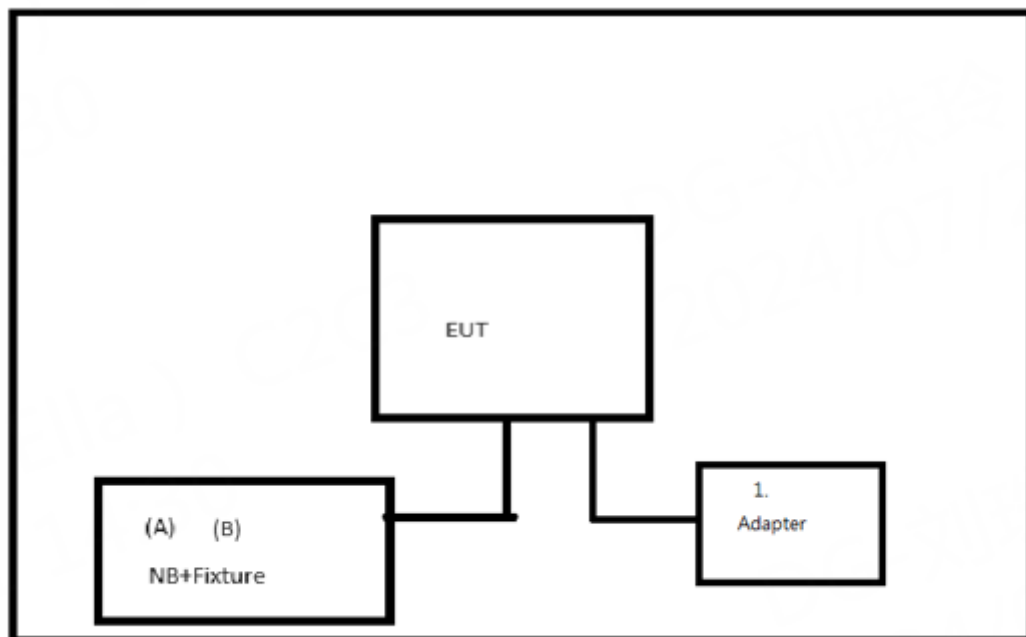

2.4 SUPPORT UNITS

AC power line conducted emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Notebook	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	DC cable	N	N	1m	Supplied by test requester.
2	RJ45 cable	Y	N	1m	Furnished by test lab.

Radiated Emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Fixture	N/A	N/A	N/A	Furnished by test lab.
B	Notebook	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	DC cable	N	N	1m	Supplied by test requester.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

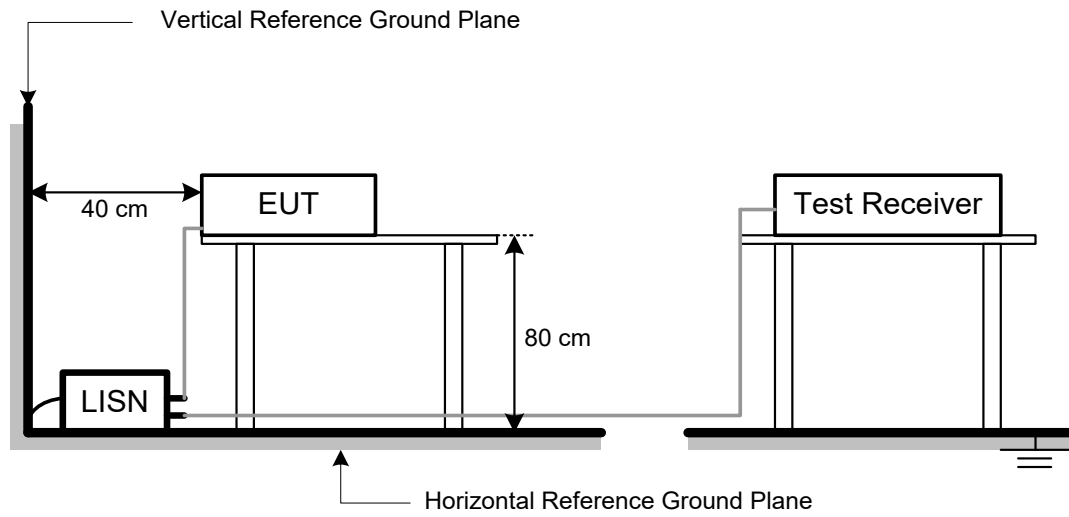

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
21.22	-	54	=	-32.78

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Mode	VBW(Hz)
IEEE 802.11b	1.8k
IEEE 802.11g	750
IEEE 802.11n (HT20)	300
IEEE 802.11n (HT40)	300
IEEE 802.11ax (HE20)	300
IEEE 802.11ax (HE40)	300
IEEE 802.11be (EHT20)	300
IEEE 802.11be (EHT40)	300

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE



- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

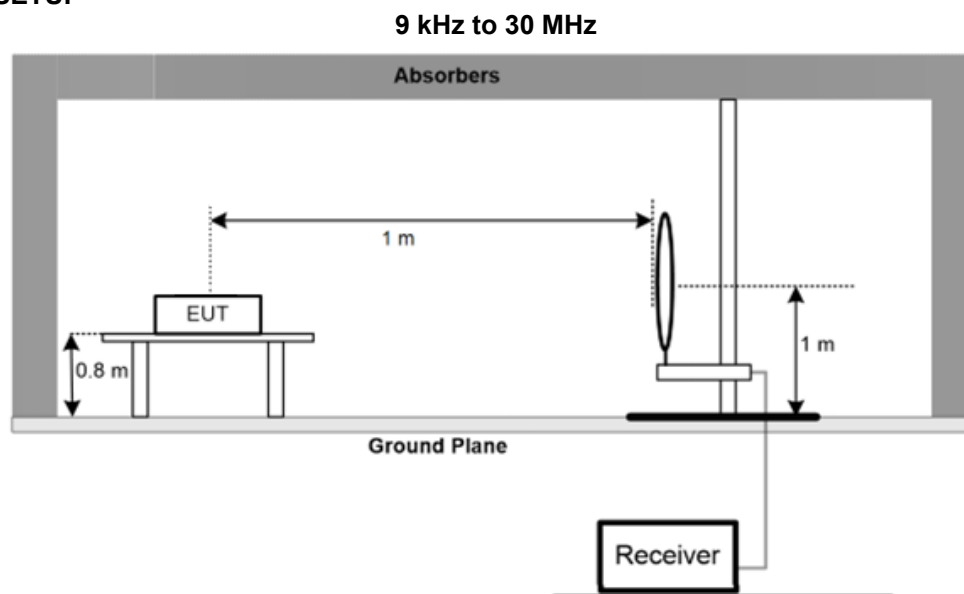

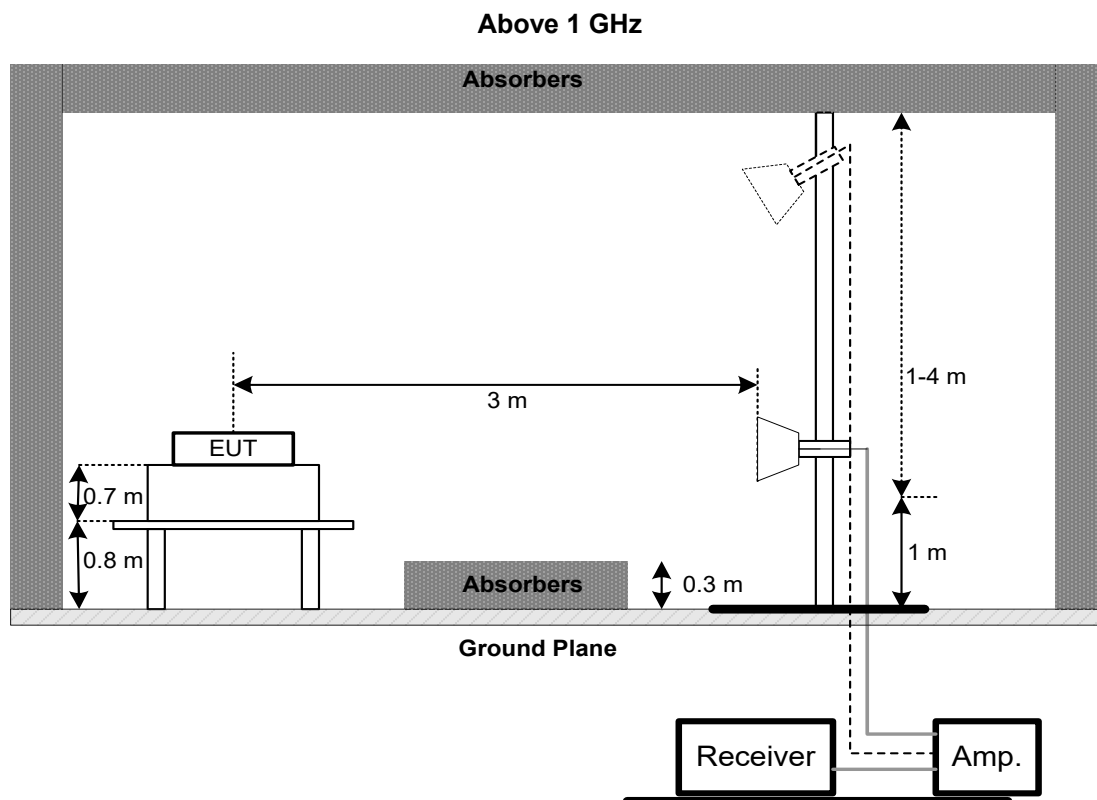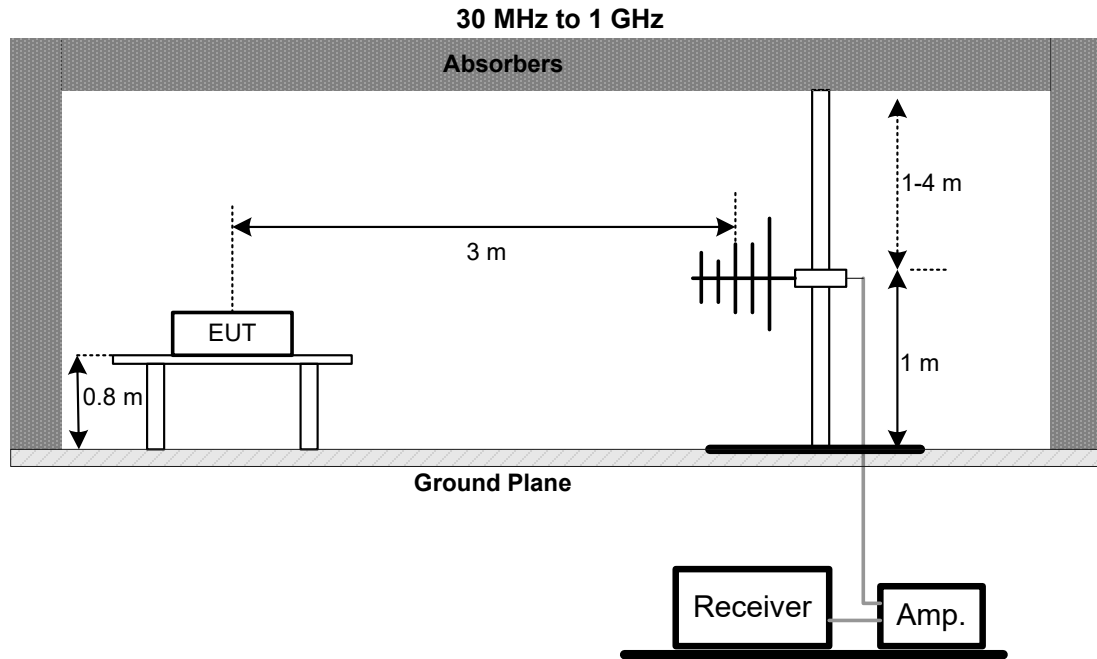

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 9kHz TO 30 MHz

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHz TO 1 GHz

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHz

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Limit
15.247(a)	6 dB Bandwidth	500 kHz

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit
15.247(b)	Maximum Output Power	1 Watt or 30dBm


6.2 TEST PROCEDURE

- The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.
- Subclause 11.9.1.1 of ANSI C63.10 is applied. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

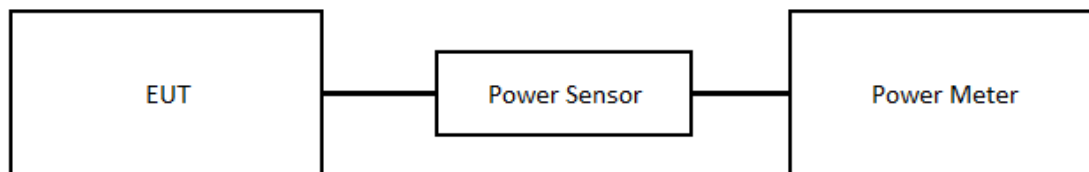

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW = 3 kHz, VBW = 10 kHz, Sweep time = Auto.

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX F.

8 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW = 100 kHz, VBW=300 kHz, Sweep time = Auto.
- c. Offset = antenna gain + cable loss.

8.3 DEVIATION FROM TEST STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULT

Please refer to the APPENDIX G.

9 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2023/7/21	2024/7/20
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2023/12/11	2024/12/10
3	EXA Spectrum Analyzer	keysight	N9038A	MY54130009	2023/6/26	2024/6/25
4	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2023/9/6	2024/9/5
2	Preamplifier	EMCI	EMC118A45SE	980819	2024/3/6	2025/3/5
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2023/9/21	2024/9/20
4	Preamplifier	EMCI	EMC001340	980579	2023/9/6	2024/9/5
5	Test Cable	EMCI	EMC104-SM-1000	180809	2024/3/8	2025/3/7
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2024/3/8	2025/3/7
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2024/3/8	2025/3/7
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2024/2/23	2025/2/22
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2023/9/12	2024/9/11
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170	1136	2023/6/28	2024/6/27
12	TRILOG Broadband Antenna	Schwarzbeck	VULB9168	1371	2023/8/8	2024/8/7
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-N0625	2023/8/8	2024/8/7
14	Test Cable	EMCI	EMC101G-KM-K M-3000	220329	2024/3/13	2025/3/12
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2024/3/13	2025/3/12
16	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
17	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25
2	BTL-Conducted Test	N/A	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25
2	BTL-Conducted Test	N/A	1247788684	N/A	N/A	N/A

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25
2	BTL-Conducted Test	N/A	1247788684	N/A	N/A	N/A

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25
2	BTL-Conducted Test	N/A	1247788684	N/A	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2404G123-FCCP-1 (APPENDIX-TEST PHOTOS).

11 EUT PHOTOS

Please refer to document Appendix No.: EP-2404G123-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/6/3
Test Frequency	-	Phase	Line

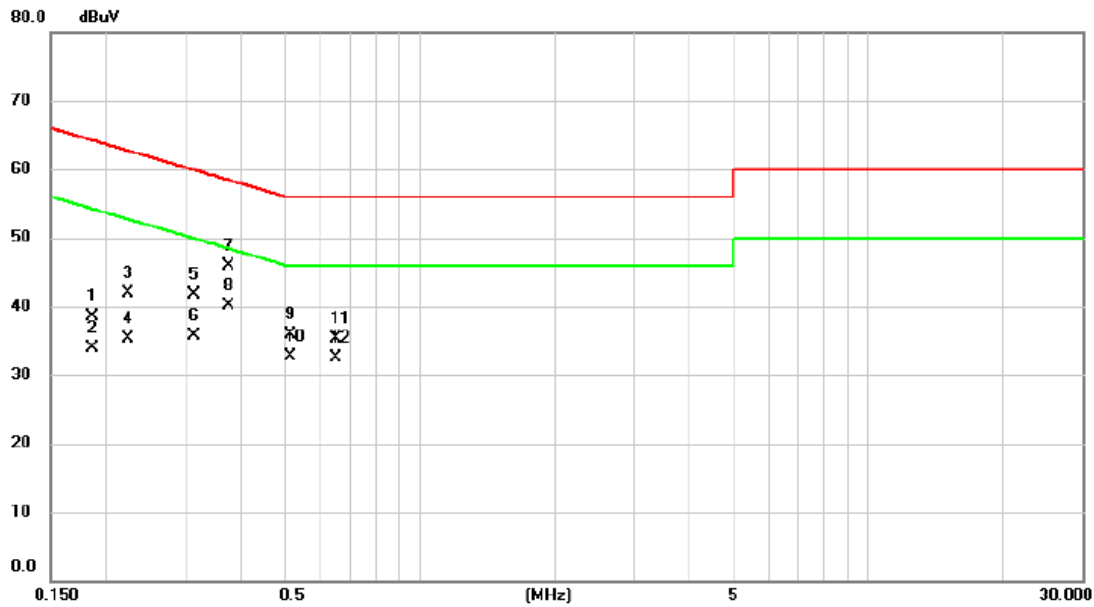


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1867	28.96	9.64	38.60	64.18	-25.58	QP	
2		0.1867	24.19	9.64	33.83	54.18	-20.35	AVG	
3		0.2228	32.18	9.64	41.82	62.71	-20.89	QP	
4		0.2228	25.74	9.64	35.38	52.71	-17.33	AVG	
5		0.3144	32.02	9.65	41.67	59.85	-18.18	QP	
6		0.3144	26.03	9.65	35.68	49.85	-14.17	AVG	
7		0.3733	36.17	9.65	45.82	58.43	-12.61	QP	
8	*	0.3733	30.37	9.65	40.02	48.43	-8.41	AVG	
9		0.5135	26.17	9.66	35.83	56.00	-20.17	QP	
10		0.5135	23.10	9.66	32.76	46.00	-13.24	AVG	
11		0.6485	25.68	9.67	35.35	56.00	-20.65	QP	
12		0.6485	22.90	9.67	32.57	46.00	-13.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/6/3
Test Frequency	-	Phase	Neutral

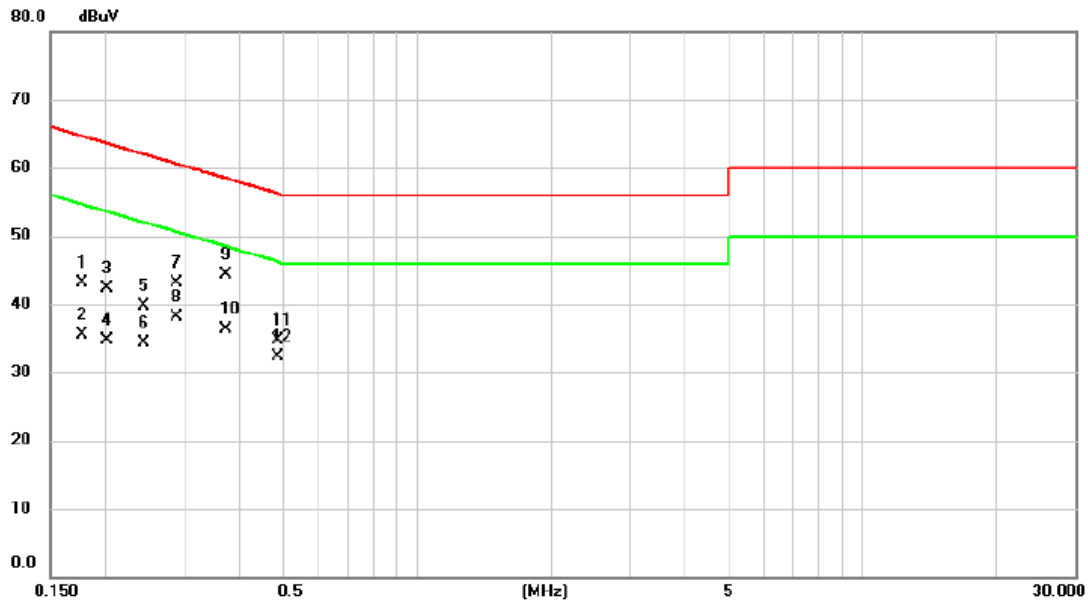


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1768	33.43	9.63	43.06	64.63	-21.57	QP	
2	0.1768	25.87	9.63	35.50	54.63	-19.13	AVG	
3	0.2014	32.60	9.63	42.23	63.55	-21.32	QP	
4	0.2014	25.12	9.63	34.75	53.55	-18.80	AVG	
5	0.2441	30.09	9.63	39.72	61.96	-22.24	QP	
6	0.2441	24.66	9.63	34.29	51.96	-17.67	AVG	
7	0.2878	33.45	9.64	43.09	60.59	-17.50	QP	
8	0.2878	28.41	9.64	38.05	50.59	-12.54	AVG	
9	0.3712	34.66	9.63	44.29	58.47	-14.18	QP	
10 *	0.3712	26.68	9.63	36.31	48.47	-12.16	AVG	
11	0.4864	25.05	9.64	34.69	56.23	-21.54	QP	
12	0.4864	22.69	9.64	32.33	46.23	-13.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/6/3
Test Frequency	-	Phase	Line

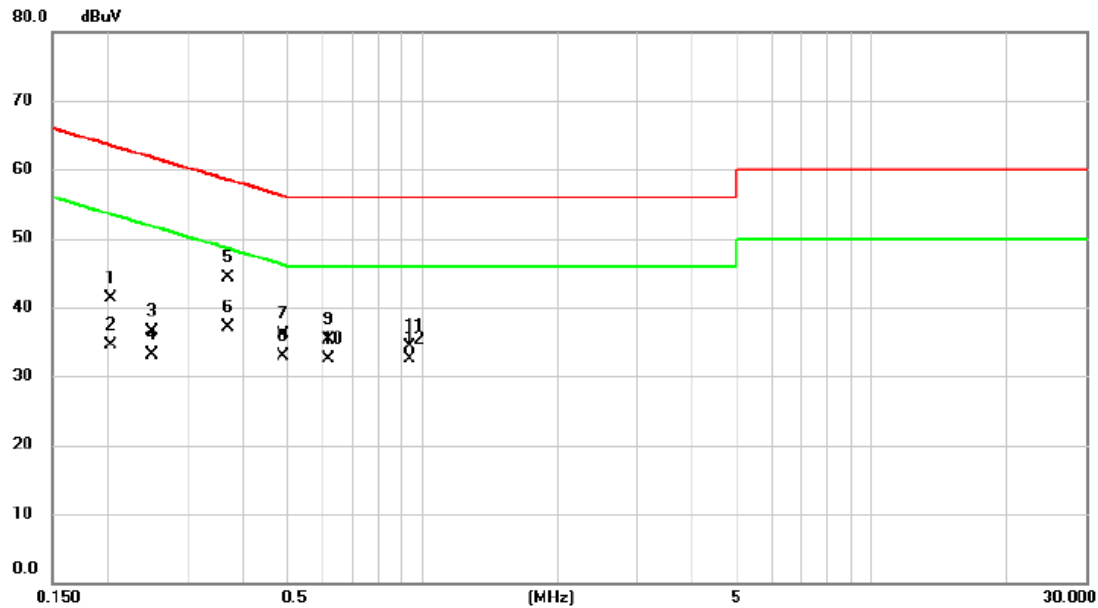


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2021	31.63	9.64	41.27	63.52	-22.25	QP	
2		0.2021	24.83	9.64	34.47	53.52	-19.05	AVG	
3		0.2508	26.84	9.64	36.48	61.73	-25.25	QP	
4		0.2508	23.45	9.64	33.09	51.73	-18.64	AVG	
5		0.3704	34.70	9.65	44.35	58.49	-14.14	QP	
6	*	0.3704	27.50	9.65	37.15	48.49	-11.34	AVG	
7		0.4885	26.45	9.66	36.11	56.19	-20.08	QP	
8		0.4885	23.34	9.66	33.00	46.19	-13.19	AVG	
9		0.6170	25.72	9.67	35.39	56.00	-20.61	QP	
10		0.6170	22.88	9.67	32.55	46.00	-13.45	AVG	
11		0.9410	24.64	9.70	34.34	56.00	-21.66	QP	
12		0.9410	22.71	9.70	32.41	46.00	-13.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/6/3
Test Frequency	-	Phase	Neutral

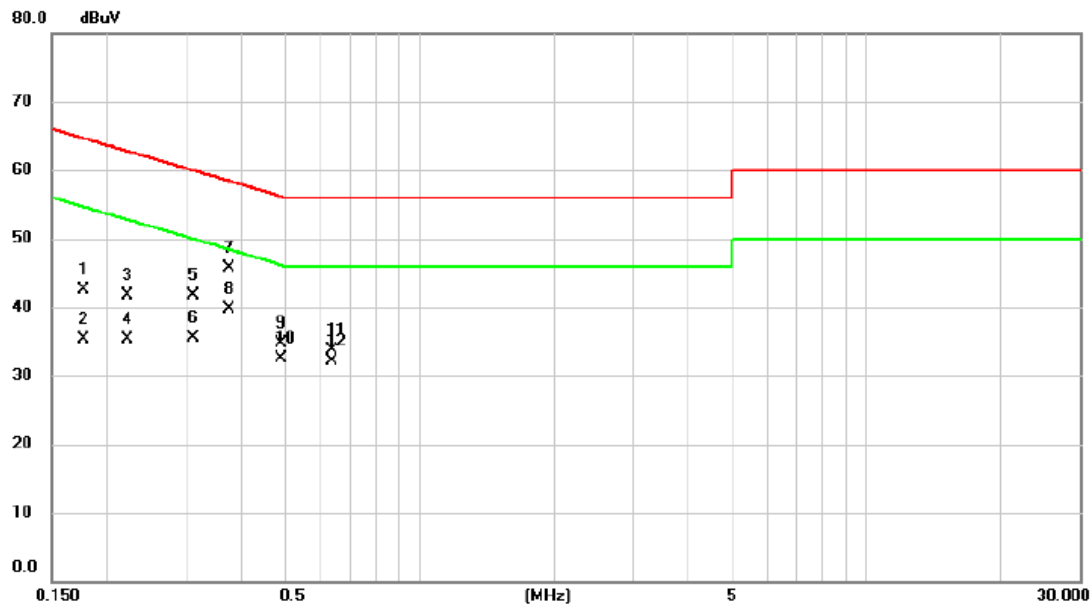


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1776	32.91	9.63	42.54	64.60	-22.06	QP	
2		0.1776	25.68	9.63	35.31	54.60	-19.29	AVG	
3		0.2221	32.14	9.63	41.77	62.74	-20.97	QP	
4		0.2221	25.70	9.63	35.33	52.74	-17.41	AVG	
5		0.3127	32.11	9.63	41.74	59.90	-18.16	QP	
6		0.3127	25.83	9.63	35.46	49.90	-14.44	AVG	
7		0.3747	36.11	9.63	45.74	58.40	-12.66	QP	
8	*	0.3747	30.02	9.63	39.65	48.40	-8.75	AVG	
9		0.4902	25.06	9.64	34.70	56.16	-21.46	QP	
10		0.4902	22.82	9.64	32.46	46.16	-13.70	AVG	
11		0.6350	24.00	9.65	33.65	56.00	-22.35	QP	
12		0.6350	22.51	9.65	32.16	46.00	-13.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11g	Test Date	2024/6/20
Test Frequency	2437MHz	Polarization	Vertical

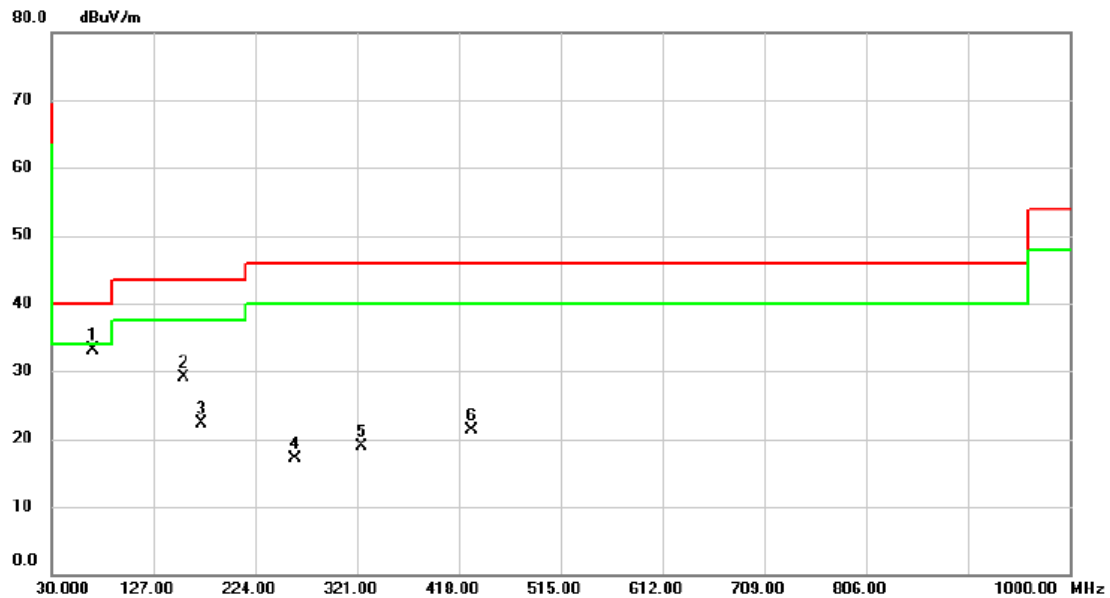


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	69.7700	46.64	-13.60	33.04	40.00	-6.96	peak	100	329
2		156.1000	40.19	-11.08	29.11	43.50	-14.39	peak	100	329
3		172.5900	34.23	-12.01	22.22	43.50	-21.28	peak	100	294
4		261.8300	28.75	-11.62	17.13	46.00	-28.87	peak	200	124
5		324.8800	28.48	-9.59	18.89	46.00	-27.11	peak	200	12
6		429.6400	27.91	-6.60	21.31	46.00	-24.69	peak	100	191

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/20
Test Frequency	2437MHz	Polarization	Horizontal

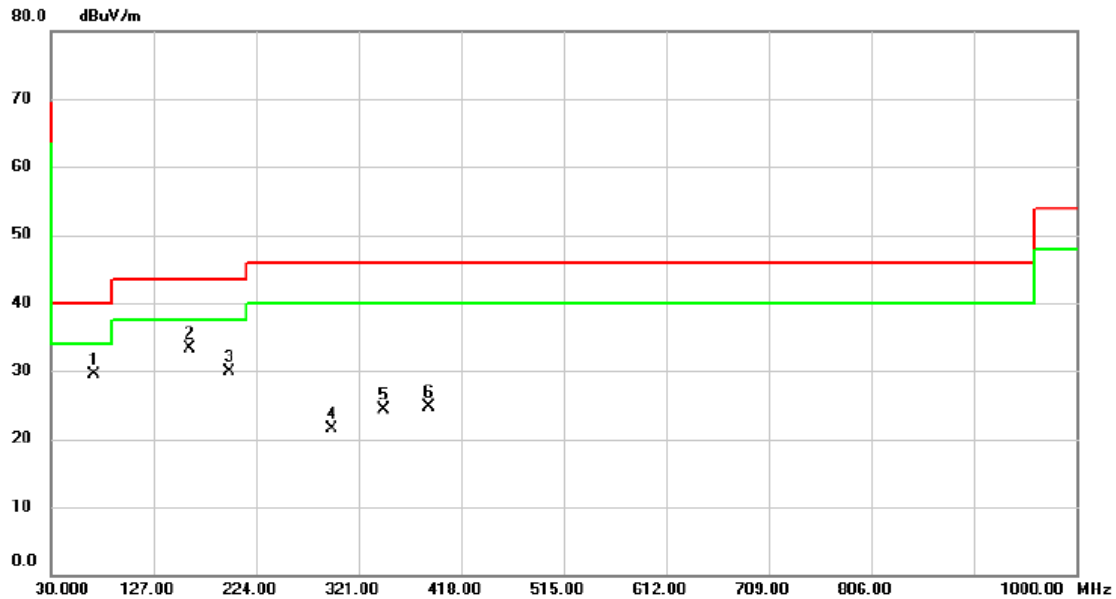


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	70.7400	43.38	-13.83	29.55	40.00	-10.45	peak	200	188	
2 *	160.9500	44.45	-11.12	33.33	43.50	-10.17	peak	100	220	
3	198.7800	44.12	-14.17	29.95	43.50	-13.55	peak	100	310	
4	295.7800	31.78	-10.29	21.49	46.00	-24.51	peak	100	357	
5	344.2800	33.36	-9.06	24.30	46.00	-21.70	peak	100	292	
6	386.9600	32.51	-7.85	24.66	46.00	-21.34	peak	100	22	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2024/6/21
Test Frequency	2412MHz	Polarization	Vertical

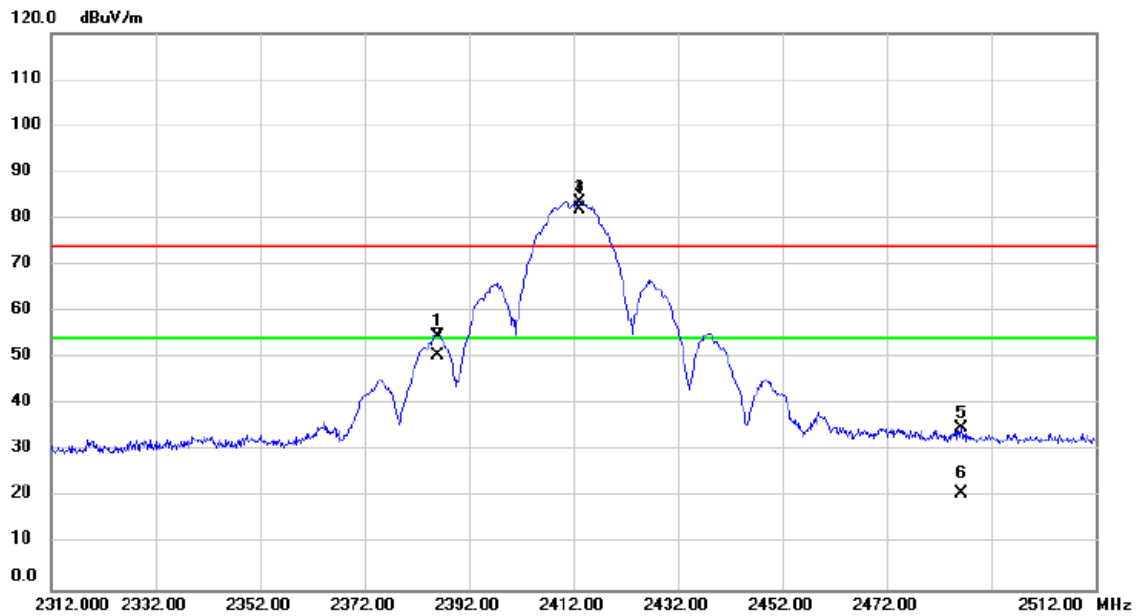


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2386.000	60.91	-6.13	54.78	74.00	-19.22	peak			
2		2386.000	56.65	-6.13	50.52	54.00	-3.48	AVG			
3	X	2413.200	89.66	-6.06	83.60	74.00	9.60	peak			No Limit
4	*	2413.200	87.97	-6.06	81.91	54.00	27.91	AVG			No Limit
5		2486.200	40.77	-5.91	34.86	74.00	-39.14	peak			
6		2486.200	26.85	-5.91	20.94	54.00	-33.06	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/6/21
Test Frequency	2462MHz	Polarization	Vertical

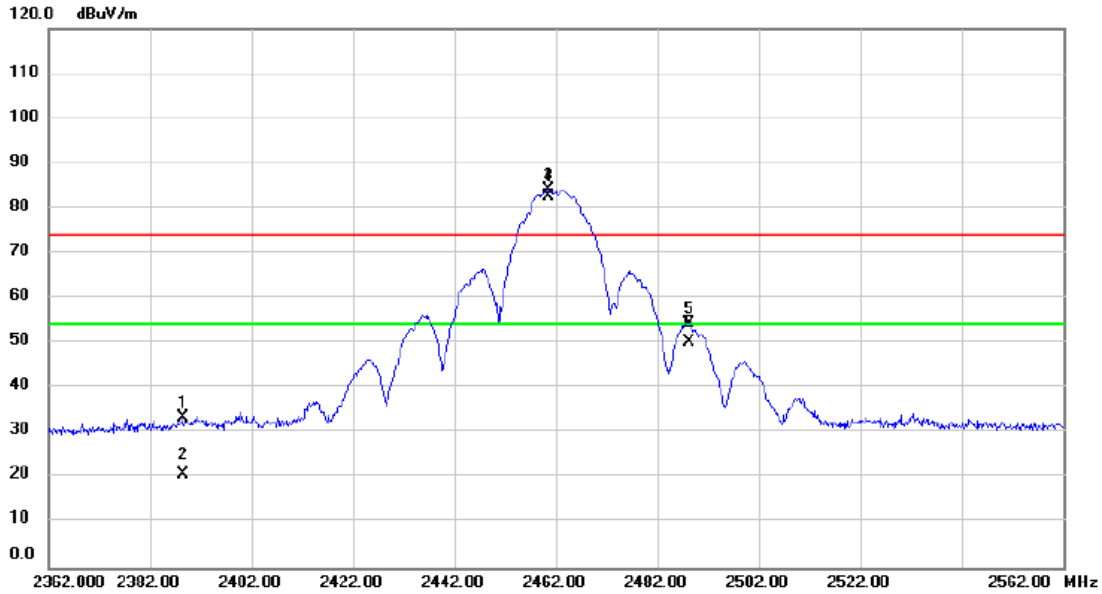


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2388.400	39.48	-6.12	33.36	74.00	-40.64	peak		
2		2388.400	26.88	-6.12	20.76	54.00	-33.24	AVG		
3	X	2460.600	90.21	-5.97	84.24	74.00	10.24	peak		No Limit
4	*	2460.600	88.60	-5.97	82.63	54.00	28.63	AVG		No Limit
5		2488.200	60.38	-5.90	54.48	74.00	-19.52	peak		
6		2488.200	56.14	-5.90	50.24	54.00	-3.76	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/21
Test Frequency	2412MHz	Polarization	Vertical

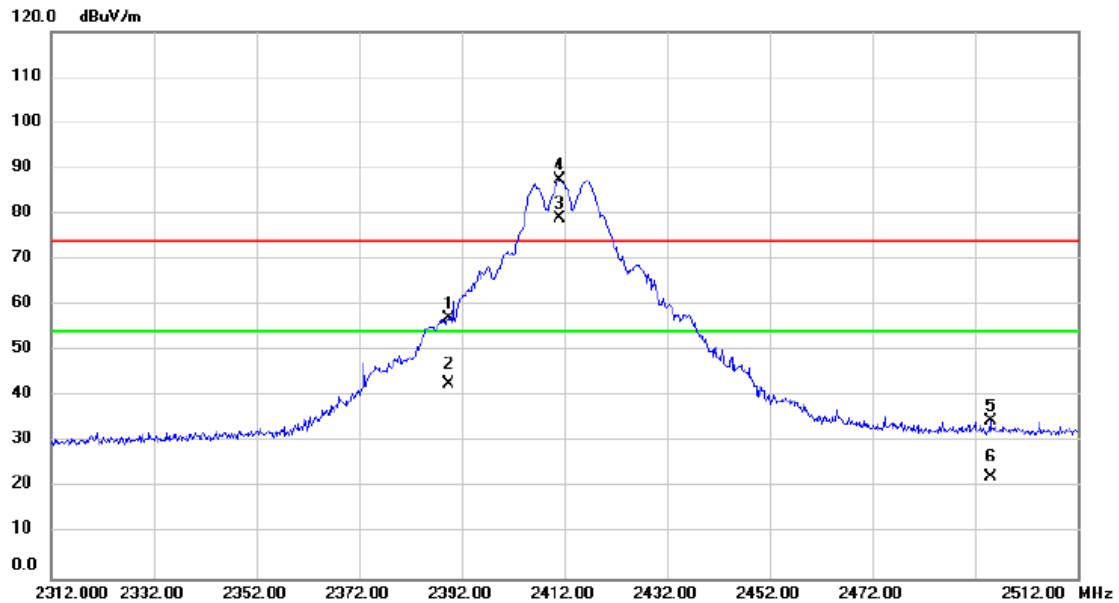


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2389.400	63.24	-6.12	57.12	74.00	-16.88	peak		
2		2389.400	48.82	-6.12	42.70	54.00	-11.30	AVG		
3	X	2411.200	85.13	-6.08	79.05	74.00	5.05	peak		No Limit
4	*	2411.200	93.48	-6.08	87.40	74.00	13.40	peak		No Limit
5		2495.000	40.45	-5.89	34.56	74.00	-39.44	peak		
6		2495.000	28.22	-5.89	22.33	54.00	-31.67	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/21
Test Frequency	2462MHz	Polarization	Vertical

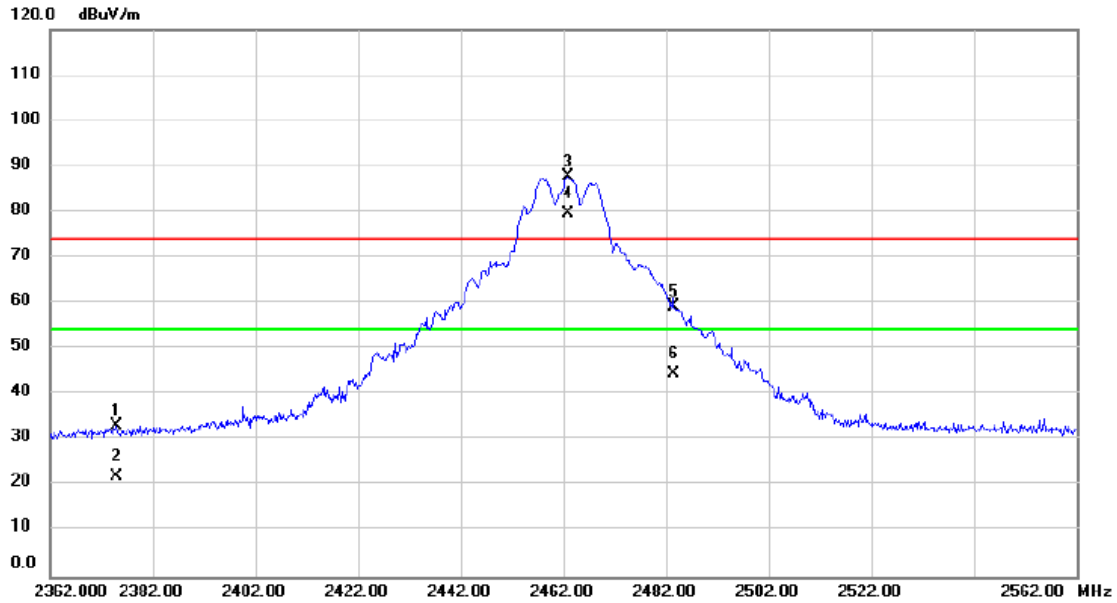


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2374.800	39.44	-6.15	33.29	74.00	-40.71	peak			
2		2374.800	28.19	-6.15	22.04	54.00	-31.96	AVG			
3	X	2462.800	93.83	-5.96	87.87	74.00	13.87	peak			No Limit
4	*	2462.800	85.64	-5.96	79.68	54.00	25.68	AVG			No Limit
5		2483.600	65.25	-5.92	59.33	74.00	-14.67	peak			
6		2483.600	50.46	-5.92	44.54	54.00	-9.46	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT 20)	Test Date	2024/6/21
Test Frequency	2412MHz	Polarization	Vertical

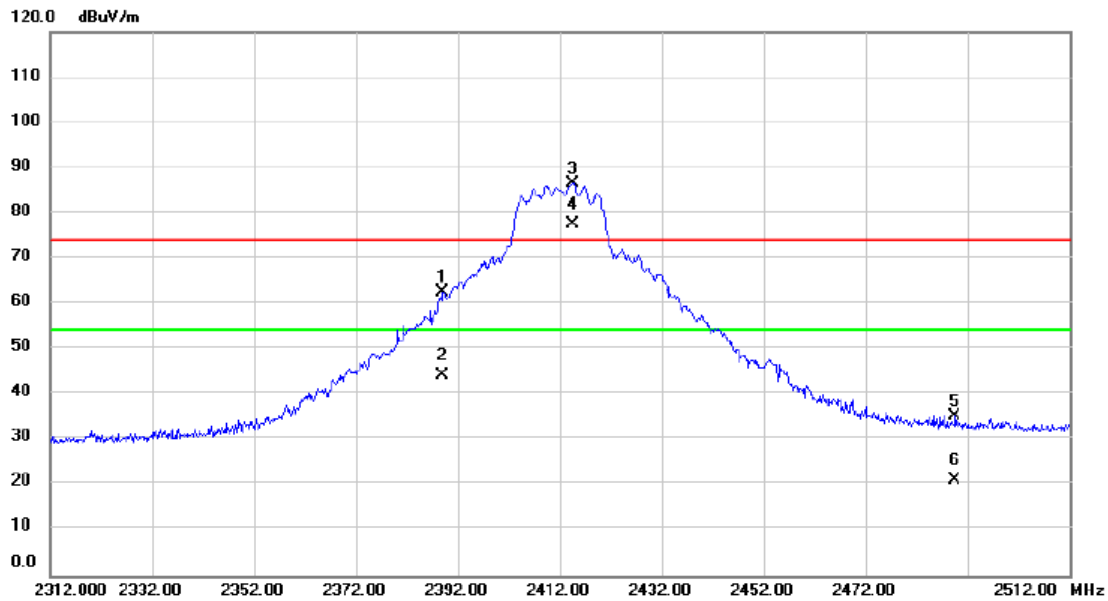


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2389.000	68.69	-6.12	62.57	74.00	-11.43	peak			
2		2389.000	50.48	-6.12	44.36	54.00	-9.64	AVG			
3	X	2414.600	92.67	-6.06	86.61	74.00	12.61	peak			No Limit
4	*	2414.600	83.46	-6.06	77.40	54.00	23.40	AVG			No Limit
5		2489.600	41.12	-5.90	35.22	74.00	-38.78	peak			
6		2489.600	27.18	-5.90	21.28	54.00	-32.72	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/21
Test Frequency	2462MHz	Polarization	Vertical

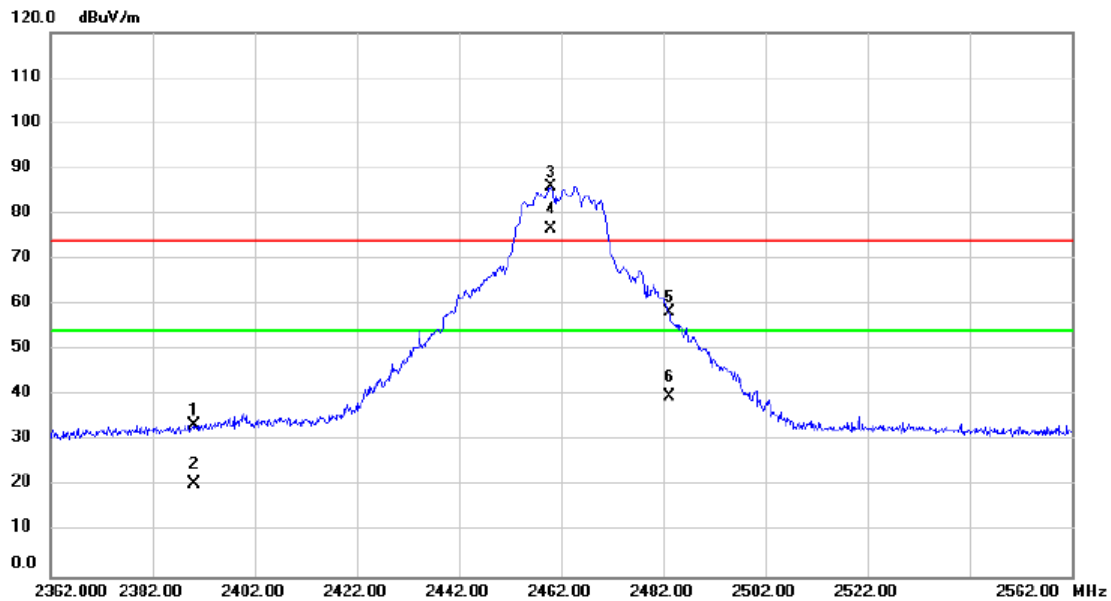


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		2390.000	39.48	-6.12	33.36	74.00	-40.64	peak		
2		2390.000	26.75	-6.12	20.63	54.00	-33.37	AVG		
3	X	2460.000	91.87	-5.97	85.90	74.00	11.90	peak		No Limit
4	*	2460.000	82.71	-5.97	76.74	54.00	22.74	AVG		No Limit
5		2483.200	64.20	-5.92	58.28	74.00	-15.72	peak		
6		2483.200	45.69	-5.92	39.77	54.00	-14.23	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/21
Test Frequency	2422MHz	Polarization	Vertical

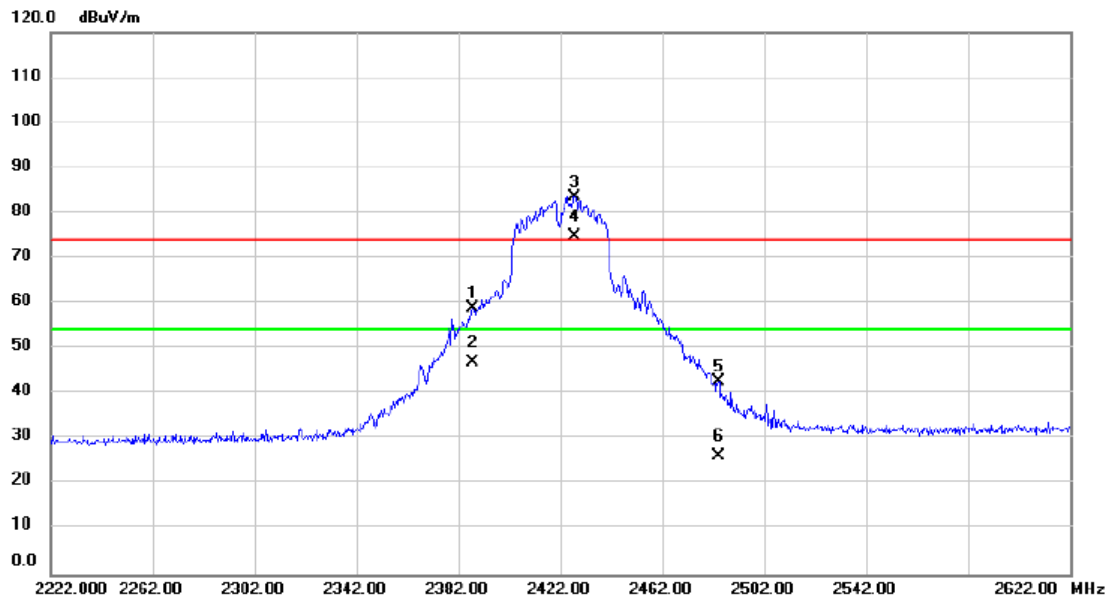


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2387.600	64.97	-6.12	58.85	74.00	-15.15			peak
2		2387.600	52.93	-6.12	46.81	54.00	-7.19			AVG
3	X	2427.600	89.66	-6.04	83.62	74.00	9.62			peak
4	*	2427.600	80.76	-6.04	74.72	54.00	20.72			AVG
5		2484.000	48.61	-5.92	42.69	74.00	-31.31			peak
6		2484.000	32.20	-5.92	26.28	54.00	-27.72			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT 40)	Test Date	2024/6/21
Test Frequency	2452MHz	Polarization	Vertical

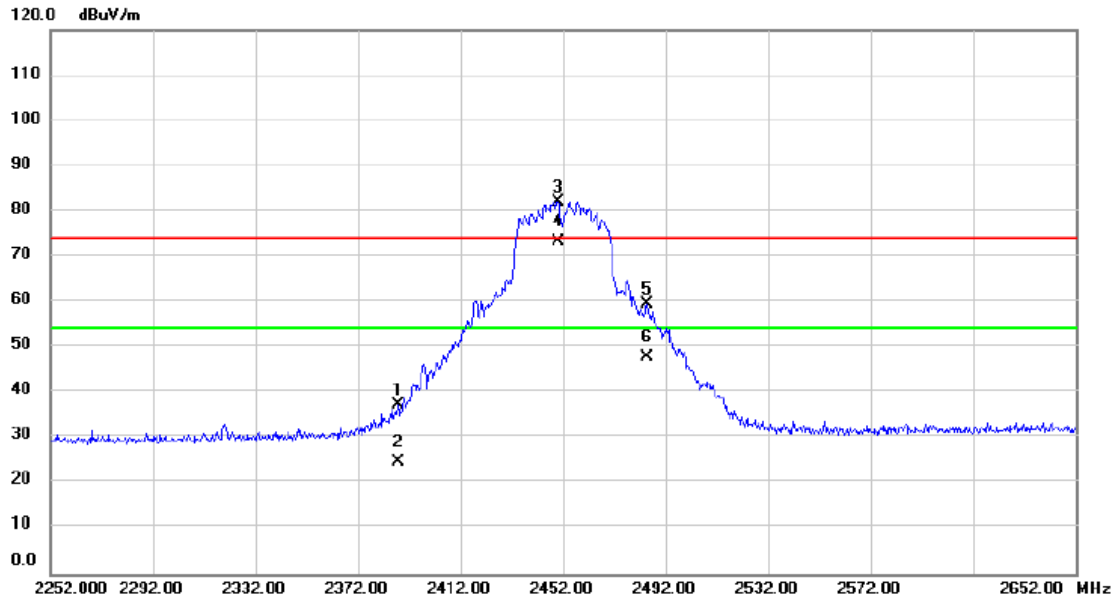


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2387.600	43.46	-6.12	37.34	74.00	-36.66			peak
2		2387.600	30.76	-6.12	24.64	54.00	-29.36			AVG
3	X	2450.000	88.16	-5.99	82.17	74.00	8.17			No Limit
4	*	2450.000	79.26	-5.99	73.27	54.00	19.27			No Limit
5		2484.800	65.49	-5.91	59.58	74.00	-14.42			peak
6		2484.800	53.67	-5.91	47.76	54.00	-6.24			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/6/25
Test Frequency	2412MHz	Polarization	Vertical

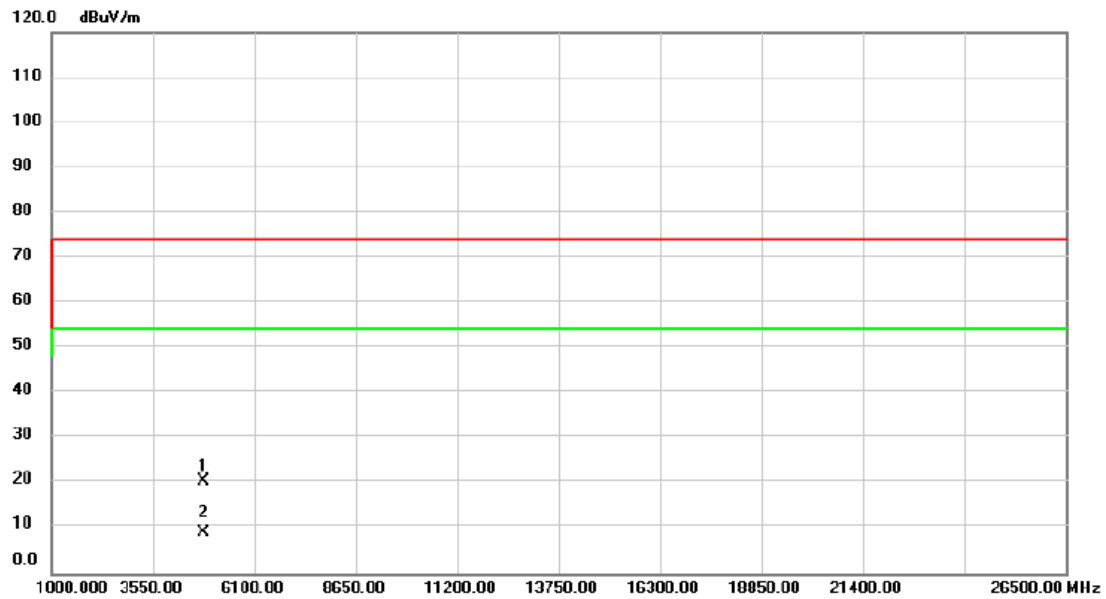


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4824.000	29.16	-8.57	20.59	74.00	-53.41			peak
2	*	4824.000	17.80	-8.57	9.23	54.00	-44.77			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11b	Test Date	2024/6/25
Test Frequency	2412MHz	Polarization	Horizontal

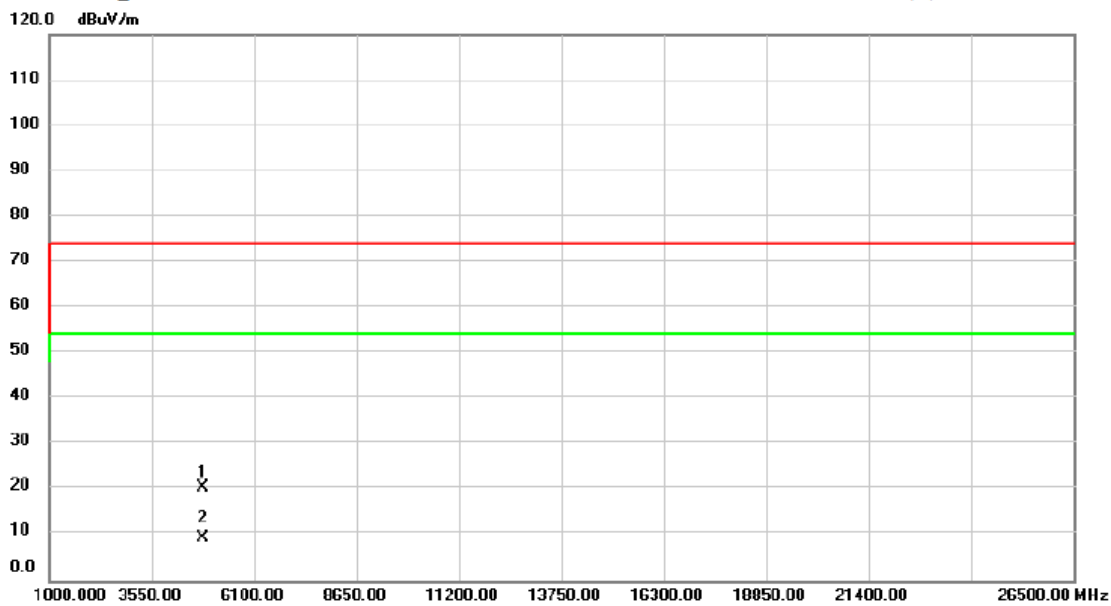

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4824.000	29.19	-8.57	20.62	74.00	-53.38	peak		
2	*	4824.000	17.90	-8.57	9.33	54.00	-44.67	AVG		

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/6/25
Test Frequency	2437MHz	Polarization	Vertical

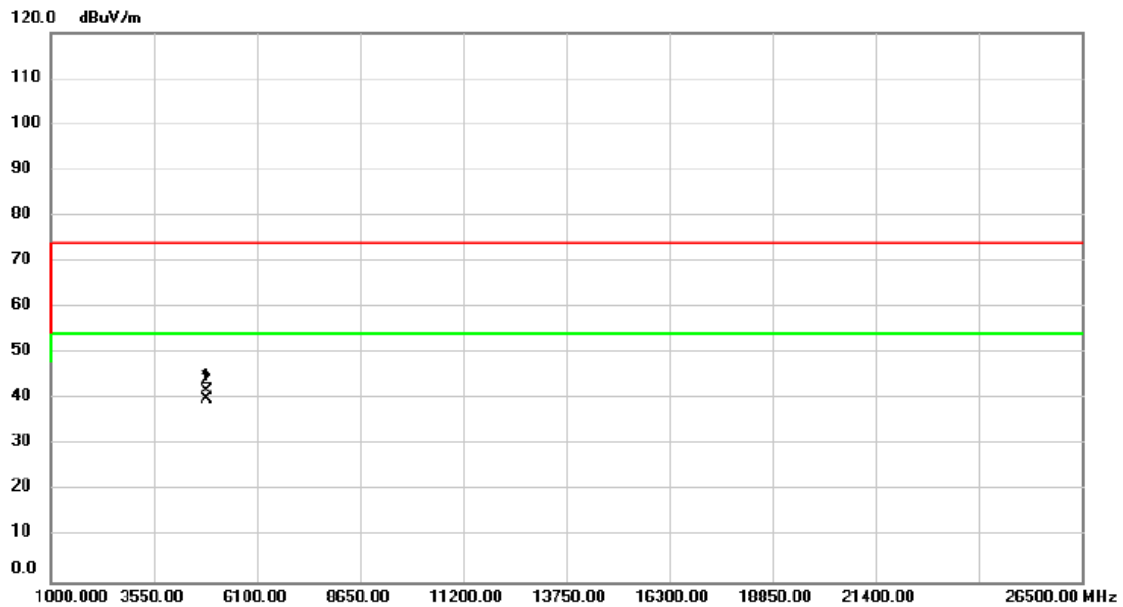


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	50.28	-8.44	41.84	74.00	-32.16	peak		
2	*	4874.000	48.40	-8.44	39.96	54.00	-14.04	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/6/25
Test Frequency	2437MHz	Polarization	Horizontal

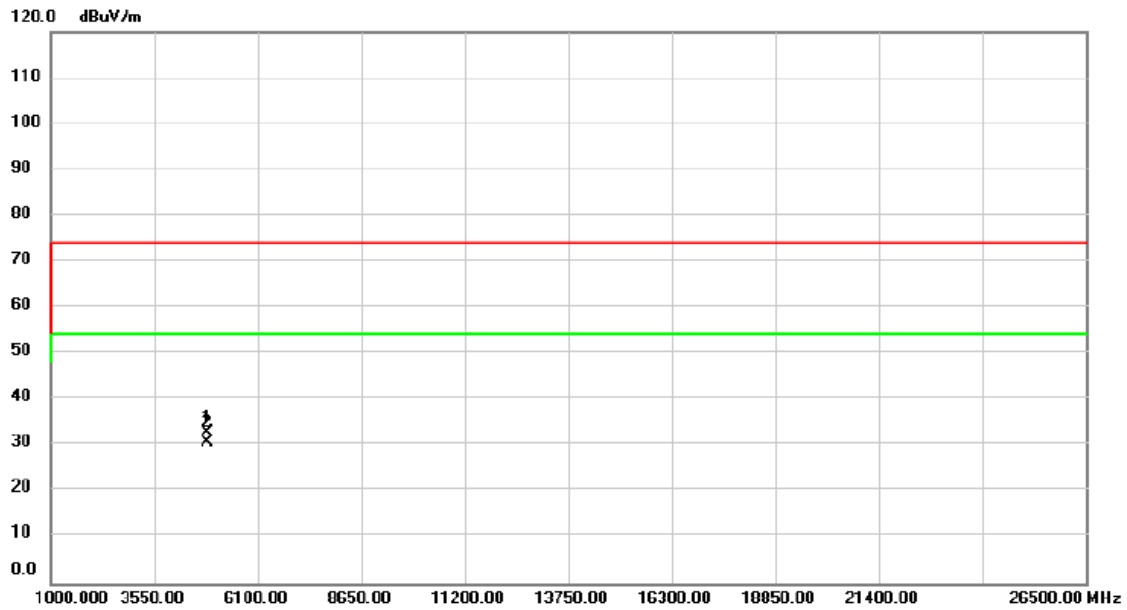


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	41.40	-8.44	32.96	74.00	-41.04	peak		
2	*	4874.000	39.27	-8.44	30.83	54.00	-23.17	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/6/25
Test Frequency	2462MHz	Polarization	Vertical

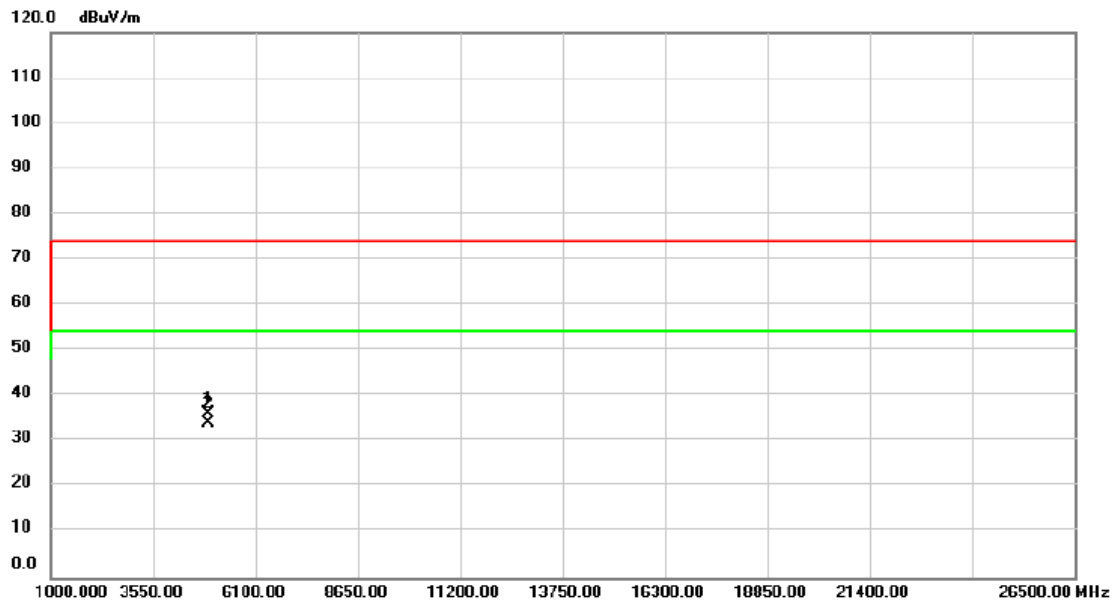


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	44.51	-8.33	36.18	74.00	-37.82			peak
2	*	4924.000	42.31	-8.33	33.98	54.00	-20.02			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/6/25
Test Frequency	2462MHz	Polarization	Horizontal

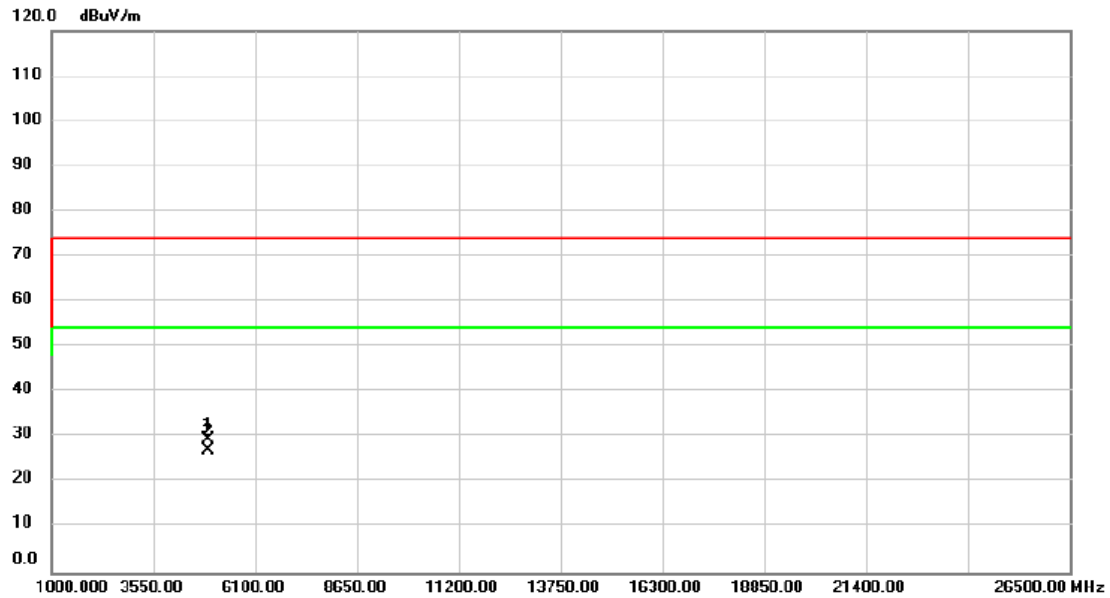


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	37.80	-8.33	29.47	74.00	-44.53			peak
2	*	4924.000	35.56	-8.33	27.23	54.00	-26.77			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/25
Test Frequency	2412MHz	Polarization	Vertical

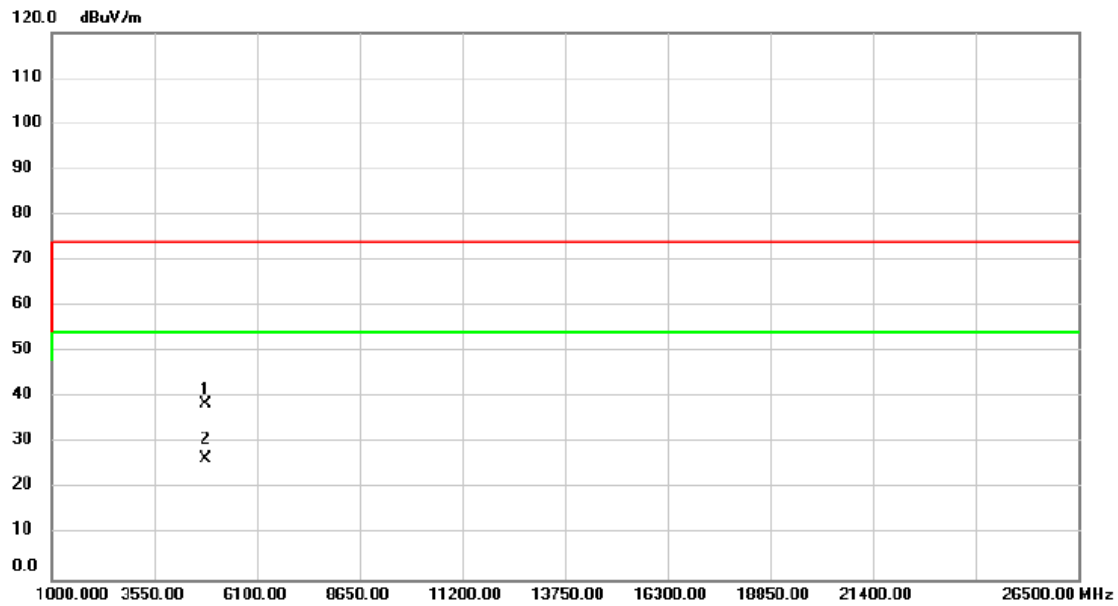


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		4825.000	47.23	-8.56	38.67	74.00	-35.33	peak			
2	*	4825.000	34.97	-8.56	26.41	54.00	-27.59	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/25
Test Frequency	2412MHz	Polarization	Horizontal

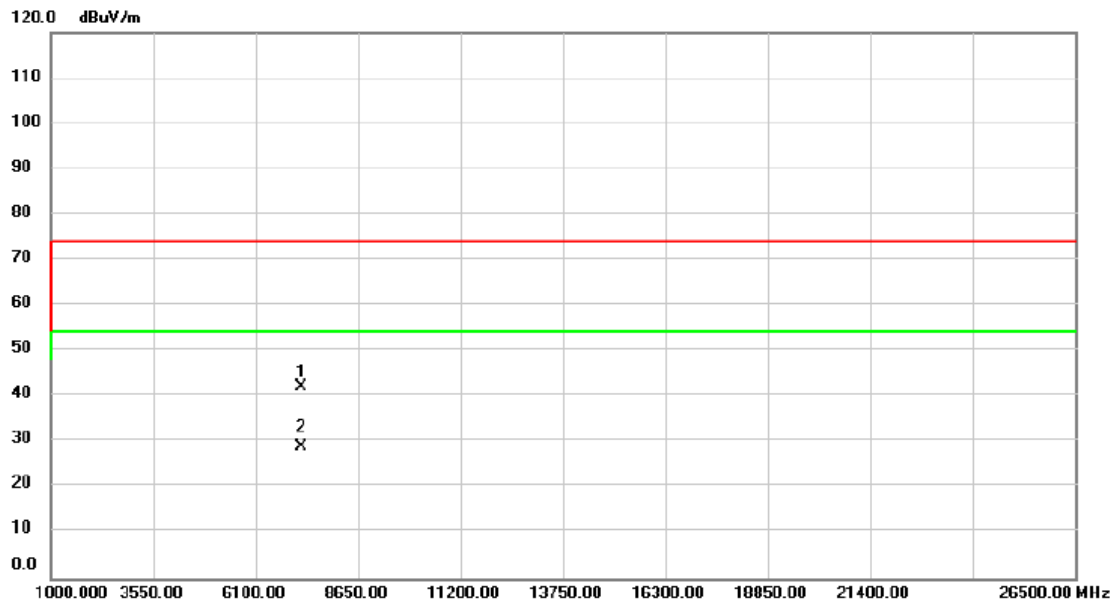


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		7236.000	45.91	-3.64	42.27	74.00	-31.73	peak			
2	*	7236.000	32.55	-3.64	28.91	54.00	-25.09	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/25
Test Frequency	2437MHz	Polarization	Vertical

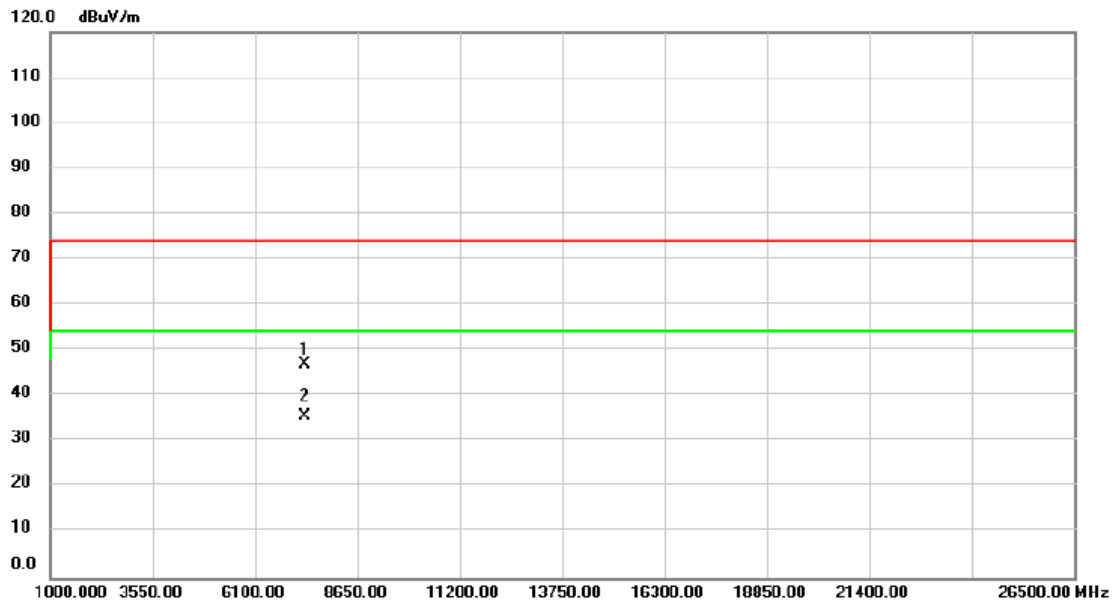


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		7324.000	50.43	-3.47	46.96	74.00	-27.04	peak		
2	*	7324.000	39.01	-3.47	35.54	54.00	-18.46	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/25
Test Frequency	2437MHz	Polarization	Horizontal

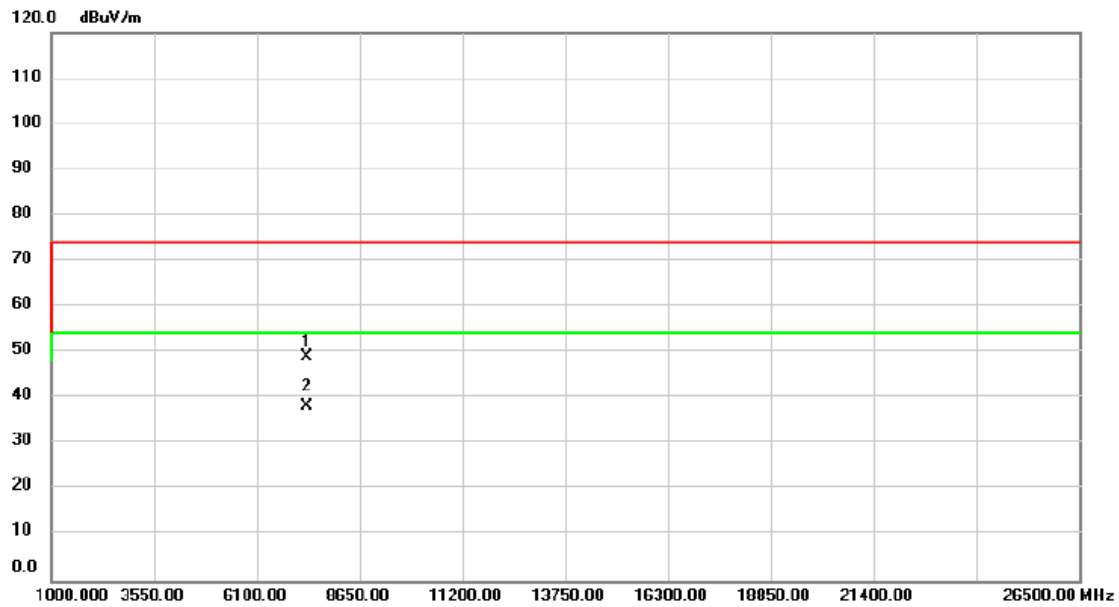


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		7324.000	52.61	-3.47	49.14	74.00	-24.86	peak		
2	*	7324.000	41.62	-3.47	38.15	54.00	-15.85	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/25
Test Frequency	2462MHz	Polarization	Vertical

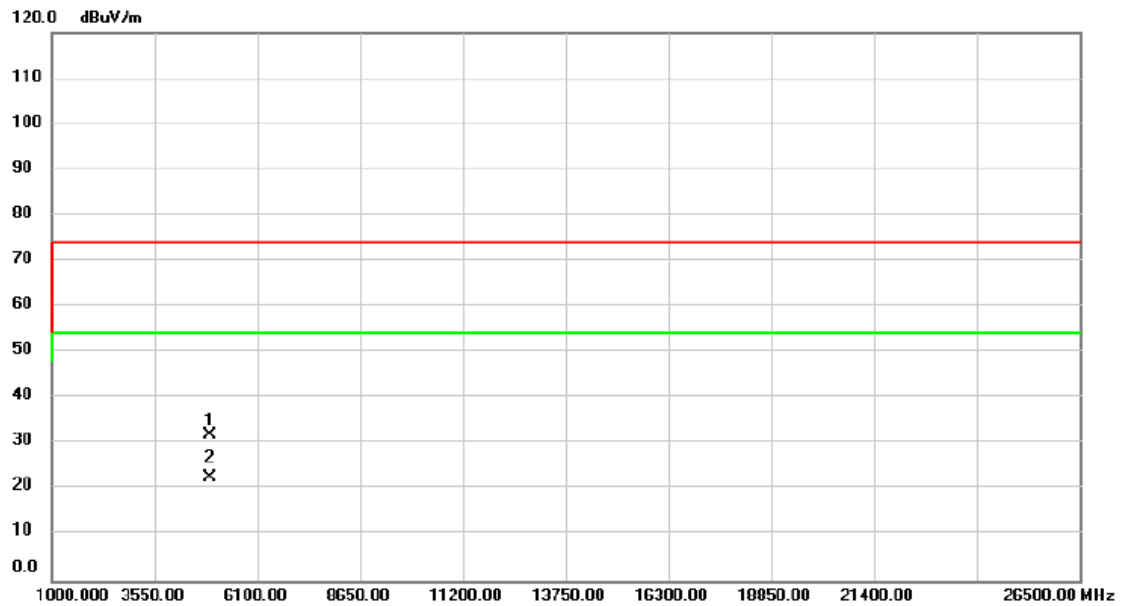


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	40.32	-8.33	31.99	74.00	-42.01			peak
2	*	4924.000	30.97	-8.33	22.64	54.00	-31.36			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/6/25
Test Frequency	2462MHz	Polarization	Horizontal

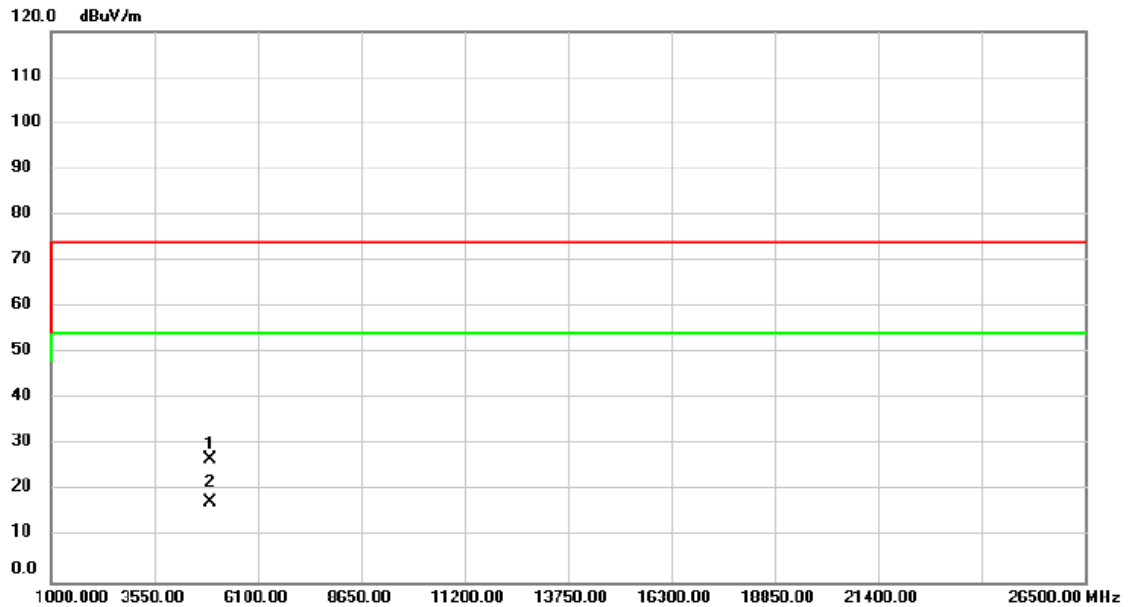


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	35.13	-8.33	26.80	74.00	-47.20			peak
2	*	4924.000	25.78	-8.33	17.45	54.00	-36.55			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/25
Test Frequency	2412MHz	Polarization	Vertical

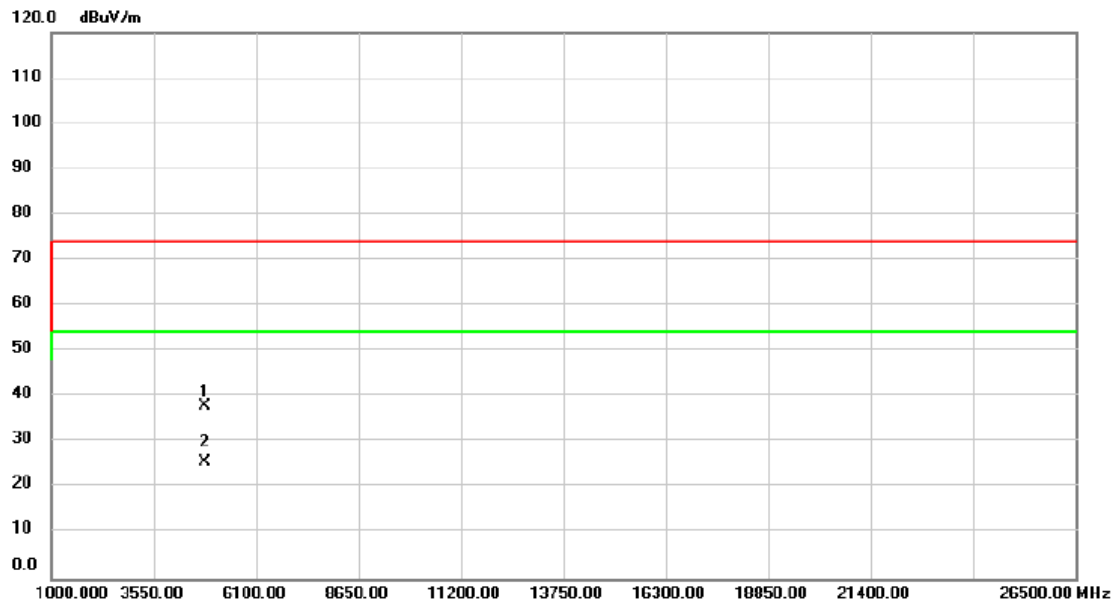


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4825.000	46.37	-8.56	37.81	74.00	-36.19	peak		
2	*	4825.000	34.23	-8.56	25.67	54.00	-28.33	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/25
Test Frequency	2412MHz	Polarization	Horizontal

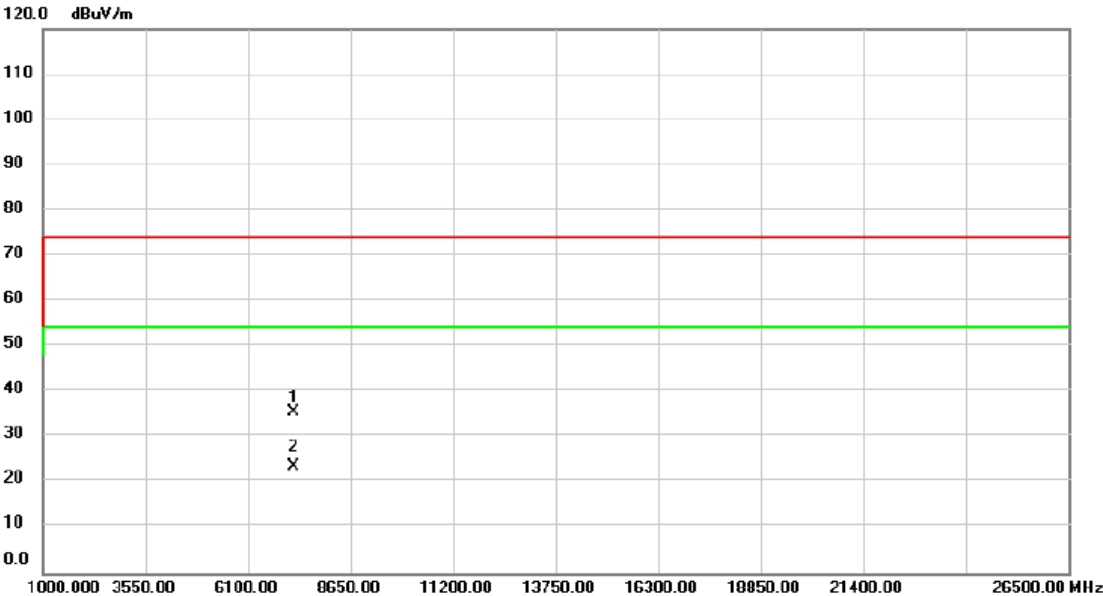

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		7247.500	39.30	-3.62	35.68	74.00	-38.32	peak		
2	*	7247.500	27.15	-3.62	23.53	54.00	-30.47	AVG		

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/25
Test Frequency	2437MHz	Polarization	Vertical

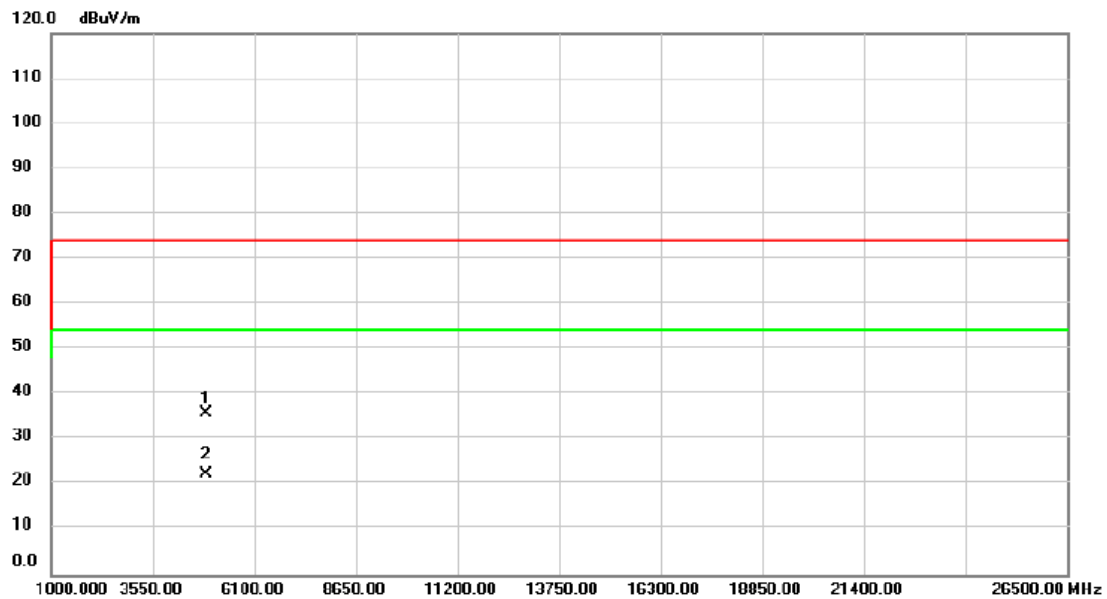


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		4876.000	44.27	-8.43	35.84	74.00	-38.16	peak		
2	*	4876.000	30.84	-8.43	22.41	54.00	-31.59	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/25
Test Frequency	2437MHz	Polarization	Horizontal

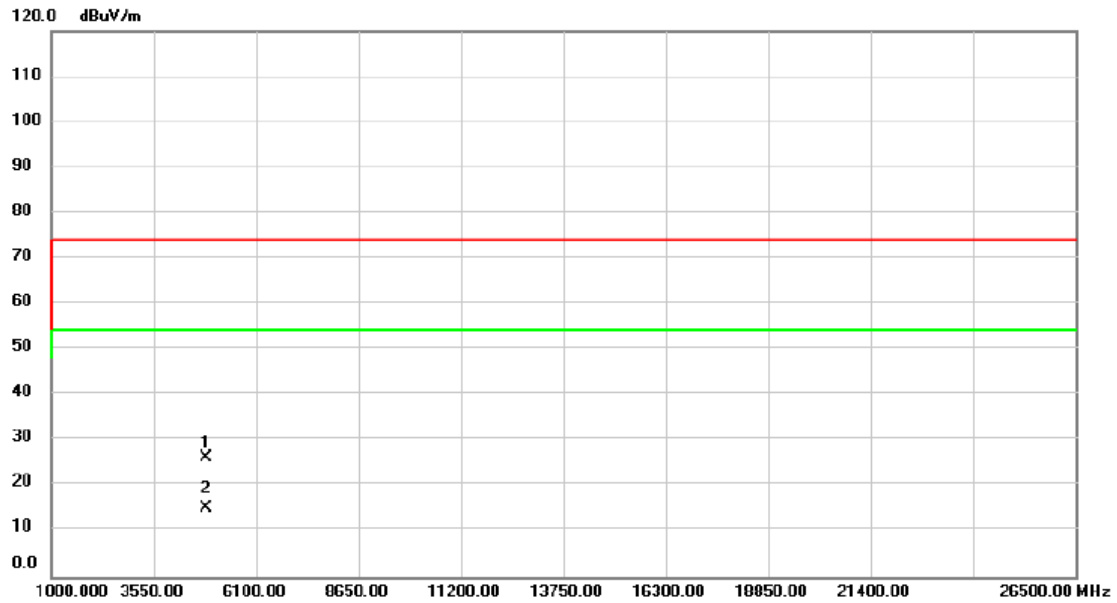


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	34.65	-8.44	26.21	74.00	-47.79	peak		
2	*	4874.000	23.47	-8.44	15.03	54.00	-38.97	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/26
Test Frequency	2462MHz	Polarization	Vertical

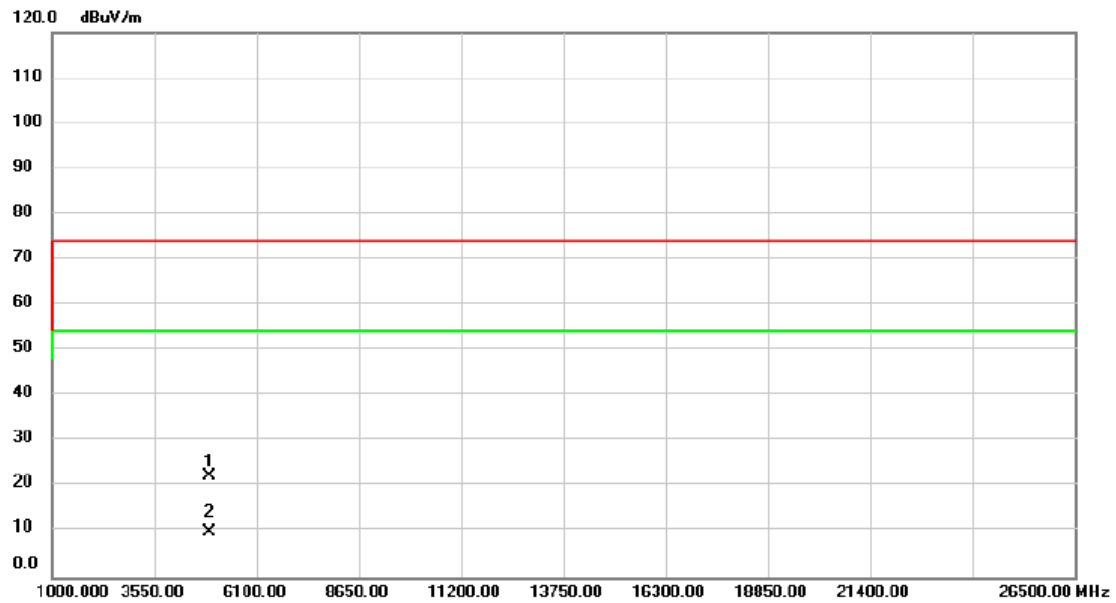


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		4924.000	30.57	-8.33	22.24	74.00	-51.76	peak			
2	*	4924.000	18.48	-8.33	10.15	54.00	-43.85	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/6/26
Test Frequency	2462MHz	Polarization	Horizontal

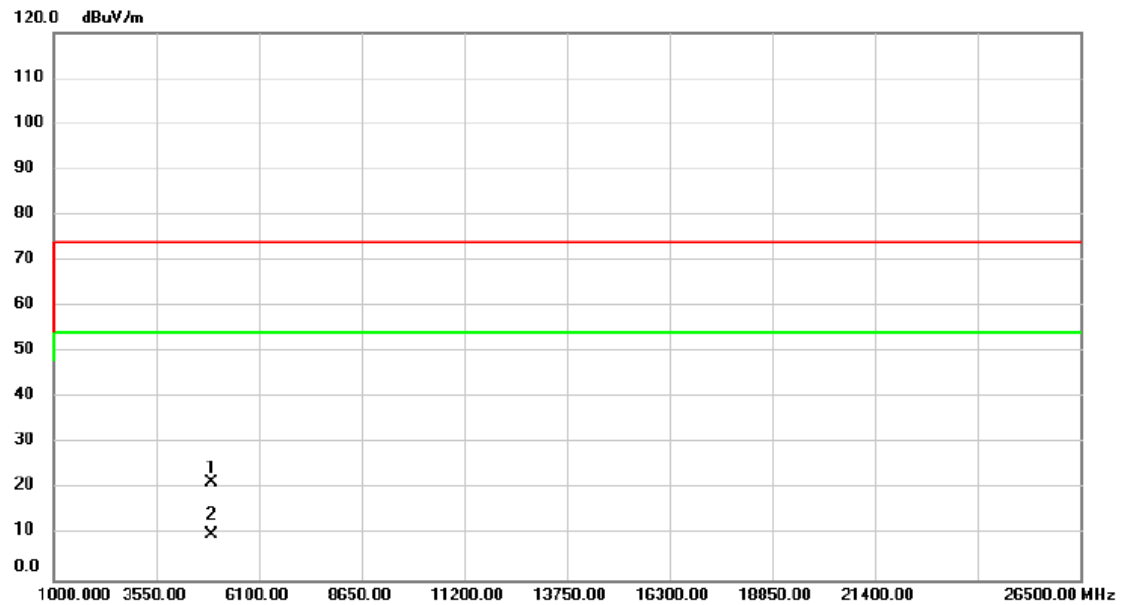


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	29.73	-8.33	21.40	74.00	-52.60			peak
2	*	4924.000	18.35	-8.33	10.02	54.00	-43.98			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/26
Test Frequency	2422MHz	Polarization	Vertical

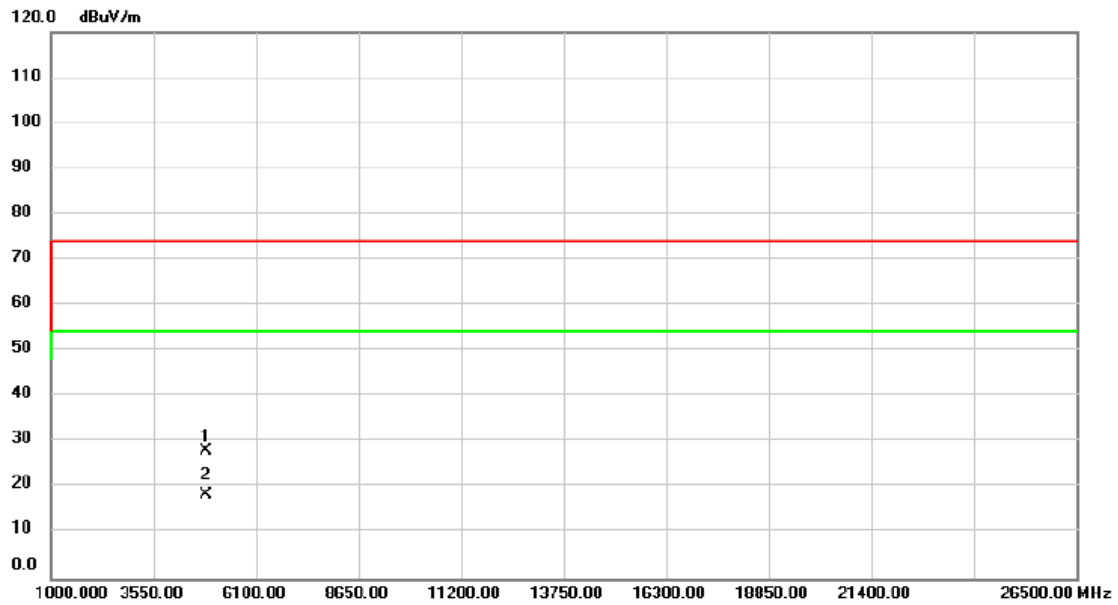


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4844.000	36.51	-8.52	27.99	74.00	-46.01			peak
2	*	4844.000	26.85	-8.52	18.33	54.00	-35.67			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/26
Test Frequency	2422MHz	Polarization	Horizontal

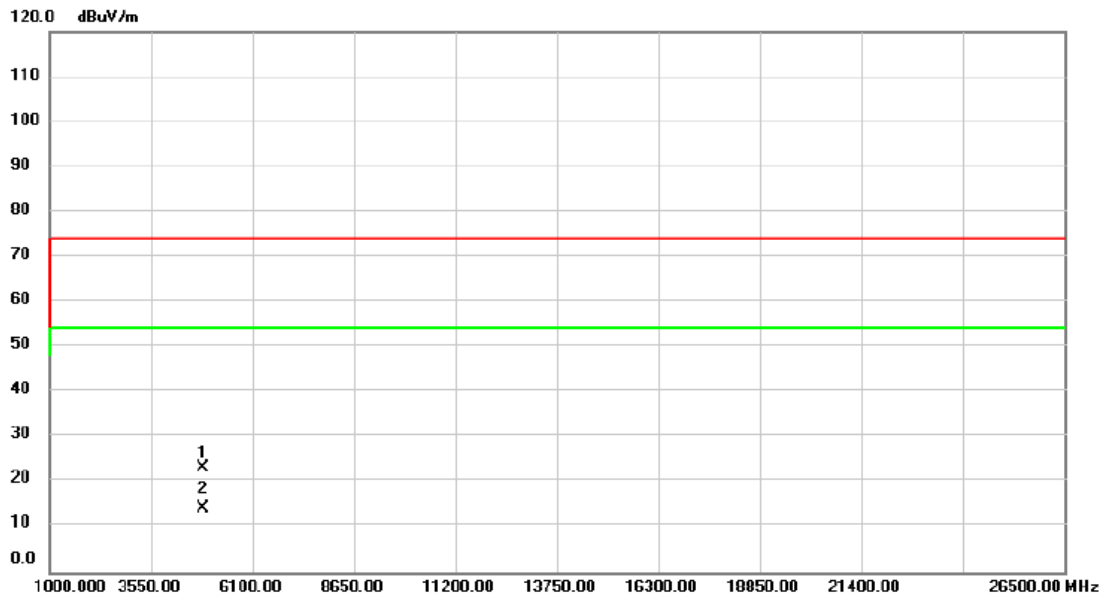


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4844.000	31.83	-8.52	23.31	74.00	-50.69			peak
2	*	4844.000	22.76	-8.52	14.24	54.00	-39.76			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/26
Test Frequency	2437MHz	Polarization	Vertical

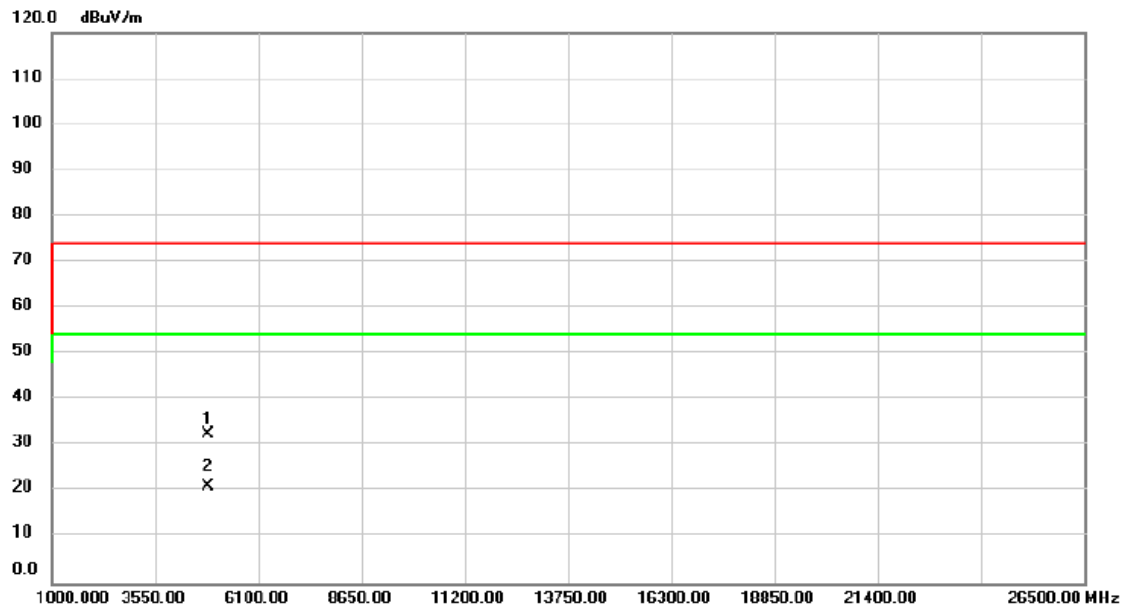


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4874.000	41.09	-8.44	32.65	74.00	-41.35	peak		
2	*	4874.000	29.56	-8.44	21.12	54.00	-32.88	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/26
Test Frequency	2437MHz	Polarization	Horizontal

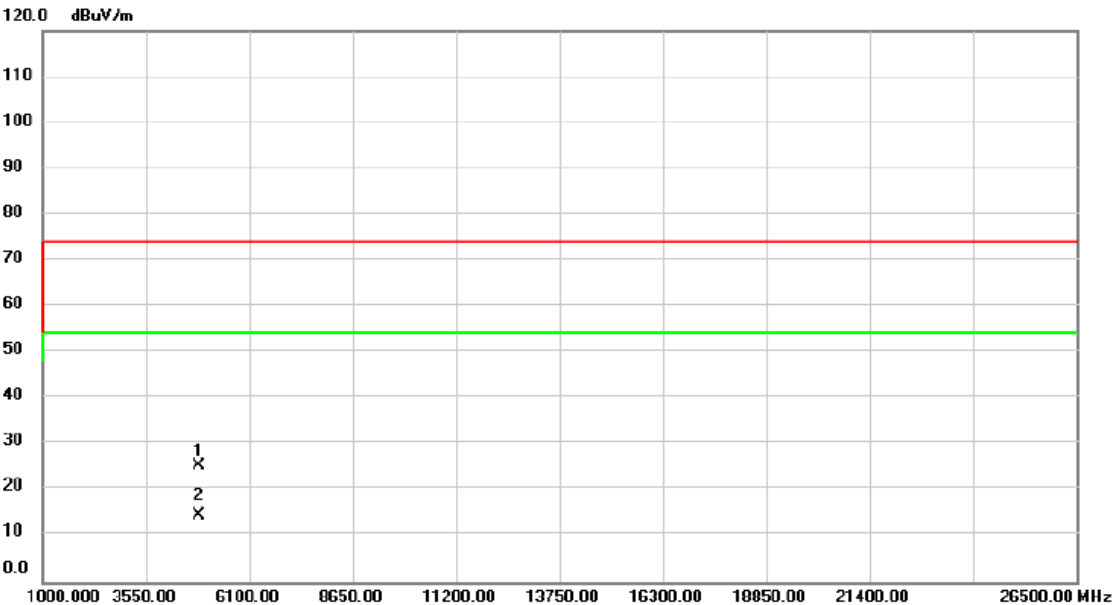

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4874.000	33.84	-8.44	25.40	74.00	-48.60			peak
2	*	4874.000	22.94	-8.44	14.50	54.00	-39.50			AVG

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/26
Test Frequency	2452MHz	Polarization	Vertical

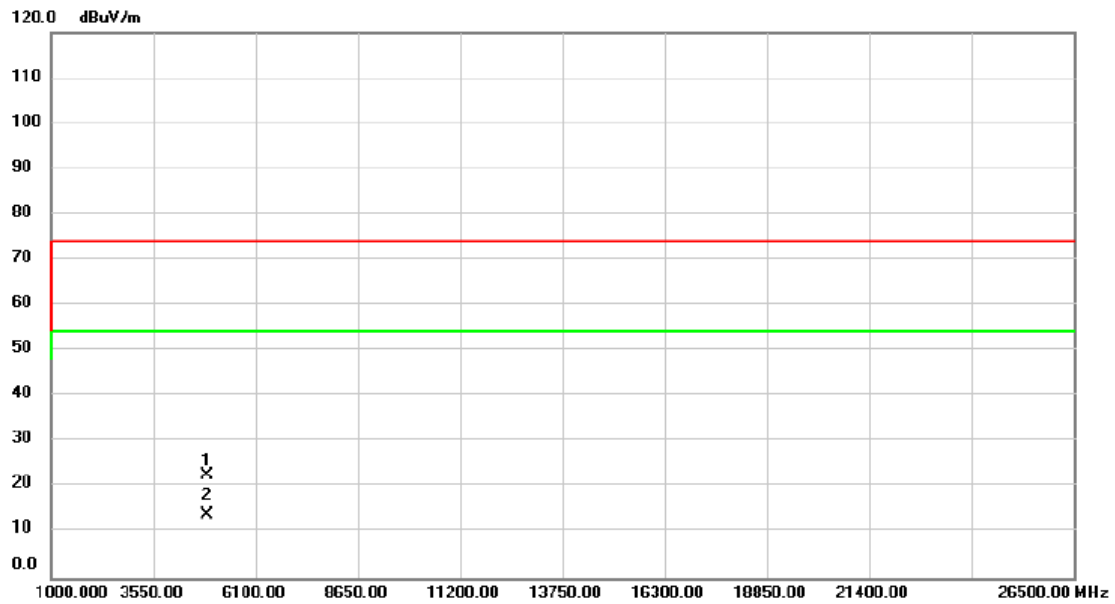


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4904.000	31.01	-8.36	22.65	74.00	-51.35	peak		
2	*	4904.000	22.23	-8.36	13.87	54.00	-40.13	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/6/26
Test Frequency	2452MHz	Polarization	Horizontal

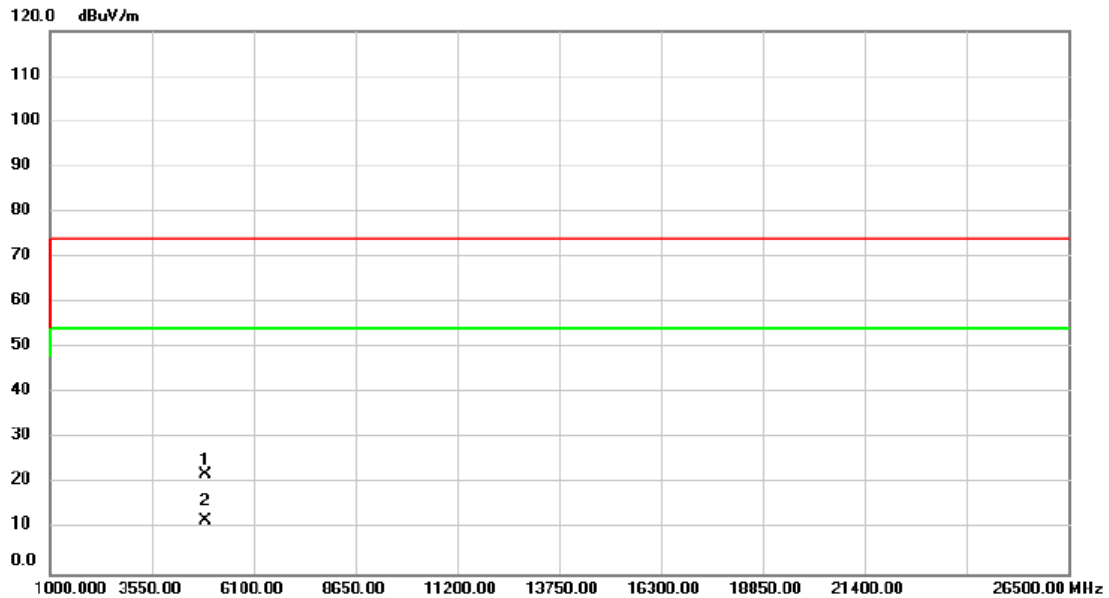

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4904.000	30.29	-8.36	21.93	74.00	-52.07			peak
2	*	4904.000	20.22	-8.36	11.86	54.00	-42.14			AVG

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH


Test Mode	IEEE 802.11b_Ant 1
-----------	--------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	8.140	14.160	0.5	Complies
06	2437	9.100	14.320	0.5	Complies
11	2462	9.080	14.240	0.5	Complies

CH01

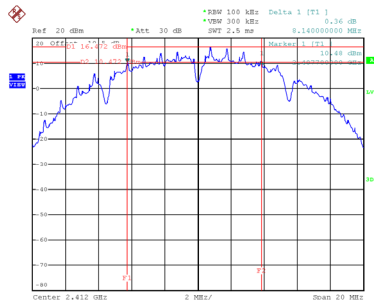


Date: 7.JUN.2024 12:48:38

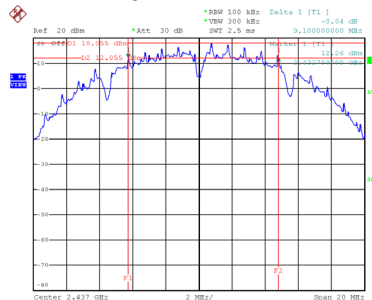CH06
6 dB Bandwidth


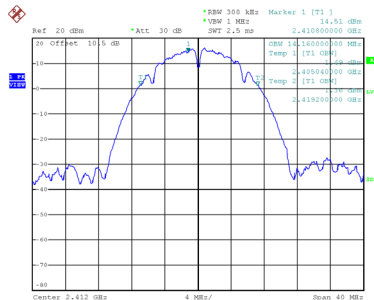
Date: 7.JUN.2024 12:50:27

CH11

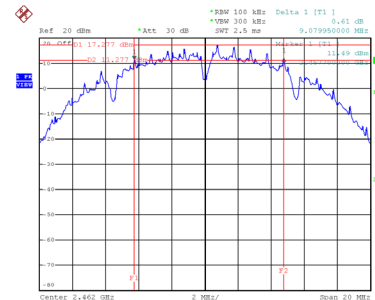


Date: 7.JUN.2024 12:52:28


99 % Occupied Bandwidth



Date: 7.JUN.2024 12:48:48

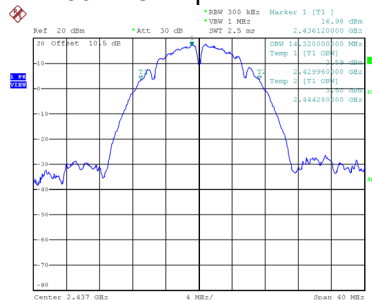

Date: 7.JUN.2024 12:50:36

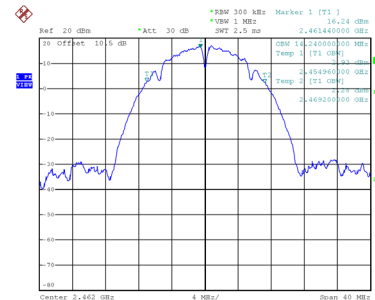


Date: 7.JUN.2024 12:52:37

Test Mode	IEEE 802.11g_Ant 1
-----------	--------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.470	16.720	0.5	Complies
06	2437	15.140	16.640	0.5	Complies
11	2462	15.140	16.640	0.5	Complies

CH01

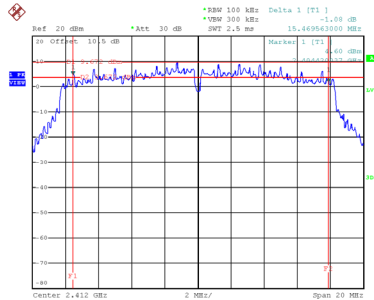


Date: 7.JUN.2024 12:57:28

CH06
6 dB Bandwidth




Date: 7.JUN.2024 12:59:08

CH11

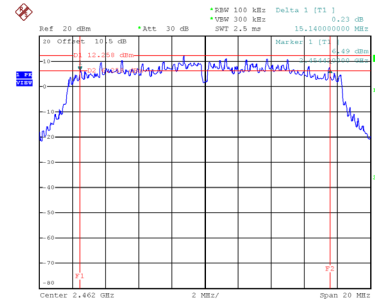


Date: 7.JUN.2024 13:01:17


99 % Occupied Bandwidth

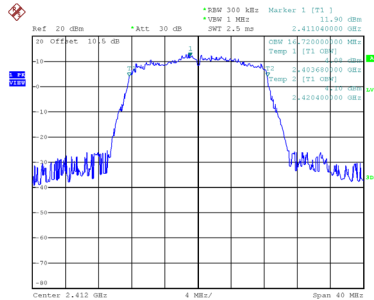

Date: 7.JUN.2024 12:57:37



Date: 7.JUN.2024 12:59:17

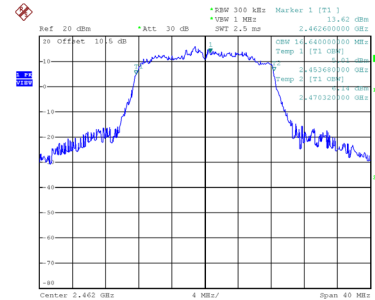


Date: 7.JUN.2024 13:01:26

Test Mode	IEEE 802.11n (HT20)_ Ant 1
-----------	----------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	13.960	17.680	0.5	Complies
06	2437	15.120	17.680	0.5	Complies
11	2462	15.070	17.600	0.5	Complies

CH01

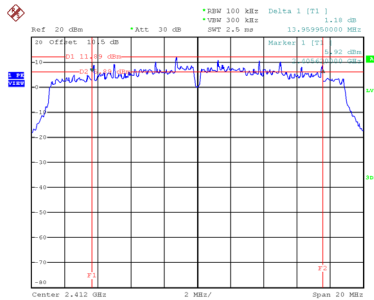


Date: 7.JUN.2024 14:20:36

CH06
6 dB Bandwidth

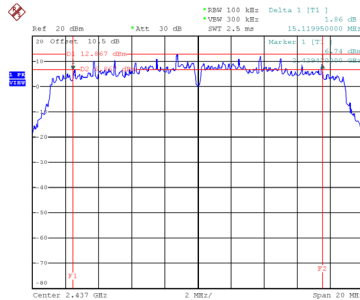


Date: 7.JUN.2024 14:22:02

CH11

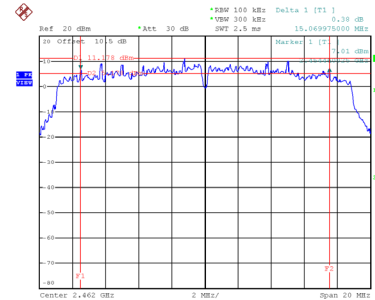


Date: 7.JUN.2024 14:23:30


99 % Occupied Bandwidth

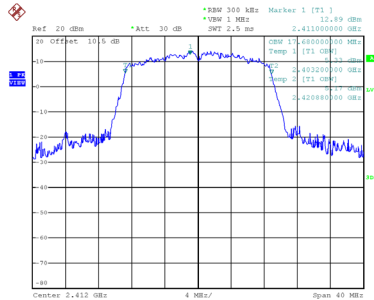

Date: 7.JUN.2024 14:20:44

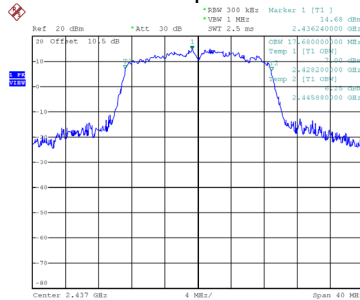

Date: 7.JUN.2024 14:22:11

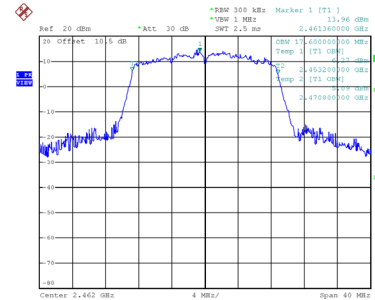


Date: 7.JUN.2024 14:23:39


Test Mode	IEEE 802.11n (HT40)_ Ant 1
-----------	----------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	33.960	36.160	0.5	Complies
06	2437	35.200	36.160	0.5	Complies
09	2452	33.880	36.000	0.5	Complies

CH03

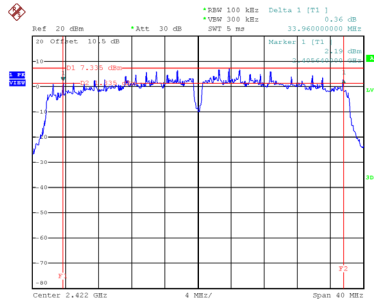


Date: 7.JUN.2024 12:40:04

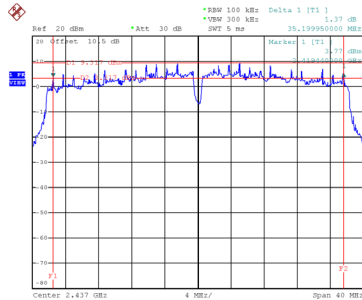CH06
6 dB Bandwidth


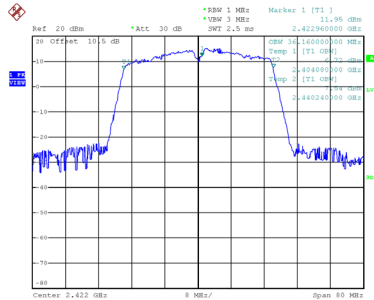
Date: 7.JUN.2024 12:44:06

CH09

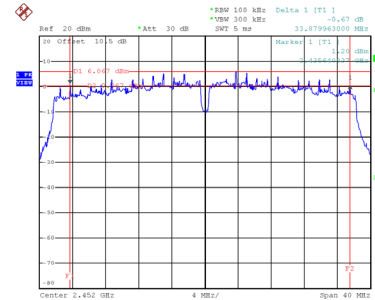


Date: 7.JUN.2024 12:45:50


99 % Occupied Bandwidth



Date: 7.JUN.2024 12:40:13

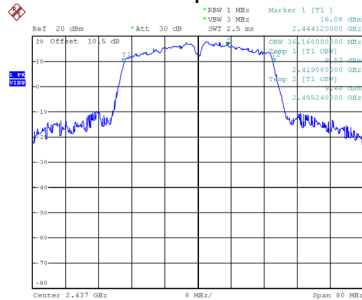

Date: 7.JUN.2024 12:44:15

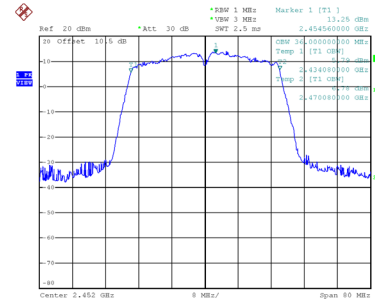

Date: 7.JUN.2024 12:45:59

APPENDIX E OUTPUT POWER

Test Mode	IEEE 802.11b_ Ant 1	Tested Date	2024/6/5
-----------	---------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.11	0.17	24.28	30.00	1.0000	Complies
06	2437	25.64	0.17	25.81	30.00	1.0000	Complies
11	2462	25.16	0.17	25.33	30.00	1.0000	Complies

Test Mode	IEEE 802.11b_ Ant 2	Tested Date	2024/6/5
-----------	---------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.63	0.17	23.80	30.00	1.0000	Complies
06	2437	25.02	0.17	25.19	30.00	1.0000	Complies
11	2462	24.50	0.17	24.67	30.00	1.0000	Complies

Test Mode	IEEE 802.11b_ Total	Tested Date	2024/6/5
-----------	---------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	27.06	30.00	1.0000	Complies
06	2437	28.53	30.00	1.0000	Complies
11	2462	28.03	30.00	1.0000	Complies

Test Mode	IEEE 802.11g_ Ant 1	Tested Date	2024/6/5
-----------	---------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.08	0.23	22.31	30.00	1.0000	Complies
06	2437	25.75	0.23	25.98	30.00	1.0000	Complies
11	2462	23.70	0.23	23.93	30.00	1.0000	Complies

Test Mode	IEEE 802.11g_ Ant 2	Tested Date	2024/6/5
-----------	---------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.22	0.23	21.45	30.00	1.0000	Complies
06	2437	25.83	0.23	26.06	30.00	1.0000	Complies
11	2462	24.23	0.23	24.46	30.00	1.0000	Complies

Test Mode	IEEE 802.11g_ Total	Tested Date	2024/6/5
-----------	---------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.92	30.00	1.0000	Complies
06	2437	29.03	30.00	1.0000	Complies
11	2462	27.22	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)_ Ant 1	Tested Date	2024/6/5
-----------	----------------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.99	0.42	23.41	30.00	1.0000	Complies
06	2437	23.61	0.42	24.03	30.00	1.0000	Complies
11	2462	22.63	0.42	23.05	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)_ Ant 2	Tested Date	2024/6/5
-----------	----------------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.69	0.42	22.11	30.00	1.0000	Complies
06	2437	23.30	0.42	23.72	30.00	1.0000	Complies
11	2462	22.47	0.42	22.89	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)_ Total	Tested Date	2024/6/5
-----------	----------------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.82	30.00	1.0000	Complies
06	2437	26.88	30.00	1.0000	Complies
11	2462	25.98	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT40)_ Ant 1	Tested Date	2024/6/5
-----------	----------------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.15	0.82	20.97	30.00	1.0000	Complies
06	2437	22.63	0.82	23.45	30.00	1.0000	Complies
09	2452	18.94	0.82	19.76	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT40)_ Ant 2	Tested Date	2024/6/5
-----------	----------------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.63	0.82	20.45	30.00	1.0000	Complies
06	2437	22.50	0.82	23.32	30.00	1.0000	Complies
09	2452	19.10	0.82	19.92	30.00	1.0000	Complies


Test Mode	IEEE 802.11n (HT40)_ Total	Tested Date	2024/6/5
-----------	----------------------------	-------------	----------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	23.73	30.00	1.0000	Complies
06	2437	26.39	30.00	1.0000	Complies
09	2452	22.85	30.00	1.0000	Complies


APPENDIX F POWER SPECTRAL DENSITY

Test Mode	IEEE 802.11b_Ant 1
-----------	--------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	1.99	8.00	Complies
06	2437	3.76	8.00	Complies
11	2462	3.07	8.00	Complies

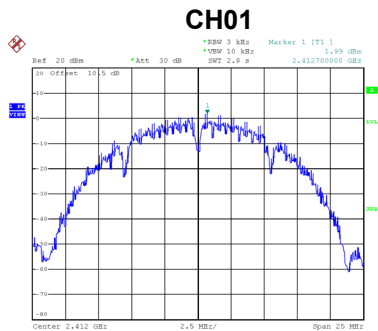

Date: 7.JUN.2024 12:49:42

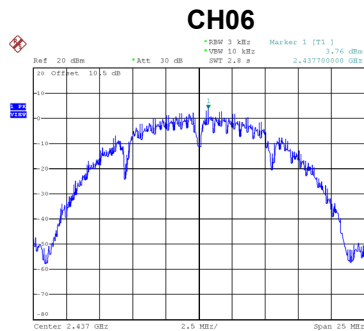


Date: 7.JUN.2024 12:51:30

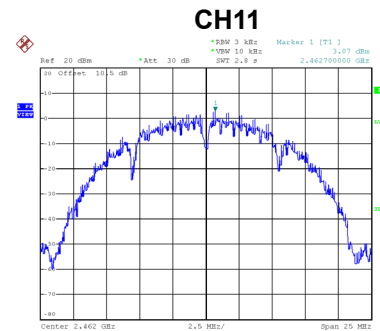


Date: 7.JUN.2024 12:53:31

Test Mode	IEEE 802.11b_Ant 2
-----------	--------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	0.33	8.00	Complies
06	2437	3.32	8.00	Complies
11	2462	5.17	8.00	Complies

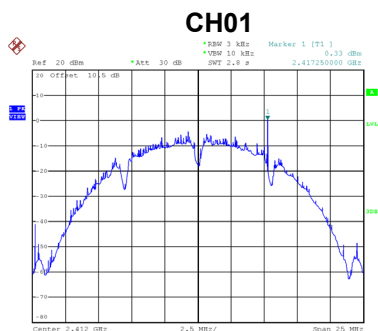

Date: 7.JUN.2024 14:49:21

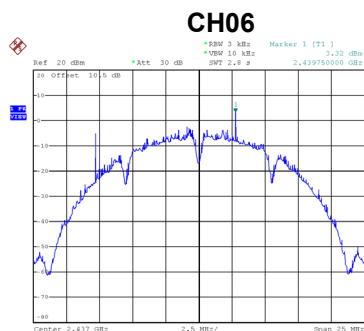

Date: 7.JUN.2024 14:43:28

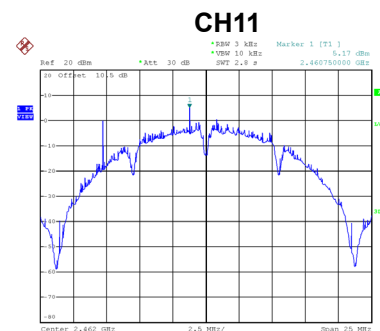




Date: 7.JUN.2024 14:55:22

Test Mode	IEEE 802.11b_Total
-----------	--------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	4.25	8.00	Complies
06	2437	6.56	8.00	Complies
11	2462	7.26	8.00	Complies




Test Mode	IEEE 802.11g_Ant 1
-----------	--------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.04	8.00	Complies
06	2437	-2.31	8.00	Complies
11	2462	-4.15	8.00	Complies

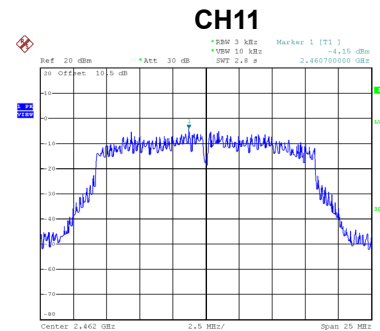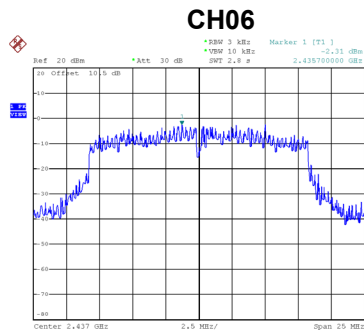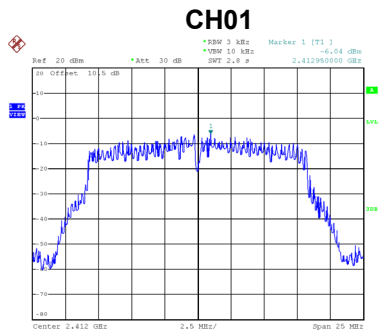

Test Mode	IEEE 802.11g_Ant 2
-----------	--------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.22	8.00	Complies
06	2437	-3.20	8.00	Complies
11	2462	-4.35	8.00	Complies

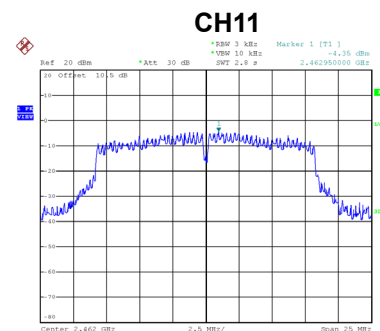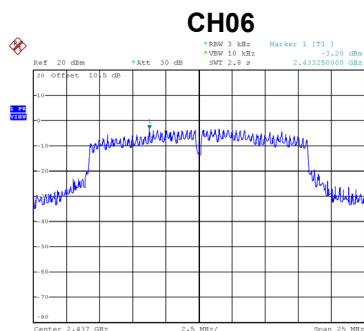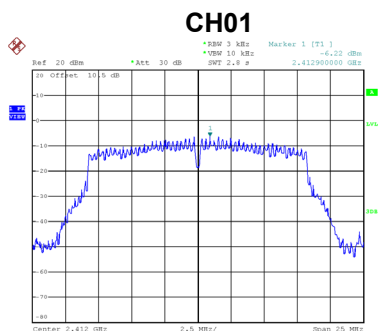


Test Mode	IEEE 802.11g_Total
-----------	--------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-3.12	8.00	Complies
06	2437	0.28	8.00	Complies
11	2462	-1.24	8.00	Complies

Test Mode	IEEE 802.11n (HT20)_ Ant 1
-----------	----------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-5.22	8.00	Complies
06	2437	-3.79	8.00	Complies
11	2462	-5.12	8.00	Complies

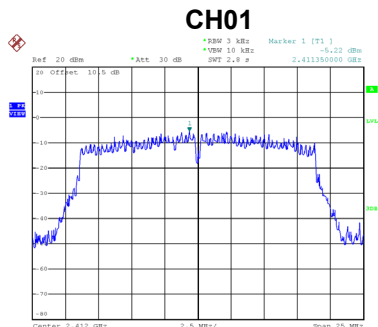

Date: 7.JUN.2024 14:21:38

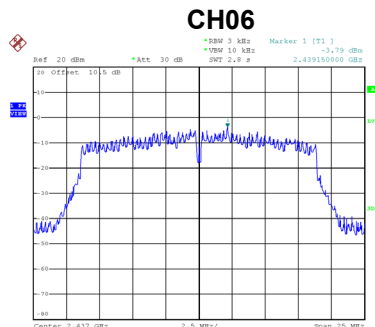


Date: 7.JUN.2024 14:23:04

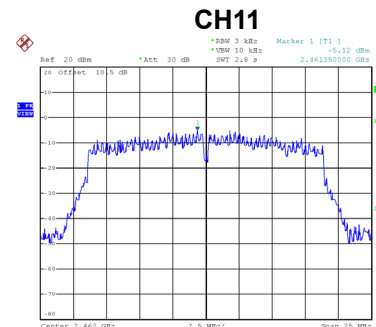


Date: 7.JUN.2024 14:24:32

Test Mode	IEEE 802.11n (HT20)_ Ant 2
-----------	----------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-5.14	8.00	Complies
06	2437	-5.07	8.00	Complies
11	2462	-5.65	8.00	Complies

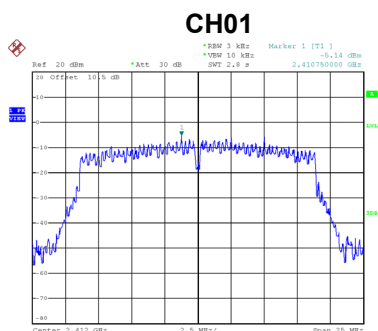

Date: 7.JUN.2024 14:26:33

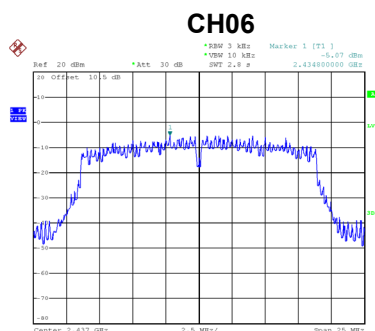

Date: 7.JUN.2024 14:28:07

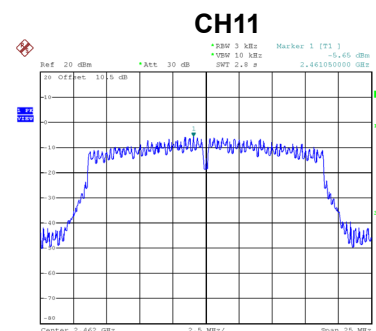


Date: 7.JUN.2024 14:29:48

Test Mode	IEEE 802.11n (HT20)_Total
-----------	---------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-2.17	8.00	Complies
06	2437	-1.37	8.00	Complies
11	2462	-2.37	8.00	Complies

Test Mode	IEEE 802.11n (HT40)_ Ant 1
-----------	----------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-9.94	8.00	Complies
06	2437	-6.75	8.00	Complies
09	2452	-11.18	8.00	Complies

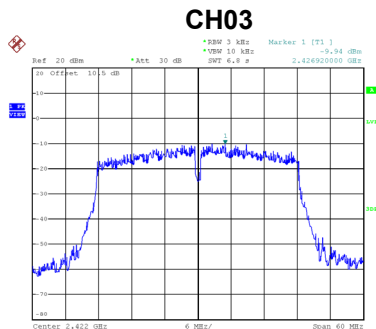

Date: 7.JUN.2024 12:41:10

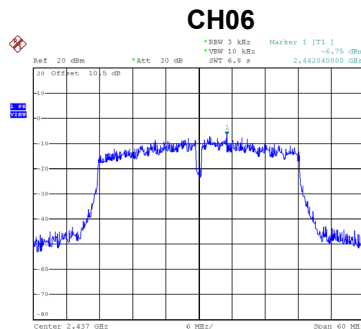


Date: 7.JUN.2024 12:45:11

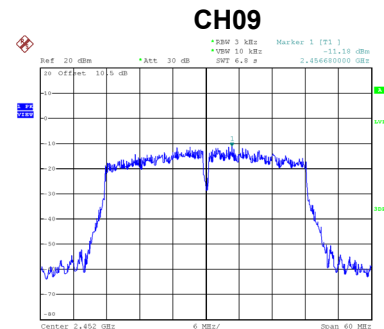


Date: 7.JUN.2024 12:46:55

Test Mode	IEEE 802.11n (HT40)_ Ant 2
-----------	----------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-8.22	8.00	Complies
06	2437	-6.79	8.00	Complies
09	2452	-10.28	8.00	Complies

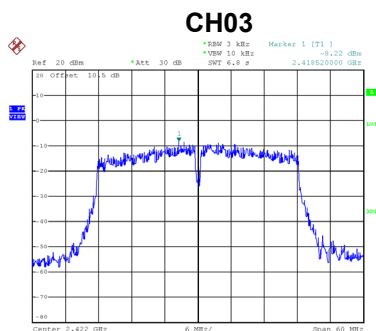

Date: 7.JUN.2024 14:15:56

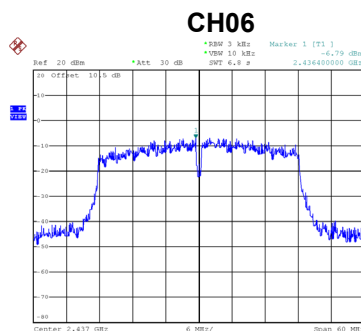

Date: 7.JUN.2024 14:17:29

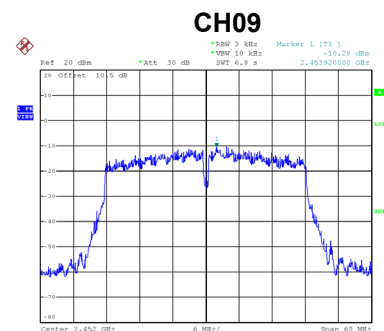

Date: 7.JUN.2024 14:19:22


Test Mode	IEEE 802.11n (HT40)_ Total
-----------	----------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-5.99	8.00	Complies
06	2437	-3.76	8.00	Complies
09	2452	-7.70	8.00	Complies

APPENDIX G ANTENNA CONDUCTED SPURIOUS EMISSIONS


Test Mode IEEE 802.11b_Ant 1

Bandedge-CH01

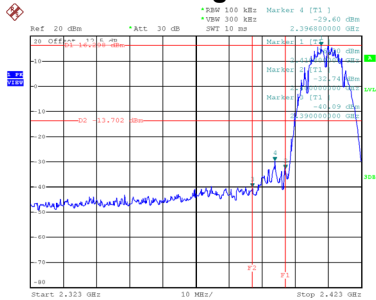


Date: 7.JUN.2024 12:48:57

Bandedge-CH11

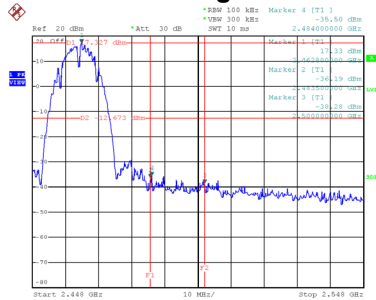


Date: 7.JUN.2024 12:52:47


CH01 – 10th Harmonic of the fundamental frequency

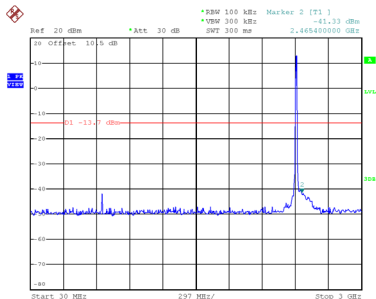

Date: 7.JUN.2024 12:49:12

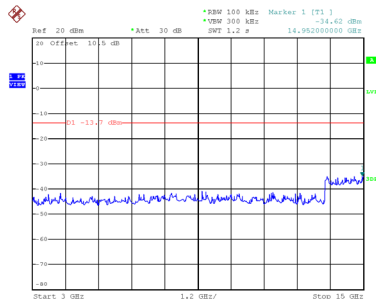


Date: 7.JUN.2024 12:49:22

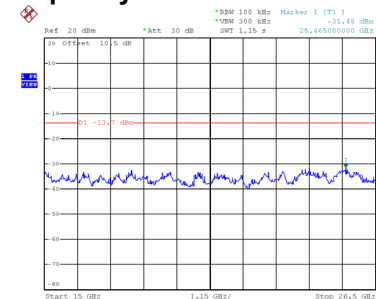


Date: 7.JUN.2024 12:49:31


CH06 – 10th Harmonic of the fundamental frequency

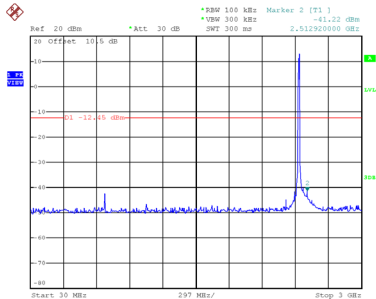

Date: 7.JUN.2024 12:55:27

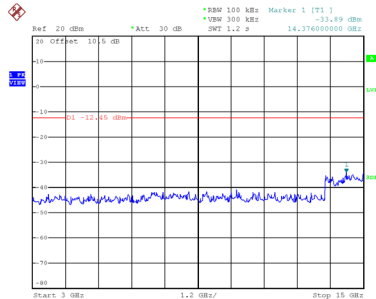


Date: 7.JUN.2024 12:55:36

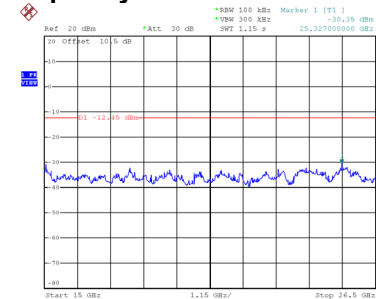


Date: 7.JUN.2024 12:55:45


CH11 – 10th Harmonic of the fundamental frequency

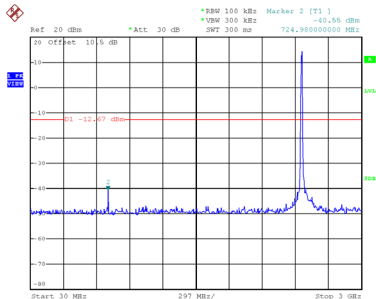

Date: 7.JUN.2024 12:53:02

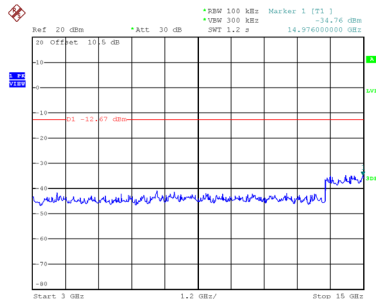


Date: 7.JUN.2024 12:53:11

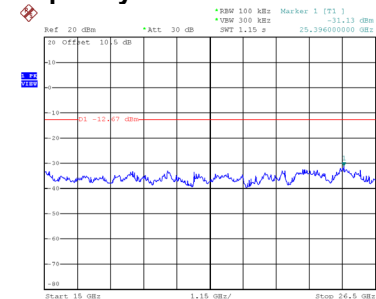

Date: 7.JUN.2024 12:53:20


Test Mode IEEE 802.11b_Ant 2

Bandedge-CH01

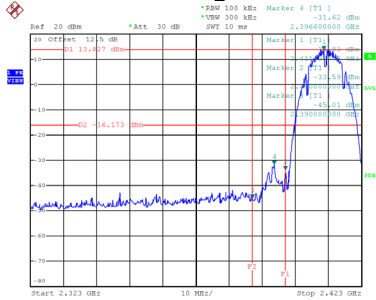


Date: 7.JUN.2024 14:38:36

Bandedge-CH11

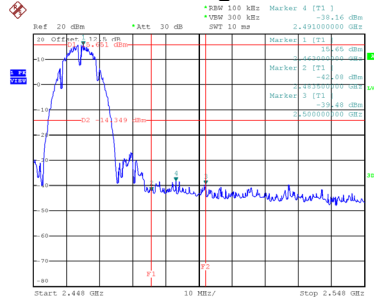


Date: 7.JUN.2024 14:44:25


CH01 – 10th Harmonic of the fundamental frequency

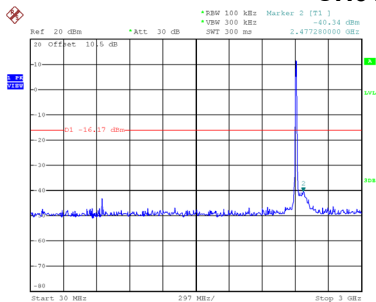

Date: 7.JUN.2024 14:38:52

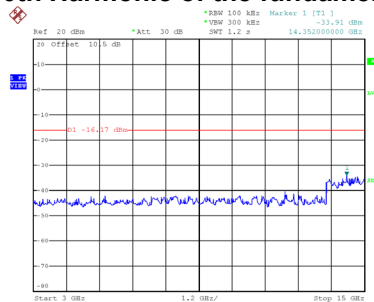


Date: 7.JUN.2024 14:39:01

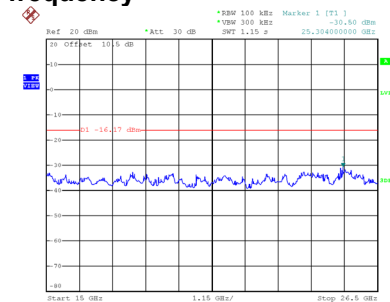


Date: 7.JUN.2024 14:39:10


CH06 – 10th Harmonic of the fundamental frequency

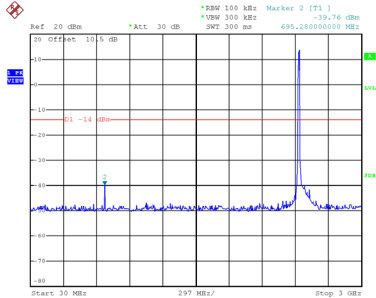

Date: 7.JUN.2024 14:40:37

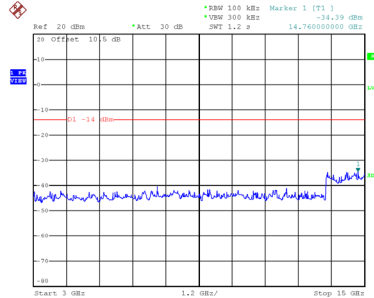


Date: 7.JUN.2024 14:40:47

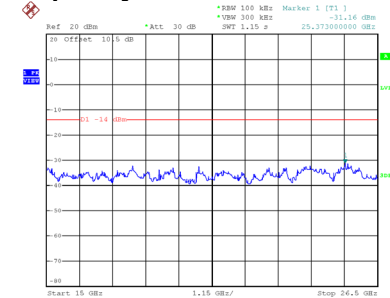


Date: 7.JUN.2024 14:40:56


CH11 – 10th Harmonic of the fundamental frequency

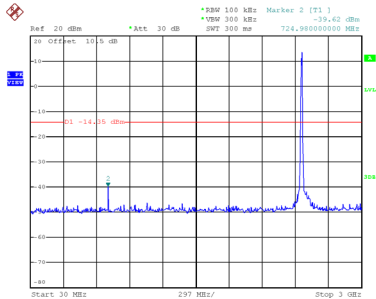

Date: 7.JUN.2024 14:44:40

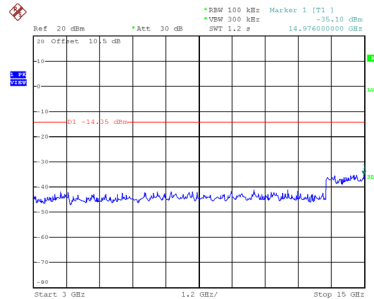


Date: 7.JUN.2024 14:44:49

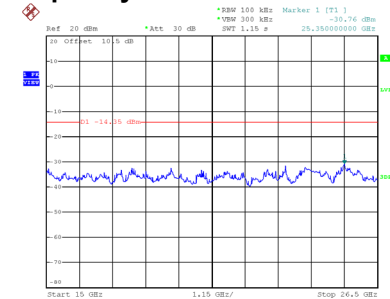

Date: 7.JUN.2024 14:44:58


Test Mode IEEE 802.11g_Ant 1

Bandedge-CH01

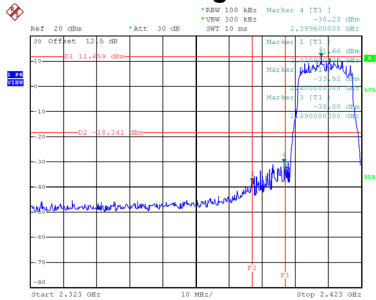


Date: 7.JUN.2024 12:57:46

Bandedge-CH11

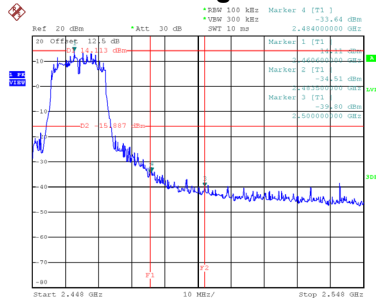


Date: 7.JUN.2024 13:01:36


CH01 – 10th Harmonic of the fundamental frequency

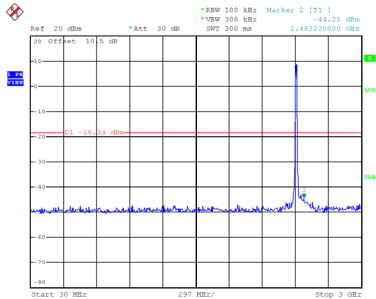

Date: 7.JUN.2024 12:58:02

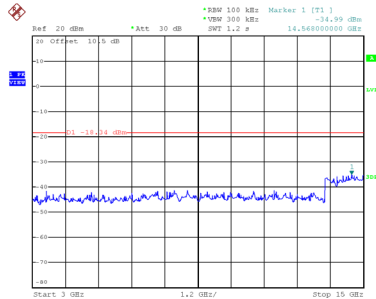


Date: 7.JUN.2024 12:58:11

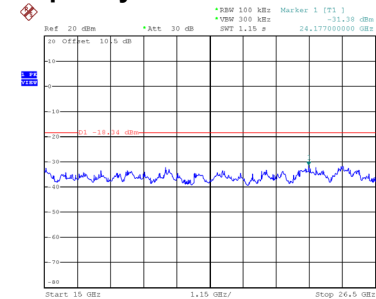


Date: 7.JUN.2024 12:58:20


CH06 – 10th Harmonic of the fundamental frequency

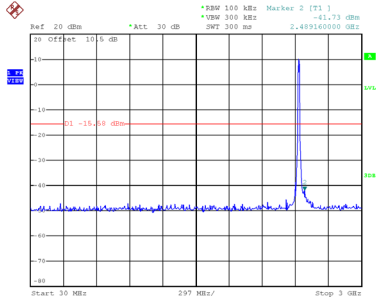

Date: 7.JUN.2024 12:59:42

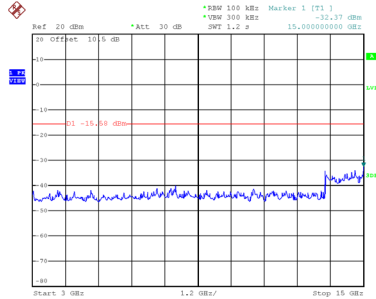


Date: 7.JUN.2024 12:59:51

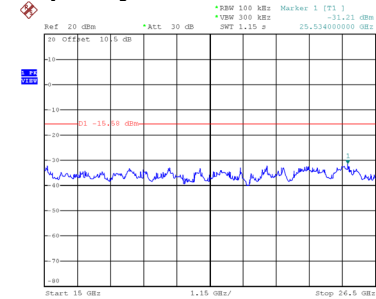


Date: 7.JUN.2024 13:00:00


CH11 – 10th Harmonic of the fundamental frequency

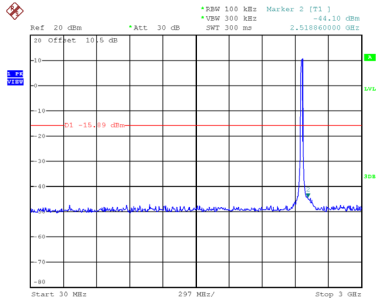

Date: 7.JUN.2024 13:01:51

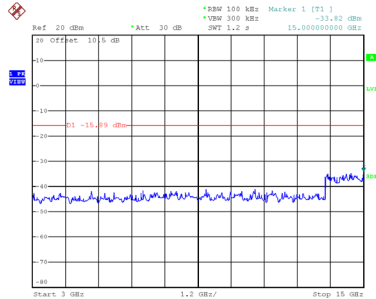

Date: 7.JUN.2024 13:02:00

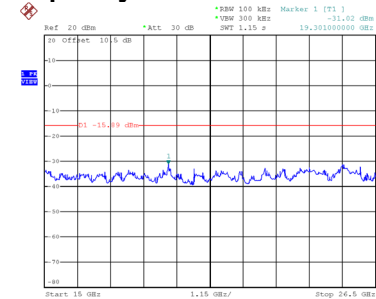

Date: 7.JUN.2024 13:02:09