

TEST REPORT

Applicant Name & Address : Gree Electric Appliances, Inc. of Zhuhai
Jinji West Road, Qianshan, Zhuhai, Guangdong 519070, P. R. China

Sample Description

Product : Air conditioner
FCC ID : 2ADAP-CS532K
Model No. : Refer to page 6.
Electrical Rating : AC 208-230V/60Hz

Date Received : 15 Aug., 2014

Date Test Conducted : 15 Aug., 2014 – 21 Sept., 2014

Test standards : **47 CFR PART 15 Subpart C: 2013 section 15.247**

Test Result : Pass


Conclusion : The submitted samples complied with the above rules/standards.

Remark : This test report for WIFI module.

*****End of Page*****

Prepared and Checked By:

Approved By:



Endy Ye
Engineer
Intertek Guangzhou

Helen Ma
Sr.Project Engineer
Intertek Guangzhou
26 Nov.,2014 ***Date***

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

CONTENT

TEST REPORT	1
CONTENT	2
1.0 Summary of Test.....	3
2.0 General Description	4
2.1 Product Description.....	4
2.2 Related Submittal(s) Grants.....	5
2.3 Test Methodology.....	5
2.4 Test Facility.....	5
3.0 System Test Configuration.....	6
3.1 Justification	6
3.2 EUT Exercising Software	7
3.3 Special Accessories.....	7
3.4 Measurement Uncertainty.....	7
3.5 Equipment Modification.....	8
3.6 Support Equipment List and Description.....	8
4.0 Measurement Results	9
4.1 Antenna Requirement:	9
4.2 6 dB Bandwidth:.....	10
4.3 Maximum Peak Conducted Output Power.....	15
4.4 Peak Power Spectral Density.....	21
4.5 Out of Band Conducted Emissions	27
4.6 Out of Band Radiated Emissions	40
4.7 Radiated Emissions in Restricted Bands.....	41
4.8 Band Edges Requirement	63
4.9 Conducted Emission Test	67
5.0 Test Equipment List.....	69

1.0 Summary of Test

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
6 dB Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10: Clause 6.9.1	PASS
Maximum Peak Conducted Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: Clause 6.10.2.1	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10: Clause 6.11.2.3	PASS
Out of Band Conducted Emissions	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.7	PASS
Out of Band Radiated Emission	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	N/A
Radiated Emissions in Restricted Bands	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9.2	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

Remark:

N/A: not applicable. Refer to the relative section for the details.
 EUT: In this whole report EUT means Equipment Under Test.
 Tx: In this whole report Tx (or tx) means Transmitter.
 Rx: In this whole report Rx (or rx) means Receiver.
 RF: In this whole report RF means Radio Frequency.
 ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

2.0 General Description

2.1 Product Description

Operating Frequency	2412 MHz to 2462 MHz for 802.11b/g
Type of Modulation:	802.11b: DSSS(CCK/QPSK/BPSK) 802.11g: OFDM(BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate:	802.11b :1/2/5.5/11 Mbps 802.11g :6/9/12/18/24/36/48/54 Mbps
Number of Channels	11 Channels for 802.11b/g
Channel Separation:	5 MHz
Antenna Type	The wire antenna that uses a unique coupling to the intentional radiator
Antenna gain:	3 dBi
Function:	Air conditioner with 2.4 GHz WIFI
EUT Power Supply:	AC 230V 60 Hz
Power cord:	1.8 m x 3 wires unshielded AC supply cable

EUT channels and frequencies list:

For 802.11b/g: test frequencies are lowest channel 1: 2412 MHz, middle channel 6: 2437 MHz and highest channel 11: 2462 MHz.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

2.2 Related Submittal(s) Grants

This is an application for certification of:

DTS- Part 15 Digital Transmission Systems (WIFI transmitter portion)

The FCC ID of corresponding RF controller for this air conditioner is 2ADAP-SAA1FB1F.

Remaining portions are subject to the following procedures:

1. Receiver portion of WIFI: exempt from technical requirement of this Part.
2. The air conditioner function: exempt from FCC requirement.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10:2009. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All of the tests are performed at:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch. located at Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, 510663, China. This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. During testing, AC power line was manipulated to produce worst case emissions. It was powered by AC 230V/60Hz supply.

Model Lists:

GWH09UC-D3DNA4A/I, GWH09UC-D3DNA4C/I, CROWN09HP230V1AH, 40GRQB09B-3, 40GRQB09H--3, 619FEQ009BBGA, 619FEQ009HBGA;
GWH12UC-D3DNA4A/I, GWH12UC-D3DNA4C/I, CROWN12HP230V1AH, 40GRQB12B-3, 40GRQB12H--3, 619FEQ012BBGA, 619FEQ012HBGA;
GWH18UC-D3DNA4A/I, GWH18UC-D3DNA4C/I, CROWN18HP230V1AH, 40GRQB18B-3, 40GRQB18H--3, 619FEQ018BBGA, 619FEQ018HBGA.

Antenna Type: PCB antenna.

All models are identical except the capacity rating, model name and brand name, so full tests were performed on model GWH18UC-D3DNA4A/I.

We tested the air conditioner, model: GWH18UC-D3DNA4A/I, to determine if it was in compliance with the relevant FCC standards. We found that the unit met the requirements of FCC part 15.247 when tested as received. The worst case's test data was presented in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower.
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower.
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified.

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

3.2 EUT Exercising Software

The test was performed under “TTERMP” which was provided by manufacture.

3.3 Special Accessories

Please refer to clause 3.6 of this report.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by Gree Electric Appliances, Inc. of Zhuhai. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.6 Support Equipment List and Description

This product was tested with corresponding accessories as below:

Supplied by Intertek:

Description	Manufacturer	Model No.	SN/Certificate NO
PC	HP	QV986AV	4CV35074HC
LCD Monitor	HP	EM886A	575201-001
Keyboard	HP	SK-2800	434820-AA1
Mouse	HP	OP-520NU	/

The support equipments will be removed from test site after the frequency is fixed.

4.0 Measurement Results

4.1 Antenna Requirement:

Standard requirement

15.203 requirement:

For intentional device. According to 15.203 an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is a PCB antenna and no consideration of replacement. The best case gain of the antenna is 3 dBi.




4.2 6 dB Bandwidth:

Test Requirement: FCC Part 15 C section 15.247
 (a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method: ANSI C63.10: Clause 6.9.1

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

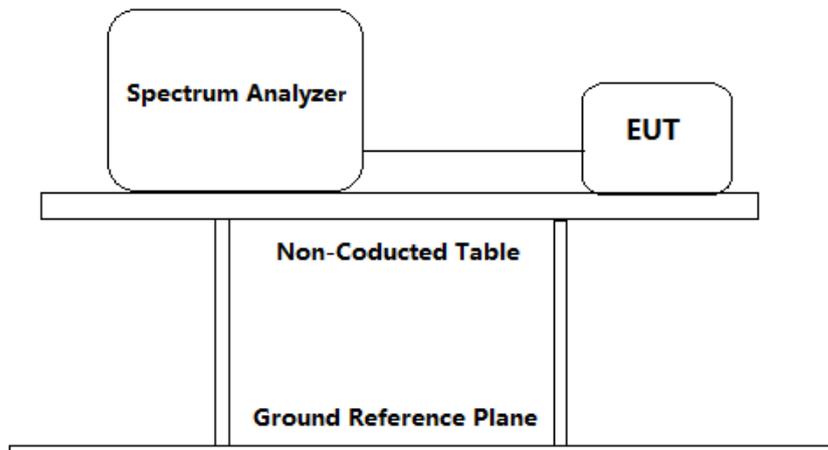

Test Procedure:


1. Remove the antenna from the EUT and then connect a low attenuation RF cable (cable loss = 0 dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 Sweep = auto; Detector Function = Peak; ace = Max Hold
 RBW: 1%~5% OBW ; VBW: $\geq 3 \times \text{RBW}$
 Span = $2 \times \text{OBW} \sim 5 \times \text{OBW}$
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Channel No.	Frequency (MHz)	Mode	Data Rate	Measured 6dB bandwidth (MHz)	Limit	Result
1	2412	802.11b	11 Mbps	10.160	≥500KHz	Pass
6	2437		11 Mbps	10.080		Pass
11	2462		11 Mbps	10.160		Pass
1	2412	802.11g	54 Mbps	16.560		Pass
6	2437		54 Mbps	16.560		Pass
11	2462		54 Mbps	16.560		Pass


Test result: The unit does meet the FCC requirements.

Result plot as follows:


802.11b mode with 11Mbps data rate
Channel 1: 2.412GHz:

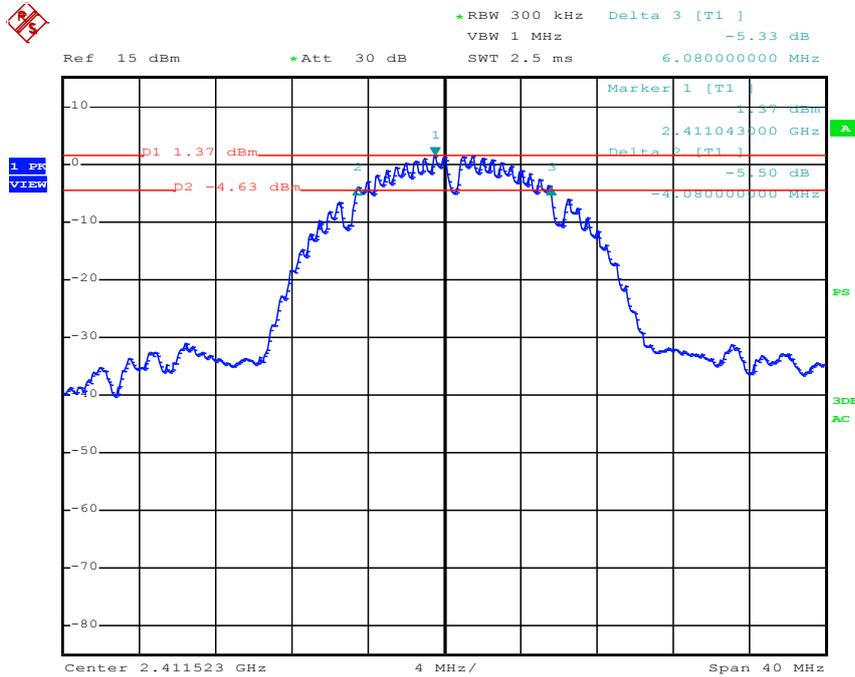


Channel 6: 2.437GHz:

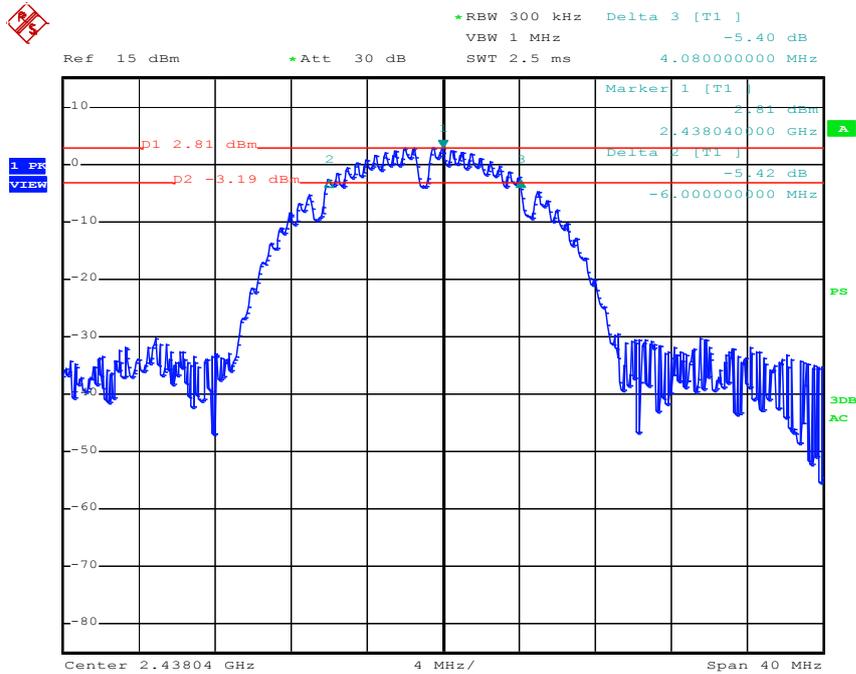


Channel 11: 2.462GHz

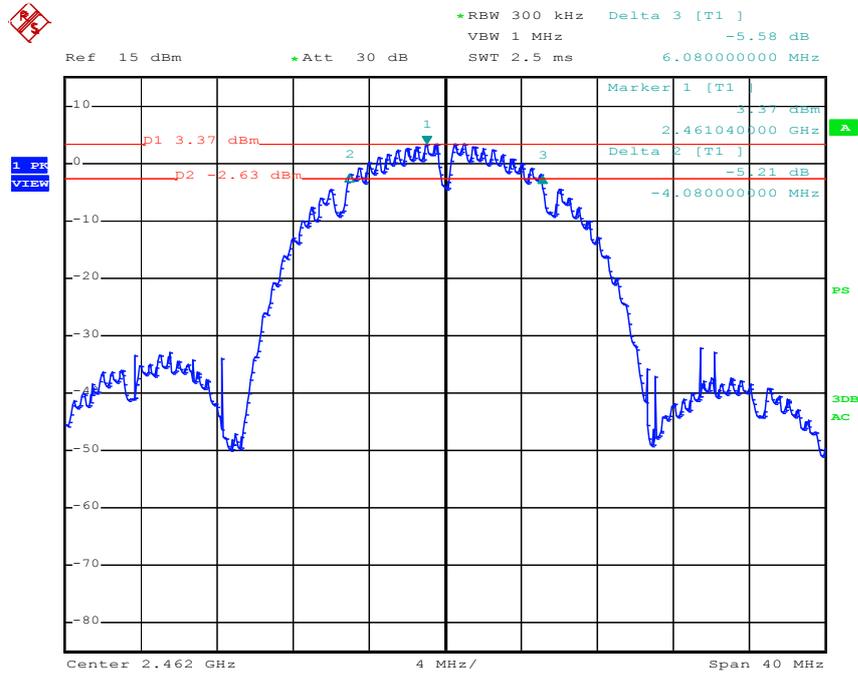


802.11g mode with 54Mbps data rate
 Channel 1: 2.412GHz:

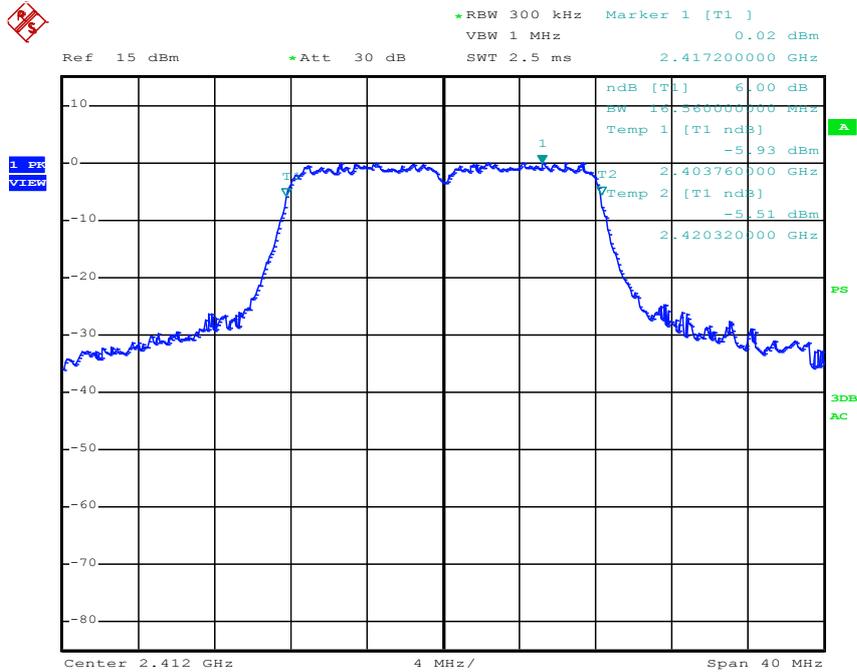

Channel 6: 2.437GHz:

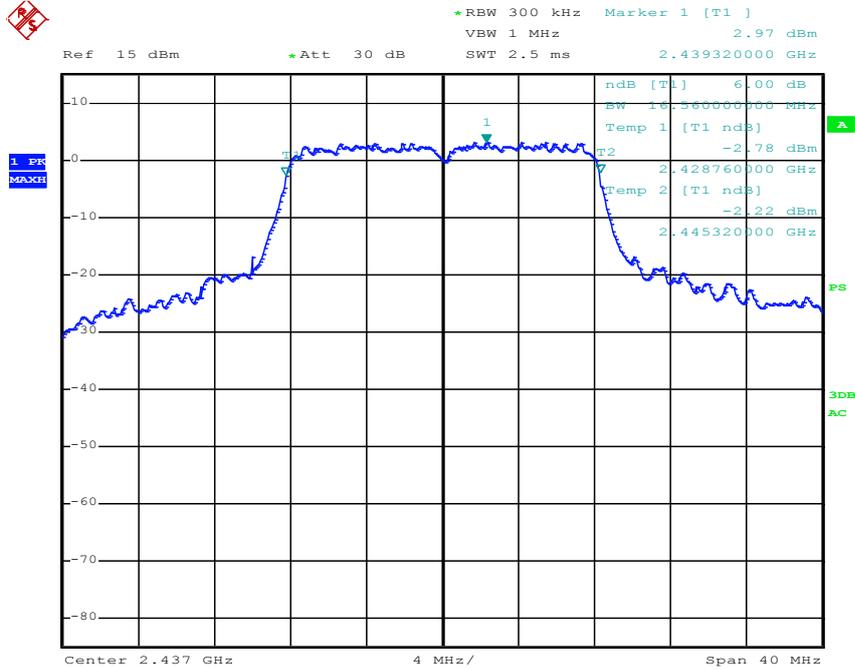

Channel 11: 2.462GHz:

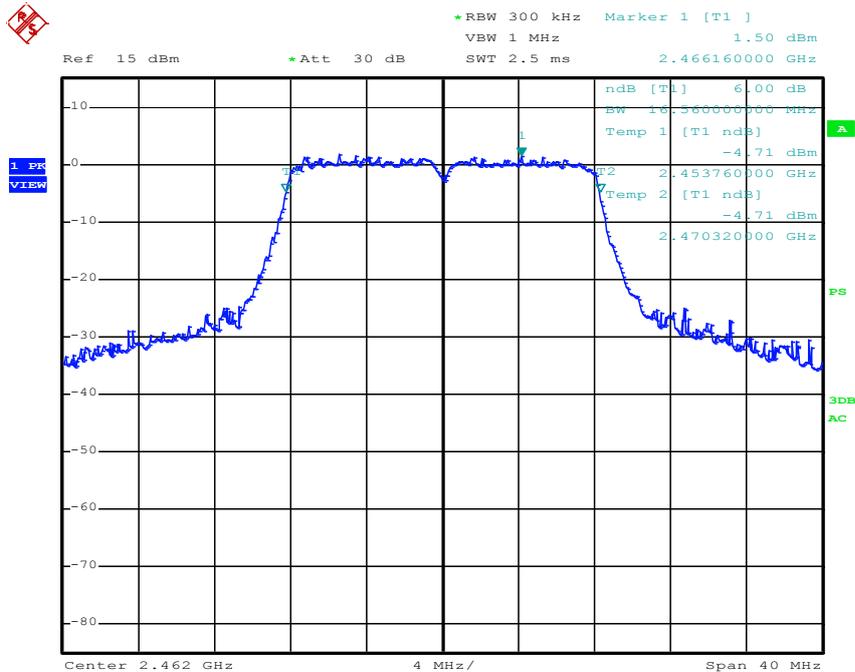


4.3 Maximum Peak Conducted Output Power

Test Requirement: FCC Part 15 C section 15.247
(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.
Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10: Clause 6.10.2.1(Channel integration method)

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

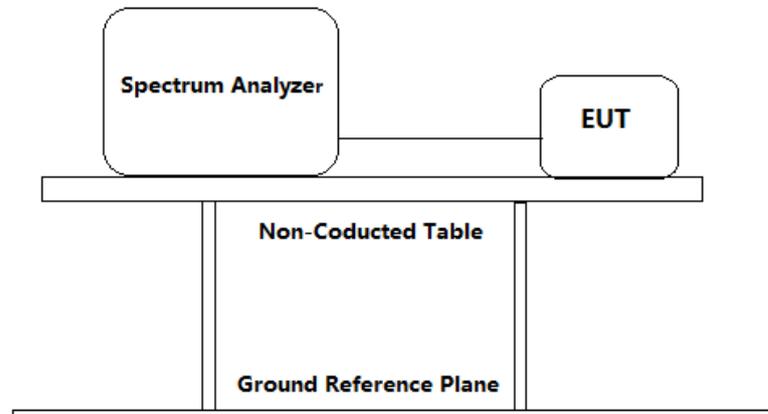

Test Procedure:

- a) Set the RBW \geq 6 dB bandwidth of the emission, or use a peak power meter. A peak power meter is required if the 6 dB bandwidth is greater than the capability of the spectrum analyzer (typically 3 MHz RBW).
- b) Channel integration method. For peak output power measurements when the analyzer RBW is not large enough, the analyzer band power function can be used. For U-NII output power measurements where power averaging is allowed, see 6.10.3. For the channel integration method, maximum peak power shall be measured over any interval of continuous transmission.
 - 1) Set the RBW and VBW to the maximum available
 - 2) Set the band limits as appropriate for the power measurement; e.g., 6 dB, 20 dB, or 26 dB bandwidth. Expand the band limits by about $0.5 \times$ RBW on each end
 - 3) Turn averaging off
 - 4) Set sweep to automatic
 - 5) Set the span just large enough to capture the emission
 - 6) Use a peak detector on max hold
 - 7) The analyzer should be in linear (rather than log) display mode
 - 8) Let the emission stabilize before making a final reading
- c) Bandwidth correction method. Using largest available analyzer RBW, the BW correction factor is $10 \log [(6 \text{ dB BW of emission}) / (\text{analyzer RBW})]$.
- d) Record the measured power.



Report No.: 140815007GZU-003
Issued: 2014-11-26

Test result:


Channel No.	Frequency (MHz)	Mode	Data Rate	Measured Channel Power (dBm)	Limit	Result
1	2412	802.11b	11 Mbps	15.06	1W (30dBm)	Pass
6	2437		11 Mbps	16.12		Pass
11	2462		11 Mbps	16.56		Pass
1	2412	802.11g	54 Mbps	18.33		Pass
6	2437		54 Mbps	21.35		Pass
11	2462		54 Mbps	19.85		Pass

Remark: Level = Read Level + Cable Loss(2dB).
The unit does meet the FCC requirements.


Result plot as follows:

802.11b mode with 11Mbps data rate


Channel 1: 2.412GHz:

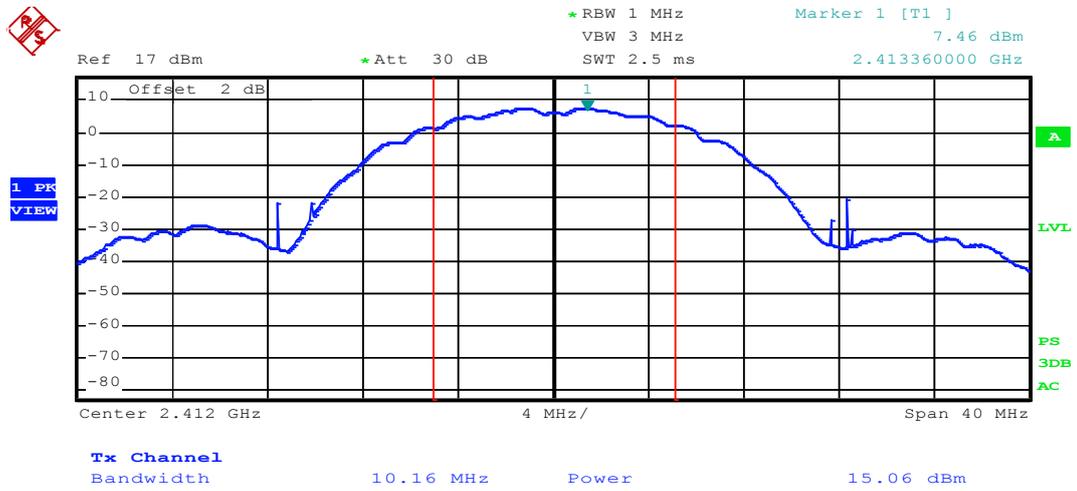

Channel 6: 2.437GHz:

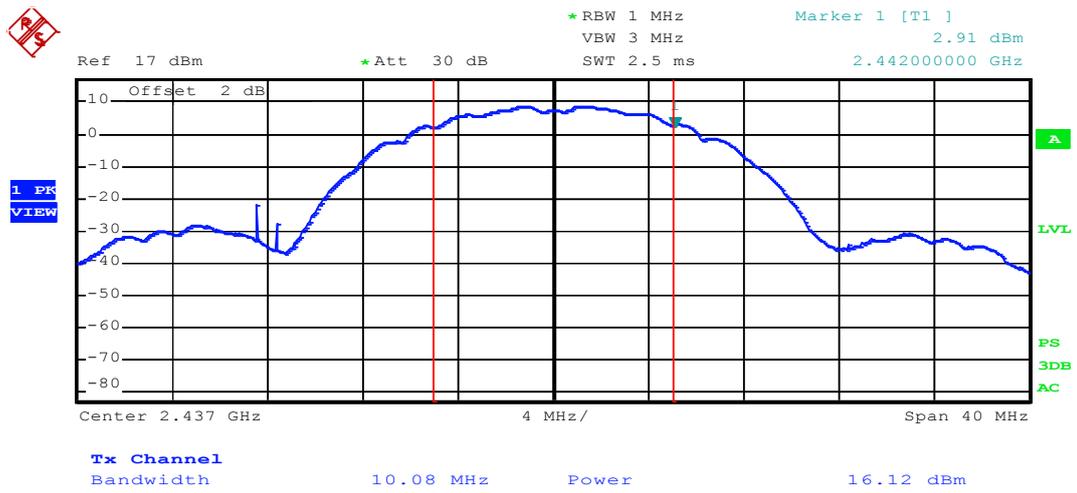


Channel 11: 2.462GHz:

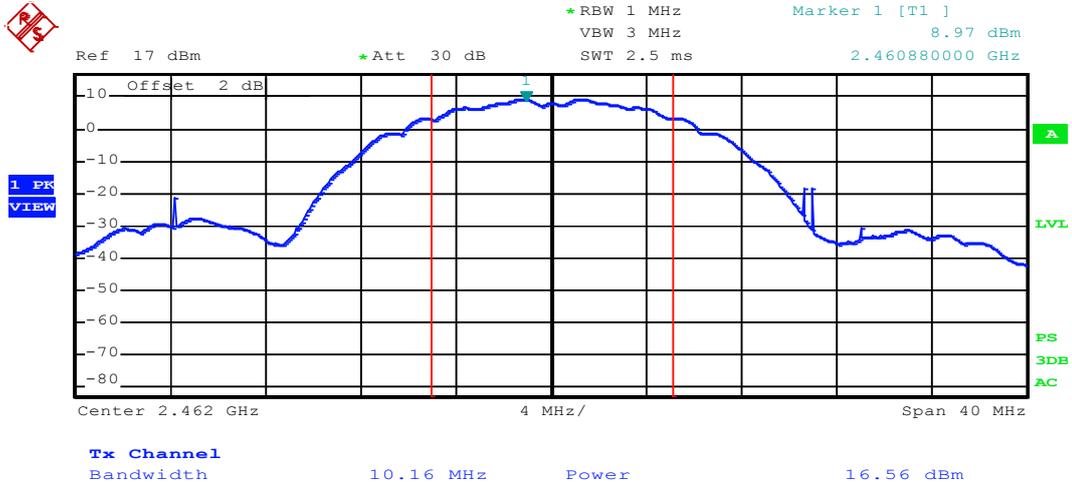


802.11g mode with 54Mbps data rate


Channel 1: 2.412GHz:

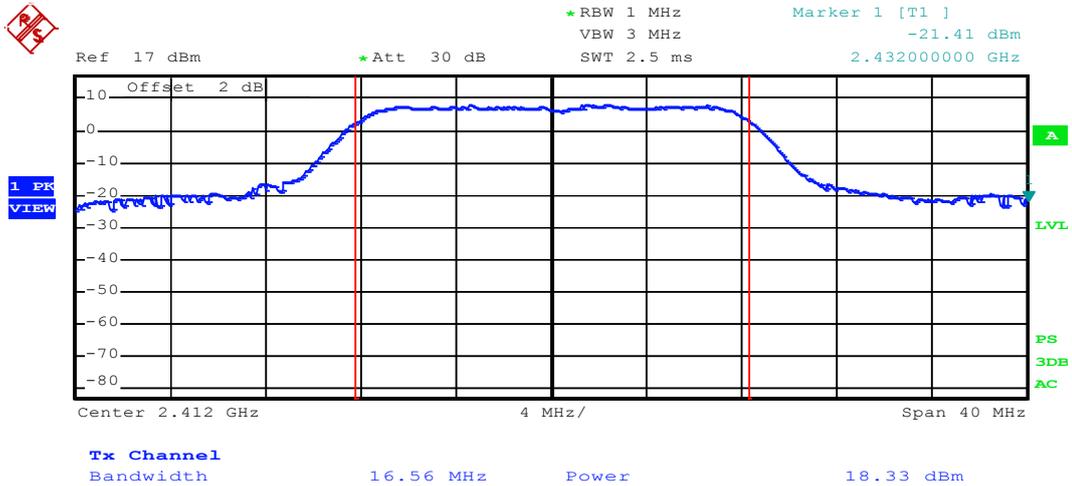

Channel 6: 2.437GHz:

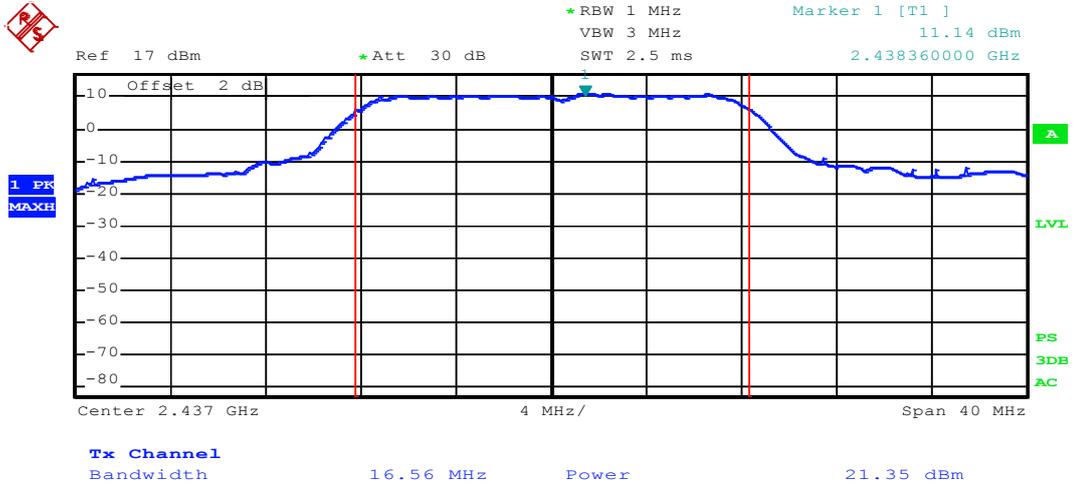


Channel 11: 2.462GHz:

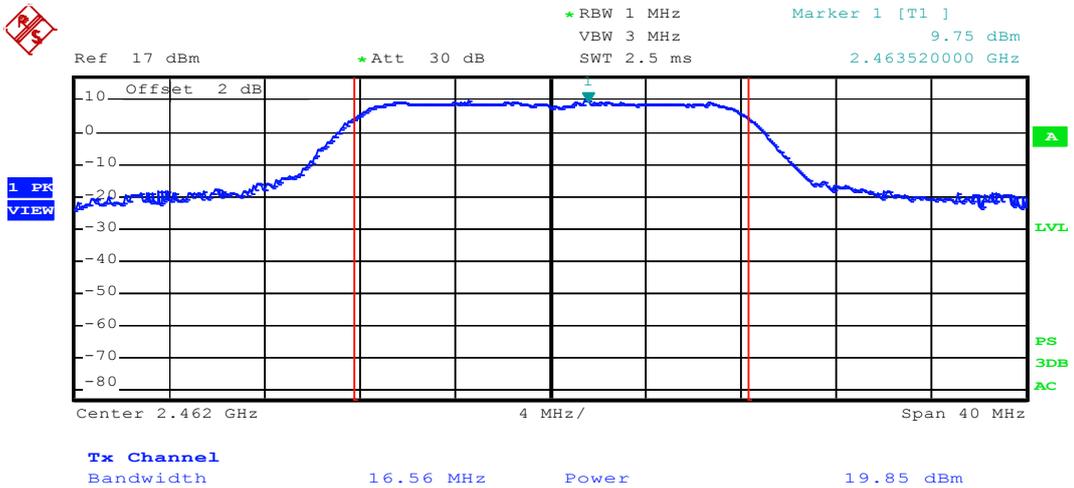

4.4 Peak Power Spectral Density

- Test Requirement:** FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- Test Method:** ANSI C63.10: Clause 6.11.2.3
- Test Status:** Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
- Test Configuration:**

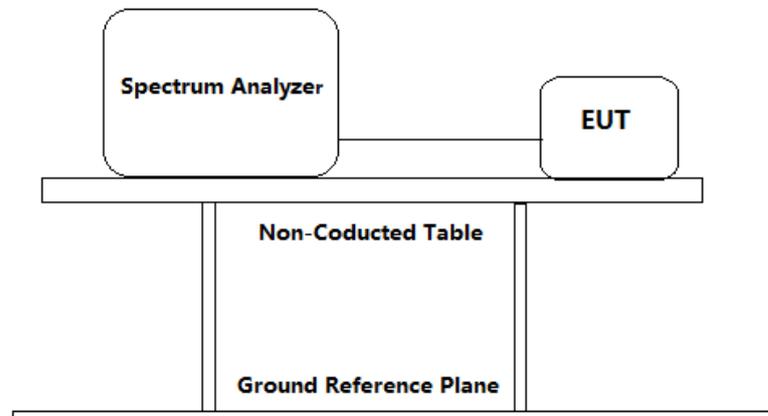

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =2dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set CENTER FREQUENCY = Frequency from Power Spectral Density Test Matrix
 - b) Set SPAN = 20 MHz (For devices with a nominal 40 MHz BW, 50 MHz span will be needed)
 - c) Set REFERENCE LEVEL = 20 dBm
 - d) Set ATTENUATION = 0 dB
 - e) Set SWEEP TIME = Coupled
 - f) Set RBW = 3 kHz
 - g) Set VBW = 10 kHz
 - h) Set DETECTOR = Peak
 - i) Set MKR = Center Frequency
 - j) Set TRACE = CLEAR WRITE

Place the radio in continuous transmit mode. Set the TRACE to MAX HOLD, and after the trace stabilizes, the TRACE to VIEW. Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency.

After viewing the EUT waveform on the spectrum analyzer, perform the following spectrum analyser functions to capture the trace:

Set SPAN = 300 kHz

Set SWEEP TIME = 100 s

Set TRACE = MAX HOLD

Set MKR = PEAK SEARCH

3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.




Report No.: 140815007GZU-003
Issued: 2014-11-26


Channel No.	Frequency (MHz)	Mode	Data Rate	Measured Peak Power Spectral Density (dBm/3KHz)	Limit	Result
1	2412	802.11b	11 Mbps	-9.61	8dBm/ 3 KHz	Pass
6	2437		11 Mbps	-8.21		Pass
11	2462		11 Mbps	-8.09		Pass
1	2412	802.11g	54 Mbps	-14.97		Pass
6	2437		54 Mbps	-11.73		Pass
11	2462		54 Mbps	-12.89		Pass

Test result: Level = Read Level + Cable Loss(2dB).
The unit does meet the FCC requirements.

Channel 6: 2.437GHz:

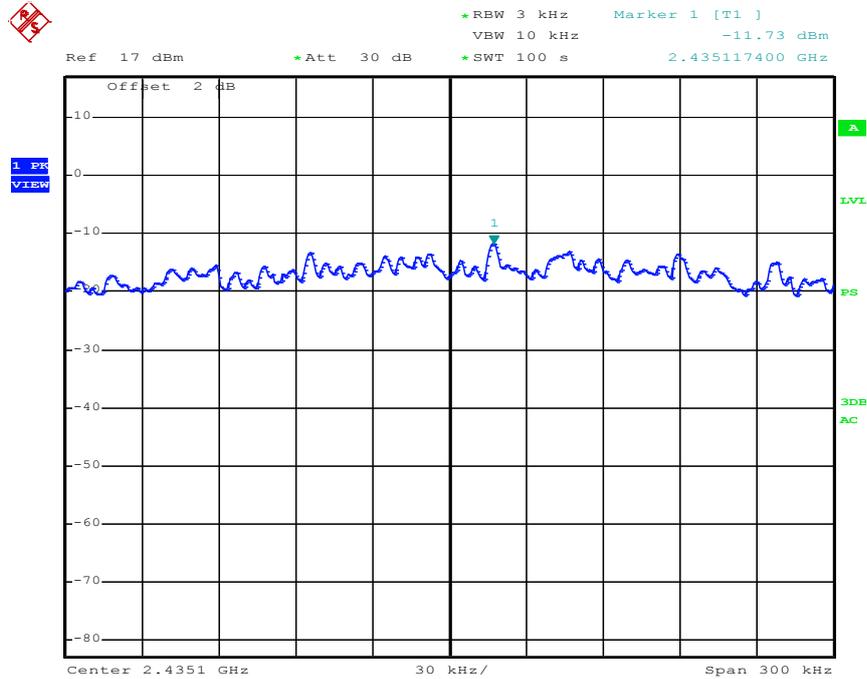


Channel 11: 2.462GHz:

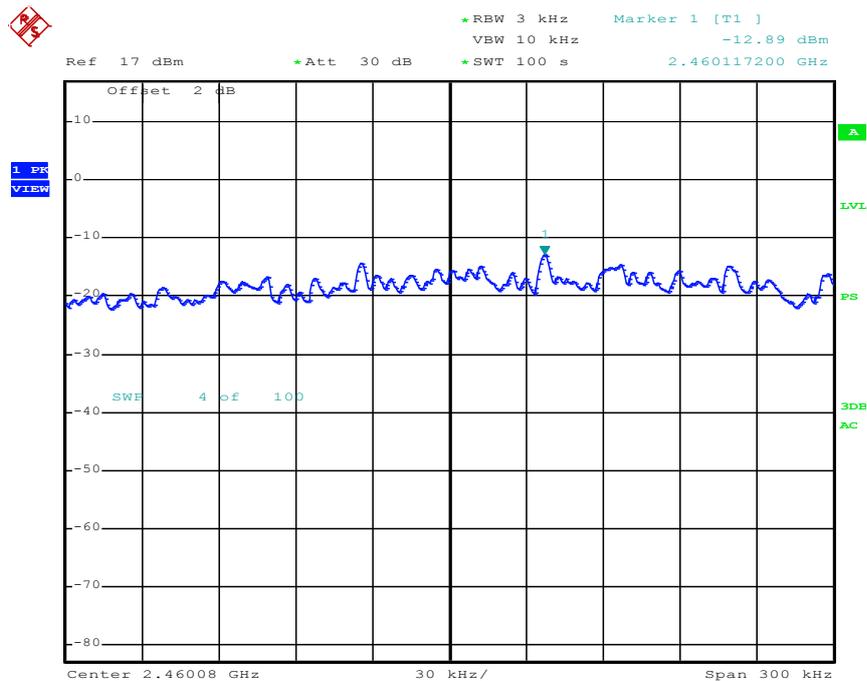

4.5 Out of Band Conducted Emissions

- Test Requirement:** FCC Part 15 C section 15.247
 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
- Test Method:** ANSI C63.10: Clause 6.7
- Test Status:** Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
- Test Configuration:**

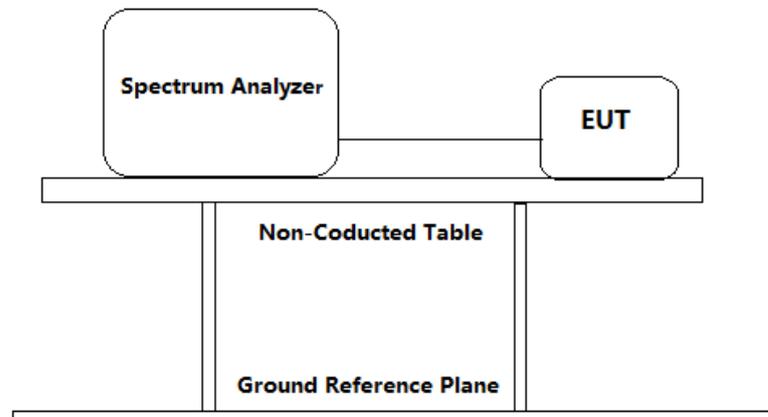


- Test Procedure:**
1. Remove the antenna from the EUT and then connect a low RF cable (cable loss =2dB) from the antenna port to the spectrum analyzer or power meter.
 2. Set the spectrum analyzer: RBW=100 kHz, VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
 3. Measure the Conducted unwanted Emissions of the test frequency with special test status.
 4. Repeat until all the test status is investigated.
 5. Report the worst case.

Result plot as follows:


802.11b mode with 11Mbps data rate

Channel 1: 2.412GHz:


30 MHz to 2 GHz:

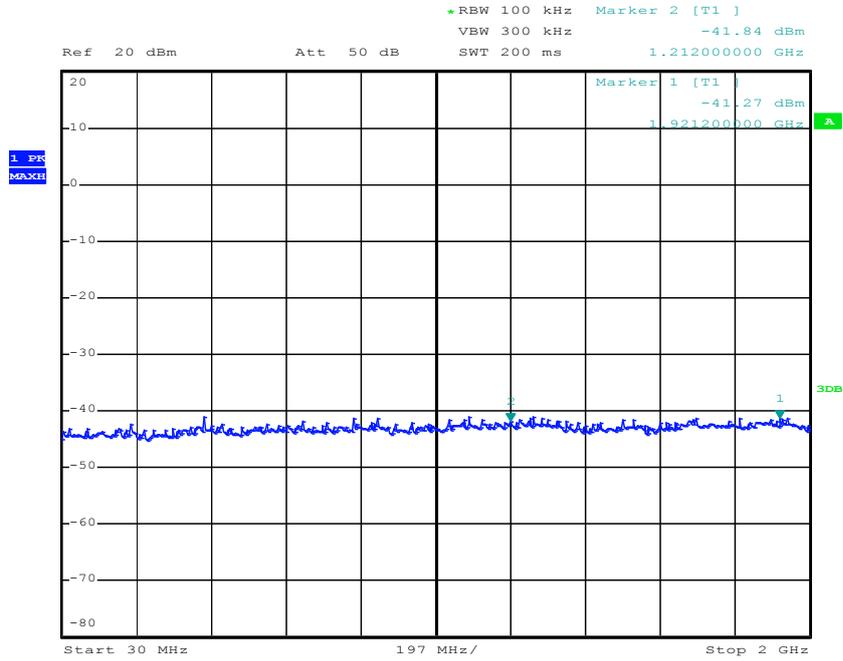

2 GHz to 10 GHz:

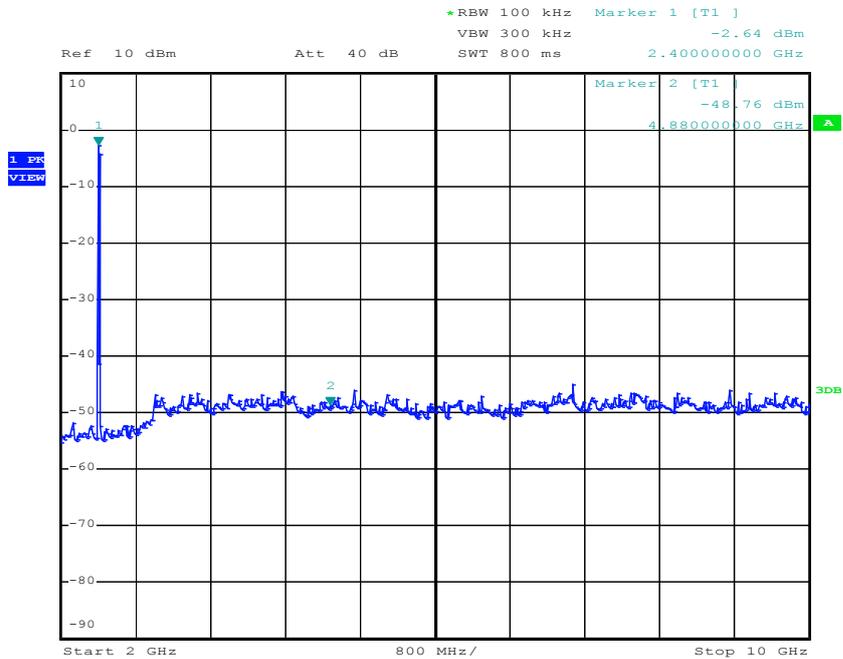

10 GHz to 25 GHz:

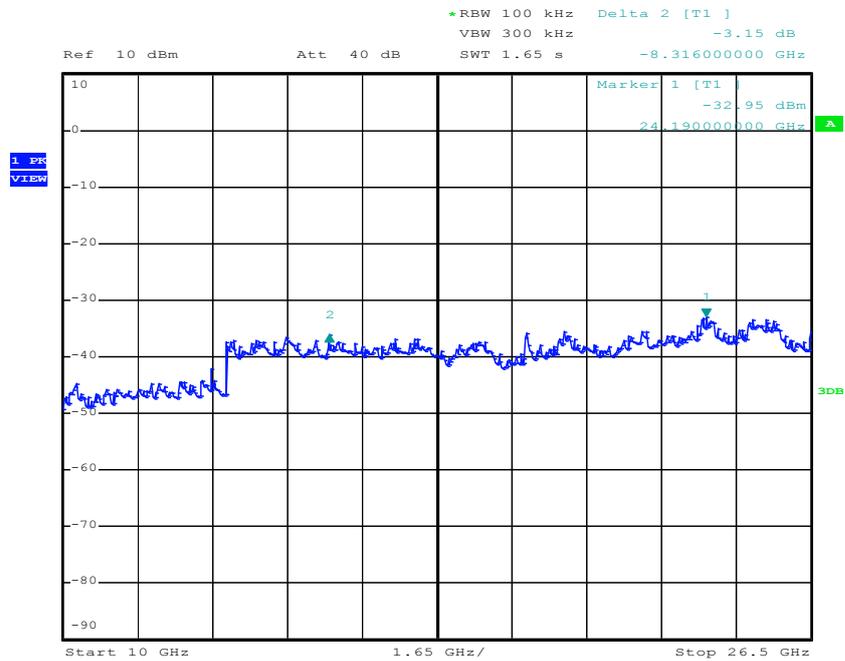


In any 100kHz bandwidth, the Conducted Spurious Emissions from 30 MHz to 25 GHz were greater than 20dB below the peak emission within the band that contains the highest level of the desired power.


802.11b mode with 11Mbps data rate

Channel 6: 2.437GHz:


30 MHz to 2 GHz:

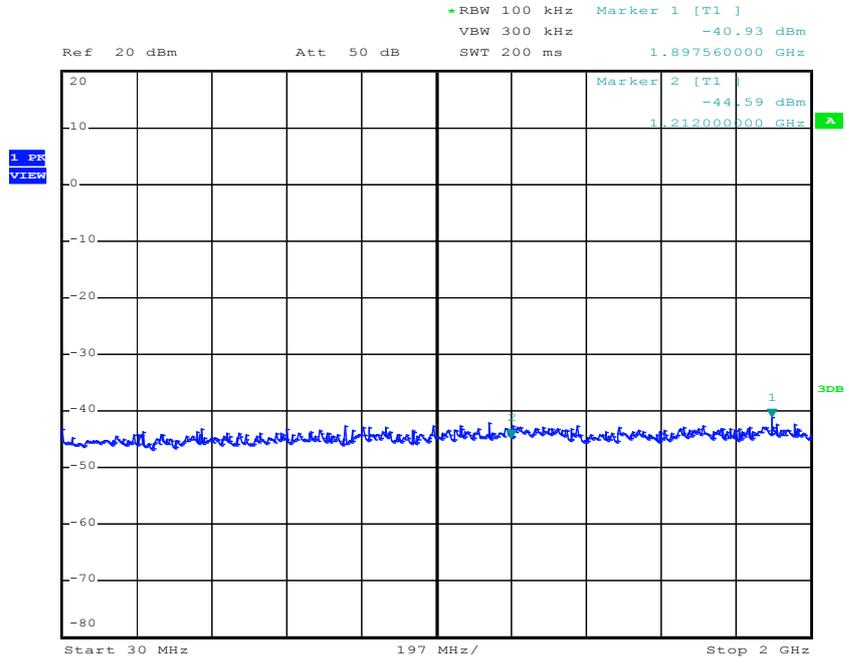

2 GHz to 10 GHz:

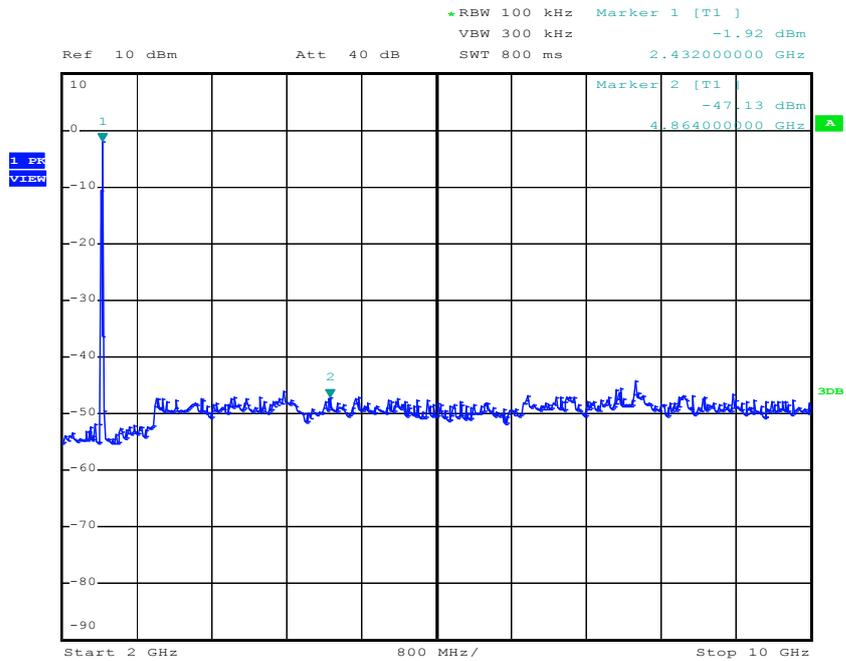


10 GHz to 25 GHz:

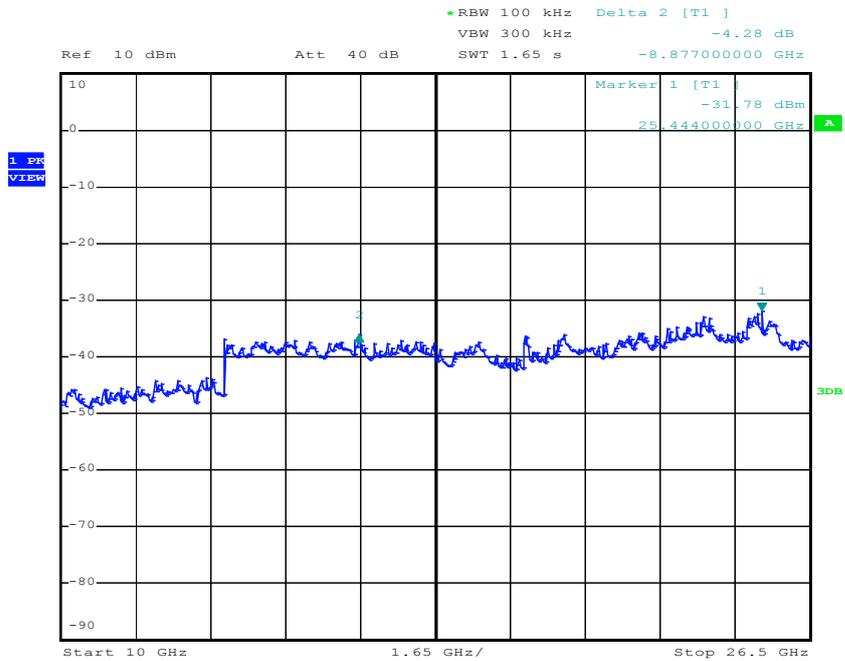


In any 100kHz bandwidth, the Conducted Spurious Emissions from 30 MHz to 25 GHz were greater than 20dB below the peak emission within the band that contains the highest level of the desired power.

Channel 11:2.462 GHz:

30 MHz to 2 GHz:

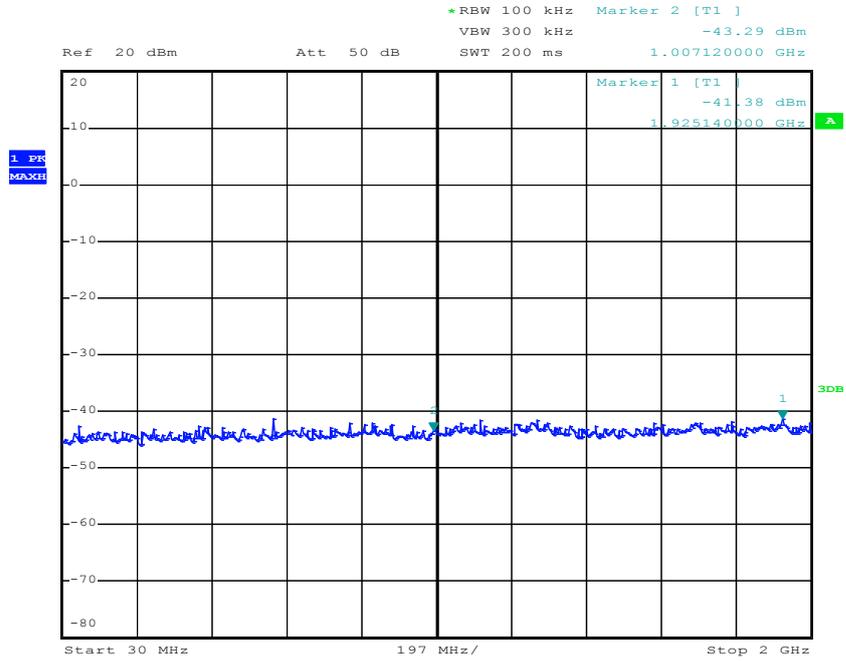


2 GHz to 10 GHz:

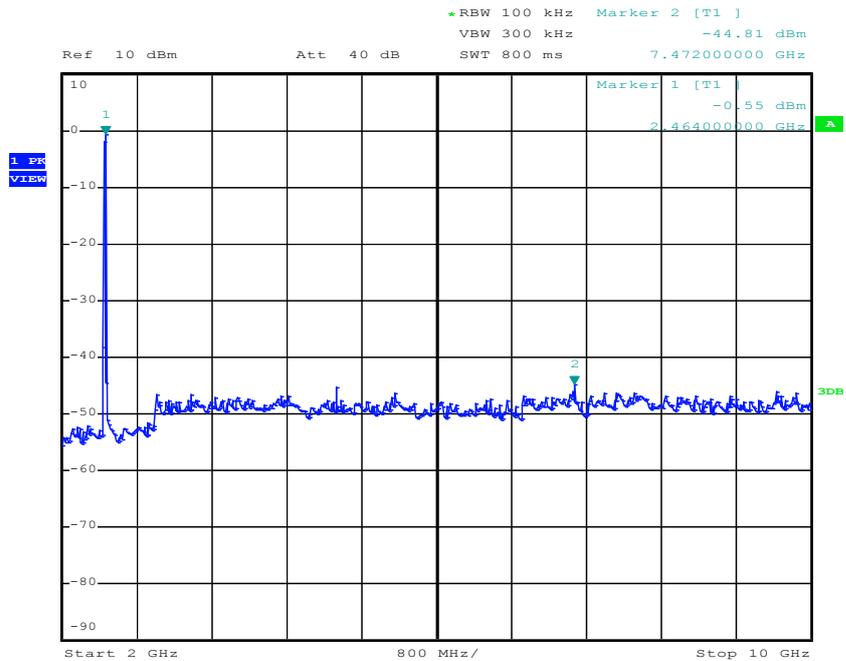


802.11g mode with 54Mbps data rate

Channel 1: 2.412GHz:


30 MHz to 2 GHz:

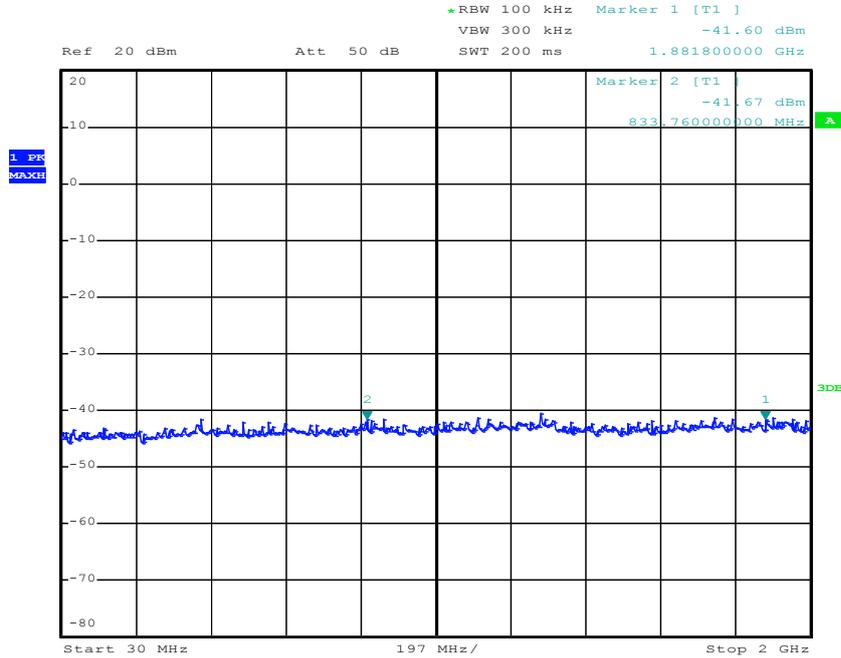

2 GHz to 10 GHz:

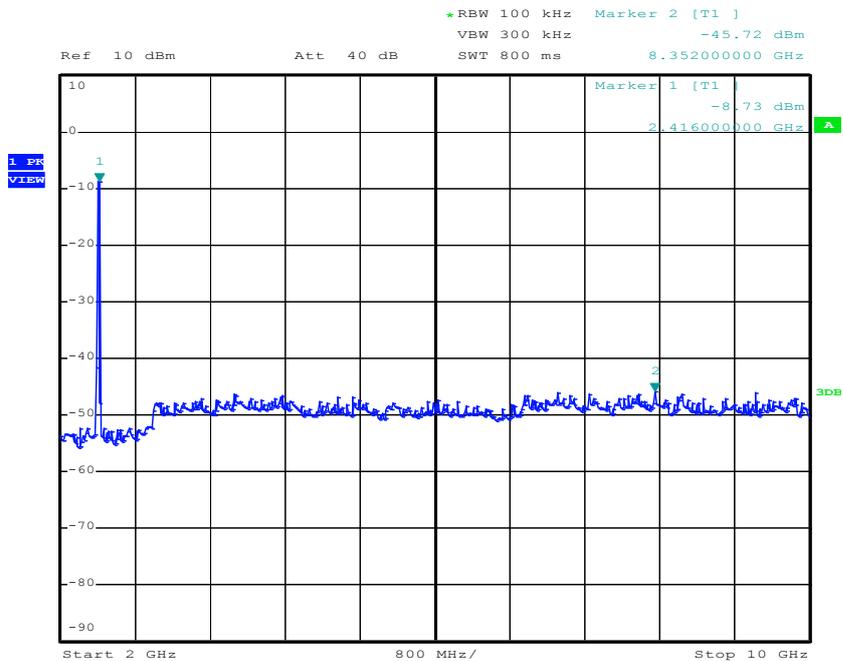


10 GHz to 25 GHz:

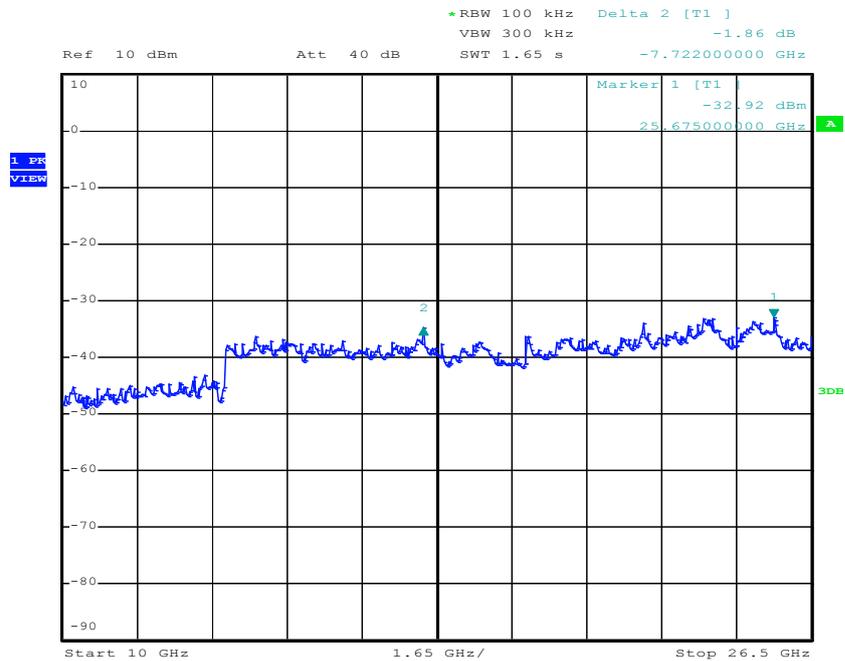


In any 100kHz bandwidth, the Conducted Spurious Emissions from 30 MHz to 25 GHz were greater than 20dB below the peak emission within the band that contains the highest level of the desired power.


Channel 6: 2.437GHz:
30 MHz to 2 GHz:

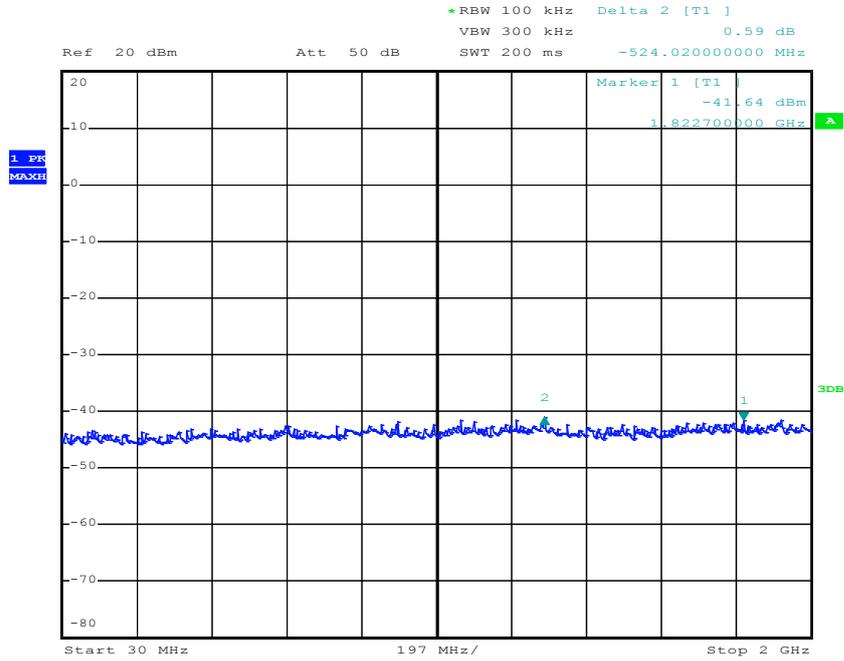

2 GHz to 10 GHz:

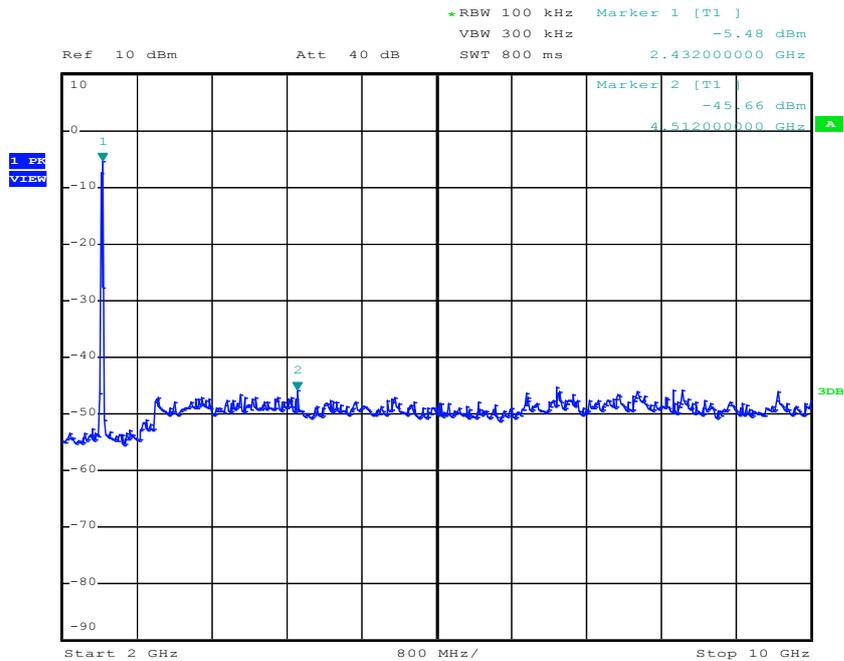


10 GHz to 25 GHz:

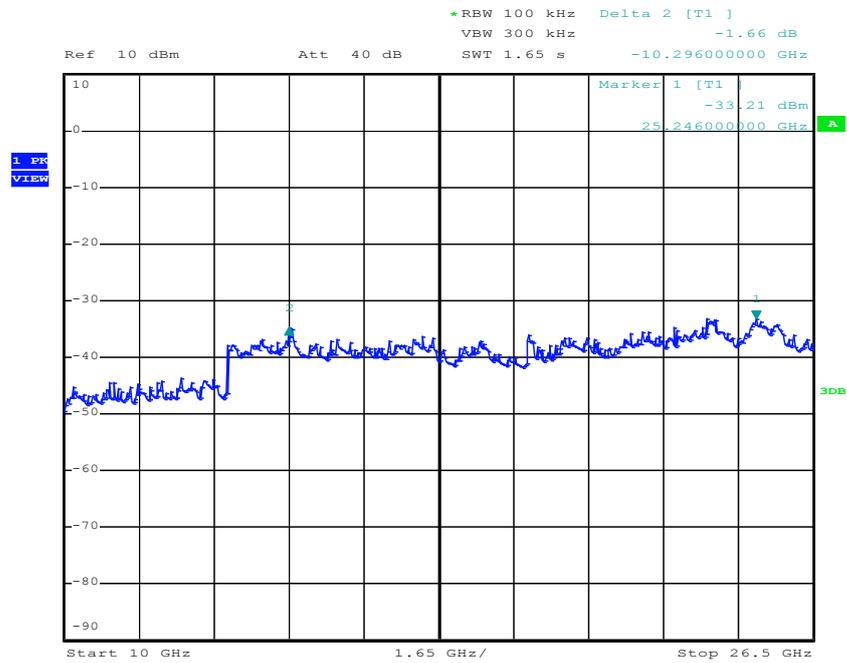


In any 100kHz bandwidth, the Conducted Spurious Emissions from 30 MHz to 25 GHz were greater than 20dB below the peak emission within the band that contains the highest level of the desired power.

Channel 11:2.462 GHz:


30 MHz to 2 GHz:

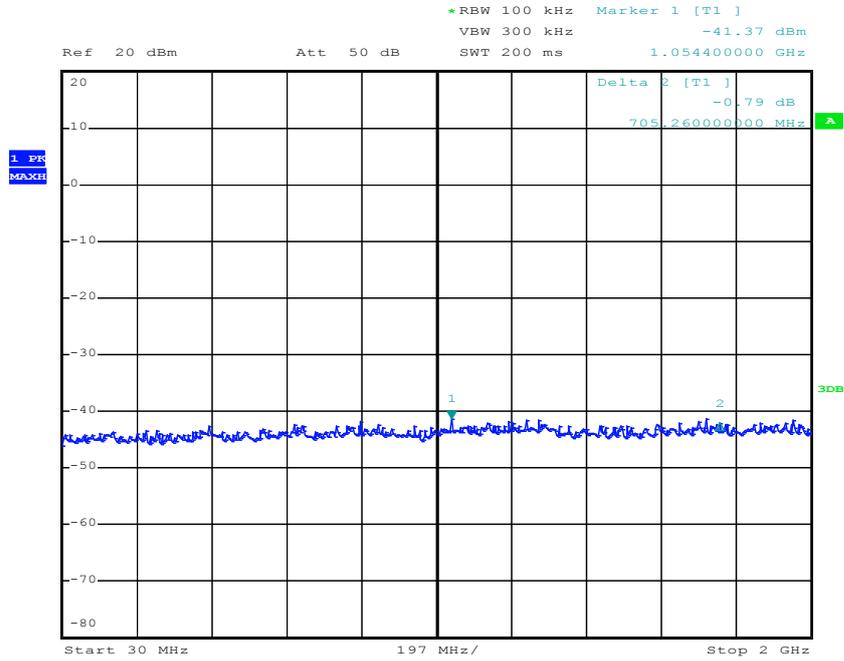

2 GHz to 10 GHz:

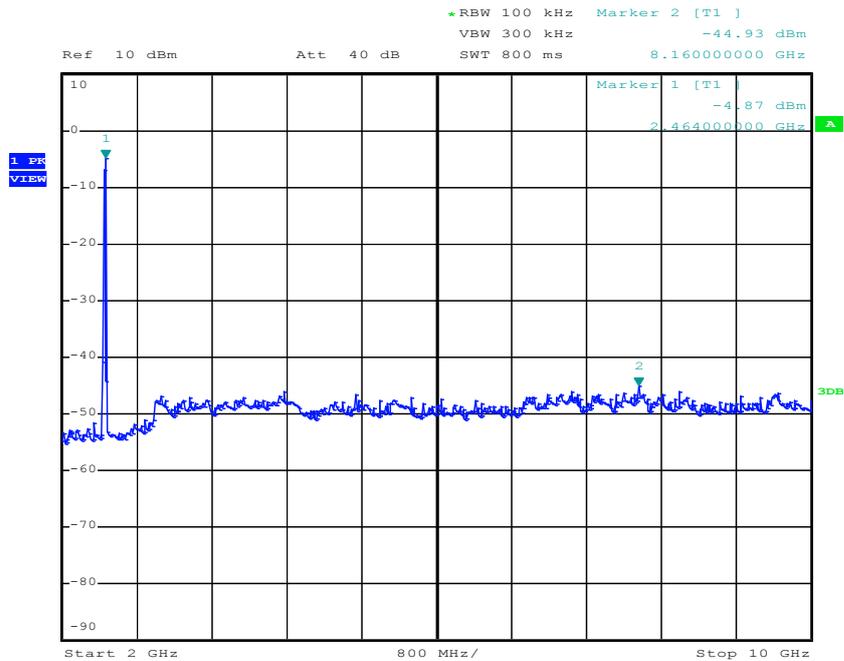

10 GHz to 25 GHz:

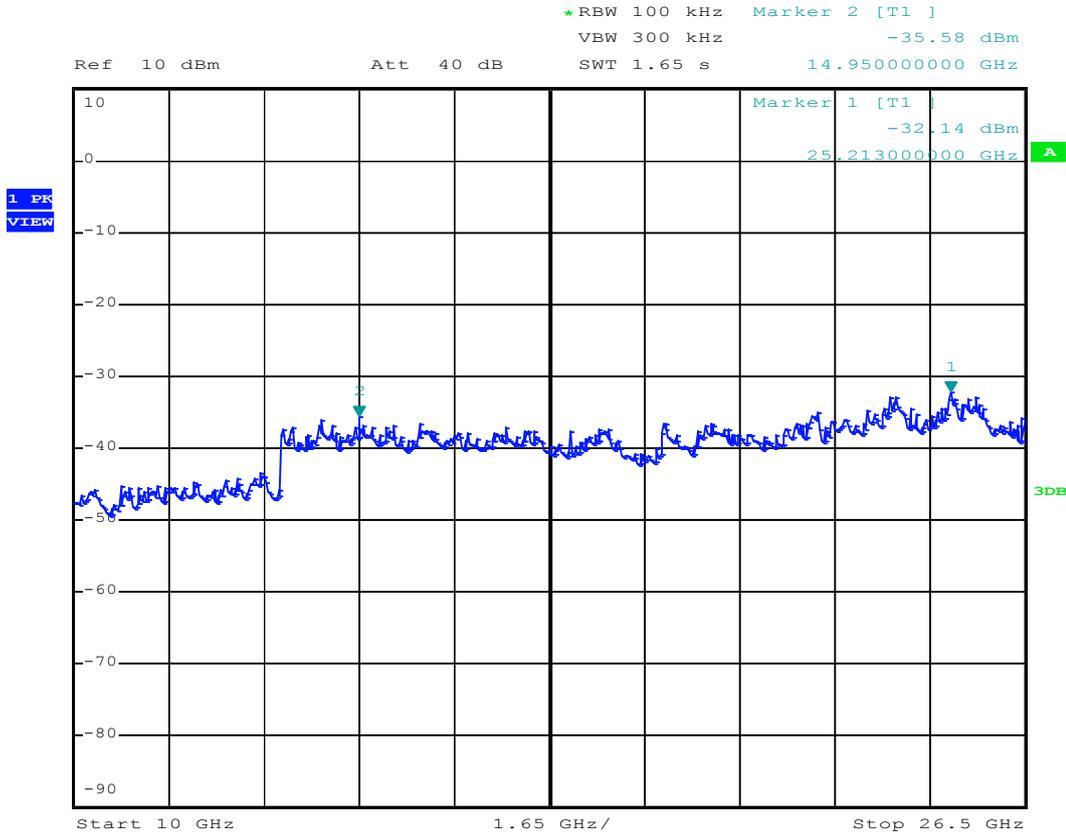

In any 100kHz bandwidth, the Conducted Spurious Emissions from 30 MHz to 25 GHz were greater than 20dB below the peak emission within the band that contains the highest level of the desired power.



Report No.: 140815007GZU-003
Issued: 2014-11-26

4.6 Out of Band Radiated Emissions

For out of band radiated emissions into Non-Restricted Frequency Bands were performed at a 3m separation distance to determine whether these emissions complied with the 20dB attenuation requirement.

- Not required, since all emissions are more than 20dB below fundamental
- See attached data sheet

4.7 Radiated Emissions in Restricted Bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For Peak and Quasi-Peak value: RBW = 1 MHz for $f \geq 1$ GHz, 200 Hz for 9 kHz to 150 kHz 9 kHz for 150 kHz to 30 MHz 120 kHz for 30 MHz to 1GHz VBW \geq RBW Sweep = auto Detector function = peak for $f \geq 1$ GHz, QP for $f < 1$ GHz Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW=10 Hz Sweep = auto Trace = max hold


Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

Test Configuration:

- 1) 30 MHz to 1 GHz emissions:

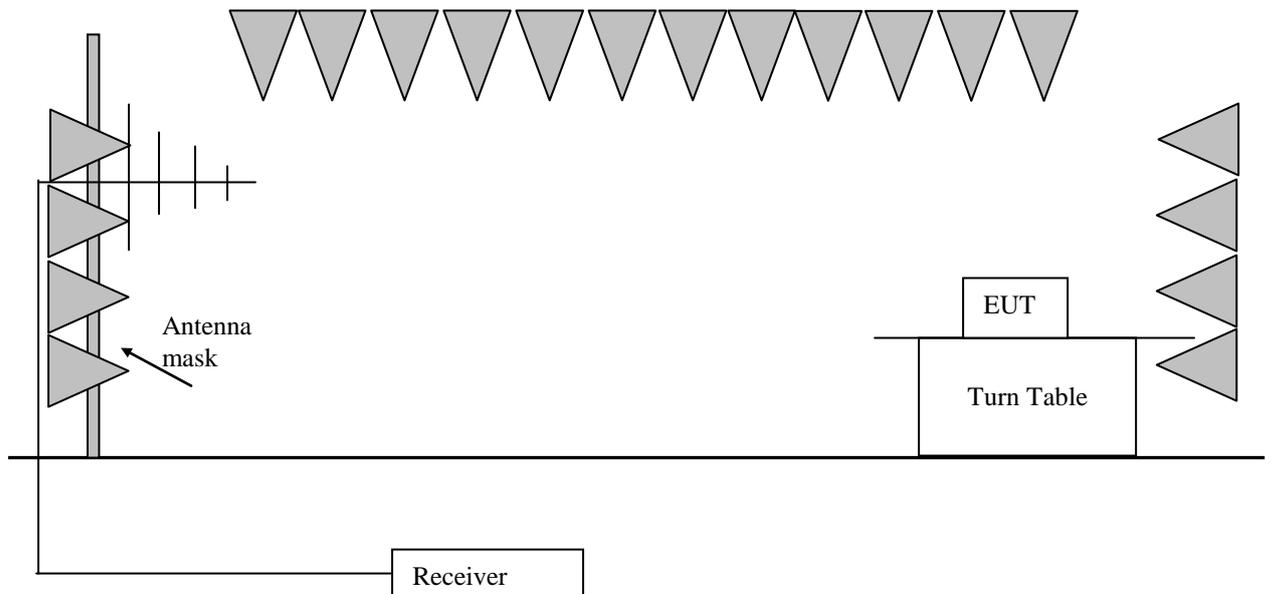

2) 1 GHz to 40 GHz emissions:

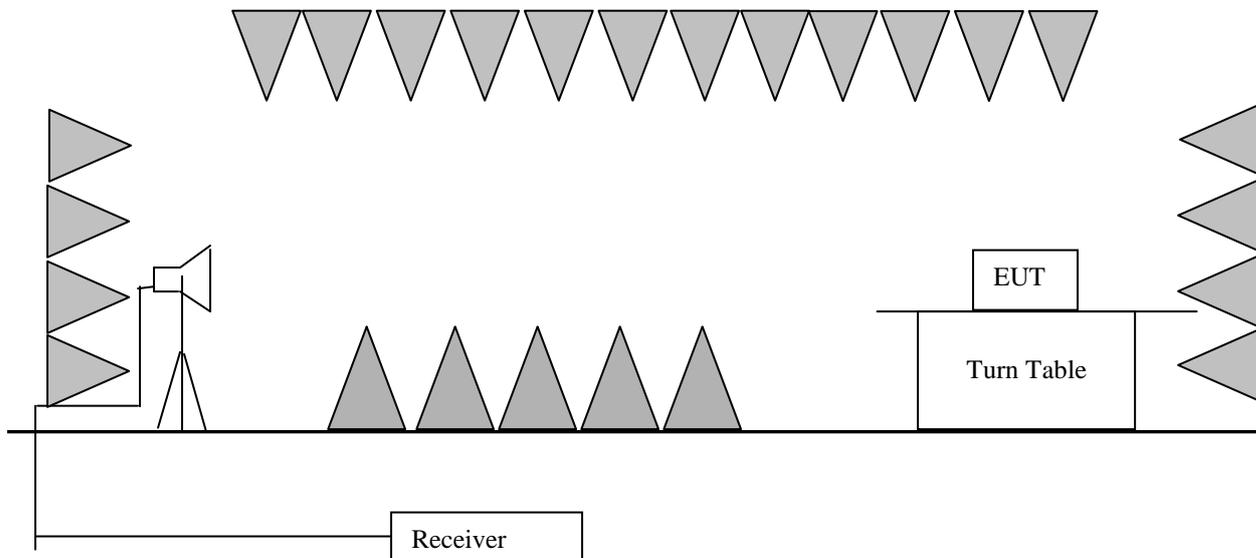

Test Procedure:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

802.11b mode with 11Mbps data rate

9 kHz~30 MHz Field Strength of Unwanted Emissions for Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

Test at Channel 1 (2.412 GHz) in transmitting status.

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement.


Vertical:

Level (dB μ V/m)

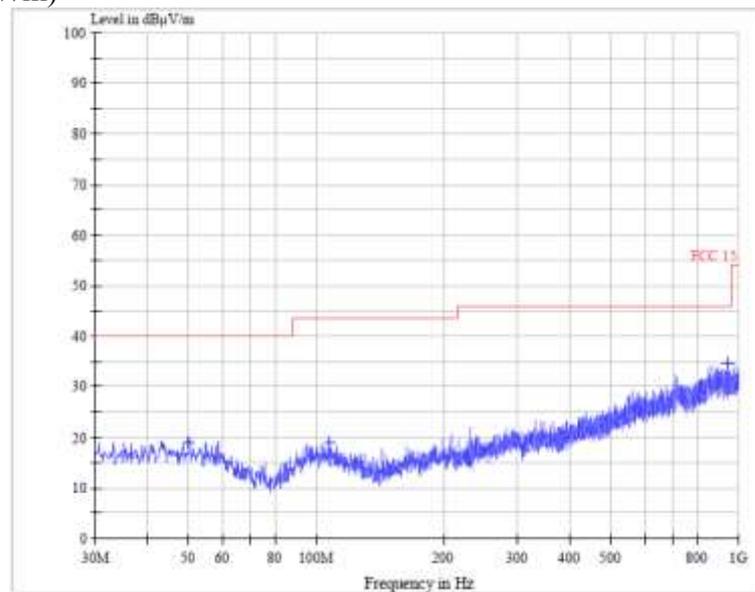

Horizontal:

Level (dB μ V/m)

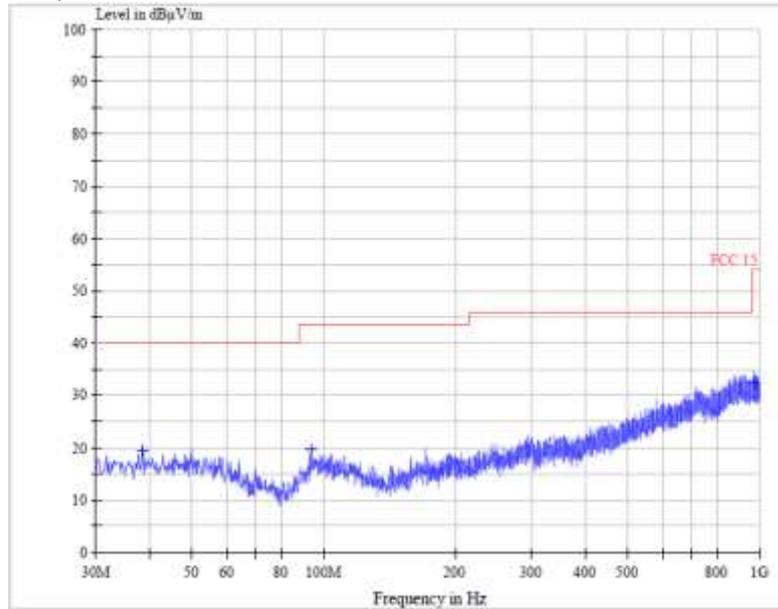

Quasi-peak measurement

Polarization	Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB)	Net at 3m (dB μ V/m)	QP Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	50.000	5.9	13.3	19.2	40.0	-20.8
Horizontal	107.760	7.1	12.0	19.1	43.5	-24.4
Horizontal	943.840	7.7	26.9	34.6	46.0	-11.4
Vertical	38.520	6.0	13.5	19.5	40.0	-20.5
Vertical	93.200	7.9	11.6	19.5	43.5	-24.0
Vertical	968.400	5.4	26.9	32.3	54.0	-21.7



1~25 GHz Radiated Emissions.

PK Measurement:

Frequency (MHz)	PK Reading Level (dB μ V)	Correction factors (dB/m)	PK Emission Level (dB μ V/m)	AV Limit (dB μ V/m)	Antenna polarization
2374.800	55.2	-7.4	47.8	54	V
2380.800	59.4	-7.4	52.0	54	V
2385.600	59.2	-7.3	51.9	54	V
2371.600	55.4	-7.4	48.0	54	H
2380.000	58.6	-7.4	51.2	54	H
2388.400	59.6	-7.3	52.3	54	H

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.


802.11b mode with 11Mbps data rate

Test at Channel 6 (2.437 GHz) in transmitting status

30 MHz~1 GHz Radiated Emissions .Quasi-Peak Measurement

Vertical:

Level (dBμV/m)

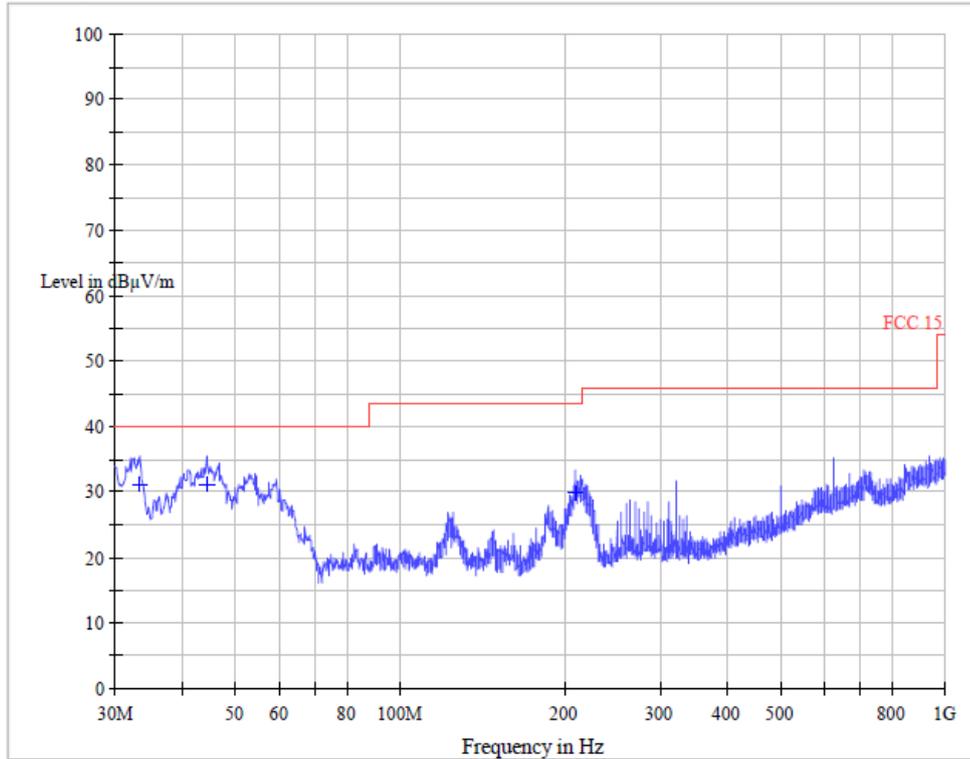


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
33.400000	31.2	120.000	V	12.6	8.8	40.0
44.120000	31.3	120.000	V	13.9	8.7	40.0
209.880000	29.9	120.000	V	11.2	13.6	43.5

Horizontal:

Level (dB μ V/m)

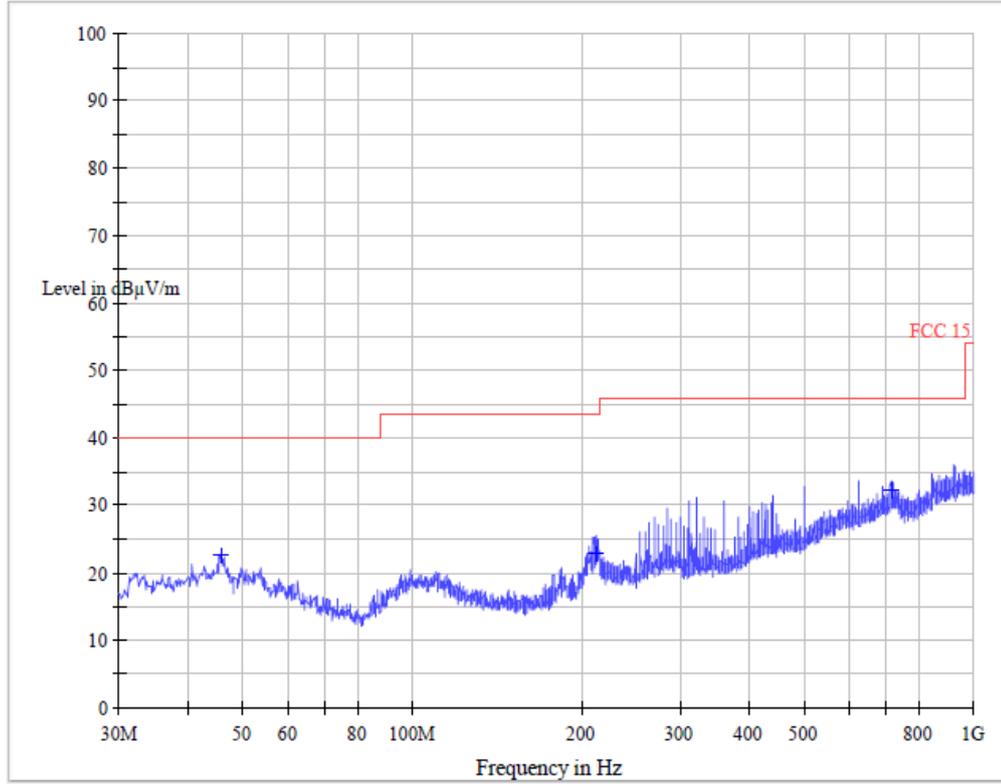

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
45.560000	22.7	120.000	H	14.0	17.3	40.0
212.520000	22.9	120.000	H	11.4	20.6	43.5
711.640000	32.2	120.000	H	23.6	13.8	46.0



1~25 GHz Radiated Emissions.

PK Measurement:

Frequency (MHz)	PK Reading Level (dB μ V)	Correction factors (dB/m)	PK Emission Level (dB μ V/m)	PK Limit (dB μ V/m)	Antenna polarization
4876	39.28	15.63	54.91	74	V
7312	34.21	19.07	53.28	74	V
4874	35.72	15.62	51.34	74	H
7311	35.05	19.07	54.12	74	H

AV Measurement:

Frequency (MHz)	AV Reading Level (dB μ V)	Correction factors (dB/m)	AV Emission Level (dB μ V/m)	AV Limit (dB μ V/m)	Antenna polarization
4876	35.99	15.63	51.62	54	V
7312	-	-	-	54	V
4874	-	-	-	54	H
7311	31.27	19.07	50.34	54	H

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.


802.11b mode with 11Mbps data rate.

Test at Channel 11 (2.462 GHz) in transmitting status.

30 MHz~1 GHz Radiated Emissions .Quasi-Peak Measurement

Vertical:

Level (dB μ V/m)

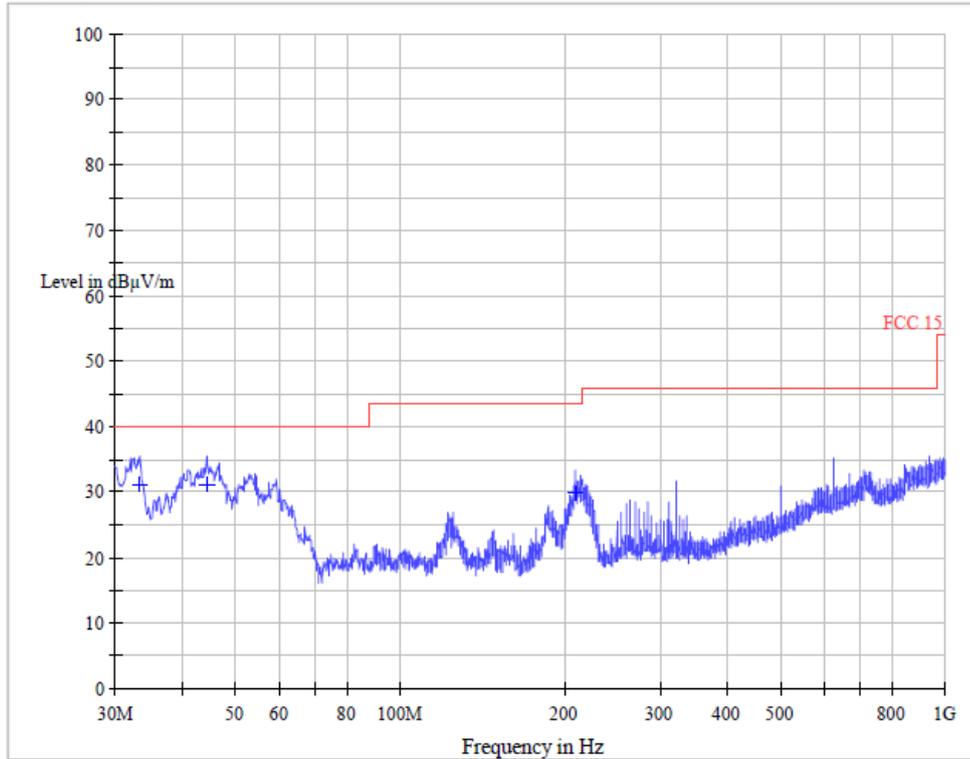


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
33.400000	31.2	120.000	V	12.6	8.8	40.0
44.120000	31.3	120.000	V	13.9	8.7	40.0
209.880000	29.9	120.000	V	11.2	13.6	43.5

Horizontal:

Level (dB μ V/m)

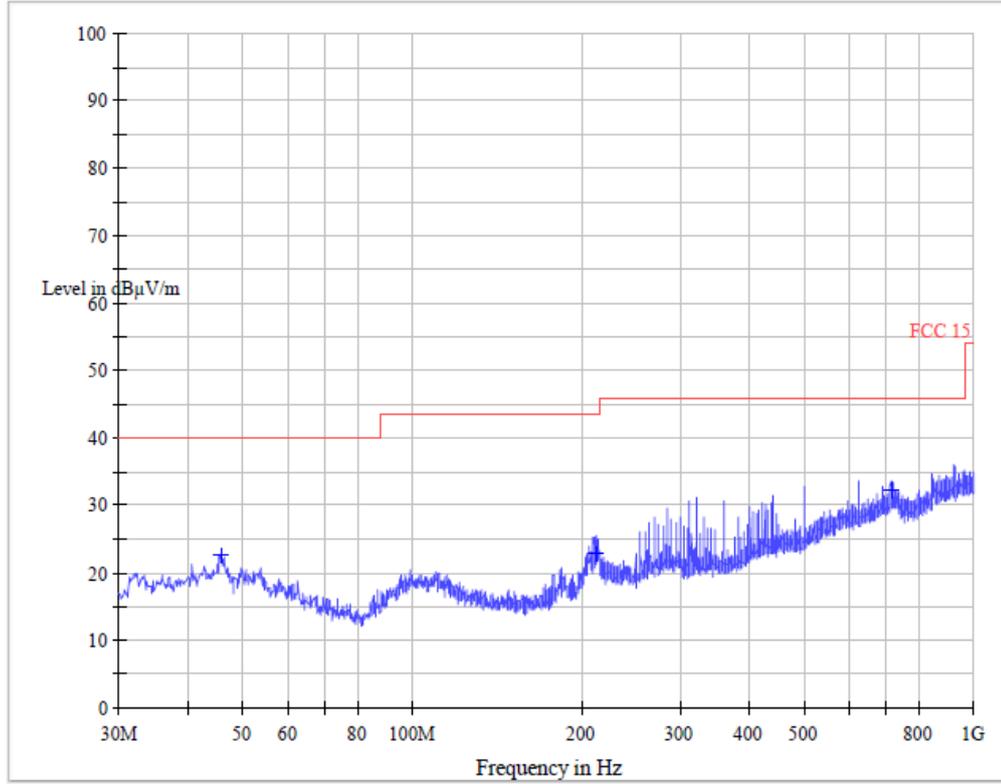

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
45.560000	22.7	120.000	H	14.0	17.3	40.0
212.520000	22.9	120.000	H	11.4	20.6	43.5
711.640000	32.2	120.000	H	23.6	13.8	46.0

1~25 GHz Radiated Emissions.

PK Measurement:

Frequency (MHz)	PK Reading Level (dBμV)	Correction factors (dB/m)	PK Emission Level (dBμV/m)	PK Limit (dBμV/m)	Antenna polarization
2486.000	67.2	-7.0	60.2	74	V
2491.200	61.5	-7.0	54.5	74	V
2487.600	62.1	-7.0	55.1	74	V
2484.400	65.6	-7.0	58.6	74	H
2487.600	64.3	-7.0	57.3	74	H
2490.800	63.5	-7.0	56.5	74	H

AV Measurement:

Frequency (MHz)	AV Reading Level (dBμV)	Correction factors (dB/m)	AV Emission Level (dBμV/m)	AV Limit (dBμV/m)	Antenna polarization
2486.000	50.5	-7.0	43.5	54	V
2491.200	50.3	-7.0	43.3	54	V
2487.600	48.5	-7.0	41.5	54	V
2484.400	52.4	-7.0	45.4	54	H
2487.600	51.3	-7.0	44.3	54	H
2490.800	51.2	-7.0	44.2	54	H

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

No any other emissions level which are attenuated less than 20dB below the limit.

802.11g mode with 54Mbps data rate

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

Test at Channel 1 (2.412 GHz) in transmitting status

30 MHz~1 Radiated Emissions .Quasi-Peak Measurement

Vertical:

Level (dB μ V/m)

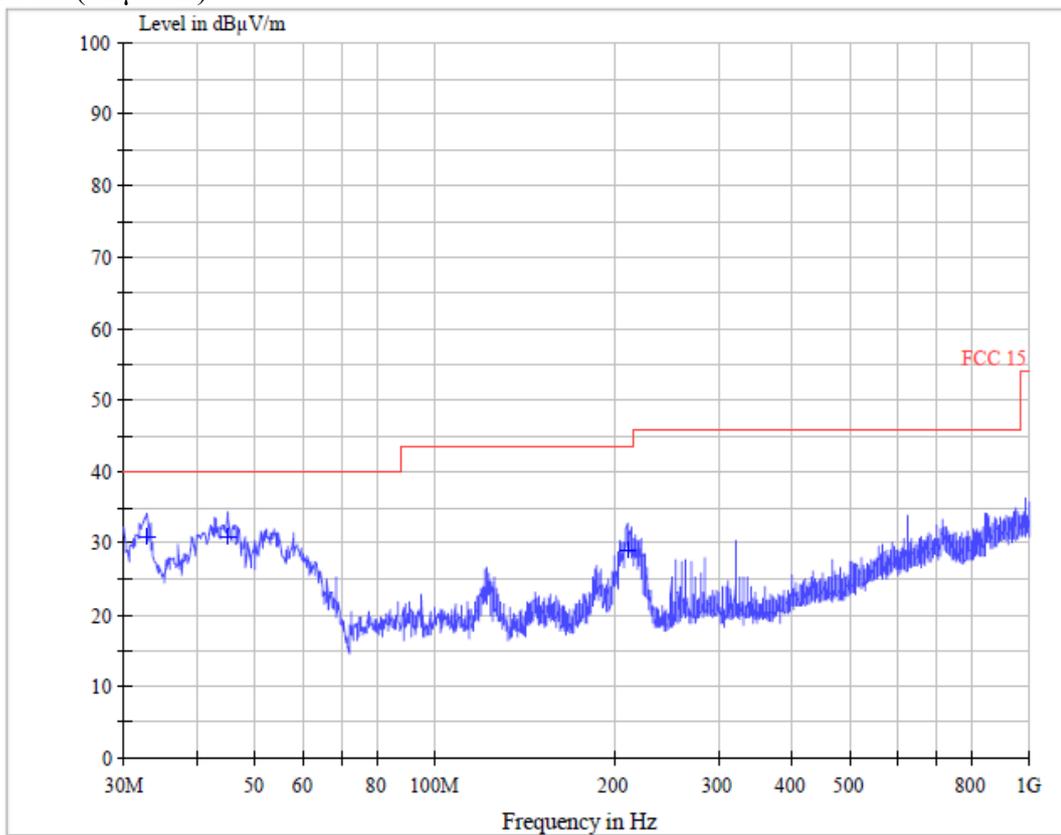


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
32.800000	31.0	120.000	V	12.4	9.0	40.0
44.840000	31.0	120.000	V	13.9	9.0	40.0
210.480000	28.9	120.000	V	11.3	14.6	43.5

Horizontal:

Level (dB μ V/m)

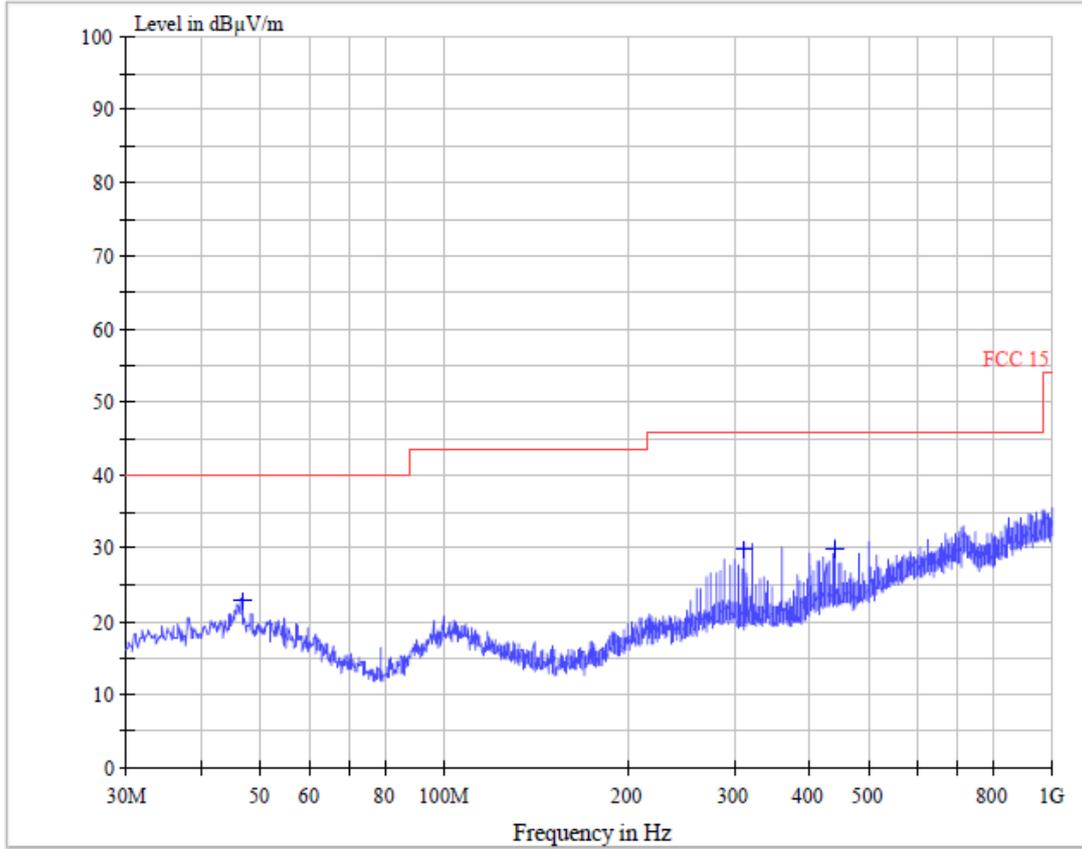

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
46.480000	22.8	120.000	H	13.9	17.2	40.0
312.480000	29.9	120.000	H	16.3	16.1	46.0
440.040000	29.9	120.000	H	18.6	16.1	46.0



1~25 GHz Radiated Emissions. Peak & Average Measurement

PK Measurement:

Frequency (MHz)	PK Reading Level (dB μ V)	Correction factors (dB/m)	PK Emission Level (dB μ V/m)	AV Limit (dB μ V/m)	Antenna polarization
2382.800	51.9	-7.3	44.6	54	V
2385.600	52.3	-7.3	45.0	54	V
2389.600	56.5	-7.3	49.2	54	V
2348.400	52.1	-7.5	44.6	54	H
2385.200	52.4	-7.3	45.1	54	H
2389.200	57.5	-7.3	50.2	54	H

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.


802.11g mode with 54Mbps data rate

Test at Channel 6 (2.437GHz) in transmitting status

30 MHz~1 GHz Radiated Emissions .Quasi-Peak Measurement

Vertical:

Level (dB μ V/m)

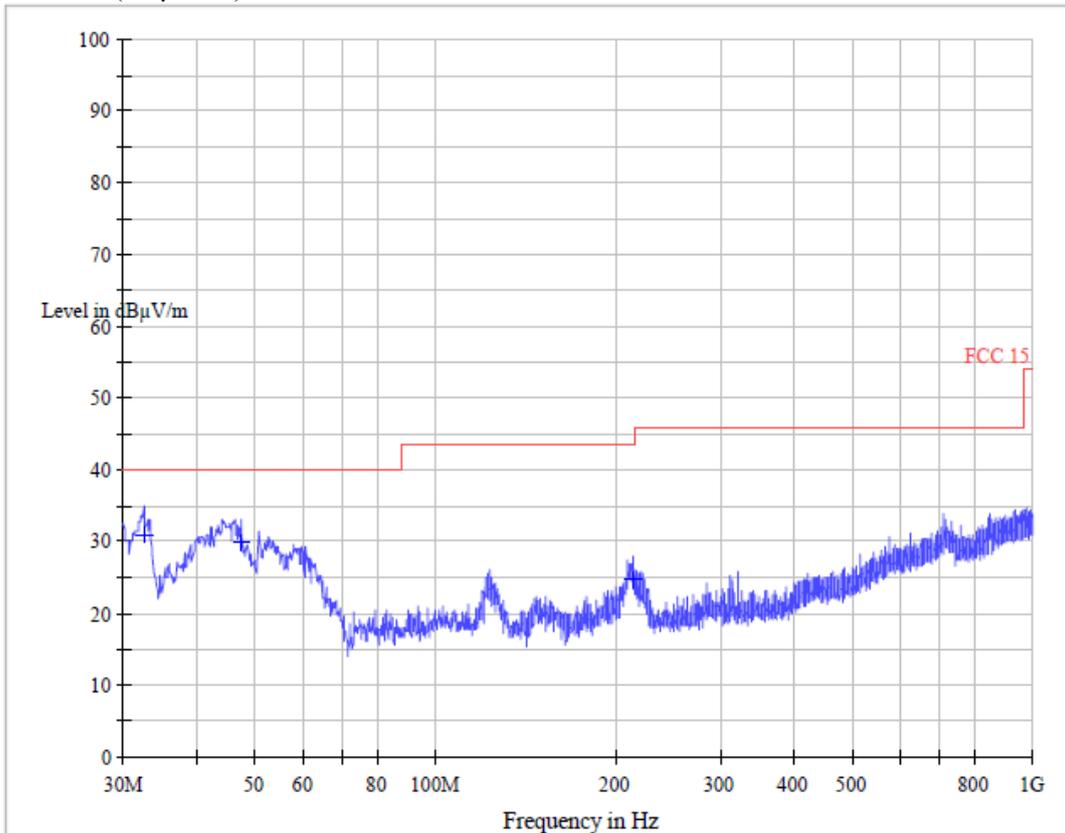


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
32.480000	30.9	120.000	V	12.3	9.1	40.0
47.360000	29.9	120.000	V	13.7	10.1	40.0
214.440000	24.6	120.000	V	11.6	18.9	43.5

Horizontal:

Level (dB μ V/m)

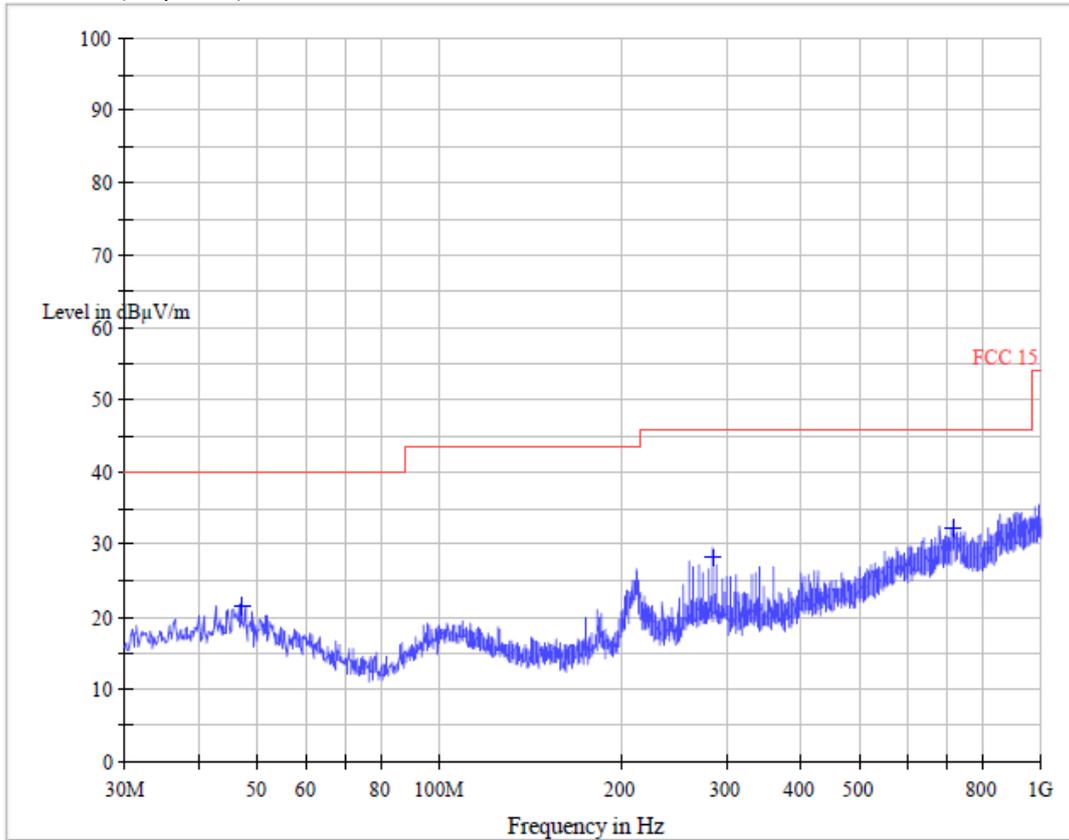

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
46.920000	21.4	120.000	H	13.8	18.6	40.0
285.000000	28.3	120.000	H	15.4	17.7	46.0
714.880000	32.2	120.000	H	23.6	13.8	46.0



1~25 GHz Radiated Emissions. Peak & Average Measurement

PK Measurement:

Frequency (MHz)	PK Reading Level (dB μ V)	Correction factors (dB/m)	PK Emission Level (dB μ V/m)	PK Limit (dB μ V/m)	Antenna polarization
4874	35.8	15.6	51.4	74	V
4874	35.0	15.6	50.6	74	H

AV Measurement:

Frequency (MHz)	AV Reading Level (dB μ V)	Correction factors (dB/m)	AV Emission Level (dB μ V/m)	AV Limit (dB μ V/m)	Antenna polarization
4874	-	-	-	54	V
4874	-	-	-	54	H

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.


802.11g mode with 54Mbps data rate

Test at Channel 11 (2.462 GHz) in transmitting status

30 MHz~1 GHz Radiated Emissions .Quasi-Peak Measurement

Vertical:

Level (dBμV/m)

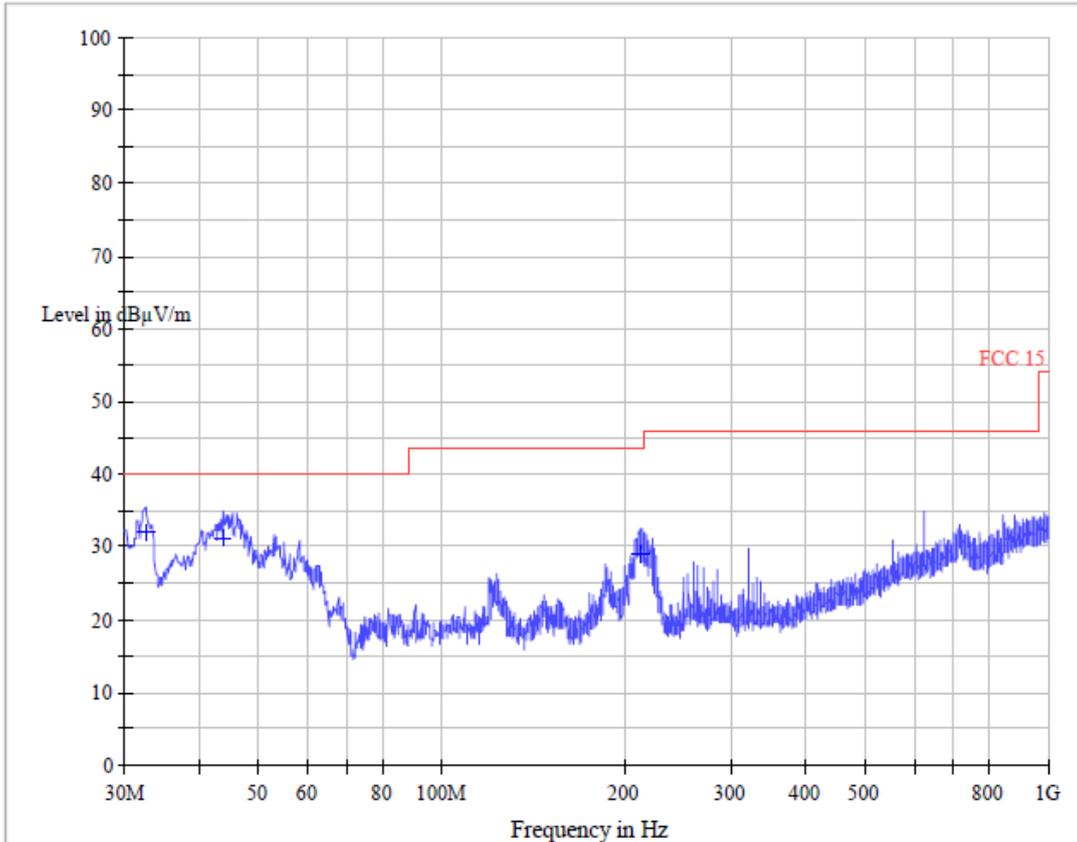


Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
32.480000	32.0	120.000	V	12.3	8.0	40.0
43.680000	31.1	120.000	V	13.8	8.9	40.0
213.280000	29.1	120.000	V	11.5	14.4	43.5

Horizontal:

Level (dB μ V/m)

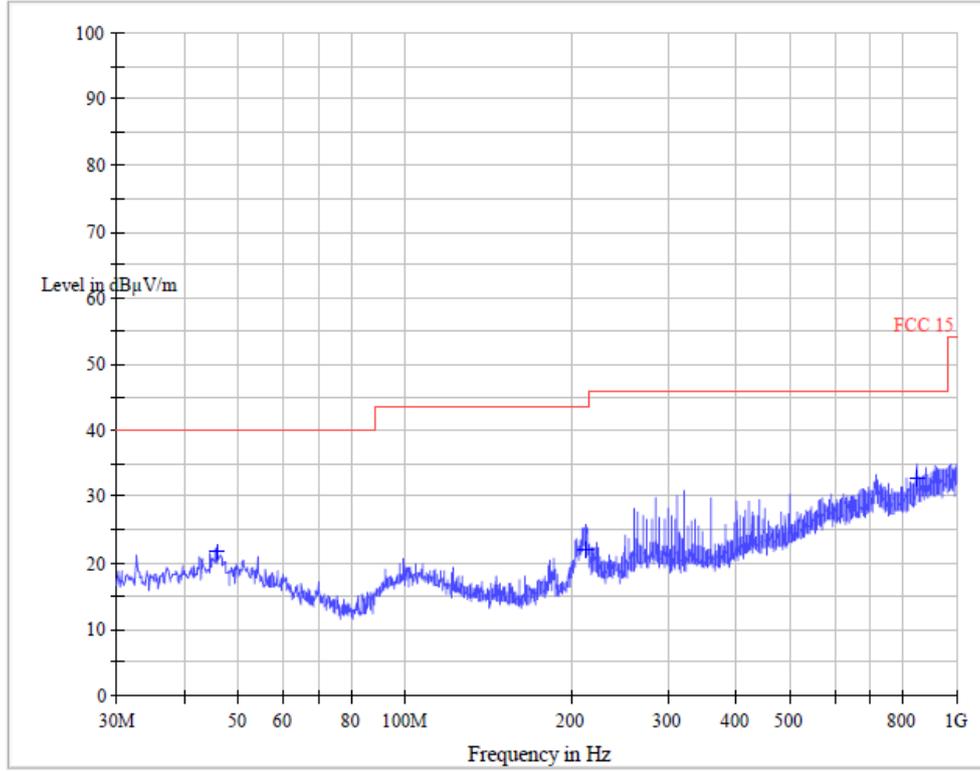

Quasi-peak measurement

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
45.440000	21.7	120.000	H	14.0	18.3	40.0
213.280000	22.0	120.000	H	11.5	21.5	43.5
845.240000	32.8	120.000	H	25.3	13.2	46.0



1~25 GHz Radiated Emissions. Peak & Average Measurement

PK Measurement:

Frequency (MHz)	PK Reading Level (dBμV)	Correction factors (dB/m)	PK Emission Level (dBμV/m)	AV Limit (dBμV/m)	Antenna polarization
2369.200	45.7	-7.4	38.3	54	V
2488.800	44.8	-7.0	37.8	54	V
2498.000	45.5	-6.9	38.6	54	V
2351.200	49.4	-7.5	41.9	54	H
2484.400	54.8	-7.4	47.4	54	H
2496.000	48.5	-6.9	41.6	54	H

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.


The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

4.8 Band Edges Requirement

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10: Clause 6.9.2
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	For Band Edges Emission in Radiated mode, Please refer to clause 4.7

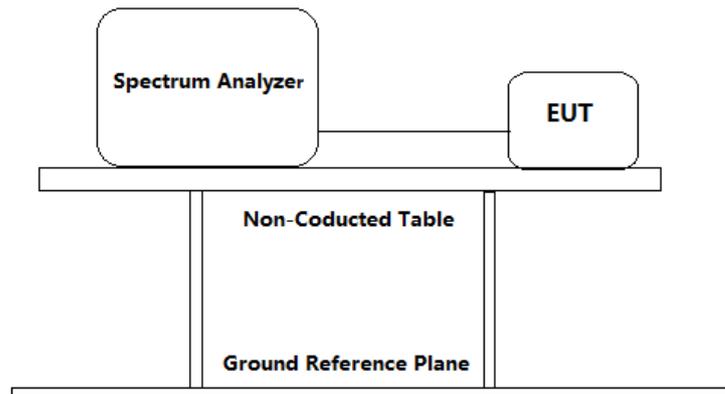

Test Procedure: For Band Edges Emission in Radiated mode, Please refer to clause 4.7

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 kHz bandwidth from band edge (minimum 50 MHz).
3. Repeat until all the test status is investigated.
4. Report the worst case.

Test result with plots as follows:

For conduct mode:

The band edges was measured and recorded Result:


The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.


Result plots as follows:

802.11b mode with 11 Mbps data rate


Channel1: 2.412 GHz

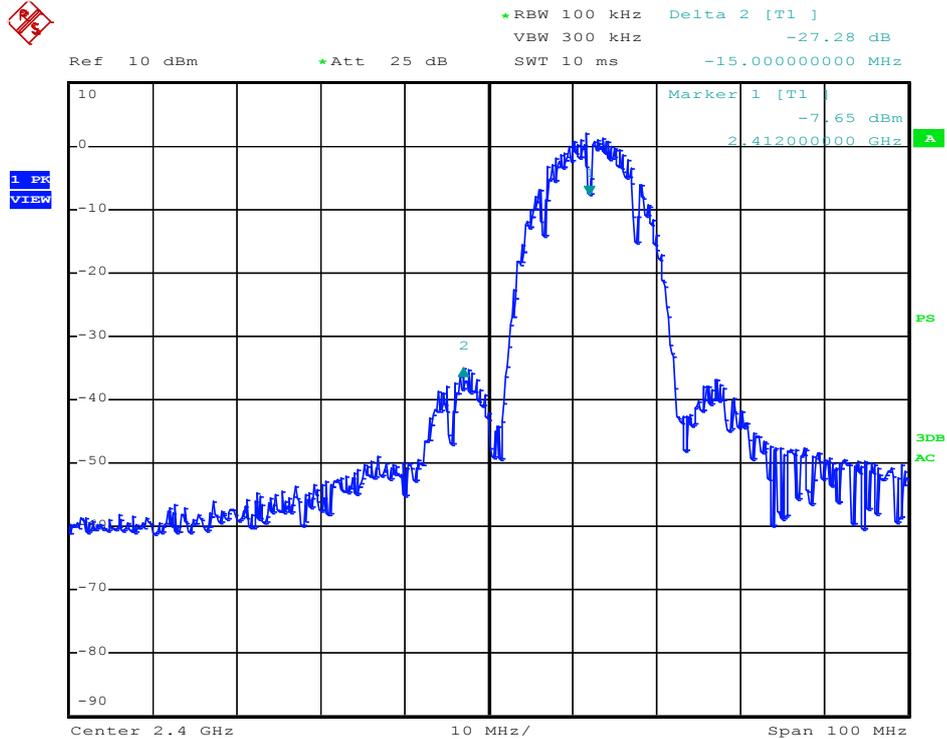


Channel 11: 2.462 GHz

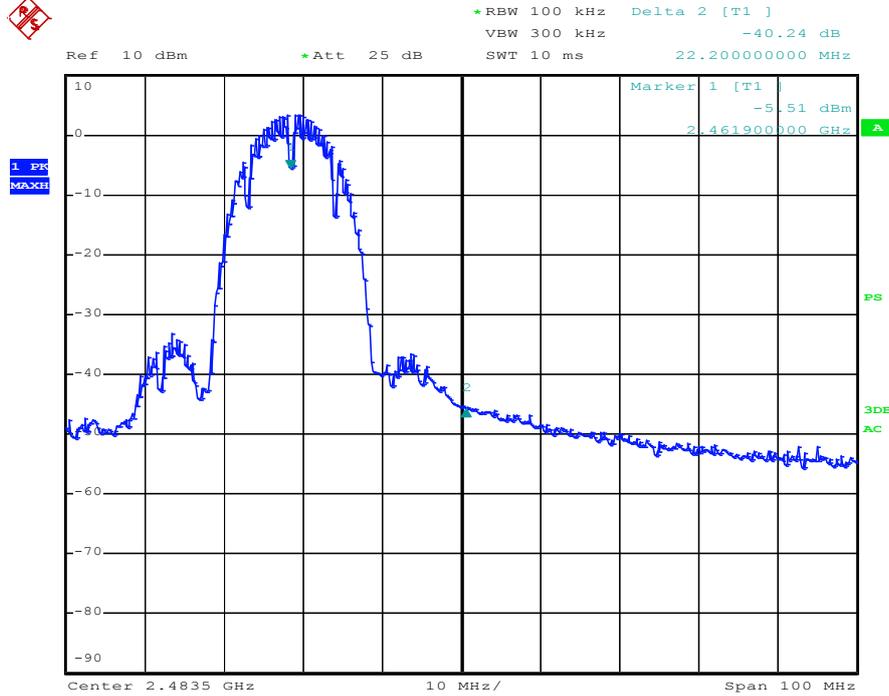

802.11g mode with 54 Mbps data rate
Channel 1: 2.412 GHz

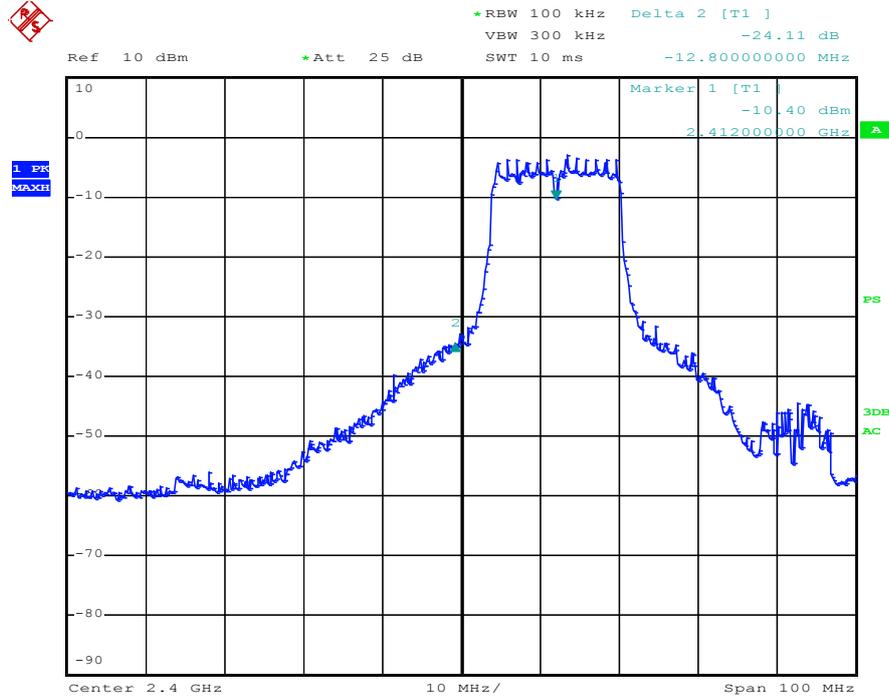


Channel 11: 2.462 GHz

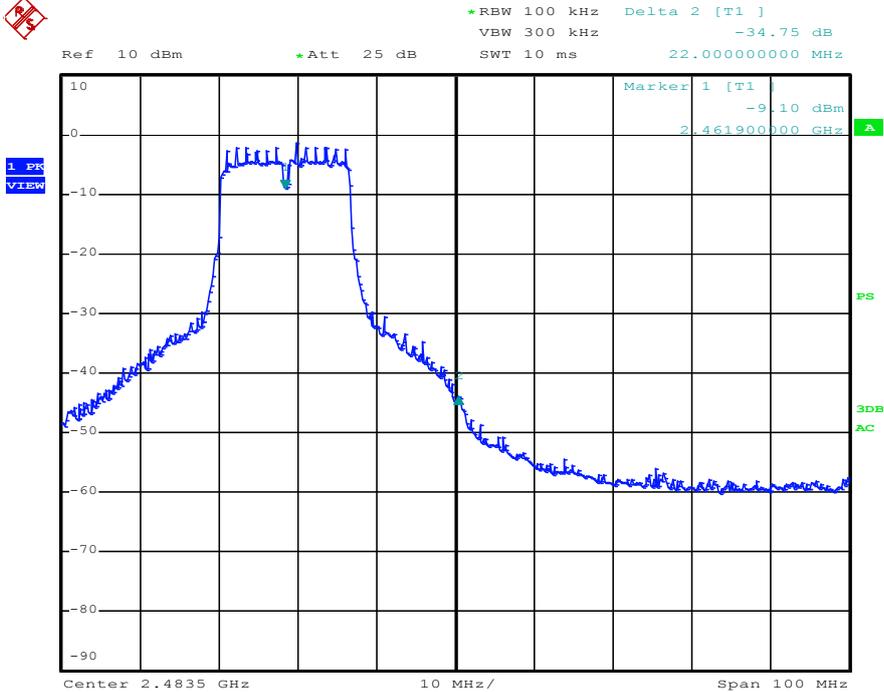

4.9 Conducted Emission Test

Test Configuration:

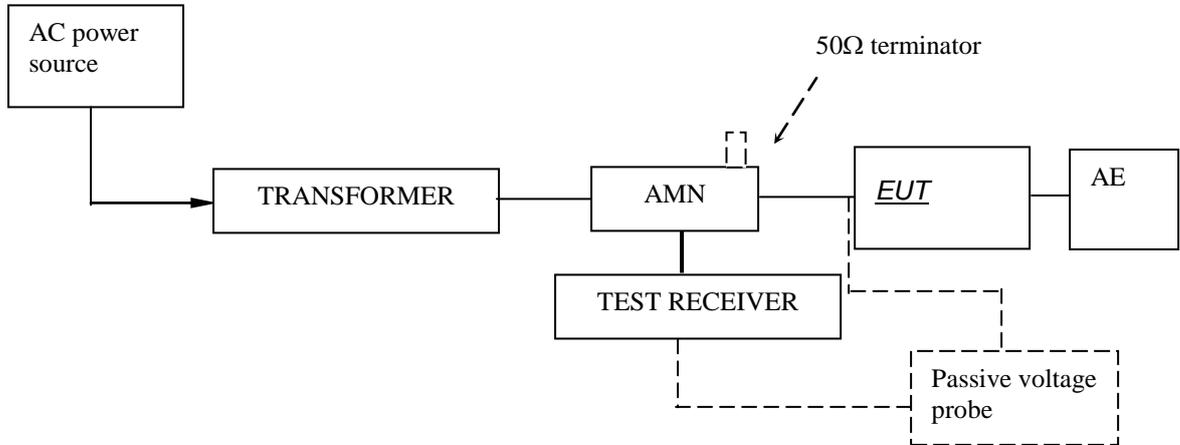

Test Setup and Procedure

Test was performed according to ANSI C63.10 Clause 6.2. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.


The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.


The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

Pre-test in the highest, middle and lowest frequencies with different data rates and modulations, and found the worst case in 802.11b, 11Mbps, 2412MHz, test curve as below:

Tested Wire: Live

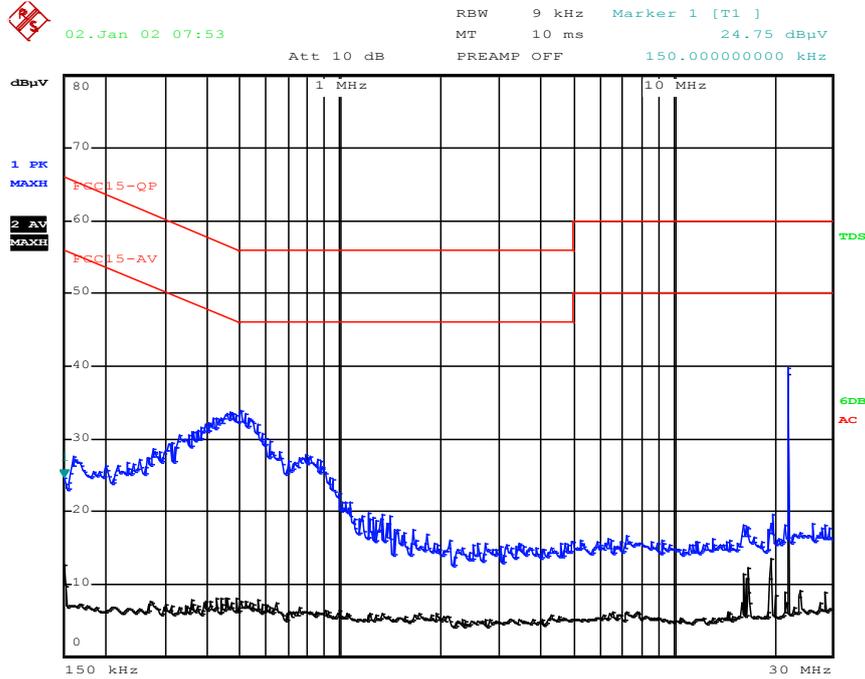

Tested Wire: Neutral

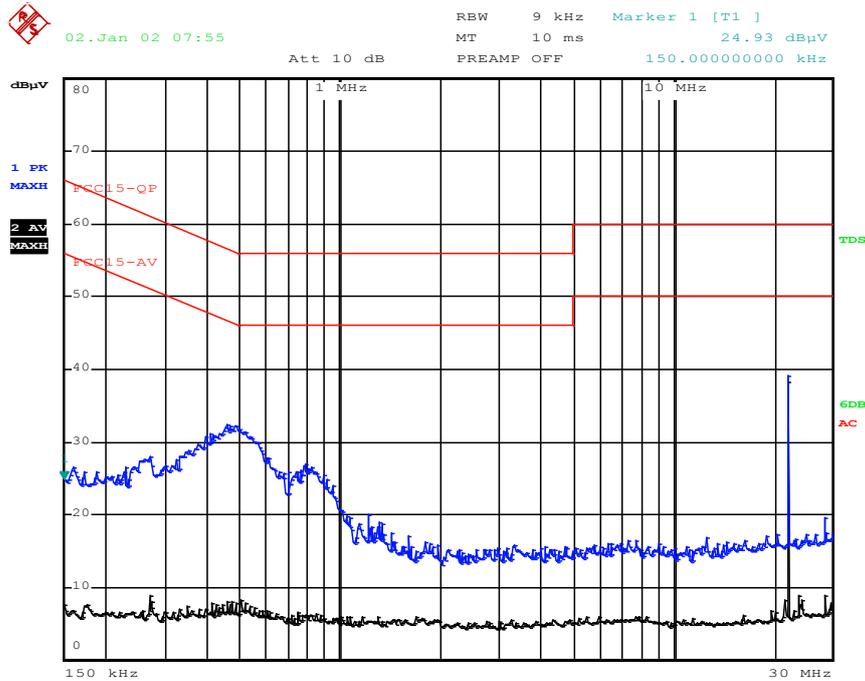



Report No.: 140815007GZU-003
Issued: 2014-11-26

5.0 Test Equipment List

Radiated Emission Equipment List

Equip. No.	Equipment	Model	Manufacturer	Cal. Date	Due Date
EM030-01	3m Semi-Anechoic Chamber	9x6x6 m3	ETS•LINDGREN	07 Jul. 2014	07 Jul. 2015
EM030-02	Control room for 3m Semi-Anechoic Chamber	4x4x3 m3	ETS•LINDGREN	28 Jun. 2014	28 Jun. 2015
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	28 Nov. 2014	28 Nov. 2015
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZBECK	07 Jul. 2014	07 Jul. 2015
EM031-02-01	Coaxial cable	/	R&S	07 Jul. 2014	07 Jul. 2015
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	07 Jul. 2014	07 Jul. 2015
EM033-02	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)	R&S HF907	R&S	11 Jul. 2014	11 Jul. 2015
EM033-02-02	Coaxial cable	/	R&S	07 Jul. 2014	07 Jul. 2015
EM022-03	2.45 GHz Filter	BRM 50702	Micro-Tronics	07 Jul. 2014	07 Jul. 2015

Conducted emission at the mains terminals test

Equipment No.	Equipment	Model	Manufacturer	Cal. Date	Due Date
EM080-05	EMI receiver	ESCI	R&S	07 Jul 2014	07 Jul 2015
EM006-05	LISN	ENV216	R&S	02 Jul 2014	02 Jul 2015
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	02 Jul 2014	02 Jul 2015