



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2315-1, XT2315-4, XT2315-5
FCC ID : IHDT56AL2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Dec. 05, 2022 ~ Dec. 25, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Specification of Accessory.....	6
1.6 Modification of EUT	6
1.7 Testing Location	6
1.8 Test Software.....	7
1.9 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement.....	14
3.4 20dB and 99% Bandwidth Measurement	15
3.5 Output Power Measurement.....	16
3.6 Conducted Band Edges Measurement.....	18
3.7 Conducted Spurious Emission Measurement	19
3.8 Radiated Band Edges and Spurious Emission Measurement	20
3.9 AC Conducted Emission Measurement.....	24
3.10 Antenna Requirements.....	26
4 LIST OF MEASURING EQUIPMENT.....	27
5 UNCERTAINTY OF EVALUATION.....	28
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2N2910A	Rev. 01	Initial issue of report	Jan. 20, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 12.26 dB at 958.29 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.94 dB at 0.62 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2315-1, XT2315-4, XT2315-5
FCC ID	IHDT56AL2
IMEI Code	Conducted: 359709930025070/359709930025534 Conduction: 359709930026250/359709930026268 Radiation: 359709930024958
HW Version	DVT2
SW Version	T1TGN33.33
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The three model name XT2315-1, XT2315-4, XT2315-5 are the same product except model name different for market segment.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 11.90 dBm (0.0155 W) Bluetooth EDR (2Mbps) : 9.20 dBm (0.0083 W) Bluetooth EDR (3Mbps) : 9.40 dBm (0.0087 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.860 MHz Bluetooth EDR (2Mbps) : 1.172 MHz Bluetooth EDR (3Mbps) : 1.175 MHz
Antenna Type / Gain	ILA Antenna with gain -5.5 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 4	Brand Name	Motorola(Salcomp)	Model Name	MC-101
Battery 1	Brand Name	Motorola(ATL)	Model Name	PG50
Battery 2	Brand Name	Motorola(SCUD)	Model Name	PG50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D22297
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D22298
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18D22299

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04SZ	CN1256	421272



1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + Adaptor 1 + USB Cable 1 + Battery 1 + Earphone		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adapter 1, Earphone and USB Cable 1.			

2.3 Connection Diagram of Test System

AC Conducted Emission:

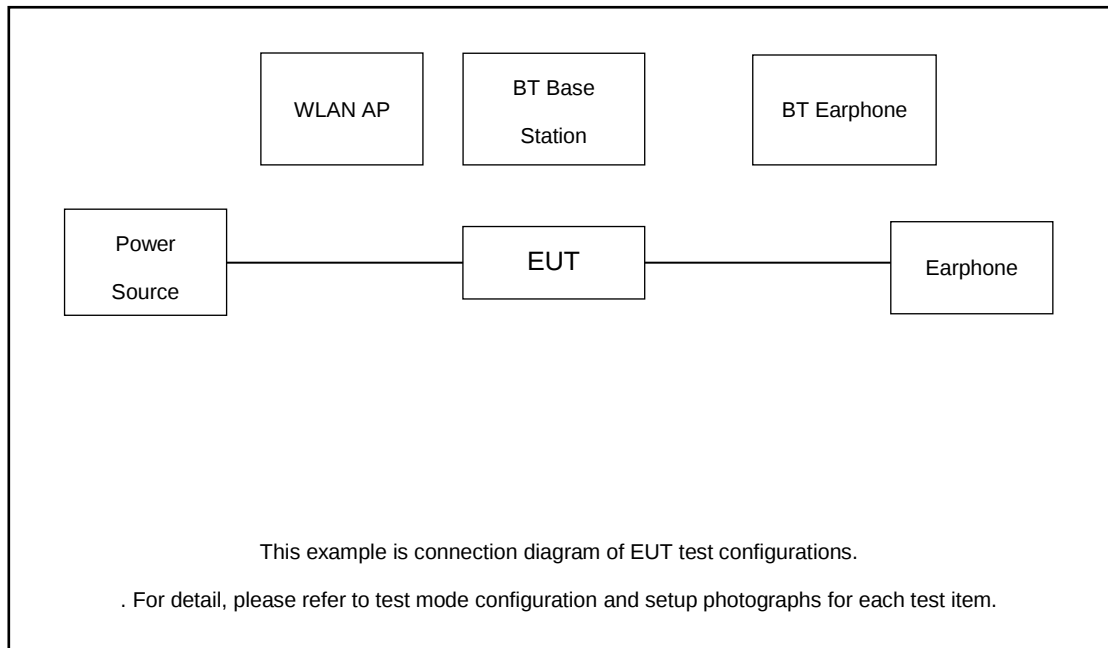

Radiated Emission:

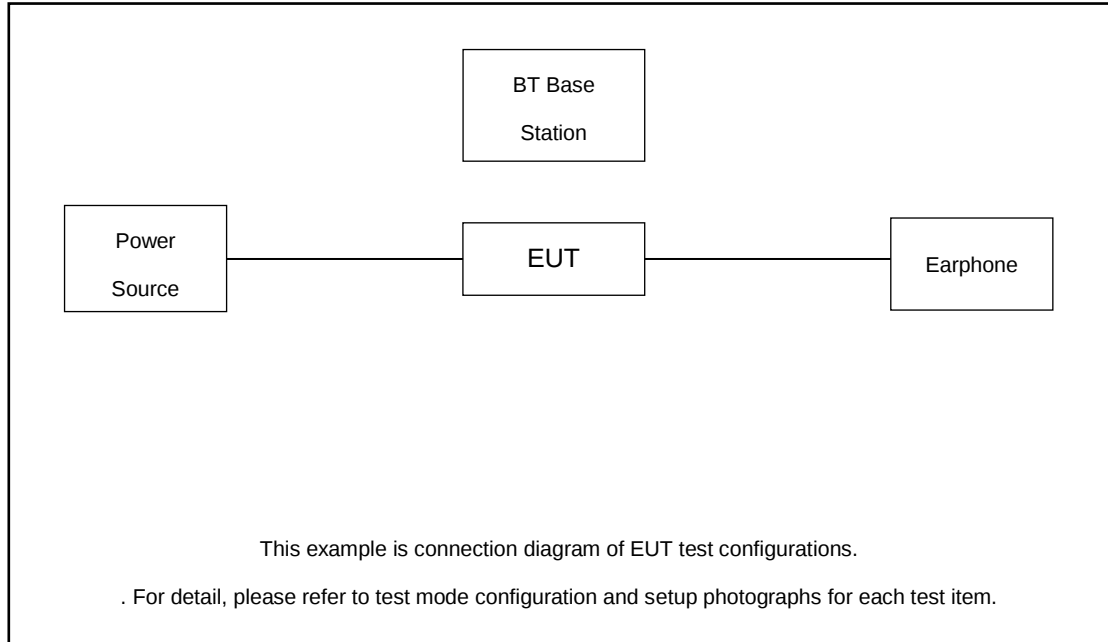

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Earphone	apple	DCAY1V-A900FZJW3-000	N/A	N/A	N/A
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.50 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.50 + 10 = 11.50 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup



3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

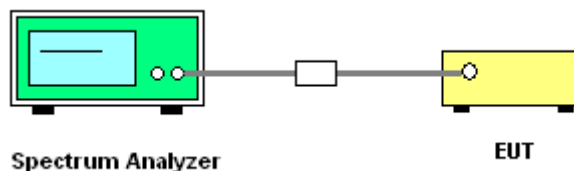

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup



3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

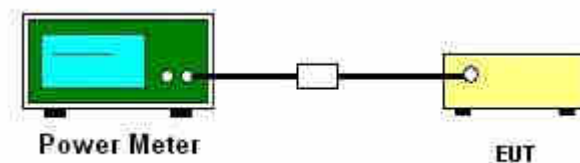

**3.5.5 Test Result of Peak Output Power**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH5	0	1	11.80	20.97	Pass
	39	1	11.50	20.97	Pass
	78	1	11.90	20.97	Pass
2DH5	0	1	9.10	20.97	Pass
	39	1	8.30	20.97	Pass
	78	1	9.20	20.97	Pass
3DH1	0	1	9.30	20.97	Pass
	39	1	8.80	20.97	Pass
	78	1	9.40	20.97	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH5	0	1	11.40	1.16
	39	1	11.00	1.16
	78	1	11.50	1.16
2DH5	0	1	6.70	1.14
	39	1	6.10	1.14
	78	1	6.90	1.14
3DH5	0	1	6.80	1.14
	39	1	6.20	1.14
	78	1	7.00	1.14

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

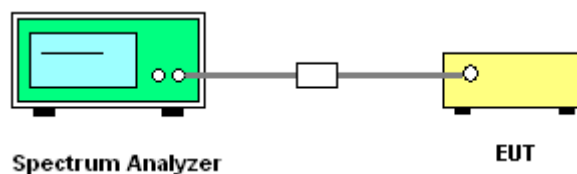

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

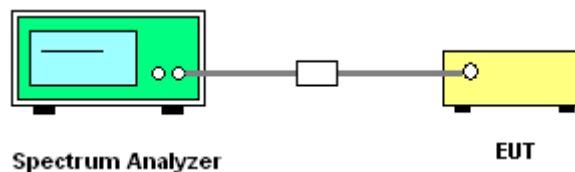

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

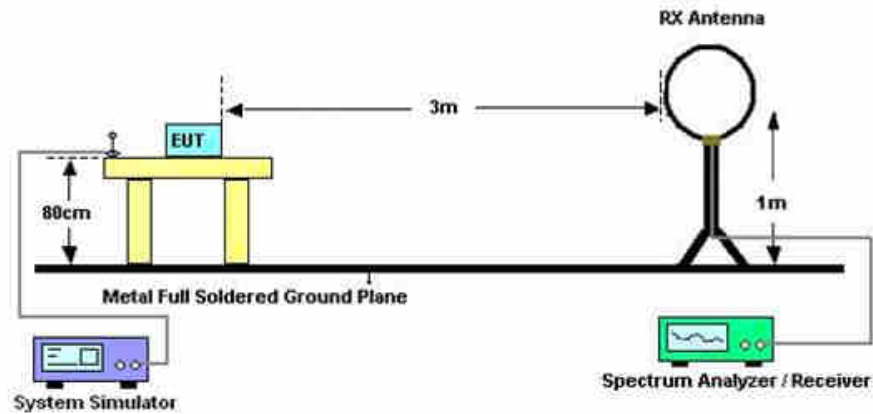

For radiated emissions from 30MHz to 1GHz

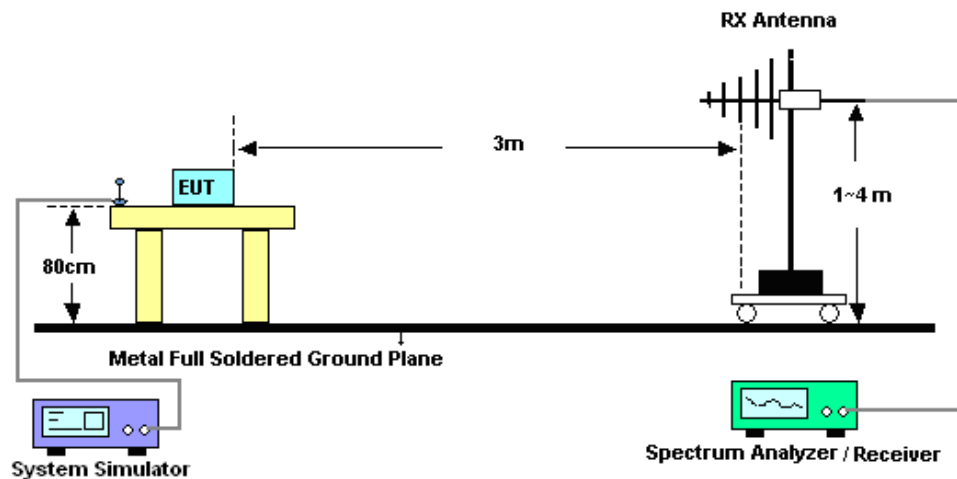

For radiated emissions above 1GHz

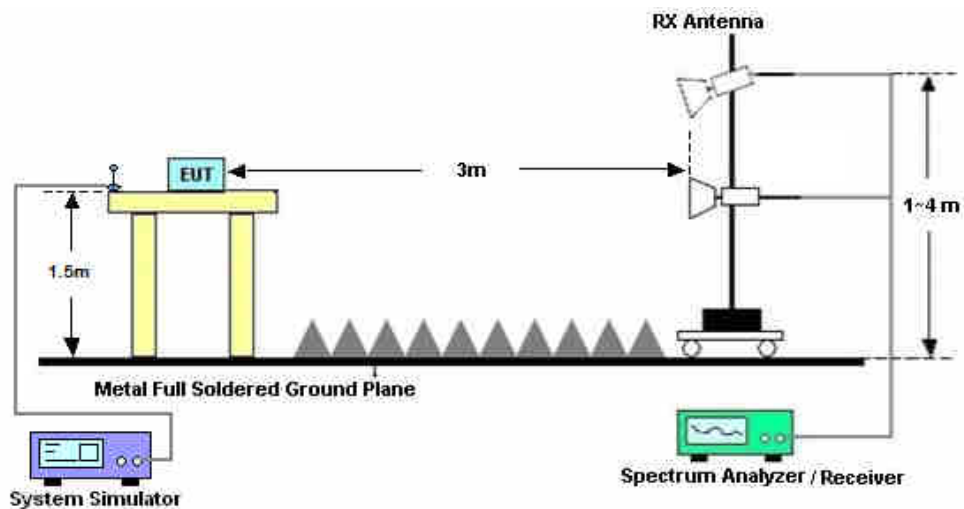



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

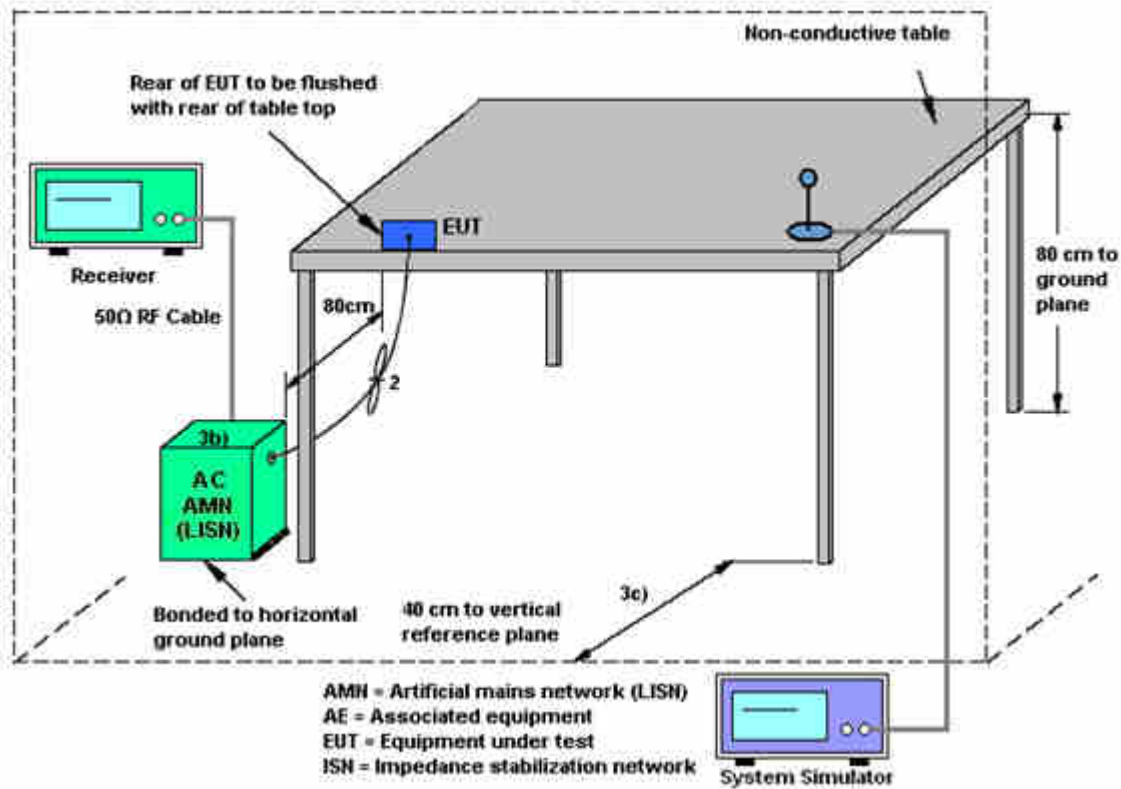

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Dec. 05, 2022	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Dec. 05, 2022	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 19, 2022	Dec. 25, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Dec. 25, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Dec. 25, 2022	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Apr. 27, 2022	Dec. 25, 2022	Apr. 27, 2023	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2022	Dec. 25, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Dec. 25, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	Dec. 25, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Dec. 25, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	Dec. 25, 2022	Jul. 05, 2023	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Sep. 30, 2022	Dec. 25, 2022	Sep. 29, 2023	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Nov. 10, 2022	Dec. 25, 2022	Nov. 10, 2023	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 25, 2022	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 25, 2022	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Dec. 10, 2022~Dec 14 2022	Apr. 08, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Dec. 10, 2022~Dec 14 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Dec. 10, 2022~Dec 14 2022	Dec. 27, 2022	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.012 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

**Ambient Condition:** 24~260 °C, 45~55 %RH**According Standard:** ■Part15C**Test Date:** 2022/12/10~2022/12/14**Test Engineer:** Tang ZhaoYang


20dB Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant3	2402	0.95	2401.53	2402.48	---	---
		2441	0.95	2440.53	2441.48	---	---
		2480	0.95	2479.53	2480.48	---	---
2DH5	Ant3	2402	1.29	2401.36	2402.65	---	---
		2441	1.29	2440.36	2441.65	---	---
		2480	1.30	2479.36	2480.65	---	---
3DH5	Ant3	2402	1.30	2401.35	2402.65	---	---
		2441	1.30	2440.35	2441.65	---	---
		2480	1.30	2479.35	2480.65	---	---




Test Graphs

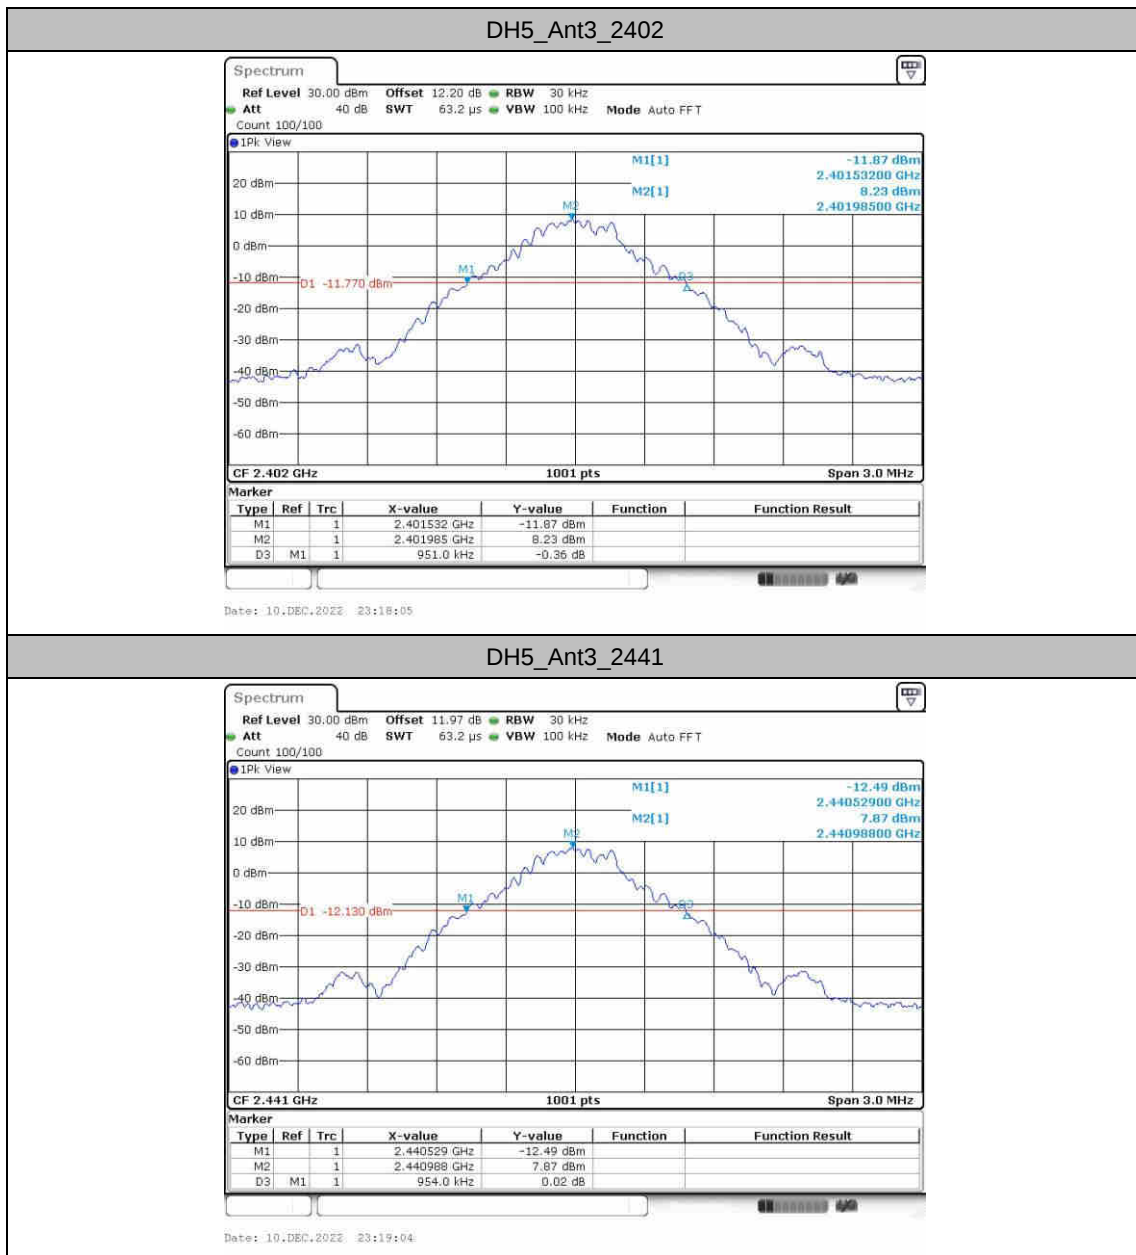




DH5_Ant3_2480

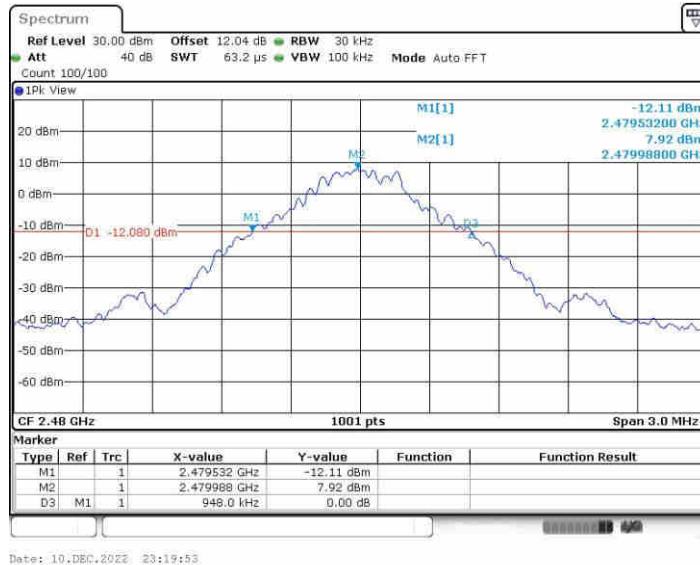


2DH5_Ant3_2402

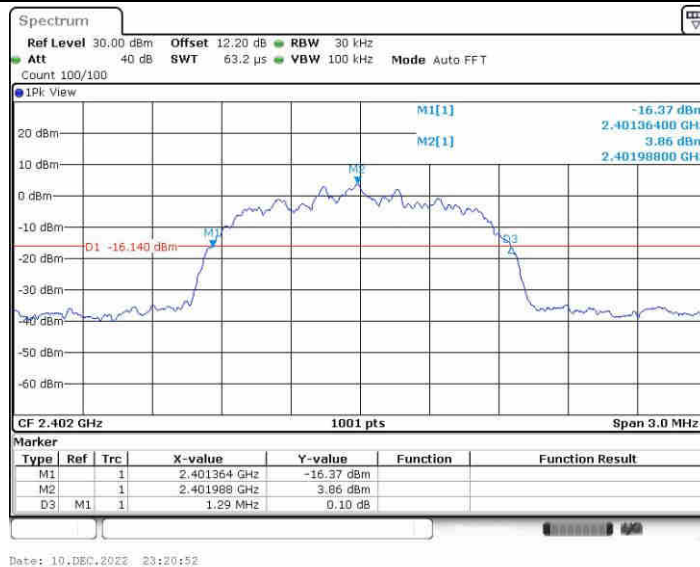




2DH5_Ant3_2441

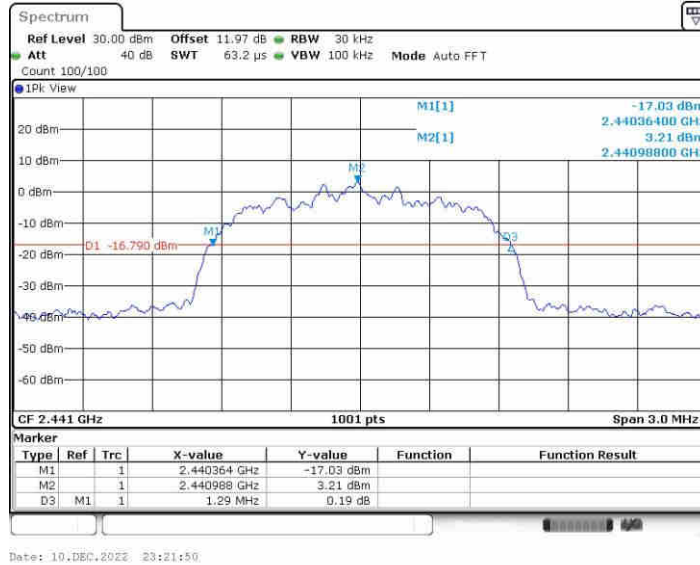


2DH5_Ant3_2480

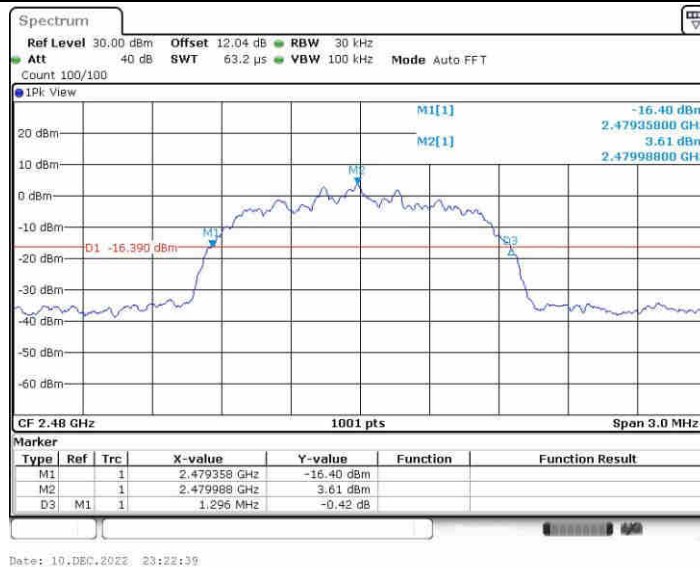





3DH5_Ant3_2402

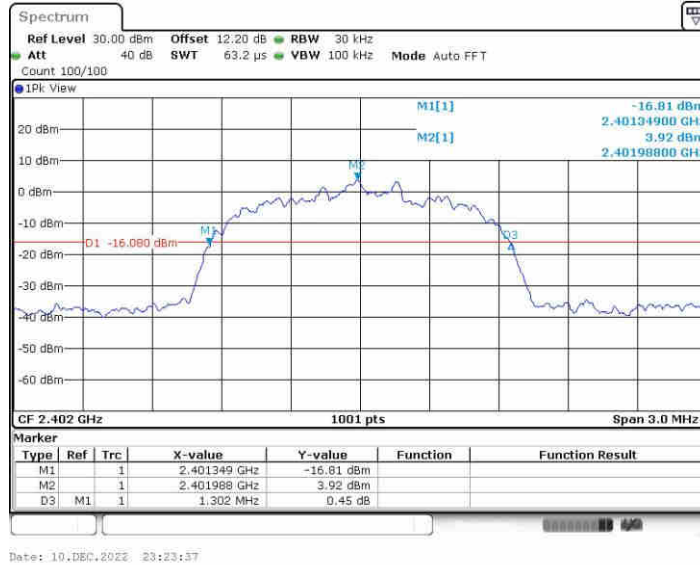

3DH5_Ant3_2441

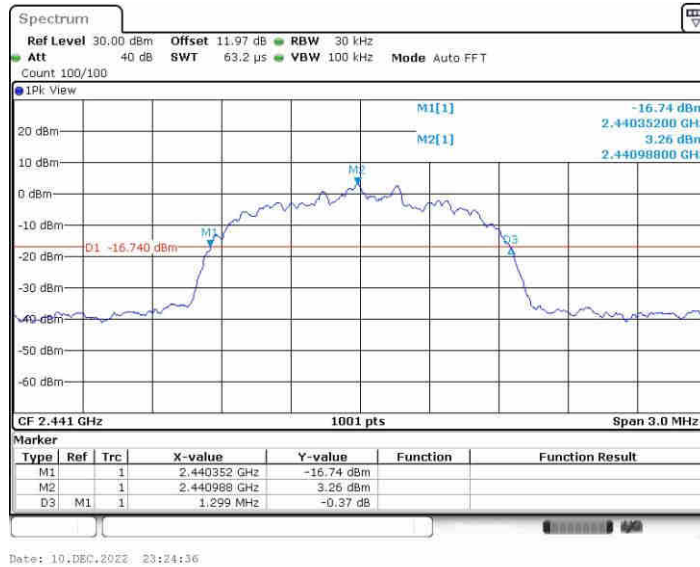

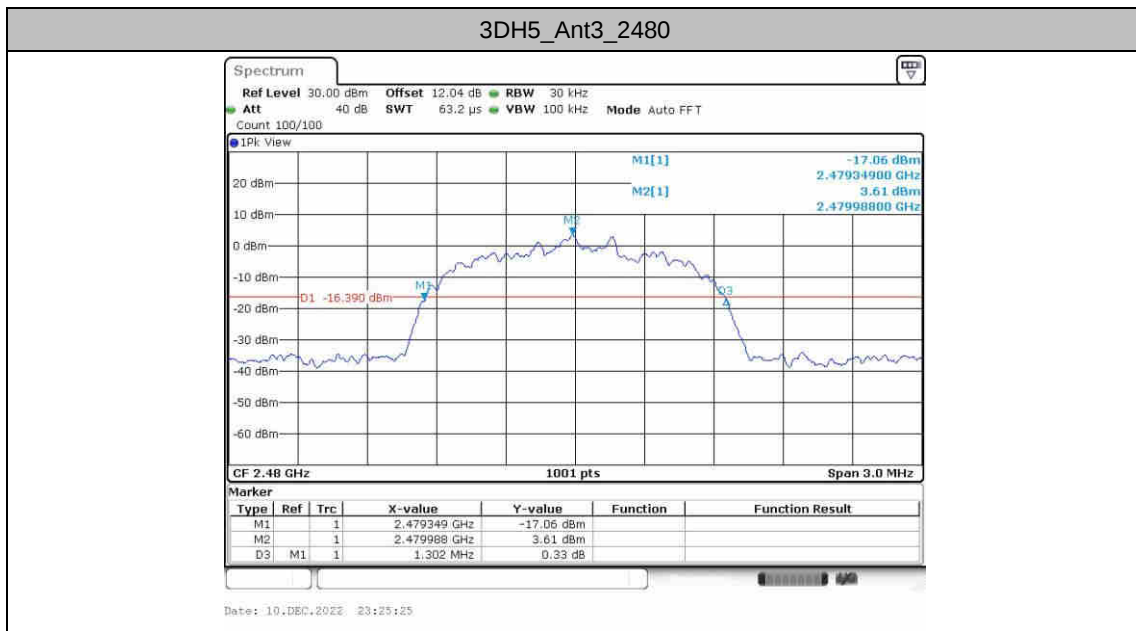




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant3	2402	0.857	2401.5714	2402.4286	---	---
		2441	0.86	2440.5684	2441.4286	---	---
		2480	0.857	2479.5684	2480.4256	---	---
2DH5	Ant3	2402	1.169	2401.4126	2402.5814	---	---
		2441	1.169	2440.4126	2441.5814	---	---
		2480	1.172	2479.4096	2480.5814	---	---
3DH5	Ant3	2402	1.172	2401.4156	2402.5874	---	---
		2441	1.175	2440.4156	2441.5904	---	---
		2480	1.175	2479.4126	2480.5874	---	---




Test Graphs

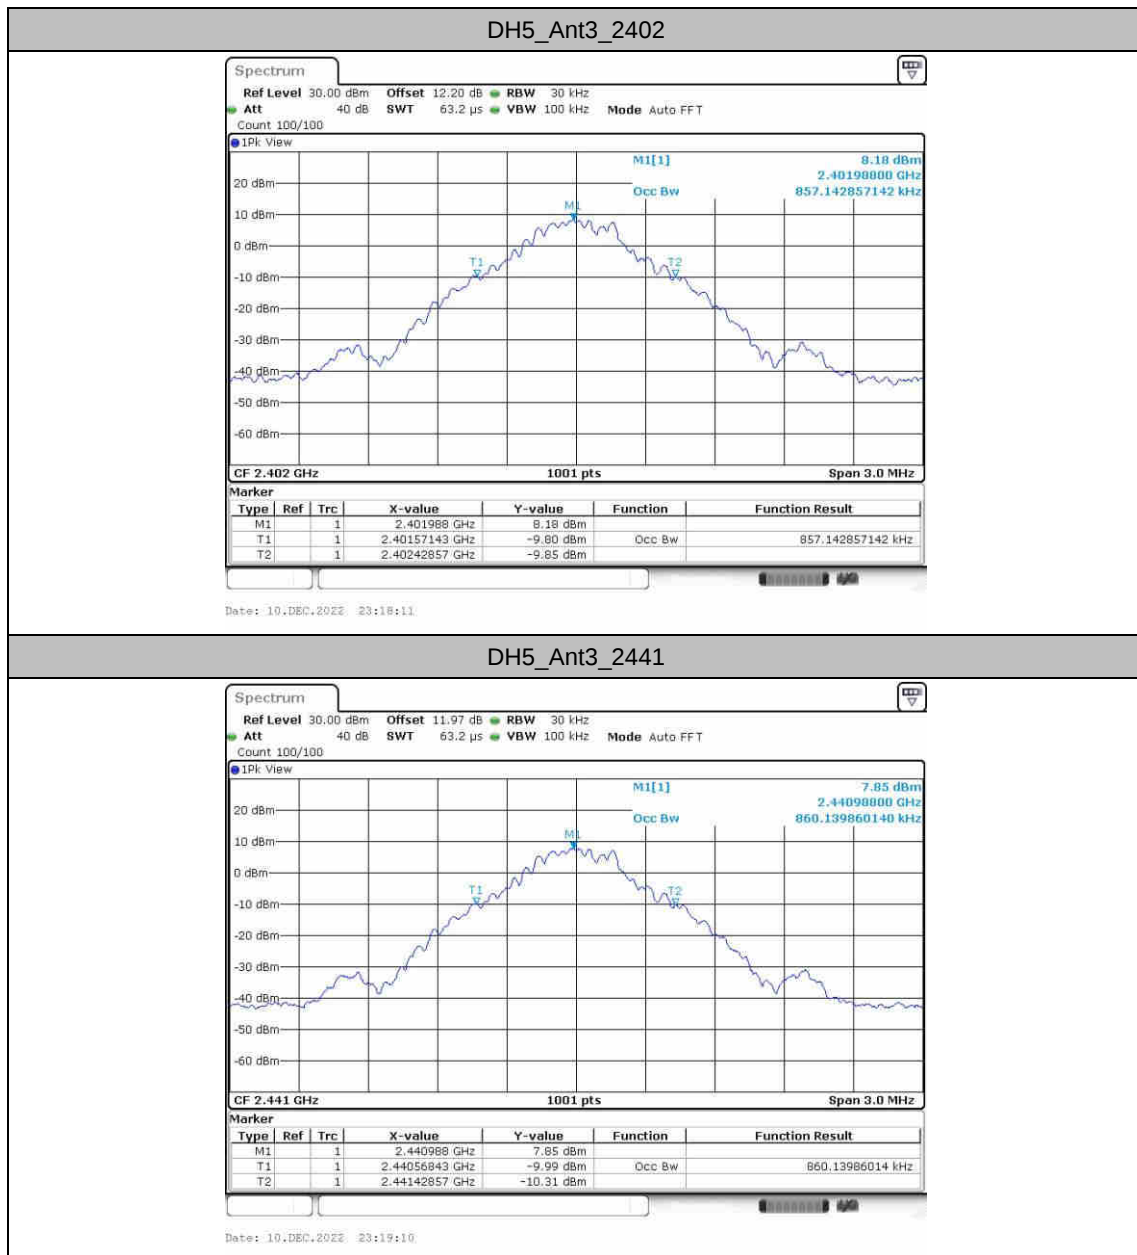




DH5_Ant3_2480

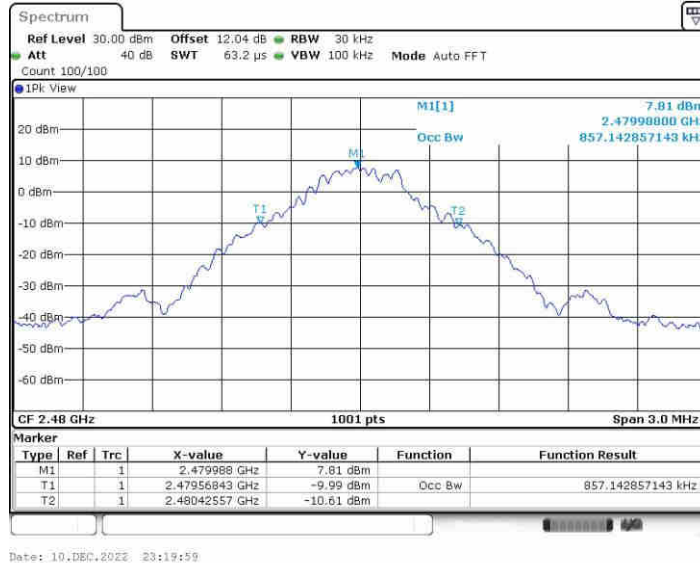


2DH5_Ant3_2402

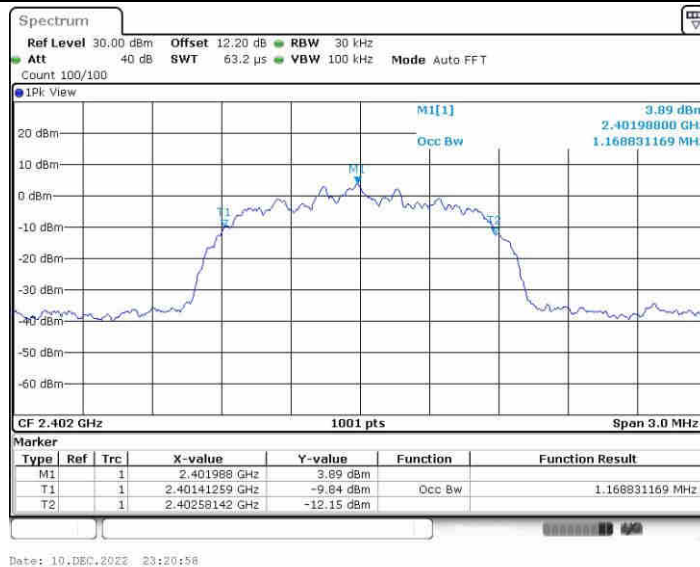




2DH5_Ant3_2441

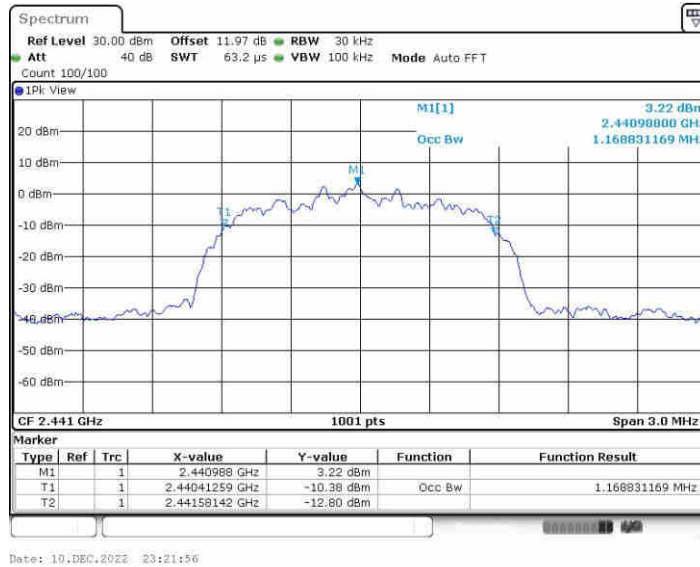


2DH5_Ant3_2480

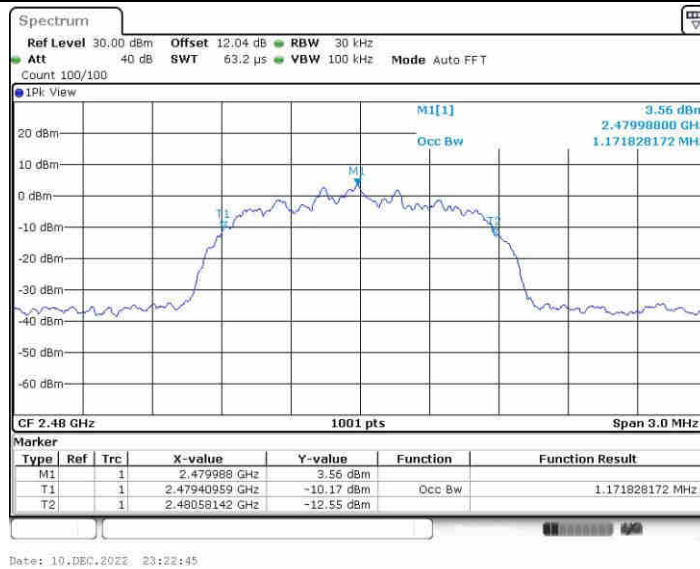





3DH5_Ant3_2402

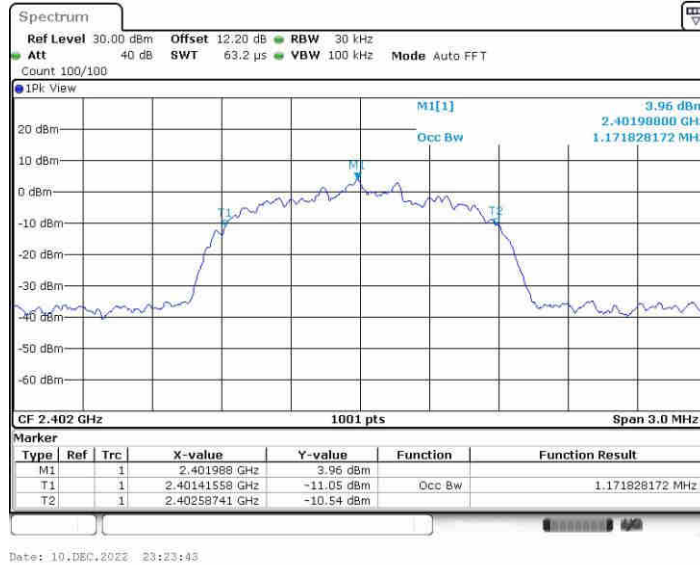

3DH5_Ant3_2441

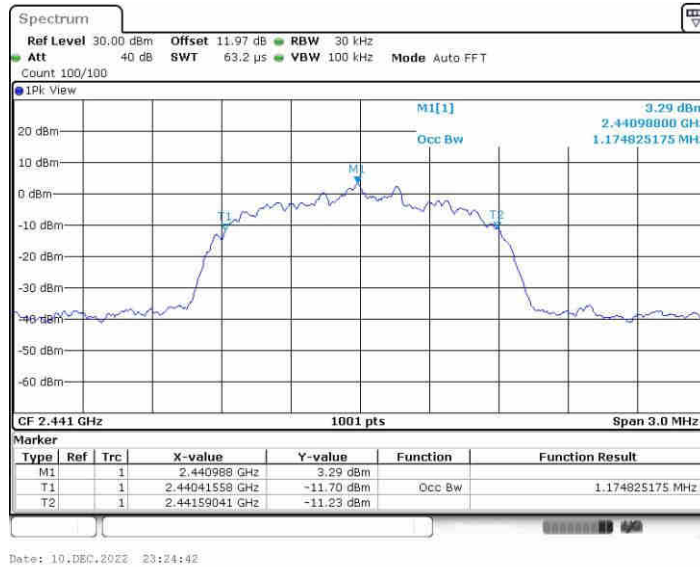

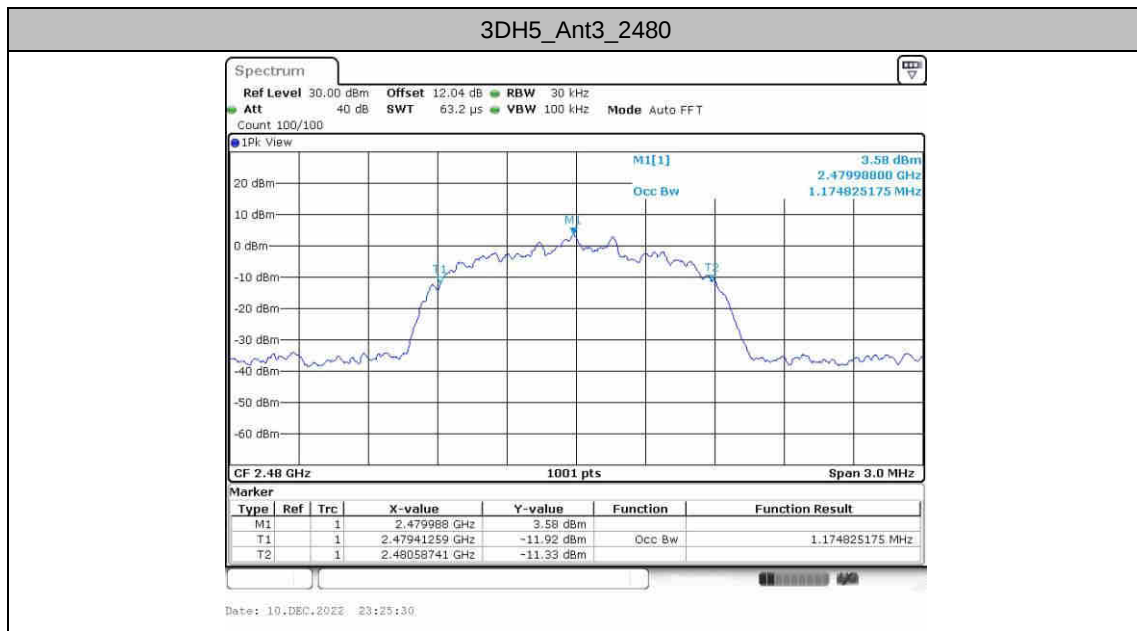




Carrier frequency separation


Test Result

TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant3	Hop	1.000	≥0.633	PASS
2DH5	Ant3	Hop	1.003	≥0.867	PASS
3DH5	Ant3	Hop	0.991	≥0.867	PASS



Test Graphs

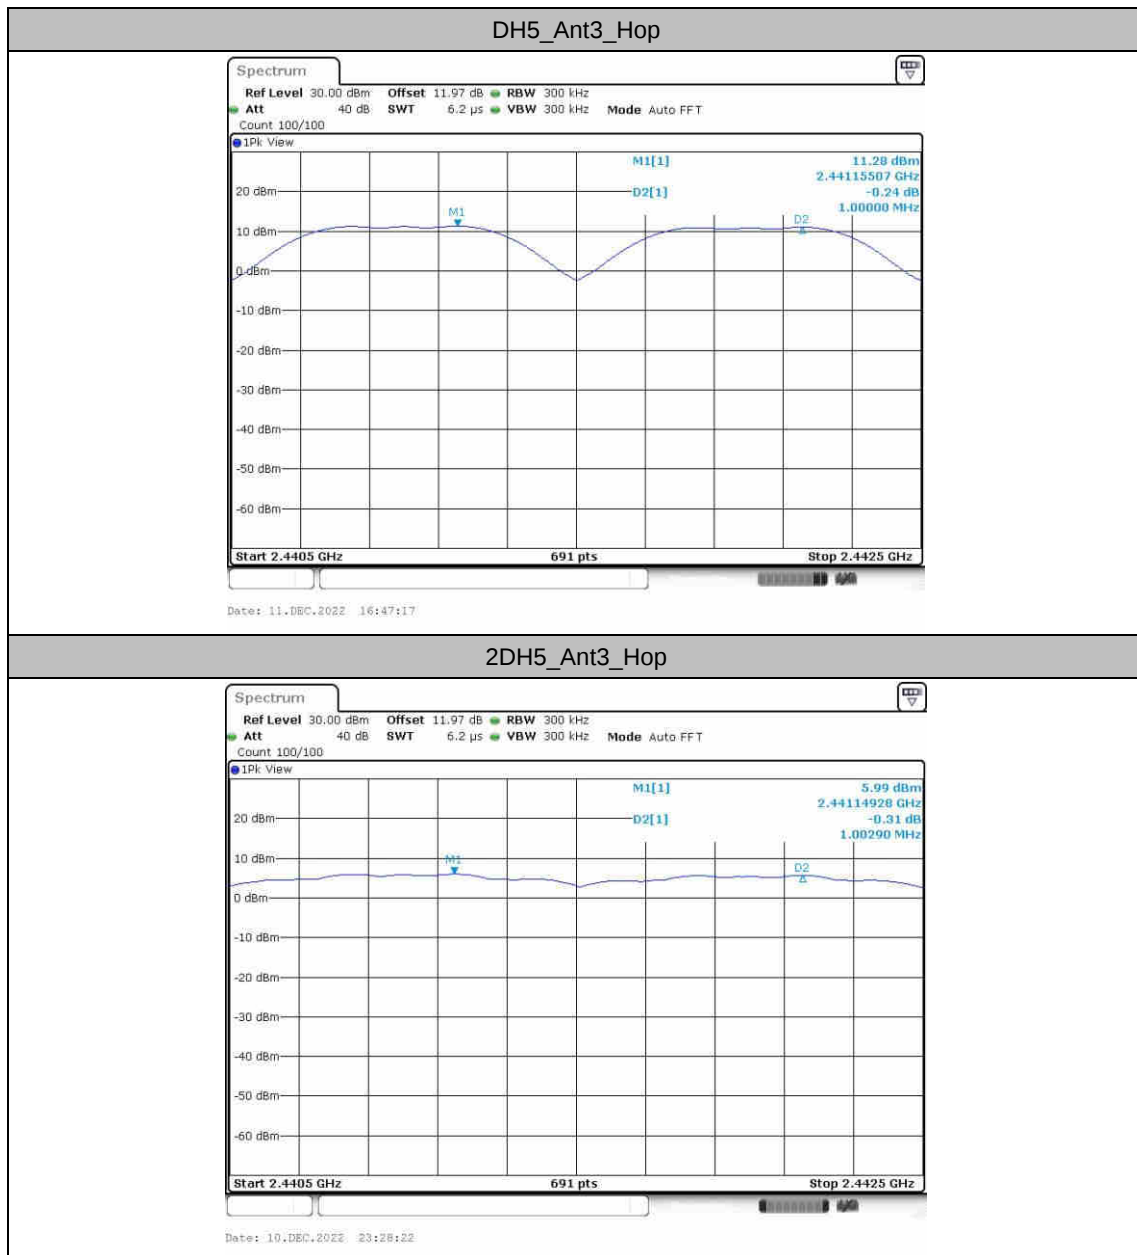

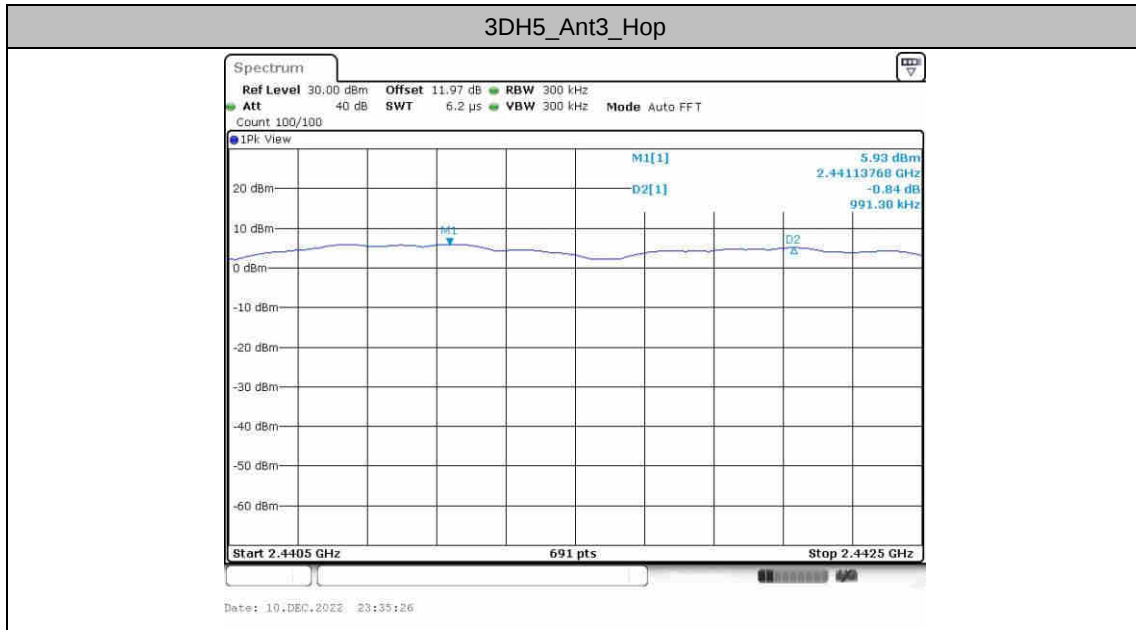




Time of occupancy

Test Result

TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant3	Hop	0.378	320	0.121	≤0.4	PASS
DH3	Ant3	Hop	1.626	160	0.26	≤0.4	PASS
DH5	Ant3	Hop	2.867	106.67	0.306	≤0.4	PASS
2DH1	Ant3	Hop	0.384	320	0.123	≤0.4	PASS
2DH3	Ant3	Hop	1.629	160	0.261	≤0.4	PASS
2DH5	Ant3	Hop	2.869	106.67	0.306	≤0.4	PASS
3DH1	Ant3	Hop	0.384	320	0.123	≤0.4	PASS
3DH3	Ant3	Hop	1.628	160	0.26	≤0.4	PASS
3DH5	Ant3	Hop	2.870	106.67	0.306	≤0.4	PASS




Test Graphs

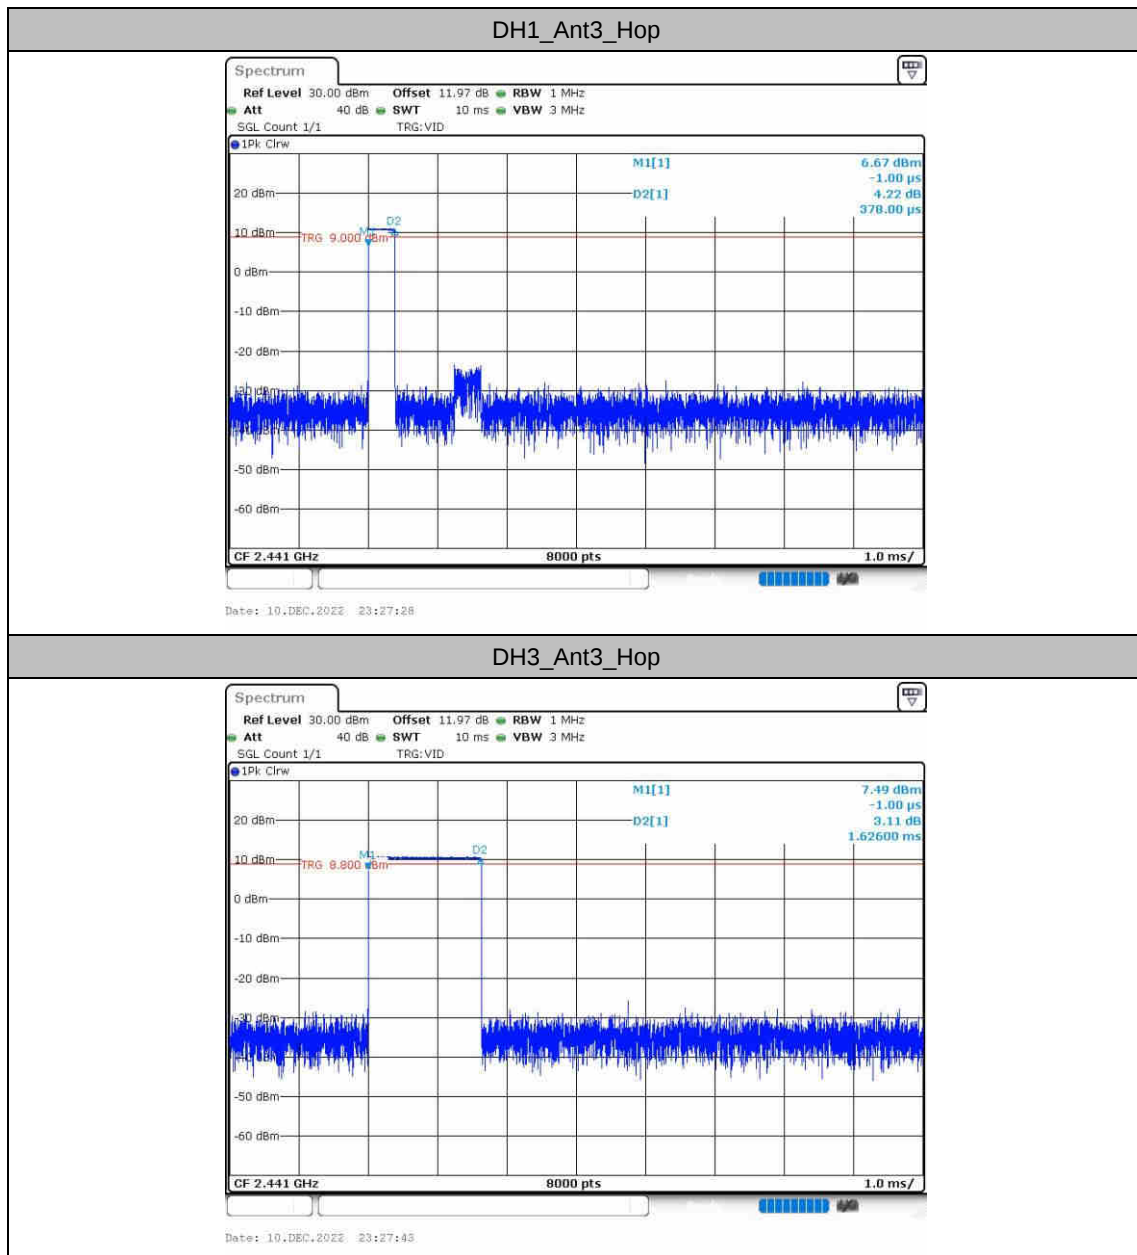




DH5_Ant3_Hop

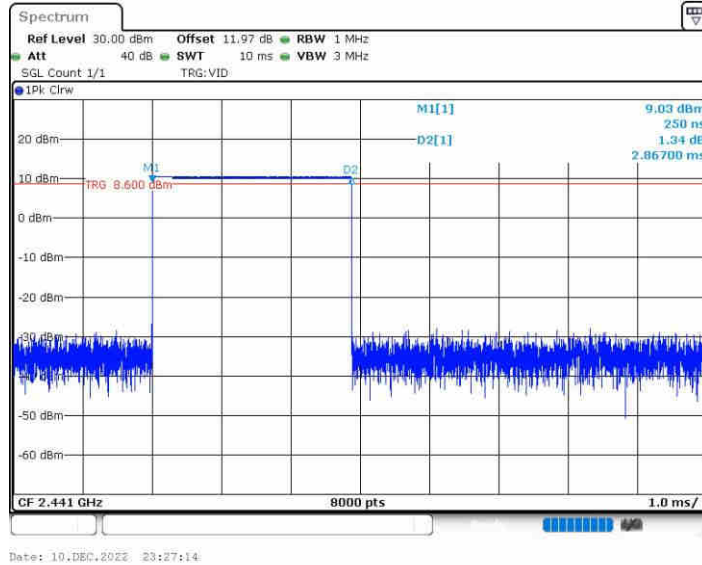


2DH1_Ant3_Hop

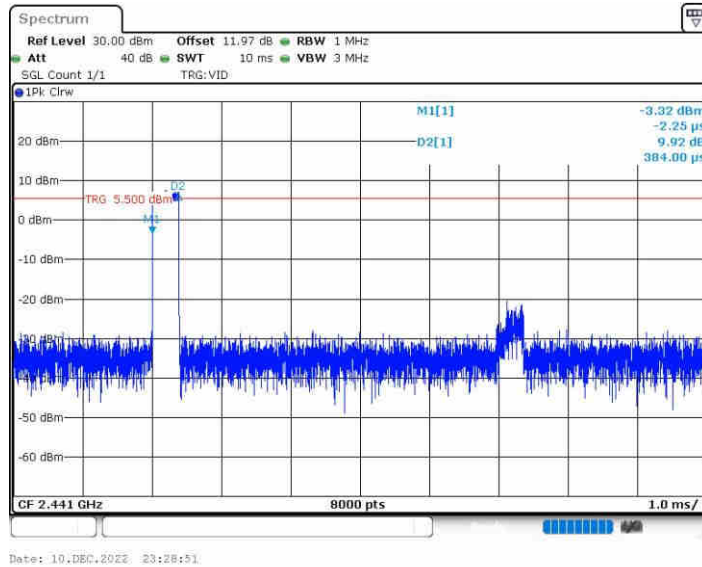




2DH3_Ant3_Hop

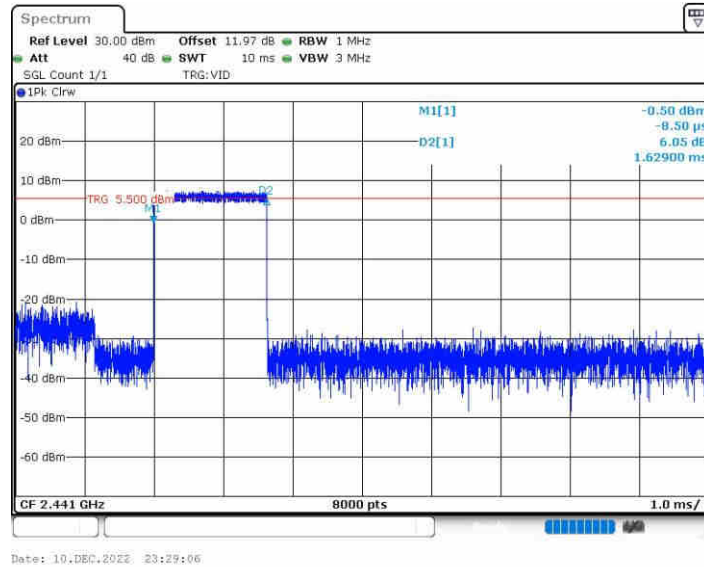


2DH5_Ant3_Hop

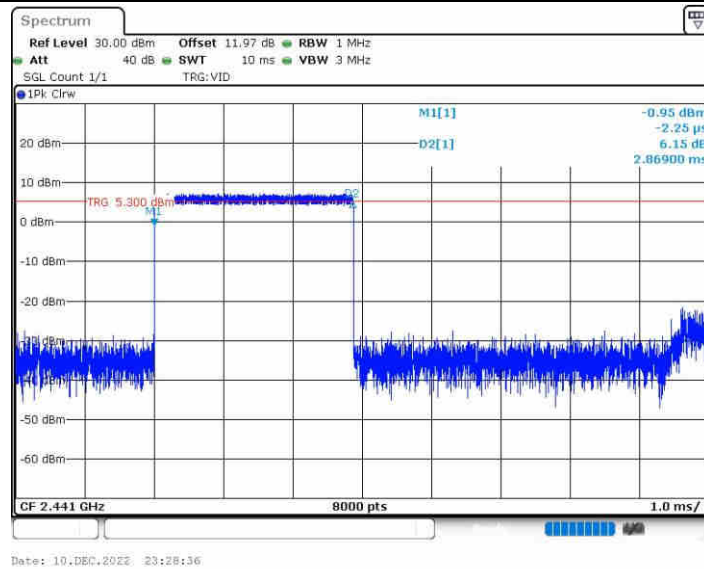





3DH1_Ant3_Hop

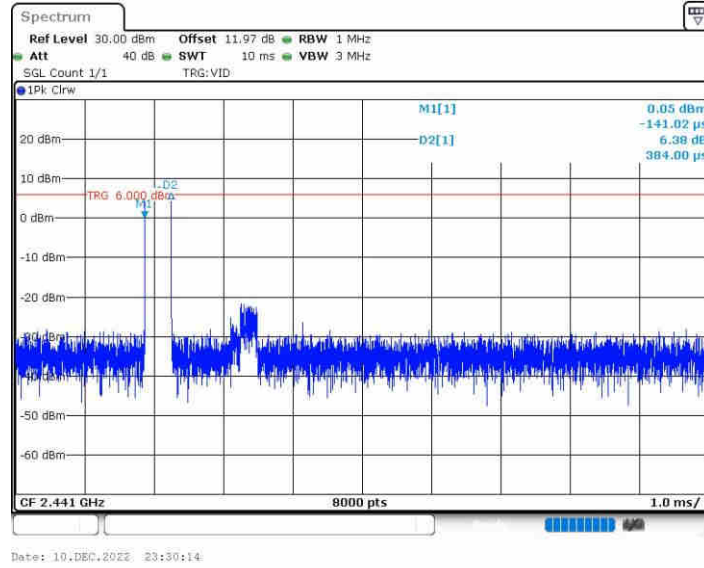

3DH3_Ant3_Hop

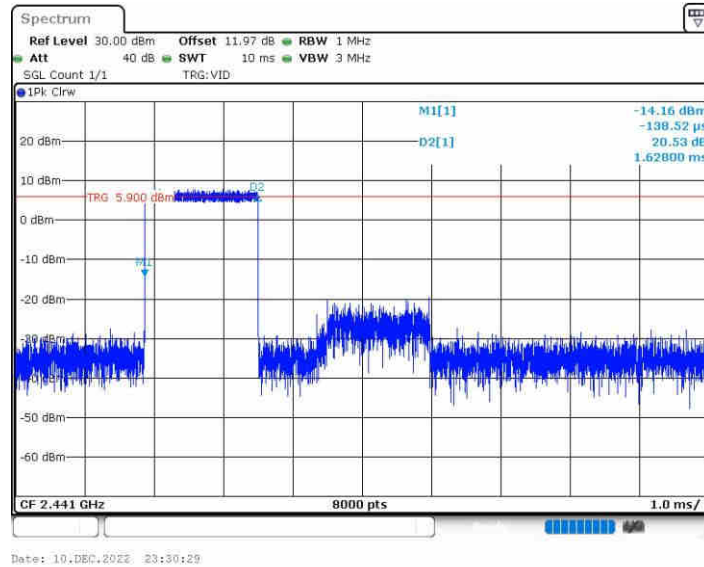

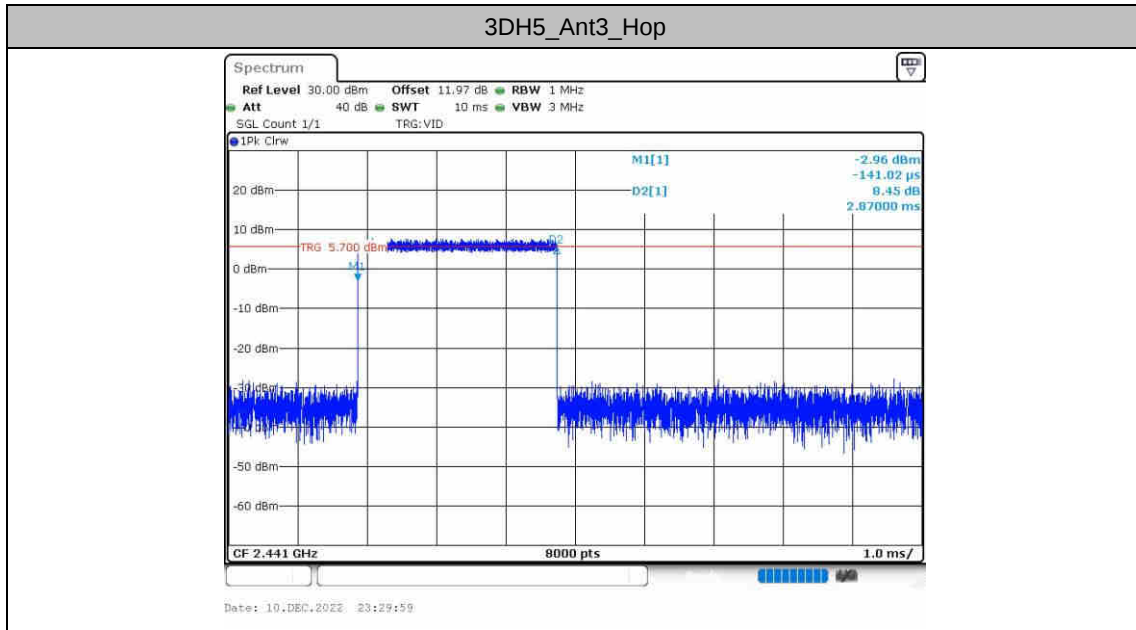




Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant3	Hop	79	≥15	PASS

Test Graphs

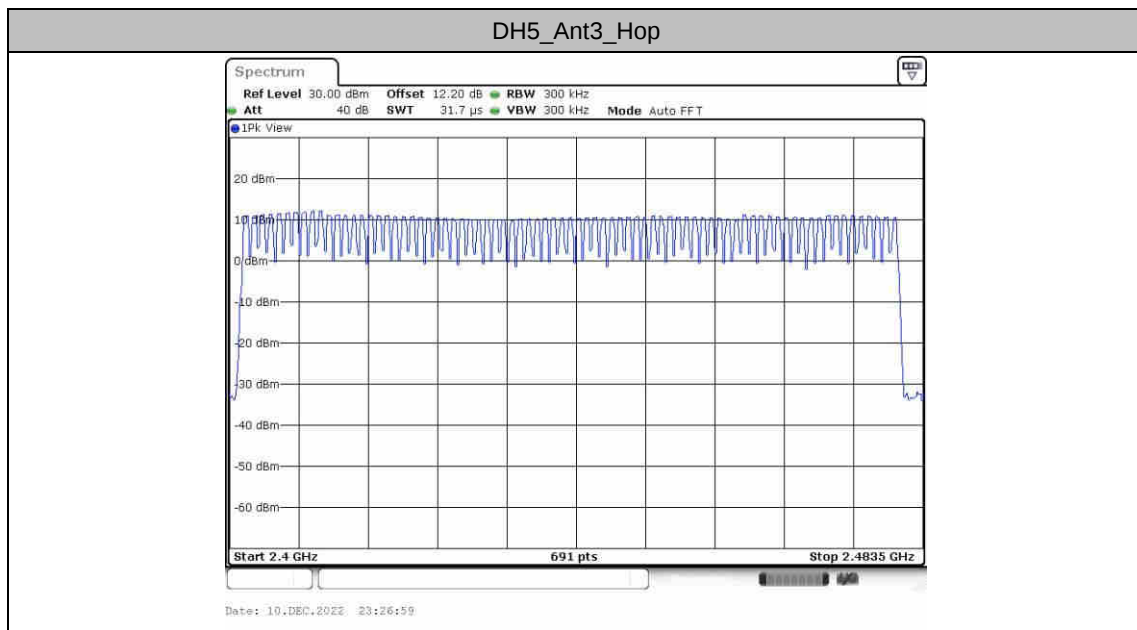




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant3	Low	2402	10.88	-44.86	≤-9.12	PASS
		High	2480	10.52	-45.23	≤-9.48	PASS
		Low	Hop_2402	10.65	-46.08	≤-9.35	PASS
		High	Hop_2480	10.16	-44.9	≤-9.84	PASS
2DH5	Ant3	Low	2402	6.39	-44.41	≤-13.61	PASS
		High	2480	6.13	-44.8	≤-13.87	PASS
		Low	Hop_2402	5.84	-45.87	≤-14.16	PASS
		High	Hop_2480	5.25	-44.91	≤-14.75	PASS
3DH5	Ant3	Low	2402	6.53	-44.93	≤-13.47	PASS
		High	2480	6.20	-44.93	≤-13.8	PASS
		Low	Hop_2402	3.99	-45.74	≤-16.01	PASS
		High	Hop_2480	5.77	-45.31	≤-14.23	PASS




Test Graphs

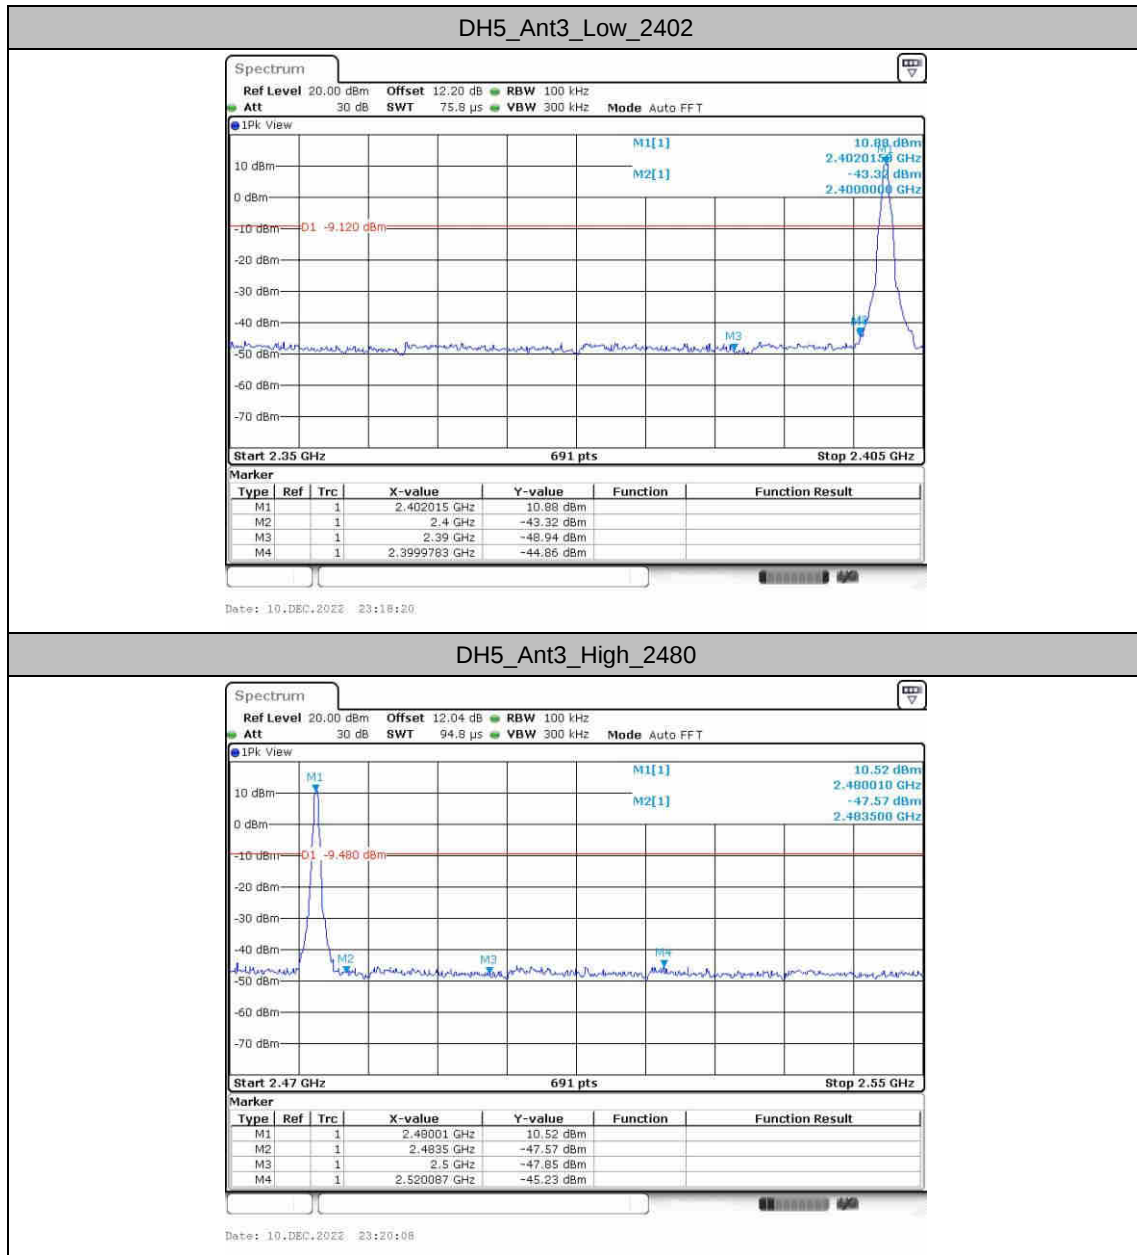




DH5_Ant3_Low_Hop_2402

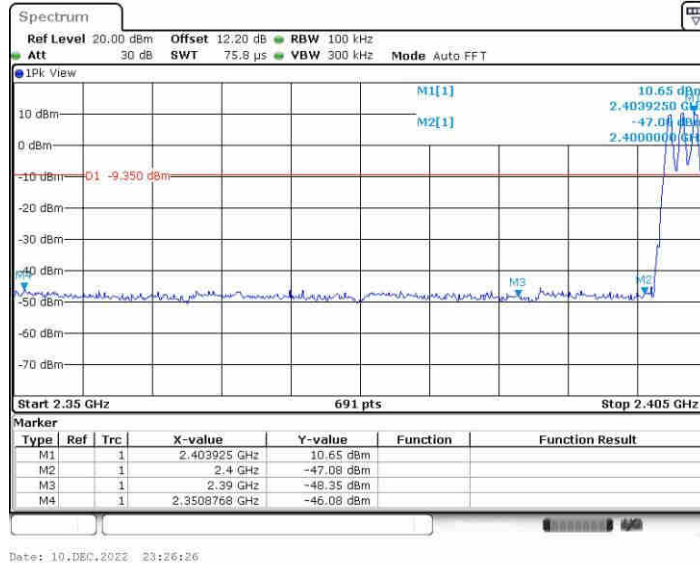


DH5_Ant3_High_Hop_2480

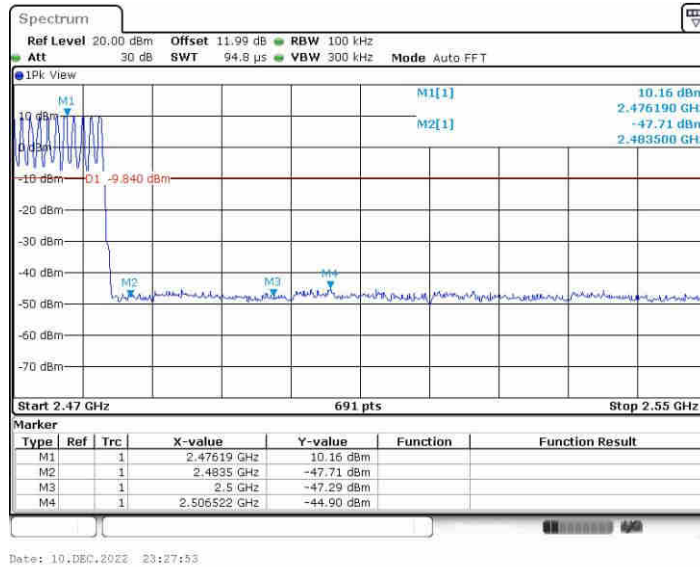




2DH5_Ant3_Low_2402

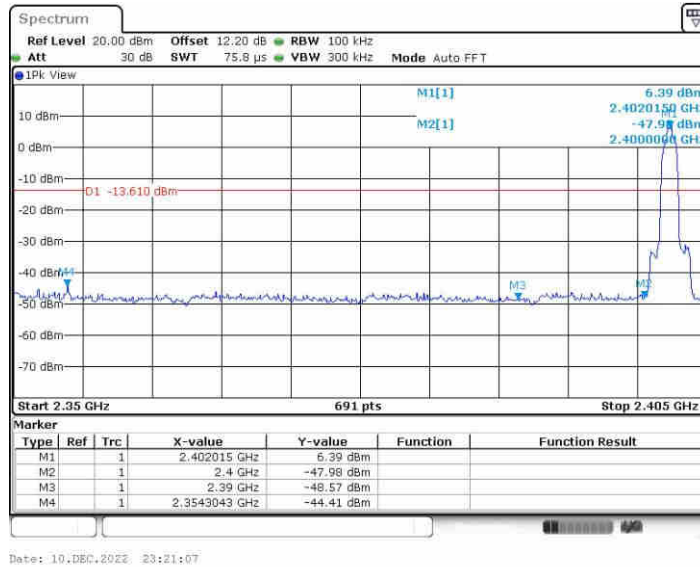


2DH5_Ant3_High_2480

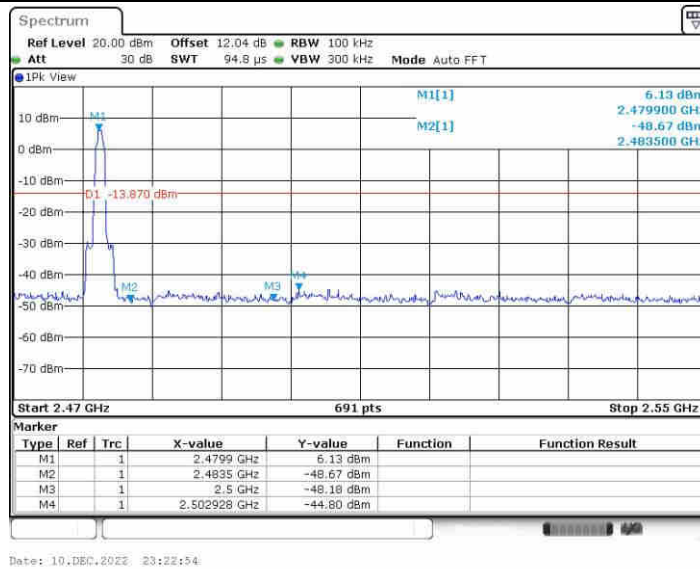




2DH5_Ant3_Low_Hop_2402

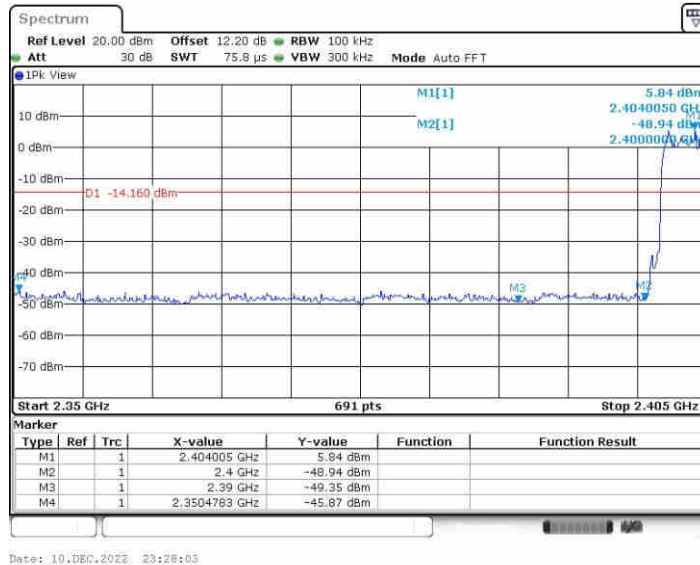


2DH5_Ant3_High_Hop_2480

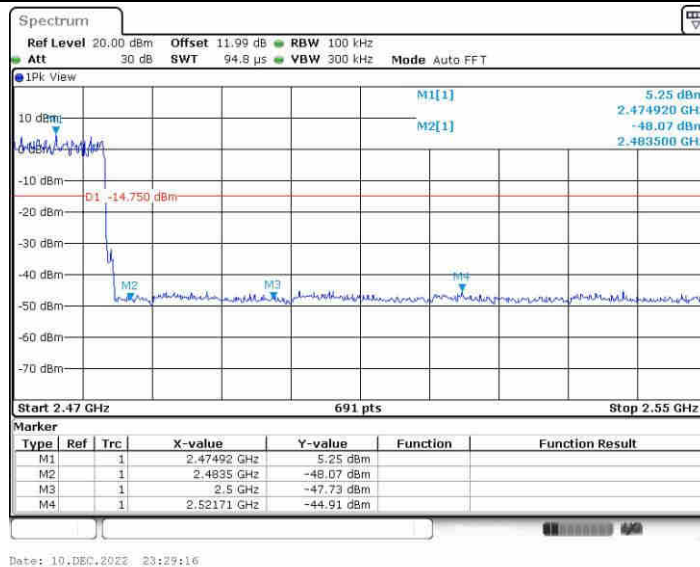





3DH5_Ant3_Low_2402

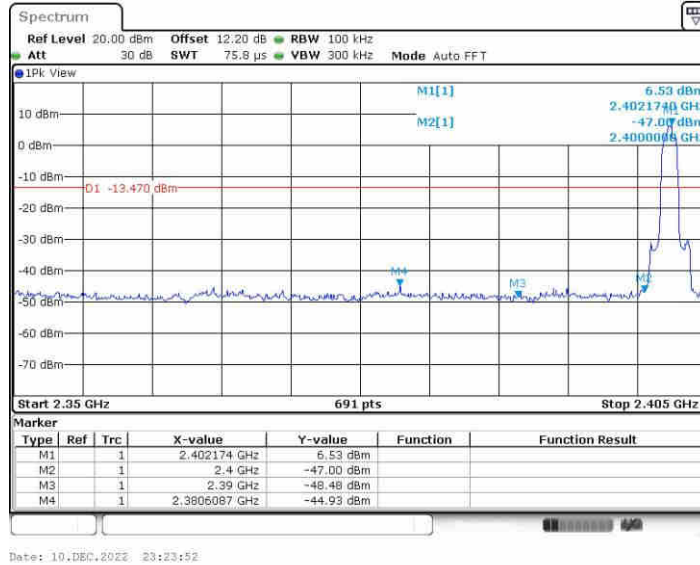

3DH5_Ant3_High_2480

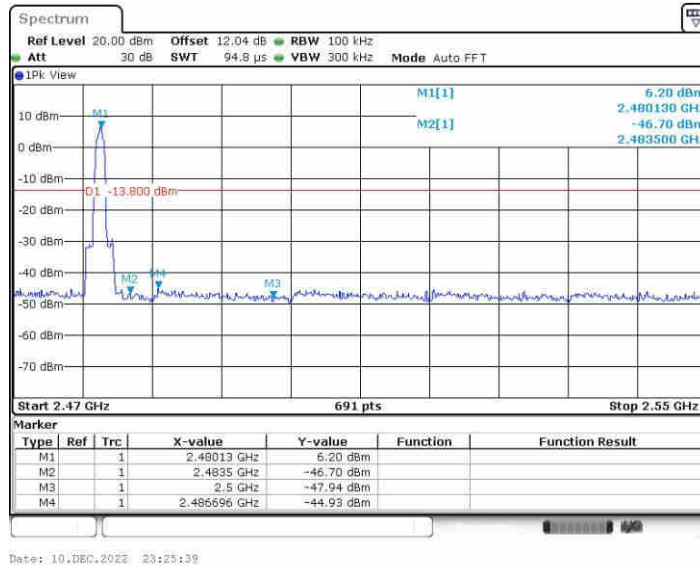

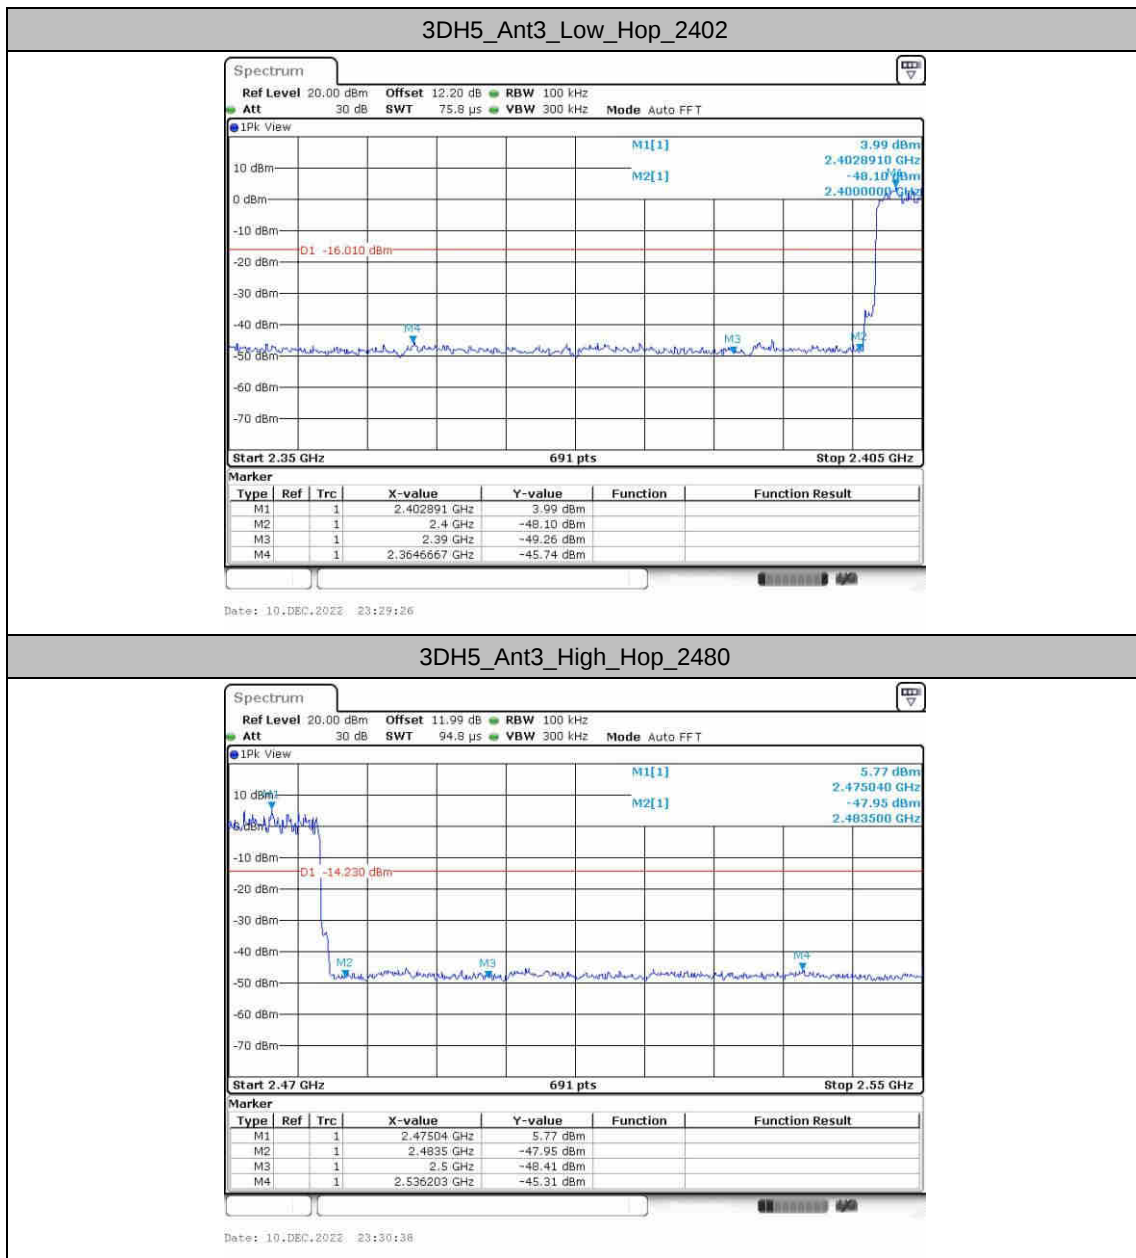



Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant3	2402	Reference	10.97	10.97	---	PASS
			30~1000	10.97	-56.47	≤ -9.03	PASS
			1000~26500	10.97	-46.61	≤ -9.03	PASS
		2441	Reference	10.73	10.73	---	PASS
			30~1000	10.73	-56.73	≤ -9.27	PASS
			1000~26500	10.73	-47.19	≤ -9.27	PASS
		2480	Reference	10.64	10.64	---	PASS
			30~1000	10.64	-56.9	≤ -9.36	PASS
			1000~26500	10.64	-46.29	≤ -9.36	PASS
2DH5	Ant3	2402	Reference	6.63	6.63	---	PASS
			30~1000	6.63	-55.97	≤ -13.37	PASS
			1000~26500	6.63	-47.17	≤ -13.37	PASS
		2441	Reference	5.97	5.97	---	PASS
			30~1000	5.97	-56.38	≤ -14.03	PASS
			1000~26500	5.97	-46.95	≤ -14.03	PASS
		2480	Reference	6.21	6.21	---	PASS
			30~1000	6.21	-56.81	≤ -13.79	PASS
			1000~26500	6.21	-47.17	≤ -13.79	PASS
3DH5	Ant3	2402	Reference	6.74	6.74	---	PASS
			30~1000	6.74	-55.19	≤ -13.26	PASS
			1000~26500	6.74	-47.67	≤ -13.26	PASS
		2441	Reference	6.01	6.01	---	PASS
			30~1000	6.01	-56.66	≤ -13.99	PASS
			1000~26500	6.01	-47.23	≤ -13.99	PASS
		2480	Reference	6.28	6.28	---	PASS
			30~1000	6.28	-56.58	≤ -13.72	PASS
			1000~26500	6.28	-47.02	≤ -13.72	PASS




Test Graphs







DH5_Ant3_2402_1000~26500

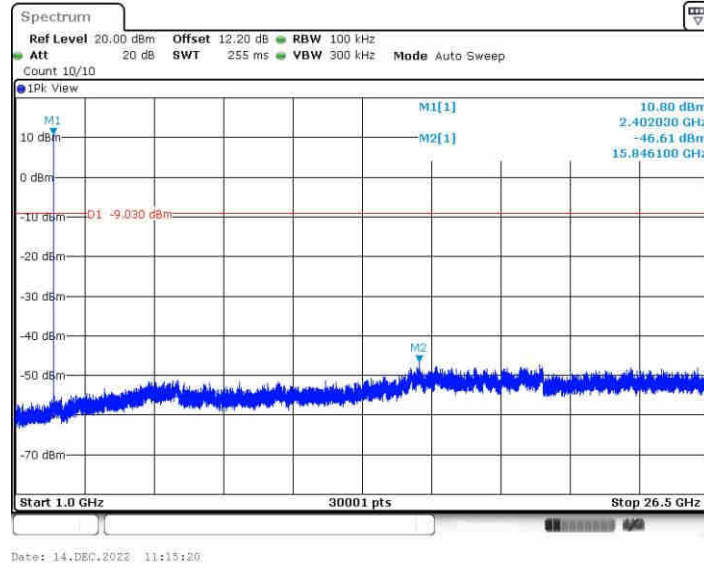

DH5_Ant3_2441_0~Reference




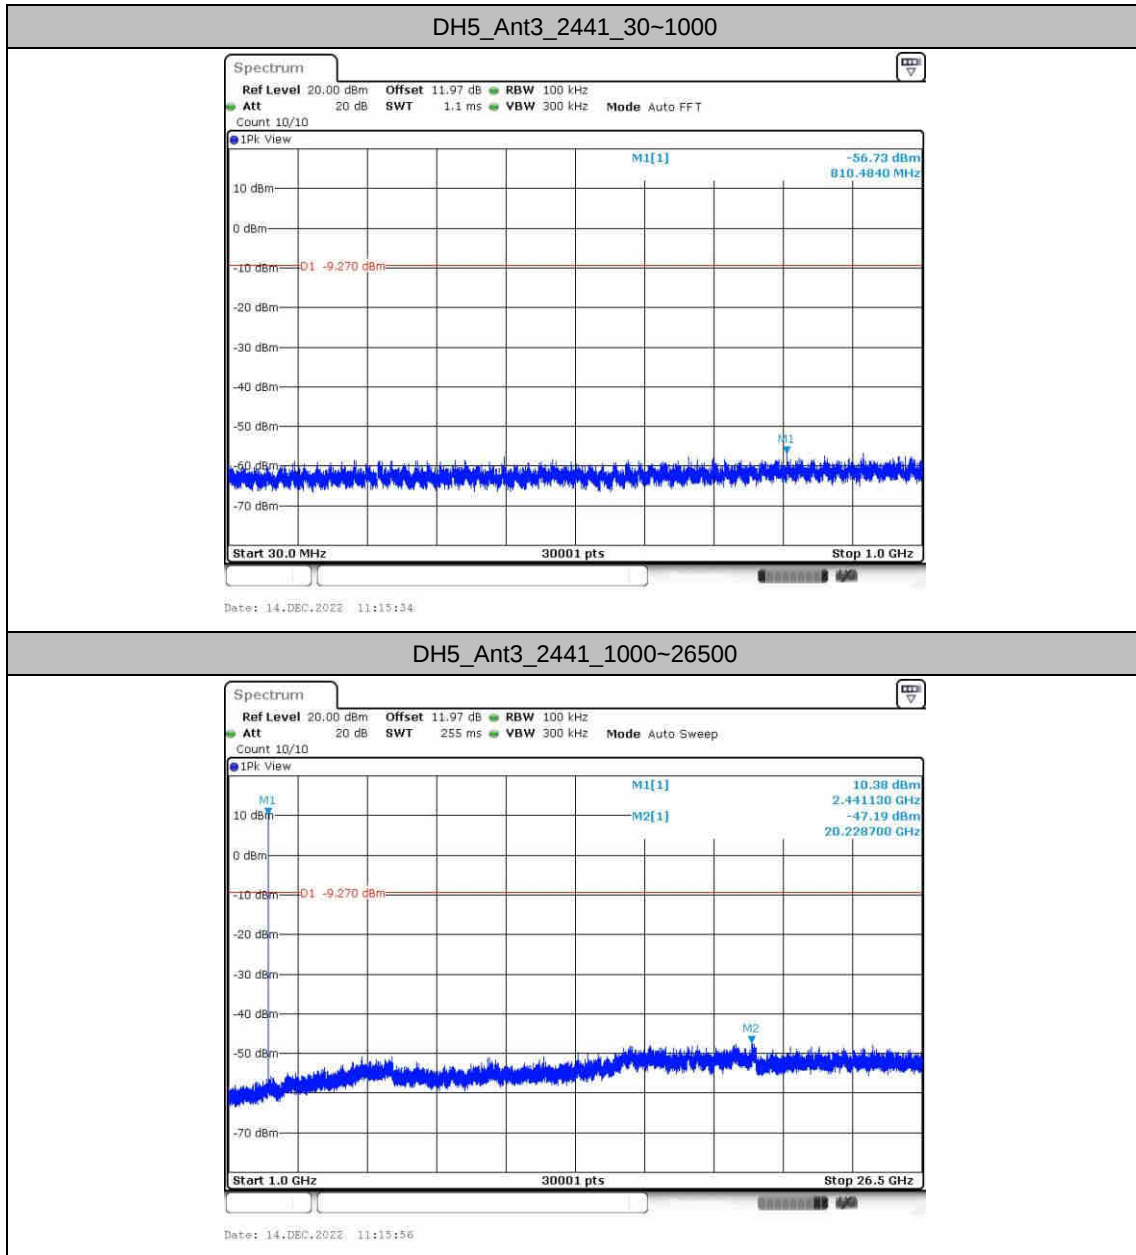

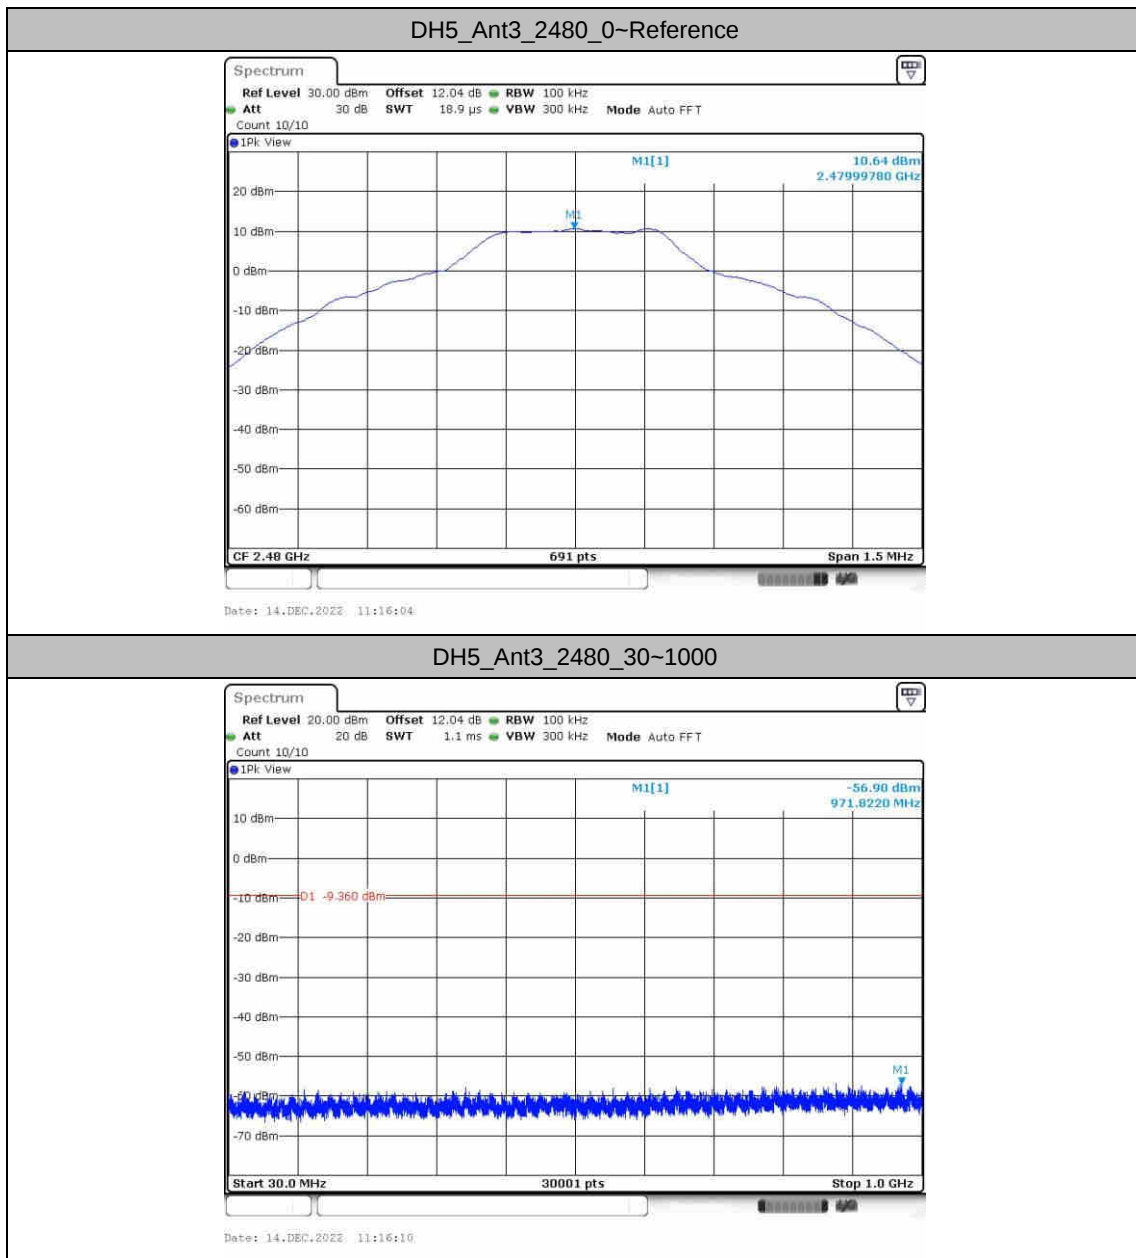





DH5_Ant3_2480_1000~26500

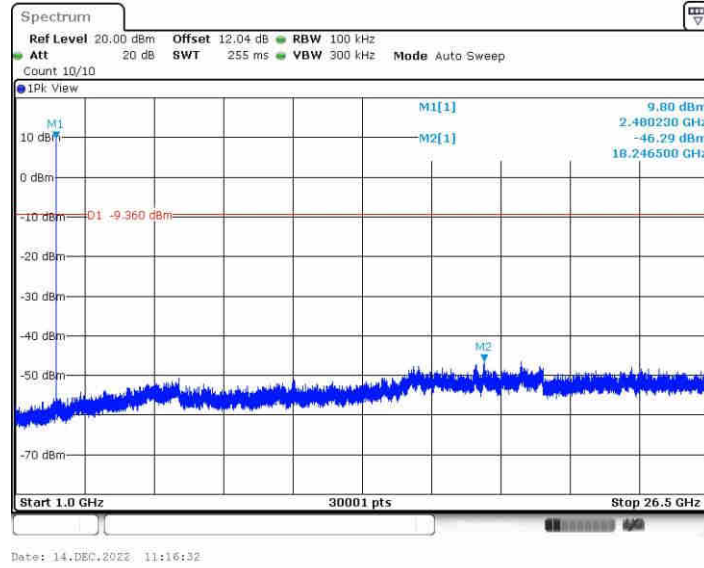


2DH5_Ant3_2402_0~Reference

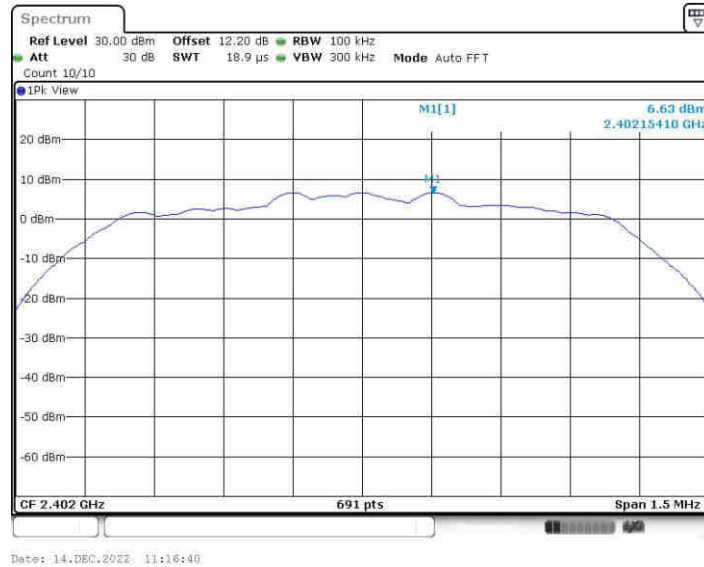

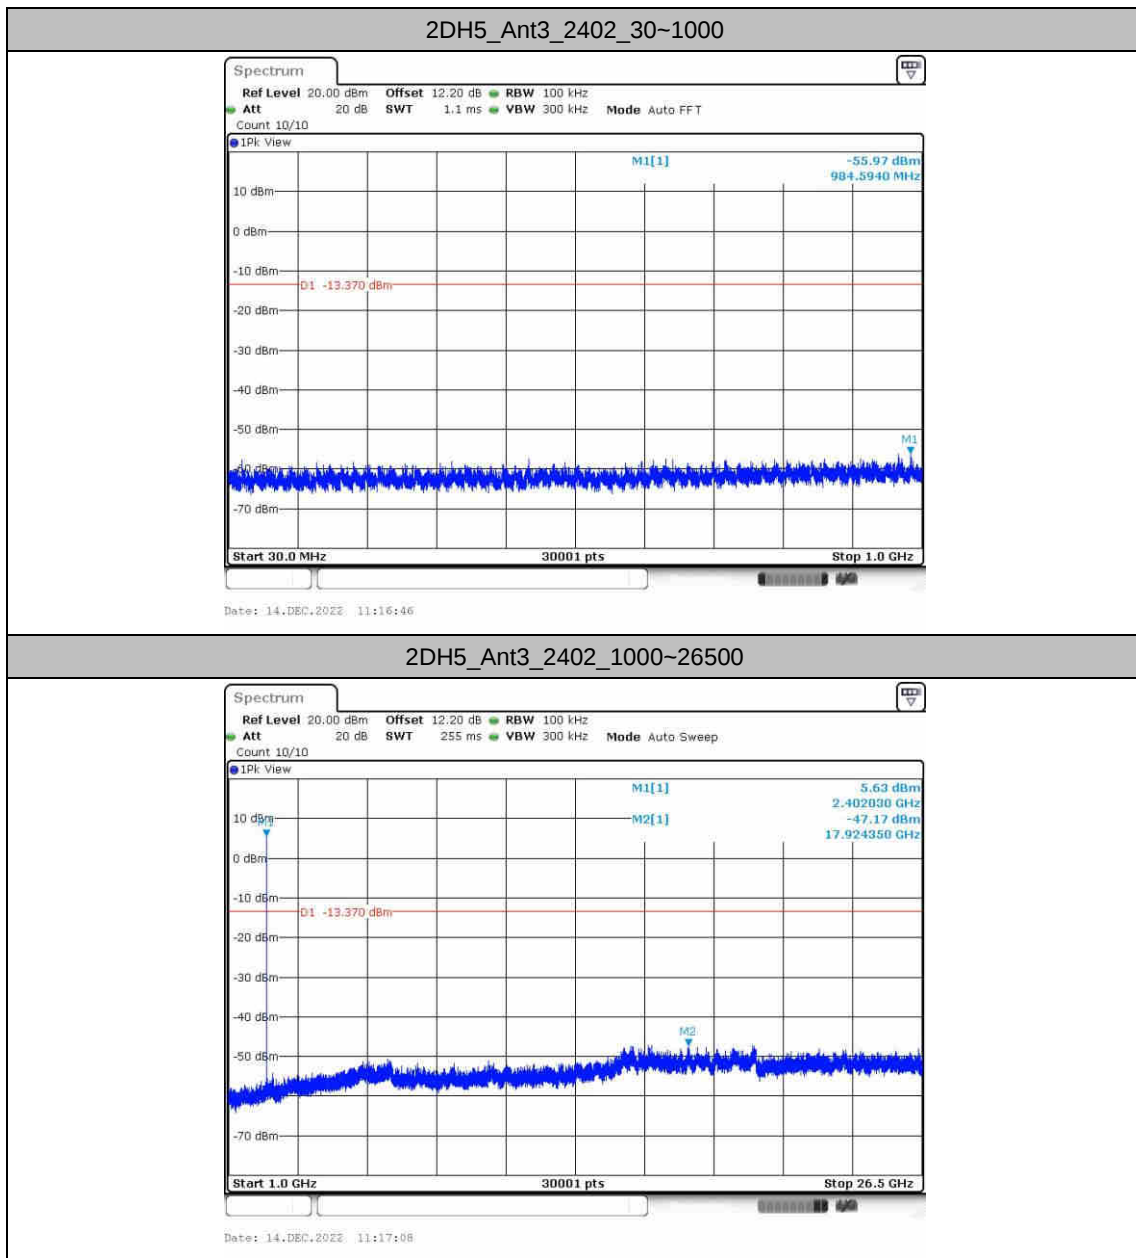




2DH5_Ant3_2441_0~Reference

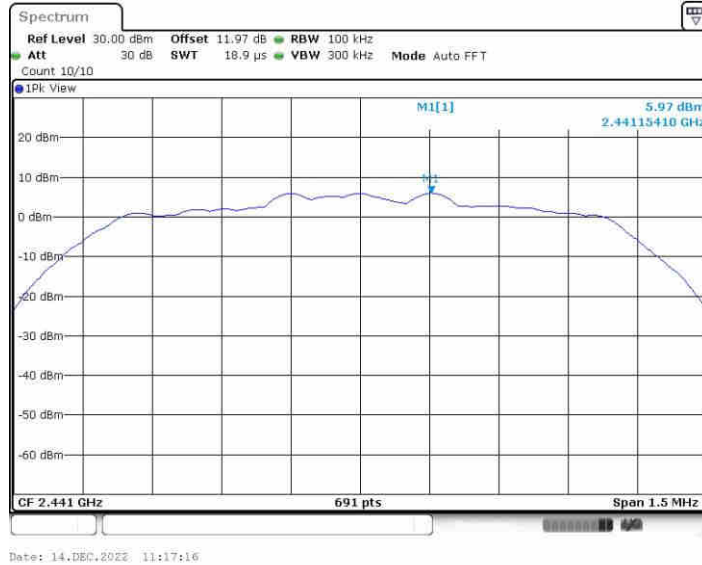


2DH5_Ant3_2441_30~1000

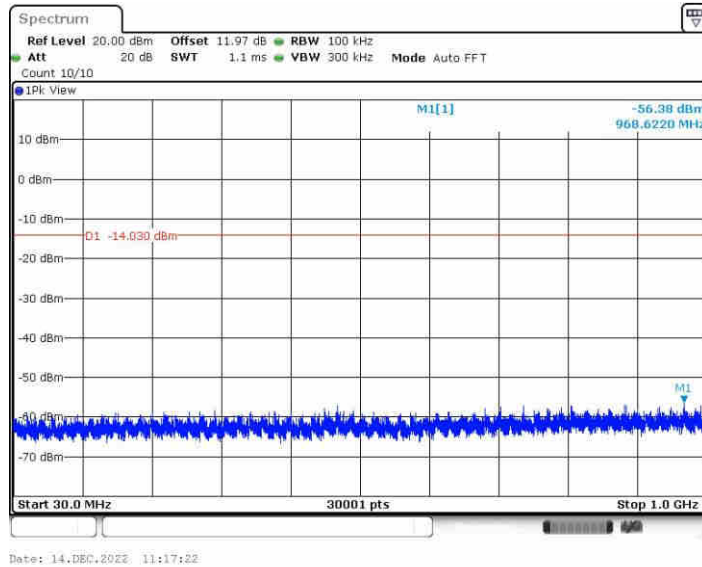





2DH5_Ant3_2441_1000~26500

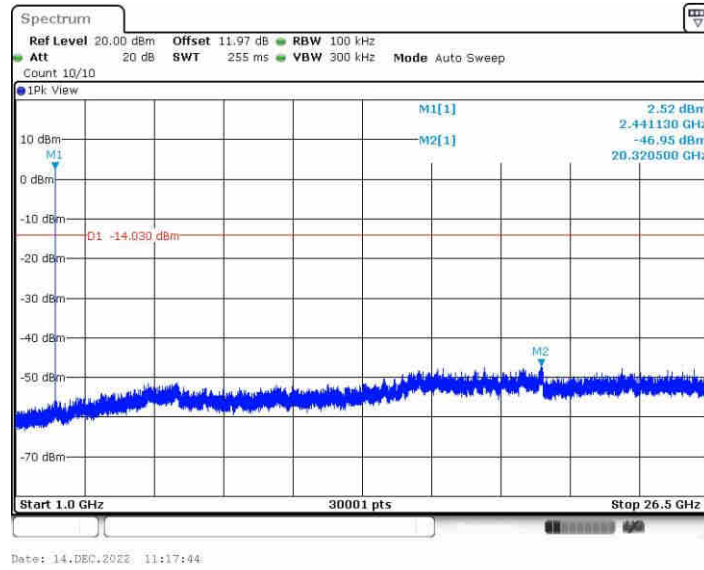

2DH5_Ant3_2480_0~Reference




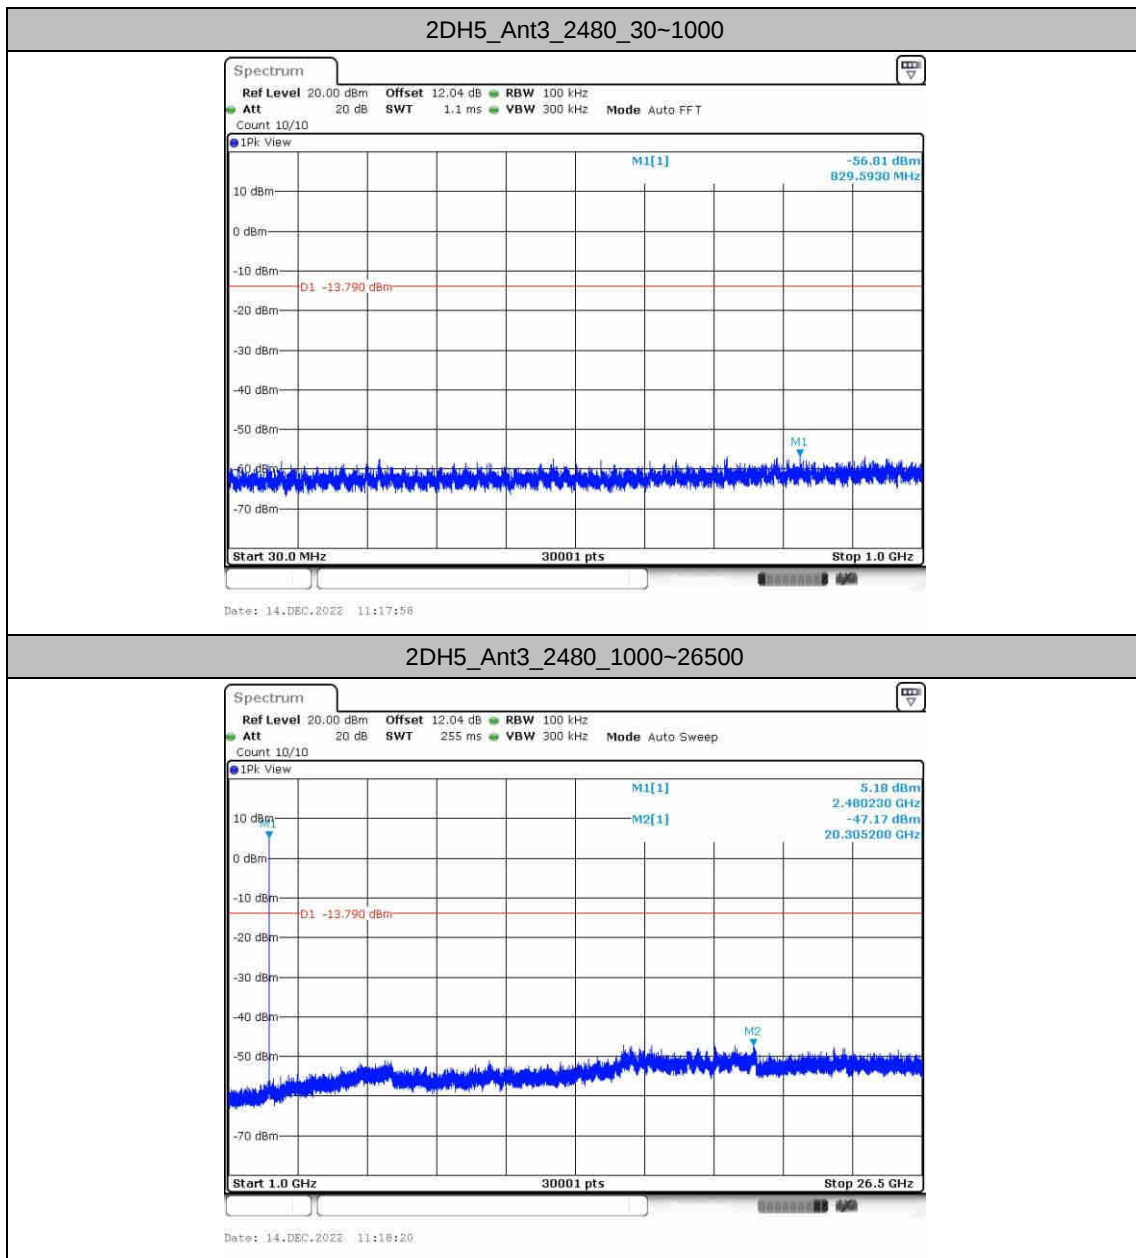

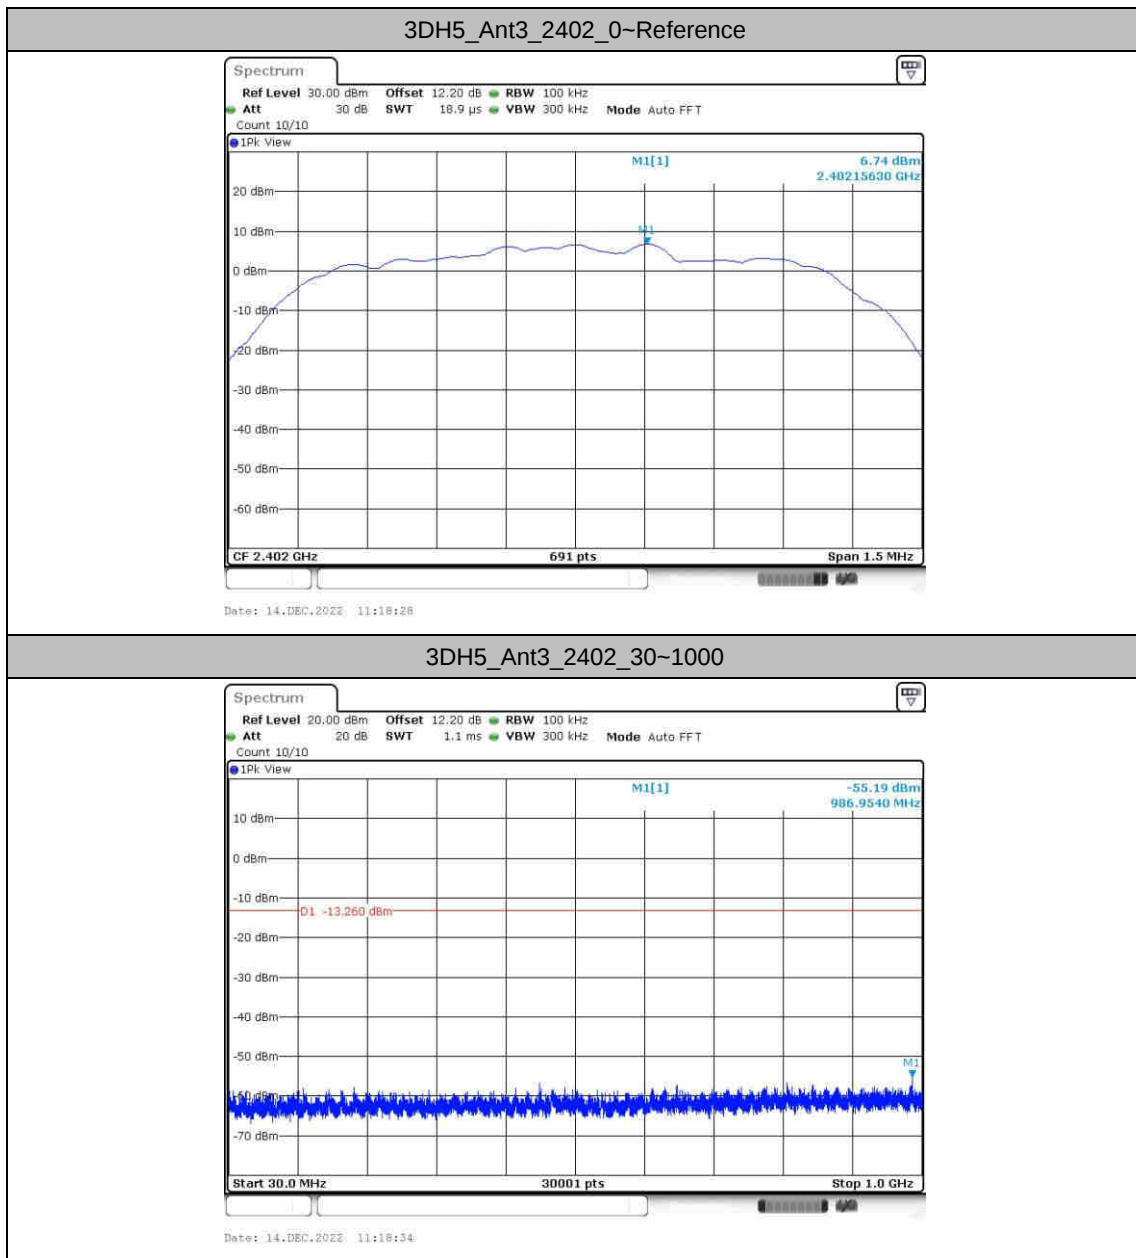






3DH5_Ant3_2402_1000~26500

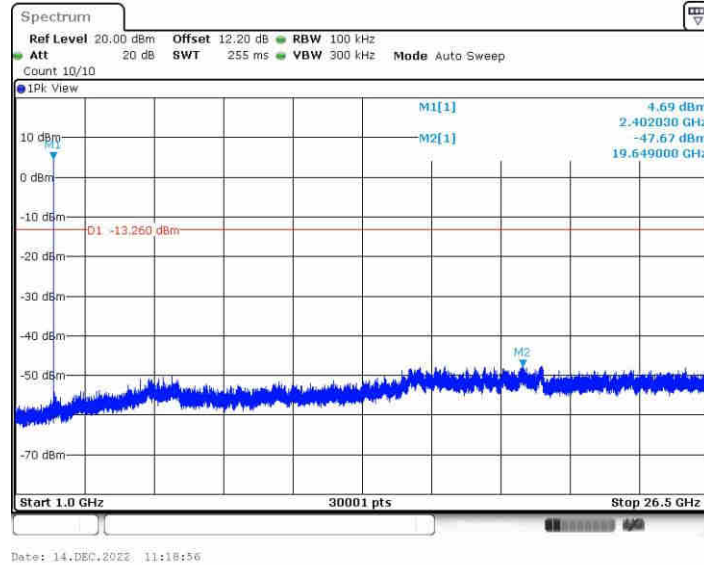


3DH5_Ant3_2441_0~Reference

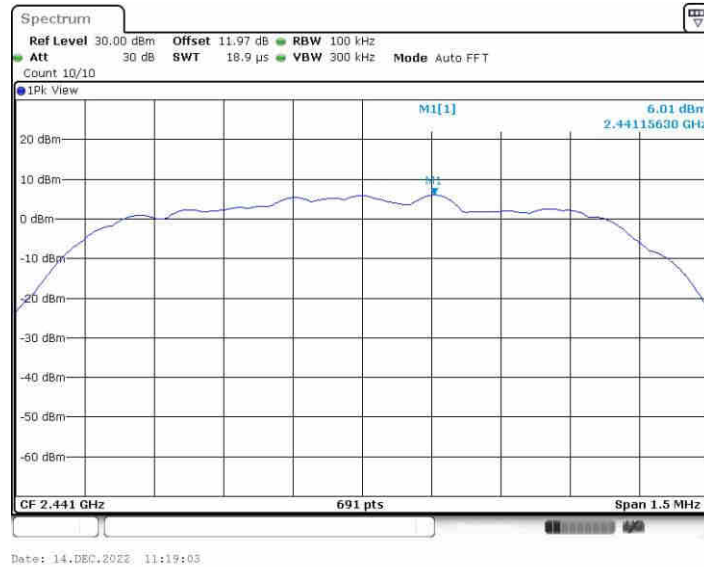

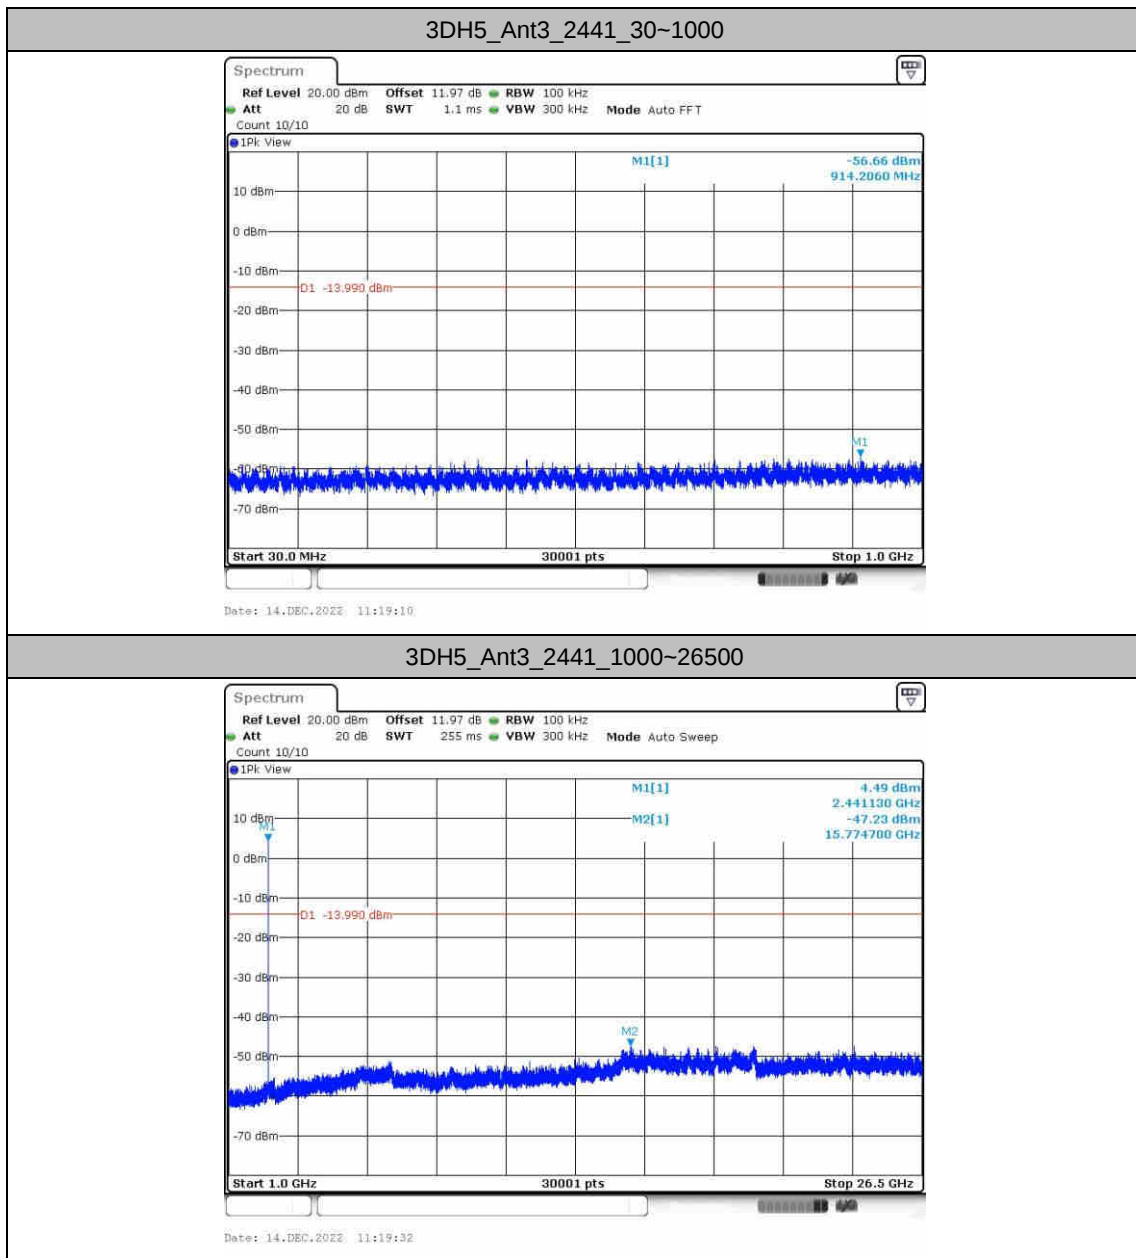


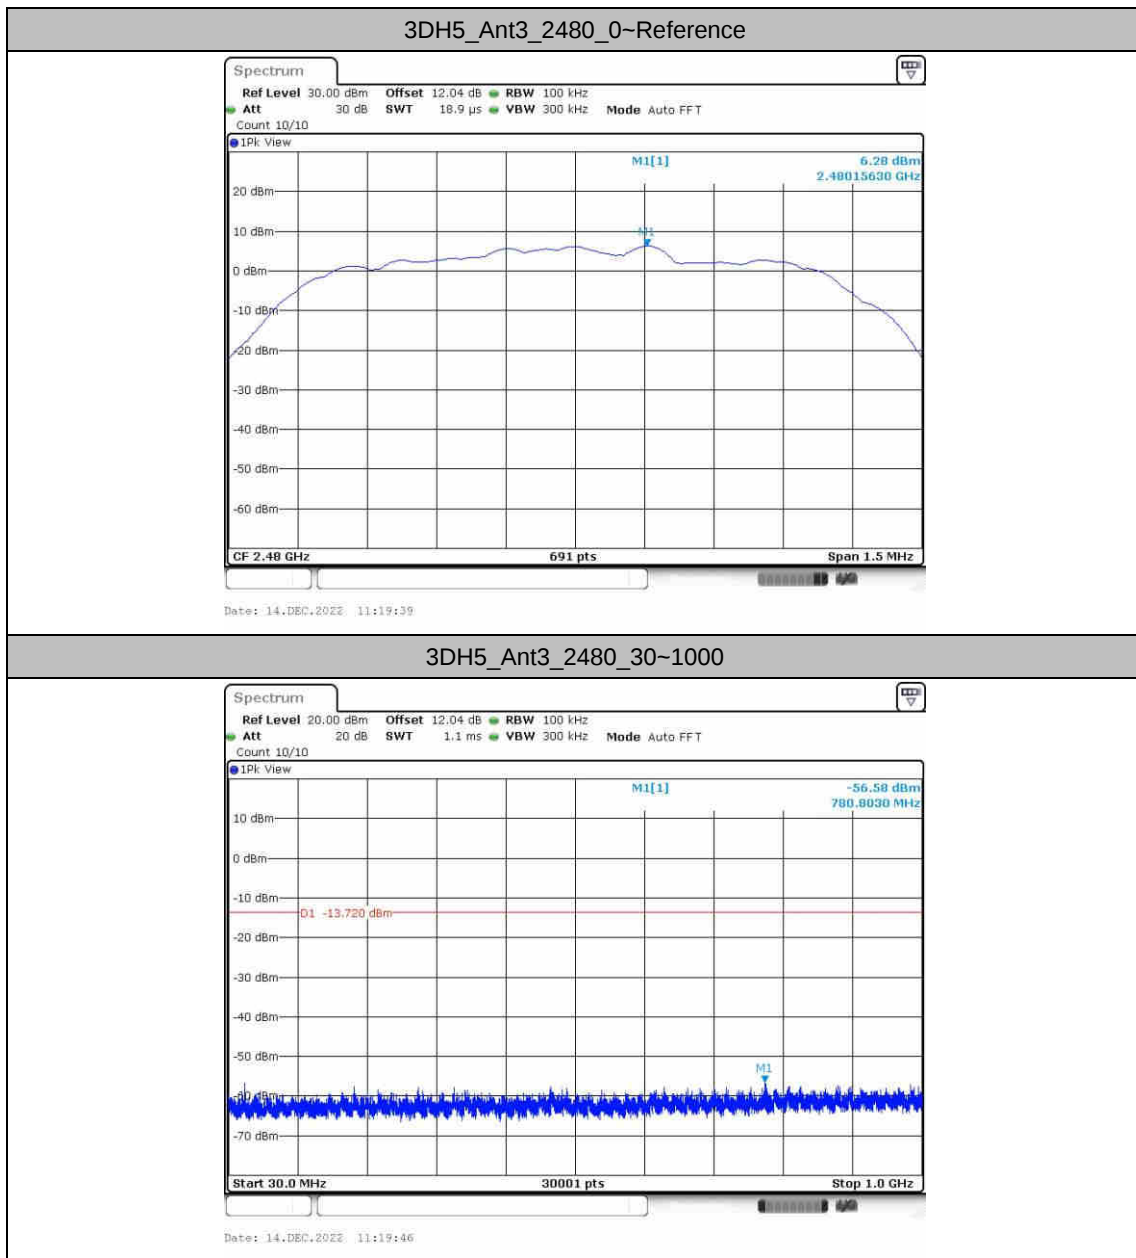

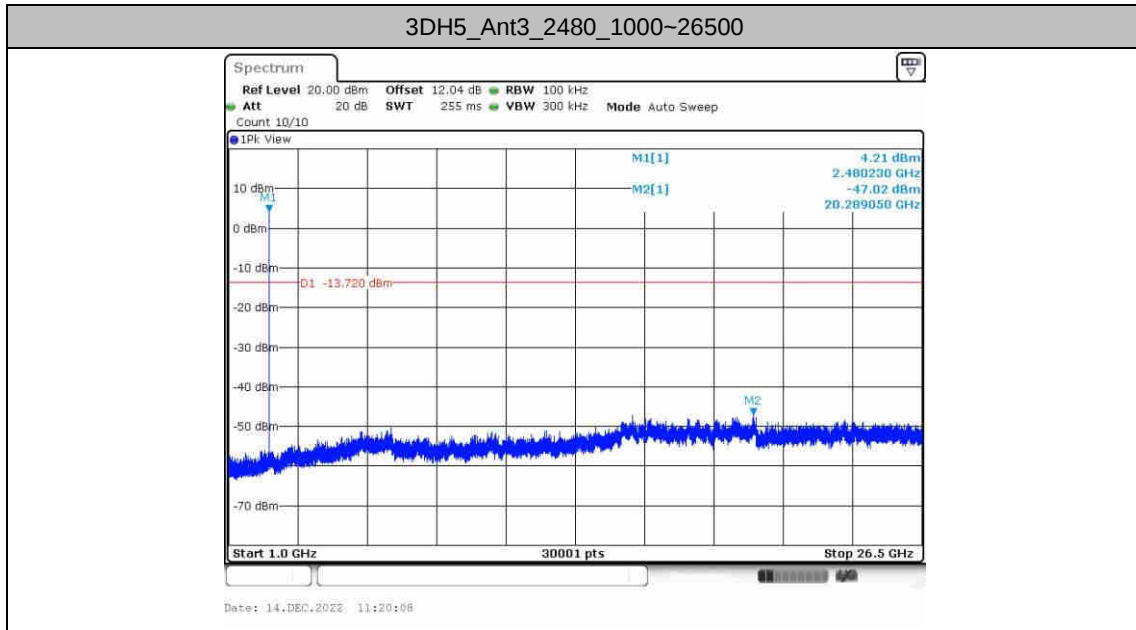




Appendix B. AC Conducted Emission Test Results

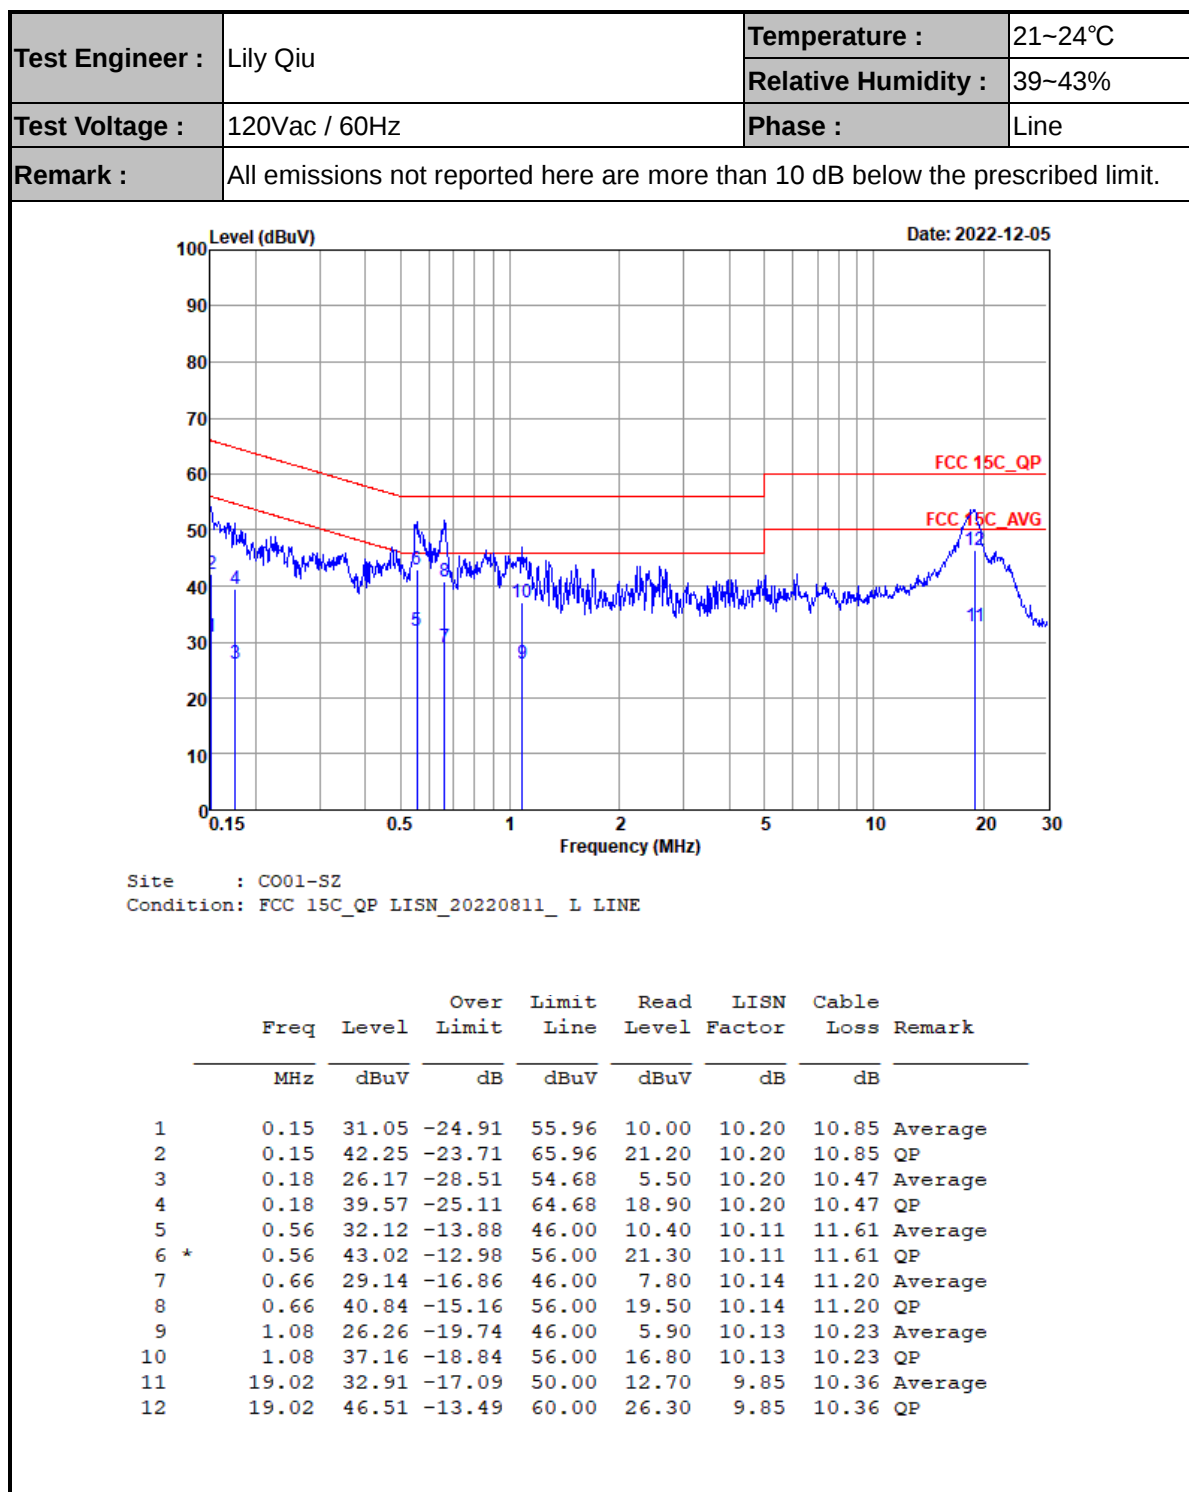



Test Engineer :	Lily Qiu	Temperature :	21~24°C
		Relative Humidity :	39~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

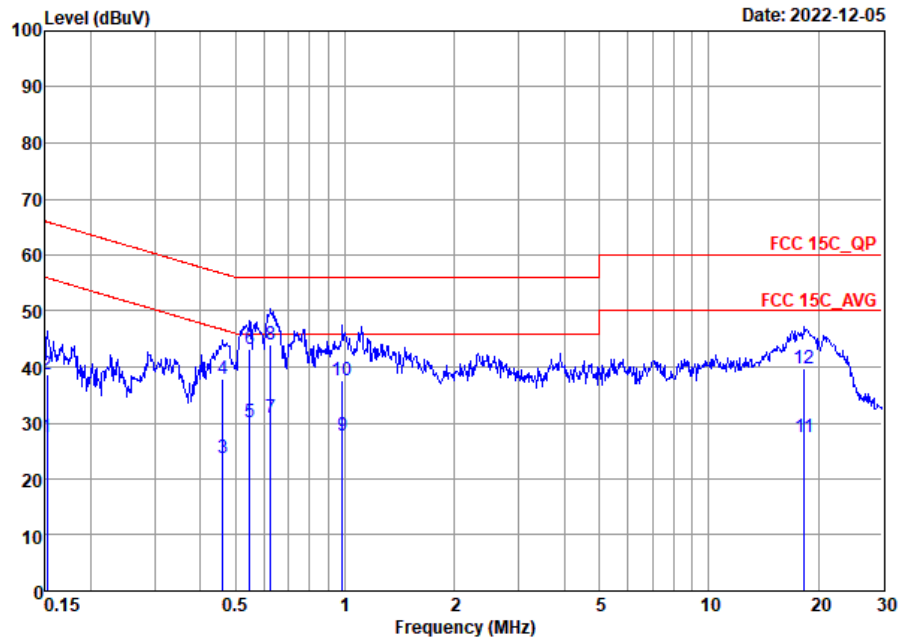

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20220811_ N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	27.54	-28.37	55.91	6.40	10.31	10.83	Average
2	0.15	38.64	-27.27	65.91	17.50	10.31	10.83	QP
3	0.46	23.80	-22.87	46.67	1.90	10.19	11.71	Average
4	0.46	37.90	-18.77	56.67	16.00	10.19	11.71	QP
5	0.55	30.17	-15.83	46.00	8.31	10.21	11.65	Average
6	0.55	43.27	-12.73	56.00	21.41	10.21	11.65	QP
7	0.62	30.96	-15.04	46.00	9.40	10.23	11.33	Average
8 *	0.62	44.06	-11.94	56.00	22.50	10.23	11.33	QP
9	0.98	27.77	-18.23	46.00	7.30	10.20	10.27	Average
10	0.98	37.67	-18.33	56.00	17.20	10.20	10.27	QP
11	18.33	27.53	-22.47	50.00	7.40	9.78	10.35	Average
12	18.33	39.63	-20.37	60.00	19.50	9.78	10.35	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission Test Data

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	Bluetooth BR_GFSK	00	2402	1DH5	-	-
Mode 2	2400-2483.5	3	Bluetooth BR_GFSK	39	2441	1DH5	-	-
Mode 3	2400-2483.5	3	Bluetooth BR_GFSK	78	2480	1DH5	-	-
Mode 4	2400-2483.5	3	Bluetooth BR_GFSK	78	2480	1DH5	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	4804.00	41.89	74.00	-32.11	H	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	7323.00	46.39	74.00	-27.61	V	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.68	47.37	74.00	-26.63	V	Peak	Pass	Band Edge
4	Bluetooth BR_GFSK	78	958.29	33.74	46.00	-12.26	H	Peak	Pass	LF



Mode	1																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																							
ANT	3																																																																																																							
Pol.	Horizontal								Fundamental																																																																																															
Peak	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 1 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><tr><th></th><th>Freq Level</th><th>Limit Line</th><th>Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos #</th><th>TPos #</th><th>Remark</th></tr><tr><th></th><th>MHz dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2386.13 39.97</td><td>74.00</td><td>-34.03</td><td>40.95</td><td>27.51</td><td>5.36</td><td>33.85</td><td>0.00</td><td>227</td><td>318 Peak</td></tr><tr><td>2</td><td>2386.13 15.18</td><td>54.00</td><td>-38.82</td><td>16.16</td><td>27.51</td><td>5.36</td><td>33.85</td><td>0.00</td><td>227</td><td>318 Average</td></tr></table>									Freq Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos #	TPos #	Remark		MHz dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB				1	2386.13 39.97	74.00	-34.03	40.95	27.51	5.36	33.85	0.00	227	318 Peak	2	2386.13 15.18	54.00	-38.82	16.16	27.51	5.36	33.85	0.00	227	318 Average	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 1 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><tr><th></th><th>Freq Level</th><th>Limit Line</th><th>Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos #</th><th>TPos #</th><th>Remark</th></tr><tr><th></th><th>MHz dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2402.00 96.63</td><td>-----</td><td>-----</td><td>97.52</td><td>27.57</td><td>5.37</td><td>33.83</td><td>0.00</td><td>227</td><td>318 Peak</td></tr><tr><td>2</td><td>2402.00 71.84</td><td>-----</td><td>-----</td><td>72.73</td><td>27.57</td><td>5.37</td><td>33.83</td><td>0.00</td><td>227</td><td>318 Average</td></tr></table>									Freq Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos #	TPos #	Remark		MHz dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB				1	2402.00 96.63	-----	-----	97.52	27.57	5.37	33.83	0.00	227	318 Peak	2	2402.00 71.84	-----	-----	72.73	27.57	5.37	33.83	0.00	227	318 Average
		Freq Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos #	TPos #	Remark																																																																																													
		MHz dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
1	2386.13 39.97	74.00	-34.03	40.95	27.51	5.36	33.85	0.00	227	318 Peak																																																																																														
2	2386.13 15.18	54.00	-38.82	16.16	27.51	5.36	33.85	0.00	227	318 Average																																																																																														
	Freq Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos #	TPos #	Remark																																																																																														
	MHz dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	2402.00 96.63	-----	-----	97.52	27.57	5.37	33.83	0.00	227	318 Peak																																																																																														
2	2402.00 71.84	-----	-----	72.73	27.57	5.37	33.83	0.00	227	318 Average																																																																																														



Mode	1																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																								
ANT	3																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 1 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><tr><th>Freq Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2338.25</td><td>39.88</td><td>74.00</td><td>-34.12</td><td>41.10</td><td>27.35</td><td>5.32</td><td>33.89</td><td>0.00</td><td>134</td><td>82 Peak</td></tr><tr><td>2 2338.25</td><td>15.09</td><td>54.00</td><td>-38.91</td><td>16.31</td><td>27.35</td><td>5.32</td><td>33.89</td><td>0.00</td><td>134</td><td>82 Average</td></tr></table>						Freq Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2338.25	39.88	74.00	-34.12	41.10	27.35	5.32	33.89	0.00	134	82 Peak	2 2338.25	15.09	54.00	-38.91	16.31	27.35	5.32	33.89	0.00	134	82 Average	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 1 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><tr><th>Freq Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>95.86</td><td>-----</td><td>96.75</td><td>27.57</td><td>5.37</td><td>33.83</td><td>0.00</td><td>134</td><td>82 Peak</td></tr><tr><td>2 2402.00</td><td>71.07</td><td>-----</td><td>71.96</td><td>27.57</td><td>5.37</td><td>33.83</td><td>0.00</td><td>134</td><td>82 Average</td></tr></table>					Freq Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2402.00	95.86	-----	96.75	27.57	5.37	33.83	0.00	134	82 Peak	2 2402.00	71.07	-----	71.96	27.57	5.37	33.83	0.00	134	82 Average
	Freq Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2338.25	39.88	74.00	-34.12	41.10	27.35	5.32	33.89	0.00	134	82 Peak																																																																															
2 2338.25	15.09	54.00	-38.91	16.31	27.35	5.32	33.89	0.00	134	82 Average																																																																															
Freq Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2402.00	95.86	-----	96.75	27.57	5.37	33.83	0.00	134	82 Peak																																																																																
2 2402.00	71.07	-----	71.96	27.57	5.37	33.83	0.00	134	82 Average																																																																																



Mode	1																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																								
ANT	3																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Condition: PEAK_74 3m 91280-1474-2022 HORIZONTAL Project : 2N2910 Mode : 1 IMEI : 359709930024958 Plane : Z with Accessories Plane : DHS <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th></th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>41.89</td><td>74.00</td><td>-32.11</td><td>51.16</td><td>31.55</td><td>8.94</td><td>49.76</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>4804.00</td><td>17.10</td><td>54.00</td><td>-36.90</td><td>26.37</td><td>31.55</td><td>8.94</td><td>49.76</td><td>0.00</td><td>--- Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	#	#			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	4804.00	41.89	74.00	-32.11	51.16	31.55	8.94	49.76	0.00	--- Peak	2	4804.00	17.10	54.00	-36.90	26.37	31.55	8.94	49.76	0.00	--- Average	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Condition: PEAK_74 3m 91280-1474-2022 VERTICAL Project : 2N2910 Mode : 1 IMEI : 359709930024958 Plane : Z with Accessories Plane : DHS <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th></th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>41.08</td><td>74.00</td><td>-32.92</td><td>50.35</td><td>31.55</td><td>8.94</td><td>49.76</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>4804.00</td><td>16.29</td><td>54.00</td><td>-37.71</td><td>25.56</td><td>31.55</td><td>8.94</td><td>49.76</td><td>0.00</td><td>--- Average</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	#	#			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	4804.00	41.08	74.00	-32.92	50.35	31.55	8.94	49.76	0.00	--- Peak	2	4804.00	16.29	54.00	-37.71	25.56	31.55	8.94	49.76	0.00	--- Average
		Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	#	#																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	4804.00	41.89	74.00	-32.11	51.16	31.55	8.94	49.76	0.00	--- Peak																																																																																																															
2	4804.00	17.10	54.00	-36.90	26.37	31.55	8.94	49.76	0.00	--- Average																																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	#	#																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	4804.00	41.08	74.00	-32.92	50.35	31.55	8.94	49.76	0.00	--- Peak																																																																																																															
2	4804.00	16.29	54.00	-37.71	25.56	31.55	8.94	49.76	0.00	--- Average																																																																																																															



Mode	2																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																													
ANT	3																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																							
Peak Avg	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Margin Condition: PEAK_74 3m 91280-1474-2022 HORIZONTAL Project : 2N2910 Mode : 2 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th></th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>#</th><th>#</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4882.00</td><td>41.89</td><td>74.00</td><td>-32.11</td><td>51.28</td><td>31.69</td><td>8.70</td><td>49.78</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>17.10</td><td>54.00</td><td>-36.90</td><td>26.49</td><td>31.69</td><td>8.70</td><td>49.78</td><td>0.00</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>46.37</td><td>74.00</td><td>-27.63</td><td>49.95</td><td>36.22</td><td>10.18</td><td>49.98</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	#	#	cm	deg	1	4882.00	41.89	74.00	-32.11	51.28	31.69	8.70	49.78	0.00	---	---	Peak	2	4882.00	17.10	54.00	-36.90	26.49	31.69	8.70	49.78	0.00	---	---	Average	3	7323.00	46.37	74.00	-27.63	49.95	36.22	10.18	49.98	0.00	---	---	Peak	Level (dBuV) Date: 2022-12-15 Site : 03CH04-SZ Margin Condition: PEAK_74 3m 91280-1474-2022 VERTICAL Project : 2N2910 Mode : 2 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th></th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>#</th><th>#</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4882.00</td><td>41.19</td><td>74.00</td><td>-32.81</td><td>50.58</td><td>31.69</td><td>8.70</td><td>49.78</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>16.40</td><td>54.00</td><td>-37.60</td><td>25.79</td><td>31.69</td><td>8.70</td><td>49.78</td><td>0.00</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>49.97</td><td>36.22</td><td>10.18</td><td>49.98</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	#	#	cm	deg	1	4882.00	41.19	74.00	-32.81	50.58	31.69	8.70	49.78	0.00	---	---	Peak	2	4882.00	16.40	54.00	-37.60	25.79	31.69	8.70	49.78	0.00	---	---	Average	3	7323.00	46.39	74.00	-27.61	49.97	36.22	10.18	49.98	0.00	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark																																																																																																																																	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	#	#	cm	deg																																																																																																																																	
1	4882.00	41.89	74.00	-32.11	51.28	31.69	8.70	49.78	0.00	---	---	Peak																																																																																																																																		
2	4882.00	17.10	54.00	-36.90	26.49	31.69	8.70	49.78	0.00	---	---	Average																																																																																																																																		
3	7323.00	46.37	74.00	-27.63	49.95	36.22	10.18	49.98	0.00	---	---	Peak																																																																																																																																		
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp		APos	TPos	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	#	#	cm	deg																																																																																																																																		
1	4882.00	41.19	74.00	-32.81	50.58	31.69	8.70	49.78	0.00	---	---	Peak																																																																																																																																		
2	4882.00	16.40	54.00	-37.60	25.79	31.69	8.70	49.78	0.00	---	---	Average																																																																																																																																		
3	7323.00	46.39	74.00	-27.61	49.97	36.22	10.18	49.98	0.00	---	---	Peak																																																																																																																																		





Mode	3																																																																																																																																														
	Band Edge																																																																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																														
ANT	3																																																																																																																																														
Pol.	Horizontal								Fundamental																																																																																																																																						
Peak	Level (dBuV) Date: 2022-12-15 PEAK_BE_74								Level (dBuV) Date: 2022-12-15 PEAK_74 AVG_54																																																																																																																																						
	Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 3 IMEI : 359709930024958 Plane : Z with Accessories : DHS								Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 3 IMEI : 359709930024958 Plane : Z with Accessories : DHS																																																																																																																																						
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.76</td><td>44.55</td><td>74.00</td><td>-29.45</td><td>44.96</td><td>27.84</td><td>5.46</td><td>33.71</td><td>0.00</td><td></td><td>331</td><td>319</td><td></td><td></td><td>Peak</td></tr><tr><td>2</td><td>2483.76</td><td>19.76</td><td>54.00</td><td>-34.24</td><td>20.17</td><td>27.84</td><td>5.46</td><td>33.71</td><td>0.00</td><td></td><td>331</td><td>319</td><td></td><td></td><td>Average</td></tr></table>									Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg		1	2483.76	44.55	74.00	-29.45	44.96	27.84	5.46	33.71	0.00		331	319			Peak	2	2483.76	19.76	54.00	-34.24	20.17	27.84	5.46	33.71	0.00		331	319			Average	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>95.98</td><td>-----</td><td>-----</td><td>96.41</td><td>27.83</td><td>5.46</td><td>33.72</td><td>0.00</td><td></td><td>331</td><td>319</td><td></td><td></td><td>Peak</td></tr><tr><td>2</td><td>2480.00</td><td>71.19</td><td>-----</td><td>-----</td><td>71.62</td><td>27.83</td><td>5.46</td><td>33.72</td><td>0.00</td><td></td><td>331</td><td>319</td><td></td><td></td><td>Average</td></tr></table>									Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg		1	2480.00	95.98	-----	-----	96.41	27.83	5.46	33.72	0.00		331	319			Peak	2	2480.00	71.19	-----	-----	71.62	27.83	5.46	33.72	0.00		331	319		
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg																																																																																																																																	
1	2483.76	44.55	74.00	-29.45	44.96	27.84	5.46	33.71	0.00		331	319			Peak																																																																																																																																
2	2483.76	19.76	54.00	-34.24	20.17	27.84	5.46	33.71	0.00		331	319			Average																																																																																																																																
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg																																																																																																																																	
1	2480.00	95.98	-----	-----	96.41	27.83	5.46	33.72	0.00		331	319			Peak																																																																																																																																
2	2480.00	71.19	-----	-----	71.62	27.83	5.46	33.72	0.00		331	319			Average																																																																																																																																



Mode	3																																																																																																																																															
	Band Edge																																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																															
ANT	3																																																																																																																																															
Pol.	Vertical								Fundamental																																																																																																																																							
Peak	Level (dBuV) Date: 2022-12-15 PEAK_BE_74 AVG_54 Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 3 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.68</td><td>47.37</td><td>74.00</td><td>-26.63</td><td>47.78</td><td>27.84</td><td>5.46</td><td>33.71</td><td>0.00</td><td>134</td><td>82</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>2483.68</td><td>22.58</td><td>54.00</td><td>-31.42</td><td>22.99</td><td>27.84</td><td>5.46</td><td>33.71</td><td>0.00</td><td>134</td><td>82</td><td>Average</td><td></td><td></td><td></td></tr></table>									Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB			cm	deg		1	2483.68	47.37	74.00	-26.63	47.78	27.84	5.46	33.71	0.00	134	82	Peak				2	2483.68	22.58	54.00	-31.42	22.99	27.84	5.46	33.71	0.00	134	82	Average				Level (dBuV) Date: 2022-12-15 PEAK_74 AVG_54 Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 3 IMEI : 359709930024958 Plane : Z with Accessories : DHS <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>96.66</td><td>-----</td><td>-----</td><td>97.09</td><td>27.83</td><td>5.46</td><td>33.72</td><td>0.00</td><td>134</td><td>82</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>2480.00</td><td>71.87</td><td>-----</td><td>-----</td><td>72.30</td><td>27.83</td><td>5.46</td><td>33.72</td><td>0.00</td><td>134</td><td>82</td><td>Average</td><td></td><td></td><td></td></tr></table>									Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB			cm	deg		1	2480.00	96.66	-----	-----	97.09	27.83	5.46	33.72	0.00	134	82	Peak				2	2480.00	71.87	-----	-----	72.30	27.83	5.46	33.72	0.00	134	82	Average			
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB			cm	deg																																																																																																																																	
1	2483.68	47.37	74.00	-26.63	47.78	27.84	5.46	33.71	0.00	134	82	Peak																																																																																																																																				
2	2483.68	22.58	54.00	-31.42	22.99	27.84	5.46	33.71	0.00	134	82	Average																																																																																																																																				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB			cm	deg																																																																																																																																		
1	2480.00	96.66	-----	-----	97.09	27.83	5.46	33.72	0.00	134	82	Peak																																																																																																																																				
2	2480.00	71.87	-----	-----	72.30	27.83	5.46	33.72	0.00	134	82	Average																																																																																																																																				

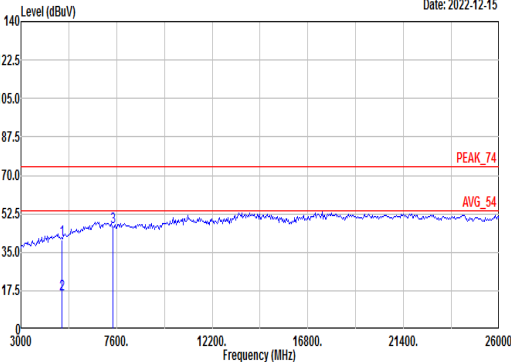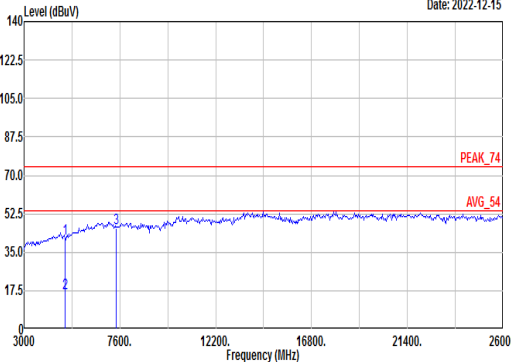

Mode	3																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																								
ANT	3																																																																																																																																																								
Pol.	Horizontal							Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																									
	Site : 03CH04-SZ Condition: PEAK_74 3m 91280-1474-2022 HORIZONTAL Project : 2N2910 Mode : 3 IMEI : 359709930024958 Plane : Z with Accessories : DHS							Site : 03CH04-SZ Condition: PEAK_74 3m 91280-1474-2022 VERTICAL Project : 2N2910 Mode : 3 IMEI : 359709930024958 Plane : Z with Accessories : DHS																																																																																																																																																	
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>40.72</td><td>74.00</td><td>-33.28</td><td>50.22</td><td>31.83</td><td>8.46</td><td>49.79</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>15.93</td><td>54.00</td><td>-38.07</td><td>25.43</td><td>31.83</td><td>8.46</td><td>49.79</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>50.06</td><td>36.34</td><td>10.17</td><td>50.26</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	Margin	Level	Factor	Loss	Factor						1	4960.00	40.72	74.00	-33.28	50.22	31.83	8.46	49.79	0.00	---	---	---	Peak	2	4960.00	15.93	54.00	-38.07	25.43	31.83	8.46	49.79	0.00	---	---	---	Average	3	7440.00	46.31	74.00	-27.69	50.06	36.34	10.17	50.26	0.00	---	---	---	Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.26</td><td>74.00</td><td>-32.74</td><td>50.76</td><td>31.83</td><td>8.46</td><td>49.79</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>16.47</td><td>54.00</td><td>-37.53</td><td>25.97</td><td>31.83</td><td>8.46</td><td>49.79</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>49.97</td><td>36.34</td><td>10.17</td><td>50.26</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	Margin	Level	Factor	Loss	Factor						1	4960.00	41.26	74.00	-32.74	50.76	31.83	8.46	49.79	0.00	---	---	---	Peak	2	4960.00	16.47	54.00	-37.53	25.97	31.83	8.46	49.79	0.00	---	---	---	Average	3	7440.00	46.22	74.00	-27.78	49.97	36.34	10.17	50.26	0.00	---	---	---
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	#	#	APos	TPos	Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	Margin	Level	Factor	Loss	Factor																																																																																																																																																	
1	4960.00	40.72	74.00	-33.28	50.22	31.83	8.46	49.79	0.00	---	---	---	Peak																																																																																																																																												
2	4960.00	15.93	54.00	-38.07	25.43	31.83	8.46	49.79	0.00	---	---	---	Average																																																																																																																																												
3	7440.00	46.31	74.00	-27.69	50.06	36.34	10.17	50.26	0.00	---	---	---	Peak																																																																																																																																												
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	#	#	APos	TPos	Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	Margin	Level	Factor	Loss	Factor																																																																																																																																																	
1	4960.00	41.26	74.00	-32.74	50.76	31.83	8.46	49.79	0.00	---	---	---	Peak																																																																																																																																												
2	4960.00	16.47	54.00	-37.53	25.97	31.83	8.46	49.79	0.00	---	---	---	Average																																																																																																																																												
3	7440.00	46.22	74.00	-27.78	49.97	36.34	10.17	50.26	0.00	---	---	---	Peak																																																																																																																																												




Mode	4																																																																																																																																																																																																																																																																															
	LF																																																																																																																																																																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																																																																																															
ANT	3																																																																																																																																																																																																																																																																															
Pol.	Horizontal												Vertical																																																																																																																																																																																																																																																																			
QP/Peak	Level (dBuV) Date: 2022-12-18 FCC CLASS-B 30244186128061000 Frequency (MHz) Site : 03CH04-SZ Margin Condition: FCC CLASS-B 3m LF_ANT_41909_22 HORIZONTAL Project : 2N2910 Mode : 4 IMEI : 359709930024958 Plane : Z with Accessories DHS <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>24.34</td><td>40.00</td><td>-15.66</td><td>29.85</td><td>25.86</td><td>0.53</td><td>31.90</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>112.45</td><td>18.75</td><td>43.50</td><td>-24.75</td><td>32.21</td><td>17.16</td><td>1.08</td><td>31.70</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>294.81</td><td>24.39</td><td>46.00</td><td>-21.61</td><td>33.90</td><td>19.81</td><td>1.79</td><td>31.11</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>624.61</td><td>29.06</td><td>46.00</td><td>-16.94</td><td>31.00</td><td>26.44</td><td>2.60</td><td>30.98</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>785.63</td><td>31.28</td><td>46.00</td><td>-14.72</td><td>30.48</td><td>28.79</td><td>2.91</td><td>30.90</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>33.74</td><td>46.00</td><td>-12.26</td><td>30.27</td><td>30.98</td><td>3.24</td><td>30.75</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg		1	30.00	24.34	40.00	-15.66	29.85	25.86	0.53	31.90	0.00	---	---	---	---	---	Peak	2	112.45	18.75	43.50	-24.75	32.21	17.16	1.08	31.70	0.00	---	---	---	---	---	Peak	3	294.81	24.39	46.00	-21.61	33.90	19.81	1.79	31.11	0.00	---	---	---	---	---	Peak	4	624.61	29.06	46.00	-16.94	31.00	26.44	2.60	30.98	0.00	---	---	---	---	---	Peak	5	785.63	31.28	46.00	-14.72	30.48	28.79	2.91	30.90	0.00	---	---	---	---	---	Peak	6	958.29	33.74	46.00	-12.26	30.27	30.98	3.24	30.75	0.00	---	---	---	---	---	Peak	Level (dBuV) Date: 2022-12-18 FCC CLASS-B 30244186128061000 Frequency (MHz) Site : 03CH04-SZ Margin Condition: FCC CLASS-B 3m LF_ANT_41909_22 VERTICAL Project : 2N2910 Mode : 4 IMEI : 359709930024958 Plane : Z with Accessories DHS <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>#</th><th>#</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>27.32</td><td>40.00</td><td>-12.68</td><td>32.83</td><td>25.86</td><td>0.53</td><td>31.90</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>53.28</td><td>22.09</td><td>40.00</td><td>-17.91</td><td>39.52</td><td>13.70</td><td>0.73</td><td>31.86</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>224.97</td><td>21.94</td><td>46.00</td><td>-24.06</td><td>34.77</td><td>16.88</td><td>1.54</td><td>31.25</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>307.42</td><td>23.59</td><td>46.00</td><td>-22.41</td><td>32.81</td><td>20.04</td><td>1.83</td><td>31.09</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>660.50</td><td>28.64</td><td>46.00</td><td>-17.36</td><td>30.38</td><td>26.53</td><td>2.67</td><td>30.94</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>937.92</td><td>32.99</td><td>46.00</td><td>-13.01</td><td>29.93</td><td>30.72</td><td>3.21</td><td>30.87</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>					Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg		1	30.00	27.32	40.00	-12.68	32.83	25.86	0.53	31.90	0.00	---	---	---	---	---	Peak	2	53.28	22.09	40.00	-17.91	39.52	13.70	0.73	31.86	0.00	---	---	---	---	---	Peak	3	224.97	21.94	46.00	-24.06	34.77	16.88	1.54	31.25	0.00	---	---	---	---	---	Peak	4	307.42	23.59	46.00	-22.41	32.81	20.04	1.83	31.09	0.00	---	---	---	---	---	Peak	5	660.50	28.64	46.00	-17.36	30.38	26.53	2.67	30.94	0.00	---	---	---	---	---	Peak	6	937.92	32.99	46.00	-13.01	29.93	30.72	3.21	30.87	0.00	---	---	---	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark																																																																																																																																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg																																																																																																																																																																																																																																																																	
	1	30.00	24.34	40.00	-15.66	29.85	25.86	0.53	31.90	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																
	2	112.45	18.75	43.50	-24.75	32.21	17.16	1.08	31.70	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																
	3	294.81	24.39	46.00	-21.61	33.90	19.81	1.79	31.11	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																
	4	624.61	29.06	46.00	-16.94	31.00	26.44	2.60	30.98	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																
	5	785.63	31.28	46.00	-14.72	30.48	28.79	2.91	30.90	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																
	6	958.29	33.74	46.00	-12.26	30.27	30.98	3.24	30.75	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	Factor	#	#	APos	TPos	Remark																																																																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				cm	deg																																																																																																																																																																																																																																																																		
1	30.00	27.32	40.00	-12.68	32.83	25.86	0.53	31.90	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																	
2	53.28	22.09	40.00	-17.91	39.52	13.70	0.73	31.86	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																	
3	224.97	21.94	46.00	-24.06	34.77	16.88	1.54	31.25	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																	
4	307.42	23.59	46.00	-22.41	32.81	20.04	1.83	31.09	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																	
5	660.50	28.64	46.00	-17.36	30.38	26.53	2.67	30.94	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																	
6	937.92	32.99	46.00	-13.01	29.93	30.72	3.21	30.87	0.00	---	---	---	---	---	Peak																																																																																																																																																																																																																																																																	




Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

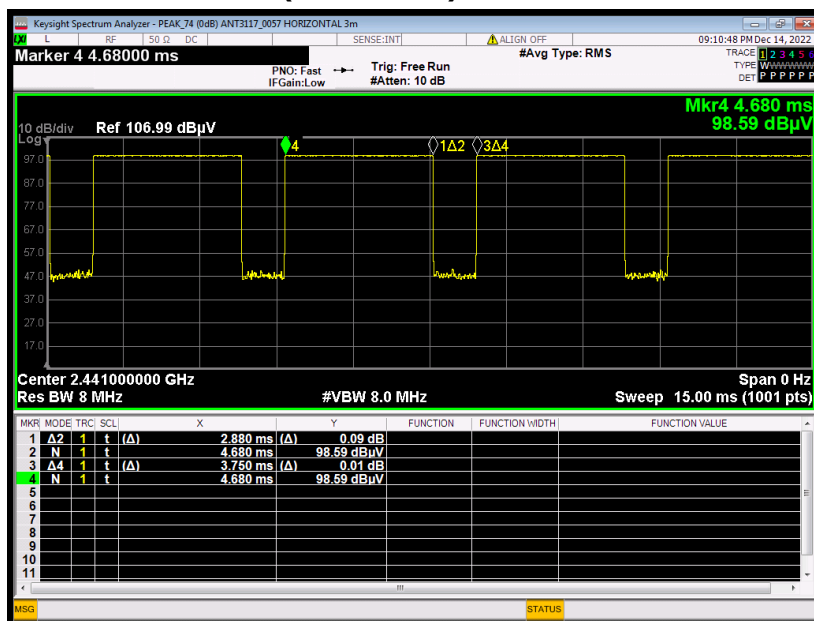

DH5 on time (Count Pulses) Plot on Channel 39

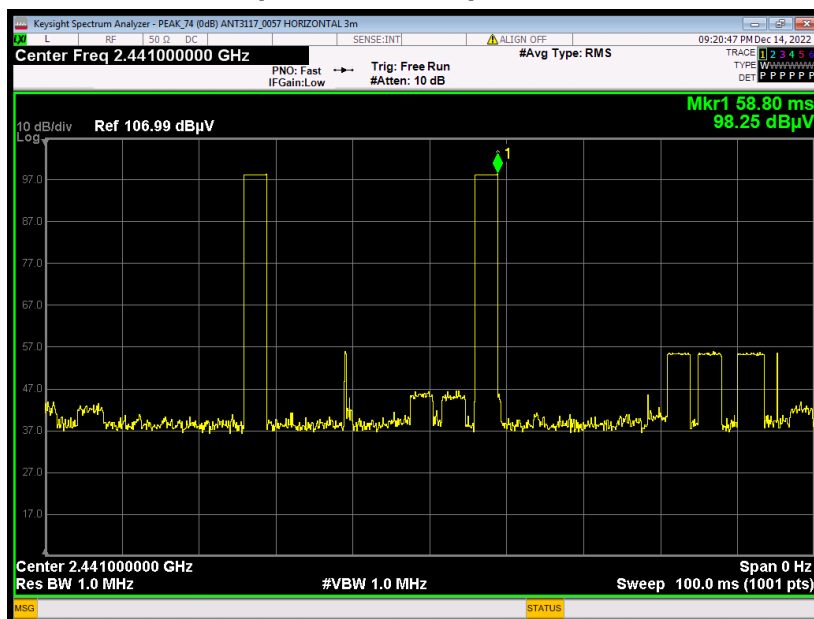

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.