



ELEMENT MATERIALS TECHNOLOGY

(formerly PCTEST)

18855 Adams Ct, Morgan Hill, CA 95307 USA

Tel. +1.410.290.6652 / Fax +1.410.290.6654

http://www.element.com



SAR EVALUATION REPORT

Applicant Name:

Apple, Inc.
One Apple Park Way
Cupertino, CA 95014 USA

Date of Testing:

06/06/2022 – 08/31/2022

Test Site/Location:

Element, Morgan Hill, CA, USA

Document Serial No.:

1C2205090038-22.BCG (Rev 1)

FCC ID:

BCG-A2772

APPLICANT:

APPLE, INC.

DUT Type:

Watch

Application Type:

Certification

FCC Rule Part(s):

CFR §2.10931

Model:

A2772

Equipment Class	Band & Mode	Tx Frequency	SAR	
			1g Head (W/kg)	10g Extremity (W/kg)
PCT	UMTS 850	826.40 - 846.60 MHz	< 0.1	0.18
PCT	UMTS 1750	1712.4 - 1752.6 MHz	0.29	0.19
PCT	UMTS 1900	1852.4 - 1907.6 MHz	0.59	0.34
PCT	LTE Band 12	699.7 - 715.3 MHz	< 0.1	0.15
PCT	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A
PCT	LTE Band 13	779.5 - 784.5 MHz	< 0.1	0.28
PCT	LTE Band 14	790.5 - 795.5 MHz	< 0.1	0.24
PCT	LTE Band 26 (Cell)	814.7 - 848.3 MHz	< 0.1	0.19
PCT	LTE Band 5 (Cell)	824.7 - 848.3 MHz	< 0.1	0.26
PCT	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.36	0.28
PCT	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A
PCT	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.51	0.45
PCT	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A
PCT	LTE Band 7	2502.5 - 2567.5 MHz	1.16	1.03
PCT	LTE Band 41	2498.5 - 2687.5 MHz	0.40	0.75
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.28	0.25
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A
NII	U-NII-2A	5260 - 5320 MHz	< 0.1	< 0.1
NII	U-NII-2C	5500 - 5720 MHz	< 0.1	< 0.1
NII	U-NII-3	5745 - 5825 MHz	< 0.1	< 0.1
DSS/DTS	Bluetooth	2402 - 2480 MHz	< 0.1	0.12
Simultaneous SAR per KDB 690783 D01v0103:			1.44	1.28

Note: This revised Test Report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly

This watch has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez

Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 1 of 58

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	9
3	INTRODUCTION	10
4	DOSIMETRIC ASSESSMENT	11
5	TEST CONFIGURATION POSITIONS.....	12
6	RF EXPOSURE LIMITS	13
7	FCC MEASUREMENT PROCEDURES.....	14
8	RF CONDUCTED POWERS.....	19
9	SYSTEM VERIFICATION.....	32
10	SAR DATA SUMMARY	37
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	49
12	SAR MEASUREMENT VARIABILITY	53
13	EQUIPMENT LIST.....	54
14	MEASUREMENT UNCERTAINTIES.....	55
15	CONCLUSION.....	56
16	REFERENCES	57
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: SAR SYSTEM VALIDATION		
APPENDIX E: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX F: LOWER BANDWIDTH RF CONDUCTED POWERS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 2 of 58

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 14	Voice/Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
UWB	Data	6489.6 - 7987.2 MHz

1.2 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for LTE Band 7 during next to mouth scenarios. When the speaker is on, the output power of LTE Band 7 is reduced. Detailed descriptions of the power reduction mechanisms are included in the operational description. The power reduction mechanisms were confirmed during the SAR evaluation.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 3 of 58

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power – UMTS Mode

Mode/Band	Antenna	Modulated Average Output Power (in dBm)		
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6
UMTS Band 5 (850 MHz)	Max allowed power	25.00	25.00	24.00
	Nominal	24.00	24.00	23.00
UMTS Band 4 (1750 MHz)	Max allowed power	24.00	24.00	24.00
	Nominal	23.00	23.00	23.00
UMTS Band 2 (1900 MHz)	Max allowed power	24.00	24.00	24.00
	Nominal	23.00	23.00	23.00

1.3.2 Maximum Output Power – LTE Mode

Mode / Band		Modulated Average Output Power (in dBm)
LTE FDD Band 12	Max allowed power	25.50
	Nominal	24.50
LTE FDD Band 17	Max allowed power	25.50
	Nominal	24.50
LTE FDD Band 13	Max allowed power	25.50
	Nominal	24.50
LTE FDD Band 14	Max allowed power	25.50
	Nominal	24.50
LTE FDD Band 26	Max allowed power	25.50
	Nominal	24.50
LTE FDD Band 5 (Cell)	Max allowed power	25.50
	Nominal	24.50
LTE FDD Band 4 (AWS)	Max allowed power	24.50
	Nominal	23.50
LTE FDD Band 66 (AWS)	Max allowed power	24.50
	Nominal	23.50
LTE FDD Band 2 (PCS)	Max allowed power	24.50
	Nominal	23.50
LTE FDD Band 25 (PCS)	Max allowed power	24.50
	Nominal	23.50
LTE FDD Band 7 Reduced	Max allowed power	23.00
	Nominal	22.00
LTE FDD Band 7	Max allowed power	24.00
	Nominal	23.00
LTE TDD Band 41	Max allowed power	24.00
	Nominal	23.00

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 4 of 58

1.3.3

Maximum Output Power – WiFi Mode

Mode/ Band			IEEE 802.11b (2.4 GHz)		IEEE 802.11g (2.4 GHz)		IEEE 802.11n (2.4 GHz)	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm)	20 MHz Bandwidth	1	19.00	18.00	17.00	16.00	17.00	16.00
		2	19.00	18.00	18.50	17.50	18.50	17.50
		3	19.00	18.00	18.50	17.50	18.50	17.50
		4	19.00	18.00	18.50	17.50	18.50	17.50
		5	19.00	18.00	18.50	17.50	18.50	17.50
		6	19.00	18.00	18.50	17.50	18.50	17.50
		7	19.00	18.00	18.50	17.50	18.50	17.50
		8	19.00	18.00	18.50	17.50	18.50	17.50
		9	19.00	18.00	18.50	17.50	18.50	17.50
		10	19.00	18.00	18.00	17.00	18.00	17.00
		11	19.00	18.00	16.50	15.50	16.50	15.50
		12	18.00	17.00	15.50	14.50	15.50	14.50
		13	17.00	16.00	4.50	3.50	4.50	3.50

Mode/ Band			IEEE 802.11a (5 GHz)		IEEE 802.11n (5 GHz)	
		Channel	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm)	20 MHz Bandwidth	36	17.00	16.00	17.00	16.00
		40	17.00	16.00	17.00	16.00
		44	17.00	16.00	17.00	16.00
		48	17.00	16.00	17.00	16.00
		52	17.00	16.00	17.00	16.00
		56	17.00	16.00	17.00	16.00
		60	17.00	16.00	17.00	16.00
		64	17.00	16.00	17.00	16.00
		100	17.00	16.00	17.00	16.00
		104	17.00	16.00	17.00	16.00
		108	17.00	16.00	17.00	16.00
		112	17.00	16.00	17.00	16.00
		116	17.00	16.00	17.00	16.00
		120	17.00	16.00	17.00	16.00
		124	17.00	16.00	17.00	16.00
		128	17.00	16.00	17.00	16.00
		132	17.00	16.00	17.00	16.00
		136	17.00	16.00	17.00	16.00
		140	14.00	13.00	14.00	13.00
		144	17.00	16.00	17.00	16.00
		149	17.00	16.00	17.00	16.00
		153	17.00	16.00	17.00	16.00
		157	17.00	16.00	17.00	16.00
		161	17.00	16.00	17.00	16.00
		165	17.00	16.00	17.00	16.00

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 5 of 58

1.3.4 Maximum Output Power – Bluetooth Mode

Mode / Band		Modulated Average - Single Tx Chain (dBm)
Bluetooth BDR/LE	Maximum	13.00
	Nominal	12.00
Bluetooth EDR	Maximum	13.00
	Nominal	12.00
Bluetooth HDR	Maximum	13.00
	Nominal	12.00

1.4 DUT Antenna Locations

A diagram showing the location of the device antennas can be found in Appendix E.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix E.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 6 of 58

**Table 1-1
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Extremity
1	UMTS + 2.4 GHz WI-FI	Yes	Yes
2	UMTS + 5 GHz WI-FI	Yes	Yes
3	UMTS + 2.4 GHz Bluetooth	Yes	Yes
4	UMTS + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes	Yes
5	LTE + 2.4 GHz WI-FI	Yes	Yes
6	LTE + 5 GHz WI-FI	Yes	Yes
7	LTE + 2.4 GHz Bluetooth	Yes	Yes
8	LTE + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes	Yes
9	2.4 GHz Bluetooth + 5 GHz WI-FI	Yes	Yes

1. 2.4 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. 2.4 GHz WLAN, and 5 GHz WLAN share the same antenna path and cannot transmit simultaneously.
3. Licensed modes cannot transmit simultaneously.
4. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN scenario.
5. This device supports VOLTE.
6. This device supports VOWIFI.

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

This device supports channel 1-13 for 2.4 GHz WLAN. However, due to the reduced output power for channels 12 and 13, channels 1, 6, and 11 were considered for SAR testing per KDB 248227 D01v02r02.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 7 of 58

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device is limited to 27 RB on the uplink for 16QAM modulation. Additional measurements were evaluated to support SAR test exclusion for 16 QAM as described in Section 7.5.4.

1.8 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r04 (3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance, Wrist-worn Device Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- IEEE 1528-2013

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

1.10 Device Housing Types and Wrist Band Types

This device has two housing types that were evaluated independently for SAR: Aluminum, and Stainless Steel. The device can also be used with different wristband accessories. The non-metallic wrist accessory, sport band, was evaluated for all exposure conditions. The available metallic wrist accessories, metal links band and metal loop band, were additionally evaluated.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 8 of 58

2 LTE INFORMATION

LTE Information					
Form Factor	Watch				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 14 (790.5 - 795.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1908.3 MHz)				
	LTE Band 7 (2502.5 - 2567.5 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 14: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)		
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)		
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)		
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)		
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)		
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)		
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)		
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A		
LTE Band 14: 5 MHz	790.5 (23305)	793 (23330)	795.5 (23355)		
LTE Band 14: 10 MHz	N/A	793 (23330)	N/A		
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)		
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)		
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)		
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)		
LTE Band 5 (Cell): 1.4 MHz	824.7 (26407)	836.5 (26525)	848.3 (26643)		
LTE Band 5 (Cell): 3 MHz	825.5 (26415)	836.5 (26525)	847.5 (26635)		
LTE Band 5 (Cell): 5 MHz	826.5 (26425)	836.5 (26525)	846.5 (26625)		
LTE Band 5 (Cell): 10 MHz	829 (26450)	836.5 (26525)	844 (26600)		
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	1745 (132322)	1779.3 (132665)		
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	1745 (132322)	1778.5 (132657)		
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	1745 (132322)	1777.5 (132647)		
LTE Band 66 (AWS): 10 MHz	1715 (132022)	1745 (132322)	1775 (132622)		
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	1745 (132322)	1772.5 (132597)		
LTE Band 66 (AWS): 20 MHz	1720 (132072)	1745 (132322)	1770 (132572)		
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)		
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)		
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)		
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)		
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)		
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)		
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)	1914.3 (26683)		
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)	1913.5 (26675)		
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)	1912.5 (26665)		
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)	1910 (26640)		
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)	1907.5 (26615)		
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)		
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)		
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)		
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)		
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)		
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)		
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)		
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)		
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)		
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)		
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)		
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	1				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Additional Information	This device does not support full CA features on 3GPP Release 12. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 12 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 9 of 58

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 10 of 58

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoomTV}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 11 of 58

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. Additionally, a manufacturer provided low-loss foam was used to position the device for head SAR evaluations.

5.2 Positioning for Head

Devices that are designed to be worn on the wrist may operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. When next-to-mouth SAR evaluation is required, the device is positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The device is evaluated with wrist bands strapped together to represent normal use conditions.

5.3 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. When extremity SAR evaluation is required, the device is evaluated with the back of the device touching the flat phantom, which is filled with head tissue-equivalent medium. The device was evaluated with Sport wristband unstrapped and touching the phantom. For Metal Loop and Metal Links wristbands, the device was evaluated with wristbands strapped and the distance between wristbands and the phantom was minimized to represent the spacing created by actual use conditions.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 12 of 58

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 13 of 58

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 14 of 58

7.4.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

7.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 15 of 58

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.
- e. This device can only operate with 16QAM on the uplink with less than or equal to 27 RB. For 16QAM configurations with 10 MHz, 15 MHz and 20 MHz bandwidths, LTE powers for RB size of 15 ("50% RB") and 27 ("100% RB") with offsets to upper edge, middle, and lower edge of the channel are additionally measured for both QPSK and 16QAM modulations to support comparison and SAR test exclusion per Section 5.2.4 and 5.3.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 16 of 58

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 17 of 58

7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.6.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 7.6.5). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 18 of 58

8 RF CONDUCTED POWERS

8.1 UMTS Conducted Powers

Table 8-1
Maximum Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.16	24.20	24.13	23.06	22.99	22.95	23.25	23.12	23.27	-
99		12.2 kbps AMR	24.09	24.15	24.08	22.85	22.78	22.74	23.09	23.03	23.04	-
6	HSDPA	Subtest 1	24.04	24.07	24.01	23.44	23.30	23.25	23.45	23.36	23.45	0
6		Subtest 2	23.75	23.77	23.78	22.45	22.42	22.35	22.64	22.59	22.59	0
6		Subtest 3	23.21	23.26	23.23	21.93	21.92	21.85	22.17	22.14	22.13	0.5
6		Subtest 4	22.94	22.93	22.98	21.70	21.67	21.61	21.96	21.90	21.87	0.5
6	HSUPA	Subtest 1	23.03	23.02	23.04	22.53	22.40	22.35	22.65	22.63	22.71	0
6		Subtest 2	21.49	21.51	21.52	20.25	20.22	20.13	20.45	20.41	20.39	2
6		Subtest 3	22.51	22.49	22.54	21.10	21.09	21.03	21.21	21.19	21.15	1
6		Subtest 4	21.75	21.76	21.81	20.47	20.51	20.41	20.71	20.66	20.65	2
6		Subtest 5	23.78	23.77	23.81	22.45	22.46	22.34	22.61	22.54	22.53	0

This device does not support DC-HSDPA.




Figure 8-1
Power Measurement Setup

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 19 of 58

8.2 LTE Conducted Powers

Per FCC KDB Publication 941225 D05v02r05, LTE SAR for the lower bandwidths was not required for testing since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg. Lower bandwidth conducted powers for all LTE bands can be found in appendix F.

Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

8.2.1 LTE Band 12

Table 8-2
LTE Band 12 Conducted Power - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.71	0	0
	1	25	24.76		0
	1	49	24.63		0
	25	0	23.69	0-1	1
	25	12	23.71		1
	25	25	23.72		1
	50	0	23.71		1
	15	0	23.60	0-1	1
	15	17	23.71		1
	15	35	23.67		1
	27	0	23.73	0-2	1
	27	12	23.73		1
	27	23	23.74		1
16QAM	1	0	23.39	0-2	1
	1	25	23.48		1
	1	49	23.55		1
	25	0	22.33	0-3	2
	25	12	22.36		2
	25	25	22.32		2
	15	0	22.30	0-5	2
	15	17	22.70		2
	15	35	22.31		2
	27	0	22.34		2
	27	12	22.35		2
	27	23	22.33		2

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 20 of 58

8.2.2

LTE Band 13

Table 8-3
LTE Band 13 Conducted Power - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.68	0	0
	1	25	24.70		0
	1	49	24.59		0
	25	0	23.75	0-1	1
	25	12	23.70		1
	25	25	23.77		1
	50	0	23.74		1
	15	0	23.75	0-1	1
	15	17	23.64		1
	15	35	23.75		1
	27	0	23.77	0-2	1
	27	12	23.71		1
	27	23	23.73		1
16QAM	1	0	23.64	0-2	1
	1	25	23.39		1
	1	49	23.54		1
	25	0	22.31	0-3	2
	25	12	22.26		2
	25	25	22.23		2
	15	0	22.26	0-5	2
	15	17	22.23		2
	15	35	22.24		2
	27	0	22.18		2
	27	12	22.21		2
	27	23	22.22		2

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 21 of 58

8.2.3

LTE Band 14

Table 8-4
LTE Band 14 Conducted Power - 10 MHz Bandwidth

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.42	0	0
	1	25	24.58		0
	1	49	24.31		0
	25	0	23.64	0-1	1
	25	12	23.66		1
	25	25	23.65		1
	50	0	23.65		1
	15	0	23.60	0-1	1
	15	17	23.66		1
	15	35	23.62		1
	27	0	23.66	0-2	1
	27	12	23.66		1
	27	23	23.67		1
16QAM	1	0	23.56	0-2	1
	1	25	23.71		1
	1	49	23.53		1
	25	0	22.11	0-3	2
	25	12	22.17		2
	25	25	22.13		2
	15	0	22.08	0-5	2
	15	17	22.15		2
	15	35	22.16		2
	27	0	22.13		2
	27	12	22.19		2
	27	23	22.16		2

8.2.4

LTE Band 26

Table 8-5
LTE Band 26 Conducted Power - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.67	24.61	24.72	0	0
	1	25	24.73	24.50	24.73		0
	1	49	24.76	24.59	24.68		0
	25	0	23.69	23.60	23.74	0-1	1
	25	12	23.70	23.61	23.71		1
	25	25	23.78	23.62	23.68		1
	50	0	23.77	23.69	23.70	0-1	1
	15	0	23.61	23.64	23.81		1
	15	17	23.71	23.64	23.74		1
	15	35	23.77	23.70	23.60	0-2	1
	27	0	23.72	23.59	23.81		1
	27	12	23.78	23.58	23.72		1
	27	23	23.75	23.65	23.64		1
16QAM	1	0	23.94	24.09	24.13	0-2	1
	1	25	24.03	24.02	24.14		1
	1	49	24.07	24.00	24.03		1
	25	0	22.67	22.73	22.80	0-3	2
	25	12	22.65	22.71	22.77		2
	25	25	22.70	22.70	22.67		2
	15	0	22.61	22.73	22.87	0-5	2
	15	17	22.68	22.71	22.83		2
	15	35	22.75	22.74	22.61		2
	27	0	22.60	22.61	22.82		2
	27	12	22.66	22.62	22.70		2
	27	23	22.72	22.61	22.65		2

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 23 of 58

8.2.5

LTE Band 5

Table 8-6
LTE Band 5 Conducted Power - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.93	0	0
	1	25	24.99		0
	1	49	25.15		0
	25	0	24.19	0-1	1
	25	12	24.24		1
	25	25	24.29		1
	50	0	24.28		1
	15	0	24.16	0-1	1
	15	17	24.28		1
	15	35	24.27		1
	27	0	24.22	0-2	1
	27	12	24.25		1
	27	23	24.29		1
16QAM	1	0	23.76	0-2	1
	1	25	23.72		1
	1	49	23.74		1
	25	0	22.66	0-3	2
	25	12	22.68		2
	25	25	22.61		2
	15	0	22.65	0-5	2
	15	17	22.68		2
	15	35	22.62		2
	27	0	22.67		2
	27	12	22.63		2
	27	23	22.61		2

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 24 of 58

8.2.6

LTE Band 66

Table 8-7
LTE Band 66 Conducted Power - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.09	23.30	23.04	0	0
	1	50	23.27	23.24	22.94		0
	1	99	23.44	23.26	23.03		0
	50	0	22.76	22.50	22.16	0-1	1
	50	25	22.60	22.45	22.22		1
	50	50	22.55	22.47	22.27		1
	100	0	22.75	22.61	22.57	0-1	1
	15	0	23.10	23.10	22.88		0
	15	42	23.22	23.12	22.92		0
	15	85	23.15	23.19	22.95	0	
	27	0	22.32	22.35	22.08	0-2	1
	27	37	22.46	22.36	22.15		1
27	73	22.43	22.40	22.18	1		
16QAM	1	0	22.14	22.38	22.34	0-2	1
	1	50	22.38	22.30	22.31		1
	1	99	22.26	22.15	22.22		1
	15	0	22.09	22.08	21.83	0-3	1
	15	42	22.11	22.00	22.14		1
	15	85	22.08	21.99	22.19		1
	27	0	21.47	21.47	21.33	0-5	2
	27	37	21.57	21.42	21.36		2
	27	73	21.43	21.31	21.39		2

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 25 of 58

8.2.7

LTE Band 25

Table 8-8
LTE Band 25 Conducted Power - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.33	23.07	23.27	0	0
	1	50	23.42	23.29	23.44		0
	1	99	23.41	23.26	23.31		0
	50	0	22.36	22.41	22.35	0-1	1
	50	25	22.51	22.40	22.75		1
	50	50	22.35	22.30	22.47		1
	100	0	22.45	22.50	22.74	1	
	15	0	23.31	23.28	23.26	0-1	0
	15	42	23.35	23.43	23.40		0
	15	85	23.30	23.32	23.18		0
	27	0	22.26	22.29	22.28	0-2	1
	27	37	22.37	22.40	22.42		1
27	73	22.30	22.38	22.22	1		
16QAM	1	0	22.81	22.95	22.97	0-2	1
	1	50	22.97	23.01	23.12		1
	1	99	22.93	22.98	23.06		1
	15	0	22.52	22.44	22.41	0-3	1
	15	42	22.60	22.51	22.54		1
	15	85	22.46	22.49	22.55		1
	27	0	21.43	21.44	21.40	0-5	2
	27	37	21.55	21.46	21.47		2
27	73	21.45	21.46	21.49	2		

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 26 of 58

8.2.8

LTE Band 7

Table 8-9
LTE Band 7 Conducted Power - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.69	22.70	22.95	0	0
	1	50	22.66	22.67	22.86		0
	1	99	22.97	22.97	23.13		0
	50	0	21.63	21.63	21.91	0-1	1
	50	25	21.67	21.70	21.89		1
	50	50	21.79	21.77	22.05		1
	100	0	21.89	21.88	22.04	0-1	1
	15	0	22.89	22.74	22.83		0
	15	42	22.86	22.76	22.81		0
	15	85	22.93	22.88	22.98	0-2	0
	27	0	21.87	21.73	21.79		1
	27	37	21.89	21.75	21.82		1
27	73	21.91	21.82	21.94	1		
16QAM	1	0	22.14	22.12	22.28	0-2	1
	1	50	22.10	22.07	22.19		1
	1	99	22.29	22.31	22.46		1
	15	0	21.66	21.47	21.58	0-3	1
	15	42	21.68	21.49	21.53		1
	15	85	21.73	21.66	21.82		1
	27	0	20.63	20.44	20.51	0-5	2
	27	37	20.64	20.51	20.53		2
	27	73	20.67	20.57	20.74		2

Table 8-10
LTE Band 7 Reduced Conducted Power - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	21.99	22.02	22.15	0	0	
	1	50	21.88	22.11	22.11		0	
	1	99	21.98	22.05	22.16		0	
	50	0	21.10	20.93	21.14	0-1	1	
	50	25	21.06	21.06	21.16		1	
	50	50	21.09	21.15	21.20		1	
	100	0	21.10	21.09	21.15	0-1	1	
	15	0	21.96	21.95	22.31		0	
	15	42	21.92	21.85	22.06		0	
	15	85	21.96	22.09	22.28	0-2	0	
	27	0	20.90	20.85	21.09		1	
	27	37	20.89	20.97	20.93		1	
27	73	20.91	21.10	21.08	0-2	1		
16QAM	1	0	21.31	21.40		21.79	0-2	1
	1	50	21.42	21.38		21.60		1
	1	99	21.49	21.69	21.87	1		
	15	0	20.87	20.73	21.11	0-3	1	
	15	42	20.83	20.76	20.93		1	
	15	85	20.86	20.98	21.10		1	
	27	0	19.79	19.71	20.00	0-5	2	
	27	37	19.78	19.85	19.93		2	
27	73	19.76	19.96	20.01	2			

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 27 of 58

8.2.9

LTE Band 41

Table 8-11
LTE Band 41 Conducted Power - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.02	22.80	22.93	23.01	22.85	0	0
	1	50	22.68	22.85	22.94	23.03	22.78		0
	1	99	22.59	22.93	22.95	23.04	22.82		0
	50	0	21.79	21.81	21.88	21.99	21.76	0-1	1
	50	25	21.67	21.79	21.87	21.98	21.74		1
	50	50	21.61	21.83	21.89	22.01	21.77		1
	100	0	21.79	21.87	21.92	22.00	21.85	0-1	1
	15	0	22.90	22.80	22.91	23.00	22.82		0
	15	42	22.62	22.82	22.92	22.99	22.80		0
	15	85	22.56	22.91	22.93	23.02	22.79	0-2	0
	27	0	21.85	21.77	21.88	21.95	21.80		1
	27	37	21.60	21.78	21.90	21.95	21.79		1
16QAM	27	73	21.54	21.83	21.93	21.93	21.82	0-2	1
	1	0	22.00	21.95	21.70	21.80	22.35		1
	1	50	21.88	22.05	21.84	21.96	22.30		1
	1	99	21.80	22.00	21.80	21.90	22.20	0-3	1
	15	0	21.48	21.51	21.56	21.70	21.75		1
	15	42	21.64	21.52	21.58	21.72	21.80		1
	15	85	21.56	21.50	21.60	21.82	21.72	0-5	1
	27	0	20.58	20.60	20.60	20.84	20.65		2
	27	37	20.60	20.75	20.58	20.80	20.70		2
	27	73	20.50	20.70	20.55	20.70	20.60		2



Figure 8-2
Power Measurement Setup

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 28 of 58

8.3 WLAN Conducted Powers

Table 8-12
2.4 GHz WLAN Maximum Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	17.95	16.11	16.17
2417	2		17.40	17.44
2437	6	18.03	17.42	17.49
2452	9		17.63	17.61
2457	10		17.08	17.08
2462	11	18.06	15.55	15.48

Table 8-13
5 GHz WLAN Maximum Average RF Power

5GHz (20MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11a	802.11n
		Average	Average
5180	36	16.04	16.00
5200	40	16.01	15.94
5220	44	15.99	16.08
5240	48	15.96	16.01
5260	52	15.95	15.96
5280	56	16.03	15.98
5300	60	16.02	16.00
5320	64	16.05	16.00
5500	100	16.08	16.04
5600	120	16.06	16.05
5620	124	16.07	15.99
5720	144	15.95	16.03
5745	149	15.95	16.02
5785	157	15.94	16.03
5825	165	16.04	16.00

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 29 of 58

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

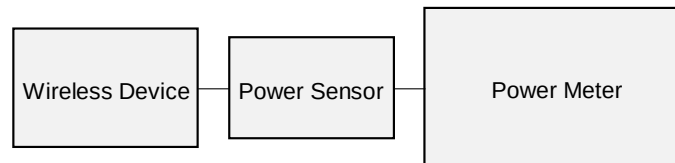


Figure 8-3
Power Measurement Setup

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 30 of 58

8.4 Bluetooth Conducted Powers

Table 8-14
Bluetooth Average RF Power

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	11.80	15.136
2441	GFSK	1.0	39	11.92	15.560
2480	GFSK	1.0	78	11.78	15.066

Note 1: Bluetooth was evaluated with a test mode with 100% transmission duty factor.

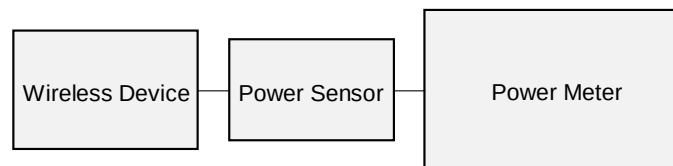


Figure 8-4
Power Measurement Setup

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 31 of 58

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
08/03/2022	750 Head	23.6	680	0.851	40.553	0.888	42.305	-4.17%	-4.14%
			695	0.856	40.527	0.889	42.227	-3.71%	-4.03%
			700	0.857	40.515	0.889	42.201	-3.60%	-4.00%
			710	0.861	40.489	0.890	42.149	-3.26%	-3.94%
			725	0.865	40.451	0.891	42.071	-2.92%	-3.85%
			750	0.874	40.372	0.894	41.942	-2.24%	-3.74%
			770	0.881	40.298	0.895	41.838	-1.56%	-3.68%
			785	0.886	40.245	0.896	41.760	-1.12%	-3.63%
08/05/2022	750 Head	23.1	800	0.890	40.190	0.897	41.682	-0.78%	-3.58%
			680	0.864	42.843	0.888	42.305	-2.70%	1.27%
			695	0.868	42.816	0.889	42.227	-2.36%	1.39%
			700	0.870	42.805	0.889	42.201	-2.14%	1.43%
			710	0.872	42.782	0.890	42.149	-2.02%	1.50%
			725	0.876	42.737	0.891	42.071	-1.68%	1.58%
			750	0.884	42.657	0.894	41.942	-1.12%	1.70%
			770	0.892	42.609	0.895	41.838	-0.34%	1.84%
08/07/2022	750 Head	23.1	785	0.897	42.579	0.896	41.760	0.11%	1.96%
			800	0.901	42.549	0.897	41.682	0.45%	2.08%
			680	0.882	42.214	0.888	42.305	-0.68%	-0.22%
			695	0.887	42.161	0.889	42.227	-0.22%	-0.16%
			700	0.888	42.148	0.889	42.201	-0.11%	-0.13%
			710	0.892	42.129	0.890	42.149	0.22%	-0.05%
			725	0.897	42.108	0.891	42.071	0.67%	0.09%
			750	0.906	42.045	0.894	41.942	1.34%	0.25%
08/08/2022	750 Head	21.8	770	0.913	41.956	0.895	41.838	2.01%	0.28%
			785	0.918	41.897	0.896	41.760	2.46%	0.33%
			800	0.923	41.861	0.897	41.682	2.90%	0.43%
			680	0.894	41.439	0.888	42.305	0.68%	-2.05%
			695	0.899	41.391	0.889	42.227	1.12%	-1.98%
			700	0.900	41.380	0.889	42.201	1.24%	-1.95%
			710	0.904	41.363	0.890	42.149	1.57%	-1.86%
			725	0.909	41.346	0.891	42.071	2.02%	-1.72%
07/29/2022	835 Head	18.1	750	0.918	41.283	0.894	41.942	2.68%	-1.57%
			770	0.925	41.200	0.895	41.838	3.35%	-1.52%
			785	0.930	41.149	0.896	41.760	3.79%	-1.46%
			800	0.935	41.113	0.897	41.682	4.24%	-1.37%
07/30/2022	835 Head	20.1	815	0.890	41.760	0.898	41.594	-0.89%	0.40%
			820	0.894	41.694	0.899	41.578	-0.56%	0.28%
			835	0.908	41.490	0.900	41.500	0.89%	-0.02%
			850	0.923	41.299	0.916	41.500	0.76%	-0.48%
08/03/2022	835 Head	19.8	815	0.887	41.219	0.898	41.594	-1.22%	-0.90%
			820	0.891	41.155	0.899	41.578	-0.89%	-1.02%
			835	0.905	40.961	0.900	41.500	0.56%	-1.30%
			850	0.920	40.776	0.916	41.500	0.44%	-1.74%
08/17/2022	835 Head	19.6	815	0.918	41.625	0.898	41.594	2.23%	0.07%
			820	0.923	41.566	0.899	41.578	2.67%	-0.03%
			835	0.938	41.372	0.900	41.500	4.22%	-0.31%
			850	0.951	41.171	0.916	41.500	3.82%	-0.79%
08/03/2022	835 Head	19.6	815	0.865	40.434	0.898	41.594	-3.67%	-2.79%
			820	0.870	40.365	0.899	41.578	-3.23%	-2.92%
			835	0.885	40.160	0.900	41.500	-1.67%	-3.23%
			850	0.898	39.959	0.916	41.500	-1.97%	-3.71%

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by:
Document S/N:	DUT Type:	Technical Manager
1C2205090038-22.BCG (Rev 1)	Watch	Page 32 of 58

Table 9-2
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/13/2022	1750 Head	22.0	1710	1.286	38.433	1.348	40.142	-4.60%	-4.26%
			1720	1.294	38.389	1.354	40.126	-4.43%	-4.33%
			1745	1.315	38.282	1.368	40.087	-3.87%	-4.50%
			1750	1.320	38.264	1.371	40.079	-3.72%	-4.53%
			1770	1.338	38.197	1.383	40.047	-3.25%	-4.62%
06/15/2022	1750 Head	21.5	1790	1.356	38.127	1.394	40.016	-2.73%	-4.72%
			1710	1.300	38.933	1.348	40.142	-3.56%	-3.01%
			1720	1.309	38.896	1.354	40.126	-3.32%	-3.07%
			1745	1.332	38.795	1.368	40.087	-2.63%	-3.22%
			1750	1.337	38.775	1.371	40.079	-2.48%	-3.25%
06/17/2022	1750 Head	21.3	1770	1.355	38.700	1.383	40.047	-2.02%	-3.36%
			1790	1.375	38.621	1.394	40.016	-1.36%	-3.49%
			1710	1.336	38.953	1.348	40.142	-0.89%	-2.96%
			1720	1.342	38.930	1.354	40.126	-0.89%	-2.98%
			1745	1.355	38.881	1.368	40.087	-0.95%	-3.01%
06/14/2022	1900 Head	19.2	1750	1.358	38.870	1.371	40.079	-0.95%	-3.02%
			1770	1.368	38.827	1.383	40.047	-1.08%	-3.05%
			1790	1.379	38.778	1.394	40.016	-1.08%	-3.09%
			1850	1.403	38.590	1.400	40.000	0.21%	-3.52%
			1860	1.408	38.571	1.400	40.000	0.57%	-3.57%
06/15/2022	1900 Head	20.9	1880	1.420	38.537	1.400	40.000	1.43%	-3.66%
			1900	1.432	38.510	1.400	40.000	2.29%	-3.73%
			1905	1.435	38.502	1.400	40.000	2.50%	-3.74%
			1910	1.438	38.494	1.400	40.000	2.71%	-3.77%
			1850	1.413	40.029	1.400	40.000	0.93%	0.07%
06/12/2022	2450 Head	20.7	1860	1.419	40.015	1.400	40.000	1.36%	0.04%
			1880	1.431	39.983	1.400	40.000	2.21%	-0.04%
			1900	1.442	39.956	1.400	40.000	3.00%	-0.11%
			1905	1.445	39.950	1.400	40.000	3.21%	-0.12%
			1910	1.448	39.943	1.400	40.000	3.43%	-0.14%
06/12/2022	2450 Head	20.7	2300	1.728	39.990	1.670	39.500	3.47%	1.24%
			2310	1.736	39.972	1.679	39.480	3.39%	1.25%
			2320	1.744	39.954	1.687	39.460	3.38%	1.25%
			2400	1.804	39.813	1.756	39.289	2.73%	1.33%
			2450	1.845	39.744	1.800	39.200	2.50%	1.39%
06/12/2022	2450 Head	20.7	2480	1.865	39.685	1.833	39.162	1.75%	1.34%
			2500	1.882	39.645	1.855	39.136	1.46%	1.30%
			2510	1.890	39.627	1.866	39.123	1.29%	1.29%
			2535	1.910	39.594	1.893	39.092	0.90%	1.28%
			2550	1.921	39.574	1.909	39.073	0.63%	1.28%
06/12/2022	2450 Head	24.7	2560	1.928	39.557	1.920	39.060	0.42%	1.27%
			2600	1.961	39.486	1.964	39.009	-0.15%	1.22%
			2650	2.002	39.414	2.018	38.945	-0.79%	1.20%
			2680	2.026	39.363	2.051	38.907	-1.22%	1.17%
			2700	2.044	39.320	2.073	38.882	-1.40%	1.13%
06/12/2022	2450 Head	24.7	2300	1.724	39.467	1.670	39.500	3.23%	-0.08%
			2310	1.733	39.430	1.679	39.480	3.22%	-0.13%
			2320	1.743	39.389	1.687	39.460	3.32%	-0.18%
			2400	1.822	39.136	1.756	39.289	3.76%	-0.39%
			2450	1.873	38.957	1.800	39.200	4.06%	-0.62%
06/12/2022	2450 Head	24.7	2480	1.903	38.872	1.833	39.162	3.82%	-0.74%
			2500	1.922	38.806	1.855	39.136	3.61%	-0.84%
			2510	1.931	38.770	1.866	39.123	3.48%	-0.90%
			2535	1.958	38.684	1.893	39.092	3.43%	-1.04%
			2550	1.974	38.637	1.909	39.073	3.40%	-1.12%
06/14/2022	2450 Head	24.9	2560	1.986	38.605	1.920	39.060	3.44%	-1.16%
			2600	2.025	38.474	1.964	39.009	3.11%	-1.37%
			2650	2.080	38.295	2.018	38.945	3.07%	-1.67%
			2680	2.110	38.206	2.051	38.907	2.88%	-1.80%
			2700	2.129	38.130	2.073	38.882	2.70%	-1.93%
06/14/2022	2450 Head	24.9	2300	1.723	40.562	1.670	39.500	3.17%	2.69%
			2310	1.734	40.530	1.679	39.480	3.28%	2.66%
			2320	1.745	40.492	1.687	39.460	3.44%	2.62%
			2400	1.834	40.192	1.756	39.289	4.44%	2.30%
			2450	1.886	40.005	1.800	39.200	4.78%	2.05%
06/14/2022	2450 Head	24.9	2480	1.918	39.879	1.833	39.162	4.64%	1.83%
			2500	1.941	39.813	1.855	39.136	4.64%	1.73%
			2510	1.953	39.783	1.866	39.123	4.66%	1.69%
			2535	1.980	39.704	1.893	39.092	4.60%	1.57%
			2550	1.995	39.641	1.909	39.073	4.50%	1.45%
06/14/2022	2450 Head	24.9	2560	2.005	39.595	1.920	39.060	4.43%	1.37%
			2600	2.052	39.433	1.964	39.009	4.48%	1.09%
			2650	2.108	39.285	2.018	38.945	4.46%	0.87%
			2680	2.140	39.151	2.051	38.907	4.34%	0.63%
			2700	2.163	39.075	2.073	38.882	4.34%	0.50%

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by:
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Technical Manager
			Page 33 of 58

Table 9-3
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
08/31/2022	2600 Head	22.7	2300	1.713	38.425	1.670	39.500	2.57%	-2.72%
			2310	1.720	38.417	1.679	39.480	2.44%	-2.69%
			2320	1.727	38.403	1.687	39.460	2.37%	-2.68%
			2400	1.784	38.268	1.756	39.289	1.59%	-2.60%
			2450	1.820	38.188	1.800	39.200	1.11%	-2.58%
			2480	1.840	38.122	1.833	39.162	0.38%	-2.66%
			2500	1.854	38.093	1.855	39.136	-0.05%	-2.67%
			2510	1.862	38.084	1.866	39.123	-0.21%	-2.66%
			2535	1.881	38.062	1.893	39.092	-0.63%	-2.63%
			2550	1.892	38.044	1.909	39.073	-0.89%	-2.63%
			2560	1.899	38.025	1.920	39.060	-1.09%	-2.65%
			2600	1.929	37.955	1.964	39.009	-1.78%	-2.70%
			2650	1.970	37.905	2.018	38.945	-2.38%	-2.67%
			2680	1.994	37.841	2.051	38.907	-2.78%	-2.74%
			2700	2.010	37.800	2.073	38.882	-3.04%	-2.78%
06/06/2022	5200-5800 Head	20.6	5180	4.550	35.793	4.635	36.009	-1.83%	-0.60%
			5190	4.565	35.773	4.645	35.998	-1.72%	-0.63%
			5200	4.579	35.764	4.655	35.986	-1.63%	-0.62%
			5210	4.587	35.751	4.666	35.975	-1.69%	-0.62%
			5220	4.595	35.724	4.676	35.963	-1.73%	-0.66%
			5240	4.619	35.709	4.696	35.940	-1.64%	-0.64%
			5250	4.628	35.703	4.706	35.929	-1.66%	-0.63%
			5260	4.641	35.678	4.717	35.917	-1.61%	-0.67%
			5270	4.655	35.642	4.727	35.906	-1.52%	-0.74%
			5280	4.668	35.615	4.737	35.894	-1.46%	-0.78%
			5290	4.680	35.615	4.748	35.883	-1.43%	-0.75%
			5300	4.687	35.599	4.758	35.871	-1.49%	-0.76%
			5310	4.698	35.567	4.768	35.860	-1.47%	-0.82%
			5320	4.708	35.543	4.778	35.849	-1.47%	-0.85%
			5500	4.907	35.224	4.963	35.643	-1.13%	-1.18%
			5510	4.918	35.204	4.973	35.632	-1.11%	-1.20%
			5520	4.932	35.178	4.983	35.620	-1.02%	-1.24%
			5530	4.945	35.147	4.994	35.609	-0.98%	-1.30%
			5540	4.955	35.131	5.004	35.597	-0.98%	-1.31%
			5550	4.960	35.131	5.014	35.586	-1.08%	-1.28%
			5560	4.965	35.127	5.024	35.574	-1.17%	-1.26%
			5580	4.995	35.074	5.045	35.551	-0.99%	-1.34%
			5600	5.028	35.035	5.065	35.529	-0.73%	-1.39%
			5610	5.037	35.030	5.076	35.518	-0.77%	-1.37%
			5620	5.046	35.012	5.086	35.506	-0.79%	-1.39%
			5640	5.072	34.960	5.106	35.483	-0.67%	-1.47%
			5660	5.091	34.953	5.127	35.460	-0.70%	-1.43%
			5670	5.100	34.938	5.137	35.449	-0.72%	-1.44%
			5680	5.114	34.911	5.147	35.437	-0.64%	-1.48%
			5690	5.127	34.881	5.158	35.426	-0.60%	-1.54%
			5700	5.141	34.861	5.168	35.414	-0.52%	-1.56%
			5710	5.151	34.843	5.178	35.403	-0.52%	-1.58%
			5720	5.159	34.824	5.188	35.391	-0.56%	-1.60%
			5745	5.193	34.769	5.214	35.363	-0.40%	-1.68%
			5750	5.200	34.766	5.219	35.357	-0.36%	-1.67%
			5755	5.204	34.759	5.224	35.351	-0.38%	-1.67%
			5765	5.209	34.754	5.234	35.340	-0.48%	-1.66%
			5775	5.219	34.739	5.245	35.329	-0.50%	-1.67%
			5785	5.232	34.711	5.255	35.317	-0.44%	-1.72%
			5795	5.248	34.689	5.265	35.305	-0.32%	-1.74%
			5805	5.263	34.676	5.275	35.294	-0.23%	-1.75%
			5825	5.282	34.665	5.296	35.271	-0.26%	-1.72%
			5835	5.292	34.636	5.305	35.230	-0.25%	-1.69%
			5845	5.308	34.604	5.315	35.210	-0.13%	-1.72%
			5855	5.325	34.577	5.325	35.197	0.00%	-1.76%
			5875	5.346	34.552	5.347	35.183	-0.02%	-1.79%
			5885	5.350	34.528	5.357	35.177	-0.13%	-1.84%
			5905	5.374	34.486	5.379	35.163	-0.09%	-1.93%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Page 34 of 58

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.

Table 9-4
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	Measured SAR1g (W/kg)	1W Target SAR1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation1g (%)
AM6	750	HEAD	08/03/2022	22.3	21.8	0.20	1097	7532	1.610	8.21	8.050	-1.95%
AM6	750	HEAD	08/07/2022	21.9	21.5	0.20	1097	7532	1.560	8.21	7.800	-4.99%
AM5	835	HEAD	07/29/2022	20.7	18.7	0.20	460	7490	2.020	9.72	10.100	3.91%
AM5	835	HEAD	08/03/2022	20.4	18.4	0.20	1009	7490	2.050	9.80	10.250	4.59%
AM1	1750	HEAD	06/13/2022	21.2	22.0	0.10	1104	7639	3.450	35.70	34.500	-3.36%
AM6	1750	HEAD	06/17/2022	23.4	19.8	0.10	1083	7532	3.450	36.50	34.500	-5.48%
AM6	1900	HEAD	06/14/2022	23.1	18.1	0.10	5d030	7532	4.180	39.80	41.800	5.03%
AM10	1900	HEAD	06/15/2022	21.9	20.0	0.10	5d181	7308	4.150	40.10	41.500	3.49%
AM11	2450	HEAD	06/12/2022	22.7	24.7	0.10	855	7420	5.070	52.30	50.700	-3.06%
AM11	2450	HEAD	06/14/2022	20.8	23.0	0.10	855	7420	5.130	52.30	51.300	-1.91%
AM10	2600	HEAD	06/12/2022	22.3	20.0	0.10	1042	7308	5.360	55.80	53.600	-3.94%
AM10	2600	HEAD	08/31/2022	23.5	22.7	0.10	1068	7308	5.490	55.70	54.900	-1.44%
AM8	5250	HEAD	06/06/2022	19.7	19.4	0.05	1123	7546	3.750	80.50	75.000	-6.83%
AM8	5600	HEAD	06/06/2022	19.7	19.4	0.05	1123	7546	3.880	83.70	77.600	-7.29%
AM8	5750	HEAD	06/06/2022	19.7	19.4	0.05	1123	7546	3.740	80.50	74.800	-7.08%

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 35 of 58

Table 9-5
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	Measured SAR10g (W/kg)	1W Target SAR10g (W/kg)	1W Normalized SAR10g (W/kg)	Deviation10g (%)
AM6	750	HEAD	08/03/2022	22.3	21.8	0.20	1097	7532	1.070	5.34	5.350	0.19%
AM6	750	HEAD	08/05/2022	22.1	23.0	0.20	1097	7532	1.060	5.34	5.300	-0.75%
AM12	750	HEAD	08/08/2022	22.5	21.5	0.20	1057	7499	1.170	5.58	5.850	4.84%
AM5	835	HEAD	07/30/2022	20.1	19.8	0.20	460	7490	1.270	6.34	6.350	0.16%
AM5	835	HEAD	08/03/2022	20.4	18.4	0.20	1009	7490	1.330	6.31	6.650	5.39%
AM12	835	HEAD	08/17/2022	20.2	18.6	0.20	4d108	7499	1.310	6.33	6.550	3.48%
AM1	1750	HEAD	06/15/2022	21.9	21.5	0.10	1104	7639	2.030	18.80	20.300	7.98%
AM6	1750	HEAD	06/17/2022	23.4	19.8	0.10	1083	7532	1.820	19.20	18.200	-5.21%
AM6	1900	HEAD	06/14/2022	23.1	18.1	0.10	5d030	7532	2.160	20.40	21.600	5.88%
AM11	2450	HEAD	06/12/2022	22.7	24.7	0.10	855	7420	2.280	24.50	22.800	-6.94%
AM11	2450	HEAD	06/14/2022	20.8	23.0	0.10	855	7420	2.300	24.50	23.000	-6.12%
AM10	2600	HEAD	06/12/2022	22.3	20.0	0.10	1042	7308	2.390	24.90	23.900	-4.02%
AM8	5250	HEAD	06/06/2022	19.7	19.4	0.05	1123	7546	1.070	22.90	21.400	-6.55%
AM8	5600	HEAD	06/06/2022	19.7	19.4	0.05	1123	7546	1.100	23.70	22.000	-7.17%
AM8	5750	HEAD	06/06/2022	19.7	19.4	0.05	1123	7546	1.060	22.70	21.200	-6.61%

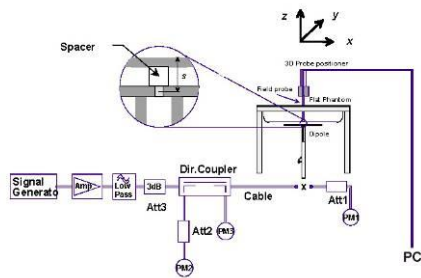


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 36 of 58

10 SAR DATA SUMMARY

10.1 Standalone Head SAR Data

Table 10-1
UMTS 850 MHz Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowd Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	SAR [1g]	Scaling Factor	Reported SAR [1g]	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.12	front	10 mm	Aluminum	Sport	X1KH9H4FW4	1:1	0.000	1.202	0.000	A1
836.60	4183	UMTS 850	RMC	25.00	24.20	0.00	front	10 mm	Aluminum	Metal Links	X1KH9H4FW4	1:1	0.000	1.202	0.000	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.07	front	10 mm	Aluminum	Metal Loop	X1KH9H4FW4	1:1	0.000	1.202	0.000	
836.60	4183	UMTS 850	RMC	25.00	24.20	0.16	front	10 mm	Stainless Steel	Sport	N40Q7KWMKT	1:1	0.000	1.202	0.000	
836.60	4183	UMTS 850	RMC	25.00	24.20	0.14	front	10 mm	Stainless Steel	Metal Links	N40Q7KWMKT	1:1	0.000	1.202	0.000	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.02	front	10 mm	Stainless Steel	Metal Loop	N40Q7KWMKT	1:1	0.000	1.202	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head						
Spatial Peak										1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population										averaged over 1 gram						

Table 10-2
UMTS 1750 MHz Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowd Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Side	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	SAR [1g]	Scaling Factor	Reported SAR [1g]	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	0.07	front	10 mm	Aluminum	Sport	H03F701436	1:1	0.099	1.242	0.123	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.02	front	10 mm	Aluminum	Metal Links	H03F701436	1:1	0.163	1.242	0.202	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.05	front	10 mm	Aluminum	Metal Loop	H03F701436	1:1	0.236	1.242	0.293	A2
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.12	front	10 mm	Stainless Steel	Sport	J75L6J3CHQ	1:1	0.089	1.242	0.111	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.08	front	10 mm	Stainless Steel	Metal Links	J75L6J3CHQ	1:1	0.154	1.242	0.191	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.03	front	10 mm	Stainless Steel	Metal Loop	J75L6J3CHQ	1:1	0.166	1.242	0.206	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 10-3
UMTS 1900 MHz Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Side	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.07	front	10 mm	Aluminum	Sport	KK66FLFQ10	1:1	0.167	1.183	0.198	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.04	front	10 mm	Aluminum	Metal Links	KK66FLFQ10	1:1	0.218	1.183	0.258	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.07	front	10 mm	Aluminum	Metal Loop	KK66FLFQ10	1:1	0.502	1.183	0.594	A3
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.03	front	10 mm	Stainless Steel	Sport	WWGCQ14N7M	1:1	0.232	1.183	0.274	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.03	front	10 mm	Stainless Steel	Metal Links	WWGCQ14N7M	1:1	0.303	1.183	0.358	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	-0.01	front	10 mm	Stainless Steel	Metal Loop	WWGCQ14N7M	1:1	0.485	1.183	0.574	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak										Head 1.6 W/kg (mW/g) averaged over 1 gram						
Uncontrolled Exposure/General Population																

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Page 37 of 58

Table 10-4
LTE Band 12 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
MHz	Ch.																			
707.50	23095	Mid	LTE Band 12	10	Sport	25.50	24.76	-0.11	0	front	10 mm	Aluminum	QPSK	1	25	X745DXH1H	1.1	0.010	1.186	0.012
707.50	23095	Mid	LTE Band 12	10	Sport	24.50	23.72	-0.13	1	front	10 mm	Aluminum	QPSK	25	25	X745DXH1H	1.1	0.008	1.197	0.010
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.50	24.76	-0.11	0	front	10 mm	Aluminum	QPSK	1	25	X745DXH1H	1.1	0.013	1.186	0.015
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.50	23.72	-0.07	1	front	10 mm	Aluminum	QPSK	25	25	X745DXH1H	1.1	0.010	1.197	0.012
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.50	24.76	-0.10	0	front	10 mm	Aluminum	QPSK	1	25	X745DXH1H	1.1	0.010	1.186	0.012
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.50	23.72	-0.16	1	front	10 mm	Aluminum	QPSK	25	25	X745DXH1H	1.1	0.008	1.197	0.010
707.50	23095	Mid	LTE Band 12	10	Sport	25.50	24.76	-0.05	0	front	10 mm	Stainless Steel	QPSK	1	25	JWPP92DYV4	1.1	0.008	1.186	0.009
707.50	23095	Mid	LTE Band 12	10	Sport	24.50	23.72	0.11	1	front	10 mm	Stainless Steel	QPSK	25	25	JWPP92DYV4	1.1	0.006	1.197	0.007
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.50	24.76	0.10	0	front	10 mm	Stainless Steel	QPSK	1	25	JWPP92DYV4	1.1	0.000	1.186	0.000
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.50	23.72	0.08	1	front	10 mm	Stainless Steel	QPSK	25	25	JWPP92DYV4	1.1	0.000	1.197	0.000
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.50	24.76	0.07	0	front	10 mm	Stainless Steel	QPSK	1	25	JWPP92DYV4	1.1	0.000	1.186	0.000
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.50	23.72	0.03	1	front	10 mm	Stainless Steel	QPSK	25	25	JWPP92DYV4	1.1	0.000	1.197	0.000
ANSI / IEEE C63.1.1.1992 - SAFETY LIMIT										Head										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

Table 10-5
LTE Band 13 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Daily Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
MHz	Ch.																			
782.00	23230	Mid	LTE Band 13	10	Sport	25.50	24.70	0.00	0	front	10 mm	Aluminum	QPSK	1	25	QRW9P09TJL	1.1	0.013	1.202	0.016
782.00	23230	Mid	LTE Band 13	10	Sport	24.50	23.77	-0.16	1	front	10 mm	Aluminum	QPSK	25	25	QRW9P09TJL	1.1	0.011	1.183	0.013
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.50	24.70	0.03	0	front	10 mm	Aluminum	QPSK	1	25	QRW9P09TJL	1.1	0.017	1.202	0.020
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.50	23.77	-0.18	1	front	10 mm	Aluminum	QPSK	25	25	QRW9P09TJL	1.1	0.014	1.183	0.017
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.50	24.70	-0.14	0	front	10 mm	Aluminum	QPSK	1	25	QRW9P09TJL	1.1	0.014	1.202	0.017
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.50	23.77	-0.17	1	front	10 mm	Aluminum	QPSK	25	25	QRW9P09TJL	1.1	0.011	1.183	0.013
782.00	23230	Mid	LTE Band 13	10	Sport	25.50	24.70	-0.17	0	front	10 mm	Stainless Steel	QPSK	1	25	NA0Q7KWMKT	1.1	0.000	1.202	0.000
782.00	23230	Mid	LTE Band 13	10	Sport	24.50	23.77	-0.13	1	front	10 mm	Stainless Steel	QPSK	25	25	NA0Q7KWMKT	1.1	0.000	1.183	0.000
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.50	24.70	-0.17	0	front	10 mm	Stainless Steel	QPSK	1	25	NA0Q7KWMKT	1.1	0.002	1.202	0.002
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.50	23.77	0.08	1	front	10 mm	Stainless Steel	QPSK	25	25	NA0Q7KWMKT	1.1	0.001	1.183	0.001
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.50	24.70	-0.08	0	front	10 mm	Stainless Steel	QPSK	1	25	NA0Q7KWMKT	1.1	0.000	1.202	0.000
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.50	23.77	-0.02	1	front	10 mm	Stainless Steel	QPSK	25	25	NA0Q7KWMKT	1.1	0.000	1.183	0.000
ANSI / IEEE C63.1.1.1992 - SAFETY LIMIT												Head								
Spatial Peak												1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population												averaged over 1 gram								

Table 10-6
LTE Band 14 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Daily Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
MHz	Ch.																			
793.00	23330	Md	LTE Band 14	10	Sport	25.50	24.58	-0.13	0	front	10 mm	Aluminum	QPSK	1	25	X745DXH1H	1.1	0.000	1.236	0.000
793.00	23330	Md	LTE Band 14	10	Sport	24.50	23.66	0.08	1	front	10 mm	Aluminum	QPSK	25	12	X745DXH1H	1.1	0.000	1.213	0.000
793.00	23330	Md	LTE Band 14	10	Metal Links	25.50	24.58	0.20	0	front	10 mm	Aluminum	QPSK	1	25	X745DXH1H	1.1	0.000	1.236	0.000
793.00	23330	Md	LTE Band 14	10	Metal Links	24.50	23.66	0.10	1	front	10 mm	Aluminum	QPSK	25	12	X745DXH1H	1.1	0.000	1.213	0.000
793.00	23330	Md	LTE Band 14	10	Metal Loop	25.50	24.58	0.01	0	front	10 mm	Aluminum	QPSK	1	25	X745DXH1H	1.1	0.000	1.236	0.000
793.00	23330	Md	LTE Band 14	10	Metal Loop	24.50	23.66	0.05	1	front	10 mm	Aluminum	QPSK	25	12	X745DXH1H	1.1	0.000	1.213	0.000
793.00	23330	Md	LTE Band 14	10	Sport	25.50	24.58	0.02	0	front	10 mm	Stainless Steel	QPSK	1	25	CM90237C33	1.1	0.000	1.236	0.000
793.00	23330	Md	LTE Band 14	10	Sport	24.50	23.66	0.03	1	front	10 mm	Stainless Steel	QPSK	25	12	CM90237C33	1.1	0.000	1.213	0.000
793.00	23330	Md	LTE Band 14	10	Metal Links	25.50	24.58	-0.03	0	front	10 mm	Stainless Steel	QPSK	1	25	CM90237C33	1.1	0.002	1.236	0.002
793.00	23330	Md	LTE Band 14	10	Metal Links	24.50	23.66	0.00	1	front	10 mm	Stainless Steel	QPSK	25	12	CM90237C33	1.1	0.001	1.213	0.001
793.00	23330	Md	LTE Band 14	10	Metal Loop	25.50	24.58	0.20	0	front	10 mm	Stainless Steel	QPSK	1	25	CM90237C33	1.1	0.002	1.236	0.002
793.00	23330	Md	LTE Band 14	10	Metal Loop	24.50	23.66	0.01	1	front	10 mm	Stainless Steel	QPSK	25	12	CM90237C33	1.1	0.000	1.213	0.000
ANSI / IEEE C63.1.1.1992 - SAFETY LIMIT												Head								
Spatial Peak												1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population												averaged over 1 gram								

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 38 of 58

Table 10-7
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Waveband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
MHz	Ch.																			
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	25.50	24.76	0.09	0	front	10 mm	Aluminum	QPSK	1	49	GMHEX034V	1.1	0.000	1.186	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	24.50	23.78	0.16	1	front	10 mm	Aluminum	QPSK	25	25	GMHEX034V	1.1	0.000	1.180	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	25.50	24.76	0.06	0	front	10 mm	Aluminum	QPSK	1	49	GMHEX034V	1.1	0.000	1.186	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	24.50	23.78	0.13	1	front	10 mm	Aluminum	QPSK	25	25	GMHEX034V	1.1	0.000	1.180	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	25.50	24.76	0.06	0	front	10 mm	Aluminum	QPSK	1	49	GMHEX034V	1.1	0.000	1.186	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	24.50	23.78	0.01	1	front	10 mm	Aluminum	QPSK	25	25	GMHEX034V	1.1	0.000	1.180	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	25.50	24.76	0.00	0	front	10 mm	Stainless Steel	QPSK	1	49	NA0Q7K0WMT	1.1	0.000	1.186	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	24.50	23.78	0.02	1	front	10 mm	Stainless Steel	QPSK	25	25	NA0Q7K0WMT	1.1	0.000	1.180	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	25.50	24.76	0.01	0	front	10 mm	Stainless Steel	QPSK	1	49	NA0Q7K0WMT	1.1	0.000	1.186	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	24.50	23.78	0.02	1	front	10 mm	Stainless Steel	QPSK	25	25	NA0Q7K0WMT	1.1	0.000	1.180	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	25.50	24.76	0.06	0	front	10 mm	Stainless Steel	QPSK	1	49	NA0Q7K0WMT	1.1	0.000	1.186	0.000
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	24.50	23.78	-0.04	1	front	10 mm	Stainless Steel	QPSK	25	25	NA0Q7K0WMT	1.1	0.000	1.180	0.000
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

Table 10-8
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Waveband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #	
MHz	Ch.																				
836.50	20525	M0	LTE Band 5 (Cell)	10	Sport	25.50	25.15	-0.09	0	front	10 mm	Aluminum	QPSK	1	49	X1KH9H4FW4	1.1	0.001	1.084	0.001	A0
836.50	20525	M0	LTE Band 5 (Cell)	10	Sport	24.50	24.29	-0.12	1	front	10 mm	Aluminum	QPSK	25	25	X1KH9H4FW4	1.1	0.000	1.050	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Links	25.50	25.15	0.16	0	front	10 mm	Aluminum	QPSK	1	49	X1KH9H4FW4	1.1	0.000	1.084	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Links	24.50	24.29	0.19	1	front	10 mm	Aluminum	QPSK	25	25	X1KH9H4FW4	1.1	0.000	1.050	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Loop	25.50	25.15	0.03	0	front	10 mm	Aluminum	QPSK	1	49	X1KH9H4FW4	1.1	0.000	1.084	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Loop	24.50	24.29	0.15	1	front	10 mm	Aluminum	QPSK	25	25	X1KH9H4FW4	1.1	0.000	1.050	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Sport	25.50	25.15	-0.09	0	front	10 mm	Stainless Steel	QPSK	1	49	C8CH9P36M0	1.1	0.000	1.084	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Sport	24.50	24.29	0.00	1	front	10 mm	Stainless Steel	QPSK	25	25	C8CH9P36M0	1.1	0.000	1.050	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Links	25.50	25.15	0.08	0	front	10 mm	Stainless Steel	QPSK	1	49	C8CH9P36M0	1.1	0.000	1.084	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Links	24.50	24.29	-0.08	1	front	10 mm	Stainless Steel	QPSK	25	25	C8CH9P36M0	1.1	0.000	1.050	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Loop	25.50	25.15	-0.17	0	front	10 mm	Stainless Steel	QPSK	1	49	C8CH9P36M0	1.1	0.000	1.084	0.000	
836.50	20525	M0	LTE Band 5 (Cell)	10	Metal Loop	24.50	24.29	0.17	1	front	10 mm	Stainless Steel	QPSK	25	25	C8CH9P36M0	1.1	0.000	1.050	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Head									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

Table 10-9
LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Waveband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
MHz	Ch.																			
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	24.50	23.44	0.02	0	front	10 mm	Aluminum	QPSK	1	99	K4419KJ33D	1.1	0.129	1.276	0.163
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	23.50	22.76	-0.09	1	front	10 mm	Aluminum	QPSK	50	0	K4419KJ33D	1.1	0.111	1.186	0.132
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	24.50	23.44	0.04	0	front	10 mm	Aluminum	QPSK	1	99	K4419KJ33D	1.1	0.196	1.276	0.250
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	23.50	22.76	-0.04	1	front	10 mm	Aluminum	QPSK	50	0	K4419KJ33D	1.1	0.125	1.186	0.148
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	24.50	23.44	0.01	0	front	10 mm	Aluminum	QPSK	1	99	K4419KJ33D	1.1	0.261	1.276	0.333
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	23.50	22.76	-0.12	1	front	10 mm	Aluminum	QPSK	50	0	K4419KJ33D	1.1	0.211	1.186	0.250
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	24.50	23.44	-0.06	0	front	10 mm	Stainless Steel	QPSK	1	99	WWGCQ14N7M	1.1	0.148	1.276	0.189
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	23.50	22.76	-0.03	1	front	10 mm	Stainless Steel	QPSK	50	0	WWGCQ14N7M	1.1	0.123	1.186	0.146
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	24.50	23.44	-0.02	0	front	10 mm	Stainless Steel	QPSK	1	99	WWGCQ14N7M	1.1	0.269	1.276	0.343
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	23.50	22.76	0.01	1	front	10 mm	Stainless Steel	QPSK	50	0	WWGCQ14N7M	1.1	0.197	1.186	0.222
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	24.50	23.44	0.00	0	front	10 mm	Stainless Steel	QPSK	1	99	WWGCQ14N7M	1.1	0.279	1.276	0.355
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	23.50	22.76	-0.01	1	front	10 mm	Stainless Steel	QPSK	50	0	WWGCQ14N7M	1.1	0.248	1.186	0.294
ANSI / IEEE C95.1 1992 - SAFETY LIMIT											Head									
Spatial Peak											1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population											averaged over 1 gram									

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 39 of 58

Table 10-10
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Writband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
MHz	Ch.																			
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	24.50	23.44	0.05	0	front	10 mm	Aluminum	QPSK	1	50	K4419K33D	1.1	0.166	1.276	0.212
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	23.50	22.75	0.06	1	front	10 mm	Aluminum	QPSK	50	25	K4419K33D	1.1	0.140	1.189	0.166
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	24.50	23.44	-0.02	0	front	10 mm	Aluminum	QPSK	1	50	K4419K33D	1.1	0.256	1.276	0.327
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	23.50	22.75	-0.06	1	front	10 mm	Aluminum	QPSK	50	25	K4419K33D	1.1	0.210	1.189	0.250
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	24.50	23.44	0.04	0	front	10 mm	Aluminum	QPSK	1	50	K4419K33D	1.1	0.330	1.276	0.421
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	23.50	22.75	0.03	1	front	10 mm	Aluminum	QPSK	50	25	K4419K33D	1.1	0.270	1.189	0.321
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	24.50	23.44	-0.03	0	front	10 mm	Stainless Steel	QPSK	1	50	C6CH9P9M0	1.1	0.202	1.276	0.258
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	23.50	22.75	0.02	1	front	10 mm	Stainless Steel	QPSK	50	25	C6CH9P9M0	1.1	0.162	1.189	0.193
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	24.50	23.44	0.01	0	front	10 mm	Stainless Steel	QPSK	1	50	C6CH9P9M0	1.1	0.261	1.276	0.333
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	23.50	22.75	-0.02	1	front	10 mm	Stainless Steel	QPSK	50	25	C6CH9P9M0	1.1	0.215	1.189	0.255
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	24.50	23.44	0.06	0	front	10 mm	Stainless Steel	QPSK	1	50	C6CH9P9M0	1.1	0.399	1.276	0.509
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	23.50	22.75	-0.01	1	front	10 mm	Stainless Steel	QPSK	50	25	C6CH9P9M0	1.1	0.338	1.189	0.402
ANSI / IEEE C63.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-11
LTE Band 7 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [dB]	Scaling Factor	Reported SAR [dB]	Plot #
MHz	Ch.																			
2510.00	20850	Low	LTE Band 7	20	Sport	23.00	21.99	0.04	0	front	10 mm	Aluminum	QPSK	1	0	J6FNFNDJ2	1.1	0.748	1.262	0.944
2535.00	21100	Mid	LTE Band 7	20	Sport	23.00	22.11	-0.02	0	front	10 mm	Aluminum	QPSK	1	50	J6FNFNDJ2	1.1	0.795	1.227	0.975
2560.00	21350	High	LTE Band 7	20	Sport	23.00	22.16	-0.02	0	front	10 mm	Aluminum	QPSK	1	99	J6FNFNDJ2	1.1	0.956	1.213	1.160
2510.00	20850	Low	LTE Band 7	20	Sport	22.00	21.10	-0.02	1	front	10 mm	Aluminum	QPSK	50	0	J6FNFNDJ2	1.1	0.522	1.230	0.642
2535.00	21100	Mid	LTE Band 7	20	Sport	22.00	21.15	-0.06	1	front	10 mm	Aluminum	QPSK	50	50	J6FNFNDJ2	1.1	0.447	1.216	0.544
2560.00	21350	High	LTE Band 7	20	Sport	22.00	21.20	-0.03	1	front	10 mm	Aluminum	QPSK	50	50	J6FNFNDJ2	1.1	0.822	1.202	0.988
2560.00	21350	High	LTE Band 7	20	Sport	22.00	21.15	0.04	1	front	10 mm	Aluminum	QPSK	100	0	J6FNFNDJ2	1.1	0.799	1.216	0.972
2560.00	21350	High	LTE Band 7	20	Metal Links	23.00	22.16	-0.09	0	front	10 mm	Aluminum	QPSK	1	99	J6FNFNDJ2	1.1	0.528	1.213	0.640
2560.00	21350	High	LTE Band 7	20	Metal Links	22.00	21.20	-0.04	1	front	10 mm	Aluminum	QPSK	50	50	J6FNFNDJ2	1.1	0.404	1.202	0.486
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.00	21.99	0.04	0	front	10 mm	Aluminum	QPSK	1	0	J6FNFNDJ2	1.1	0.347	1.262	0.438
2535.00	21100	Mid	LTE Band 7	20	Metal Loop	23.00	22.11	-0.12	0	front	10 mm	Aluminum	QPSK	1	50	J6FNFNDJ2	1.1	0.281	1.227	0.345
2560.00	21350	High	LTE Band 7	20	Metal Loop	23.00	22.16	-0.01	0	front	10 mm	Aluminum	QPSK	1	99	J6FNFNDJ2	1.1	0.666	1.213	0.808
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.00	21.20	0.03	1	front	10 mm	Aluminum	QPSK	50	50	J6FNFNDJ2	1.1	0.481	1.202	0.590
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.00	21.15	0.09	1	front	10 mm	Aluminum	QPSK	100	0	J6FNFNDJ2	1.1	0.322	1.216	0.393
2510.00	20850	Low	LTE Band 7	20	Sport	23.00	21.99	-0.01	0	front	10 mm	Stainless Steel	QPSK	1	0	WWGQC14N7M	1.1	0.735	1.262	0.926
2535.00	21100	Mid	LTE Band 7	20	Sport	23.00	22.11	-0.04	0	front	10 mm	Stainless Steel	QPSK	1	50	WWGQC14N7M	1.1	0.702	1.227	0.861
2560.00	21350	High	LTE Band 7	20	Sport	23.00	22.16	-0.07	0	front	10 mm	Stainless Steel	QPSK	1	99	WWGQC14N7M	1.1	0.572	1.213	0.694
2560.00	21350	High	LTE Band 7	20	Sport	22.00	21.20	0.02	1	front	10 mm	Stainless Steel	QPSK	50	50	WWGQC14N7M	1.1	0.436	1.202	0.523
2560.00	21350	High	LTE Band 7	20	Sport	22.00	21.15	-0.09	1	front	10 mm	Stainless Steel	QPSK	100	0	WWGQC14N7M	1.1	0.362	1.216	0.477
2560.00	21350	High	LTE Band 7	20	Metal Links	23.00	22.16	0.02	0	front	10 mm	Stainless Steel	QPSK	1	99	WWGQC14N7M	1.1	0.265	1.213	0.321
2560.00	21350	High	LTE Band 7	20	Metal Links	22.00	21.20	-0.06	1	front	10 mm	Stainless Steel	QPSK	50	50	WWGQC14N7M	1.1	0.202	1.202	0.243
2560.00	21350	High	LTE Band 7	20	Metal Loop	23.00	22.16	-0.04	0	front	10 mm	Stainless Steel	QPSK	1	99	WWGQC14N7M	1.1	0.266	1.213	0.432
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.00	21.20	-0.12	1	front	10 mm	Stainless Steel	QPSK	50	50	WWGQC14N7M	1.1	0.263	1.202	0.340
2560.00	21350	High	LTE Band 7	20	Sport	23.00	22.16	0.09	0	front	10 mm	Aluminum	QPSK	1	99	J6FNFNDJ2	1.1	0.875	1.213	1.061
ANSI / IEEE C63.1.1992 - SAFETY LIMIT Spatial Peak										Head 1.6 W/kg (mW/g) averaged over 1 gram										
Uncontrolled Exposure/General Population																				

Table 10-12
LTE Band 41 Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wireband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Spacing	Housing Type	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [dB]	Scaling Factor	Reported SAR [dB]	Plot #	
MHz	Ch.																				
2636.50	41055	Mid-High	LTE Band 41	20	Sport	24.00	23.04	-0.17	0	front	10 mm	Aluminum	QPSK	1	99	LPDXJVVJW	1.1.58	0.338	1.247	0.397	A12
2636.50	41055	Mid-High	LTE Band 41	20	Sport	23.00	22.01	-0.13	1	front	10 mm	Aluminum	QPSK	50	50	LPDXJVVJW	1.1.58	0.237	1.256	0.298	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	24.00	23.04	-0.17	0	front	10 mm	Aluminum	QPSK	1	99	LPDXJVVJW	1.1.58	0.067	1.247	0.084	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	23.00	22.01	0.08	1	front	10 mm	Aluminum	QPSK	50	50	LPDXJVVJW	1.1.58	0.051	1.256	0.064	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	24.00	23.04	-0.08	0	front	10 mm	Aluminum	QPSK	1	99	LPDXJVVJW	1.1.58	0.219	1.247	0.273	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	23.00	22.01	-0.02	1	front	10 mm	Aluminum	QPSK	50	50	LPDXJVVJW	1.1.58	0.093	1.256	0.117	
2636.50	41055	Mid-High	LTE Band 41	20	Sport	24.00	23.04	-0.10	0	front	10 mm	Stainless Steel	QPSK	1	99	CM9237C3J	1.1.58	0.238	1.247	0.297	
2636.50	41055	Mid-High	LTE Band 41	20	Sport	23.00	22.01	0.03	1	front	10 mm	Stainless Steel	QPSK	50	50	CM9237C3J	1.1.58	0.214	1.256	0.269	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	24.00	23.04	0.02	0	front	10 mm	Stainless Steel	QPSK	1	99	CM9237C3J	1.1.58	0.195	1.247	0.198	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	23.00	22.01	-0.15	1	front	10 mm	Stainless Steel	QPSK	50	50	CM9237C3J	1.1.58	0.130	1.256	0.163	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	24.00	23.04	-0.13	0	front	10 mm	Stainless Steel	QPSK	1	99	CM9237C3J	1.1.58	0.173	1.247	0.216	
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	23.00	22.01	0.01	1	front	10 mm	Stainless Steel	QPSK	50	50	CM9237C3J	1.1.58	0.128	1.256	0.161	
ANSI / IEEE C63.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by:
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Technical Manager
		Page 40 of 58	

Table 10-13
2.4 GHz WLAN Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Side	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																		
2462	11	802.11b	DSSS	22	19.00	18.06	-0.07	front	10 mm	Aluminum	Sport	K4419KJ33D	1	99.7	0.158	1.242	1.003	0.197	
2462	11	802.11b	DSSS	22	19.00	18.06	-0.03	front	10 mm	Aluminum	Metal Links	K4419KJ33D	1	99.7	0.072	1.242	1.003	0.090	
2462	11	802.11b	DSSS	22	19.00	18.06	0.02	front	10 mm	Aluminum	Metal Loop	K4419KJ33D	1	99.7	0.062	1.242	1.003	0.077	
2462	11	802.11b	DSSS	22	19.00	18.06	0.05	front	10 mm	Stainless Steel	Sport	WPWJCC4H5M	1	99.7	0.221	1.242	1.003	0.275	A13
2462	11	802.11b	DSSS	22	19.00	18.06	0.04	front	10 mm	Stainless Steel	Metal Links	WPWJCC4H5M	1	99.7	0.114	1.242	1.003	0.142	
2462	11	802.11b	DSSS	22	19.00	18.06	-0.06	front	10 mm	Stainless Steel	Metal Loop	WPWJCC4H5M	1	99.7	0.149	1.242	1.003	0.186	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-14
5 GHz WLAN Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Side	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																		
5320	64	802.11a	OFDM	20	17.00	16.05	0.04	front	10 mm	Aluminum	Sport	KX68FLFQ10	6	98.5	0.030	1.245	1.015	0.025	
5320	64	802.11a	OFDM	20	17.00	16.05	0.02	front	10 mm	Aluminum	Metal Links	KX68FLFQ10	6	98.5	0.025	1.245	1.015	0.032	
5320	64	802.11a	OFDM	20	17.00	16.05	0.06	front	10 mm	Aluminum	Metal Loop	KX68FLFQ10	6	98.5	0.024	1.245	1.015	0.030	
5320	64	802.11a	OFDM	20	17.00	16.05	-0.02	front	10 mm	Stainless Steel	Sport	WWGQC14N7M	6	98.5	0.039	1.245	1.015	0.049	
5320	64	802.11a	OFDM	20	17.00	16.05	-0.02	front	10 mm	Stainless Steel	Metal Links	WWGQC14N7M	6	98.5	0.035	1.245	1.015	0.044	
5320	64	802.11a	OFDM	20	17.00	16.05	0.14	front	10 mm	Stainless Steel	Metal Loop	WWGQC14N7M	6	98.5	0.036	1.245	1.015	0.045	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.17	front	10 mm	Aluminum	Sport	LPDXN9VJW	6	98.5	0.046	1.236	1.015	0.058	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.21	front	10 mm	Aluminum	Metal Links	LPDXN9VJW	6	98.5	0.042	1.236	1.015	0.053	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.12	front	10 mm	Aluminum	Metal Loop	LPDXN9VJW	6	98.5	0.050	1.236	1.015	0.063	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.19	front	10 mm	Stainless Steel	Sport	CM93237CJ3	6	98.5	0.048	1.236	1.015	0.060	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.12	front	10 mm	Stainless Steel	Metal Links	CM93237CJ3	6	98.5	0.046	1.236	1.015	0.056	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.13	front	10 mm	Stainless Steel	Metal Loop	CM93237CJ3	6	98.5	0.041	1.236	1.015	0.051	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.16	front	10 mm	Aluminum	Sport	KX68FLFQ10	6	98.5	0.048	1.247	1.015	0.061	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.18	front	10 mm	Aluminum	Metal Links	KX68FLFQ10	6	98.5	0.056	1.247	1.015	0.071	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.18	front	10 mm	Aluminum	Metal Loop	KX68FLFQ10	6	98.5	0.053	1.247	1.015	0.067	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.21	front	10 mm	Stainless Steel	Sport	WWGQC14N7M	6	98.5	0.059	1.247	1.015	0.075	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.04	front	10 mm	Stainless Steel	Metal Links	WWGQC14N7M	6	98.5	0.059	1.247	1.015	0.075	A14
5825	165	802.11a	OFDM	20	17.00	16.04	-0.15	front	10 mm	Stainless Steel	Metal Loop	WWGQC14N7M	6	98.5	0.050	1.247	1.015	0.063	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-15
Bluetooth Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Side	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																	
2441.00	39	Bluetooth	FHSS	13.00	11.92	-0.13	front	10 mm	Aluminum	Sport	LPDXN9VJW	1	100	0.063	1.282	1.000	0.061	A15
2441.00	39	Bluetooth	FHSS	13.00	11.92	0.10	front	10 mm	Aluminum	Metal Links	LPDXN9VJW	1	100	0.037	1.282	1.000	0.047	
2441.00	39	Bluetooth	FHSS	13.00	11.92	0.05	front	10 mm	Aluminum	Metal Loop	LPDXN9VJW	1	100	0.039	1.282	1.000	0.050	
2441.00	39	Bluetooth	FHSS	13.00	11.92	0.01	front	10 mm	Stainless Steel	Sport	WPWJCC4H5M	1	100	0.051	1.282	1.000	0.065	
2441.00	39	Bluetooth	FHSS	13.00	11.92	0.10	front	10 mm	Stainless Steel	Metal Links	WPWJCC4H5M	1	100	0.027	1.282	1.000	0.035	
2441.00	39	Bluetooth	FHSS	13.00	11.92	0.07	front	10 mm	Stainless Steel	Metal Loop	WPWJCC4H5M	1	100	0.034	1.282	1.000	0.044	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Page 41 of 58

10.2 Standalone Extremity SAR Data

Table 10-16
UMTS 850 MHz Extremity SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.21	0 mm	Aluminum	Sport	XJXH9H4FW4	1:1	back	0.086	1.202	0.103	A16
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.19	0 mm	Aluminum	Metal Links	XJXH9H4FW4	1:1	back	0.146	1.202	0.175	
836.60	4183	UMTS 850	RMC	25.00	24.20	0.08	0 mm	Aluminum	Metal Loop	XJXH9H4FW4	1:1	back	0.118	1.202	0.142	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.17	0 mm	Stainless Steel	Sport	VVWGQ14N7M	1:1	back	0.078	1.202	0.094	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.04	0 mm	Stainless Steel	Metal Links	VVWGQ14N7M	1:1	back	0.120	1.202	0.144	
836.60	4183	UMTS 850	RMC	25.00	24.20	-0.13	0 mm	Stainless Steel	Metal Loop	VVWGQ14N7M	1:1	back	0.093	1.202	0.112	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak													Extremity 4.0 W/kg (mW/g)			
Uncontrolled Exposure/General Population													averaged over 10 grams			

Table 10-17
UMTS 1750 MHz Extremity SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.18	0 mm	Aluminum	Sport	H0JF701436	1:1	back	0.026	1.242	0.032	A17
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.04	0 mm	Aluminum	Metal Links	H0JF701436	1:1	back	0.112	1.242	0.139	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.15	0 mm	Aluminum	Metal Loop	H0JF701436	1:1	back	0.152	1.242	0.189	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.02	0 mm	Stainless Steel	Sport	N40Q7KWMKT	1:1	back	0.023	1.242	0.029	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	0.05	0 mm	Stainless Steel	Metal Links	N40Q7KWMKT	1:1	back	0.067	1.242	0.083	
1712.40	1312	UMTS 1750	RMC	24.00	23.06	-0.01	0 mm	Stainless Steel	Metal Loop	N40Q7KWMKT	1:1	back	0.042	1.242	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity						
Spatial Peak										4.0 W/kg (mW/g)						
Uncontrolled Exposure/General Population										averaged over 10 grams						

Table 10-18
UMTS 1900 MHz Extremity SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.04	0 mm	Aluminum	Sport	KK66FLFQ10	1:1	back	0.132	1.183	0.156	A18
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.03	0 mm	Aluminum	Metal Links	KK66FLFQ10	1:1	back	0.283	1.183	0.335	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.15	0 mm	Aluminum	Metal Loop	KK66FLFQ10	1:1	back	0.259	1.183	0.306	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.01	0 mm	Stainless Steel	Sport	XRJJGVDPFX	1:1	back	0.057	1.183	0.067	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.12	0 mm	Stainless Steel	Metal Links	XRJJGVDPFX	1:1	back	0.153	1.183	0.181	
1907.60	9538	UMTS 1900	RMC	24.00	23.27	0.09	0 mm	Stainless Steel	Metal Loop	XRJJGVDPFX	1:1	back	0.113	1.183	0.134	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity						
Spatial Peak										4.0 W/kg (mW/g)						
Uncontrolled Exposure/General Population										averaged over 10 grams						

Table 10-19
LTE Band 12 Extremity Body SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPE [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																				
707.50	23095	Md	LTE Band 12	10	Sport	25.50	24.76	-0.03	0	Aluminum	QV56R7Q13	QPSK	1	25	0 mm	back	1:1	0.072	1.186	0.085	A19
707.50	23095	Md	LTE Band 12	10	Sport	24.50	23.72	-0.13	1	Aluminum	QV56R7Q13	QPSK	25	25	0 mm	back	1:1	0.061	1.197	0.073	
707.50	23095	Md	LTE Band 12	10	Metal Links	25.50	24.76	0.05	0	Aluminum	QV56R7Q13	QPSK	1	25	0 mm	back	1:1	0.125	1.186	0.148	
707.50	23095	Md	LTE Band 12	10	Metal Links	24.50	23.72	0.00	1	Aluminum	QV56R7Q13	QPSK	25	25	0 mm	back	1:1	0.110	1.197	0.132	
707.50	23095	Md	LTE Band 12	10	Metal Loop	25.50	24.76	0.05	0	Aluminum	QV56R7Q13	QPSK	1	25	0 mm	back	1:1	0.126	1.186	0.149	
707.50	23095	Md	LTE Band 12	10	Metal Loop	24.50	23.72	-0.17	1	Aluminum	QV56R7Q13	QPSK	25	25	0 mm	back	1:1	0.115	1.197	0.138	
707.50	23095	Md	LTE Band 12	10	Sport	25.50	24.76	-0.14	0	Stainless Steel	WPWJCC46M	QPSK	1	25	0 mm	back	1:1	0.076	1.186	0.090	
707.50	23095	Md	LTE Band 12	10	Sport	24.50	23.72	-0.08	1	Stainless Steel	WPWJCC46M	QPSK	25	25	0 mm	back	1:1	0.064	1.197	0.077	
707.50	23095	Md	LTE Band 12	10	Metal Links	25.50	24.76	0.01	0	Stainless Steel	WPWJCC46M	QPSK	1	25	0 mm	back	1:1	0.116	1.186	0.138	
707.50	23095	Md	LTE Band 12	10	Metal Links	24.50	23.72	0.01	1	Stainless Steel	WPWJCC46M	QPSK	25	25	0 mm	back	1:1	0.112	1.197	0.134	
707.50	23095	Md	LTE Band 12	10	Metal Loop	25.50	24.76	-0.14	0	Stainless Steel	WPWJCC46M	QPSK	1	25	0 mm	back	1:1	0.088	1.186	0.104	
707.50	23095	Md	LTE Band 12	10	Metal Loop	24.50	23.72	-0.10	1	Stainless Steel	WPWJCC46M	QPSK	25	25	0 mm	back	1:1	0.079	1.197	0.093	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 42 of 58	

Table 10-20
LTE Band 13 Extremity Body SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Wireband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Out [dBm]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR [W/kg]	Scaling Factor	Reported SAR [W/kg]	Plot #
[MHz]	[GHz]																			
782.0	23230	Mid	LTE Band 13	10	Sport	25.50	24.70	0.01	0	Aluminum	R7R9P160X4	QPSK	1	25	0 mm	back	1.1	0.115	1.202	0.138
782.0	23230	Mid	LTE Band 13	10	Sport	24.50	23.77	-0.15	1	Aluminum	R7R9P160X4	QPSK	25	25	0 mm	back	1.1	0.089	1.183	0.105
782.0	23230	Mid	LTE Band 13	10	Metal Links	25.50	24.70	0.10	0	Aluminum	GWI4X034V	QPSK	1	25	0 mm	back	1.1	0.173	1.202	0.208
782.0	23230	Mid	LTE Band 13	10	Metal Links	24.50	23.77	0.03	1	Aluminum	GWI4X034V	QPSK	25	25	0 mm	back	1.1	0.169	1.183	0.200
782.0	23230	Mid	LTE Band 13	10	Metal Loop	25.50	24.70	0.18	0	Aluminum	R7R9P160X4	QPSK	1	25	0 mm	back	1.1	0.164	1.202	0.197
782.0	23230	Mid	LTE Band 13	10	Metal Loop	24.50	23.77	0.03	1	Aluminum	X0M4W8R73M	QPSK	25	25	0 mm	back	1.1	0.139	1.183	0.164
782.0	23230	Mid	LTE Band 13	10	Sport	25.50	24.70	-0.08	0	Stainless Steel	WPWJCC46M	QPSK	1	25	0 mm	back	1.1	0.089	1.202	0.107
782.0	23230	Mid	LTE Band 13	10	Sport	24.50	23.77	0.01	1	Stainless Steel	WPWJCC46M	QPSK	25	25	0 mm	back	1.1	0.083	1.183	0.098
782.0	23230	Mid	LTE Band 13	10	Metal Links	25.50	24.70	0.01	0	Stainless Steel	WPWJCC46M	QPSK	1	25	0 mm	back	1.1	0.252	1.202	0.279
782.0	23230	Mid	LTE Band 13	10	Metal Links	24.50	23.77	0.01	1	Stainless Steel	WPWJCC46M	QPSK	25	25	0 mm	back	1.1	0.131	1.183	0.155
782.0	23230	Mid	LTE Band 13	10	Metal Loop	25.50	24.70	-0.06	0	Stainless Steel	WWGQC14N7M	QPSK	1	25	0 mm	back	1.1	0.222	1.202	0.147
782.0	23230	Mid	LTE Band 13	10	Metal Loop	24.50	23.77	0.04	1	Stainless Steel	WWGQC14N7M	QPSK	25	25	0 mm	back	1.1	0.118	1.183	0.140
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																				
Spatial Peak																				
Uncontrolled Exposure/General Population																				
															Extremity					
															4.0 W/kg (mW/g)					
															averaged over 10 grams					

Table 10-21
LTE Band 14 Extremity Body SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth (MHz)	Wireless Type	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Out (dBm)	MPR (dB)	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (W/kg)	Scaling Factor	Reported SAR (W/kg)	Plot #
MHz	Ch.																			
793.0	23330	Md	LTE Band 14	10	Sport	25.50	24.58	-0.08	0	Aluminum	GWHX03J4V	QPSK	1	25	0 mm	back	1:1	0.111	1.236	0.137
793.0	23330	Md	LTE Band 14	10	Sport	25.50	23.66	-0.07	1	Aluminum	GWHX03J4V	QPSK	25	12	0 mm	back	1:1	0.061	1.213	0.110
793.0	23330	Md	LTE Band 14	10	Metal Links	25.50	24.58	0.00	0	Aluminum	GWHX03J4V	QPSK	1	25	0 mm	back	1:1	0.195	1.236	0.241
793.0	23330	Md	LTE Band 14	10	Metal Links	25.50	23.66	0.01	1	Aluminum	GWHX03J4V	QPSK	25	12	0 mm	back	1:1	0.147	1.213	0.178
793.0	23330	Md	LTE Band 14	10	Metal Loop	25.50	24.58	0.20	0	Aluminum	GWHX03J4V	QPSK	1	25	0 mm	back	1:1	0.149	1.236	0.184
793.0	23330	Md	LTE Band 14	10	Metal Loop	25.50	23.66	-0.06	1	Aluminum	GWHX03J4V	QPSK	25	12	0 mm	back	1:1	0.129	1.213	0.155
793.0	23330	Md	LTE Band 14	10	Sport	25.50	24.50	0.12	0	Stainless Steel	J7SL63JCHQ	QPSK	1	25	0 mm	back	1:1	0.101	1.236	0.125
793.0	23330	Md	LTE Band 14	10	Sport	25.50	23.66	-0.01	1	Stainless Steel	J7SL63JCHQ	QPSK	25	12	0 mm	back	1:1	0.075	1.213	0.091
793.0	23330	Md	LTE Band 14	10	Metal Links	25.50	24.58	0.01	0	Stainless Steel	J7SL63JCHQ	QPSK	1	25	0 mm	back	1:1	0.126	1.236	0.156
793.0	23330	Md	LTE Band 14	10	Metal Links	25.50	23.66	-0.02	1	Stainless Steel	J7SL63JCHQ	QPSK	25	12	0 mm	back	1:1	0.160	1.213	0.194
793.0	23330	Md	LTE Band 14	10	Metal Loop	25.50	24.58	-0.01	0	Stainless Steel	J7SL63JCHQ	QPSK	1	25	0 mm	back	1:1	0.197	1.236	0.243
793.0	23330	Md	LTE Band 14	10	Metal Loop	25.50	23.66	0.07	1	Stainless Steel	J7SL63JCHQ	QPSK	25	12	0 mm	back	1:1	0.102	1.213	0.124
ANSI / IEEE C63.11-1997 - SAFETY LIMIT Spatial Peak																		Extremity 4.0 W/kg (10W/g) averaged over 10 grams		
Unintentional Exposure/General Population																				

Table 10-22
LTE Band 26 (Cell) Extremity Body SAR

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Wired/Ten Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Loss [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR [dBg]	Scaling Factor	Reported SAR [dBg]	Plot #		
MHz	Ch.																					
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	25.5	24.76	-0.32	0	Aluminum	XJ08H4FW4	QPSK	1	49	0 mm	back	1.1	0.087	1.186	0.103		
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	24.5	23.78	0.08	1	Aluminum	XJ08H4FW4	QPSK	25	25	0 mm	back	1.1	0.067	1.186	0.079		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	25.5	24.76	-0.01	0	Aluminum	XJ08H4FW4	QPSK	1	49	0 mm	back	1.1	0.157	1.186	0.186		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	24.5	23.78	0.01	0	Aluminum	XJ08H4FW4	QPSK	25	25	0 mm	back	1.1	0.126	1.186	0.149		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	25.5	24.76	-0.02	0	Aluminum	XJ08H4FW4	QPSK	1	49	0 mm	back	1.1	0.136	1.186	0.138		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	24.5	23.78	-0.02	1	Aluminum	XJ08H4FW4	QPSK	25	25	0 mm	back	1.1	0.088	1.186	0.104		
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	25.5	24.76	-0.04	0	Stainless Steel	JWPPSD2VY4	QPSK	1	49	0 mm	back	1.1	0.083	1.186	0.098		
819.00	26740	Low	LTE Band 26 (Cell)	10	Sport	24.5	23.78	0.02	1	Stainless Steel	JWPPSD2VY4	QPSK	25	25	0 mm	back	1.1	0.075	1.186	0.089		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	25.5	24.76	-0.11	0	Stainless Steel	JWPPSD2VY4	QPSK	1	49	0 mm	back	1.1	0.122	1.186	0.145		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Links	24.5	23.78	0.15	1	Stainless Steel	JWPPSD2VY4	QPSK	25	25	0 mm	back	1.1	0.112	1.186	0.132		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	25.5	24.76	0.05	0	Stainless Steel	JWPPSD2VY4	QPSK	1	49	0 mm	back	1.1	0.108	1.186	0.128		
819.00	26740	Low	LTE Band 26 (Cell)	10	Metal Loop	24.5	23.78	-0.13	1	Stainless Steel	JWPPSD2VY4	QPSK	25	25	0 mm	back	1.1	0.091	1.186	0.107		
ANSI / IEEE C63.1 1992 - SAFETY LIMIT											Extremity 4.0 W/kg (mW/g) averaged over 10 grams											
Uncontrolled Exposure/General Population																						

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 43 of 58

Table 10-23
LTE Band 5 (Cell) Extremity Body SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power DnR [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																				
836.50	20525	Md	LTE Band 5 (Cell)	10	Sport	25.50	25.15	-0.02	0	Aluminum	QRWPR9TJL	QPSK	1	49	0 mm	back	1:1	0.156	1.084	0.169	
836.50	20525	Md	LTE Band 5 (Cell)	10	Sport	24.50	24.29	-0.12	1	Aluminum	QRWPR9TJL	QPSK	25	25	0 mm	back	1:1	0.082	1.050	0.086	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Links	25.50	25.15	-0.03	0	Aluminum	QRWPR9TJL	QPSK	1	49	0 mm	back	1:1	0.240	1.084	0.260	A23
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Links	24.50	24.29	0.03	1	Aluminum	QRWPR9TJL	QPSK	25	25	0 mm	back	1:1	0.182	1.050	0.191	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Loop	25.50	25.15	-0.18	0	Aluminum	QRWPR9TJL	QPSK	1	49	0 mm	back	1:1	0.132	1.084	0.143	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Loop	24.50	24.29	0.00	1	Aluminum	QRWPR9TJL	QPSK	25	25	0 mm	back	1:1	0.110	1.050	0.116	
836.50	20525	Md	LTE Band 5 (Cell)	10	Sport	25.50	25.15	0.02	0	Stainless Steel	WWGCQ14N7M	QPSK	1	49	0 mm	back	1:1	0.091	1.084	0.099	
836.50	20525	Md	LTE Band 5 (Cell)	10	Sport	24.50	24.29	0.05	1	Stainless Steel	WWGCQ14N7M	QPSK	25	25	0 mm	back	1:1	0.075	1.050	0.079	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Links	25.50	25.15	0.05	0	Stainless Steel	WWGCQ14N7M	QPSK	1	49	0 mm	back	1:1	0.188	1.084	0.204	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Links	24.50	24.29	-0.11	1	Stainless Steel	WWGCQ14N7M	QPSK	25	25	0 mm	back	1:1	0.129	1.050	0.135	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Loop	25.50	25.15	0.00	0	Stainless Steel	WWGCQ14N7M	QPSK	1	49	0 mm	back	1:1	0.141	1.084	0.153	
836.50	20525	Md	LTE Band 5 (Cell)	10	Metal Loop	24.50	24.29	0.15	1	Stainless Steel	WWGCQ14N7M	QPSK	25	25	0 mm	back	1:1	0.089	1.050	0.093	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity											
Spatial Peak										4.0 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 10 grams											

Table 10-24
LTE Band 66 (AWS) Extremity Body SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power DnR [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (mW/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																				
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	24.50	23.44	-0.10	0	Aluminum	K441XKJ3D	QPSK	1	99	0 mm	back	1:1	0.040	1.276	0.051	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	23.50	22.76	-0.12	1	Aluminum	K441XKJ3D	QPSK	50	0	0 mm	back	1:1	0.027	1.186	0.032	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	24.50	23.44	0.15	0	Aluminum	K441XKJ3D	QPSK	1	99	0 mm	back	1:1	0.216	1.276	0.276	A24
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	23.50	22.76	0.03	1	Aluminum	K441XKJ3D	QPSK	50	0	0 mm	back	1:1	0.063	1.186	0.075	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	24.50	23.44	-0.01	0	Aluminum	K441XKJ3D	QPSK	1	99	0 mm	back	1:1	0.124	1.276	0.158	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	23.50	22.76	-0.15	1	Aluminum	K441XKJ3D	QPSK	50	0	0 mm	back	1:1	0.092	1.186	0.109	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	24.50	23.44	-0.19	0	Stainless Steel	CM0927CJ3	QPSK	1	99	0 mm	back	1:1	0.009	1.276	0.037	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Sport	23.50	22.76	-0.15	1	Stainless Steel	CM0927CJ3	QPSK	50	0	0 mm	back	1:1	0.018	1.186	0.021	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	24.50	23.44	-0.19	0	Stainless Steel	CM0927CJ3	QPSK	1	99	0 mm	back	1:1	0.085	1.276	0.108	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Links	23.50	22.76	-0.14	1	Stainless Steel	CM0927CJ3	QPSK	50	0	0 mm	back	1:1	0.070	1.186	0.083	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	24.50	23.44	-0.01	0	Stainless Steel	CM0927CJ3	QPSK	1	99	0 mm	back	1:1	0.087	1.276	0.111	
1720.00	132072	Low	LTE Band 66 (AWS)	20	Metal Loop	23.50	22.76	0.20	1	Stainless Steel	CM0927CJ3	QPSK	50	0	0 mm	back	1:1	0.031	1.186	0.037	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-25
LTE Band 25 (PCS) Extremity Body SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power DnR [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (20g) (W/kg)	Scaling Factor	Reported SAR (20g) (W/kg)	Plot #	
MHz	Ch.																				
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	24.50	23.44	0.03	0	Aluminum	KX69FLFQ10	QPSK	1	50	0 mm	back	1:1	0.153	1.276	0.195	
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	23.50	22.75	0.13	1	Aluminum	KX69FLFQ10	QPSK	50	25	0 mm	back	1:1	0.123	1.189	0.146	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	24.50	23.44	0.09	0	Aluminum	KX69FLFQ10	QPSK	1	50	0 mm	back	1:1	0.182	1.276	0.232	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	23.50	22.75	0.08	1	Aluminum	KX69FLFQ10	QPSK	50	25	0 mm	back	1:1	0.160	1.189	0.190	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	24.50	23.44	-0.13	0	Aluminum	KX69FLFQ10	QPSK	1	50	0 mm	back	1:1	0.352	1.276	0.449	A25
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	23.50	22.75	-0.04	1	Aluminum	KX69FLFQ10	QPSK	50	25	0 mm	back	1:1	0.344	1.189	0.409	
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	24.50	23.44	-0.16	0	Stainless Steel	CM0927CJ3	QPSK	1	50	0 mm	back	1:1	0.052	1.276	0.066	
1905.00	26590	High	LTE Band 25 (PCS)	20	Sport	23.50	22.75	-0.04	1	Stainless Steel	CM0927CJ3	QPSK	50	25	0 mm	back	1:1	0.043	1.189	0.051	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	24.50	23.44	-0.07	0	Stainless Steel	WWGCQ14N7M	QPSK	1	50	0 mm	back	1:1	0.111	1.276	0.142	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Links	23.50	22.75	-0.01	1	Stainless Steel	WWGCQ14N7M	QPSK	50	25	0 mm	back	1:1	0.074	1.189	0.088	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	24.50	23.44	0.00	0	Stainless Steel	CM0927CJ3	QPSK	1	50	0 mm	back	1:1	0.165	1.276	0.211	
1905.00	26590	High	LTE Band 25 (PCS)	20	Metal Loop	23.50	22.75	0.01	1	Stainless Steel	CM0927CJ3	QPSK	50	25	0 mm	back	1:1	0.127	1.189	0.151	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams											

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Page 44 of 58

Table 10-26
LTE Band 7 Extremity Body SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Waveband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.																			
2560.00	21350	High	LTE Band 7	20	Sport	24.00	23.13	0.12	0	Aluminum	LPDXNXXVJW	QPSK	1	99	0 mm	back	1.1	0.301	1.222	0.368
2560.00	21350	High	LTE Band 7	20	Sport	23.00	22.05	-0.05	1	Aluminum	LPDXNXXVJW	QPSK	50	50	0 mm	back	1.1	0.251	1.245	0.312
2560.00	21350	High	LTE Band 7	20	Metal Links	24.00	23.13	0.09	0	Aluminum	LPDXNXXVJW	QPSK	1	99	0 mm	back	1.1	0.282	1.222	0.345
2560.00	21350	High	LTE Band 7	20	Metal Links	23.00	22.05	-0.01	1	Aluminum	LPDXNXXVJW	QPSK	50	50	0 mm	back	1.1	0.245	1.245	0.305
2560.00	21350	High	LTE Band 7	20	Metal Loop	24.00	23.13	0.09	0	Aluminum	LPDXNXXVJW	QPSK	1	99	0 mm	back	1.1	0.250	1.222	0.306
2560.00	21350	High	LTE Band 7	20	Metal Loop	23.00	22.05	-0.06	1	Aluminum	LPDXNXXVJW	QPSK	50	50	0 mm	back	1.1	0.207	1.245	0.258
2560.00	21350	High	LTE Band 7	20	Sport	24.00	23.13	0.00	0	Stainless Steel	CM8927C3J	QPSK	1	99	0 mm	back	1.1	0.646	1.222	0.789
2560.00	21350	High	LTE Band 7	20	Sport	23.00	22.05	-0.09	1	Stainless Steel	CM8927C3J	QPSK	50	50	0 mm	back	1.1	0.503	1.245	0.626
2560.00	21350	High	LTE Band 7	20	Metal Links	24.00	23.13	0.01	0	Stainless Steel	CM8927C3J	QPSK	1	99	0 mm	back	1.1	0.846	1.222	1.034
2560.00	21350	High	LTE Band 7	20	Metal Links	23.00	22.05	-0.05	1	Stainless Steel	CM8927C3J	QPSK	50	50	0 mm	back	1.1	0.743	1.245	0.925
2560.00	21350	High	LTE Band 7	20	Metal Loop	24.00	23.13	-0.01	0	Stainless Steel	CM8927C3J	QPSK	1	99	0 mm	back	1.1	0.653	1.222	0.798
2560.00	21350	High	LTE Band 7	20	Metal Loop	23.00	22.05	-0.02	1	Stainless Steel	CM8927C3J	QPSK	50	50	0 mm	back	1.1	0.510	1.245	0.635
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Extremity 4.0 W/kg (mW/g) averaged over 10 grams									

Table 10-27
LTE Band 41 Extremity Body SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Waveband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (mW/kg)	Scaling Factor	Reported SAR (10g) (mW/kg)	Plot #
MHz	Ch.																			
2636.50	41055	Mid-High	LTE Band 41	20	Sport	24.00	23.04	-0.02	0	Aluminum	KK69FLFQ10	QPSK	1	99	0 mm	back	1.158	0.460	1.247	0.574
2636.50	41055	Mid-High	LTE Band 41	20	Sport	23.00	22.01	-0.01	1	Aluminum	KK69FLFQ10	QPSK	50	50	0 mm	back	1.158	0.356	1.256	0.447
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	24.00	23.04	0.00	0	Aluminum	KK69FLFQ10	QPSK	1	99	0 mm	back	1.158	0.603	1.247	0.752
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	23.00	22.01	0.02	1	Aluminum	KK69FLFQ10	QPSK	50	50	0 mm	back	1.158	0.481	1.256	0.604
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	24.00	23.04	-0.05	0	Aluminum	KK69FLFQ10	QPSK	1	99	0 mm	back	1.158	0.550	1.247	0.686
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	23.00	22.01	-0.04	1	Aluminum	KK69FLFQ10	QPSK	50	50	0 mm	back	1.158	0.436	1.256	0.548
2636.50	41055	Mid-High	LTE Band 41	20	Sport	24.00	23.04	0.04	0	Stainless Steel	N40Q7KWMKT	QPSK	1	99	0 mm	back	1.158	0.286	1.247	0.357
2636.50	41055	Mid-High	LTE Band 41	20	Sport	23.00	22.01	-0.05	1	Stainless Steel	N40Q7KWMKT	QPSK	50	50	0 mm	back	1.158	0.216	1.256	0.271
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	24.00	23.04	-0.02	0	Stainless Steel	N40Q7KWMKT	QPSK	1	99	0 mm	back	1.158	0.241	1.247	0.301
2636.50	41055	Mid-High	LTE Band 41	20	Metal Links	23.00	22.01	-0.06	1	Stainless Steel	N40Q7KWMKT	QPSK	50	50	0 mm	back	1.158	0.180	1.256	0.226
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	24.00	23.04	-0.12	0	Stainless Steel	N40Q7KWMKT	QPSK	1	99	0 mm	back	1.158	0.321	1.247	0.400
2636.50	41055	Mid-High	LTE Band 41	20	Metal Loop	23.00	22.01	-0.16	1	Stainless Steel	N40Q7KWMKT	QPSK	50	50	0 mm	back	1.158	0.246	1.256	0.309
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity										
Spatial Peak										4.0 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 10 grams										

Table 10-28
2.4 GHz WLAN Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Waveband Type	Device Serial Number	Data Rate [Mbps]	Side	Duty Cycle (%)	SAR (10g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g) [W/kg]	Plot #
MHz	Ch.																		
2462	11	802.11b	DSSS	22	19.00	18.06	0.01	0 mm	Aluminum	Sport	K4413KJ33D	1	back	99.7	0.149	1.242	1.003	0.186	
2462	11	802.11b	DSSS	22	19.00	18.06	-0.02	0 mm	Aluminum	Metal Links	K4413KJ33D	1	back	99.7	0.193	1.242	1.003	0.240	
2462	11	802.11b	DSSS	22	19.00	18.06	0.06	0 mm	Aluminum	Metal Loop	K4413KJ33D	1	back	99.7	0.199	1.242	1.003	0.248	A28
2462	11	802.11b	DSSS	22	19.00	18.06	-0.11	0 mm	Stainless Steel	Sport	WWGQ44N7M	1	back	99.7	0.152	1.242	1.003	0.189	
2462	11	802.11b	DSSS	22	19.00	18.06	-0.13	0 mm	Stainless Steel	Metal Links	WWGQ44N7M	1	back	99.7	0.188	1.242	1.003	0.234	
2462	11	802.11b	DSSS	22	19.00	18.06	-0.08	0 mm	Stainless Steel	Metal Loop	WWGQ44N7M	1	back	99.7	0.191	1.242	1.003	0.238	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity									
Spatial Peak										4.0 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 10 grams									

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Page 45 of 58

Table 10-29
5 GHz WLAN Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.														(W/kg)				
5320	64	802.11a	OFDM	20	17.00	16.05	0.20	0 mm	Aluminum	Sport	KK66FLFQ10	6	back	98.5	0.000	1.245	1.015	0.000	
5320	64	802.11a	OFDM	20	17.00	16.05	-0.20	0 mm	Aluminum	Metal Links	KK66FLFQ10	6	back	98.5	0.000	1.245	1.015	0.000	
5320	64	802.11a	OFDM	20	17.00	16.05	-0.12	0 mm	Aluminum	Metal Loop	KK66FLFQ10	6	back	98.5	0.000	1.245	1.015	0.000	
5320	64	802.11a	OFDM	20	17.00	16.05	0.06	0 mm	Stainless Steel	Sport	CM95237C3J	6	back	98.5	0.000	1.245	1.015	0.000	
5320	64	802.11a	OFDM	20	17.00	16.05	0.07	0 mm	Stainless Steel	Metal Links	CM95237C3J	6	back	98.5	0.000	1.245	1.015	0.000	
5320	64	802.11a	OFDM	20	17.00	16.05	0.05	0 mm	Stainless Steel	Metal Loop	CM95237C3J	6	back	98.5	0.000	1.245	1.015	0.000	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.14	0 mm	Aluminum	Sport	KK66FLFQ10	6	back	98.5	0.000	1.236	1.015	0.000	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.19	0 mm	Aluminum	Metal Links	KK66FLFQ10	6	back	98.5	0.000	1.236	1.015	0.000	
5500	100	802.11a	OFDM	20	17.00	16.08	-0.15	0 mm	Aluminum	Metal Loop	KK66FLFQ10	6	back	98.5	0.002	1.236	1.015	0.003	
5500	100	802.11a	OFDM	20	17.00	16.08	0.04	0 mm	Stainless Steel	Sport	CM95237C3J	6	back	98.5	0.000	1.236	1.015	0.000	
5500	100	802.11a	OFDM	20	17.00	16.08	0.03	0 mm	Stainless Steel	Metal Links	CM95237C3J	6	back	98.5	0.004	1.236	1.015	0.005	A29
5500	100	802.11a	OFDM	20	17.00	16.08	0.12	0 mm	Stainless Steel	Metal Loop	CM95237C3J	6	back	98.5	0.000	1.236	1.015	0.000	
5825	165	802.11a	OFDM	20	17.00	16.04	0.04	0 mm	Aluminum	Sport	K4419KJ33D	6	back	98.5	0.000	1.247	1.015	0.000	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.02	0 mm	Aluminum	Metal Links	K4419KJ33D	6	back	98.5	0.000	1.247	1.015	0.000	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.10	0 mm	Aluminum	Metal Loop	K4419KJ33D	6	back	98.5	0.000	1.247	1.015	0.000	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.09	0 mm	Stainless Steel	Sport	N40Q7NWMKT	6	back	98.5	0.001	1.247	1.015	0.001	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.05	0 mm	Stainless Steel	Metal Links	N40Q7NWMKT	6	back	98.5	0.001	1.247	1.015	0.001	
5825	165	802.11a	OFDM	20	17.00	16.04	-0.21	0 mm	Stainless Steel	Metal Loop	N40Q7NWMKT	6	back	98.5	0.002	1.247	1.015	0.003	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity									
Spatial Peak										4.0 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 10 grams									

Table 10-30
Bluetooth Extremity SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (10g)	Scaling Factor (Const Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	13.00	11.92	0.02	0 mm	Aluminum	Sport	LPDXJVVJW	1	back	100	0.063	1.282	1.000	0.081	
2441	39	Bluetooth	FHSS	13.00	11.92	0.04	0 mm	Aluminum	Metal Links	LPDXJVVJW	1	back	100	0.071	1.282	1.000	0.091	
2441	39	Bluetooth	FHSS	13.00	11.92	-0.01	0 mm	Aluminum	Metal Loop	LPDXJVVJW	1	back	100	0.097	1.282	1.000	0.124	A30
2441	39	Bluetooth	FHSS	13.00	11.92	-0.10	0 mm	Stainless Steel	Sport	WWGCQ14N7M	1	back	100	0.025	1.282	1.000	0.032	
2441	39	Bluetooth	FHSS	13.00	11.92	0.00	0 mm	Stainless Steel	Metal Links	WWGCQ14N7M	1	back	100	0.039	1.282	1.000	0.050	
2441	39	Bluetooth	FHSS	13.00	11.92	-0.07	0 mm	Stainless Steel	Metal Loop	WWGCQ14N7M	1	back	100	0.033	1.282	1.000	0.042	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Extremity										
Spatial Peak								4.0 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 10 grams										

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 46 of 58	

10.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were required since measured SAR results for all frequency bands were less than 0.8 W/kg and 2.0 W/kg for 10g SAR.
7. This device has two housing types: Aluminum and Stainless Steel. The non-metallic wrist accessory, sport band, was evaluated for all exposure conditions. The available metallic wrist accessories, metal links band and metal loop band, were additionally evaluated.
8. This device is a portable wrist-worn device and does not support any other use conditions. Therefore, the procedures in FCC KDB Publication 447498 D01v06 Section 6.2 have been applied for extremity and next to mouth (head) conditions.
9. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
10. The orange highlights throughout the report represents the highest scaled SAR per Equipment Class.

UMTS Notes:

1. UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations and ≤ 2.0 W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 47 of 58

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations and > 1.5 W/kg for 10g SAR, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. This device can only operate with 16 QAM on the uplink with less than or equal to 27 RB. QPSK and 16QAM LTE powers for RB size of 15 ("50% RB") and 27 ("100% RB") were additionally measured to support comparison and SAR test exclusion per KDB 941225 D05v02r04 Section 5.2.4 and 5.3.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 7.6.5 for more information.
3. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.

Bluetooth Notes

1. To determine compliance, Bluetooth SAR was measured with the maximum power condition. Bluetooth was evaluated with a test mode with 100% transmission duty factor.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 48 of 58

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

11.3 Head SAR Simultaneous Transmission Analysis

For SAR summation, the highest reported SAR across all housing and wristband types was used as a conservative evaluation for the simultaneous transmission analysis.

Table 11-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	UMTS 850	0.000	0.275	0.275
	UMTS 1750	0.293	0.275	0.568
	UMTS 1900	0.594	0.275	0.869
	LTE Band 12	0.015	0.275	0.290
	LTE Band 13	0.020	0.275	0.295
	LTE Band 14	0.002	0.275	0.277
	LTE Band 26 (Cell)	0.000	0.275	0.275
	LTE Band 5 (Cell)	0.001	0.275	0.276
	LTE Band 66 (AWS)	0.355	0.275	0.630
	LTE Band 25 (PCS)	0.509	0.275	0.784
	LTE Band 7	1.160	0.275	1.435
	LTE Band 41	0.397	0.275	0.672

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 49 of 58

Table 11-2
Simultaneous Transmission Scenario with Bluetooth, and 5 GHz WLAN (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	UMTS 850	0.000	0.081	0.075	0.081	0.075	0.156
	UMTS 1750	0.293	0.081	0.075	0.374	0.368	0.449
	UMTS 1900	0.594	0.081	0.075	0.675	0.669	0.750
	LTE Band 12	0.015	0.081	0.075	0.096	0.090	0.171
	LTE Band 13	0.020	0.081	0.075	0.101	0.095	0.176
	LTE Band 14	0.002	0.081	0.075	0.083	0.077	0.158
	LTE Band 26 (Cell)	0.000	0.081	0.075	0.081	0.075	0.156
	LTE Band 5 (Cell)	0.001	0.081	0.075	0.082	0.076	0.157
	LTE Band 66 (AWS)	0.355	0.081	0.075	0.436	0.430	0.511
	LTE Band 25 (PCS)	0.509	0.081	0.075	0.590	0.584	0.665
	LTE Band 7	1.160	0.081	0.075	1.241	1.235	1.316
	LTE Band 41	0.397	0.081	0.075	0.478	0.472	0.553

Table 11-3
Simultaneous Transmission Scenario with Bluetooth and WLAN (Head at 1.0 cm)

Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
1	2	1+2
0.081	0.075	0.156

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by:
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Technical Manager
		Page 50 of 58

11.4 Extremity SAR Simultaneous Transmission Analysis

For SAR summation, the highest reported SAR across all housing and wristband types was used as a conservative evaluation for the simultaneous transmission analysis.

Table 11-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Extremity at 0.0 cm)

Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
	1	2	1+2
UMTS 850	0.175	0.248	0.423
UMTS 1750	0.189	0.248	0.437
UMTS 1900	0.335	0.248	0.583
LTE Band 12	0.149	0.248	0.397
LTE Band 13	0.279	0.248	0.527
LTE Band 14	0.243	0.248	0.491
LTE Band 26 (Cell)	0.186	0.248	0.434
LTE Band 5 (Cell)	0.260	0.248	0.508
LTE Band 66 (AWS)	0.276	0.248	0.524
LTE Band 25 (PCS)	0.449	0.248	0.697
LTE Band 7	1.034	0.248	1.282
LTE Band 41	0.752	0.248	1.000

Table 11-5
Simultaneous Transmission Scenario with Bluetooth, and 5 GHz WLAN (Extremity at 0.0 cm)

Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Σ SAR (W/kg)	Σ SAR (W/kg)
	1	2	3	1+2	1+3	1+2+3
UMTS 850	0.175	0.124	0.005	0.299	0.180	0.304
UMTS 1750	0.189	0.124	0.005	0.313	0.194	0.318
UMTS 1900	0.335	0.124	0.005	0.459	0.340	0.464
LTE Band 12	0.149	0.124	0.005	0.273	0.154	0.278
LTE Band 13	0.279	0.124	0.005	0.403	0.284	0.408
LTE Band 14	0.243	0.124	0.005	0.367	0.248	0.372
LTE Band 26 (Cell)	0.186	0.124	0.005	0.310	0.191	0.315
LTE Band 5 (Cell)	0.260	0.124	0.005	0.384	0.265	0.389
LTE Band 66 (AWS)	0.276	0.124	0.005	0.400	0.281	0.405
LTE Band 25 (PCS)	0.449	0.124	0.005	0.573	0.454	0.578
LTE Band 7	1.034	0.124	0.005	1.158	1.039	1.163
LTE Band 41	0.752	0.124	0.005	0.876	0.757	0.881

Table 11-6
Simultaneous Transmission Scenario with Bluetooth and WLAN (Extremity at 0.0 cm)

Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
1	2	1+2
0.124	0.005	0.129

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 51 of 58

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 .

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 52 of 58

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was not assessed for each frequency band since all measured SAR values are < 0.8 W/kg for 1g SAR and < 2.0 W/kg for 10g SAR.

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis was not required.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 53 of 58

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Vector Network Analyzer	2/11/2022	Annual	2/11/2023	MY40003841
Agilent	E4438C	ESG Vector Signal Generator	3/22/2022	Annual	3/22/2023	US41460739
Agilent	E5515C	Wireless Communications Test Set	5/4/2021	Biennial	5/4/2023	GB41450275
Agilent	N5182A	MXG Vector Signal Generator	11/17/2021	Annual	11/17/2022	US46240505
Agilent	N5182A	MXG Vector Signal Generator	1/12/2022	Annual	1/12/2023	MY47420837
Agilent	N9202A	MXA Signal Analyzer	5/6/2022	Annual	5/6/2023	MY51240479
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343971
Anritsu	MA24106A	USB Power Sensor	9/21/2021	Annual	9/21/2022	2018527
Anritsu	MA24106A	USB Power Sensor	9/21/2021	Annual	9/21/2022	1827527
Anritsu	MA24106A	USB Power Sensor	9/21/2021	Annual	9/21/2022	1244515
Anritsu	MA24106A	USB Power Sensor	9/21/2021	Annual	9/21/2022	2018534
Anritsu	MA2411B	Pulse Power Sensor	3/2/2022	Annual	3/2/2023	1126066
Anritsu	MT8821C	Radio Communication Analyzer	5/2/2022	Annual	5/2/2023	6209091190
Anritsu	MT8821C	Radio Communication Analyzer	5/24/2022	Annual	5/24/2023	6201144418
Control Company	4040	Therm./Clock/Humidity Monitor	1/21/2022	Annual	1/21/2023	160574418
Control Company	4040	Therm./Clock/Humidity Monitor	3/12/2021	Biennial	3/12/2023	210202100
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	C01065
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	C01064
Insize	1108-150	Digital Caliper	4/5/2022	Biennial	4/5/2024	409193536
MCL	BW-N10W5+	10dB Attenuator	CBT	N/A	CBT	1611
MCL	BW-N3W5+	3dB Attenuator	CBT	N/A	CBT	1812
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1311
Mini-Circuits	NLP-1000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	ZHDC-16-63-S+	50-6000MHz Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	NRX	Power Meter	11/22/2021	Annual	11/22/2022	102583
Rohde & Schwarz	CMW500	Radio Communication Tester	4/14/2022	Annual	4/14/2023	167284
Rohde & Schwarz	CMW500	Radio Communication Tester	4/14/2022	Annual	4/14/2023	167285
Rohde & Schwarz	CMW500	Radio Communication Tester	4/14/2022	Annual	4/14/2023	101699
Rohde & Schwarz	CMW500	Radio Communication Tester	12/22/2021	Annual	12/22/2022	106578
Rohde & Schwarz	CMW500	Radio Communication Tester	9/29/2021	Annual	9/29/2022	145663
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/29/2021	Annual	9/29/2022	151849
Huber + Suhner	74Z-0-0-Z1	Torque Wrench	4/6/2022	Biennial	4/6/2024	N/A
SPEAG	DAKS-3.5	Portable DAK	10/7/2021	Annual	10/7/2022	1045
SPEAG	D750V3	750 MHz SAR Dipole	5/16/2022	Annual	5/16/2023	1057
SPEAG	D750V3	750 MHz SAR Dipole	9/8/2021	Annual	9/8/2022	1097
SPEAG	D835V2	835 MHz SAR Dipole	11/11/2021	Annual	11/11/2022	4d108
SPEAG	D835V2	835 MHz SAR Dipole	5/16/2022	Annual	5/16/2023	460
SPEAG	D850V2	850 MHz SAR Dipole	12/7/2021	Annual	12/7/2022	1009
SPEAG	D1750V2	1750 MHz SAR Dipole	5/10/2022	Annual	5/10/2023	1083
SPEAG	D1750V2	1750 MHz SAR Dipole	9/9/2020	Biennial	9/9/2022	1104
SPEAG	D1900V2	1900 MHz SAR Dipole	5/16/2022	Annual	5/16/2023	5d030
SPEAG	D1900V2	1900 MHz SAR Dipole	9/10/2020	Biennial	9/10/2022	5d181
SPEAG	D2450V2	2450MHz SAR Dipole	11/12/2019	Triennial	11/12/2022	855
SPEAG	D2600V2	2600 MHz SAR Dipole	11/12/2019	Triennial	11/12/2022	1068
SPEAG	D2600V2	2600 MHz SAR Dipole	5/11/2022	Annual	5/11/2023	1042
SPEAG	D5GHzV2	5 GHz SAR Dipole	3/22/2022	Annual	3/22/2023	1123
SPEAG	EX3DV4	SAR Probe	4/19/2022	Annual	4/19/2023	7499
SPEAG	EX3DV4	SAR Probe	12/10/2021	Annual	12/10/2022	7490
SPEAG	EX3DV4	SAR Probe	10/27/2021	Annual	10/27/2022	7420
SPEAG	EX3DV4	SAR Probe	4/22/2022	Annual	4/22/2023	7546
SPEAG	EX3DV4	SAR Probe	4/22/2022	Annual	4/22/2023	7532
SPEAG	EX3DV4	SAR Probe	2/21/2022	Annual	2/21/2023	7308
SPEAG	EX3DV4	SAR Probe	11/16/2021	Annual	11/16/2022	7639
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/13/2022	Annual	4/13/2023	1465
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/14/2022	Annual	4/14/2023	1402
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/20/2021	Annual	10/20/2022	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/18/2021	Annual	11/18/2022	1237
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/11/2021	Annual	11/11/2022	1646
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/13/2022	Annual	4/13/2023	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/24/2022	Annual	2/24/2023	467

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements. Each equipment item was used solely within its respective calibration period.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 54 of 58

14 MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)				RSS			12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)				k=2			24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCG-A2772	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch		Page 55 of 58

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 56 of 58

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 57 of 58

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCG-A2772	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2205090038-22.BCG (Rev 1)	DUT Type: Watch	Page 58 of 58