

Test Plot 1#: WLAN 2.4G Mode B_ Vertical-Front _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 54.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2437 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.166 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.056 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

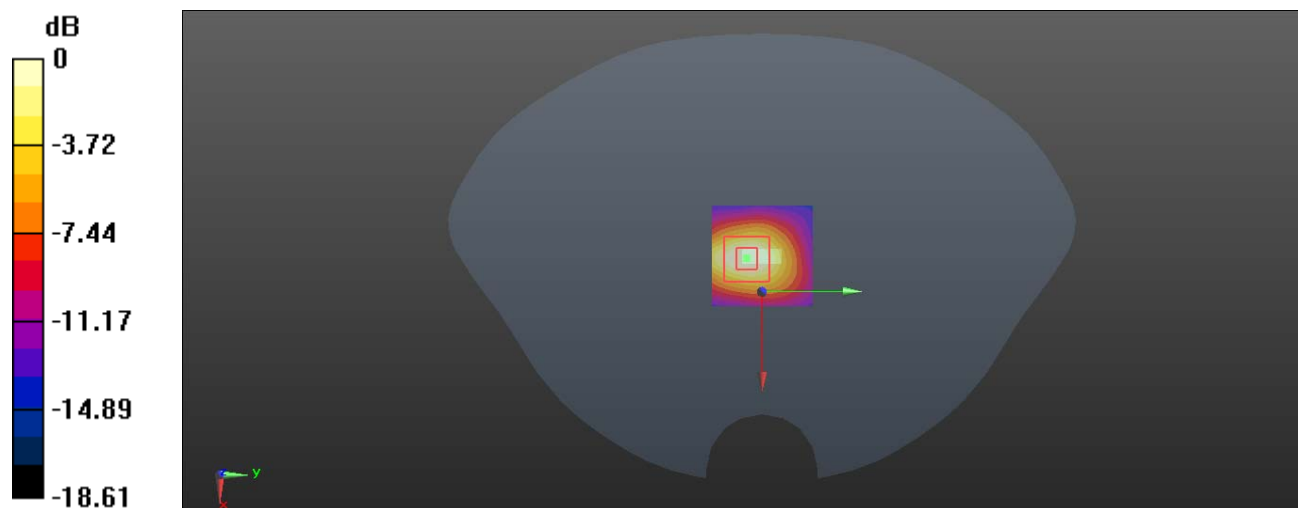

0 dB = 0.138 W/kg = -8.60 dBW/kg

Test Plot 2#: WLAN 2.4G Mode B_ Horizontal-Up _Low**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 54.656$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2412 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.628 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.641 W/kg

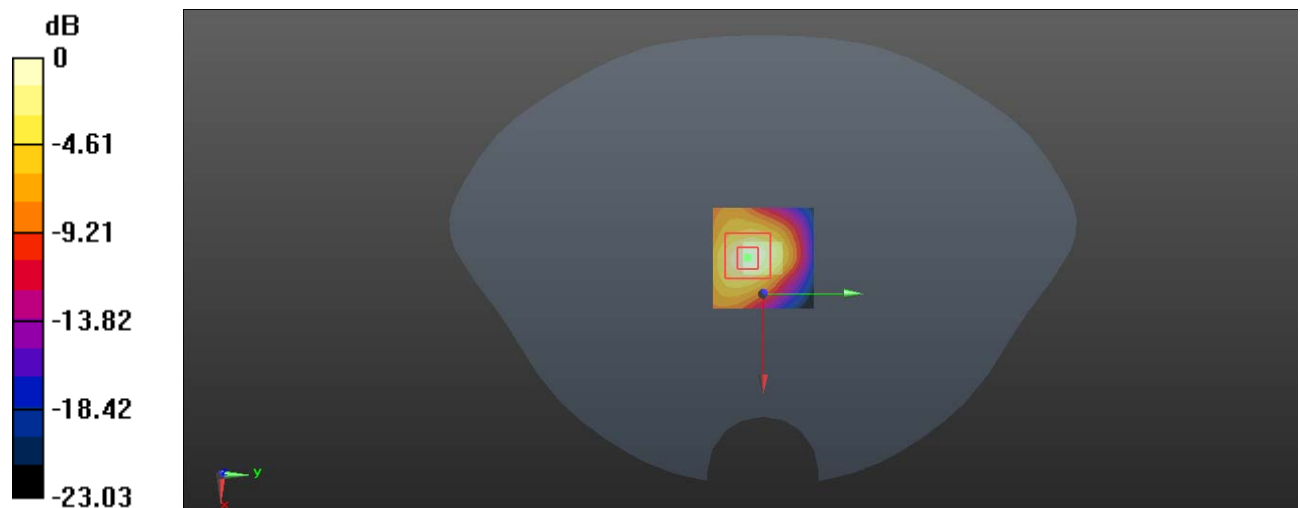

0 dB = 0.641 W/kg = -1.93 dBW/kg

Test Plot 3#: WLAN 2.4G Mode B_ Horizontal-Up _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 54.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2437 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.426 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.00 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.493 W/kg

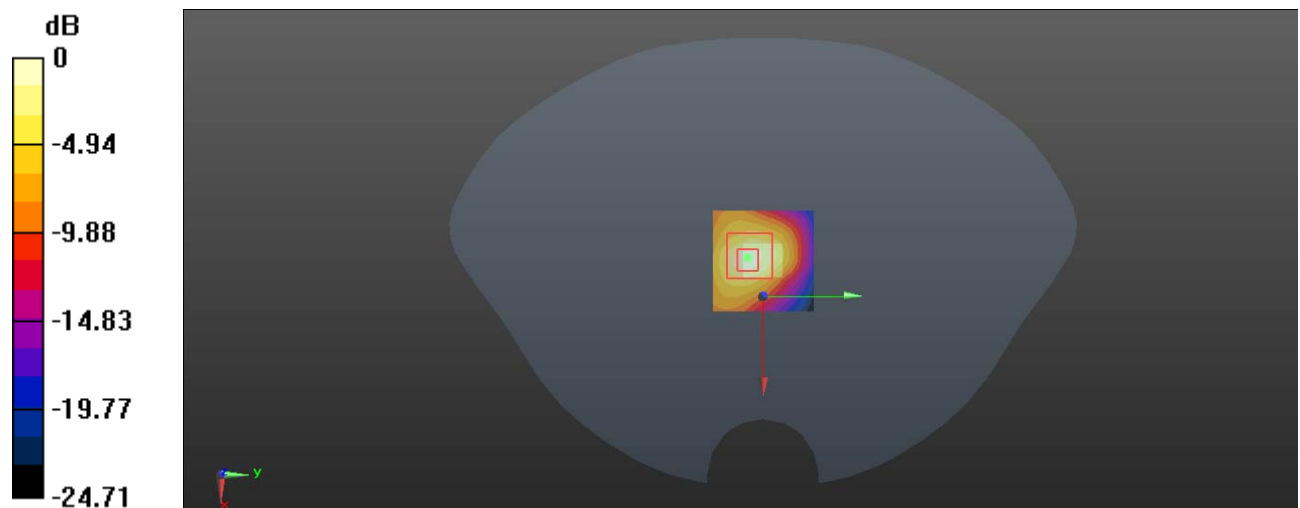

0 dB = 0.493 W/kg = -3.07 dBW/kg

Test Plot 4#: WLAN 2.4G Mode B_ Horizontal-Up _High**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2462 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.413 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.57 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.462 W/kg

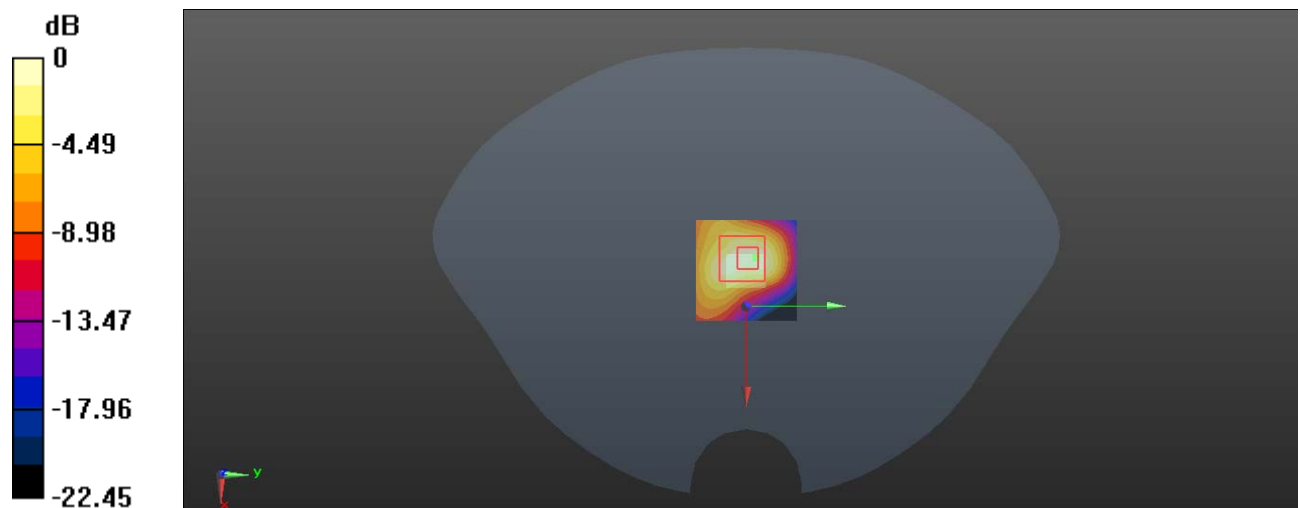

0 dB = 0.462 W/kg = -3.35 dBW/kg

Test Plot 5#: WLAN 2.4G Mode B_Body Top_Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 54.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2437 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0653 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.117 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0597 W/kg

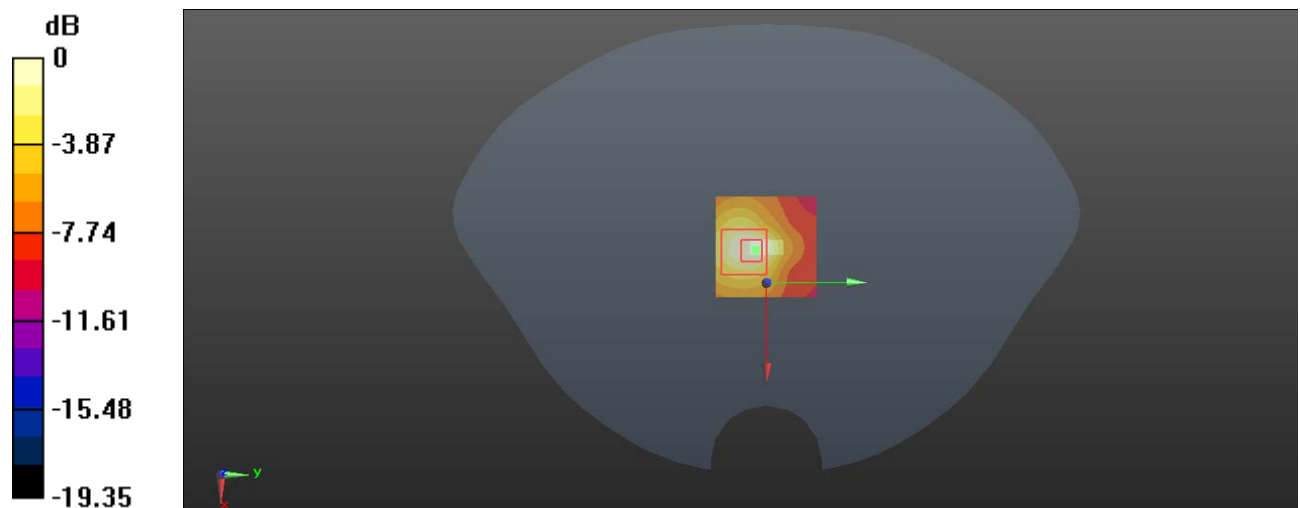

0 dB = 0.0597 W/kg = -12.24 dBW/kg

Test Plot 6#: WLAN 2.4G Mode B_ Horizontal-Down _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 54.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2437 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.279 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.819 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

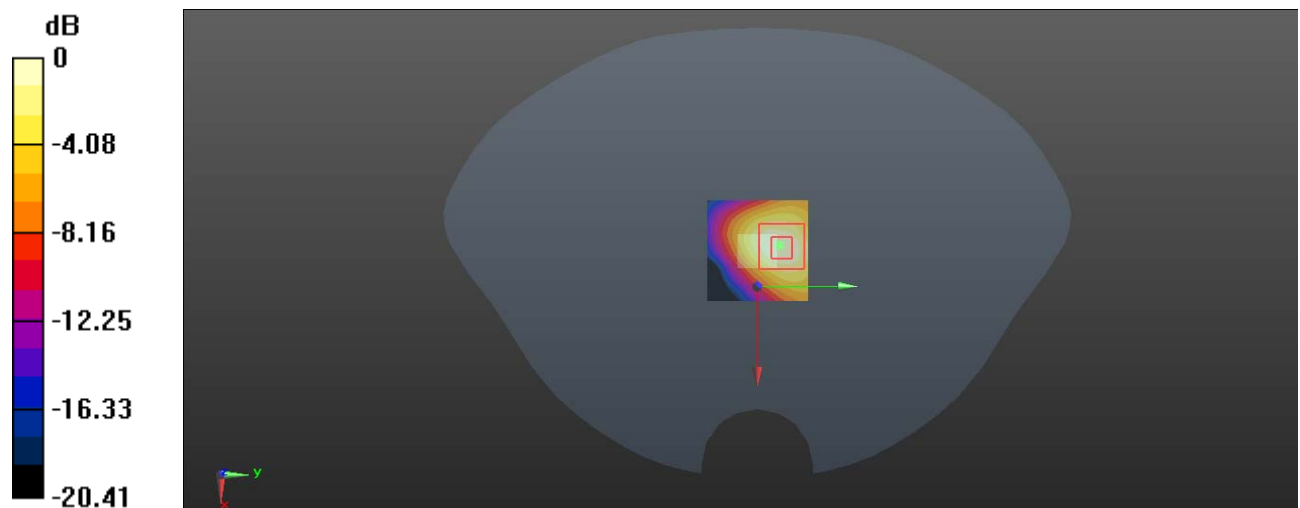

0 dB = 0.263 W/kg = -5.80 dBW/kg

Test Plot 7#: WLAN 2.4G Mode B_ Vertical-Back _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 54.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47) @ 2437 MHz; Calibrated: 2018/9/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (41x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.239 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.81 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

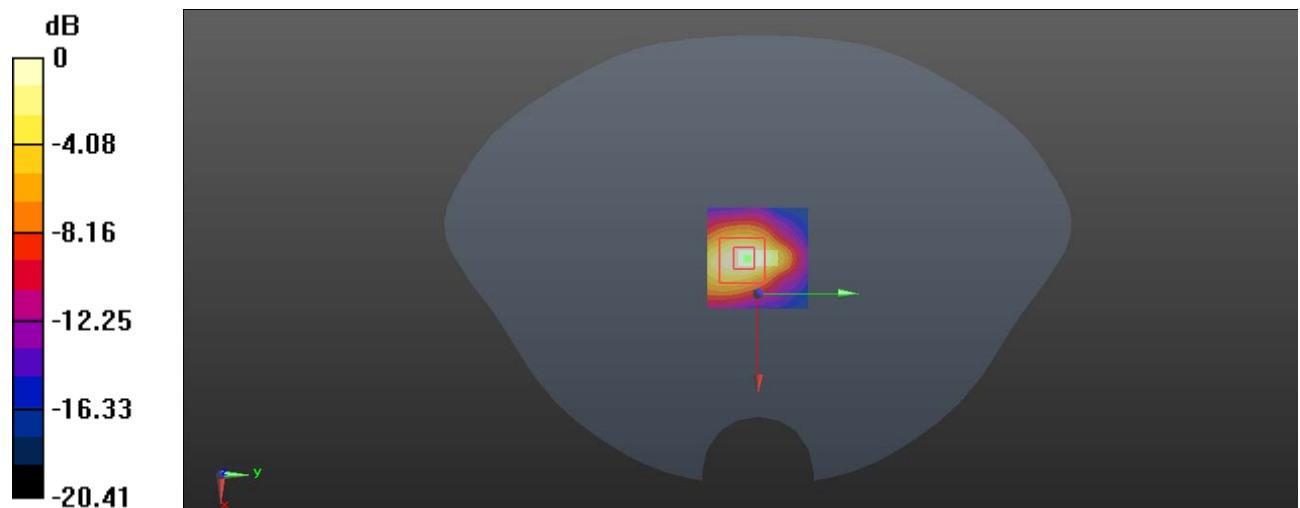

0 dB = 0.211 W/kg = -6.76 dBW/kg

Test Plot 8#: WLAN 5.8G Mode A_Vertical-Front _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.936 \text{ S/m}$; $\epsilon_r = 47.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5785 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

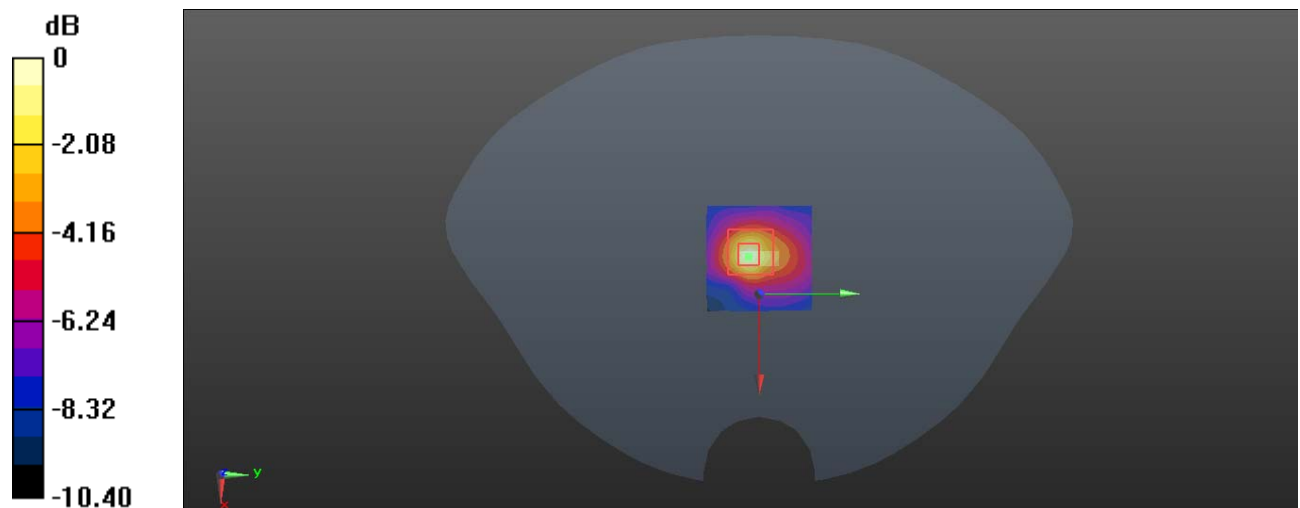Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.716 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 13.91 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.29 W/kg **SAR(1 g) = 0.261 W/kg ; SAR(10 g) = 0.128 W/kg** Maximum value of SAR (measured) = 0.696 W/kg 0 dB = 0.696 W/kg = -1.57 dBW/kg

Test Plot 9#: WLAN 5.8G Mode A_Horizontal-Up_Low**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.929 \text{ S/m}$; $\epsilon_r = 48.011$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5745 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

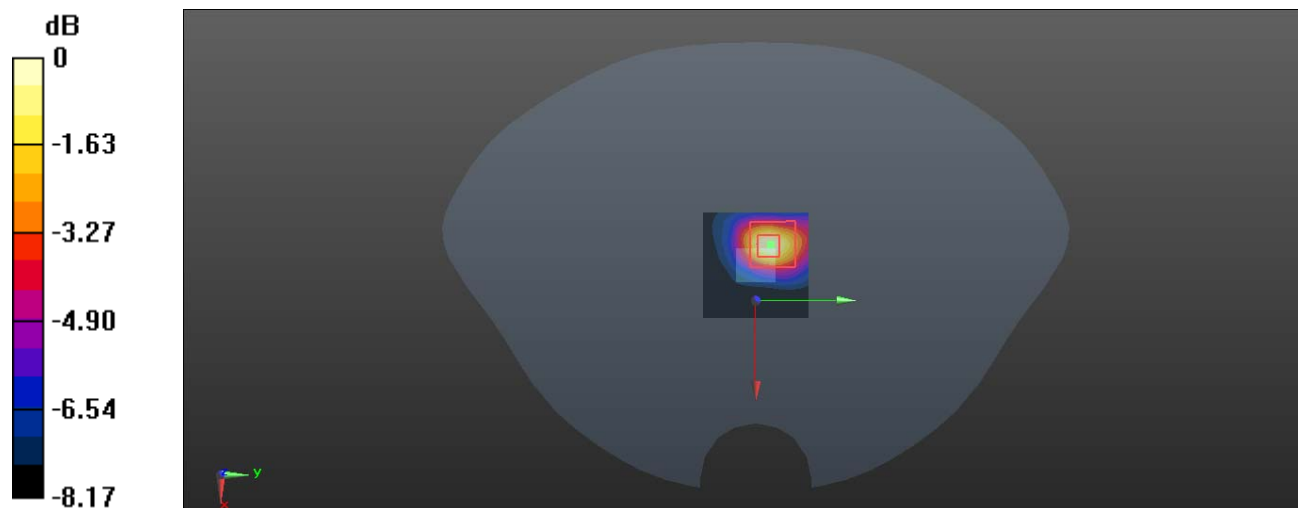Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 2.15 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 11.86 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 4.03 W/kg **SAR(1 g) = 1.06 W/kg ; SAR(10 g) = 0.589 W/kg** Maximum value of SAR (measured) = 2.04 W/kg 0 dB = 2.04 W/kg = 3.10 dBW/kg

Test Plot 10#: WLAN 5.8G Mode A_ Horizontal-Up _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.936 \text{ S/m}$; $\epsilon_r = 47.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5785 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

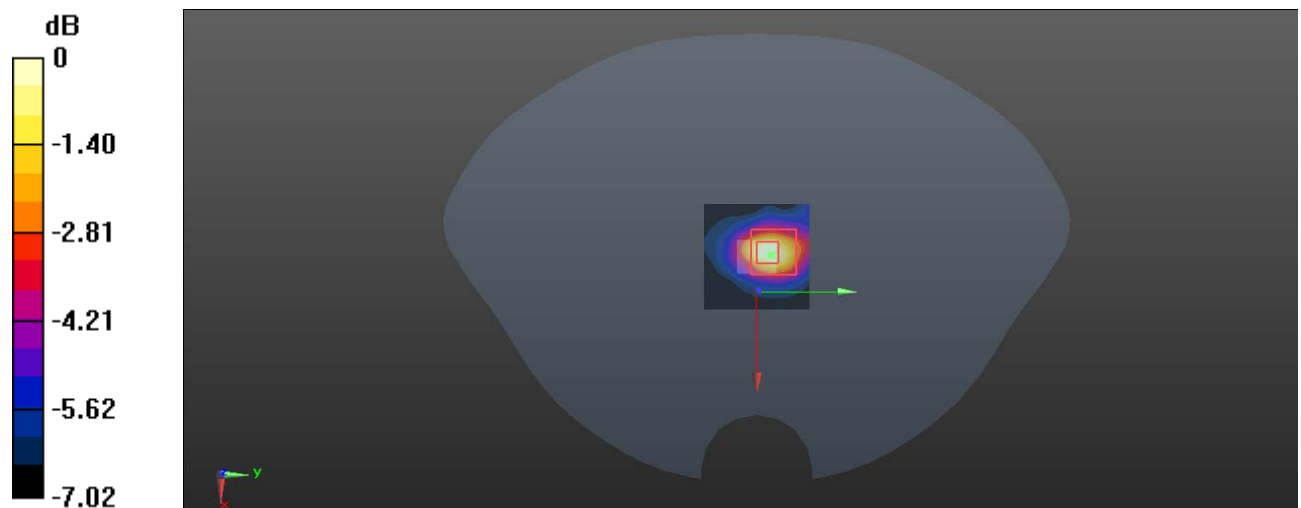Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 1.78 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 17.11 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 3.26 W/kg **SAR(1 g) = 0.881 W/kg ; SAR(10 g) = 0.540 W/kg** Maximum value of SAR (measured) = 1.61 W/kg 0 dB = 1.61 W/kg = 2.07 dBW/kg

Test Plot 11#: WLAN 5.8G Mode A_ Horizontal-Up _High**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.949 \text{ S/m}$; $\epsilon_r = 47.245$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5825 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

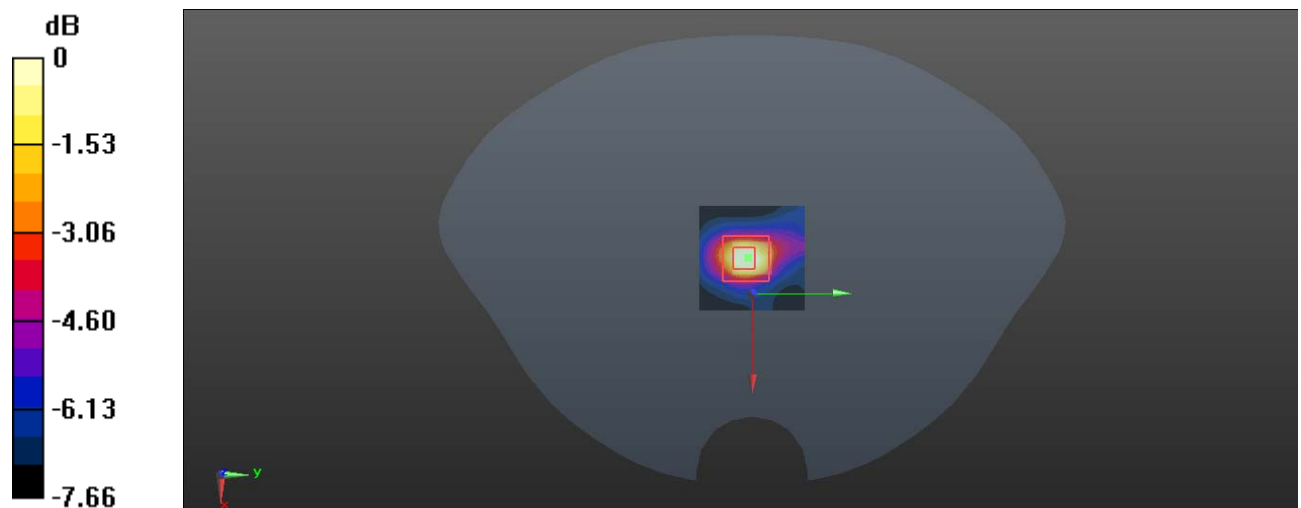Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 2.46 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 19.49 V/m ; Power Drift = -0.17 dB Peak SAR (extrapolated) = 4.16 W/kg **SAR(1 g) = 1.07 W/kg ; SAR(10 g) = 0.604 W/kg** Maximum value of SAR (measured) = 1.96 W/kg 0 dB = 1.96 W/kg = 2.92 dBW/kg

Test Plot 12#: WLAN 5.8G Mode A_Body Top_Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.936 \text{ S/m}$; $\epsilon_r = 47.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5785 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

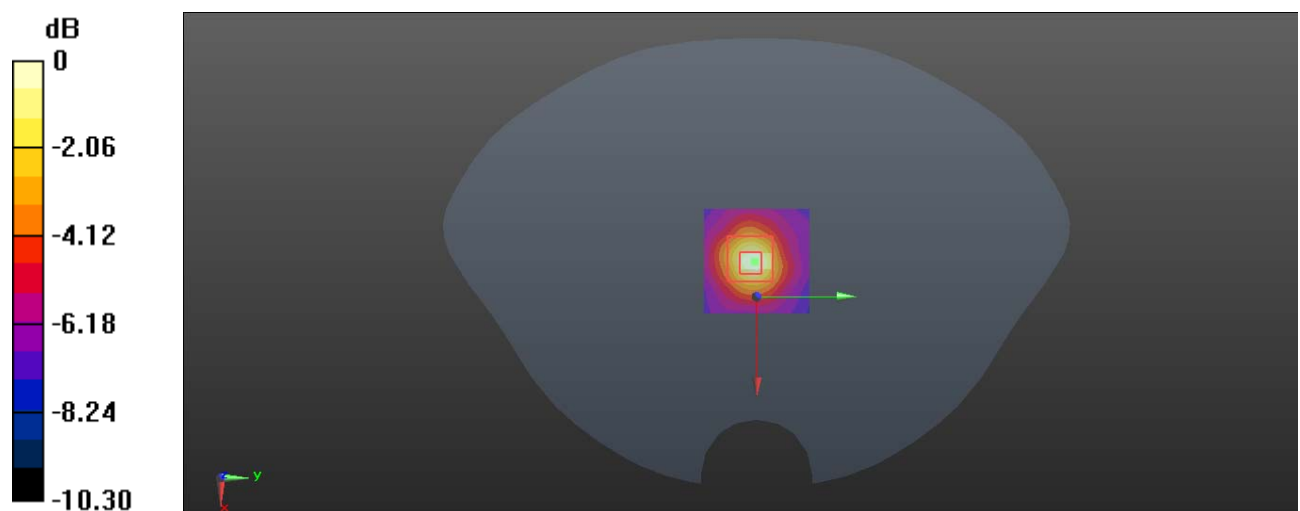Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.530 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 13.02 V/m ; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.826 W/kg **SAR(1 g) = 0.286 W/kg ; SAR(10 g) = 0.141 W/kg** Maximum value of SAR (measured) = 0.511 W/kg 0 dB = 0.511 W/kg = -2.92 dBW/kg

Test Plot 13#: WLAN 5.8G Mode A_ Horizontal-Down _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.936 \text{ S/m}$; $\epsilon_r = 47.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5785 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

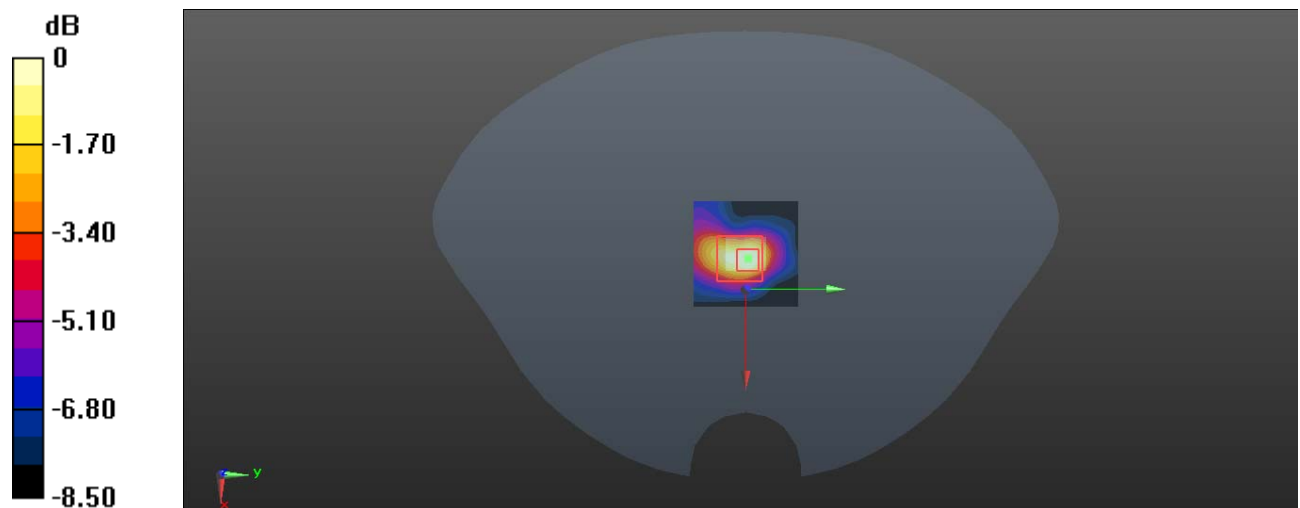Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 1.29 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 20.62 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 2.28 W/kg **SAR(1 g) = 0.681 W/kg ; SAR(10 g) = 0.334 W/kg** Maximum value of SAR (measured) = 1.14 W/kg 0 dB = 1.14 W/kg = 0.57 dBW/kg

Test Plot 14#: WLAN 5.8G Mode A_ Vertical-Back _Mid**DUT: 802.11AC Dual-Band Wi-Fi USB Adapter; Type: EP-AC1619; Serial: 19081900720**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.936 \text{ S/m}$; $\epsilon_r = 47.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33) @ 5785 MHz; Calibrated: 2018/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn471; Calibrated: 2018/12/3
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

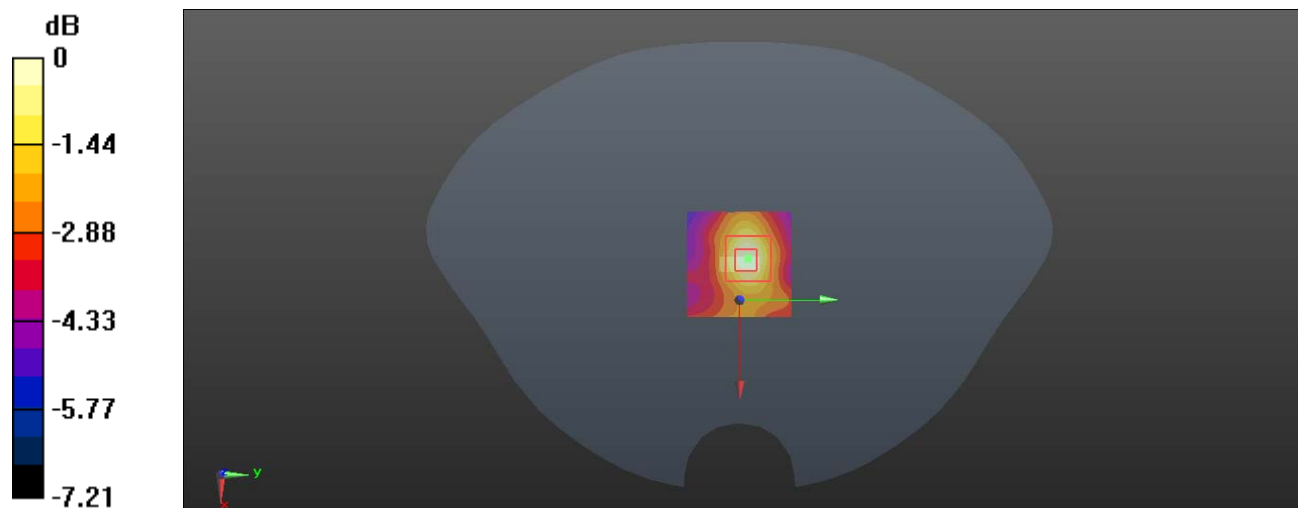Area Scan (51x51x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.624 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 12.44 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.09 W/kg **SAR(1 g) = 0.345 W/kg ; SAR(10 g) = 0.218 W/kg** Maximum value of SAR (measured) = 0.608 W/kg  $0 \text{ dB} = 0.608 \text{ W/kg} = -2.16 \text{ dBW/kg}$