

Appendix B

Detailed Test Results

1. GSM
GSM850 for Head &Body
GSM1900 for Head &Body
2. WCDMA
WCDMA Band II for Head &Body
WCDMA Band IV for Head &Body
WCDMA Band V for Head &Body
3. LTE
LTE Band 2 for Head &Body
LTE Band 4 for Head &Body
LTE Band 5 for Head &Body
LTE Band 7 for Head &Body
LTE Band 12 for Head &Body
LTE Band 17 for Head &Body
LTE Band 26 for Head &Body
LTE Band 38 for Head &Body
LTE Band 41 for Head &Body
4. WIFI
WIFI 2.4G for Head &Body
WIFI 5G for Head &Body
5. BT
Bluetooth for Head &Body

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM850 128CH Right cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GSM Only Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium: HSL835; Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 40.905$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.77, 9.77, 9.77); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.251 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.624 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

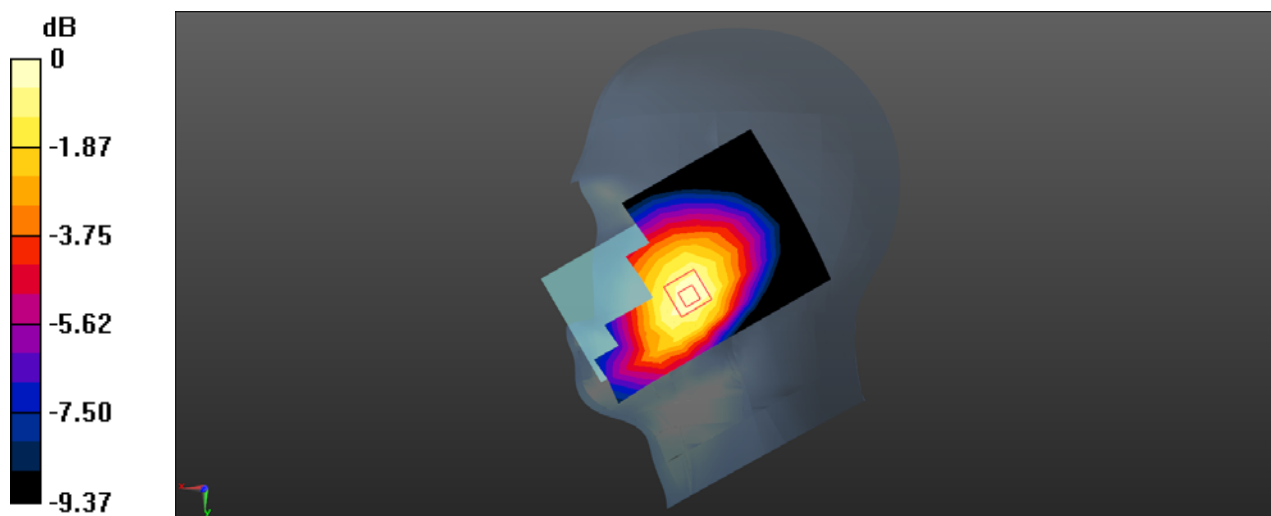

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM850 GPRS 2TS 190CH Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: MSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 1.013$ S/m; $\epsilon_r = 54.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.488 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.92 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

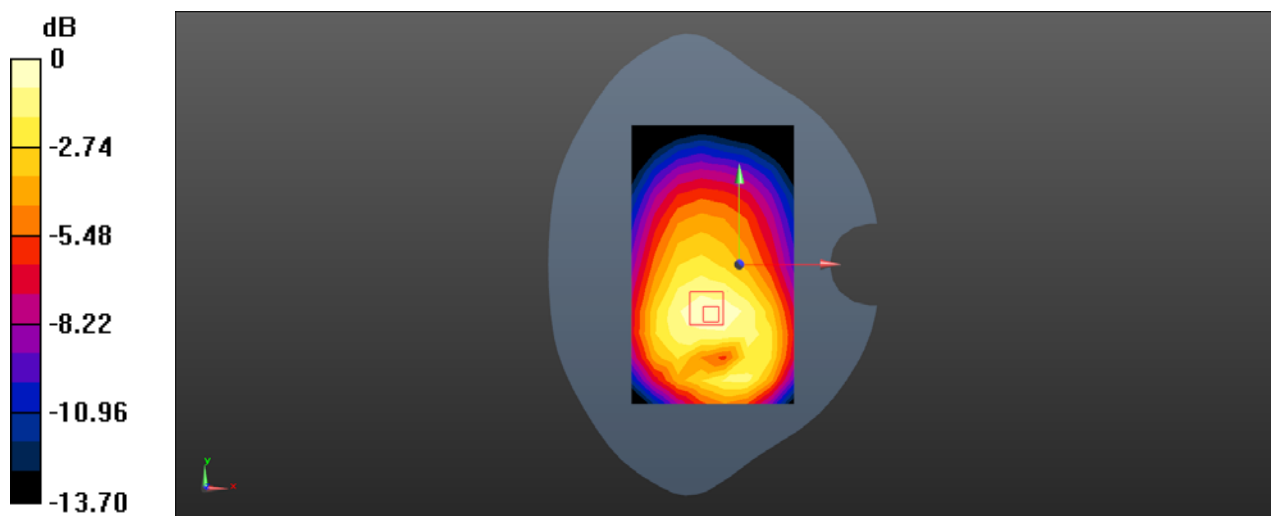

0 dB = 0.512 W/kg = -2.91 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM850 GPRS 2TS 251CH Back side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 848.6 MHz; Duty Cycle: 1:4.14954

Medium: MSL835; Medium parameters used: $f = 849$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 54.805$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.708 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.33 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.941 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.757 W/kg

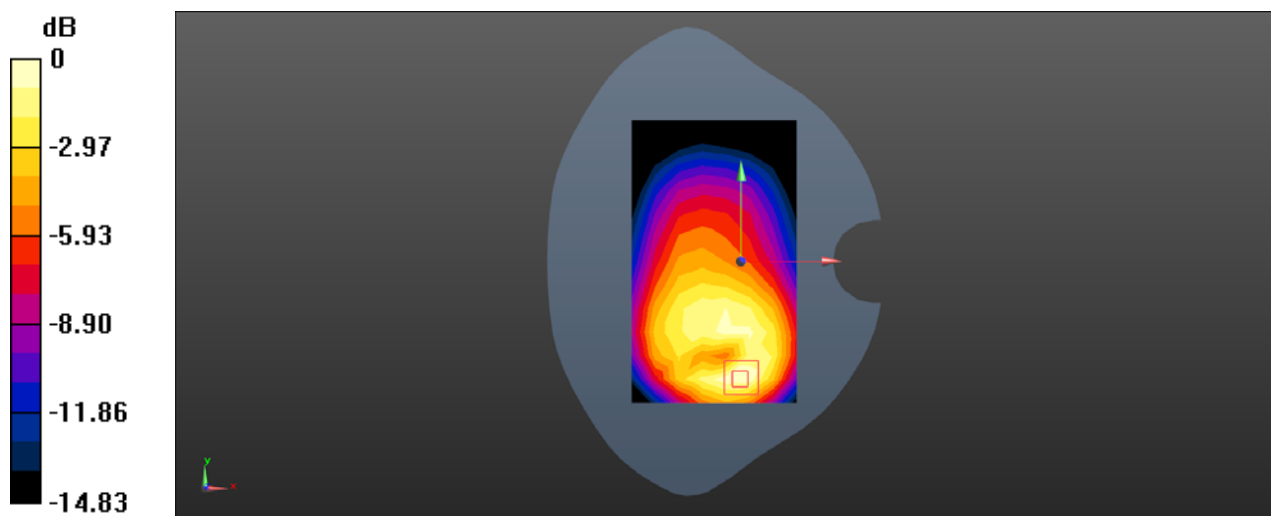

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM1900 GSM 661CH Right tilted with SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.26, 8.26, 8.26); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0551 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.201 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0622 W/kg

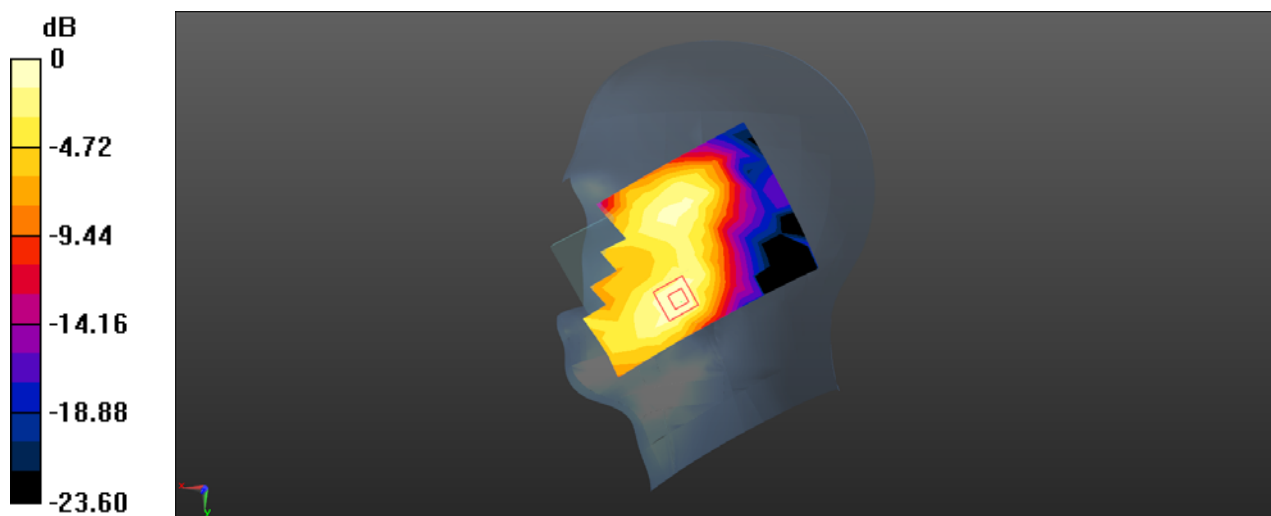

0 dB = 0.0622 W/kg = -12.06 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM1900 GPRS 2TS 661CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: MSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 53.871$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.330 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.990 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

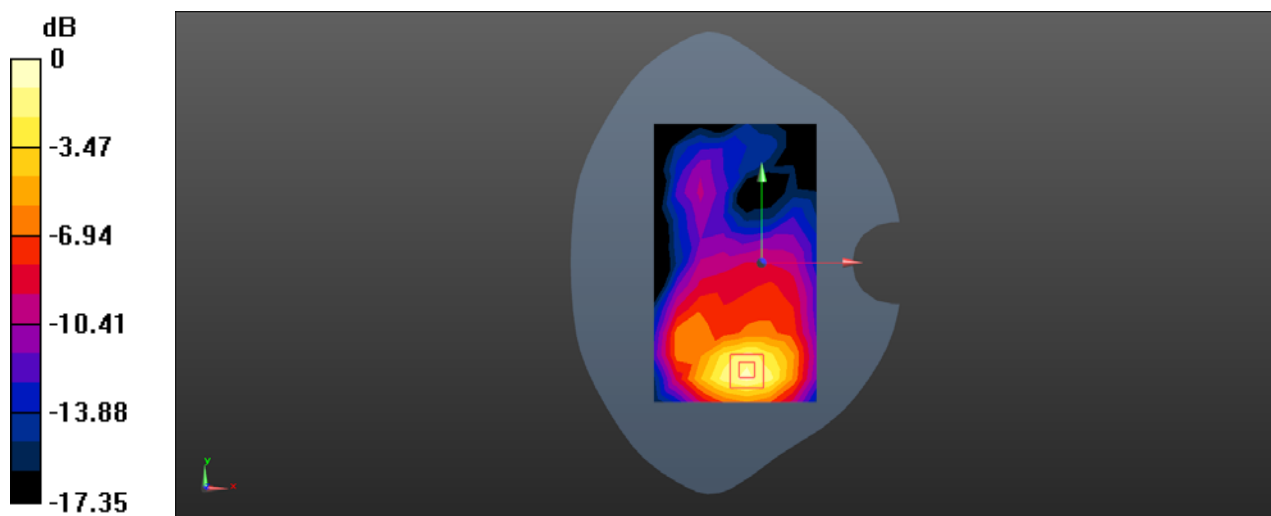

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM1900 GPRS 2TS 810CH Bottom side 10mm with SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.14954

Medium: MSL1900; Medium parameters used: $f = 1910$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 53.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.527 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.48 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.841 W/kg

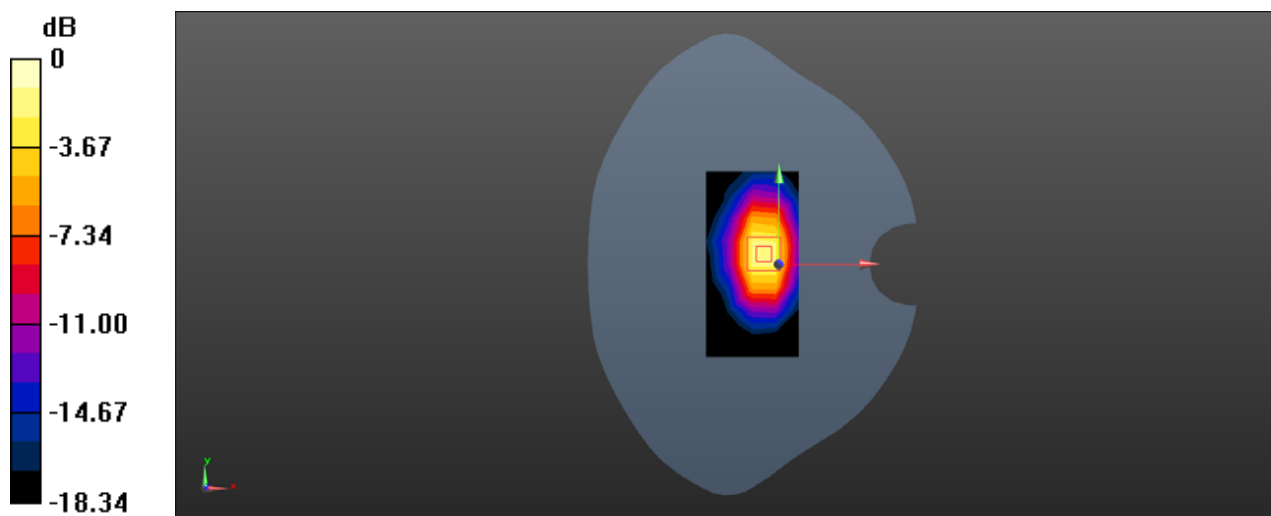

Test Laboratory: SGS-SAR Lab

YAS-L29 GSM1900 GPRS 2TS 512CH Bottom side 0mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.14954


Medium: MSL1900; Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 53.924$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 5.82 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 53.68 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 8.89 W/kg
SAR(1 g) = 4.41 W/kg; SAR(10 g) = 2.09 W/kg
Maximum value of SAR (measured) = 6.63 W/kg

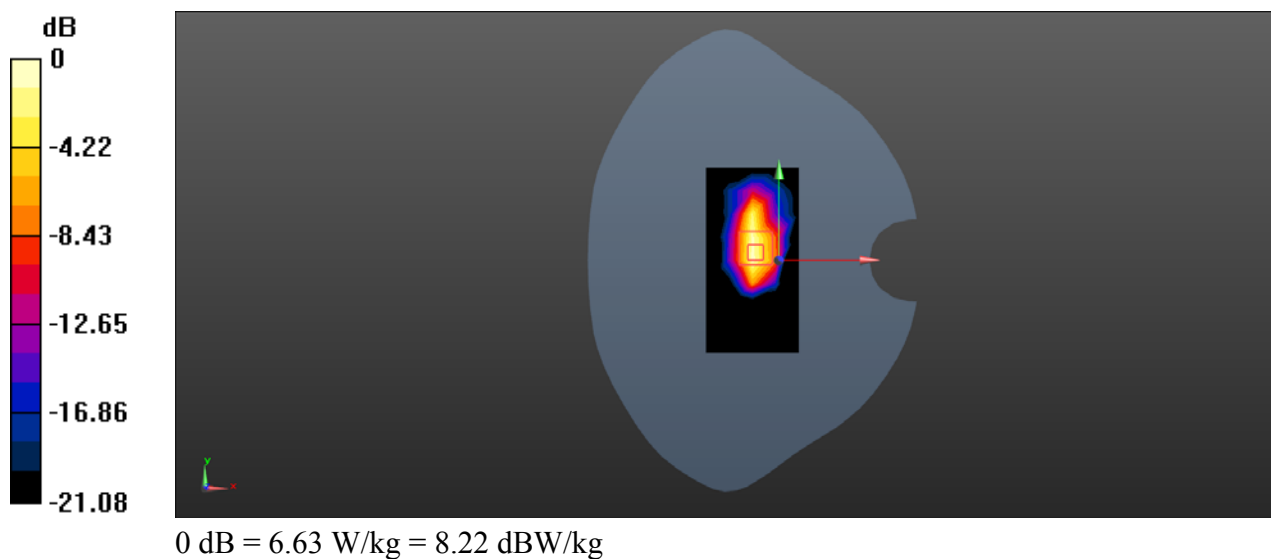

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band II RMC 9400CH Left cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.26, 8.26, 8.26); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.112 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.168 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

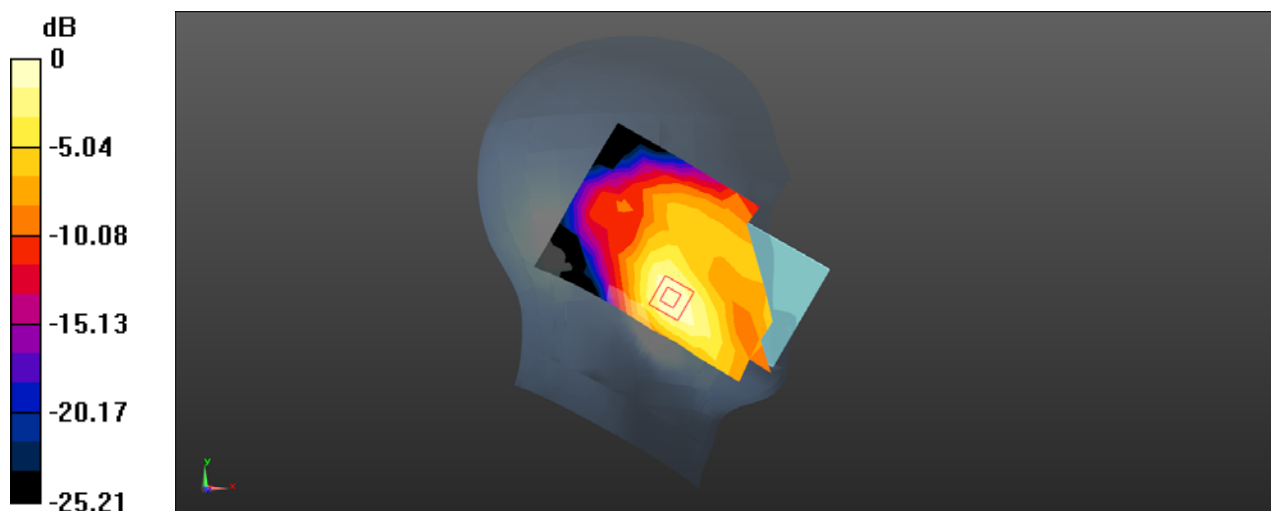

0 dB = 0.122 W/kg = -9.14 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band II RMC 9538CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 52.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.513 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.484 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

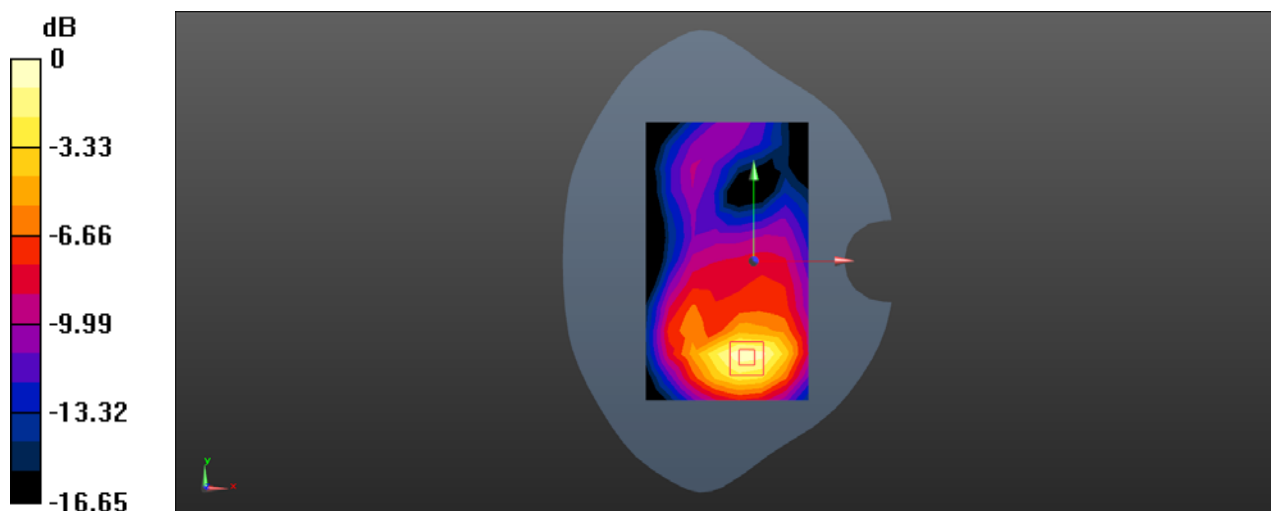

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band II RMC 9538CH Bottom side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 52.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.547 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.86 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.901 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

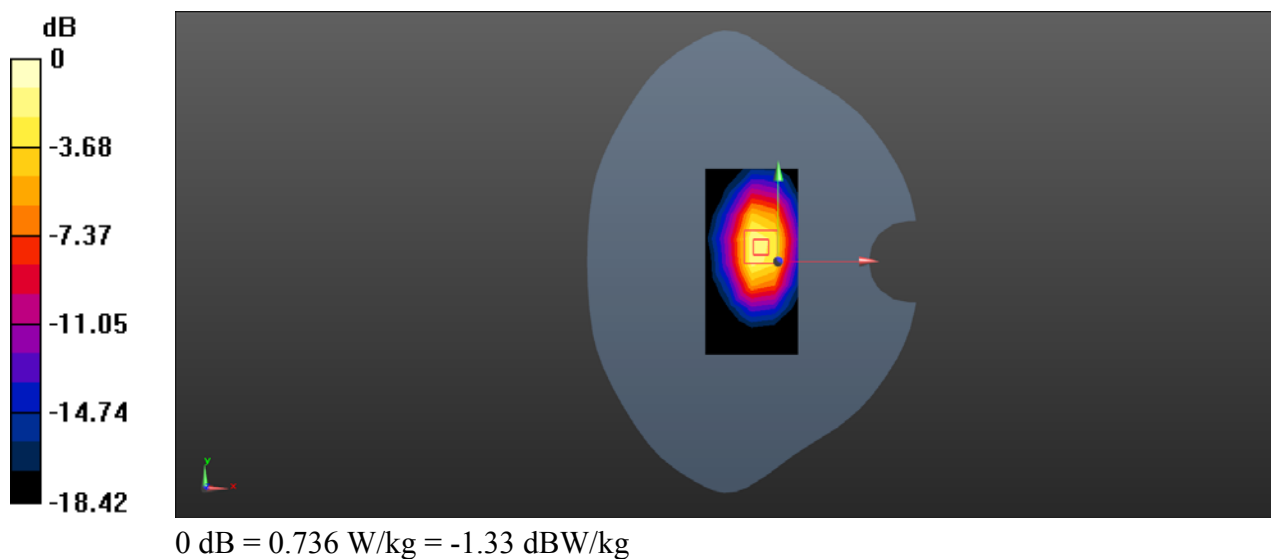

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band II RMC 9538CH Bottom side 0mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 52.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 6.14 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 57.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.89 W/kg; SAR(10 g) = 2.81 W/kg

Maximum value of SAR (measured) = 8.77 W/kg

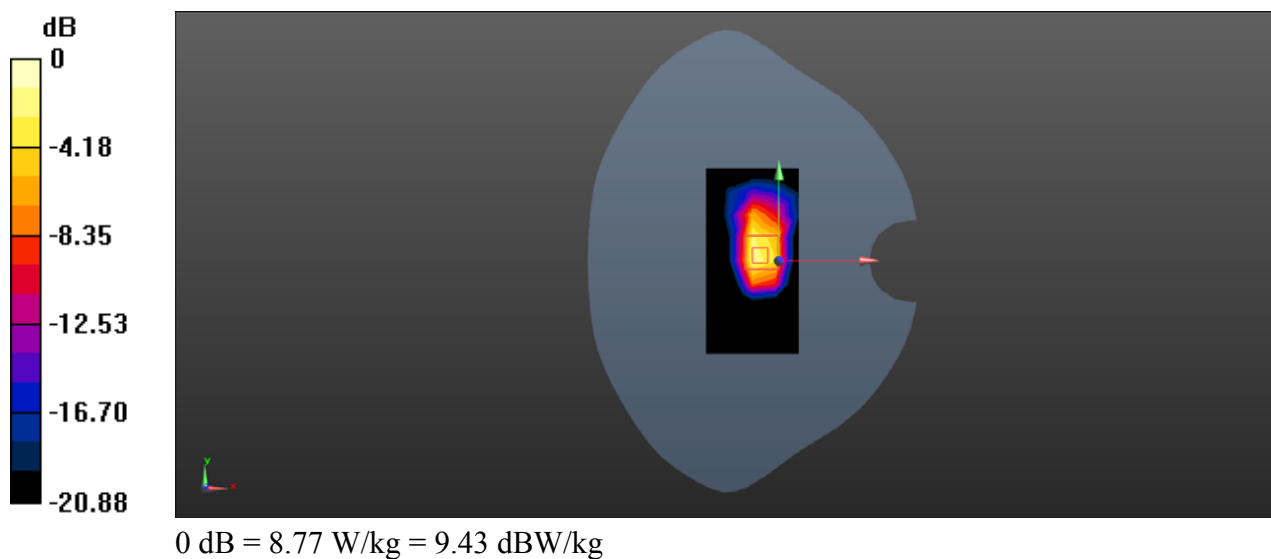

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band IV RMC 1412CH Right cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.299$ S/m; $\epsilon_r = 40.494$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.54, 8.54, 8.54); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.116 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.102 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

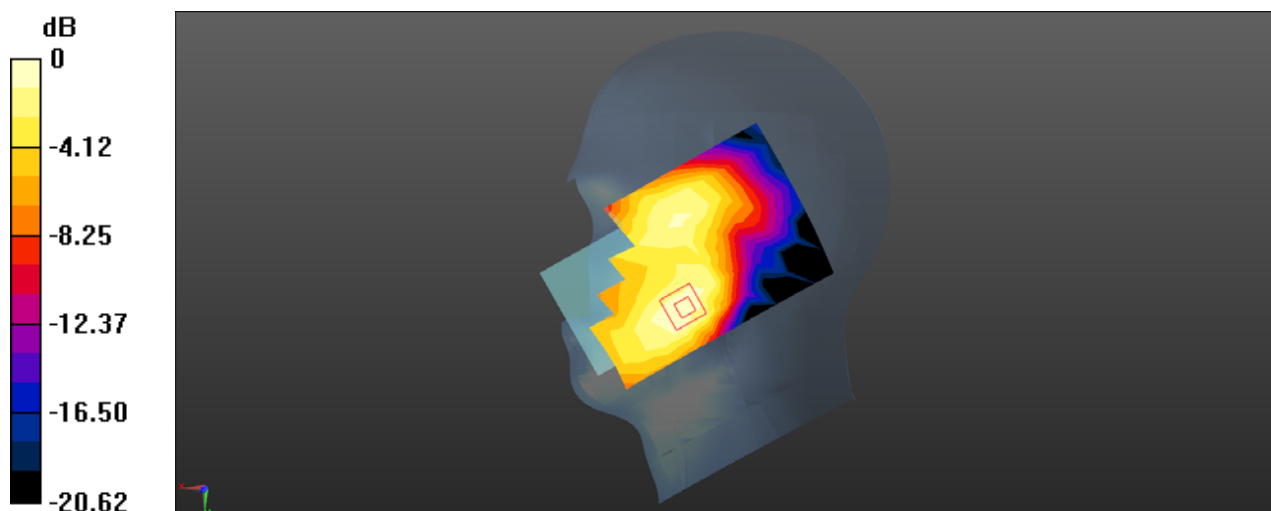

0 dB = 0.124 W/kg = -9.07 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band IV RMC 1513 Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used: $f = 1753$ MHz; $\sigma = 1.496$ S/m; $\epsilon_r = 52.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.49, 8.49, 8.49); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.411 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.551 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.513 W/kg

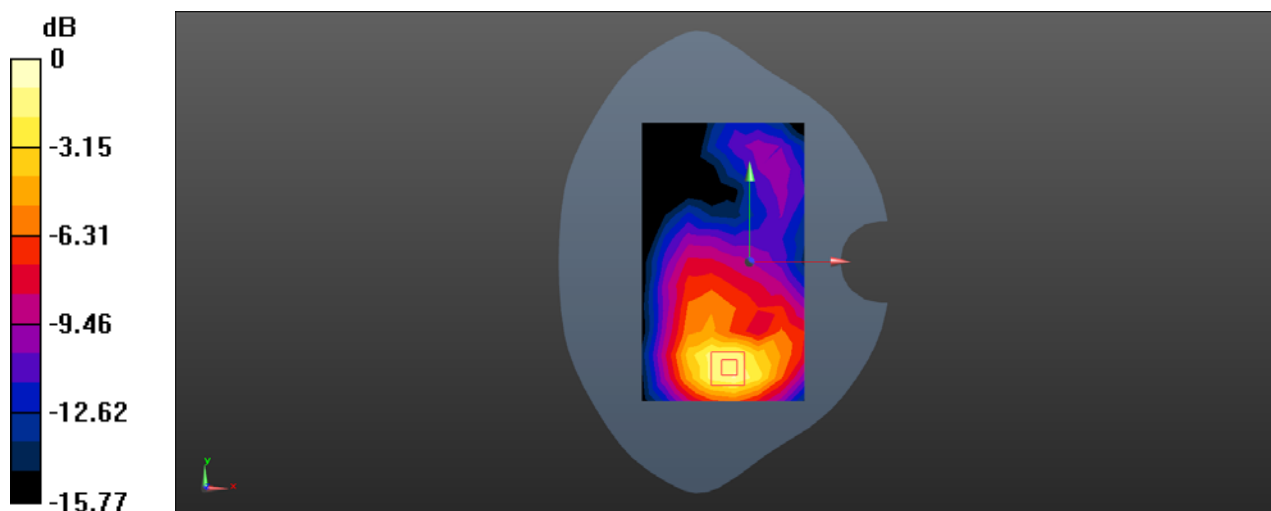

0 dB = 0.513 W/kg = -2.90 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band IV RMC 1412 Bottom side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 52.237$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.49, 8.49, 8.49); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.559 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.25 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

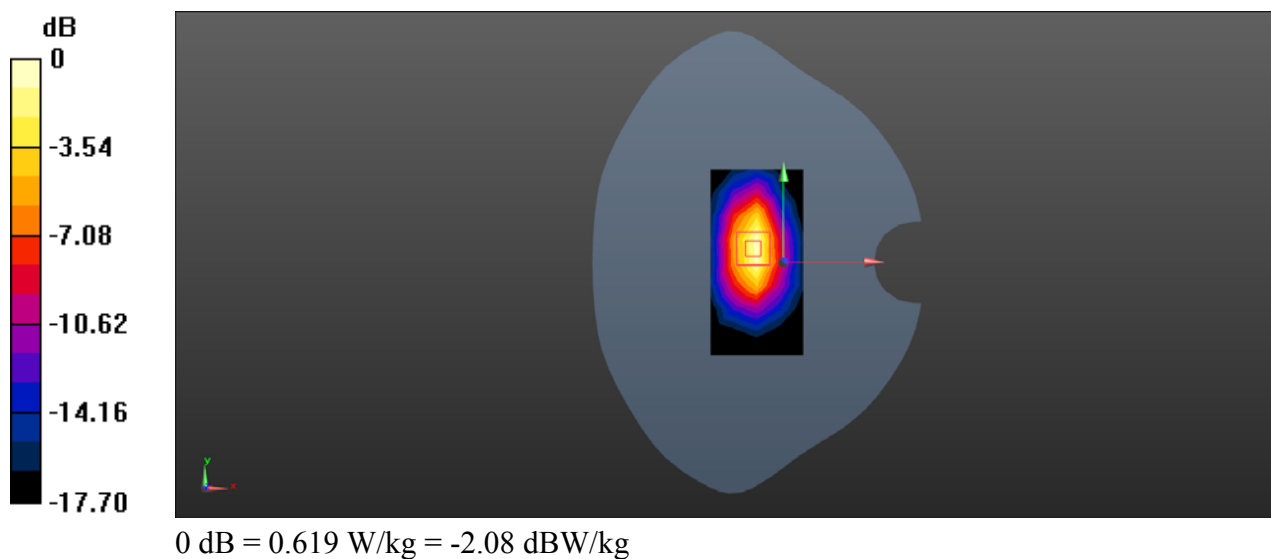

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band IV RMC 1412 Bottom side 0mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 52.237$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.49, 8.49, 8.49); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 3.96 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 48.35 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 9.17 W/kg

SAR(1 g) = 4.63 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 7.01 W/kg

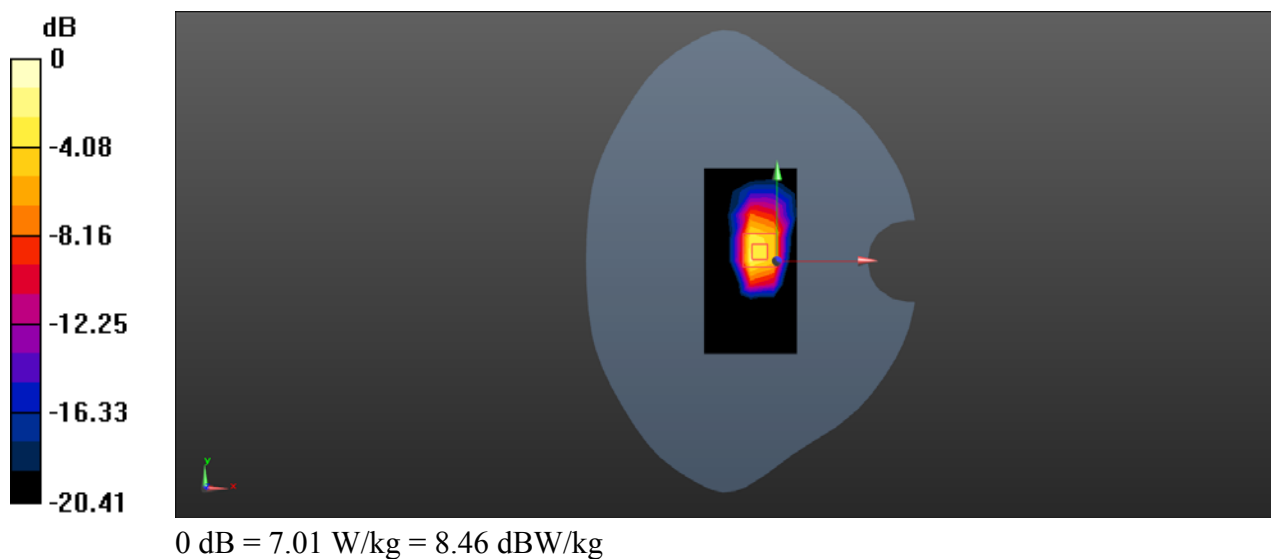

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band V RMC 4233CH Right cheek With SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 847$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 40.755$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.77, 9.77, 9.77); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.299 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.538 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

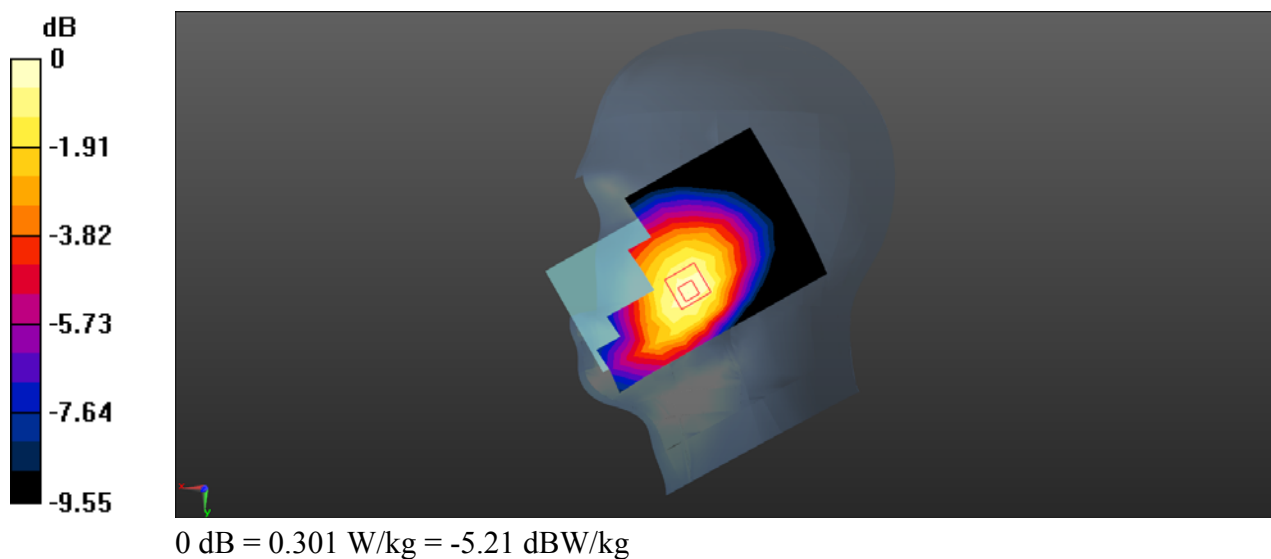

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band V RMC 4182CH Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.012$ S/m; $\epsilon_r = 54.864$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.483 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.62 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

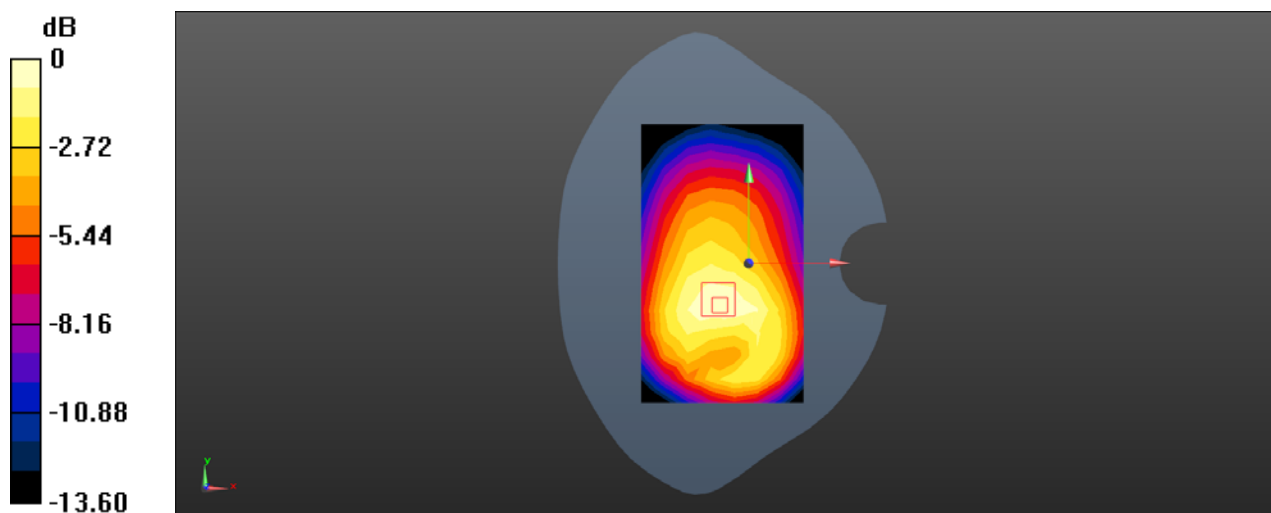

0 dB = 0.491 W/kg = -3.09 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 WCDMA Band V RMC 4233CH Back side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used: $f = 847$ MHz; $\sigma = 1.019$ S/m; $\epsilon_r = 54.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.715 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.95 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 0.789 W/kg

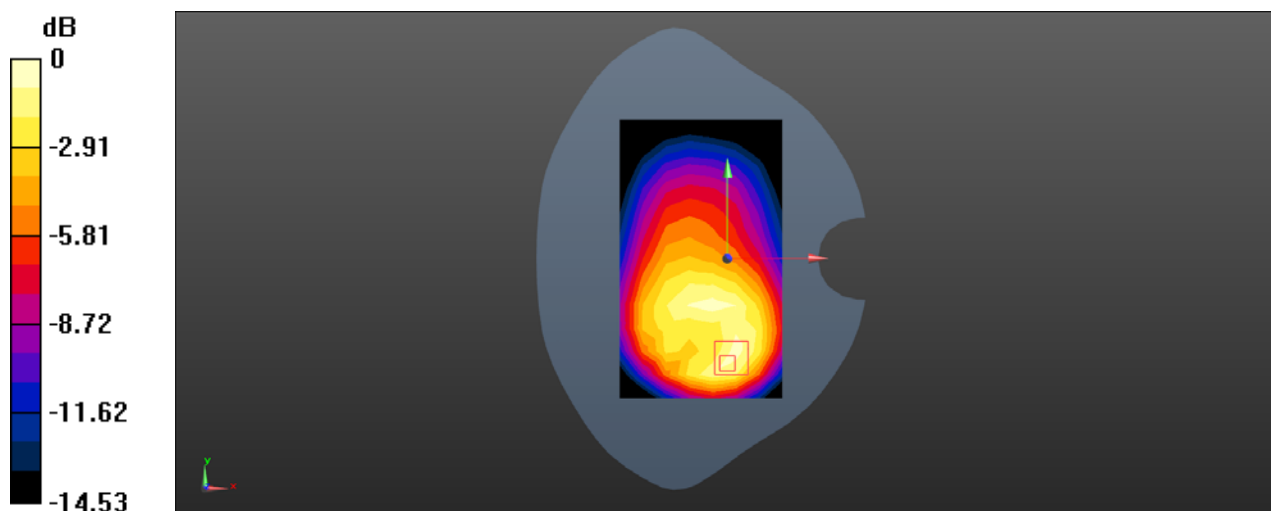

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 2 20MHz bandwidth QPSK 1RB0 Offset 18700CH Left Cheek With SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 41.325$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.26, 8.26, 8.26); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.146 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.770 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

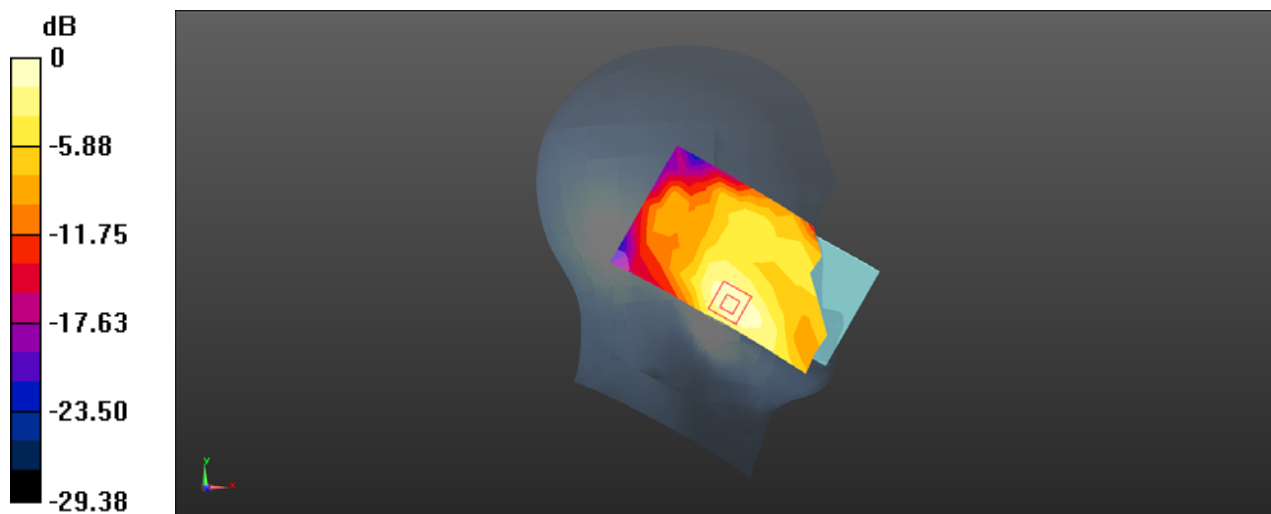

0 dB = 0.148 W/kg = -8.30 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 2 20MHz bandwidth QPSK 1RB0 Offset 18700CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 52.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.377 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.489 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.505 W/kg

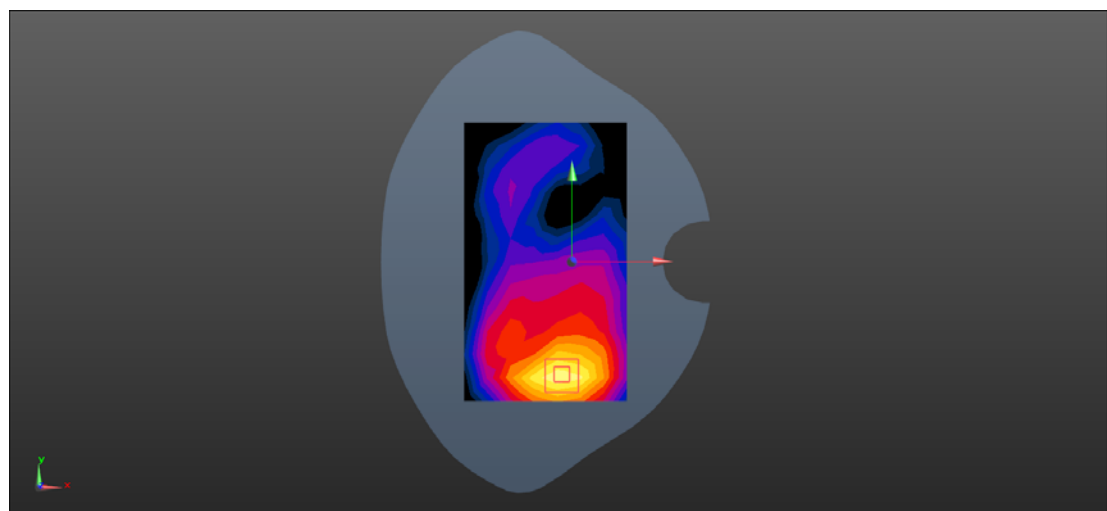

0 dB = 0.505 W/kg = -2.97 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 2 20MHz bandwidth QPSK 50RB0 Offset 18700CH Bottom side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 52.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.534 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.48 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

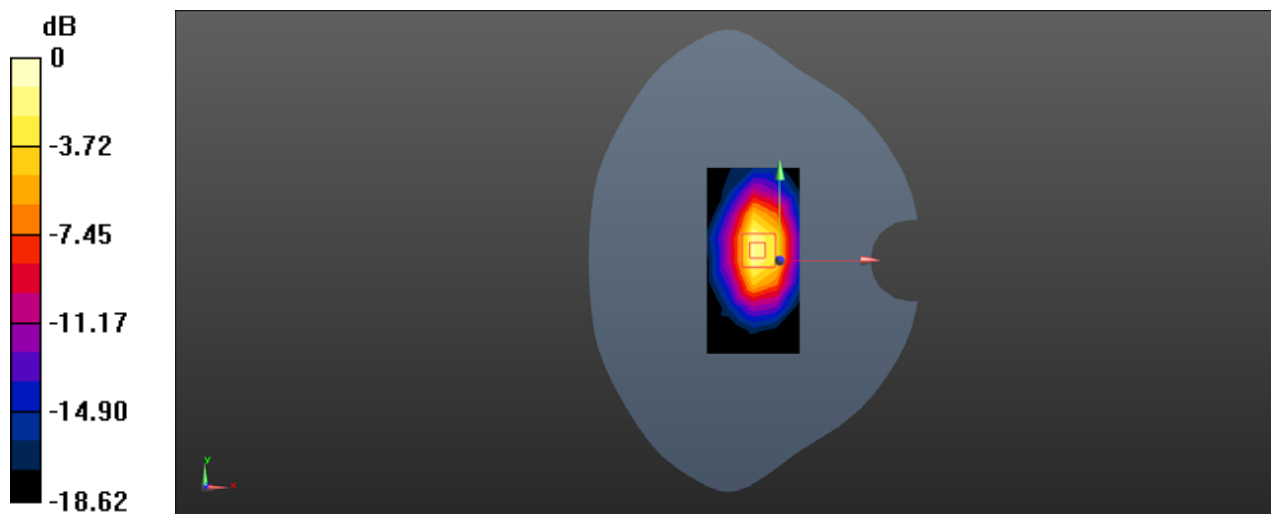

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 2 20MHz bandwidth QPSK 50RB0 Offset 18700CH Bottom side 0mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 52.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 6.05 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 56.54 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 9.42 W/kg

SAR(1 g) = 4.63 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 6.80 W/kg

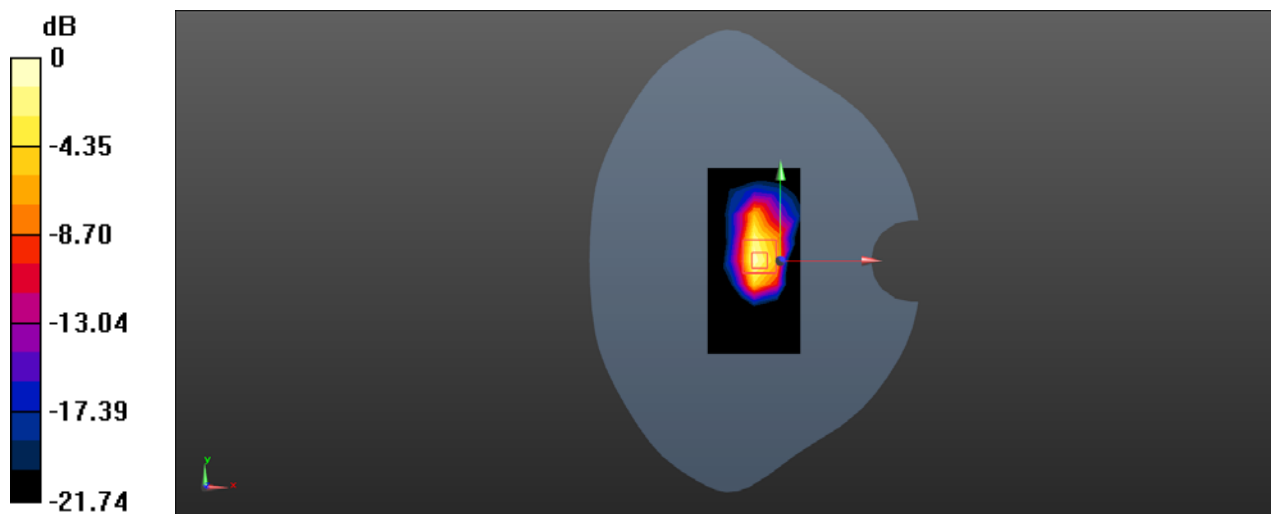

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 4 20MHz bandwidth QPSK 1RB0 Offset 20175CH Left Cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.299$ S/m; $\epsilon_r = 40.494$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.54, 8.54, 8.54); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.169 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.247 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

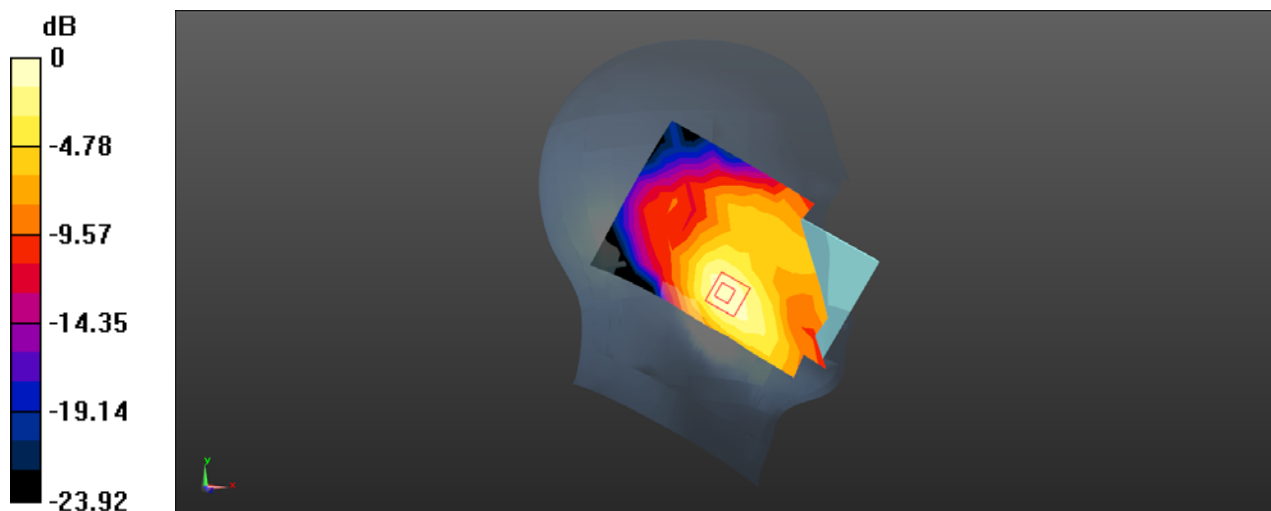

0 dB = 0.187 W/kg = -7.28 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 4 20MHz bandwidth QPSK 1RB0 Offset 20175CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 52.236$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.49, 8.49, 8.49); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.587 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.214 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.625 W/kg

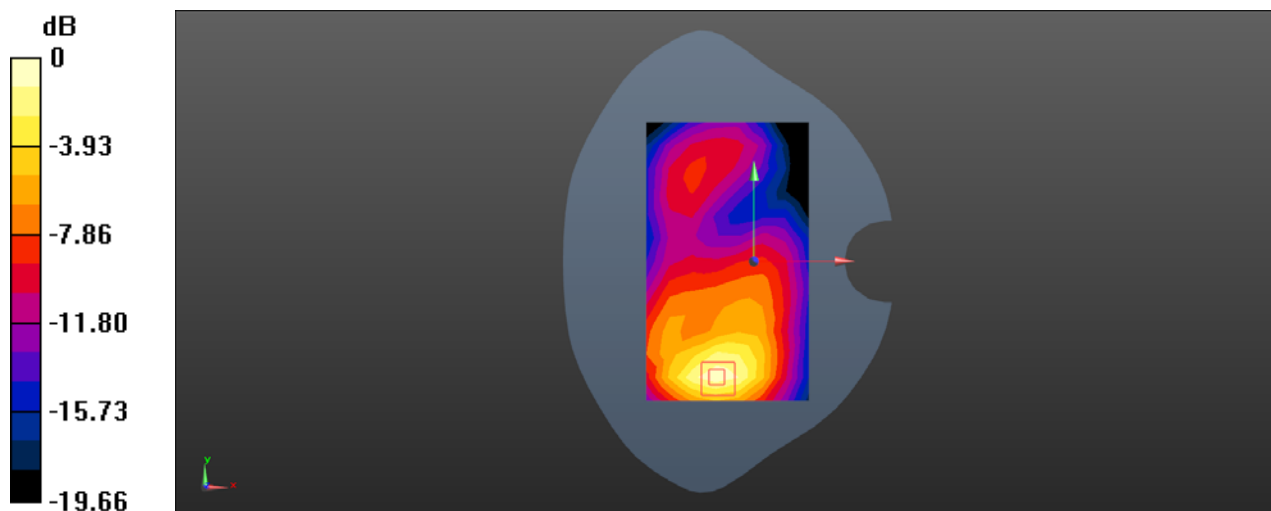

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 4 20MHz bandwidth QPSK 50RB0 Offset 20175CH Bottom side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 52.236$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.49, 8.49, 8.49); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.546 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.61 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.621 W/kg

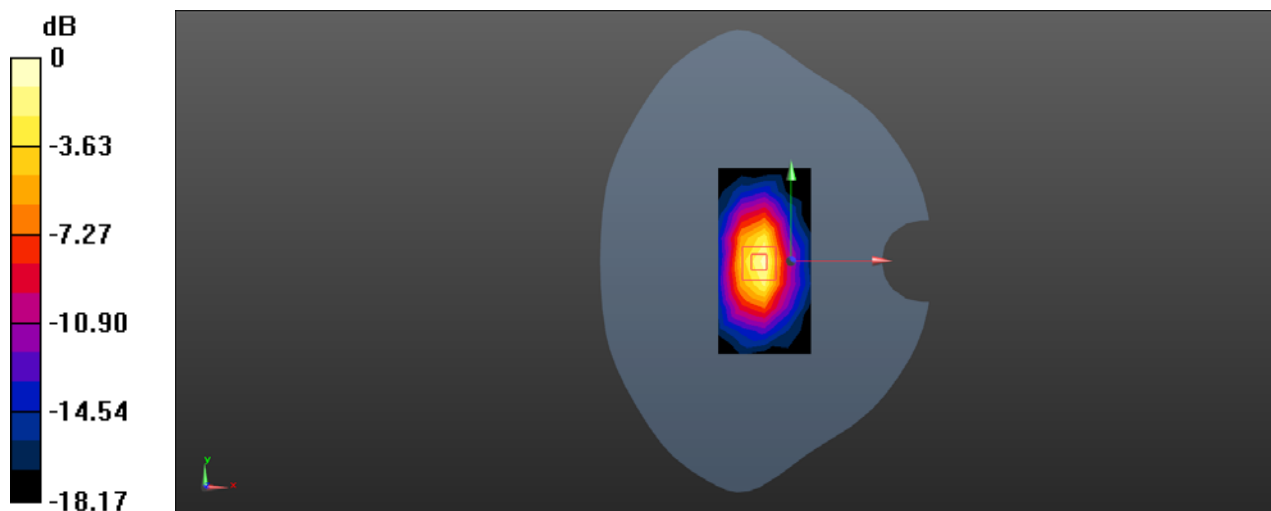

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 4 20MHz bandwidth QPSK 1RB0 Offset 20050CH Bottom side 0mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used: $f = 1720$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 52.265$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.49, 8.49, 8.49); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 5.27 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 52.18 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 9.81 W/kg

SAR(1 g) = 4.82 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 7.25 W/kg

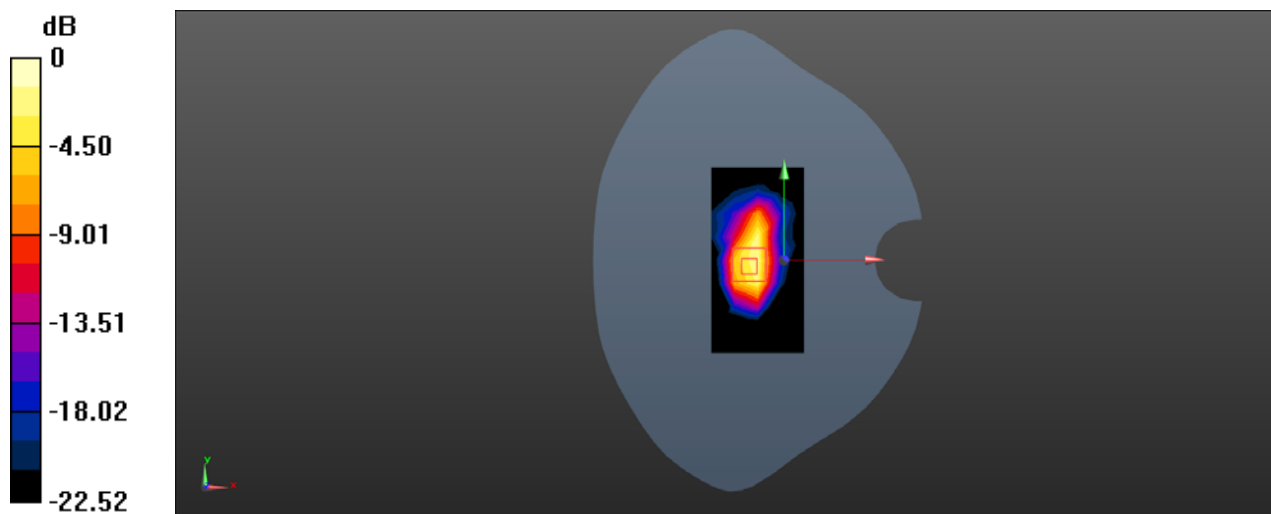

0 dB = 7.25 W/kg = 8.60 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 5 10MHz bandwidth QPSK 1RB0 Offset 20600CH Right cheek With SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 844$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 40.774$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.77, 9.77, 9.77); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.261 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.804 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.289 W/kg
SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.173 W/kg

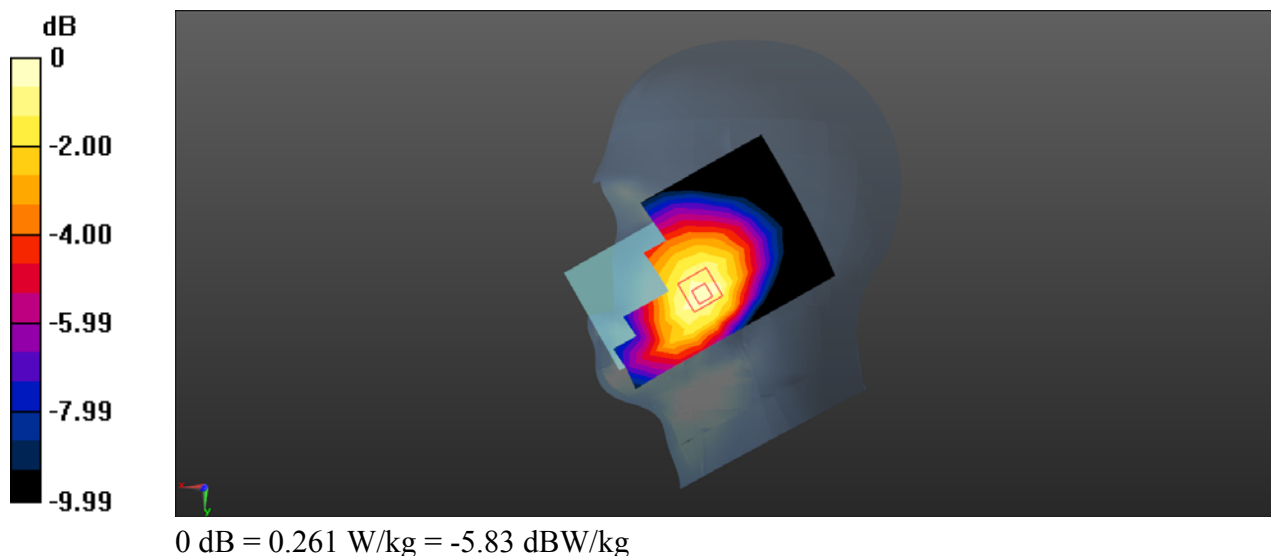

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 5 10MHz bandwidth QPSK 1RB0 Offset 20600CH Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used: $f = 844$ MHz; $\sigma = 1.017$ S/m; $\epsilon_r = 54.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.457 W/kg

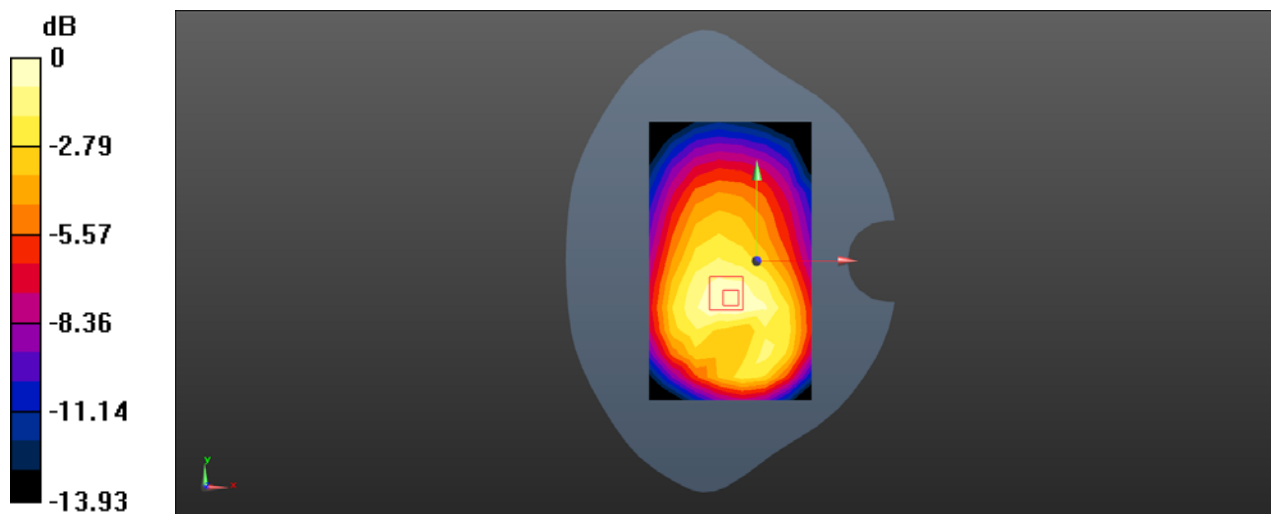

0 dB = 0.457 W/kg = -3.40 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 5 10MHz bandwidth QPSK 1RB0 Offset 20450CH Back side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 54.901$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.654 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.57 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.537 W/kg ; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.669 W/kg

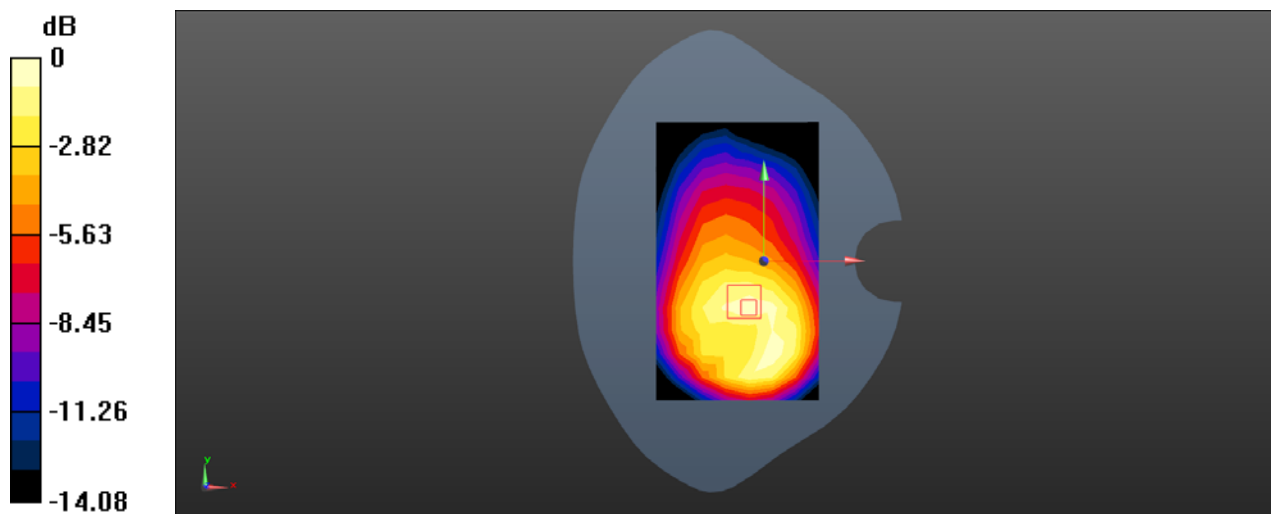

0 dB = 0.669 W/kg = -1.75 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 7 20MHz bandwidth QPSK 1RB99 Offset 21350CH Right cheek with SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 38.062$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.154 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.956 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

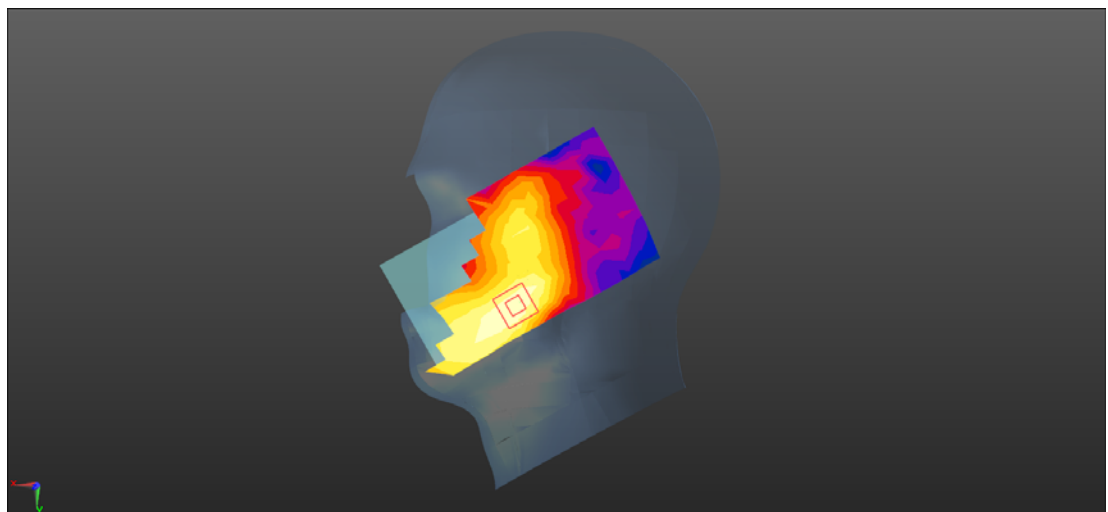

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 7 20MHz bandwidth QPSK 1RB99 Offset 21350CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 2.108$ S/m; $\epsilon_r = 52.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.487 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.648 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

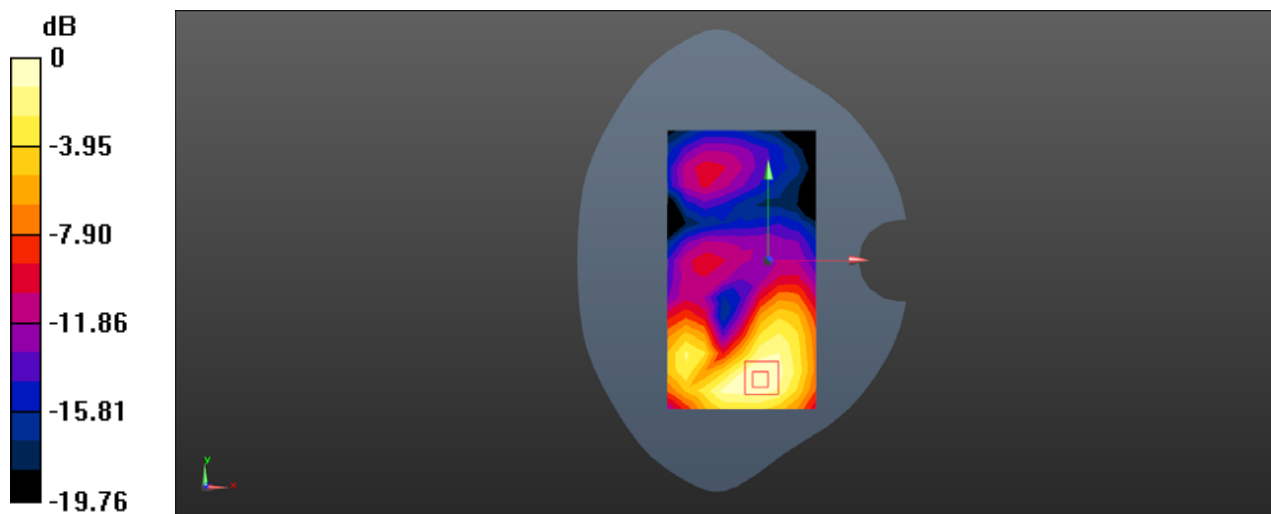

Test Laboratory: SGS-SAR Lab

**YAS-L29 LTE Band 7 20MHz bandwidth QPSK 50RB50 Offset 21350CH
Bottom side 10mm with SIM2 Ant1**

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 2.108$ S/m; $\epsilon_r = 52.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.789 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.65 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.868 W/kg

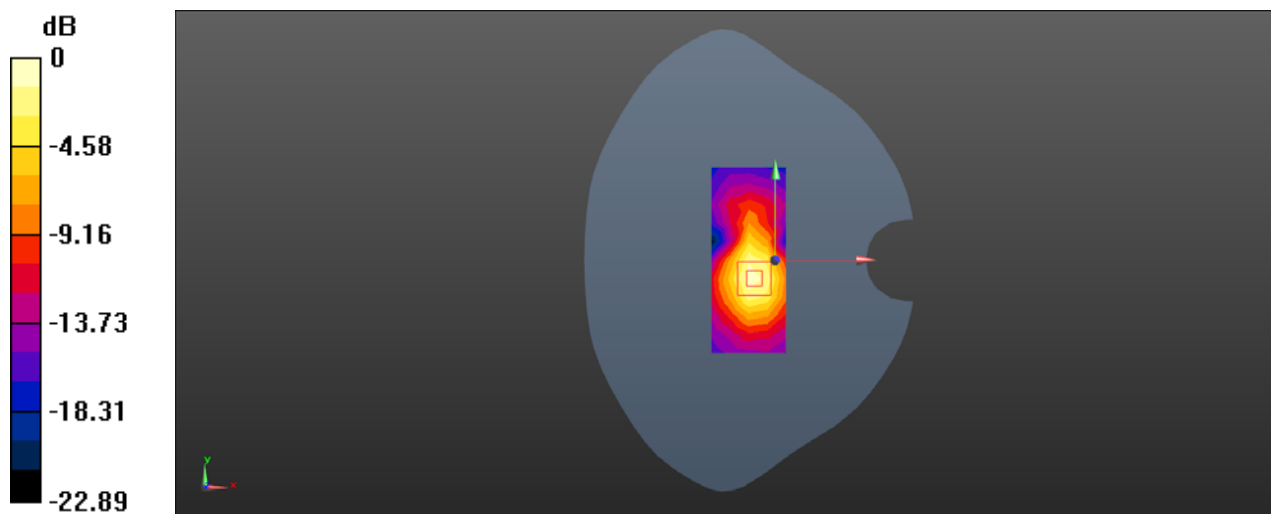

0 dB = 0.868 W/kg = -0.61 dBW/kg

Test Laboratory: SGS-SAR Lab

**YAS-L29 LTE Band 7 20MHz bandwidth QPSK 50RB50 Offset 21350CH
Bottom side 3mm Ant1**

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 2.108$ S/m; $\epsilon_r = 52.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 4.11 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.21 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 8.40 W/kg

SAR(1 g) = 3.7 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 6.03 W/kg

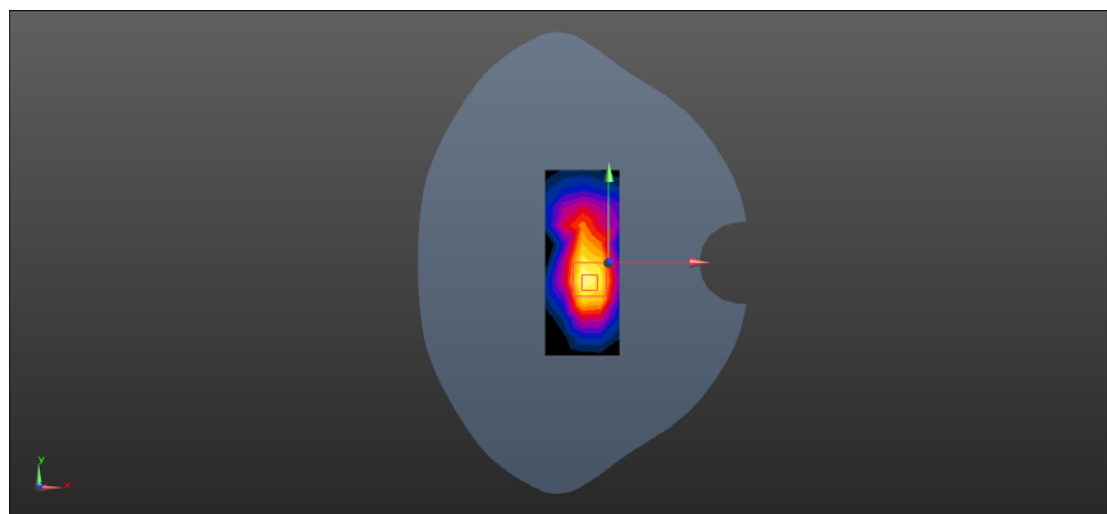

0 dB = 6.03 W/kg = 7.80 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 12 10MHz bandwidth QPSK 1RB49 Offset 23095CH Right cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 43.357$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.77, 9.77, 9.77); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.147 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.938 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

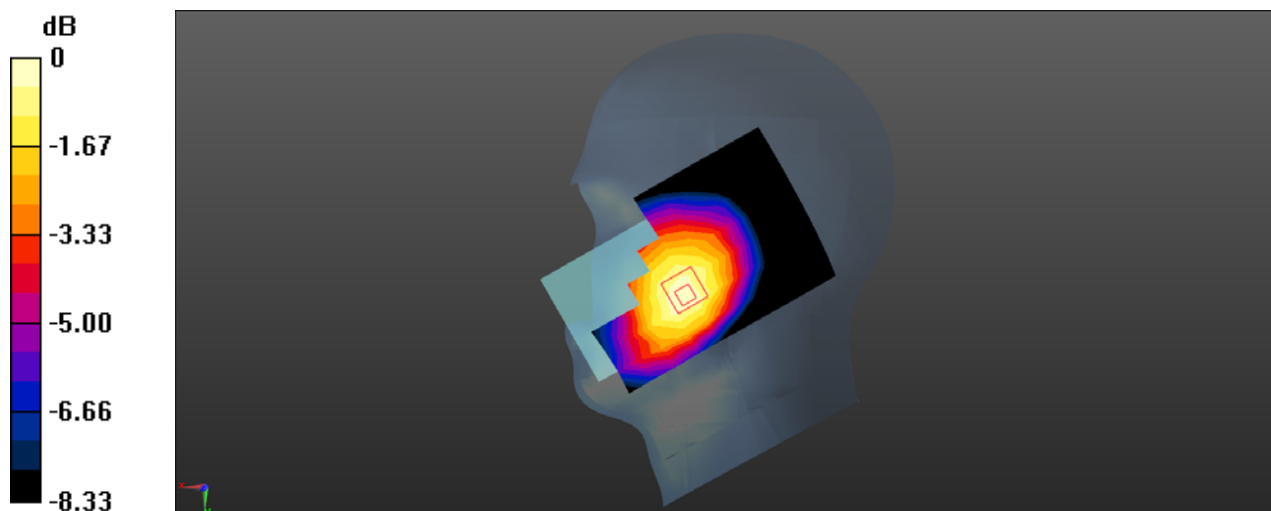

0 dB = 0.155 W/kg = -8.10 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 12 10MHz bandwidth QPSK 1RB49 Offset23130CH Back side 15mm With SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: MSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 55.403$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.335 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.39 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.283 W/kg ; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

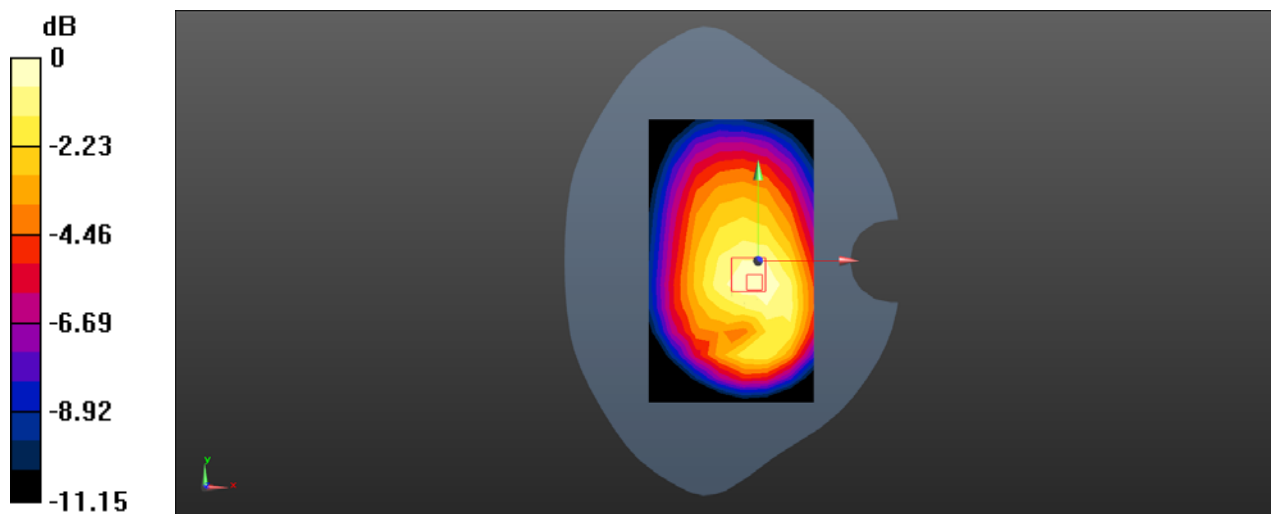

$0 \text{ dB} = 0.339 \text{ W/kg} = -4.70 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 12 10MHz bandwidth QPSK 1RB49 Offset23095CH Back side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.427$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.500 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.63 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.543 W/kg

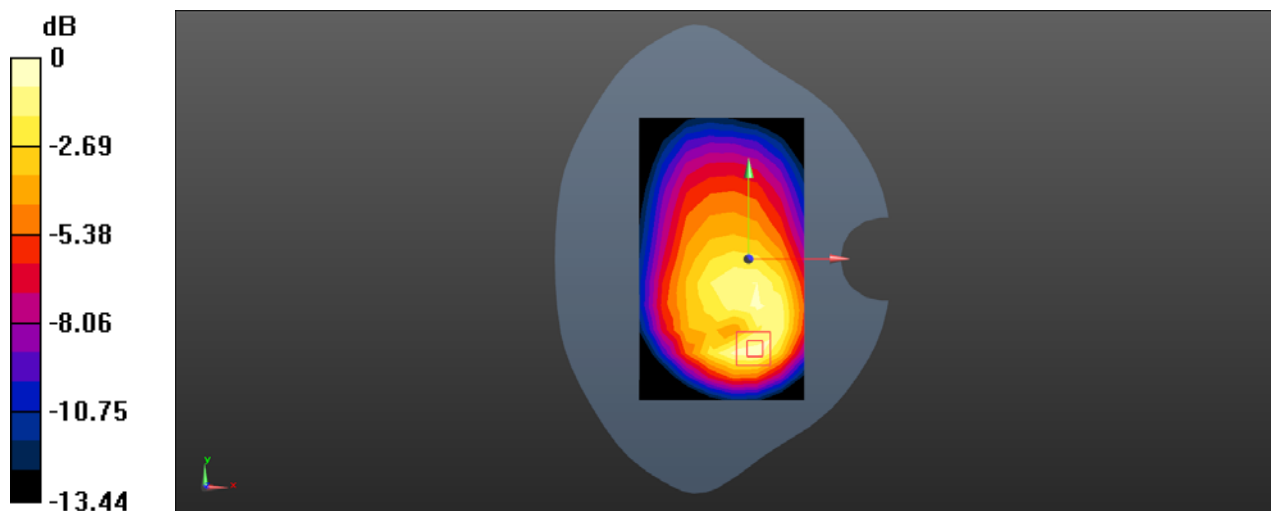

0 dB = 0.543 W/kg = -2.65 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 17 10MHz bandwidth QPSK 1RB0 Offset 23780CH Right cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 709$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 43.343$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.77, 9.77, 9.77); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.151 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.008 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.165 W/kg
SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.106 W/kg

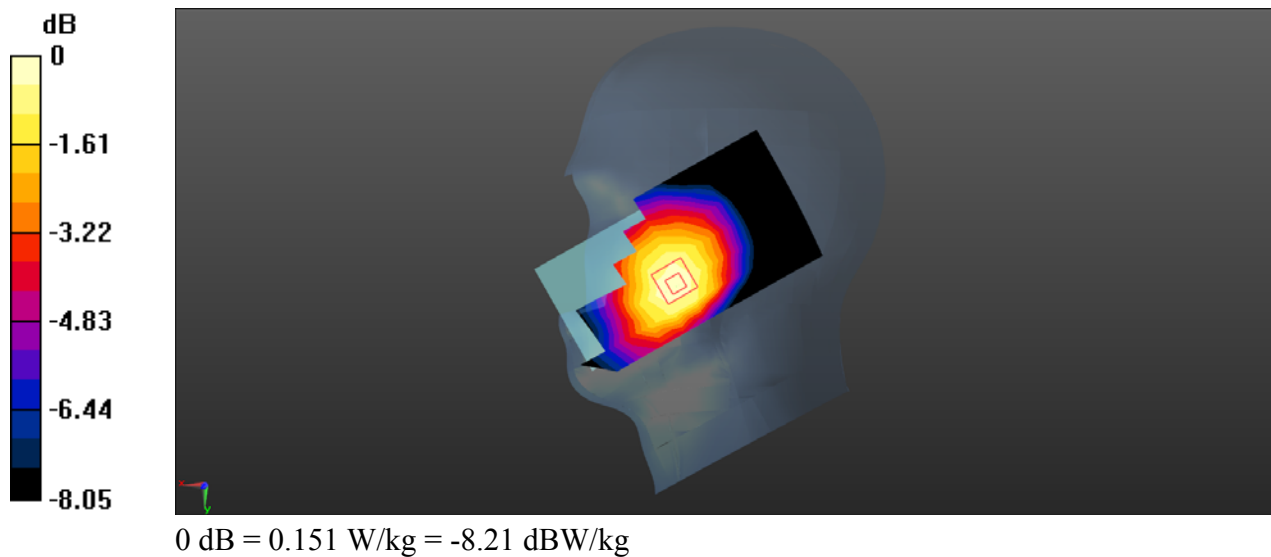

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 17 10MHz bandwidth QPSK 1RB0 Offset 23790CH Back side 15mm With SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL750; Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 55.411$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.309 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.72 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.260 W/kg ; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

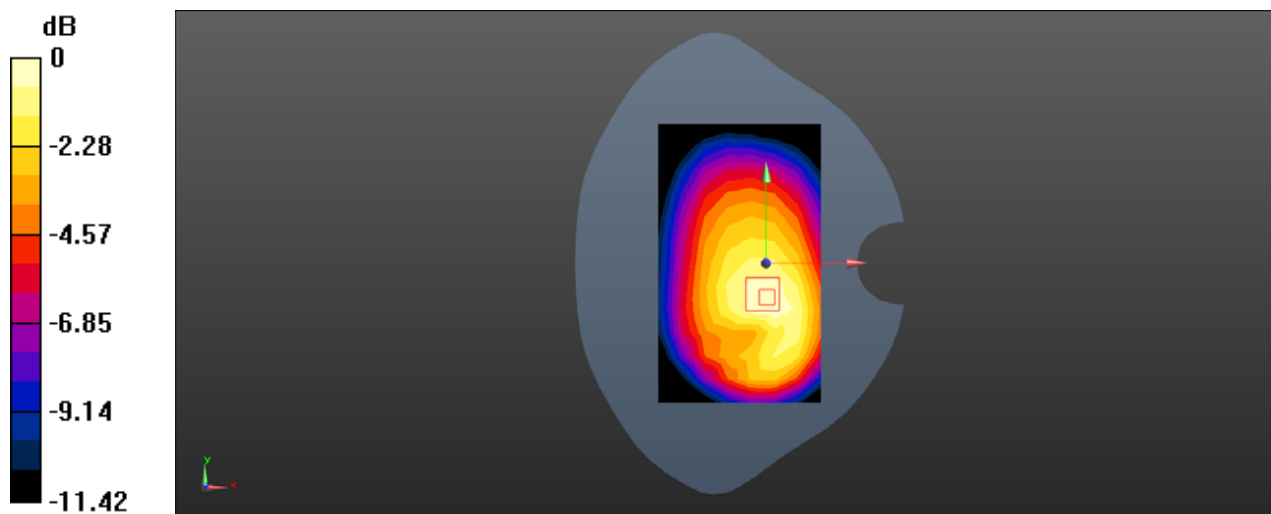

0 dB = 0.312 W/kg = -5.06 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 17 10MHz bandwidth QPSK 1RB0 Offset 23790CH Back side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL750; Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 55.411$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.505 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.65 V/m ; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.384 W/kg ; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

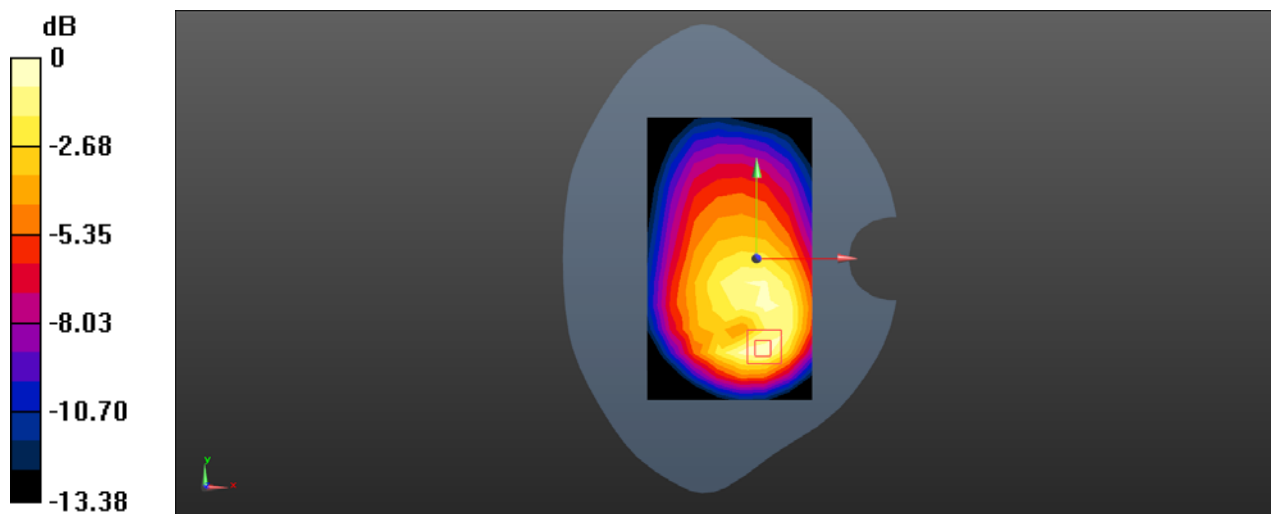

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 26 15MHz bandwidth QPSK 1RB38 Offset 26865CH Right cheek With SIM2 Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 40.852$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.77, 9.77, 9.77); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.255 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.733 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

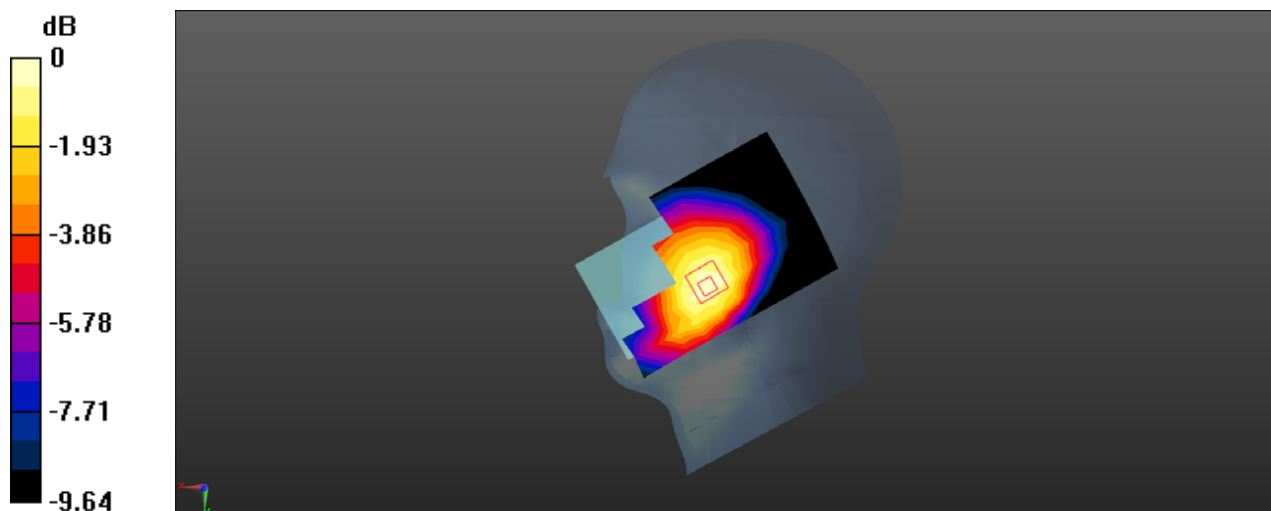

0 dB = 0.253 W/kg = -5.97 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 26 15MHz bandwidth QPSK 1RB38 Offset 26965CH Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 1.015$ S/m; $\epsilon_r = 54.84$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.457 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.59 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

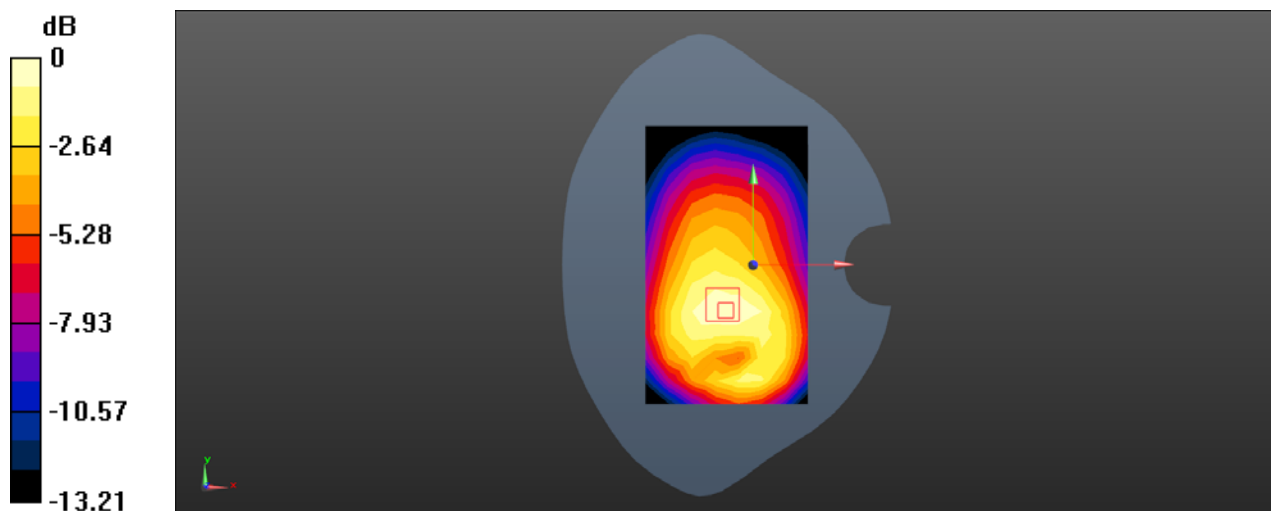

0 dB = 0.454 W/kg = -3.43 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 26 15MHz bandwidth QPSK 1RB38 Offset 26965CH Back side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 1.015$ S/m; $\epsilon_r = 54.84$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.68, 9.68, 9.68); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.689 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.04 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.919 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

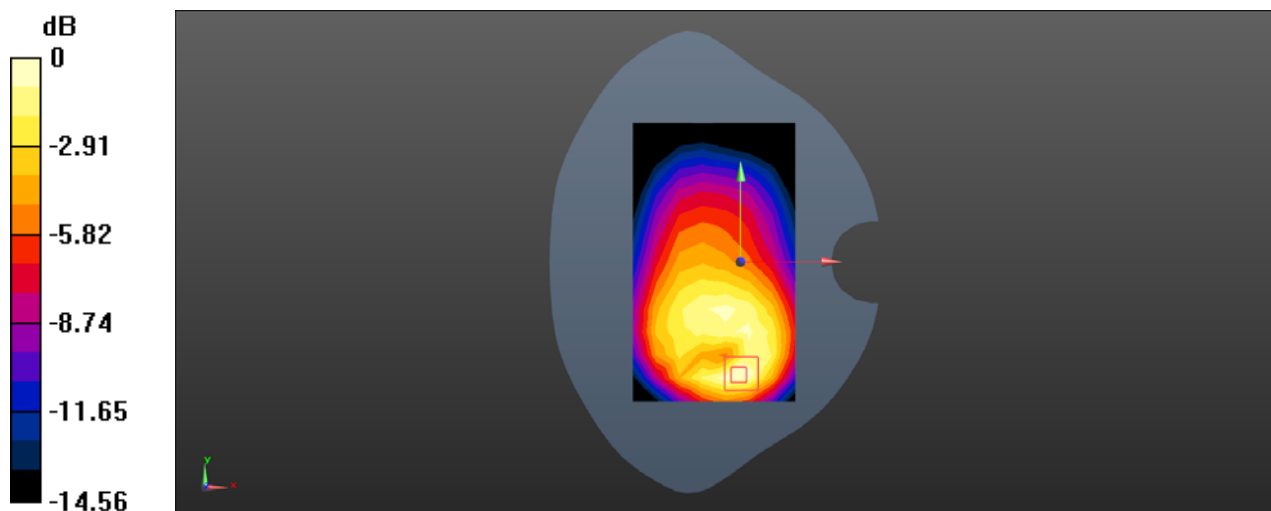

0 dB = 0.748 W/kg = -1.26 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 38 20MHz bandwidth QPSK 1RB99 Offset 37850CH Right Cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.57906

Medium: HSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 38.003$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0704 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.140 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0751 W/kg

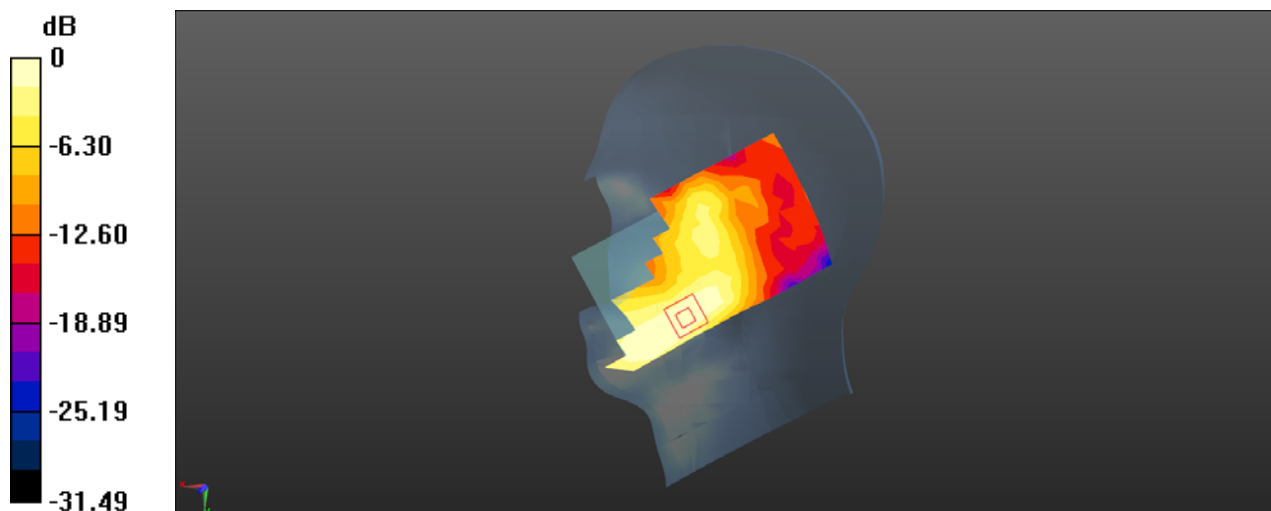

0 dB = 0.0751 W/kg = -11.24 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 38 20MHz bandwidth QPSK 1RB99 Offset 37850CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.57906

Medium: MSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 2.137$ S/m; $\epsilon_r = 52.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.288 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.686 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

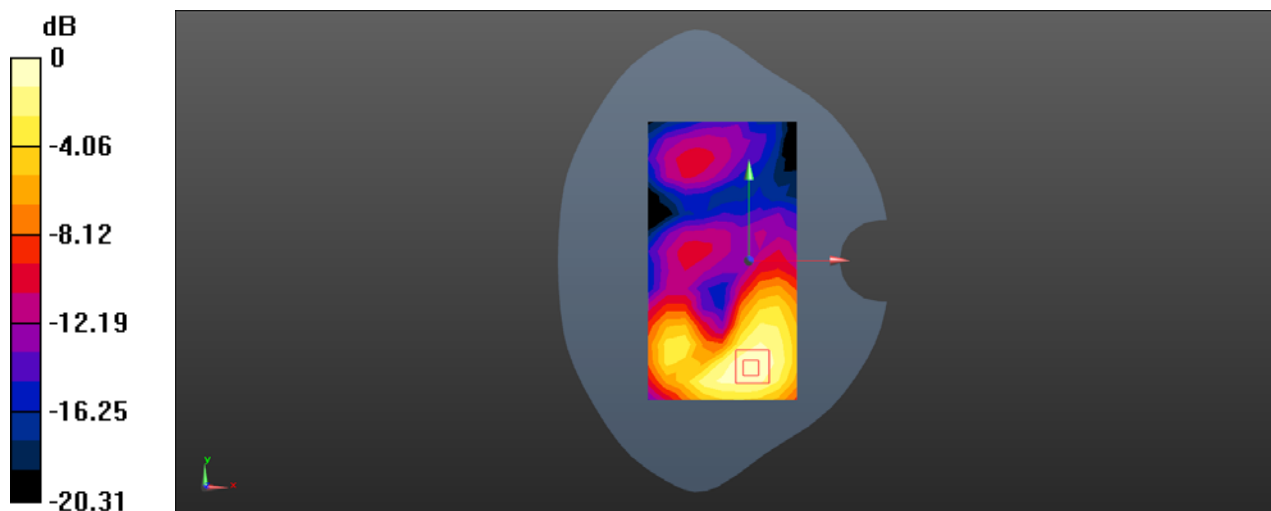

Test Laboratory: SGS-SAR Lab

**YAS-L29 LTE Band 38 20MHz bandwidth QPSK 50RB50 Offset 37850CH
Bottom side 10mm Ant1**

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.57906

Medium: MSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 2.137$ S/m; $\epsilon_r = 52.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.815 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.25 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

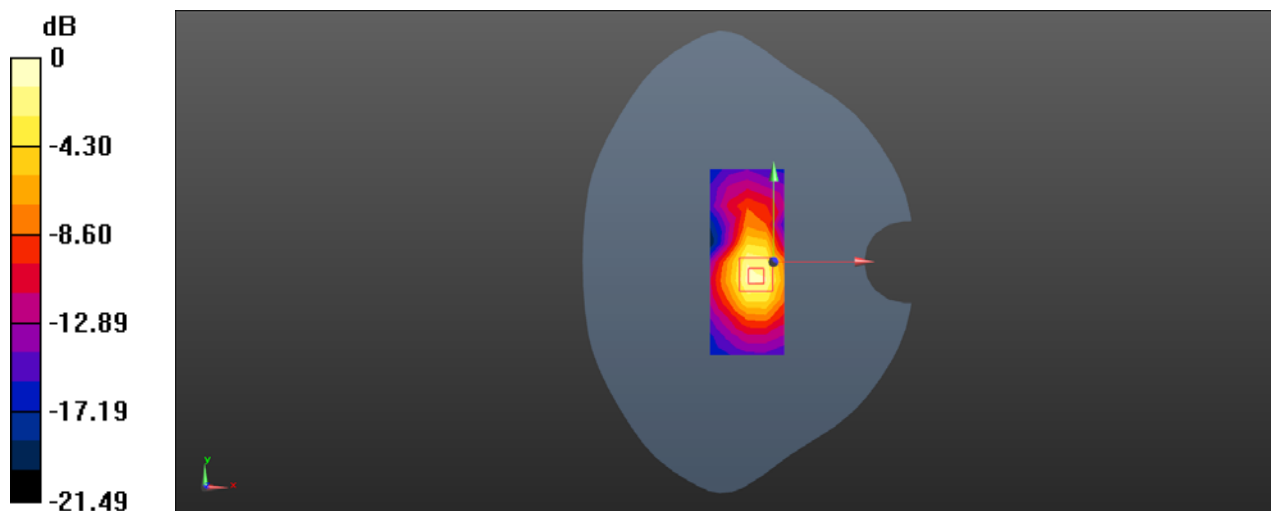

0 dB = 1.01 W/kg = 0.04 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 41 20MHz bandwidth QPSK 1RB99 Offset 40240CH Right Cheek Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2555 MHz; Duty Cycle: 1:1.57906

Medium: HSL2600; Medium parameters used: $f = 2555$ MHz; $\sigma = 1.994$ S/m; $\epsilon_r = 38.077$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0889 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8500 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0979 W/kg

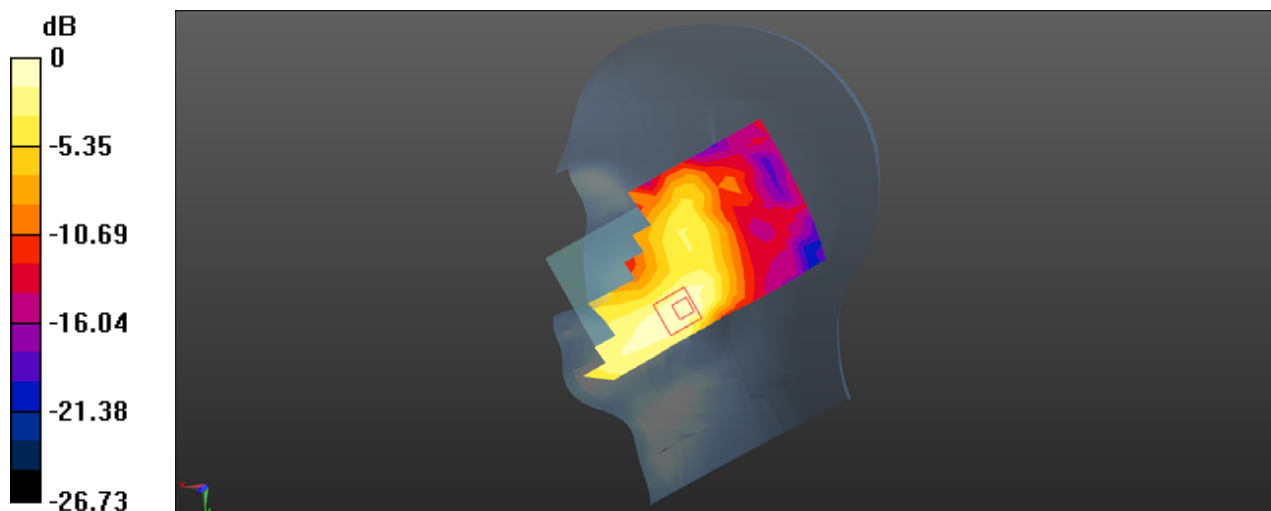

0 dB = 0.0979 W/kg = -10.09 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 LTE Band 41 20MHz bandwidth QPSK 1RB99 Offset 40690CH Front side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2600 MHz; Duty Cycle: 1:1.57906

Medium: MSL2600; Medium parameters used: $f = 2600$ MHz; $\sigma = 2.162$ S/m; $\epsilon_r = 52.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.249 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.393 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

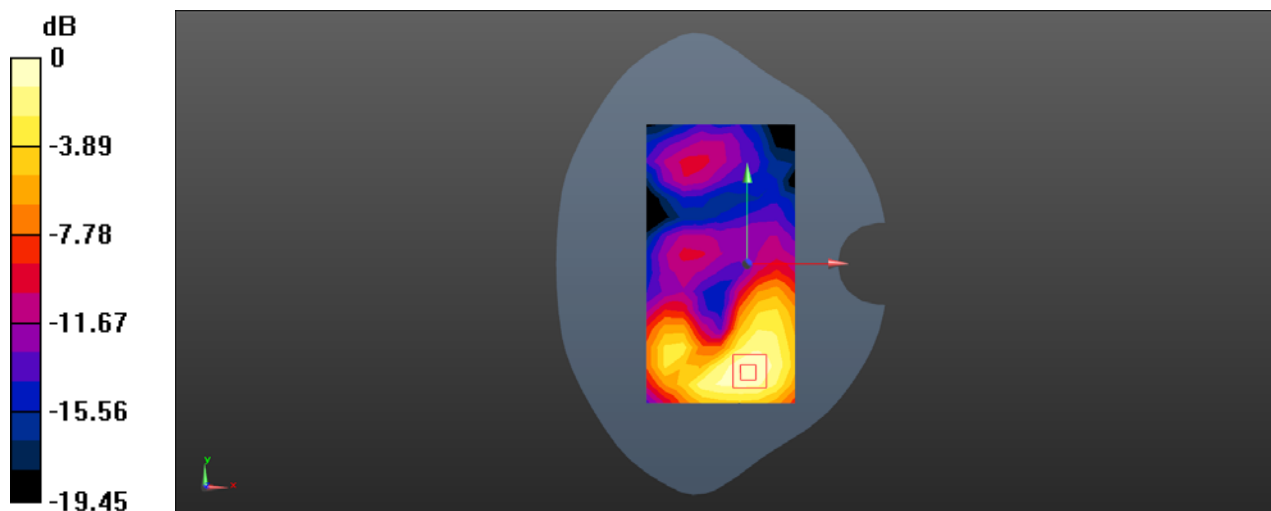

0 dB = 0.268 W/kg = -5.72 dBW/kg

Test Laboratory: SGS-SAR Lab

**YAS-L29 LTE Band 41 20MHz bandwidth QPSK 50RB0 Offset 41140CH
Bottom side 10mm with SIM2 Ant1**

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57906

Medium: MSL2600; Medium parameters used: $f = 2645$ MHz; $\sigma = 2.217$ S/m; $\epsilon_r = 52.091$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(6.97, 6.97, 6.97); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.400 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.288 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

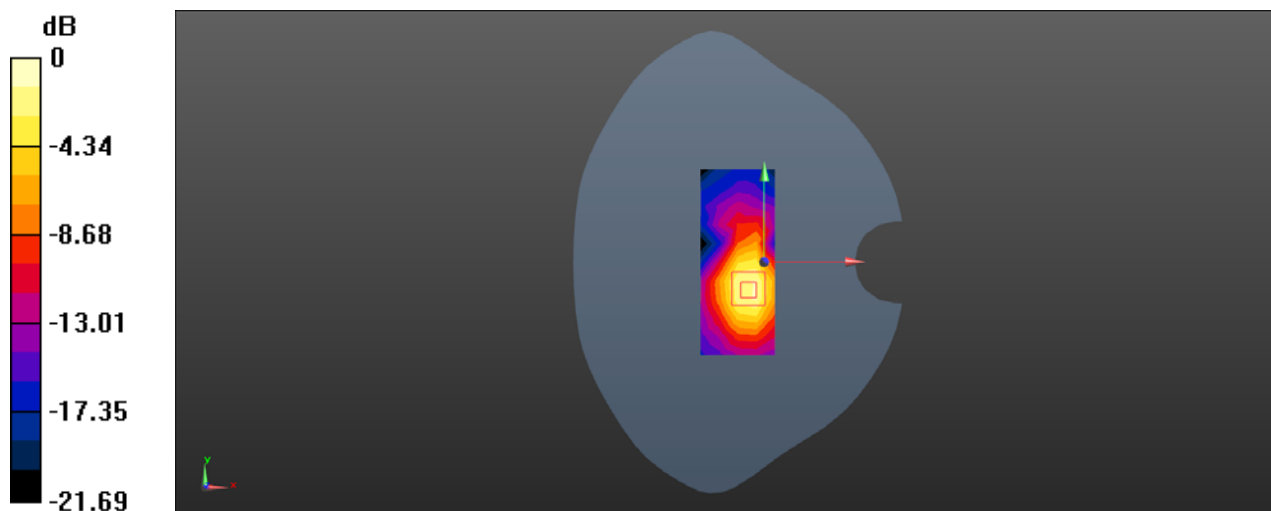

Test Laboratory: SGS-SAR Lab

YAS-L29 WIFI 802.11b 1CH Left tilted Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 38.668$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.34, 7.34, 7.34); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.741 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.80 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.923 W/kg

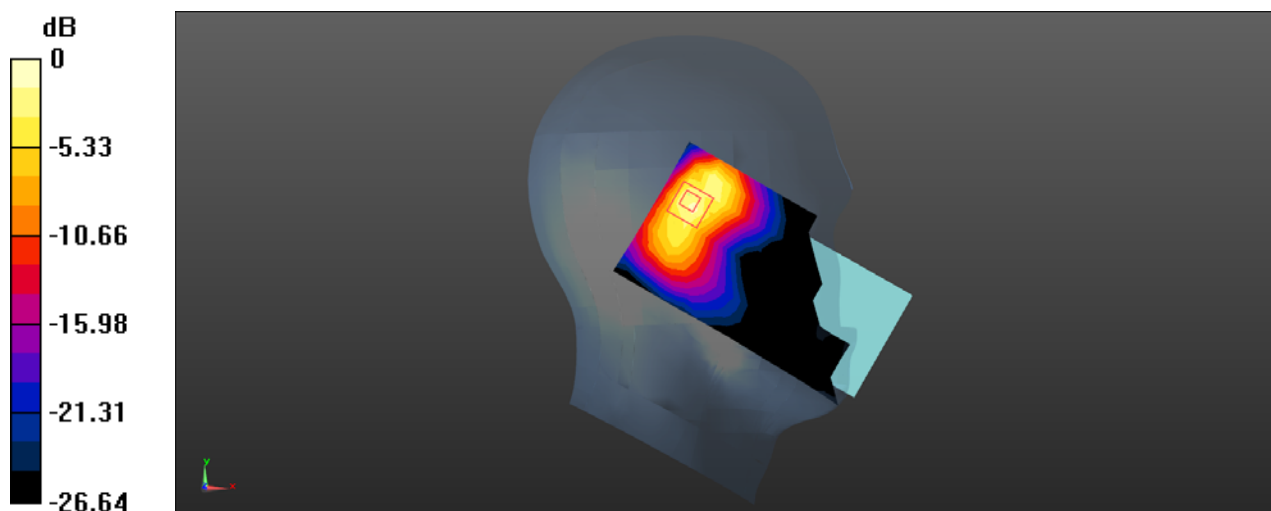

Test Laboratory: SGS-SAR Lab

YAS-L29 WIFI 802.11b 1CH Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 52.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.23, 7.23, 7.23); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.142 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.738 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

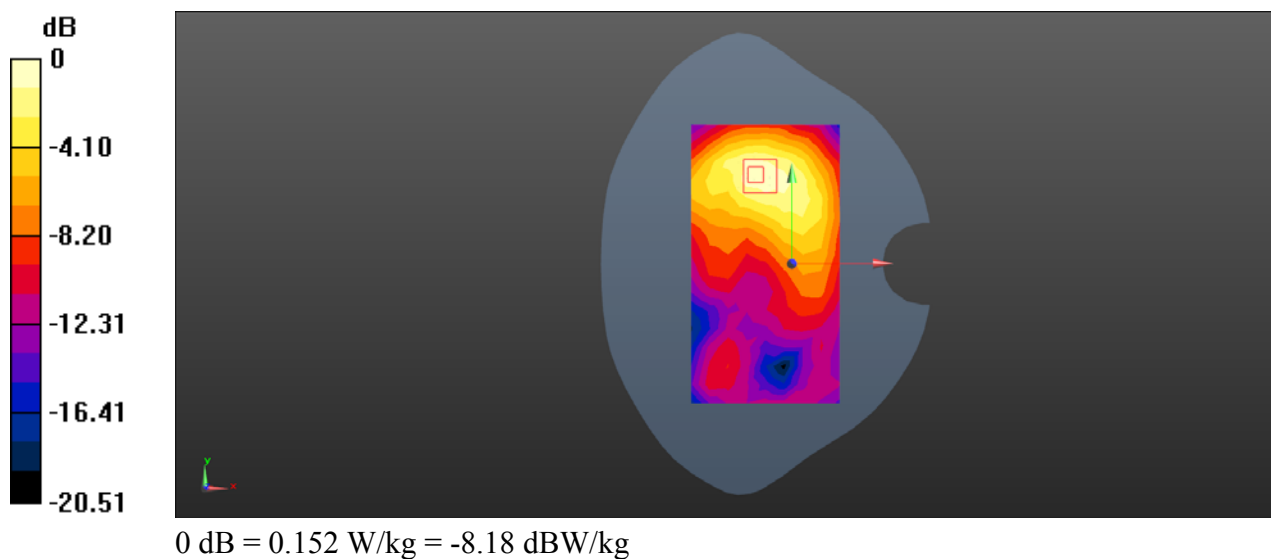

Test Laboratory: SGS-SAR Lab

YAS-L29 WIFI 802.11b 1CH Top side 10mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 52.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.23, 7.23, 7.23); Calibrated: 2017-09-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn896; Calibrated: 2017-09-27
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.540 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.27 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.667 W/kg

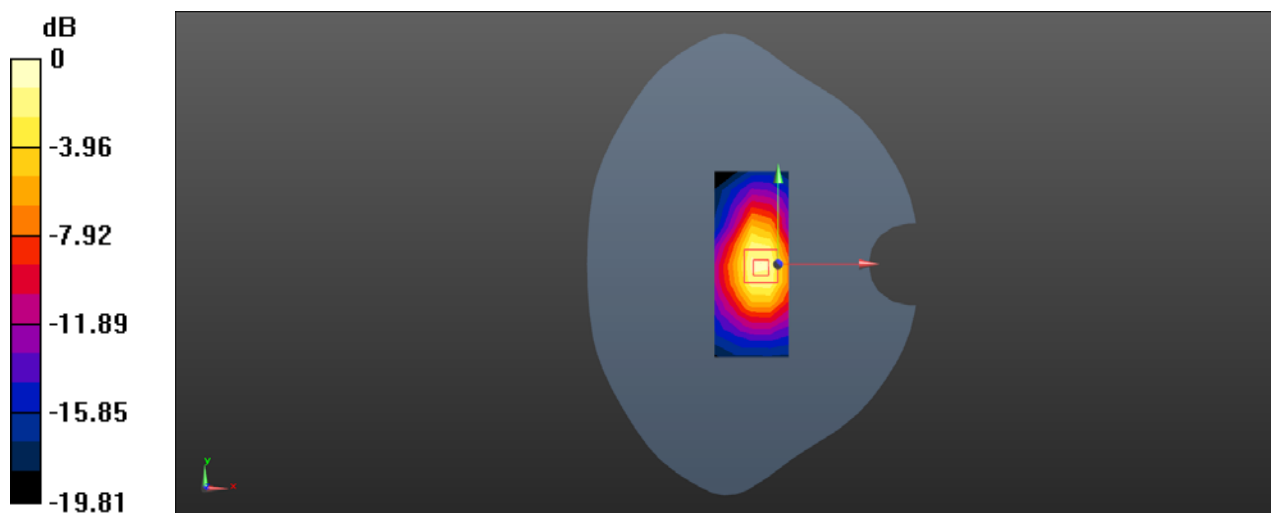

Test Laboratory: SGS-SAR Lab

YAS-L29 Wifi 802.11ac-80M 138CH Left Tilted Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium: HSL5600; Medium parameters used: $f = 5690$ MHz; $\sigma = 5.218$ S/m; $\epsilon_r = 34.827$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(4.89, 4.89, 4.89); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-08-31
- Phantom: SAM1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.817 W/kg


Configuration/Body/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.875 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

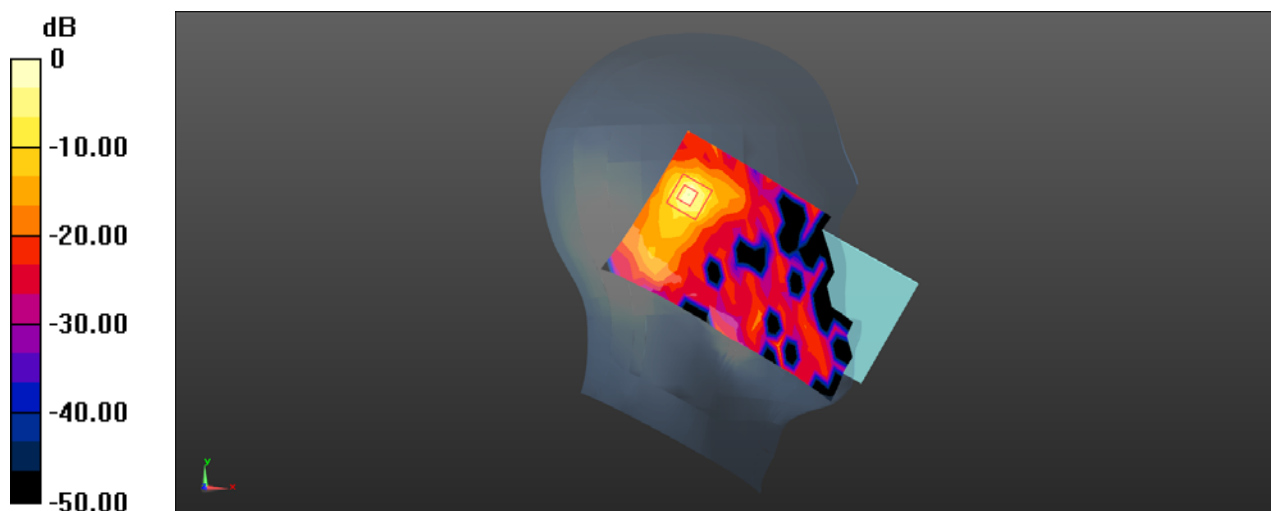

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

YAS-L29 Wifi 802.11a 136CH Back side 15mm Ant1

DUT: YAS-L29; Type: Smart Phone; Serial: WCR0117C22000024

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: MSL5600; Medium parameters used: $f = 5680$ MHz; $\sigma = 5.927$ S/m; $\epsilon_r = 46.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(4.45, 4.45, 4.45); Calibrated: 2018-1-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1374; Calibrated: 2017-8-31
- Phantom: ELI v4.0; Type: ELI; Serial: 1123
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (101x81x1): Interpolated grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (interpolated) = 0.288 W/kg


Configuration/Body/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

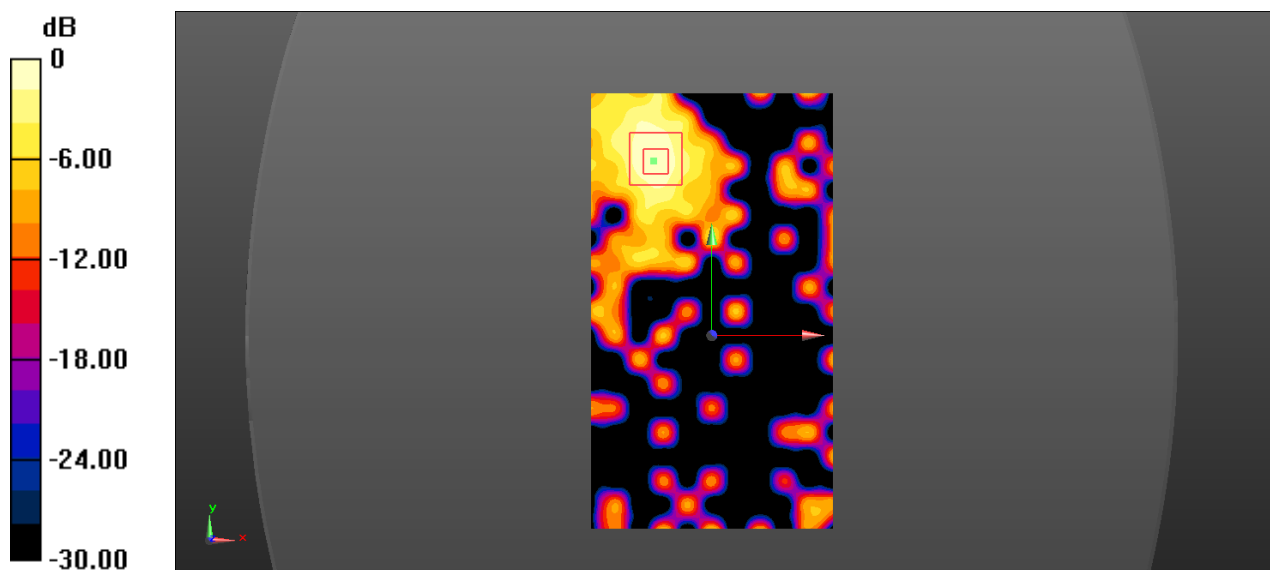

0 dB = 0.290 W/kg = -5.38 dBW/kg