


EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

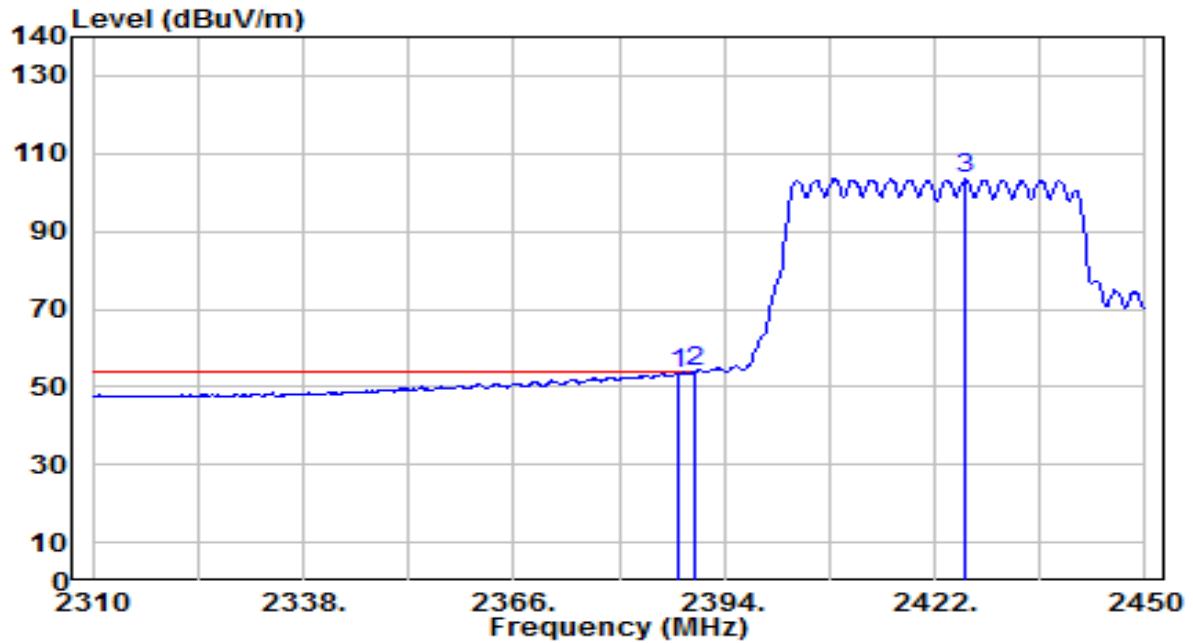


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.980	21.57	31.94	53.51	-0.49	54.00	160	225	Average
2	*	2390.000	21.78	31.95	53.73	-0.27	54.00	160	225	Average
3		2426.200	71.41	32.08	103.49	N/A	N/A	160	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

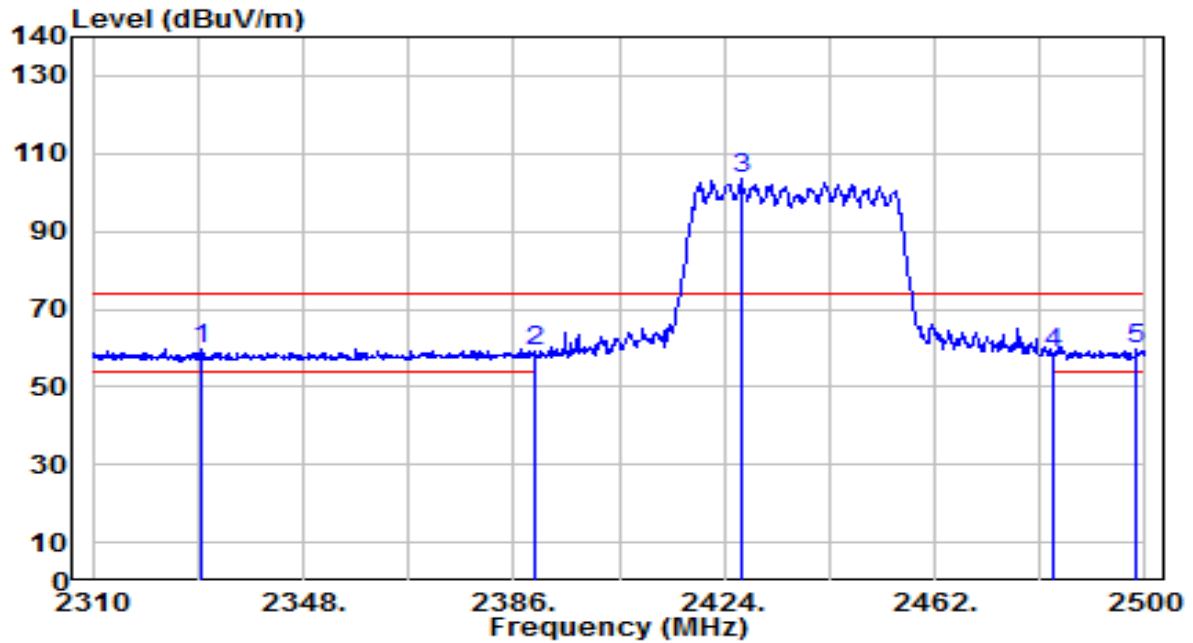


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2329.380	27.93	31.72	59.65	-14.35	74.00	145	25	Peak
2	2390.000	27.35	31.95	59.29	-14.71	74.00	145	25	Peak
3	2427.040	71.33	32.09	103.42	N/A	N/A	145	25	Peak
4	2483.500	26.44	32.30	58.74	-15.26	74.00	145	25	Peak
5	* 2498.480	27.56	32.35	59.91	-14.09	74.00	145	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

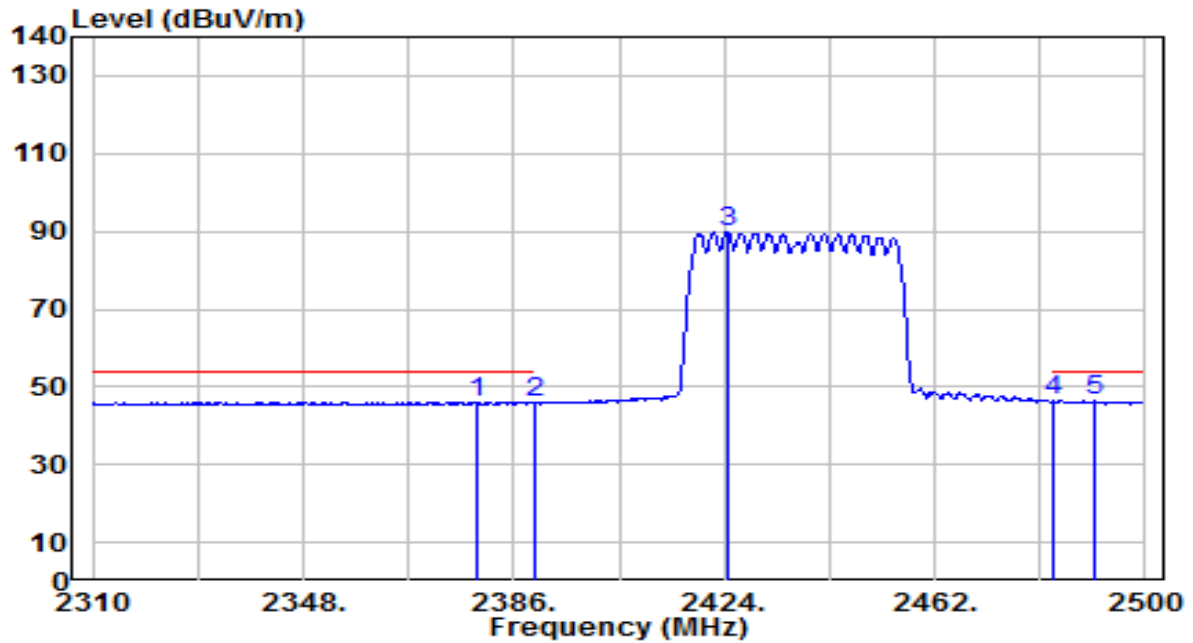


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.540	14.20	31.91	46.11	-7.89	54.00	145	25	Average
2	2390.000	13.97	31.95	45.92	-8.08	54.00	145	25	Average
3	2424.570	57.58	32.08	89.66	N/A	N/A	145	25	Average
4	* 2483.500	13.99	32.30	46.29	-7.71	54.00	145	25	Average
5	2490.690	13.96	32.33	46.28	-7.72	54.00	145	25	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

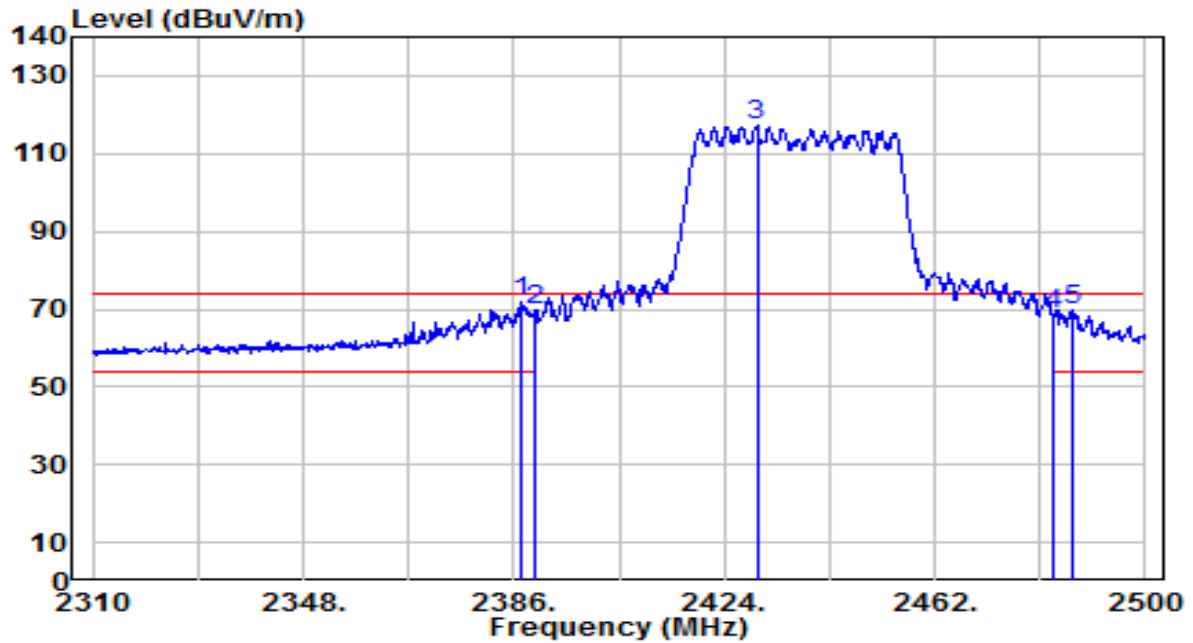


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	39.98	31.94	71.91	-2.09	74.00	150	160	Peak
2		2390.000	37.73	31.95	69.68	-4.32	74.00	150	160	Peak
3		2429.890	84.99	32.10	117.09	N/A	N/A	150	160	Peak
4		2483.500	36.56	32.30	68.85	-5.15	74.00	150	160	Peak
5		2486.700	37.35	32.31	69.66	-4.34	74.00	150	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

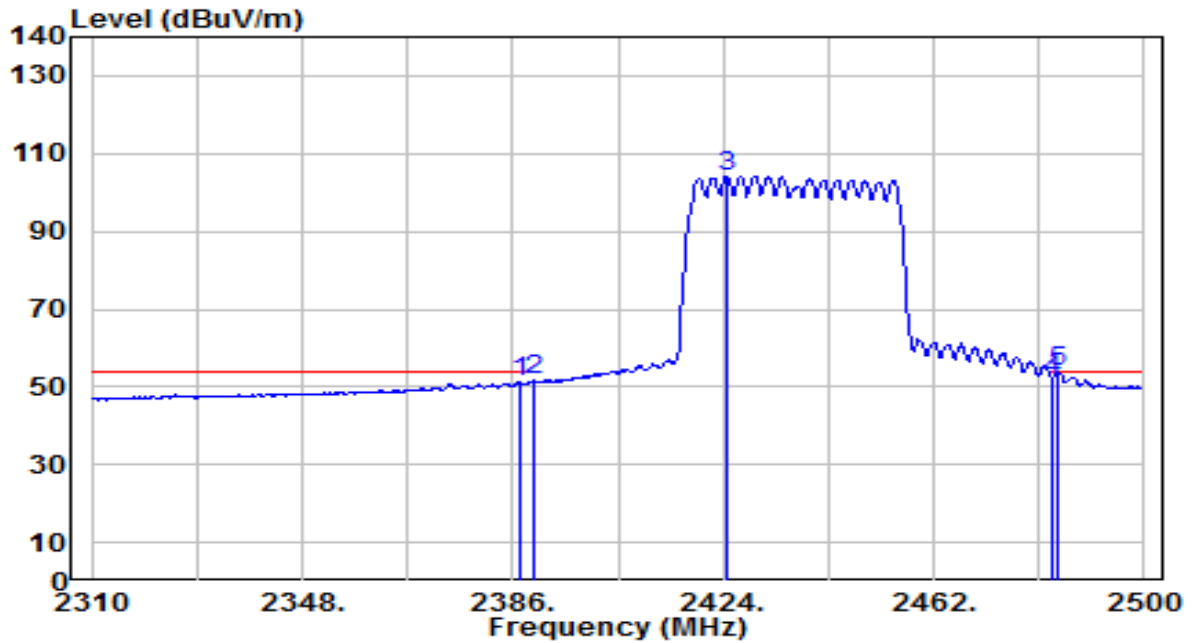


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	19.27	31.94	51.21	-2.79	54.00	150	160	Average
2	2390.000	19.64	31.95	51.59	-2.41	54.00	150	160	Average
3	2424.760	72.07	32.08	104.15	N/A	N/A	150	160	Average
4	2483.500	19.70	32.30	52.00	-2.00	54.00	150	160	Average
5	* 2484.610	21.59	32.30	53.89	-0.11	54.00	150	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

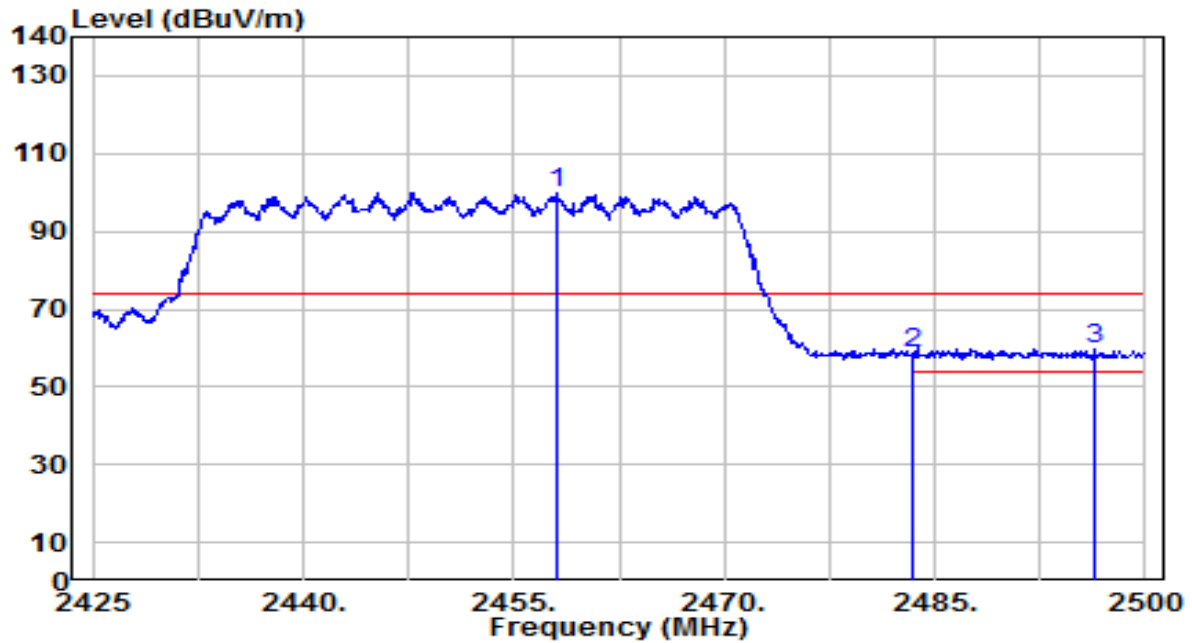


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.000	67.52	32.20	99.72	N/A	N/A	150	155	Peak
2	2483.500	26.55	32.30	58.85	-15.15	74.00	150	155	Peak
3	* 2496.400	27.30	32.35	59.65	-14.35	74.00	150	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

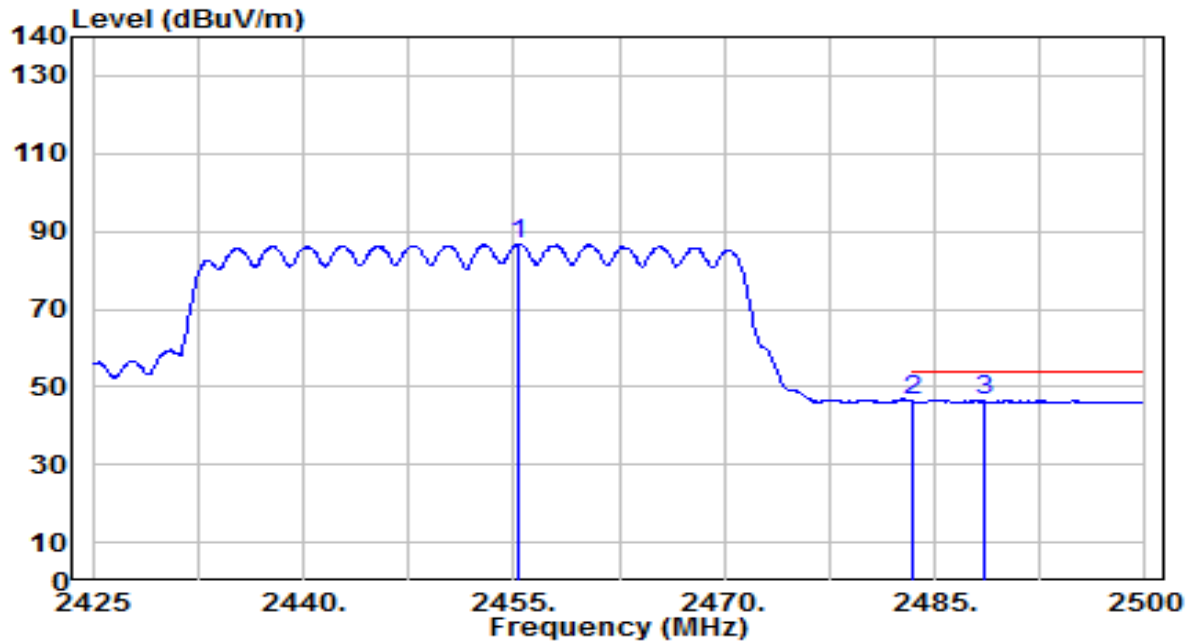


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.375	54.54	32.19	86.74	N/A	N/A	150	155	Average
2	2483.500	13.93	32.30	46.23	-7.77	54.00	150	155	Average
3	* 2488.525	14.28	32.32	46.60	-7.40	54.00	150	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

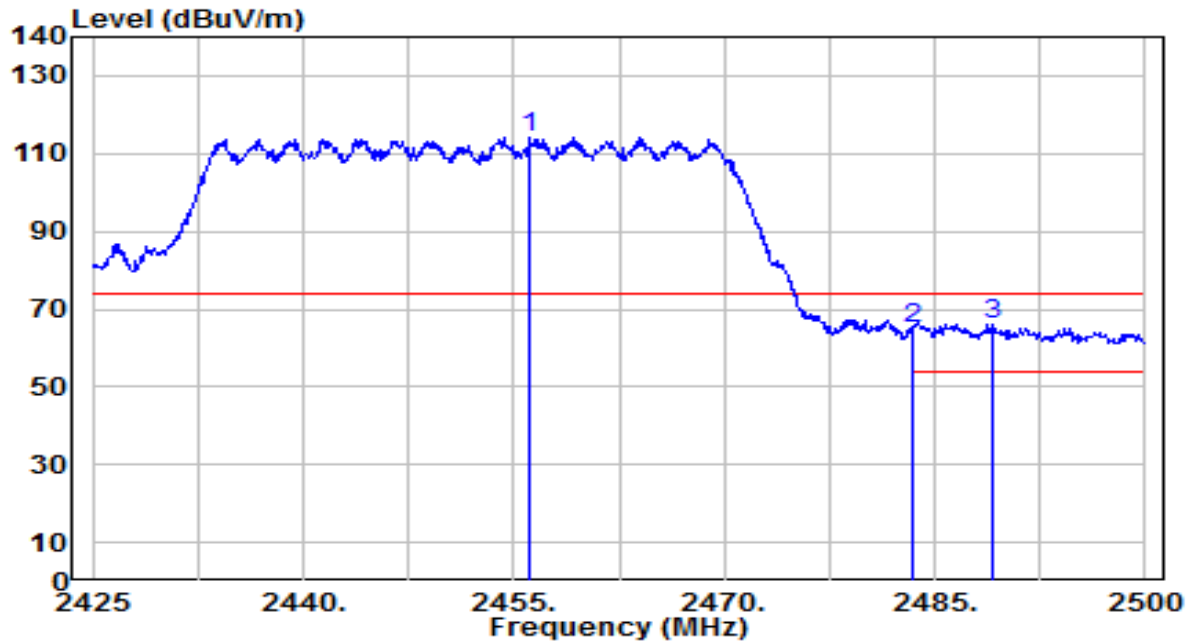


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.125	82.17	32.20	114.37	N/A	N/A	160	20	Peak
2	2483.500	32.53	32.30	64.82	-9.18	74.00	160	20	Peak
3	* 2489.050	33.95	32.32	66.27	-7.73	74.00	160	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

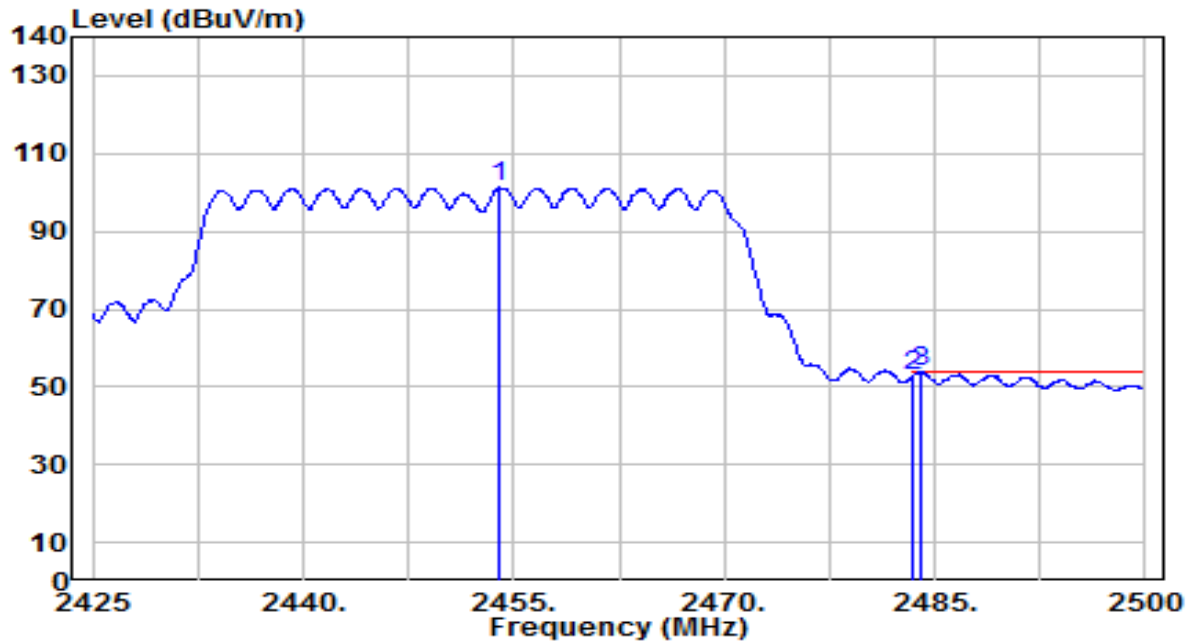


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.025	69.05	32.19	101.24	N/A	N/A	160	20	Average
2	2483.500	20.40	32.30	52.70	-1.30	54.00	160	20	Average
3	* 2484.100	21.47	32.30	53.77	-0.23	54.00	162	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

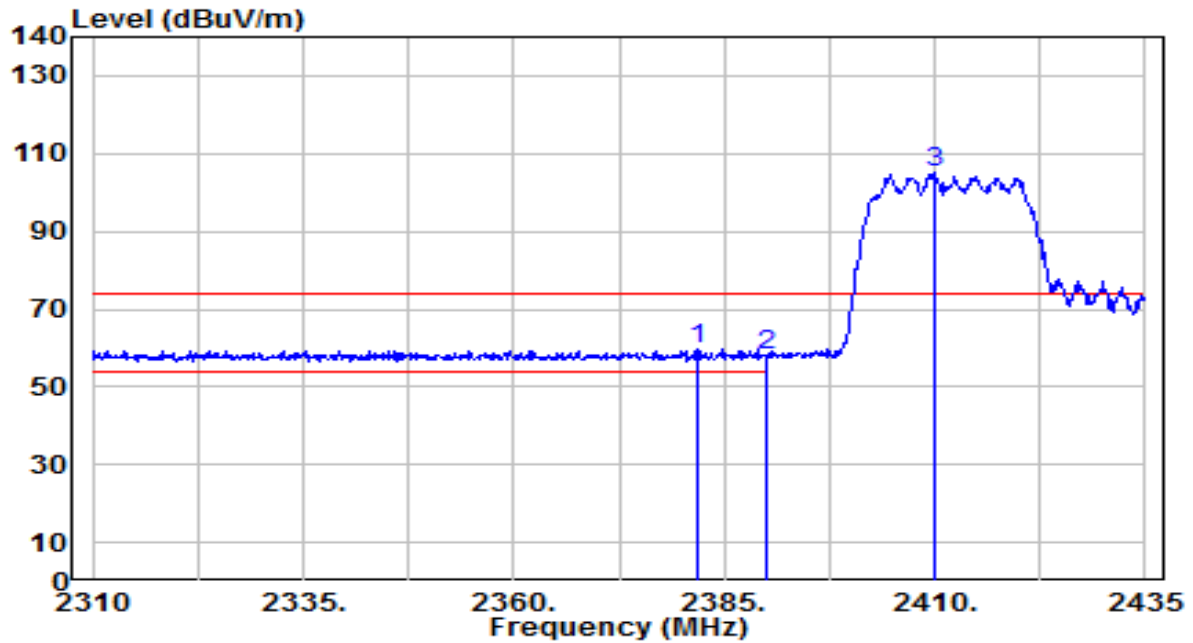


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.750	27.81	31.92	59.73	-14.27	74.00	155	25	Peak
2		2390.000	26.16	31.95	58.11	-15.89	74.00	155	25	Peak
3		2410.125	73.20	32.02	105.22	N/A	N/A	155	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

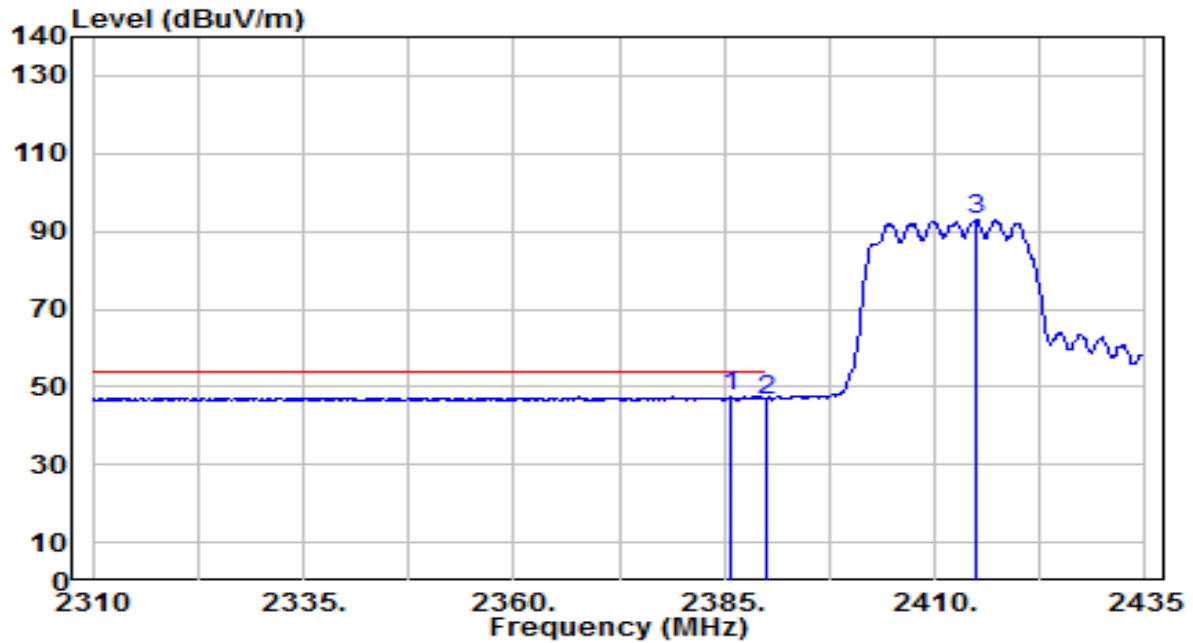


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	15.55	31.93	47.49	-6.51	54.00	155	25	Average
2		2390.000	14.61	31.95	46.56	-7.44	54.00	155	25	Average
3		2415.000	60.90	32.04	92.94	N/A	N/A	155	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

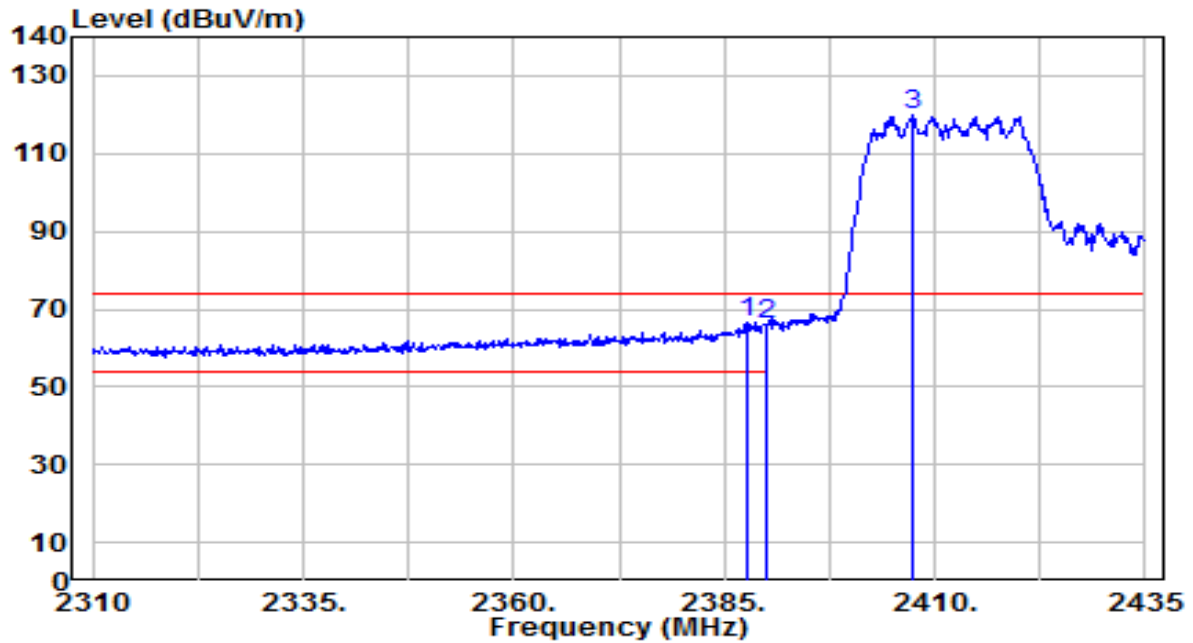


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	34.64	31.94	66.58	-7.42	74.00	155	30	Peak
2		2390.000	33.86	31.95	65.81	-8.19	74.00	155	30	Peak
3		2407.500	87.71	32.01	119.73	N/A	N/A	155	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

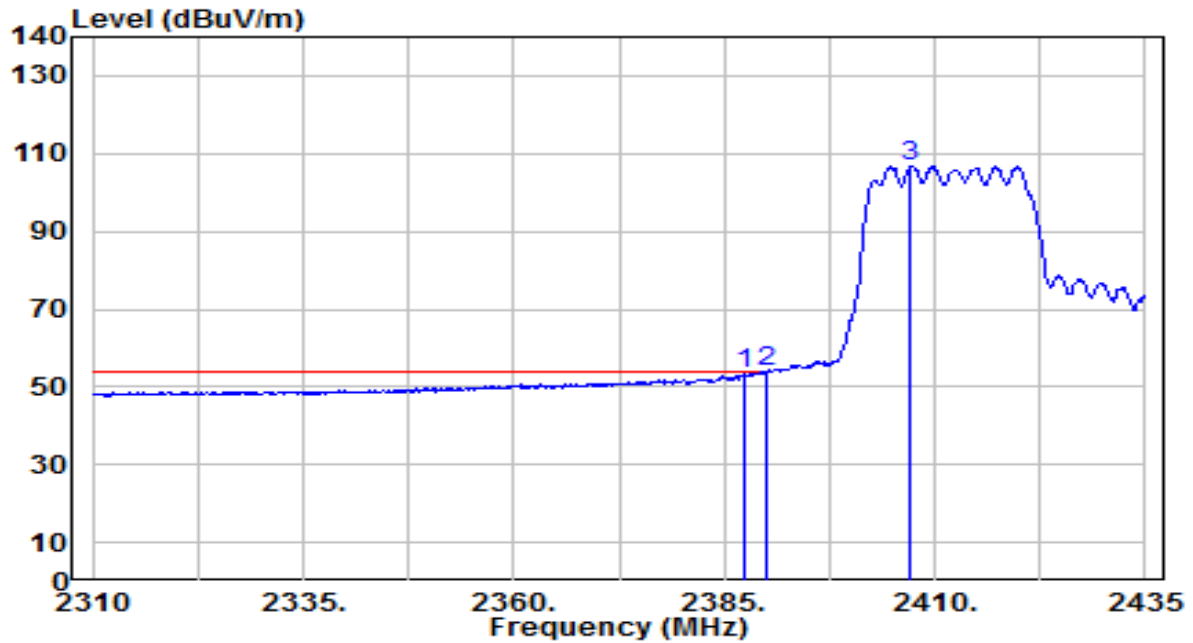


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.500	21.29	31.94	53.23	-0.77	54.00	155	30	Average
2	*	2390.000	21.94	31.95	53.89	-0.11	54.00	155	30	Average
3		2407.125	74.86	32.01	106.88	N/A	N/A	155	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

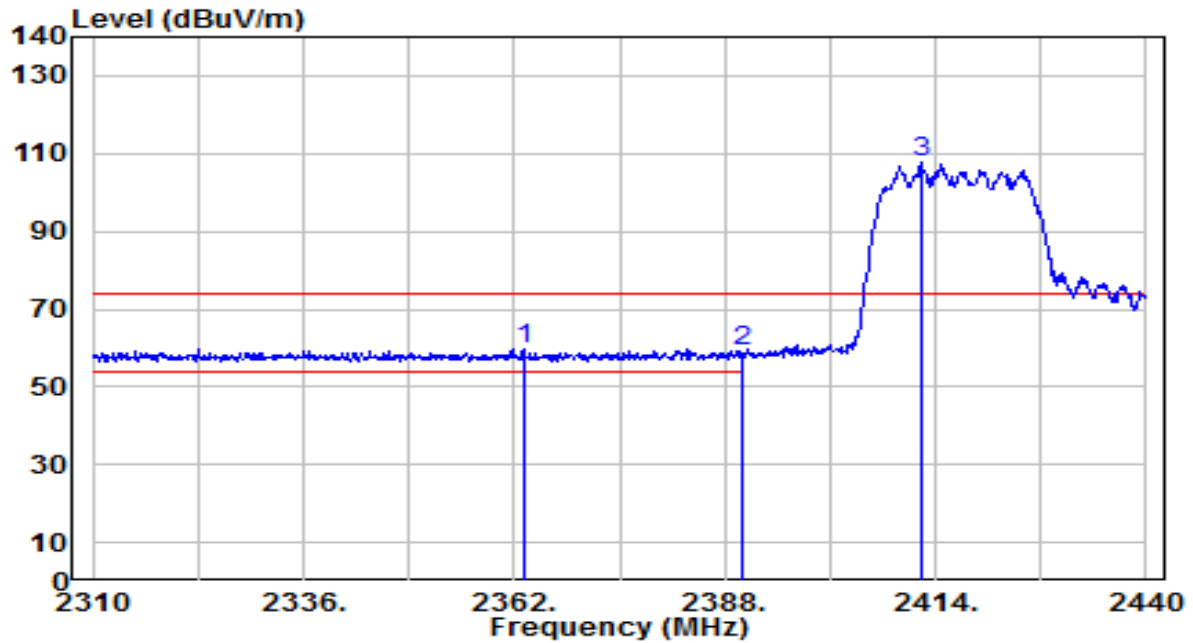


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2363.170	27.87	31.85	59.71	-14.29	74.00	155	25	Peak
2		2390.000	27.34	31.95	59.29	-14.71	74.00	155	25	Peak
3		2412.180	75.64	32.03	107.67	N/A	N/A	155	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

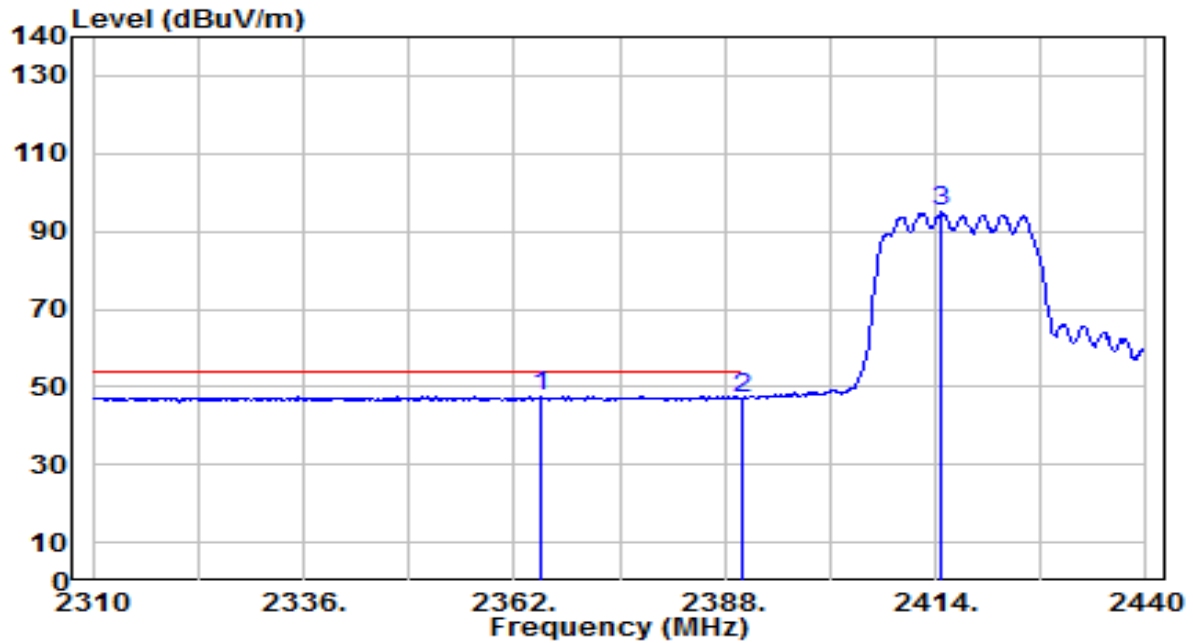


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2365.250	15.70	31.86	47.56	-6.44	54.00	155	25	Average
2		2390.000	15.32	31.95	47.27	-6.73	54.00	155	25	Average
3		2414.780	63.19	32.04	95.24	N/A	N/A	155	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

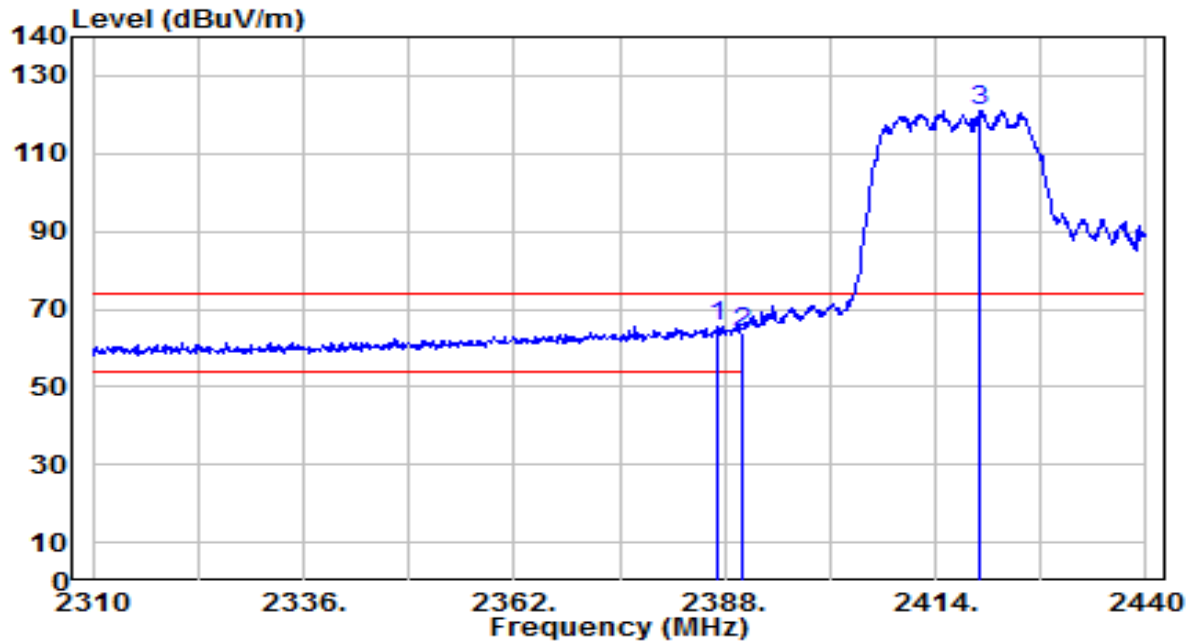


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.090	33.71	31.94	65.65	-8.35	74.00	155	30	Peak
2		2390.000	32.01	31.95	63.95	-10.05	74.00	155	30	Peak
3		2419.590	89.16	32.06	121.22	N/A	N/A	155	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

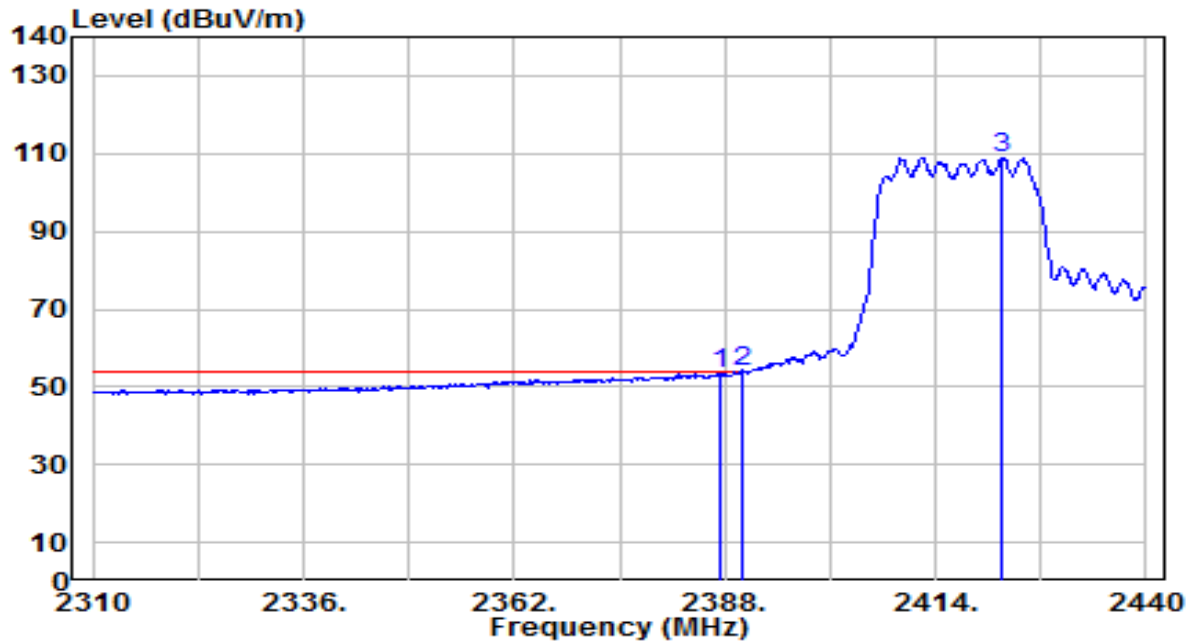


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.480	21.43	31.94	53.37	-0.63	54.00	155	30	Average
2	*	2390.000	21.88	31.95	53.83	-0.17	54.00	155	30	Average
3		2422.190	76.96	32.07	109.02	N/A	N/A	155	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

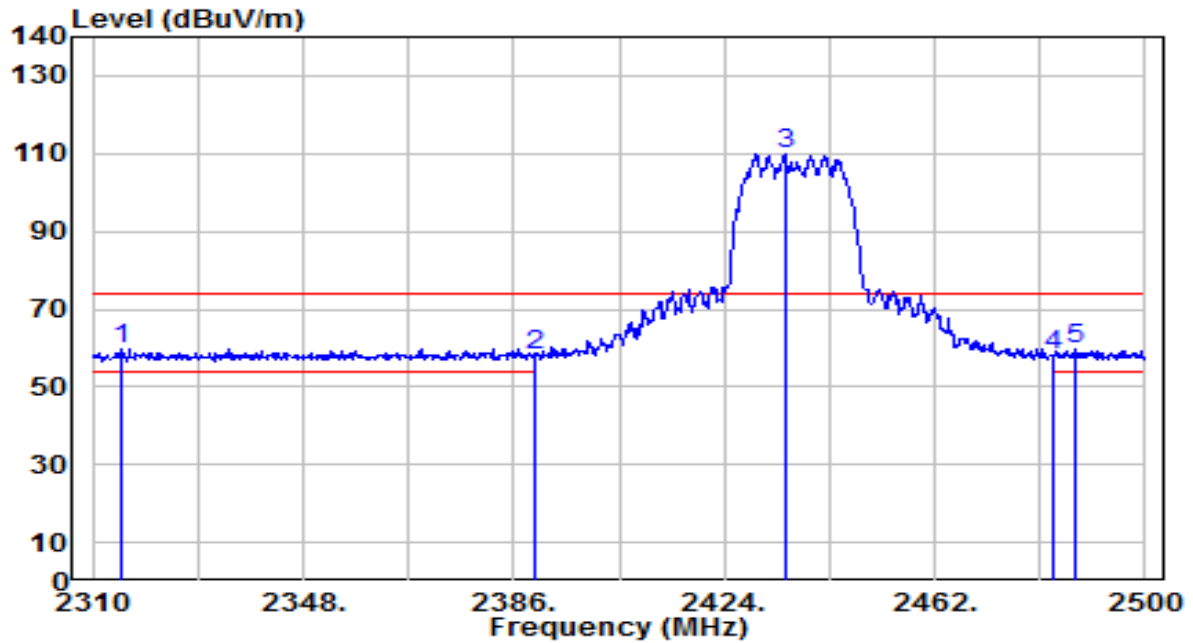


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2314.940	28.26	31.67	59.93	-14.07	74.00	145	25	Peak
2		2390.000	26.21	31.95	58.16	-15.84	74.00	145	25	Peak
3		2435.020	77.74	32.12	109.86	N/A	N/A	145	25	Peak
4		2483.500	25.79	32.30	58.09	-15.91	74.00	145	25	Peak
5		2487.460	27.43	32.31	59.74	-14.26	74.00	145	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

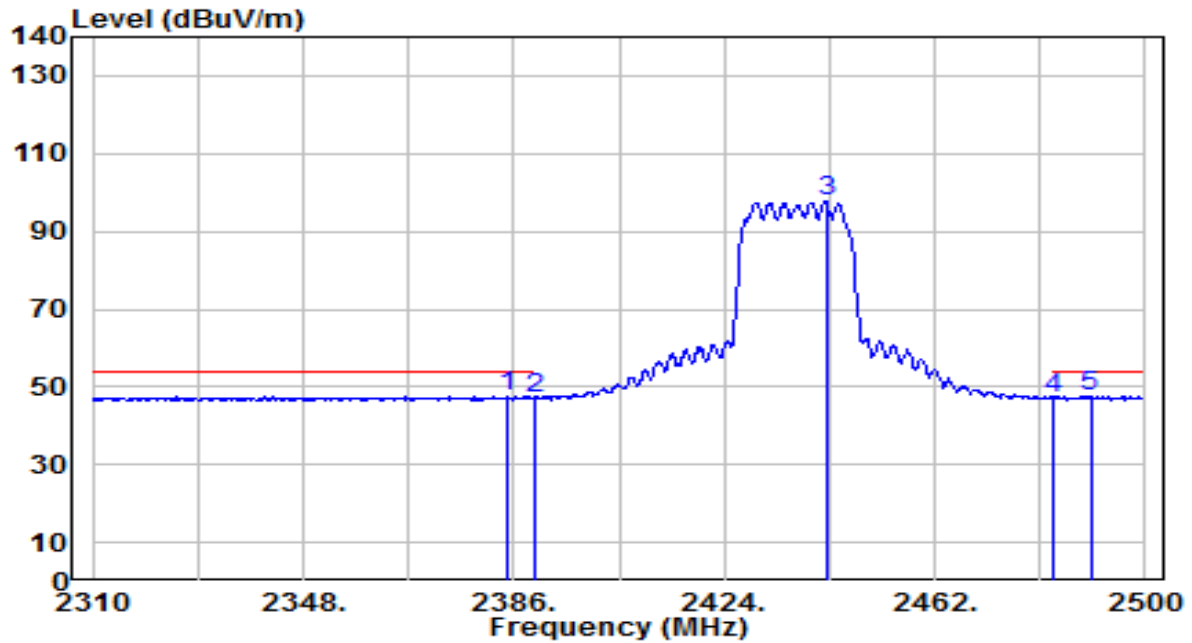


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.050	15.53	31.93	47.46	-6.54	54.00	145	25	Average
2	2390.000	15.31	31.95	47.26	-6.74	54.00	145	25	Average
3	2442.430	65.66	32.14	97.80	N/A	N/A	145	25	Average
4	2483.500	14.90	32.30	47.20	-6.80	54.00	145	25	Average
5	* 2490.120	15.23	32.32	47.55	-6.45	54.00	145	25	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

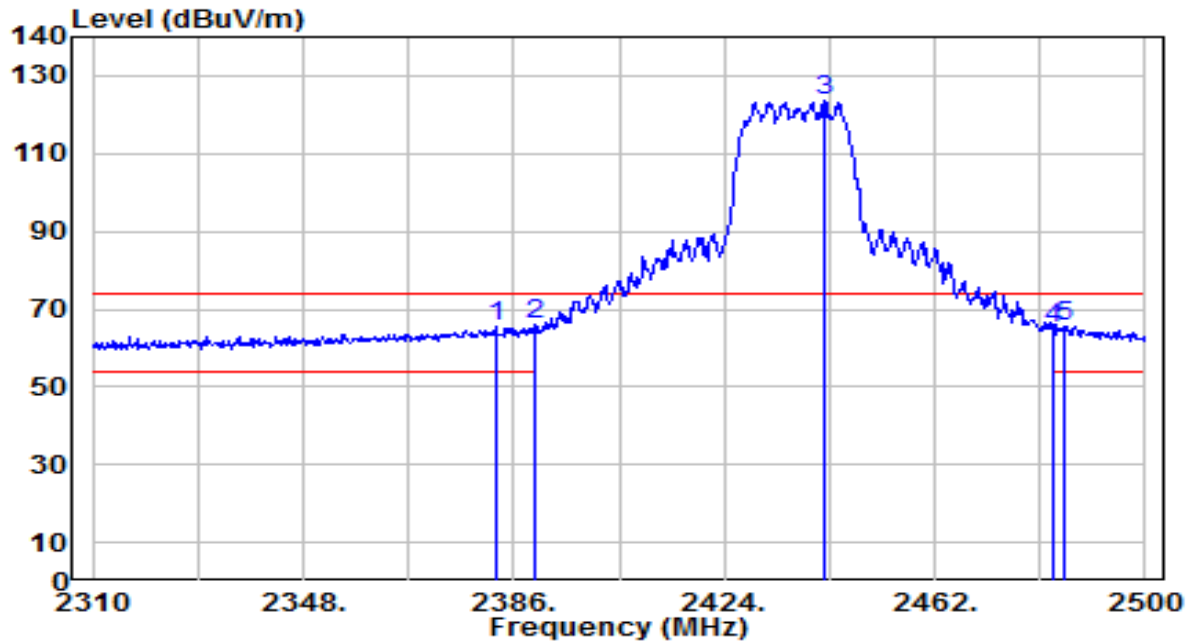


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2382.770	33.61	31.92	65.53	-8.47	74.00	140	160	Peak
2	*	2390.000	34.32	31.95	66.26	-7.74	74.00	140	160	Peak
3		2442.240	91.25	32.14	123.39	N/A	N/A	140	160	Peak
4		2483.500	32.77	32.30	65.07	-8.93	74.00	140	160	Peak
5		2485.180	33.28	32.30	65.59	-8.41	74.00	140	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

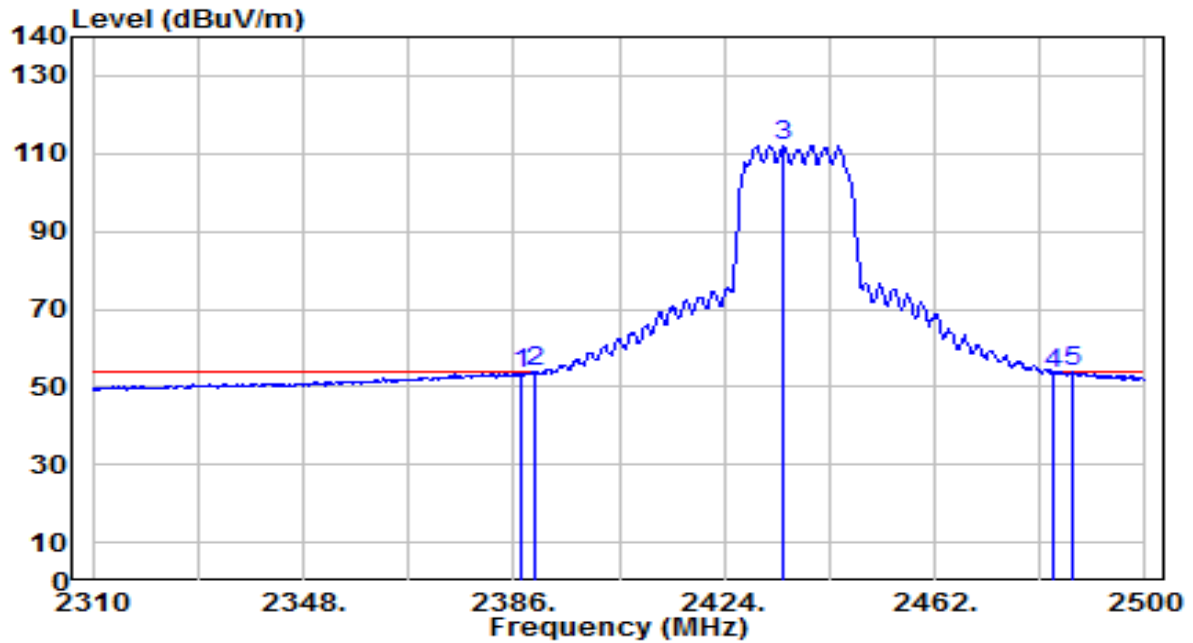


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.140	21.55	31.94	53.49	-0.51	54.00	140	160	Average
2	*	2390.000	21.77	31.95	53.71	-0.29	54.00	140	160	Average
3		2434.640	80.12	32.12	112.23	N/A	N/A	140	160	Average
4		2483.500	21.03	32.30	53.32	-0.68	54.00	140	160	Average
5		2486.890	21.37	32.31	53.68	-0.32	54.00	140	160	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

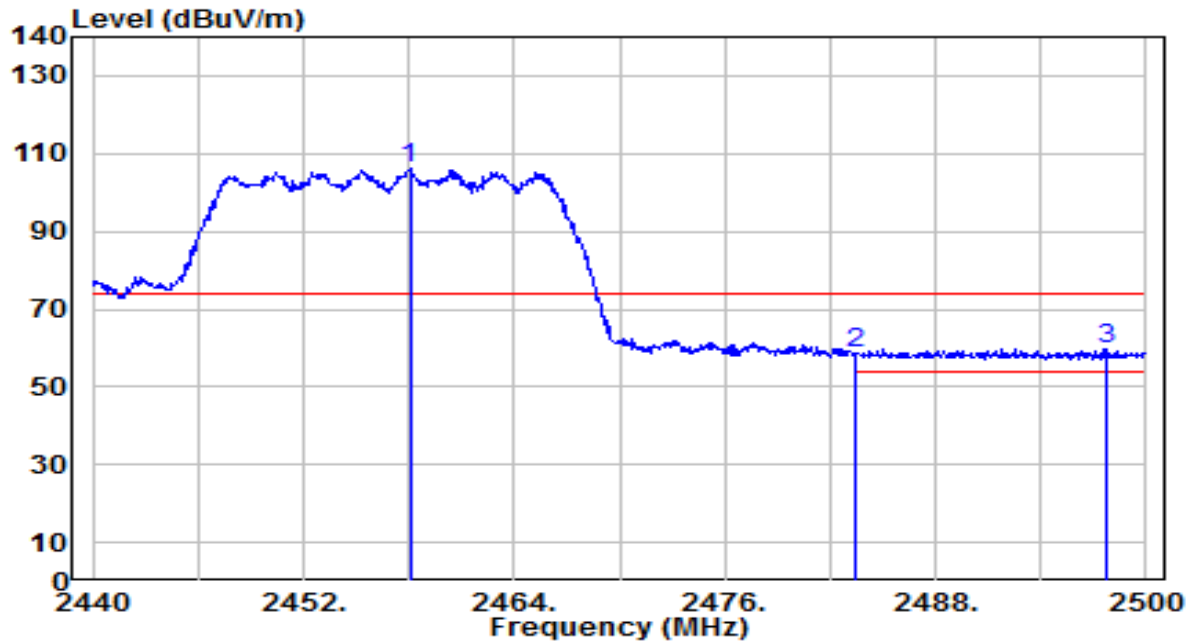


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.060	74.12	32.20	106.33	N/A	N/A	150	155	Peak
2	2483.500	26.09	32.30	58.39	-15.61	74.00	150	155	Peak
3	* 2497.720	27.53	32.35	59.88	-14.12	74.00	150	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

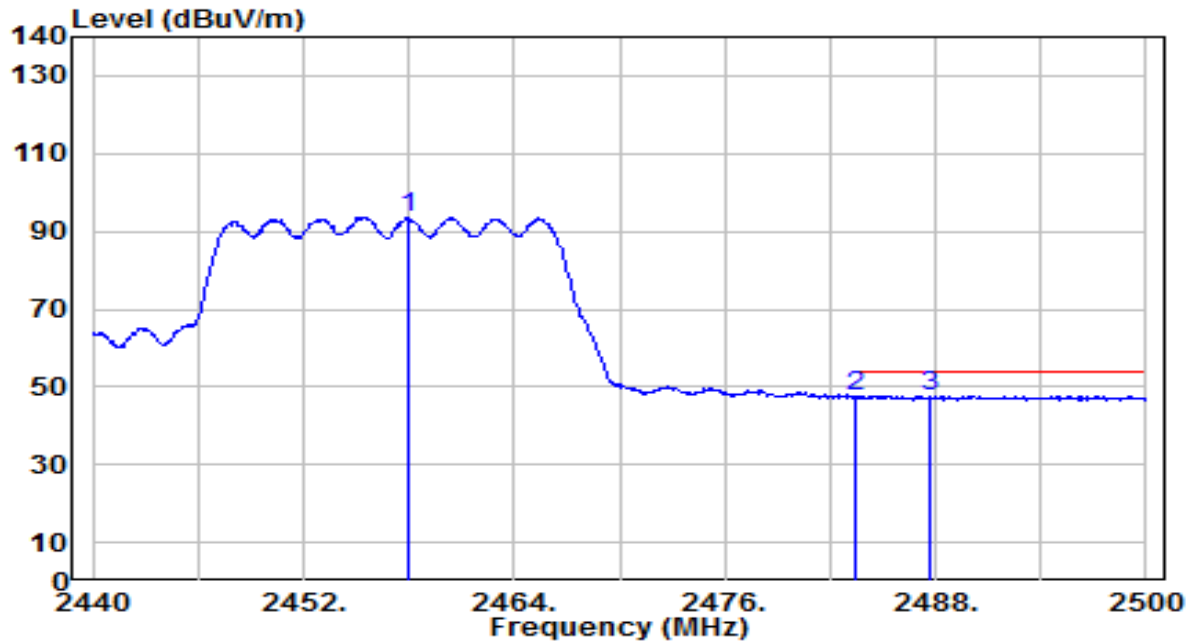


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.000	61.55	32.20	93.75	N/A	N/A	150	155	Average
2	2483.500	15.18	32.30	47.47	-6.53	54.00	150	155	Average
3	* 2487.760	15.28	32.31	47.60	-6.40	54.00	150	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

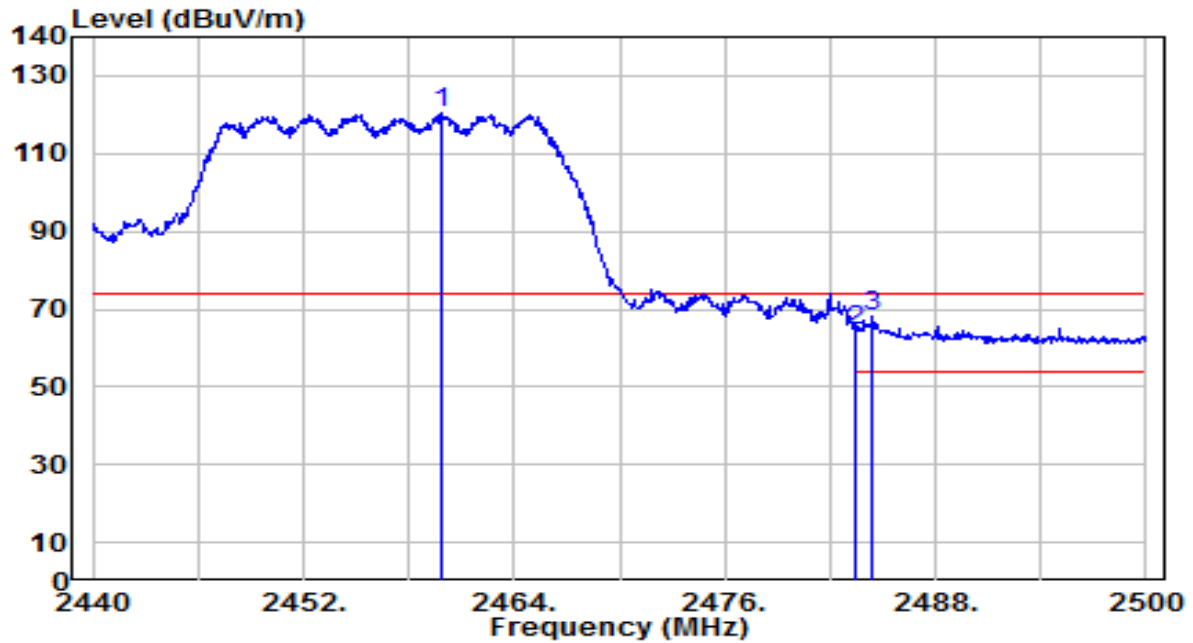


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.800	88.30	32.21	120.51	N/A	N/A	145	30	Peak
2	2483.500	32.28	32.30	64.58	-9.42	74.00	145	30	Peak
3	* 2484.400	35.81	32.30	68.11	-5.89	74.00	145	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

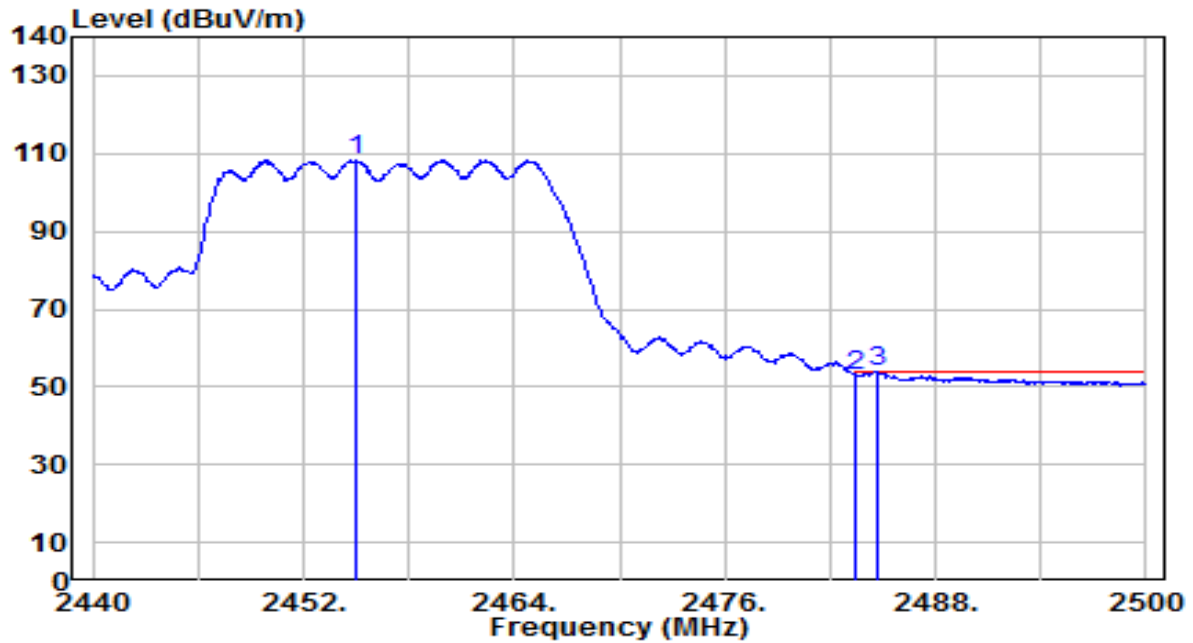


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.940	76.14	32.19	108.33	N/A	N/A	145	30	Average
2		2483.500	20.77	32.30	53.07	-0.93	54.00	145	30	Average
3	*	2484.700	21.45	32.30	53.76	-0.24	54.00	145	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

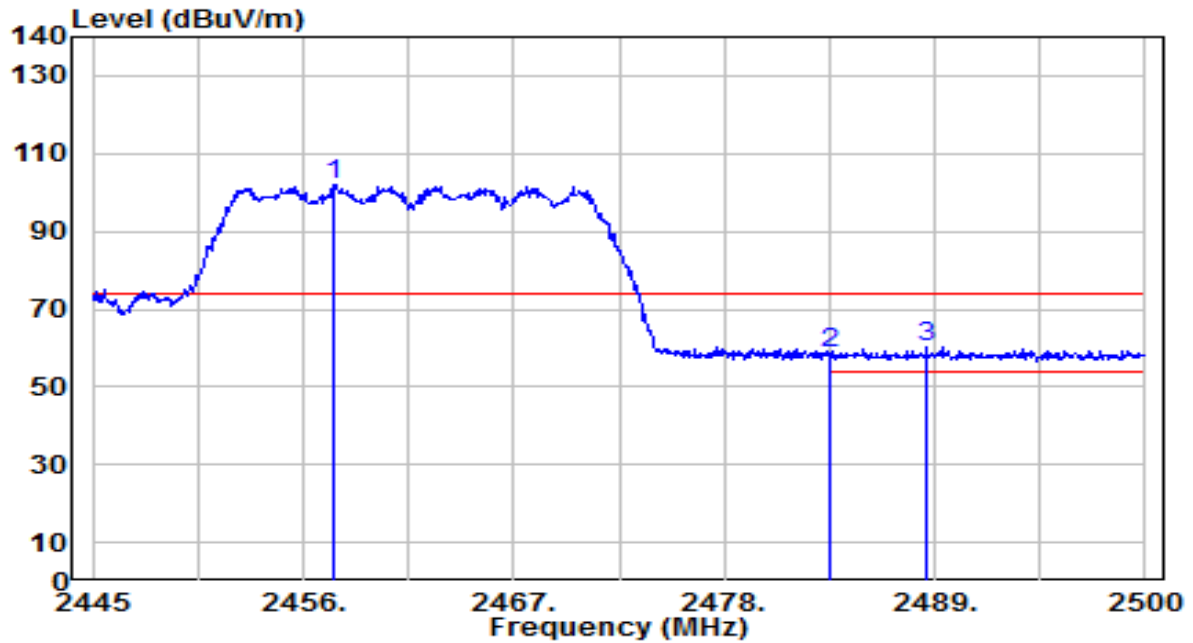


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.540	69.80	32.20	102.00	N/A	N/A	150	155	Peak
2	2483.500	26.55	32.30	58.85	-15.15	74.00	150	155	Peak
3	* 2488.560	27.90	32.32	60.22	-13.78	74.00	150	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

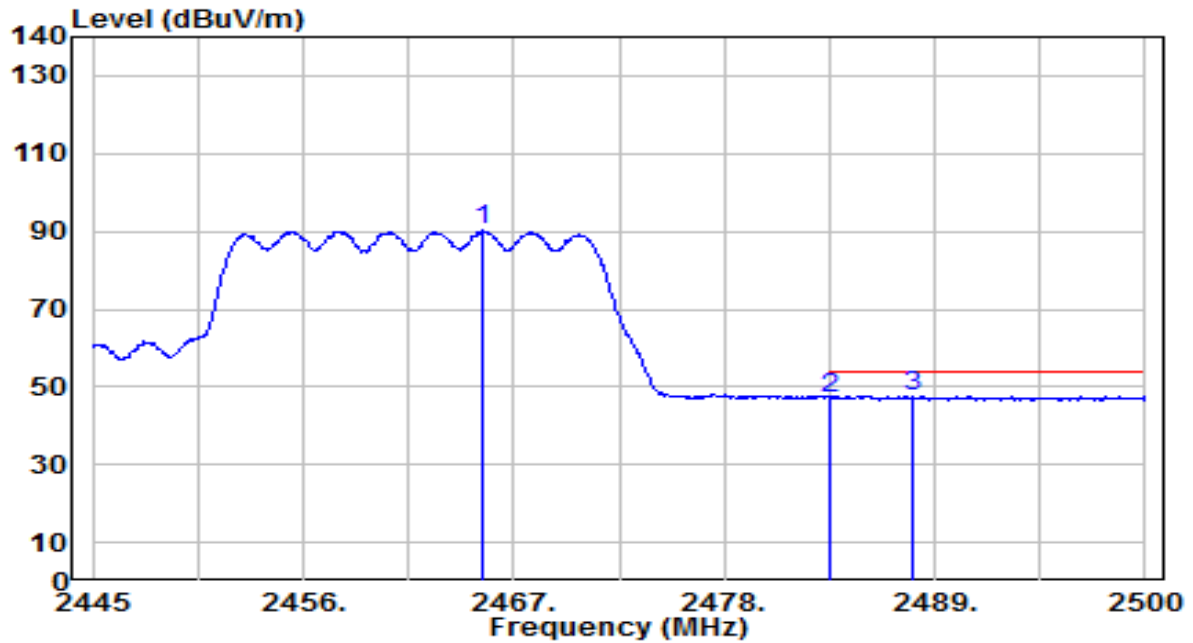


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.350	57.87	32.23	90.10	N/A	N/A	150	155	Average
2	2483.500	14.93	32.30	47.23	-6.77	54.00	150	155	Average
3	* 2487.900	15.29	32.31	47.61	-6.39	54.00	150	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

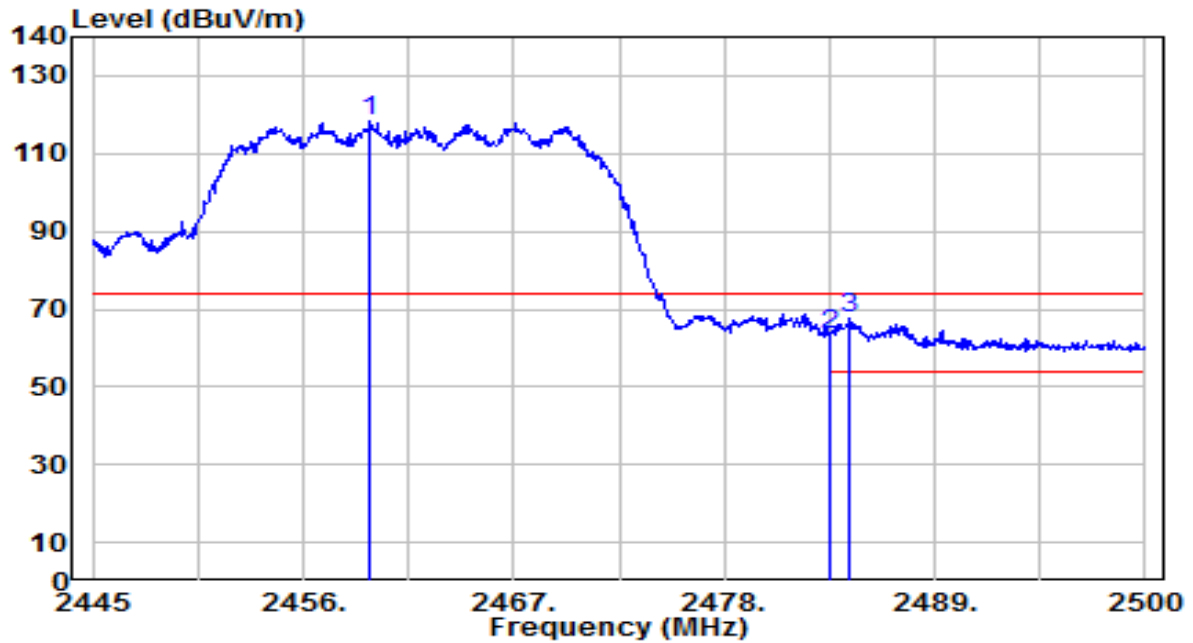


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.520	85.88	32.21	118.09	N/A	N/A	145	30	Peak
2	2483.500	31.35	32.30	63.65	-10.35	74.00	145	30	Peak
3	* 2484.545	35.19	32.30	67.50	-6.50	74.00	145	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

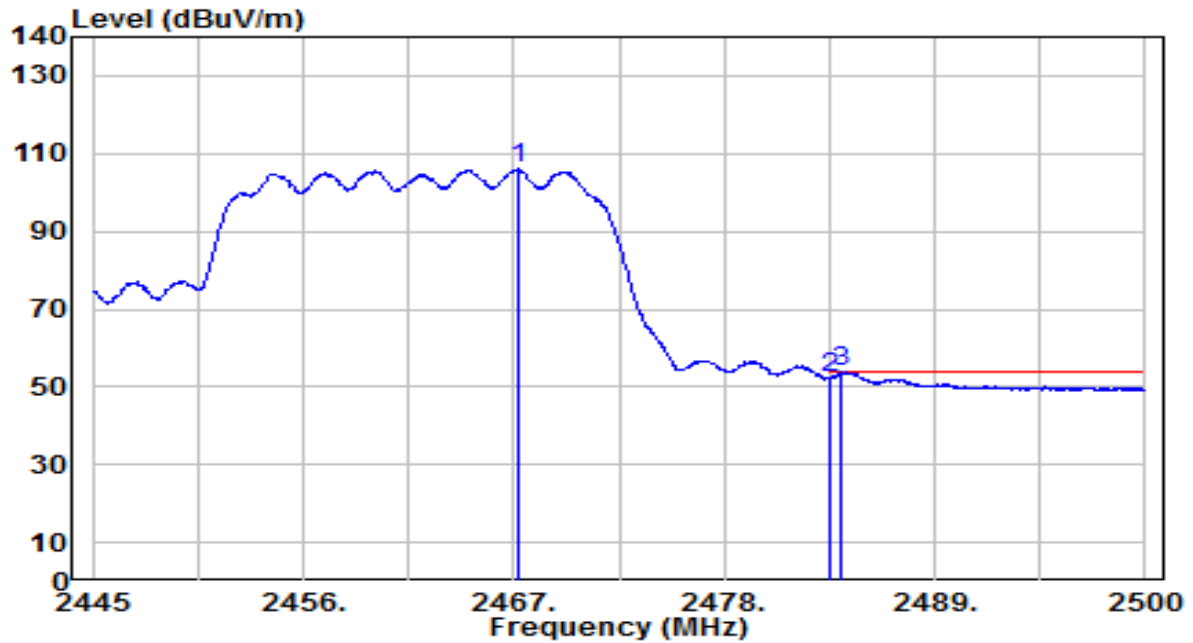


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.220	73.74	32.24	105.98	N/A	N/A	145	30	Average
2		2483.500	19.97	32.30	52.27	-1.73	54.00	145	30	Average
3	*	2484.160	21.57	32.30	53.87	-0.13	54.00	145	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

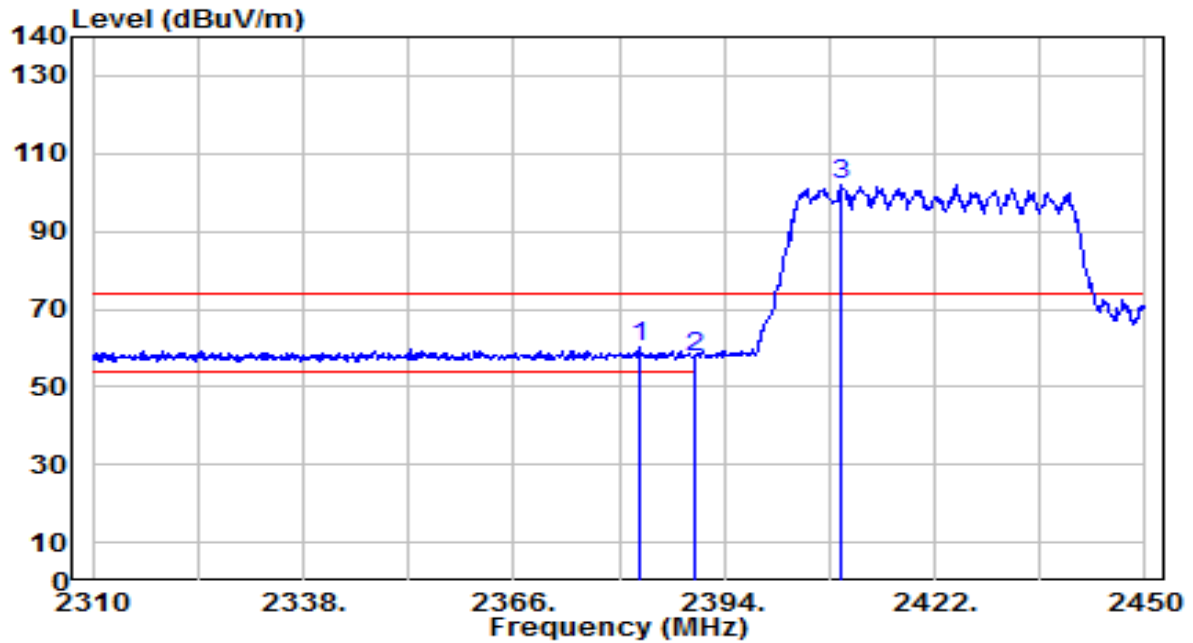


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.660	28.12	31.92	60.04	-13.96	74.00	155	25	Peak
2		2390.000	25.63	31.95	57.58	-16.42	74.00	155	25	Peak
3		2409.540	69.99	32.02	102.01	N/A	N/A	155	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

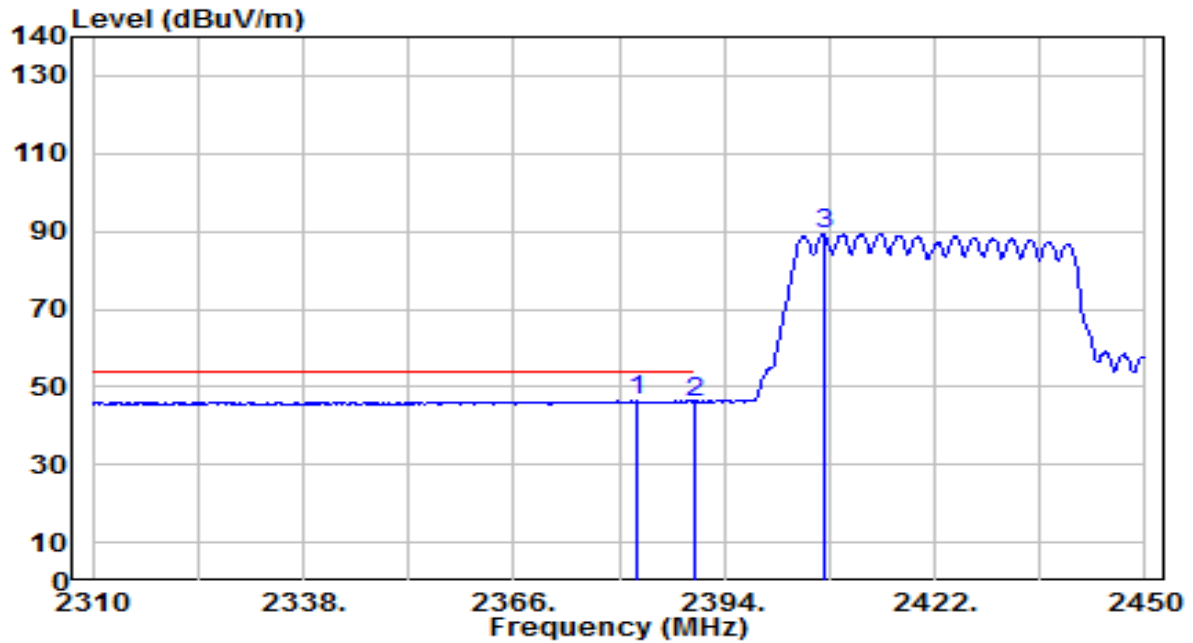


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.380	14.43	31.92	46.35	-7.65	54.00	155	25	Average
2		2390.000	14.23	31.95	46.17	-7.83	54.00	155	25	Average
3		2407.160	57.21	32.01	89.22	N/A	N/A	155	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

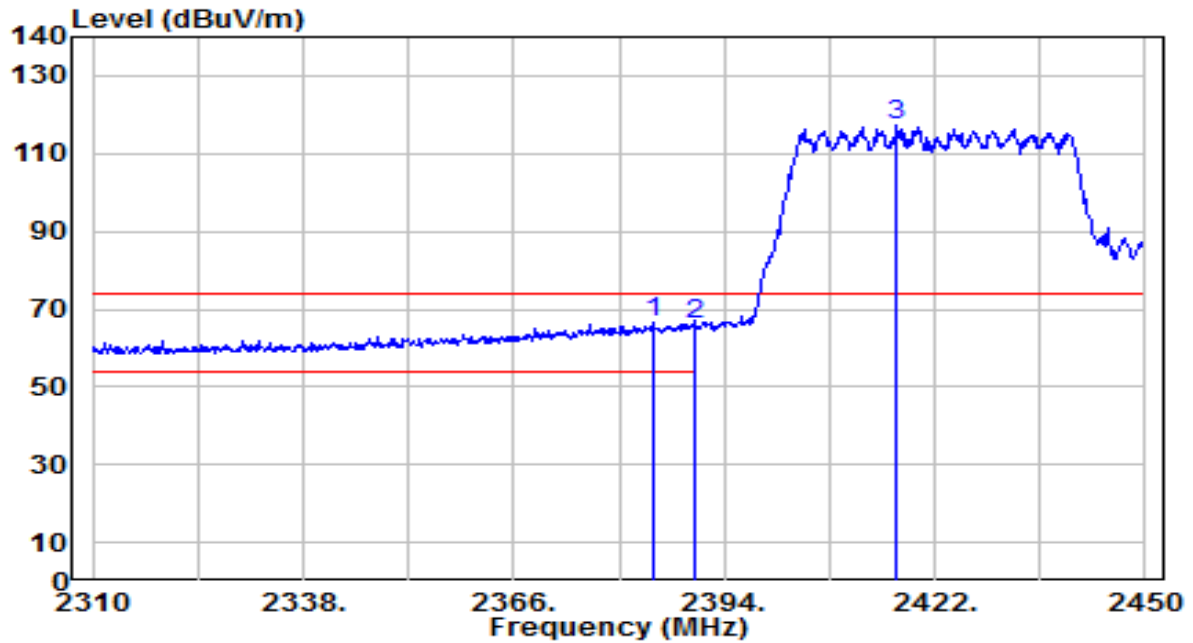


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.480	34.71	31.93	66.63	-7.37	74.00	155	30	Peak
2		2390.000	34.06	31.95	66.01	-7.99	74.00	155	30	Peak
3		2416.960	85.39	32.05	117.44	N/A	N/A	155	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

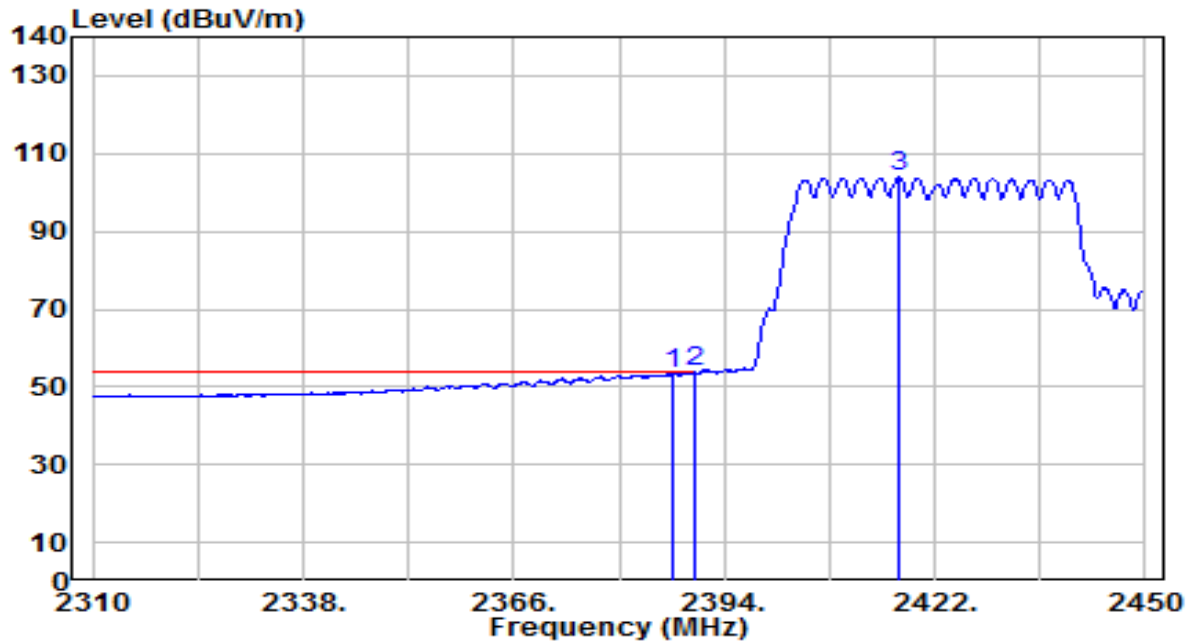


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.000	21.39	31.94	53.32	-0.68	54.00	155	30	Average
2	*	2390.000	21.83	31.95	53.78	-0.22	54.00	155	30	Average
3		2417.380	71.79	32.05	103.84	N/A	N/A	155	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

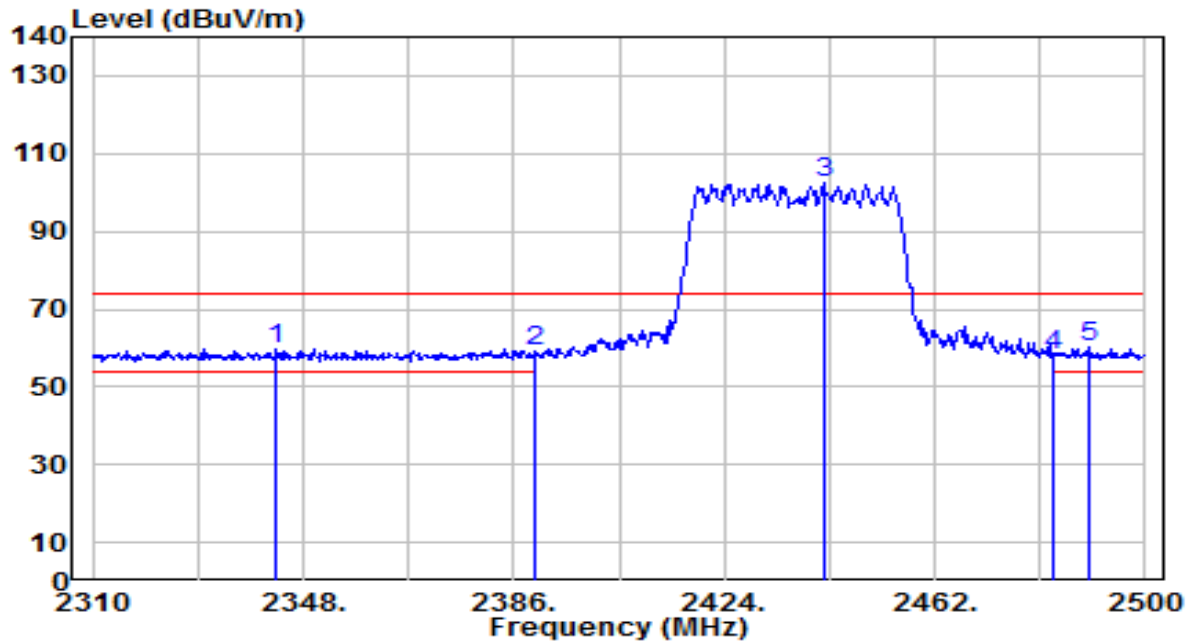


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2343.250	28.03	31.77	59.81	-14.19	74.00	145	25	Peak
2	2390.000	27.15	31.95	59.09	-14.91	74.00	145	25	Peak
3	2441.860	70.26	32.14	102.40	N/A	N/A	145	25	Peak
4	2483.500	25.88	32.30	58.17	-15.83	74.00	145	25	Peak
5	* 2489.740	27.67	32.32	59.99	-14.01	74.00	145	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

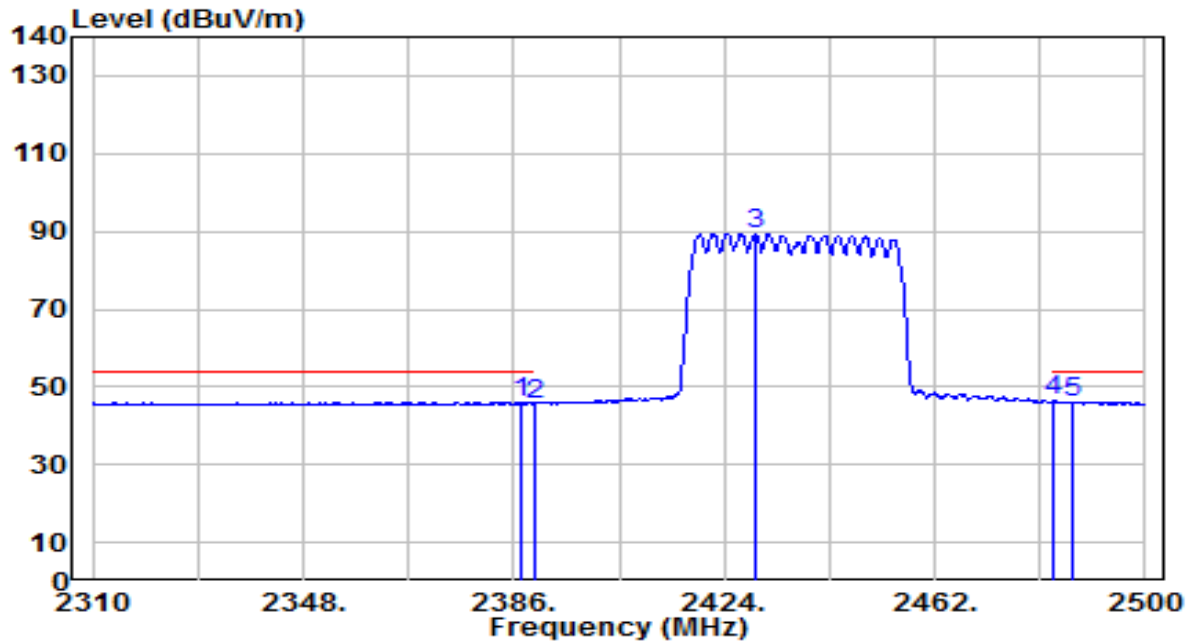


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	14.20	31.94	46.13	-7.87	54.00	145	25	Average
2	2390.000	13.66	31.95	45.61	-8.39	54.00	145	25	Average
3	2429.510	57.30	32.10	89.40	N/A	N/A	145	25	Average
4	* 2483.500	14.04	32.30	46.34	-7.66	54.00	145	25	Average
5	2486.700	13.85	32.31	46.16	-7.84	54.00	145	25	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

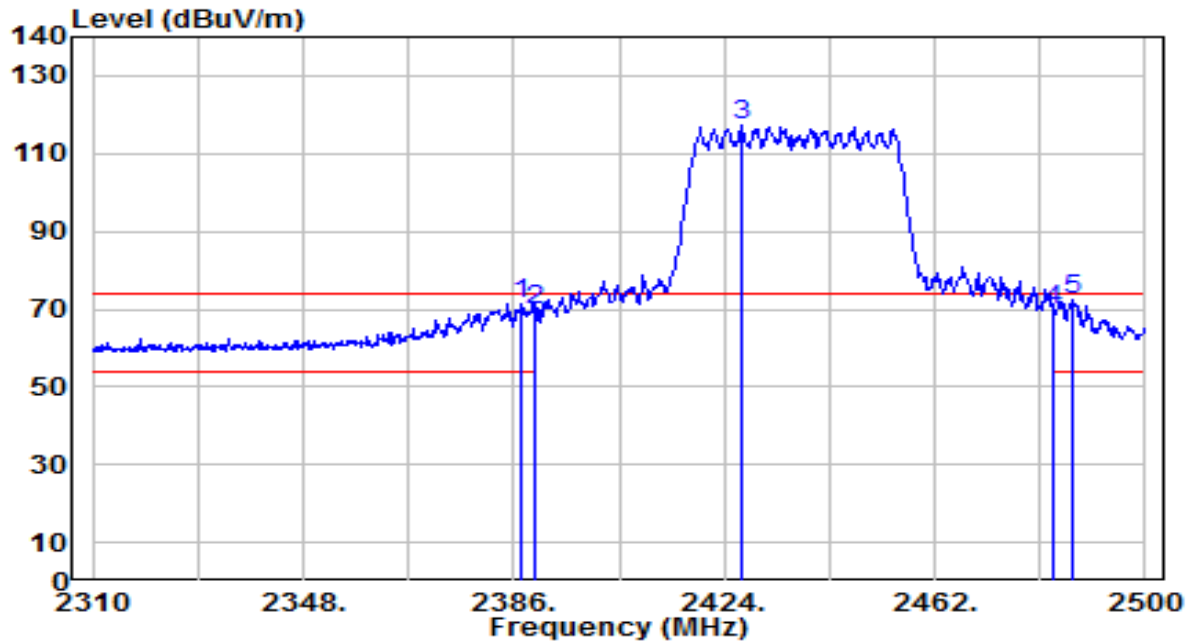


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	39.48	31.94	71.42	-2.58	74.00	140	160	Peak
2	2390.000	38.04	31.95	69.99	-4.01	74.00	140	160	Peak
3	2427.040	85.04	32.09	117.12	N/A	N/A	140	160	Peak
4	2483.500	37.40	32.30	69.70	-4.30	74.00	140	160	Peak
5	* 2487.080	39.88	32.31	72.19	-1.81	74.00	140	160	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

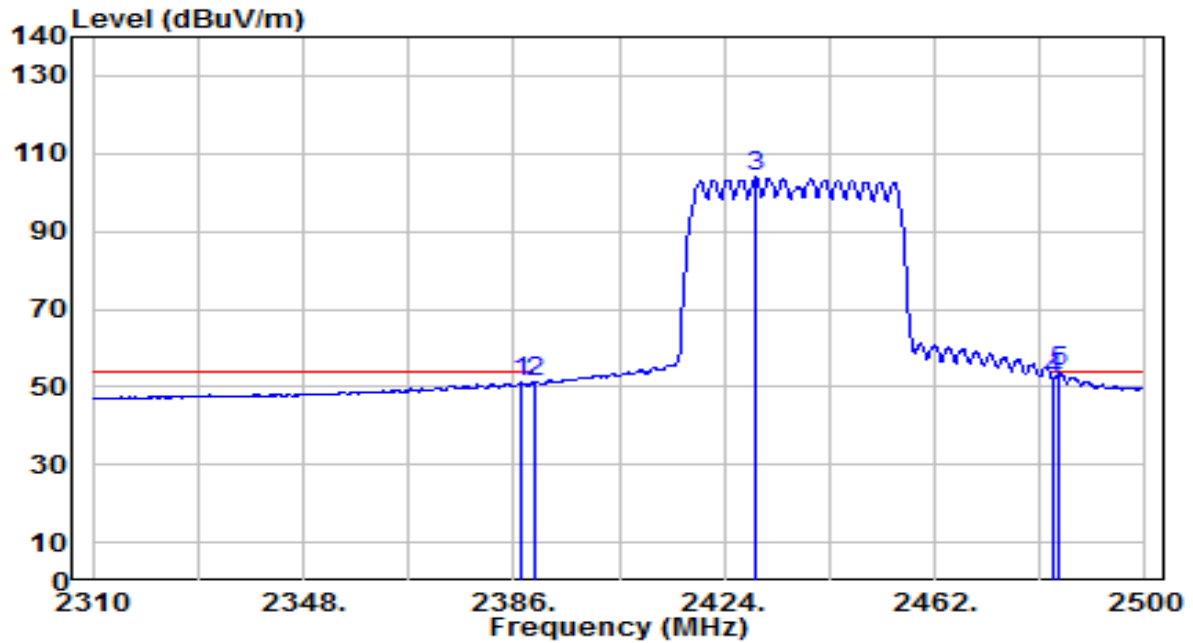


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	19.20	31.94	51.13	-2.87	54.00	140	160	Average
2	2390.000	19.17	31.95	51.12	-2.88	54.00	140	160	Average
3	2429.700	71.75	32.10	103.84	N/A	N/A	140	160	Average
4	2483.500	19.62	32.30	51.91	-2.09	54.00	140	160	Average
5	* 2484.610	21.50	32.30	53.80	-0.20	54.00	138	158	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

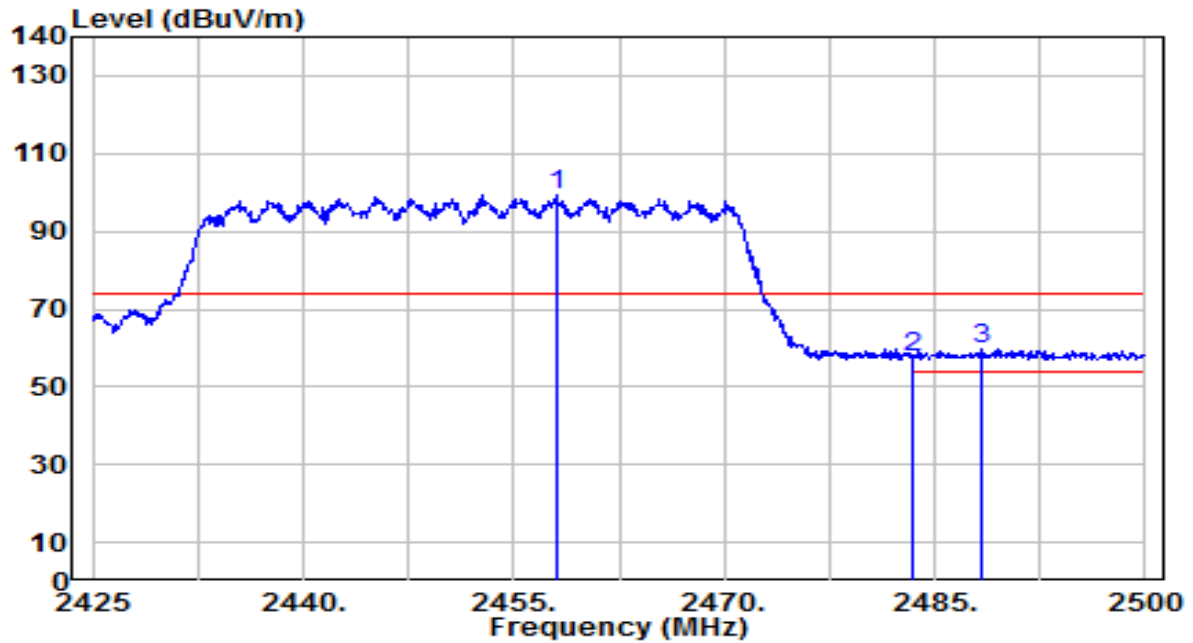


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.000	67.09	32.20	99.29	N/A	N/A	150	155	Peak
2	2483.500	25.49	32.30	57.78	-16.22	74.00	150	155	Peak
3	* 2488.300	27.27	32.32	59.59	-14.41	74.00	150	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

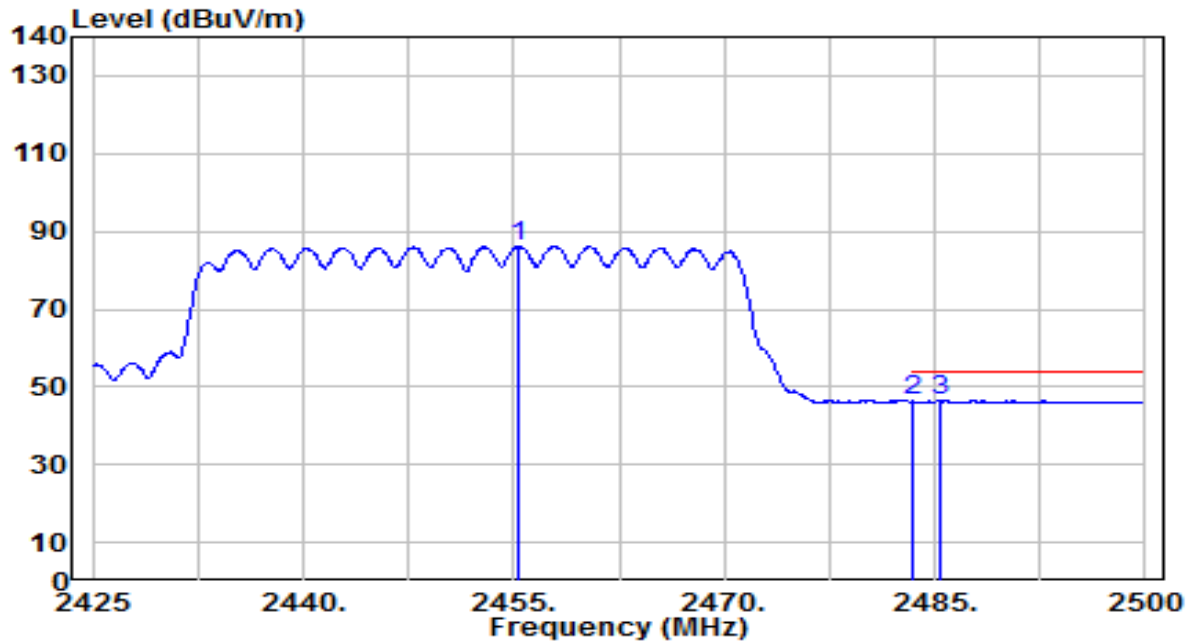


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.375	54.00	32.19	86.19	N/A	N/A	150	155	Average
2	2483.500	13.99	32.30	46.29	-7.71	54.00	150	155	Average
3	* 2485.300	14.21	32.31	46.51	-7.49	54.00	150	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

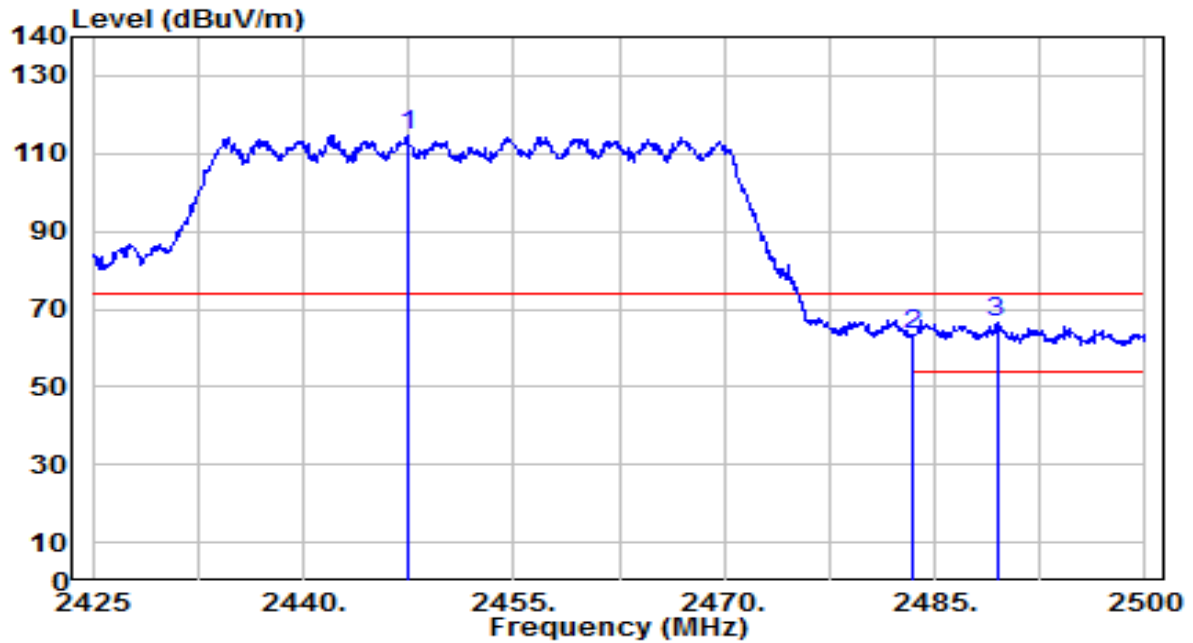


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.425	82.56	32.16	114.73	N/A	N/A	145	30	Peak
2	2483.500	31.21	32.30	63.51	-10.49	74.00	145	30	Peak
3	* 2489.425	34.45	32.32	66.77	-7.23	74.00	145	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-18
Factor	BBHA 9120D	Temp. / Humidity	21°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

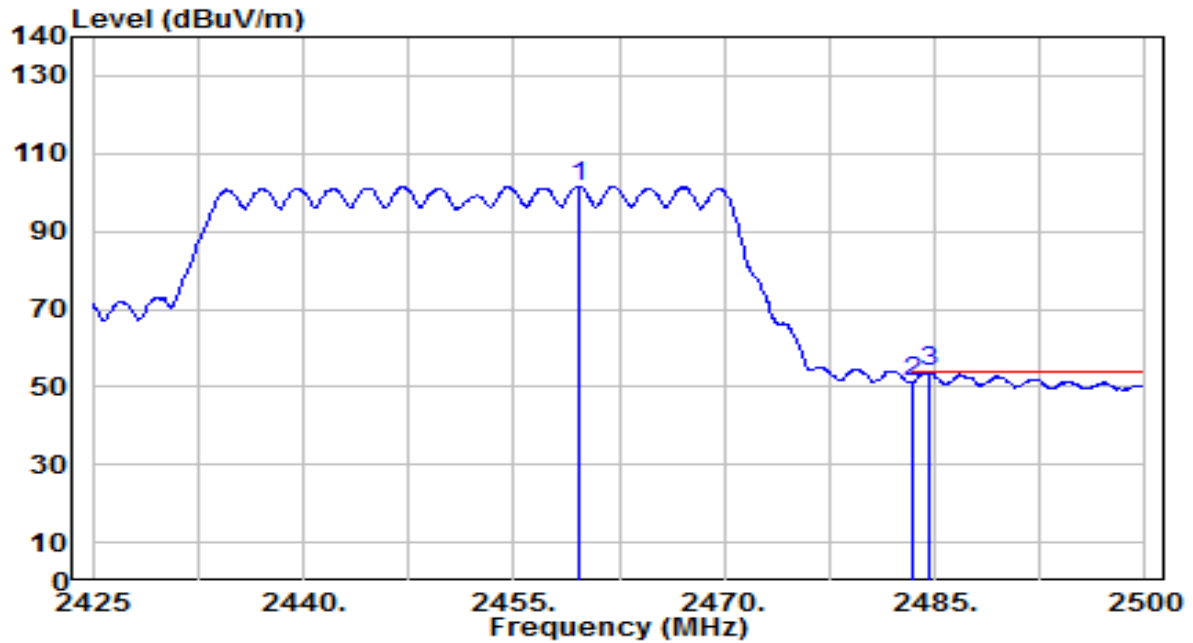

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.650	69.45	32.21	101.66	N/A	N/A	145	30	Average
2	2483.500	18.89	32.30	51.19	-2.81	54.00	145	30	Average
3	* 2484.550	21.41	32.30	53.71	-0.29	54.00	145	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

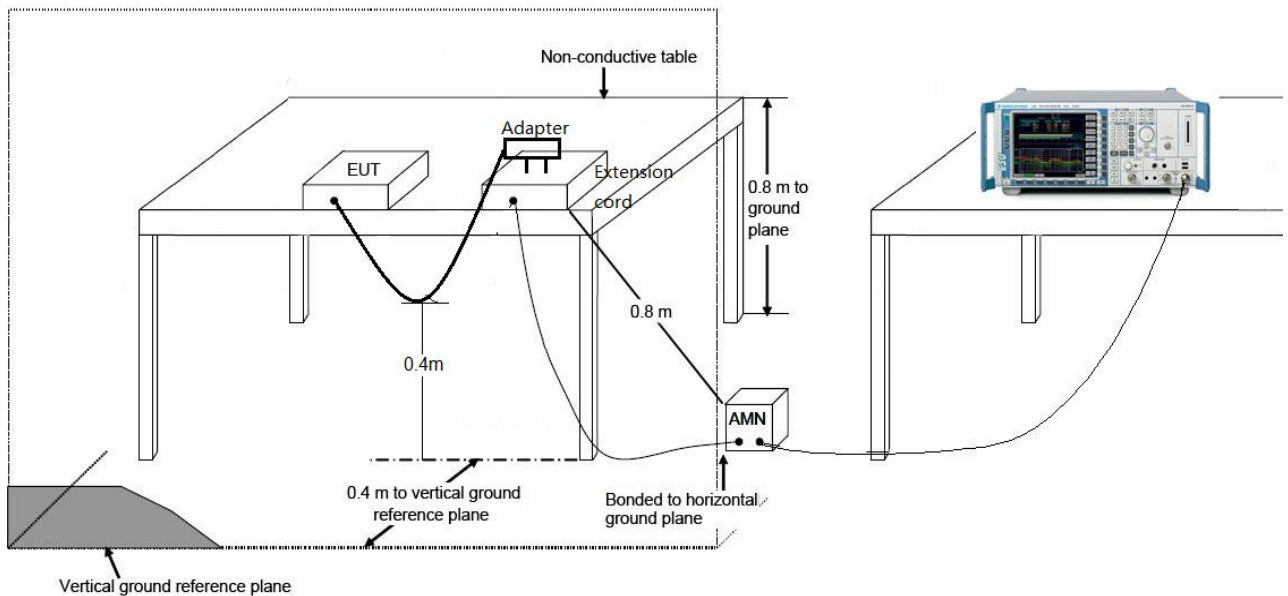

7.8.3.Test Result

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-08
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.4°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

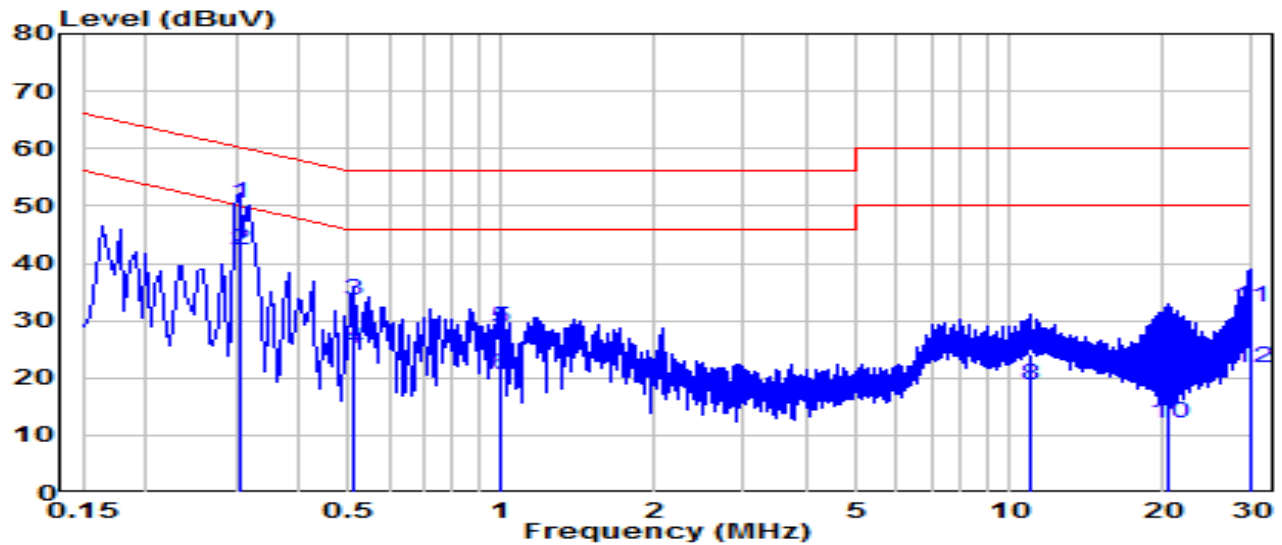


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.307	40.92	9.64	50.56	-9.48	60.04	QP
2	*	0.307	32.62	9.64	42.26	-7.78	50.04	Average
3		0.514	23.79	9.65	33.44	-22.56	56.00	QP
4		0.514	15.42	9.65	25.07	-20.93	46.00	Average
5		1.000	18.95	9.68	28.63	-27.37	56.00	QP
6		1.000	10.81	9.68	20.49	-25.51	46.00	Average
7		11.003	14.26	9.90	24.16	-35.84	60.00	QP
8		11.003	8.73	9.90	18.63	-31.37	50.00	Average
9		20.636	14.99	10.00	24.99	-35.01	60.00	QP
10		20.636	2.03	10.00	12.04	-37.96	50.00	Average
11		29.910	22.13	10.06	32.19	-27.81	60.00	QP
12		29.910	11.80	10.06	21.86	-28.14	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-08
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.4°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

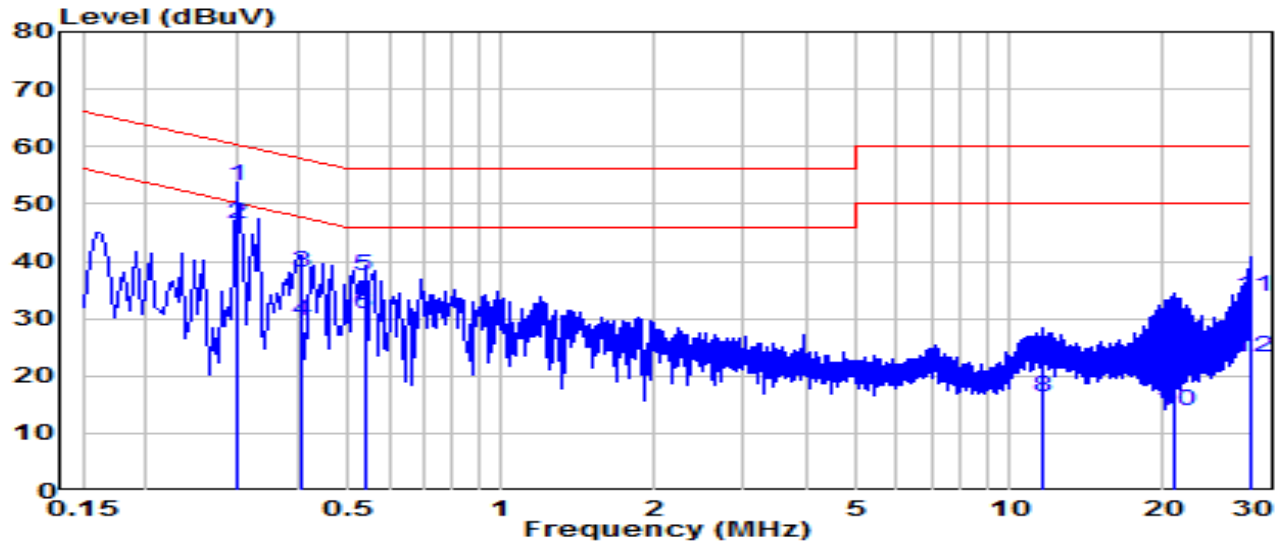

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.303	43.55	9.64	53.18	-6.98	60.16	QP
2	*	0.303	36.76	9.64	46.40	-3.76	50.16	Average
3		0.402	28.26	9.64	37.90	-19.91	57.81	QP
4		0.402	20.04	9.64	29.69	-18.13	47.81	Average
5		0.537	27.77	9.65	37.42	-18.58	56.00	QP
6		0.537	21.05	9.65	30.70	-15.30	46.00	Average
7		11.615	11.80	9.88	21.68	-38.32	60.00	QP
8		11.615	6.42	9.88	16.30	-33.70	50.00	Average
9		21.203	16.96	9.94	26.90	-33.10	60.00	QP
10		21.203	4.09	9.94	14.02	-35.98	50.00	Average
11		29.969	23.88	9.93	33.81	-26.19	60.00	QP
12		29.969	13.30	9.93	23.23	-26.77	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2412TW0120-UT” file.

Appendix B : External Photograph

Refer to “2412TW0120-UE” file.

Appendix C : Internal Photograph

Refer to “2412TW0120-UI” file.

_____ The End _____