

FCC TEST REPORT
FOR
Qingdao Hisense Intelligent Commercial System Co., Ltd.
Tablet POS
Test Model: HM516

| | |
|--------------------------------|--|
| Prepared for | : Qingdao Hisense Intelligent Commercial System Co., Ltd. |
| Address | : Bldg 3, 151 Zhuzhou Lu, Laoshan, Qingdao, China |
| Prepared by | : Shenzhen LCS Compliance Testing Laboratory Ltd. |
| Address | : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China |
| Tel | : (+86)755-82591330 |
| Fax | : (+86)755-82591332 |
| Web | : www.LCS-cert.com |
| Mail | : webmaster@LCS-cert.com |
| Date of receipt of test sample | : April 25, 2015 |
| Number of tested samples | : 1 |
| Serial number | : 1S352338610700JBU000005 |
| Date of Test | : April 25, 2015 - May 21, 2015 |
| Date of Report | : June 25, 2015 |

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247): 2014****Report Reference No. : LCS1506110740E**

Date of Issue : June 25, 2015

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name..... : Qingdao Hisense Intelligent Commercial System Co., Ltd.**

Address : Bldg 3, 151 Zhuzhou Lu, Laoshan, Qingdao, China

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2014 / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Tablet POSTrade Mark..... : **Hisense**

Test Model : HM516

Ratings : DC 3.7V by li-ion polymer battery(8000mAh)
Recharged Voltage: DC 5V/2A**Result : Positive****Compiled by:**

Leo Lee/ File administrators

Supervised by:

Glin Lu/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

| | |
|---|---------------------------------------|
| Test Report No. : LCS1506110740E | <u>June 25, 2015</u> Date of issue |
|---|---------------------------------------|

| | |
|--------------------------|--|
| Test Model..... | : HM516 |
| EUT..... | : Tablet POS |
| Applicant..... | : Qingdao Hisense Intelligent Commercial System Co., Ltd. |
| Address..... | : Bldg 3, 151 Zhuzhou Lu, Laoshan, Qingdao, China |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... | : Qingdao Hisense Intelligent Commercial System Co., Ltd. |
| Address..... | : Bldg 3, 151 Zhuzhou Lu, Laoshan, Qingdao, China |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... | : Qingdao Hisense Intelligent Commercial System Co., Ltd. |
| Address..... | : Bldg 3, 151 Zhuzhou Lu, Laoshan, Qingdao, China |
| Telephone..... | : / |
| Fax..... | : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1 Description of Device (EUT)..... | 5 |
| 1.2 Support equipment List..... | 6 |
| 1.3 External I/O | 6 |
| 1.4 Description of Test Facility | 7 |
| 1.5 Statement of The Measurement Uncertainty | 7 |
| 1.6 Measurement Uncertainty | 7 |
| 1.7 Description Of Test Modes..... | 8 |
| 2. TEST METHODOLOGY | 9 |
| 2.1 EUT Configuration | 9 |
| 2.2 EUT Exercise | 9 |
| 2.3 General Test Procedures | 9 |
| 3. SYSTEM TEST CONFIGURATION..... | 10 |
| 3.1 Justification | 10 |
| 3.2 EUT Exercise Software | 10 |
| 3.3 Special Accessories | 10 |
| 3.4 Block Diagram/Schematics..... | 10 |
| 3.5 Equipment Modifications | 10 |
| 3.6 Test Setup | 10 |
| 4. SUMMARY OF TEST RESULTS | 11 |
| 5. ANTENNA PORT MEASUREMENT | 12 |
| 5.1 Conducted Peak Output Power | 12 |
| 5.2 Frequency Separation And 20 dB Bandwidth | 13 |
| 5.3 Number Of Hopping Frequency | 22 |
| 5.4 Time Of Occupancy (Dwell Time)..... | 24 |
| 5.5 Conducted Spurious Emissions and Band Edges Test..... | 27 |
| 6. RADIATED MEASUREMENT | 34 |
| 6.1 Block Diagram of Test Setup..... | 34 |
| 6.2 Radiated Emission Limit | 35 |
| 6.3 Instruments Setting | 36 |
| 6.4 Test Procedures..... | 37 |
| 6.5 Results for Radiated Emissions | 38 |
| 6.6 Results for Band edge Testing (Radiated) | 42 |
| 7. LINE CONDUCTED EMISSIONS..... | 43 |
| 7.1 Standard Applicable..... | 43 |
| 7.2 Block Diagram of Test Setup..... | 43 |
| 7.3 Test Results..... | 43 |
| 8. ANTENNA REQUIREMENT | 46 |
| 8.1 Standard Applicable..... | 46 |
| 8.2 Antenna Connected Construction | 46 |
| 9. LIST OF MEASURING EQUIPMENT | 47 |

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

| | |
|----------------------|---|
| EUT | : Tablet POS |
| Hardware Version | : VER.B |
| Software Version | : V0.8U.F511.HM516_WCDMA |
| Test Model | : HM516 |
| Power Supply | : DC 3.7V by li-ion polymer battery(8000mAh) Recharged Voltage: DC 5V/2A |
| EUT Support | : GSM/GPRS/EGPRS/WCDMA/HSUPA/HSDPA/WIFI/ |
| Radios Application | Bluetooth/NFC |
| Bluetooth Technology | : |
| Frequency Range | : 2402.00-2480.00MHz |
| Channel Number | : 79 channels |
| Channel Spacing | : 1MHz |
| Modulation Type | : GFSK, Pi/4-DQPSK, 8-DPSK |
| Bluetooth Version | : V3.0 |
| Antenna Description | : IFA Antenna, 2.3dBi(Max.) |

1.2 Support equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|---|-------------------------|--------------------|---------------|-------------|
| FSP GROUP INC. | Switching Power Adapter | FSP040-RHAN2 | -- | VOC |
| Qingdao Hisense Intelligent Commercial System Co., Ltd. | Docking Station | HM516 | | VOC |
| SHENZHEN HONOR ELECTRONIC CO.,LTD. | SWITCHING ADAPTER | ADS-10BA-06 05010G | -- | VOC |

1.3 External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|------------------|
| Micro-SD Card Slot | 1 | N/A |
| SIM Card Slot | 1 | N/A |
| IC Card Slot | 1 | N/A |
| USB Port | 1 | N/A |
| Headset Jack | 1 | N/A |
| Micro USB Port | 1 | 0.9m, unshielded |

1.4 Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

| Test Item | | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty | : | 9KHz~30MHz | 3.10dB | (1) |
| | | 30MHz~200MHz | 2.96dB | (1) |
| | | 200MHz~1000MHz | 3.10dB | (1) |
| | | 1GHz~26.5GHz | 3.80dB | (1) |
| | | 26.5GHz~40GHz | 3.90dB | (1) |
| Conduction Uncertainty | : | 150kHz~30MHz | 1.63dB | (1) |
| Power disturbance | : | 30MHz~300MHz | 1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s. An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using GFSK techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a $\pi/4$ -DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. The following operating modes were applied for the related test items. For radiated measurement, the test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position. All test modes were tested, only the result of the worst case was recorded in the report.

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| GFSK | 2402 | 1 |
| | 2441 | 1 |
| | 2480 | 1 |
| π /4 DQPSK | 2402 | 2 |
| | 2441 | 2 |
| | 2480 | 2 |
| 8-DPSK | 2402 | 3 |
| | 2441 | 3 |
| | 2480 | 3 |
| For Conducted Emission | | |
| Test Mode | TX Mode | |
| For Radiated Emission | | |
| Test Mode | TX Mode | |

There are three test configurations for the pre-testing:

Configuration 1: Stand-alone(Power supplied by build-in battery DC 3.7V)

Configuration 2: Configured with SWITCHING ADAPTER (Used For Charging)

Configuration 3: Configured with Switching Power Adapter and Docking Station (Used For Charging)

For pre-testing, when performed with the Configuration 2 and Configuration 3, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. We found that the Configuration 3(Input AC 120V/60Hz) was the worst case and used for the full test and recorded in this report.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX(3Mbps-Hopping Mode).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(3Mbps-High Channel).

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmit condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.


4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.247(b)(1) | Maximum Conducted Output Power | Compliant |
| §15.247(a)(1) | Frequency Separation And 20 dB Bandwidth | Compliant |
| §15.247(a)(1)(iii) | Number Of Hopping Frequency | Compliant |
| §15.247(a)(1)(iii) | Time Of Occupancy (Dwell Time) | Compliant |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205 | Emissions at Restricted Band | Compliant |
| §15.207(a) | Line Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |

5. ANTENNA PORT MEASUREMENT

5.1 Conducted Peak Output Power

5.1.1 Block Diagram of Test Setup

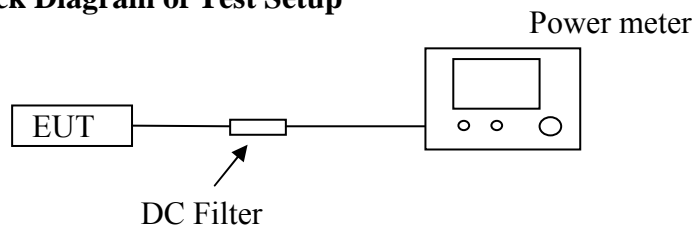

5.1.2 Limit

According to § 15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.1.3 Test Procedure

The transmitter output is connected to the Power Meter.

5.1.4 Test Results


| Channel | Frequency (MHz) | Output Power (dBm, Average) | Output Power (mW) | Limit (mW) | Result |
|---------------|-----------------|-----------------------------|-------------------|------------|--------|
| GFSK | 2402 | -4.54 | 0.35 | 125 | Pass |
| | 2441 | -4.34 | 0.37 | 125 | Pass |
| | 2480 | -4.25 | 0.38 | 125 | Pass |
| $\pi/4$ DQPSK | 2402 | -4.44 | 0.36 | 125 | Pass |
| | 2441 | -4.24 | 0.38 | 125 | Pass |
| | 2480 | -4.18 | 0.38 | 125 | Pass |
| 8-DPSK | 2402 | -4.48 | 0.36 | 125 | Pass |
| | 2441 | -4.23 | 0.38 | 125 | Pass |
| | 2480 | -4.16 | 0.38 | 125 | Pass |

5.2 Frequency Separation And 20 dB Bandwidth

5.2.1 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2.2 Block Diagram of Test Setup

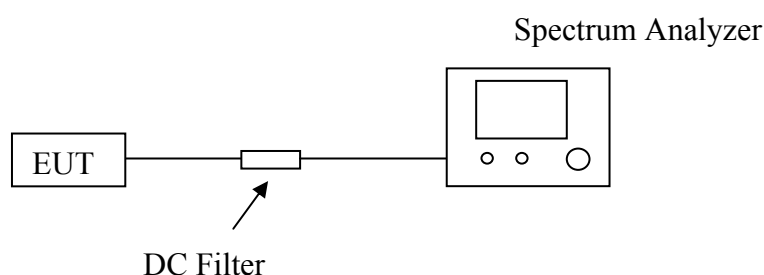

5.2.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set to the maximum power setting and enable the EUT transmit continuously.
- D. For carrier frequency separation measurement, use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW / RBW=100KHz / 100KHz; Sweep = auto; Detector function = peak;
Trace = max hold.
- E. For 20dB bandwidth measurement, use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW/VBW=30KHz / 100KHz; Sweep = auto; Detector function = peak;
Trace = max hold.

5.2.4 Test Results

| The Measurement Result With 1Mbps For GFSK Modulation | | | | |
|---|----------------------|--------------------------|-------------------------------|--------|
| Channel | 20dB Bandwidth (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
| Low | 1.032 | 1.000 | ≥ 25 KHz or 2/3 20 dB BW | Pass |
| Middle | 1.036 | | ≥ 25 KHz or 2/3 20 dB BW | Pass |
| High | 1.036 | | ≥ 25 KHz or 2/3 20 dB BW | Pass |


| The Measurement Result With 2Mbps For $\pi/4$ DQPSK Modulation | | | | |
|--|----------------------|--------------------------|-------------------------------|--------|
| Channel | 20dB Bandwidth (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
| Low | 1.257 | 1.000 | ≥ 25 KHz or 2/3 20 dB BW | Pass |
| Middle | 1.257 | | ≥ 25 KHz or 2/3 20 dB BW | Pass |
| High | 1.260 | | ≥ 25 KHz or 2/3 20 dB BW | Pass |

| The Measurement Result With 3Mbps For 8-DPSK Modulation | | | | |
|---|----------------------|--------------------------|-------------------------------|--------|
| Channel | 20dB Bandwidth (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
| Low | 1.223 | 1.000 | ≥ 25 KHz or 2/3 20 dB BW | Pass |
| Middle | 1.222 | | ≥ 25 KHz or 2/3 20 dB BW | Pass |
| High | 1.222 | | ≥ 25 KHz or 2/3 20 dB BW | Pass |

The test data refer to the following page.

For Frequency Separation Measurement, the Low, Mid and High channels were performed and only recorded the worst test plots for Low in this report.

The Worst Test Plot Of Frequency Separation (1Mbps)

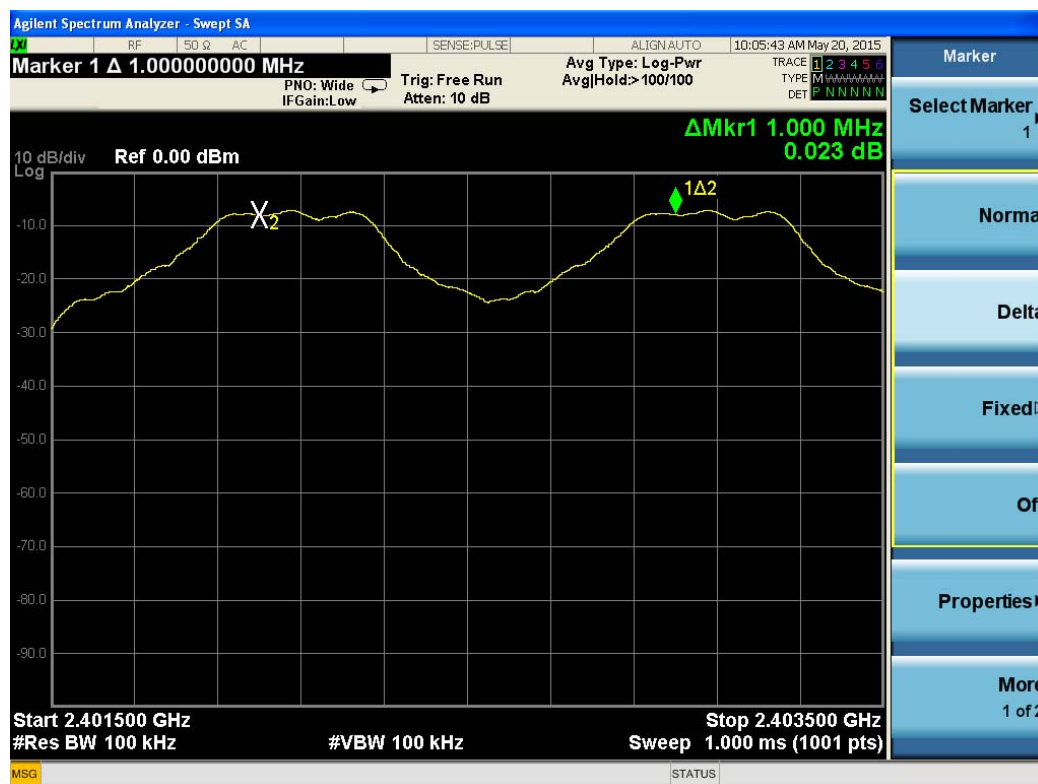

Test Plot Of Frequency Separation (2Mbps)



Test Plot Of Frequency Separation (3Mbps)


Measurement of 20dB Bandwidth

Test frequency: 2402MHz(1Mbps)




Test frequency: 2441MHz(1Mbps)

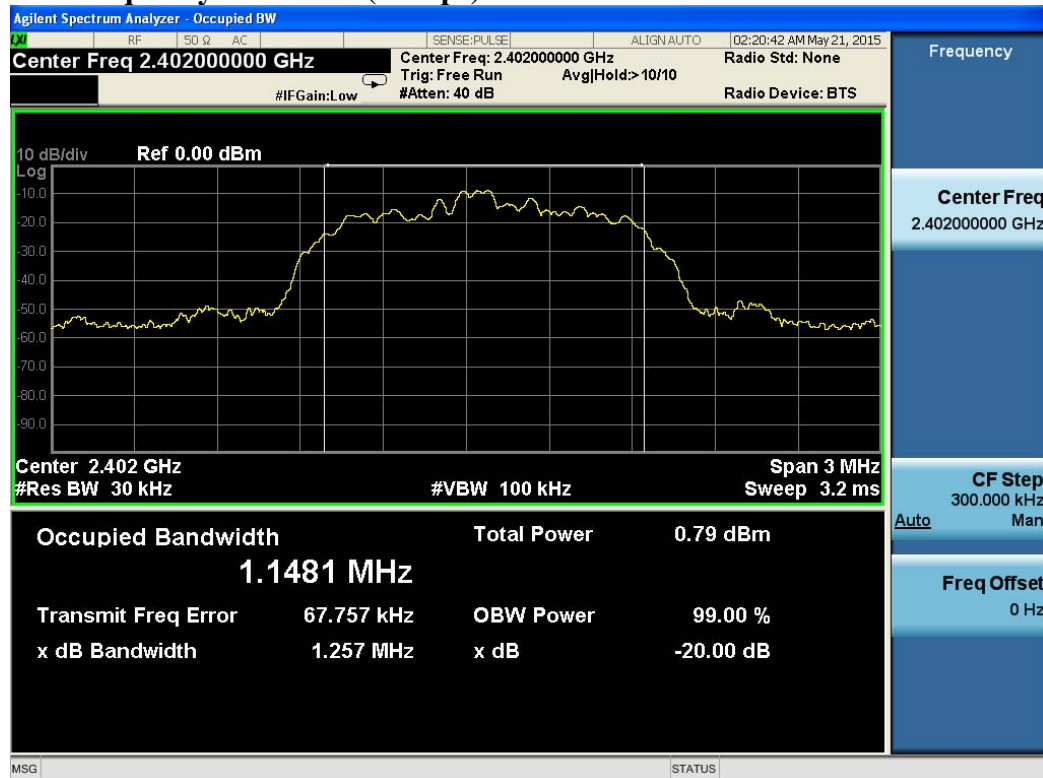

Test frequency: 2480MHz(1Mbps)**Test frequency: 2402MHz(2Mbps)**

Test frequency: 2441MHz(2Mbps)**Test frequency: 2480MHz(2Mbps)**

Test frequency: 2402MHz(3Mbps)**Test frequency: 2441MHz(3Mbps)**

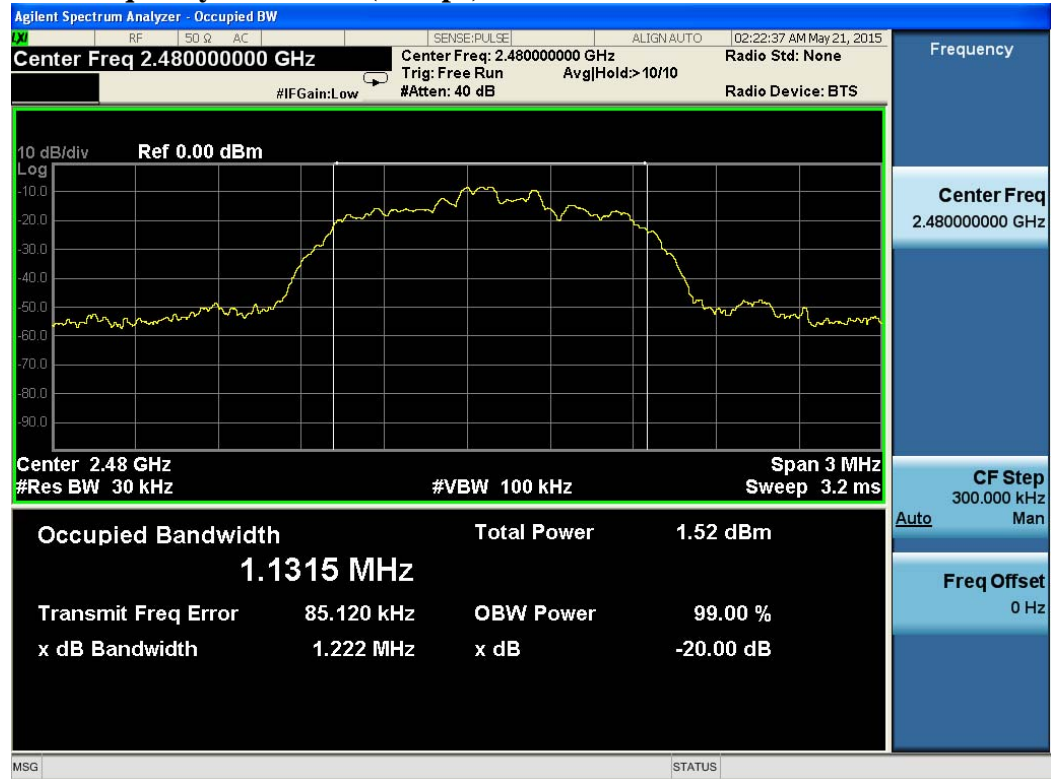
Test frequency: 2480MHz(3Mbps)

5.3 Number Of Hopping Frequency

5.3.1 Limit

According to §15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.3.2 Block Diagram of Test Setup

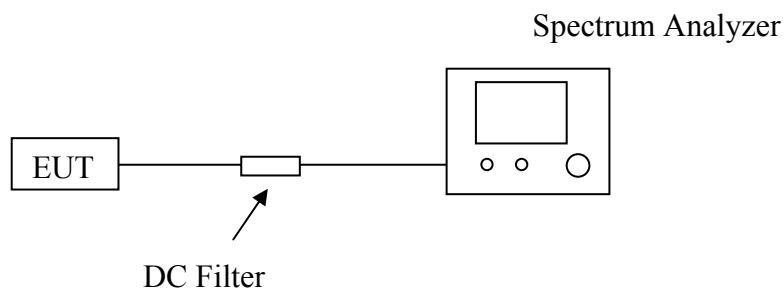


5.3.3 Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- Set the Spectrum Analyzer as RBW, VBW=1MHz.
- Max hold, view and count how many channel in the band.

5.3.4 Test Results

| Test Mode | Measurement Result (No. of Ch) | Limit (No. of Ch) | Result |
|--------------------------|-----------------------------------|----------------------|--------|
| Hopping(GFSK) | 79 | ≥ 15 | Pass |
| Hopping($\pi/4$ -DQPSK) | 79 | ≥ 15 | Pass |
| Hopping(8-DPSK) | 79 | ≥ 15 | Pass |

The worst test data refer to the following page.

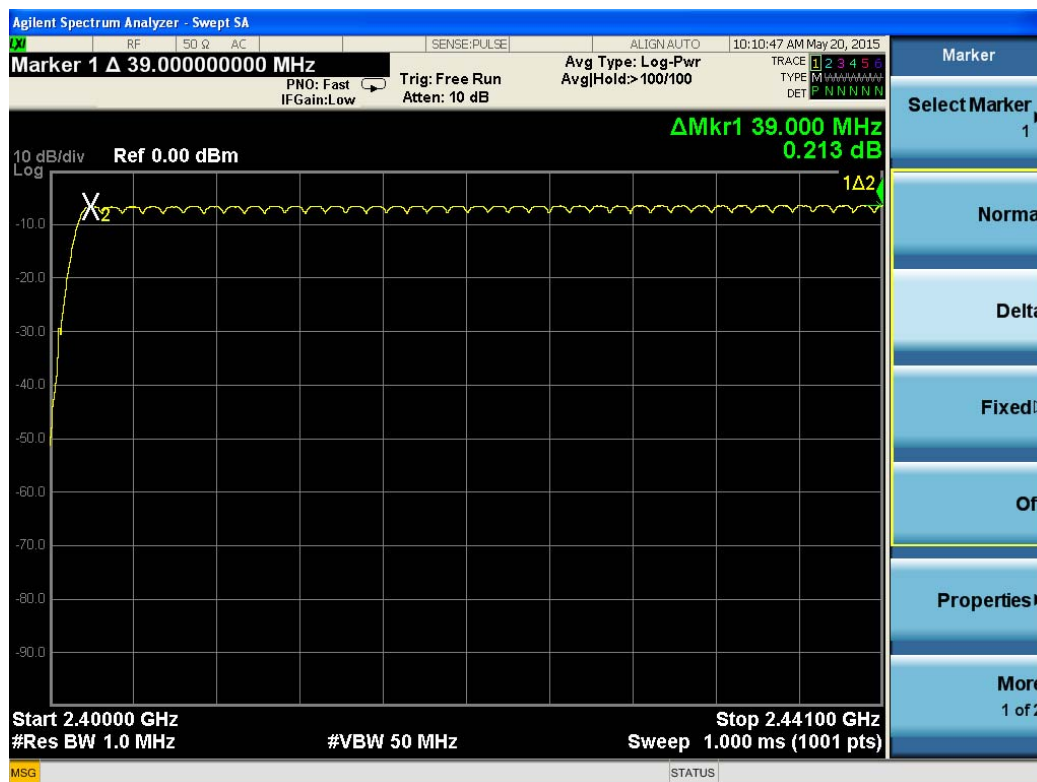
Test Plot For Number of Hopping Channel(GFSK)

5.4 Time Of Occupancy (Dwell Time)

5.4.1 Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

5.4.2 Block Diagram of Test Setup

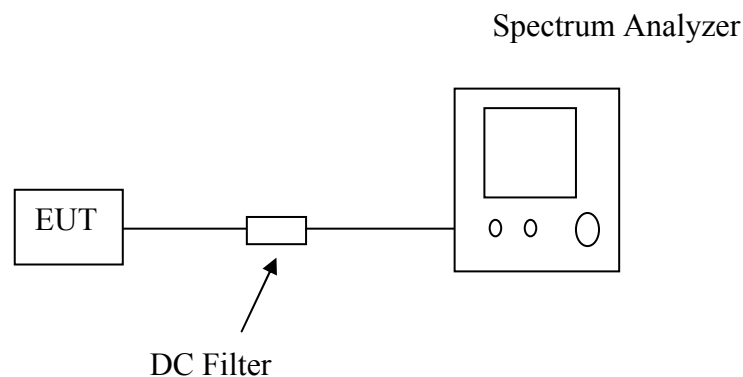

5.4.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

5.4.4 Test Results

| The Measurement Result With The Worst Case of 3Mbps For 8-DPSK Modulation | | | | |
|---|----------------------------|-----------------|-----------------|------------|
| Channel | Time of Pulse for DH5 (ms) | Period Time (s) | Sweep Time (ms) | Limit (ms) |
| Low | 2.882 | 31.6 | 307.41 | 400 |
| Middle | 2.883 | 31.6 | 307.52 | 400 |
| High | 2.885 | 31.6 | 307.73 | 400 |

Low Channel

$$2.882 * (1600/6) / 79 * 31.6 = 307.41 \text{ ms}$$

Middle Channel


$$2.883 * (1600/6) / 79 * 31.6 = 307.52 \text{ ms}$$

High Channel


$$2.885 * (1600/6) / 79 * 31.6 = 307.73 \text{ ms}$$

The test data refer to the following:


Low Channel

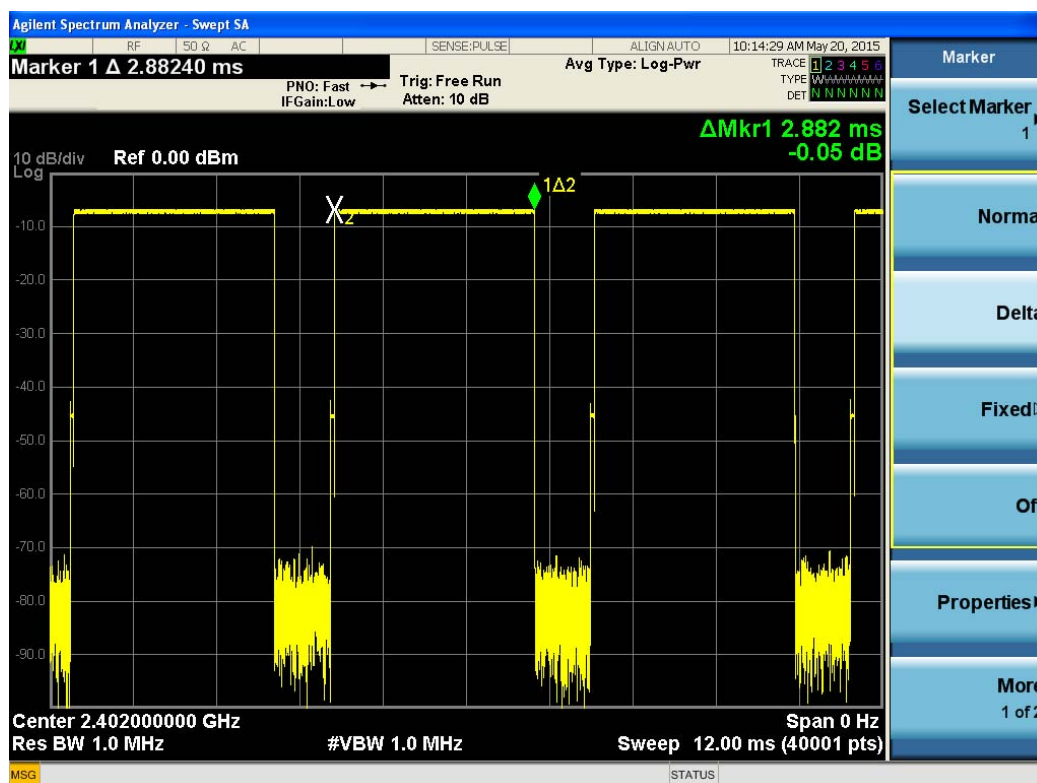

Middle Channel

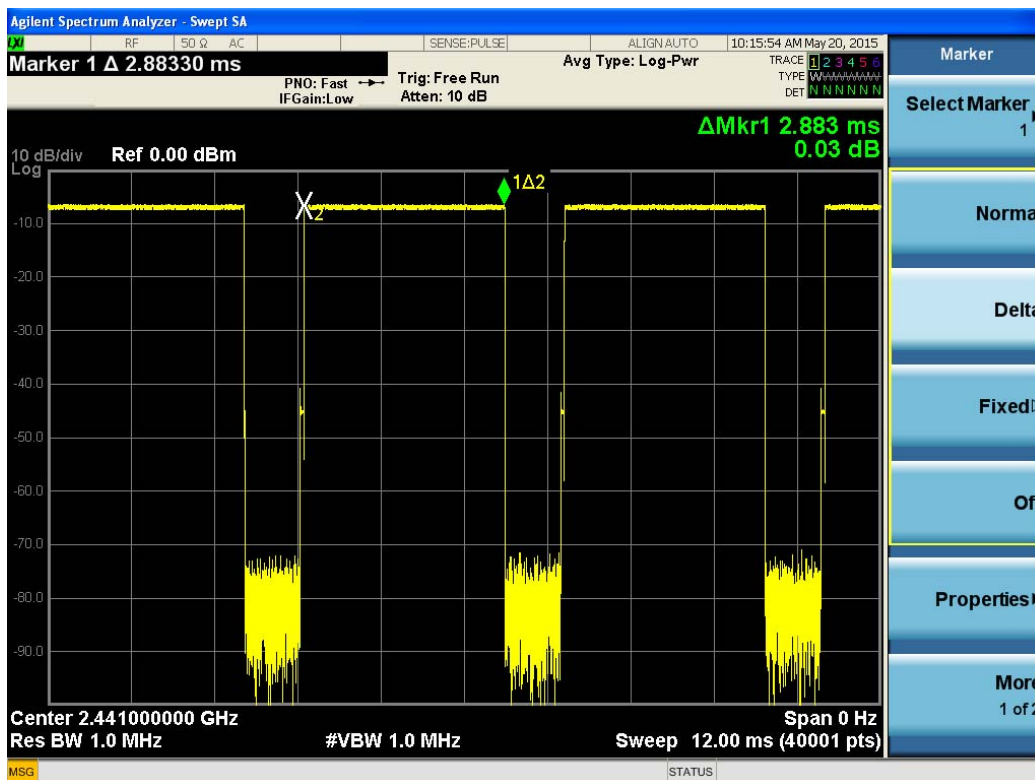

High Channel

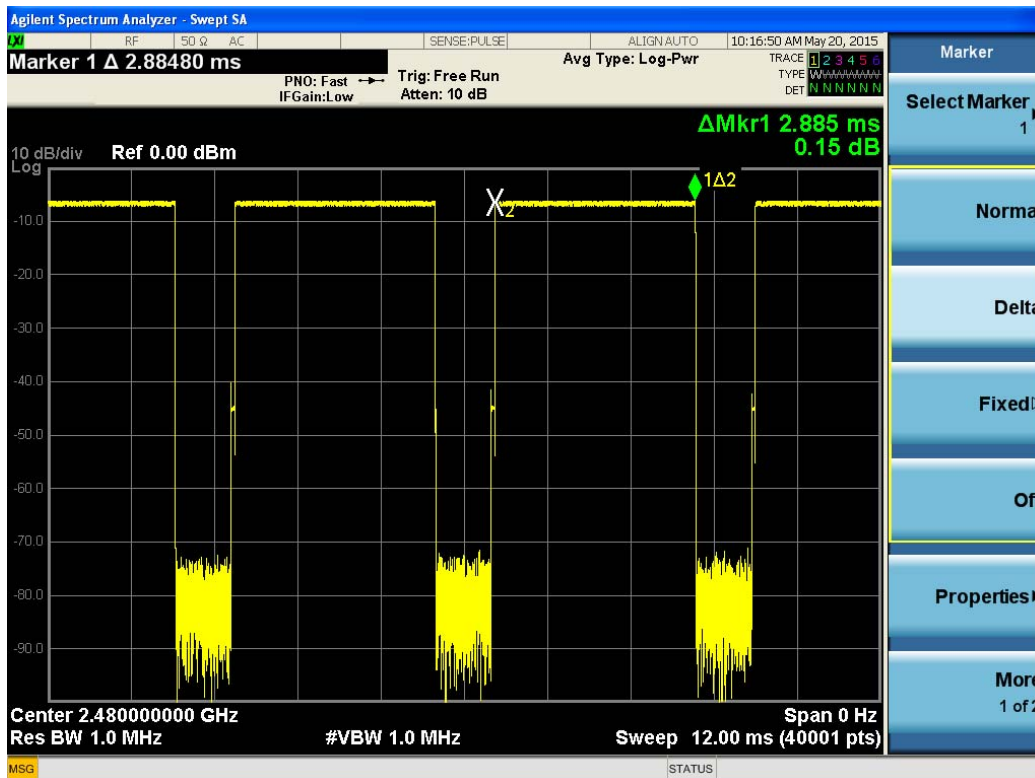


5.5 Conducted Spurious Emissions and Band Edges Test

5.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.5.2 Block Diagram of Test Setup

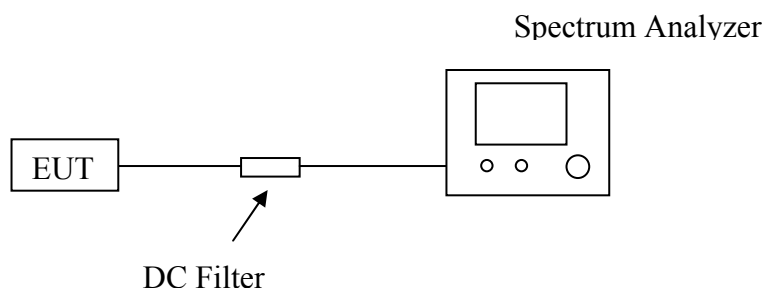

5.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.


Measurements are made over the 9kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

5.5.4 Test Results of Conducted Spurious Emissions


No non-compliance noted. Only record the worst test result (TX-8-DPSK) in this report. The test data refer to the following page.


Test Plot

9KHz-26.5GHz Low Channel(8-DPSK)


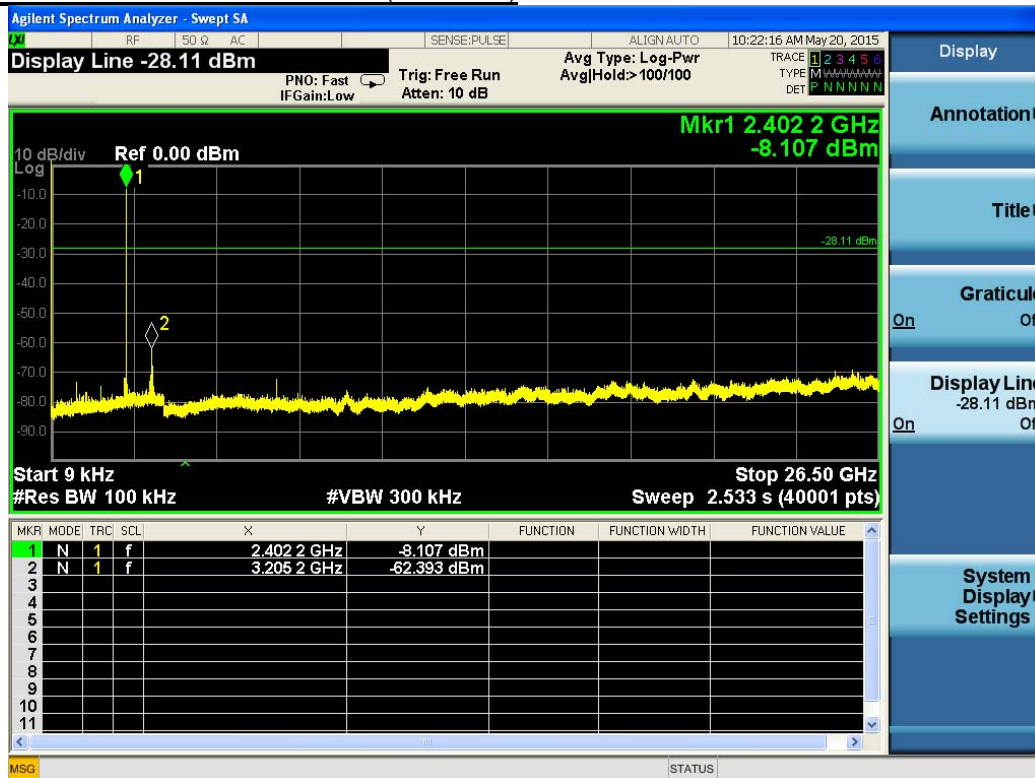


9KHz-26.5GHz Middle Channel(8-DPSK)


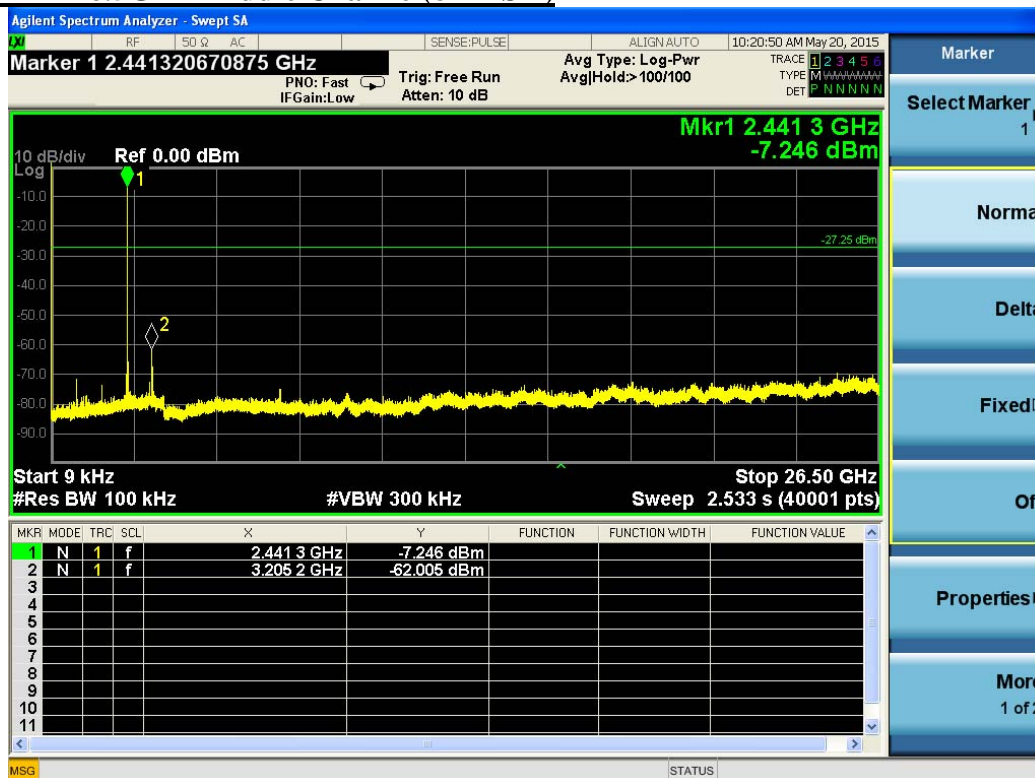


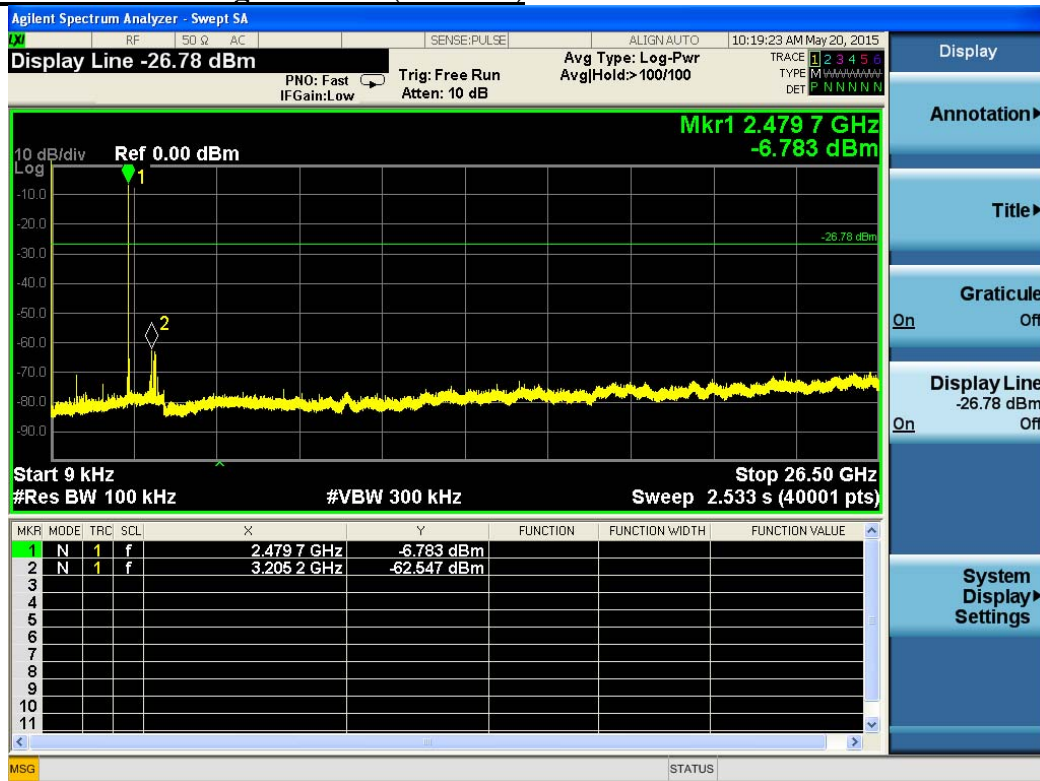9KHz-26.5GHz High Channel(8-DPSK)



Hopping Off - (GFSK)

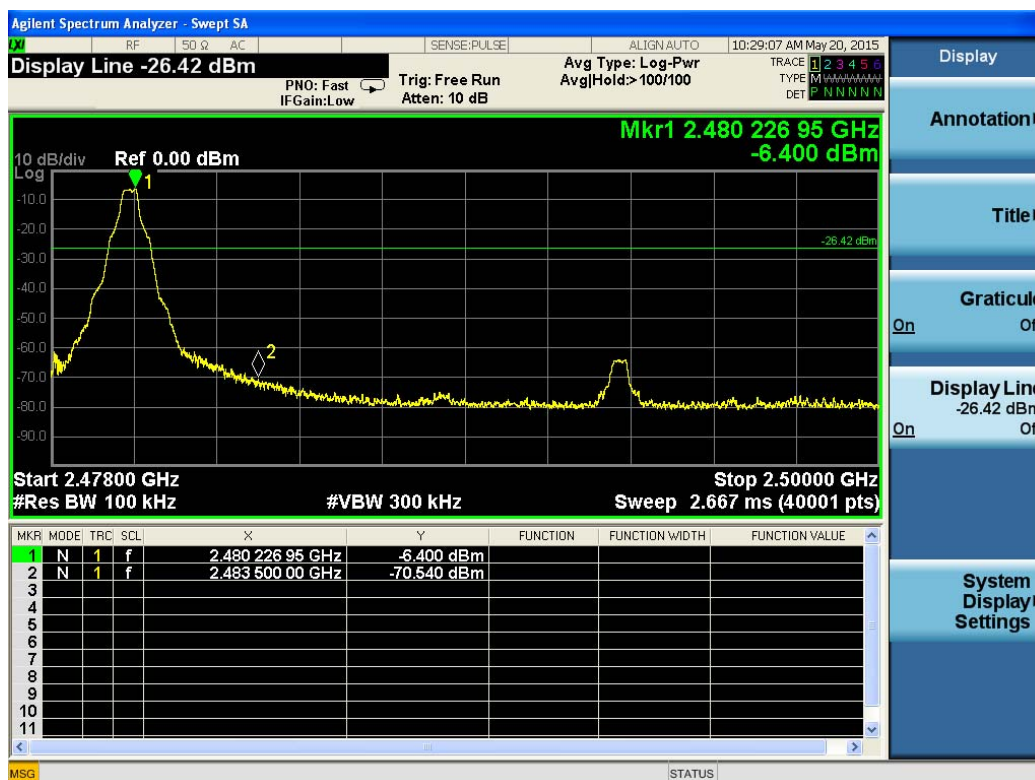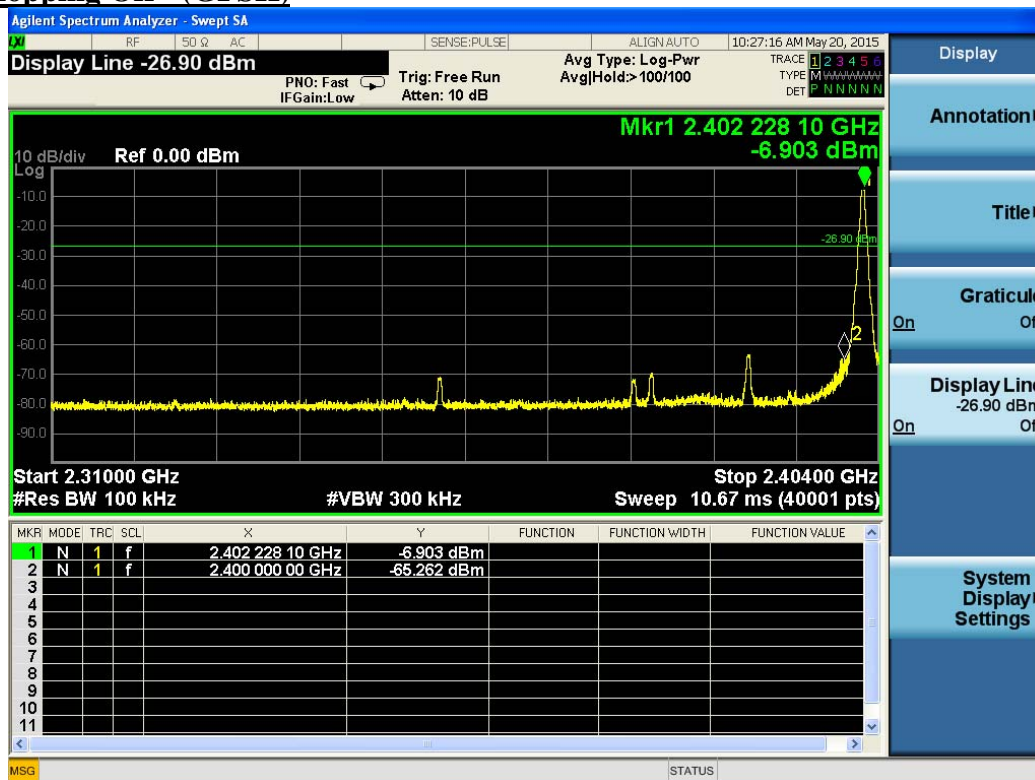

Hopping On - (8-DPSK)

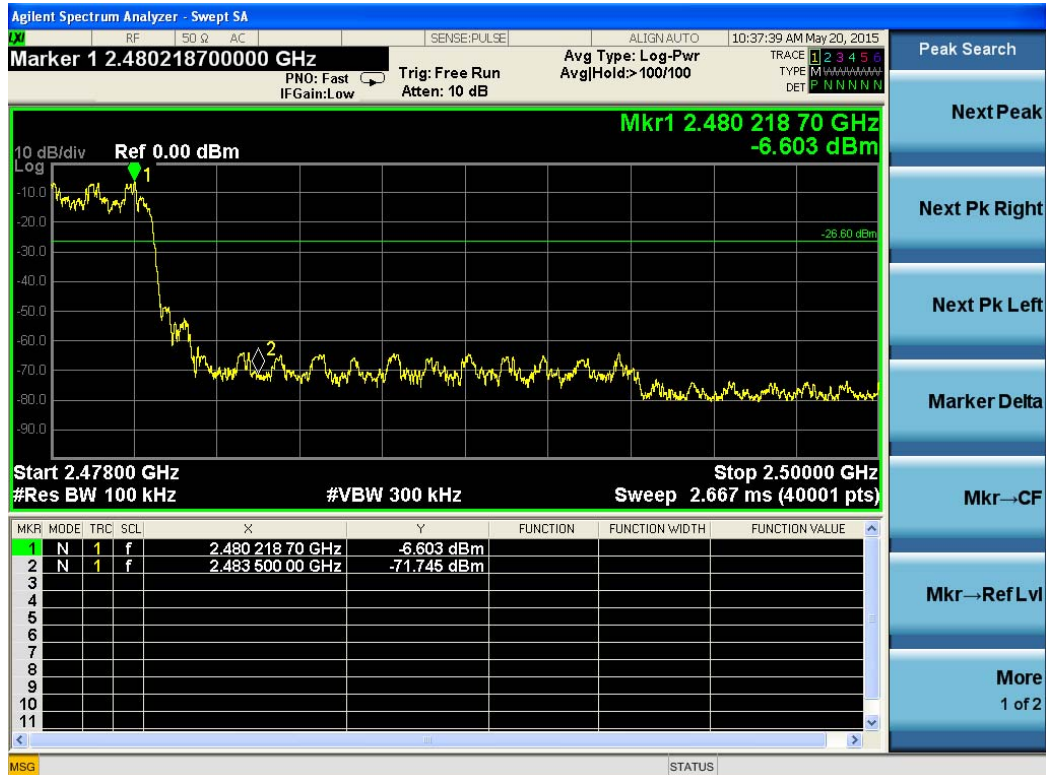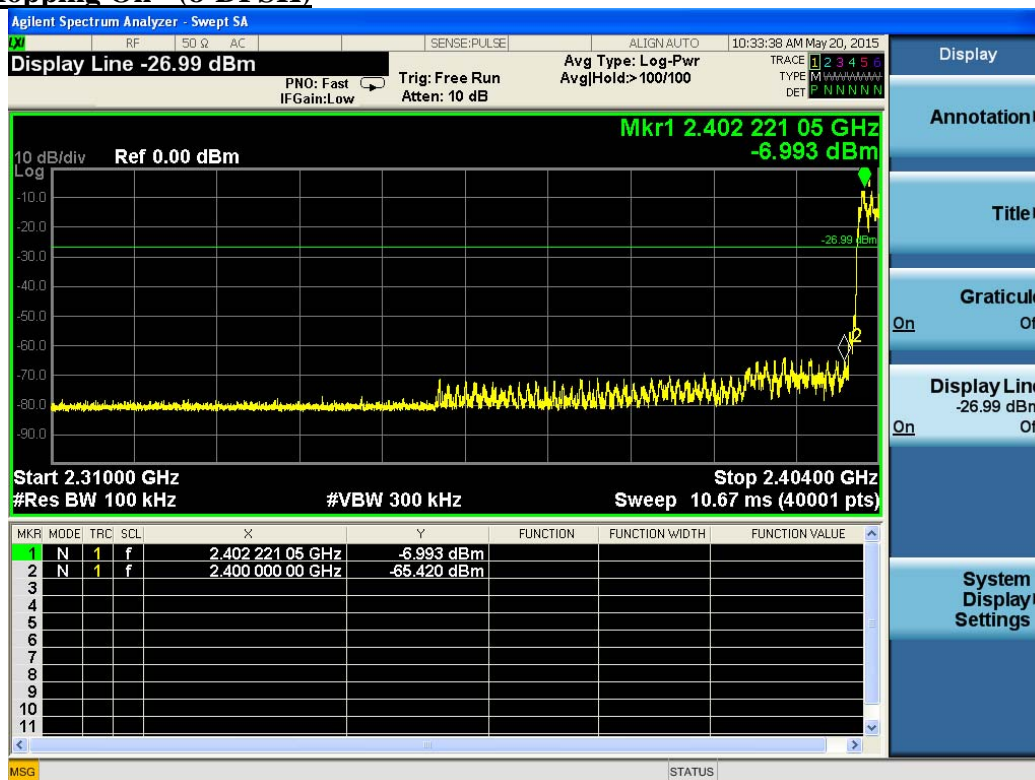


Hopping Off - (8-DPSK)

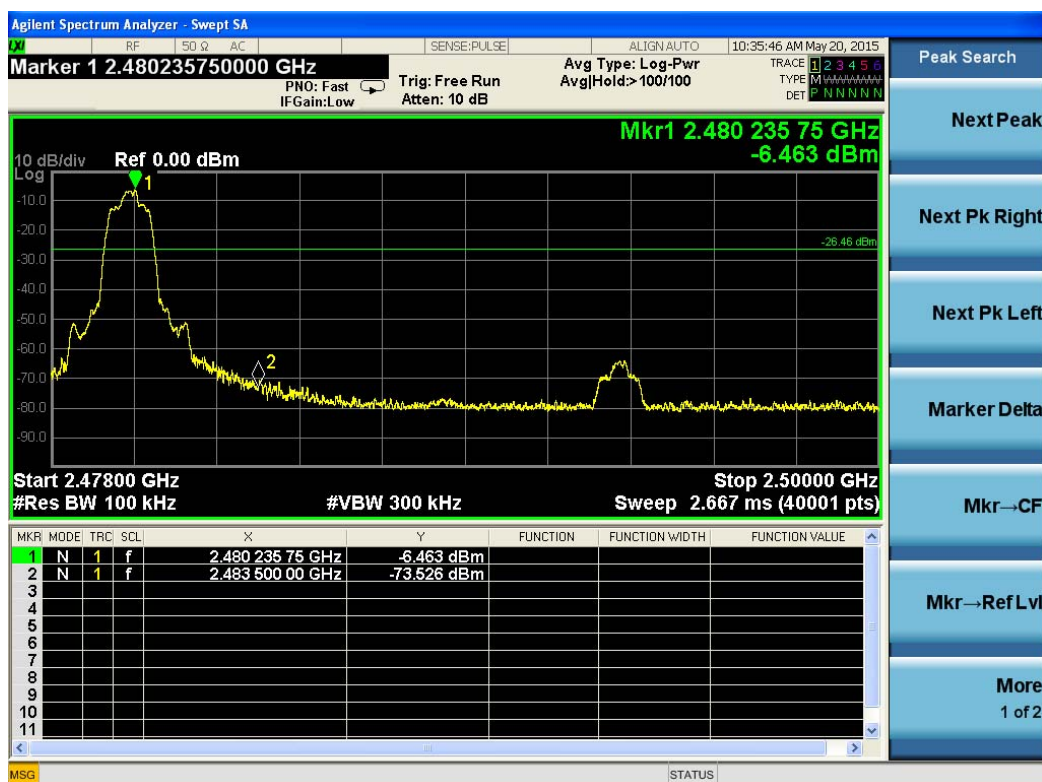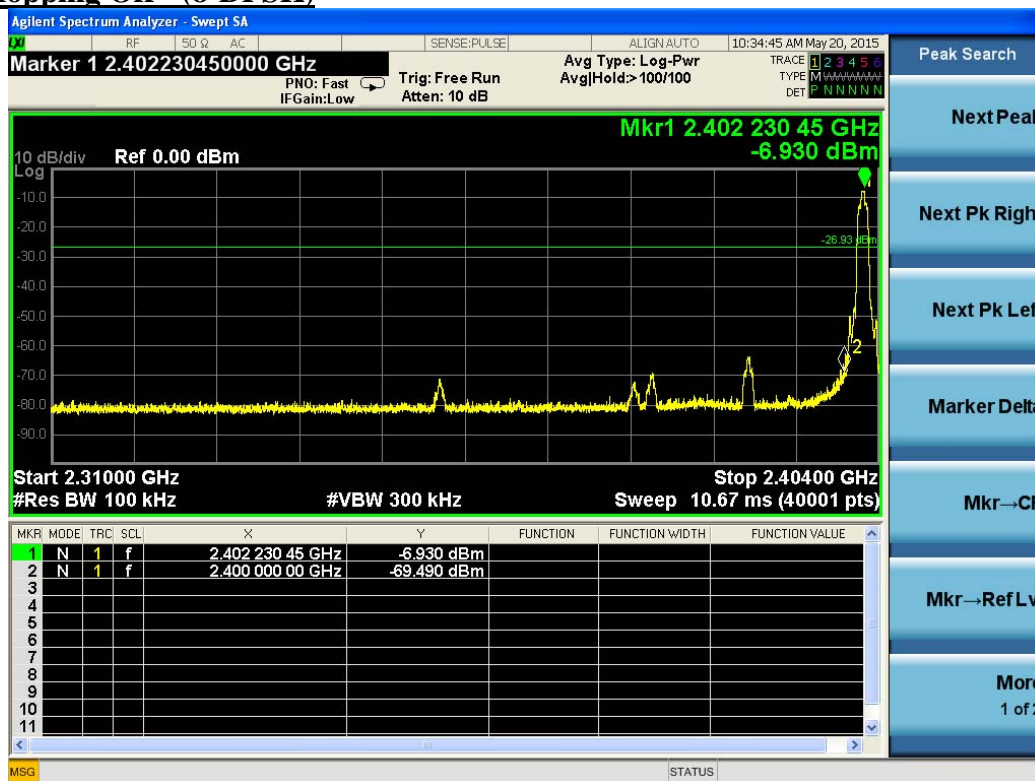


6. RADIATED MEASUREMENT


6.1 Block Diagram of Test Setup

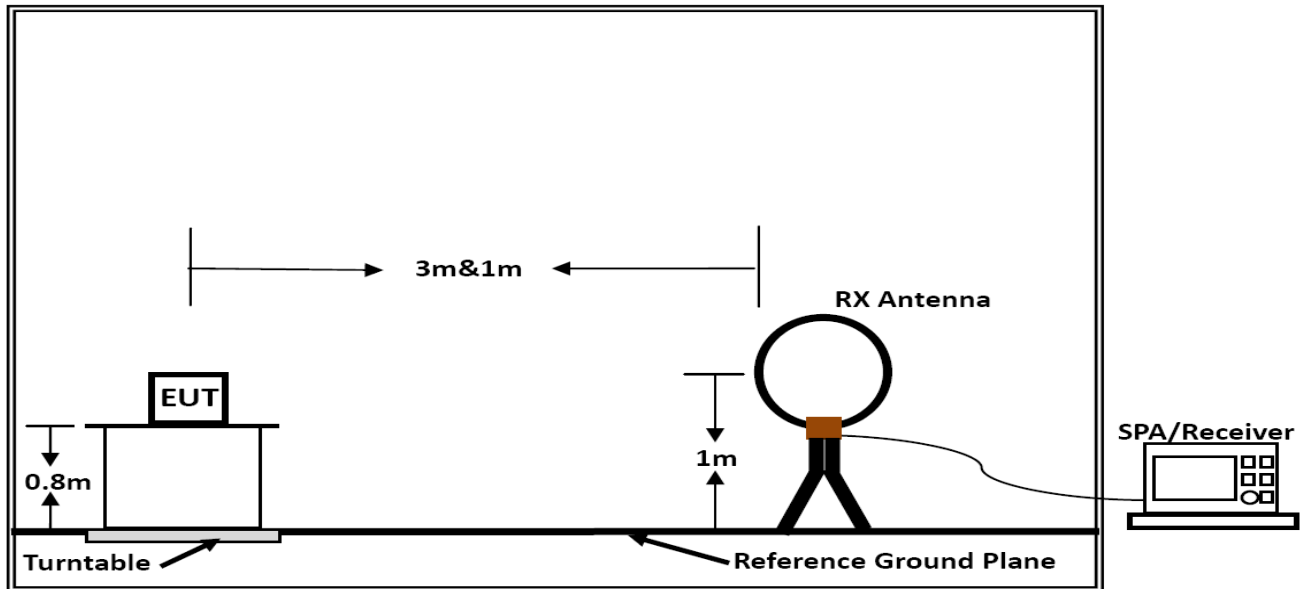

Below 30MHz

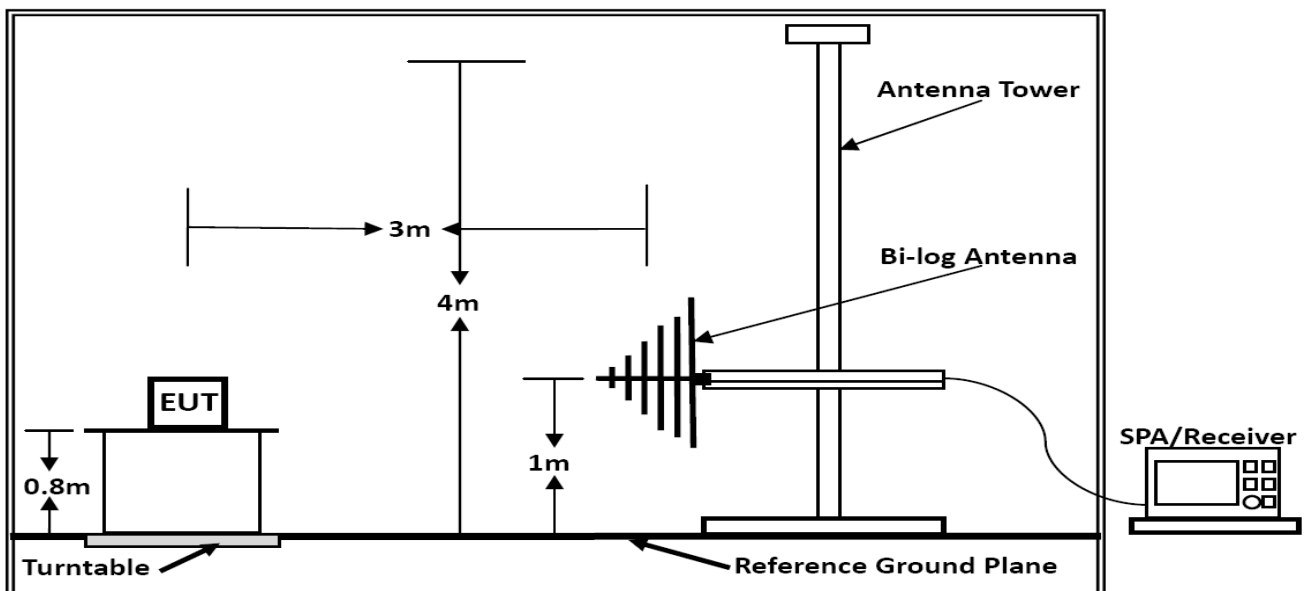

Below 1GHz

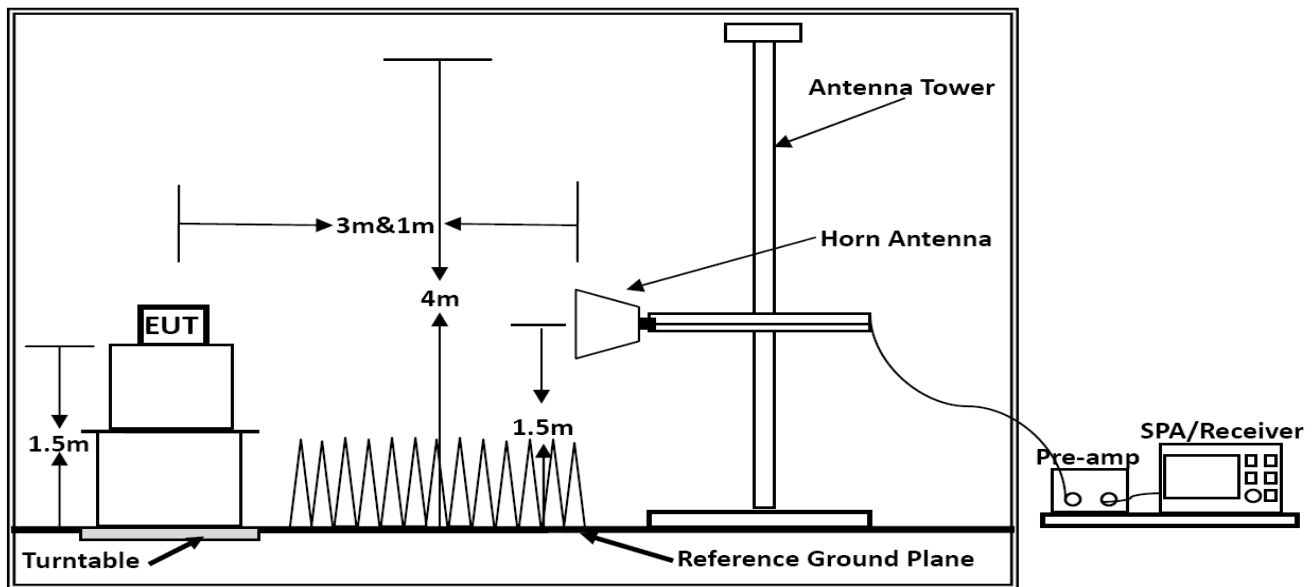

Above 1GHz

6.2 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (\2\) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in

Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30–88 | 100** | 3 |
| 88–216 | 150** | 3 |
| 216–960 | 200** | 3 |
| Above 960 | 500 | 3 |

6.3 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP |

6.4 Test Procedures

- 1) Configure the EUT according to ANSI C63.10: 2013. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2) Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3) The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4) For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
- 5) Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6) For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7) When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8) If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9) For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emission sat the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10) In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

6.5 Results for Radiated Emissions

PASS.


Only record the worst test result in this report.

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

The test data please refer to following page:

Below 1GHz


The Worst Test Result For Configuration 2(Input AC 120V/60Hz): Configured with SWITCHING ADAPTER (Used For Charging)

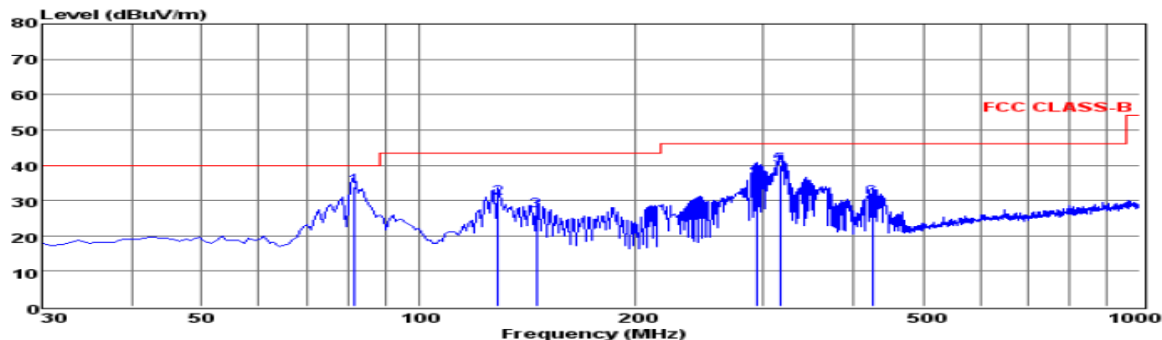

Env./Ins: 24°C/56%
EUT: Tablet POS
M/N: HM516
Power Rating: AC 120V/60Hz
Test Mode: TX-High Channel (3Mbps)
Operator: Leo
Memo: With DC 5V Adapter
pol: HORIZONTAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 81.41 | 24.07 | 0.65 | 9.04 | 33.76 | 40.00 | -6.24 | QP |
| 2 | 128.94 | 20.89 | 0.67 | 9.09 | 30.65 | 43.50 | -12.85 | QP |
| 3 | 145.43 | 18.13 | 0.77 | 8.23 | 27.13 | 43.50 | -16.37 | QP |
| 4 | 293.84 | 23.06 | 1.08 | 12.94 | 37.08 | 46.00 | -8.92 | QP |
| 5 | 317.12 | 25.65 | 1.01 | 13.29 | 39.95 | 46.00 | -6.05 | QP |
| 6 | 425.76 | 14.06 | 1.16 | 15.50 | 30.72 | 46.00 | -15.28 | QP |

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20dB below the official limit are not reported

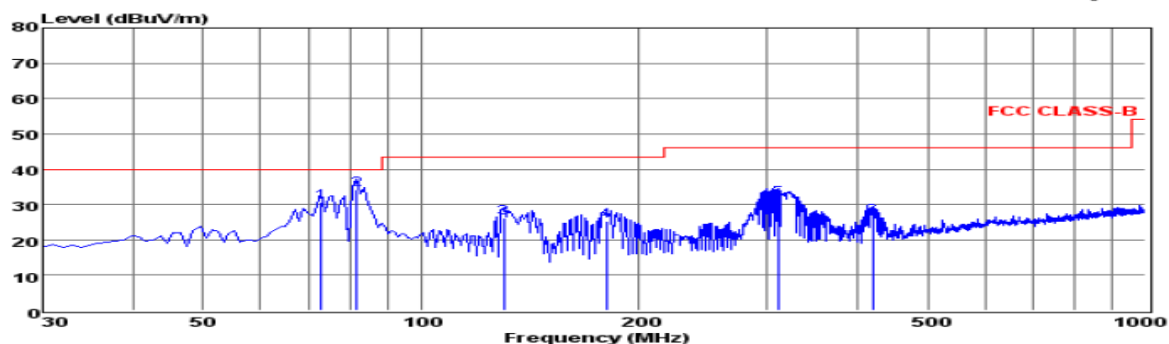

Env./Ins: 24°C/56%
EUT: Tablet POS
M/N: HM516
Power Rating: AC 120V/60Hz
Test Mode: TX-High Channel (3Mbps)
Operator: Leo
Memo: With DC 5V Adapter
pol: VERTICAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 72.68 | 21.88 | 0.55 | 8.19 | 30.62 | 40.00 | -9.38 | QP |
| 2 | 81.41 | 24.39 | 0.65 | 9.04 | 34.08 | 40.00 | -5.92 | QP |
| 3 | 129.91 | 16.34 | 0.76 | 8.94 | 26.04 | 43.50 | -17.46 | QP |
| 4 | 180.35 | 14.78 | 0.89 | 9.71 | 25.38 | 43.50 | -18.12 | QP |
| 5 | 311.30 | 17.27 | 1.09 | 13.21 | 31.57 | 46.00 | -14.43 | QP |
| 6 | 419.94 | 9.60 | 1.32 | 15.47 | 26.39 | 46.00 | -19.61 | QP |

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20dB below the official limit are not reported


***Note:

Pre-scan all mode and recorded the worst case results in this report (TX(3Mbps-High Channel)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


The Worst Test Result For Configuration 3(Input AC 120V/60Hz): Configured with Switching Power Adapter and Docking Station (Used For Charging)

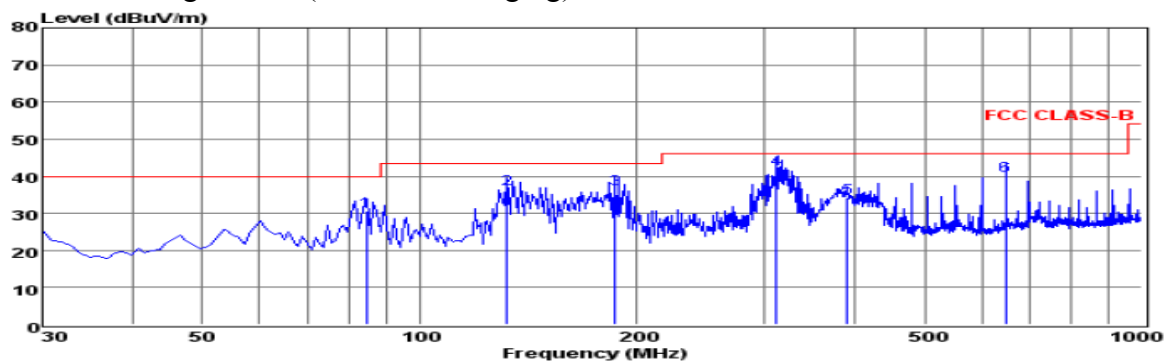

Env./Ins: 24°C/56%
 EUT: Tablet POS
 M/N: HM516
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High Channel(3Mbps)
 Operator: Leo
 Memo: With DC 12V Adapter & Docking Station
 pol: VERTICAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 84.32 | 20.15 | 0.54 | 10.07 | 30.76 | 40.00 | -9.24 | QP |
| 2 | 131.85 | 27.05 | 0.76 | 8.79 | 36.60 | 43.50 | -6.90 | QP |
| 3 | 186.17 | 25.52 | 0.98 | 10.22 | 36.72 | 43.50 | -6.78 | QP |
| 4 | 312.27 | 27.58 | 1.09 | 13.23 | 41.90 | 46.00 | -4.10 | QP |
| 5 | 390.84 | 18.30 | 1.17 | 14.84 | 34.31 | 46.00 | -11.69 | QP |
| 6 | 647.89 | 20.12 | 1.54 | 18.62 | 40.28 | 46.00 | -5.72 | QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20dB below the official limit are not reported

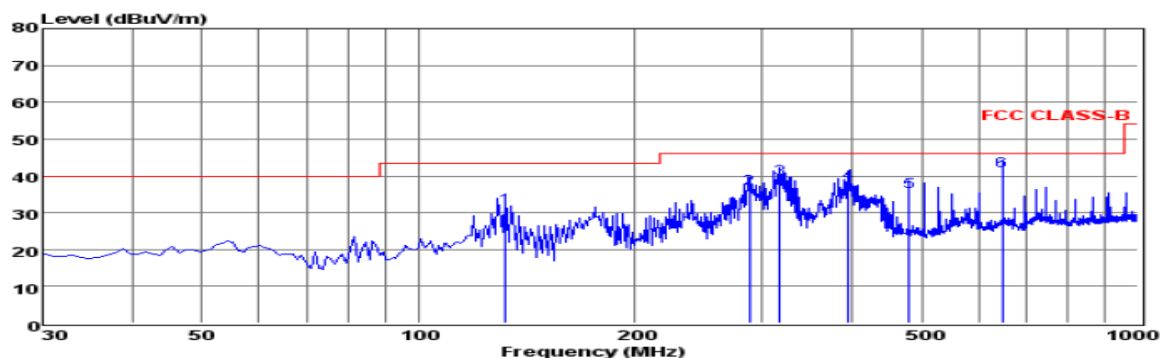

Env./Ins: 24°C/56%
 EUT: Tablet POS
 M/N: HM516
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High Channel(3Mbps)
 Operator: Leo
 Memo: With DC 12V Adapter & Docking Station
 pol: HORIZONTAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 131.85 | 21.88 | 0.76 | 8.79 | 31.43 | 43.50 | -12.07 | QP |
| 2 | 288.02 | 22.74 | 1.05 | 12.83 | 36.62 | 46.00 | -9.38 | QP |
| 3 | 318.09 | 24.86 | 1.01 | 13.30 | 39.17 | 46.00 | -6.83 | QP |
| 4 | 395.69 | 21.79 | 1.30 | 14.96 | 38.05 | 46.00 | -7.95 | QP |
| 5 | 480.08 | 18.35 | 1.31 | 16.07 | 35.73 | 46.00 | -10.27 | QP |
| 6 | 647.89 | 21.06 | 1.54 | 18.62 | 41.22 | 46.00 | -4.78 | QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20dB below the official limit are not reported

***Note:

Pre-scan all mode and recorded the worst case results in this report (TX(3Mbps-High Channel)).

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Above 1GHz

Note: Only recorded the worst test result for the worst test configuration(Configuration 3(Input AC 120V/60Hz)).

The worst test result for 8-DPSK, Tx-Low Channel:

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 3205.20 | 51.41 | 32.97 | 35.01 | 3.91 | 53.28 | 74 | -20.72 | Peak | Horizontal |
| 3205.23 | 41.56 | 32.97 | 35.01 | 3.91 | 43.43 | 54 | -10.57 | Average | Horizontal |
| 4804.11 | 42.86 | 33.06 | 35.04 | 3.94 | 44.82 | 74 | -29.18 | Peak | Horizontal |
| 4804.13 | 33.01 | 33.06 | 35.04 | 3.94 | 34.97 | 54 | -19.03 | Average | Horizontal |
| 3205.20 | 52.63 | 32.97 | 35.01 | 3.91 | 54.50 | 74 | -19.50 | Peak | Vertical |
| 3205.23 | 42.85 | 32.97 | 35.01 | 3.91 | 44.72 | 54 | -9.28 | Average | Vertical |
| 4804.11 | 43.69 | 33.06 | 35.04 | 3.94 | 45.65 | 74 | -28.35 | Peak | Vertical |
| 4804.13 | 33.84 | 33.06 | 35.04 | 3.94 | 35.80 | 54 | -18.20 | Average | Vertical |

The worst test result for 8-DPSK, Tx-Middle Channel:

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 3205.20 | 50.87 | 32.97 | 35.01 | 3.91 | 52.74 | 74 | -21.26 | Peak | Horizontal |
| 3205.23 | 41.06 | 32.97 | 35.01 | 3.91 | 42.93 | 54 | -11.07 | Average | Horizontal |
| 4882.17 | 43.11 | 33.16 | 35.15 | 3.96 | 45.08 | 74 | -28.92 | Peak | Horizontal |
| 4882.19 | 33.34 | 33.16 | 35.15 | 3.96 | 35.31 | 54 | -18.69 | Average | Horizontal |
| 3205.20 | 51.72 | 32.97 | 35.01 | 3.91 | 53.59 | 74 | -20.41 | Peak | Vertical |
| 3205.23 | 41.89 | 32.97 | 35.01 | 3.91 | 43.76 | 54 | -10.24 | Average | Vertical |
| 4882.17 | 43.56 | 33.16 | 35.15 | 3.96 | 45.53 | 74 | -28.47 | Peak | Vertical |
| 4882.19 | 31.68 | 33.16 | 35.15 | 3.96 | 33.65 | 54 | -20.35 | Average | Vertical |

The worst test result for 8-DPSK, Tx-High Channel:

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 3205.20 | 51.66 | 32.97 | 35.01 | 3.91 | 53.53 | 74 | -20.47 | Peak | Horizontal |
| 3205.23 | 41.79 | 32.97 | 35.01 | 3.91 | 43.66 | 54 | -10.34 | Average | Horizontal |
| 4960.24 | 43.71 | 33.26 | 35.14 | 3.98 | 45.81 | 74 | -28.19 | Peak | Horizontal |
| 4960.26 | 33.86 | 33.26 | 35.14 | 3.98 | 35.96 | 54 | -18.04 | Average | Horizontal |
| 3205.20 | 53.11 | 32.97 | 35.01 | 3.91 | 54.98 | 74 | -19.02 | Peak | Vertical |
| 3205.23 | 42.89 | 32.97 | 35.01 | 3.91 | 44.76 | 54 | -9.24 | Average | Vertical |
| 4960.23 | 45.24 | 33.26 | 35.14 | 3.98 | 47.34 | 74 | -26.66 | Peak | Vertical |
| 4960.26 | 35.75 | 33.26 | 35.14 | 3.98 | 37.85 | 54 | -16.15 | Average | Vertical |

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. 18~25GHz at least have 20dB margin. No recording in the test report.

6.6 Results for Band edge Testing (Radiated)

Note: Only recorded the worst test result for the worst test configuration(Configuration 3(Input AC 120V/60Hz)).

Tx-2402, 8-DPSK, Non-hopping

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 2377.41 | 43.87 | 32.89 | 35.16 | 3.51 | 43.87 | 74 | -28.89 | Peak | Horizontal |
| 2377.43 | 34.13 | 32.90 | 35.16 | 3.51 | 34.13 | 54 | -18.62 | Average | Horizontal |
| 2390.00 | 44.04 | 32.92 | 35.16 | 3.54 | 44.04 | 74 | -28.66 | Peak | Horizontal |
| 2389.97 | 34.18 | 32.92 | 35.16 | 3.54 | 34.18 | 54 | -18.52 | Average | Horizontal |
| 2400.00 | 47.64 | 32.92 | 35.16 | 3.54 | 48.94 | 74 | -25.06 | Peak | Horizontal |
| 2399.97 | 37.75 | 32.92 | 35.16 | 3.54 | 39.05 | 54 | -14.95 | Average | Horizontal |
| 2374.41 | 44.25 | 32.89 | 35.16 | 3.51 | 44.25 | 74 | -28.51 | Peak | Vertical |
| 2374.43 | 34.37 | 32.90 | 35.16 | 3.51 | 34.37 | 54 | -18.38 | Average | Vertical |
| 2390.00 | 44.61 | 32.92 | 35.16 | 3.54 | 44.61 | 74 | -28.09 | Peak | Vertical |
| 2389.97 | 34.87 | 32.92 | 35.16 | 3.54 | 34.87 | 54 | -17.83 | Average | Vertical |
| 2400.00 | 47.61 | 32.92 | 35.16 | 3.54 | 48.91 | 74 | -25.09 | Peak | Vertical |
| 2399.97 | 37.85 | 32.92 | 35.16 | 3.54 | 39.15 | 54 | -14.85 | Average | Vertical |

Tx-2480, 8-DPSK, Non-hopping

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 2483.50 | 44.19 | 33.06 | 35.18 | 3.60 | 45.67 | 74 | -28.33 | Peak | Horizontal |
| 2483.53 | 35.42 | 33.08 | 35.18 | 3.60 | 36.92 | 54 | -17.08 | Average | Horizontal |
| 2487.44 | 43.39 | 33.08 | 35.18 | 3.62 | 44.91 | 74 | -29.09 | Peak | Horizontal |
| 2487.47 | 33.95 | 33.08 | 35.18 | 3.62 | 35.47 | 54 | -18.53 | Average | Horizontal |
| 2483.50 | 44.78 | 33.06 | 35.18 | 3.60 | 46.26 | 74 | -27.74 | Peak | Vertical |
| 2483.53 | 35.53 | 33.08 | 35.18 | 3.60 | 37.03 | 54 | -16.97 | Average | Vertical |
| 2487.44 | 45.38 | 33.08 | 35.18 | 3.62 | 46.90 | 74 | -27.10 | Peak | Vertical |
| 2487.47 | 36.01 | 33.08 | 35.18 | 3.62 | 37.53 | 54 | -16.47 | Average | Vertical |


7. LINE CONDUCTED EMISSIONS

7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range(MHz) | Limits (dB μ V) | |
|----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

7.2 Block Diagram of Test Setup

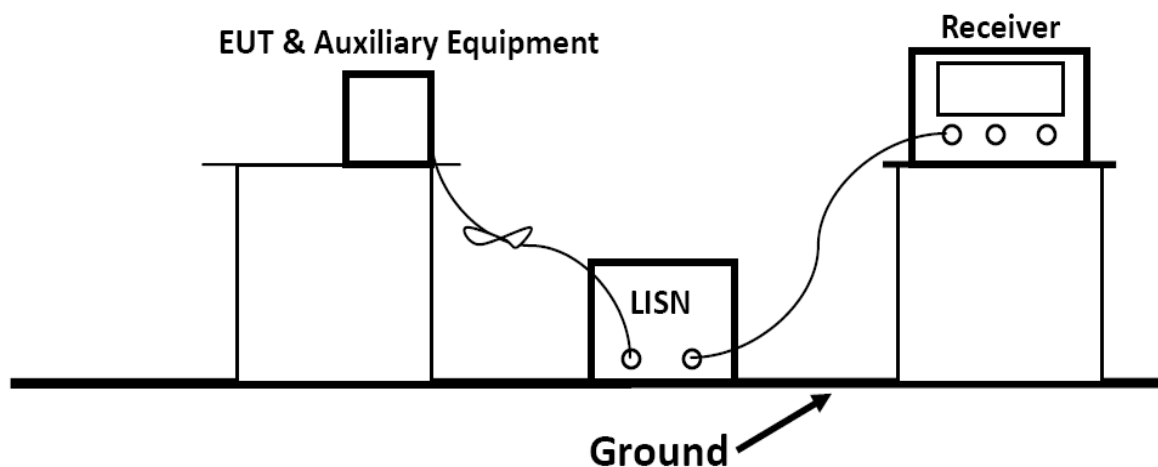


7.3 Test Results

PASS.

The test data please refer to following page.


The Worst Test Result For Configuration 2(Input AC 120V/60Hz): Configured with SWITCHING ADAPTER (Used For Charging)

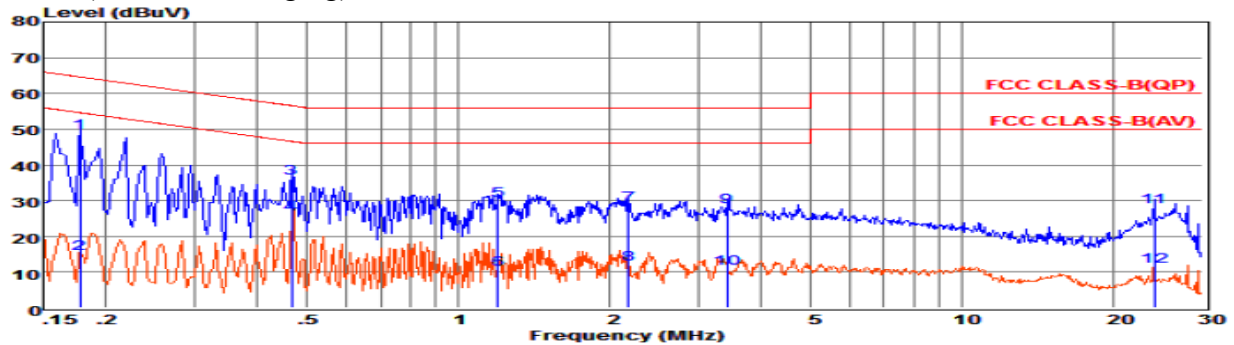

Env. Ins: 24*/56%
 EUT: Tablet POS
 M/N: HMS16
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High Channel (3Mbps)
 Operator: Leo
 Memo: With DC 5V Adapter
 Pol: LINE

| Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|------------|---------|---------|--------|-----------|----------|-------|--------|---------|
| MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 0.17772 | 29.37 | 9.61 | 0.02 | 10.00 | 49.00 | 64.59 | -15.59 | QP |
| 2 0.17782 | -4.32 | 9.61 | 0.02 | 10.00 | 15.31 | 54.59 | -39.28 | Average |
| 3 0.46614 | 16.74 | 9.62 | 0.04 | 10.00 | 36.40 | 56.58 | -20.18 | QP |
| 4 0.46714 | 6.42 | 9.62 | 0.04 | 10.00 | 26.08 | 46.56 | -20.48 | Average |
| 5 1.19700 | 10.26 | 9.63 | 0.05 | 10.00 | 29.94 | 56.00 | -26.06 | QP |
| 6 1.19800 | -8.85 | 9.63 | 0.05 | 10.00 | 10.83 | 46.00 | -35.17 | Average |
| 7 2.17827 | 9.09 | 9.64 | 0.05 | 10.00 | 28.78 | 56.00 | -27.22 | QP |
| 8 2.17927 | -7.48 | 9.64 | 0.05 | 10.00 | 12.21 | 46.00 | -33.79 | Average |
| 9 3.41743 | 8.54 | 9.65 | 0.06 | 10.00 | 28.25 | 56.00 | -27.75 | QP |
| 10 3.41843 | -8.73 | 9.65 | 0.06 | 10.00 | 10.98 | 46.00 | -35.02 | Average |
| 1124.01475 | 8.50 | 9.71 | 0.13 | 10.00 | 28.34 | 60.00 | -31.66 | QP |
| 1224.01575 | -8.10 | 9.71 | 0.13 | 10.00 | 11.74 | 50.00 | -38.26 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

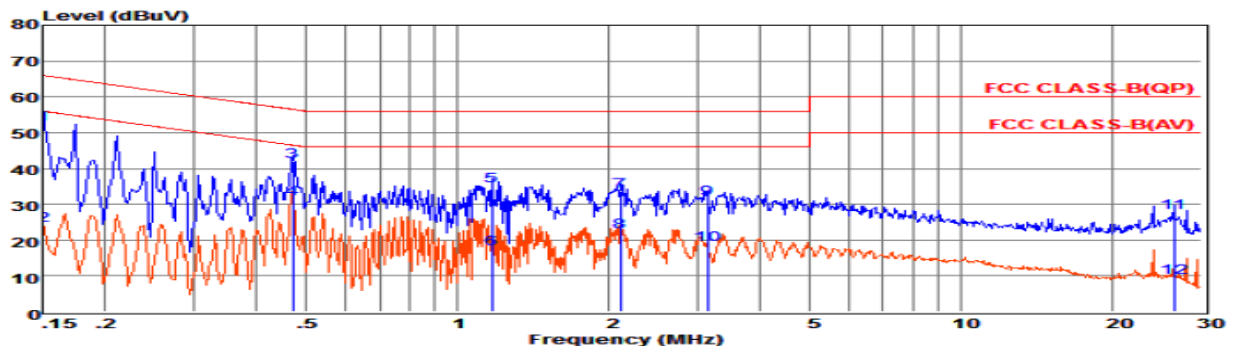


Env. Ins: 24*/56%
 EUT: Tablet POS
 M/N: HMS16
 Power Rating: AC 120V/60Hz
 Test Mode: TX-High Channel (3Mbps)
 Operator: Leo
 Memo: With DC 5V Adapter
 Pol: NEUTRAL

| Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|------------|---------|---------|--------|-----------|----------|-------|--------|---------|
| MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 0.15000 | 32.75 | 9.70 | 0.02 | 10.00 | 52.47 | 66.00 | -13.53 | QP |
| 2 0.15010 | 4.22 | 9.70 | 0.02 | 10.00 | 23.94 | 55.99 | -32.05 | Average |
| 3 0.47110 | 22.15 | 9.62 | 0.04 | 10.00 | 41.81 | 56.49 | -14.68 | QP |
| 4 0.47120 | 11.89 | 9.62 | 0.04 | 10.00 | 31.55 | 46.49 | -14.94 | Average |
| 5 1.17190 | 15.43 | 9.63 | 0.05 | 10.00 | 35.11 | 56.00 | -20.89 | QP |
| 6 1.17290 | -2.21 | 9.63 | 0.05 | 10.00 | 17.47 | 46.00 | -28.53 | Average |
| 7 2.11011 | 14.07 | 9.63 | 0.05 | 10.00 | 33.75 | 56.00 | -22.25 | QP |
| 8 2.11111 | 2.57 | 9.63 | 0.05 | 10.00 | 22.25 | 46.00 | -23.75 | Average |
| 9 3.13966 | 11.97 | 9.64 | 0.06 | 10.00 | 31.67 | 56.00 | -24.33 | QP |
| 10 3.14066 | -1.05 | 9.64 | 0.06 | 10.00 | 18.65 | 46.00 | -27.35 | Average |
| 1126.41779 | 7.75 | 9.83 | 0.13 | 10.00 | 27.71 | 60.00 | -32.29 | QP |
| 1226.41879 | -10.30 | 9.83 | 0.13 | 10.00 | 9.66 | 50.00 | -40.34 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.


The Worst Test Result For Configuration 3(Input AC 120V/60Hz): Configured with Switching Power Adapter and Docking Station (Used For Charging)

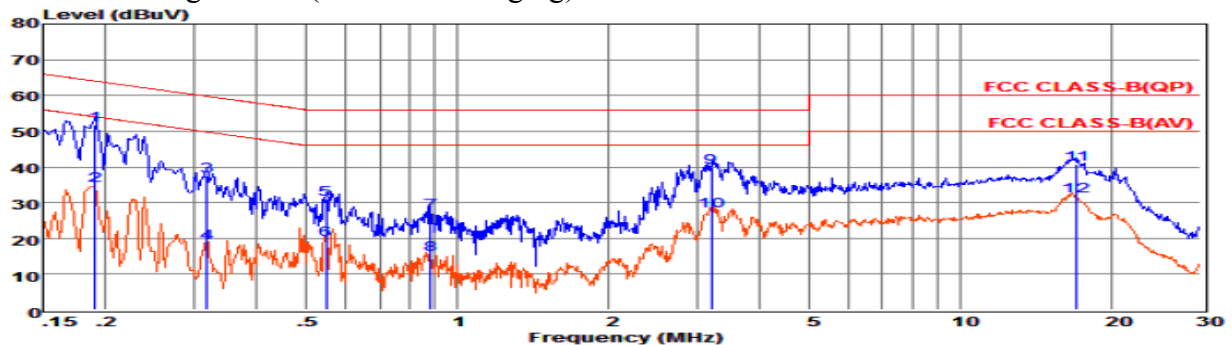

Env. Ins: 24*/56%
EUT: Tablet POS
M/N: HM516
Power Rating: AC 120V/60Hz
Test Mode: TX-High Channel (3Mbps)
Operator: Leo
Memo: With DC 12V Adapter & Docking Station
Pol: NEUTRAL

| | Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|----|----------|---------|---------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.19039 | 32.06 | 9.61 | 0.02 | 10.00 | 51.69 | 64.02 | -12.33 | QP |
| 2 | 0.19049 | 15.04 | 9.61 | 0.02 | 10.00 | 34.67 | 54.02 | -19.35 | Average |
| 3 | 0.31830 | 17.78 | 9.61 | 0.03 | 10.00 | 37.42 | 59.75 | -22.33 | QP |
| 4 | 0.31840 | -0.89 | 9.61 | 0.03 | 10.00 | 18.75 | 49.75 | -31.00 | Average |
| 5 | 0.54934 | 11.29 | 9.62 | 0.04 | 10.00 | 30.95 | 56.00 | -25.05 | QP |
| 6 | 0.54944 | 0.07 | 9.62 | 0.04 | 10.00 | 19.73 | 46.00 | -26.27 | Average |
| 7 | 0.88499 | 7.65 | 9.63 | 0.04 | 10.00 | 27.32 | 56.00 | -28.68 | QP |
| 8 | 0.88509 | -4.26 | 9.63 | 0.04 | 10.00 | 15.41 | 46.00 | -30.59 | Average |
| 9 | 3.18996 | 20.01 | 9.65 | 0.06 | 10.00 | 39.72 | 56.00 | -16.28 | QP |
| 10 | 3.19096 | 7.95 | 9.65 | 0.06 | 10.00 | 27.66 | 46.00 | -18.34 | Average |
| 11 | 17.01810 | 20.78 | 9.76 | 0.11 | 10.00 | 40.65 | 60.00 | -19.35 | QP |
| 12 | 17.01910 | 11.89 | 9.76 | 0.11 | 10.00 | 31.76 | 50.00 | -18.24 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

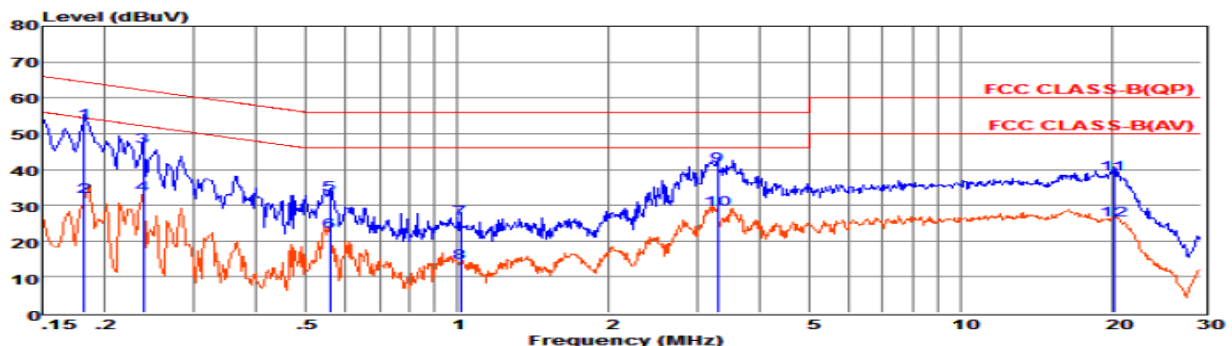

Env. Ins: 24*/56%
EUT: Tablet POS
M/N: HM516
Power Rating: AC 120V/60Hz
Test Mode: TX-High Channel (3Mbps)
Operator: Leo
Memo: With DC 12V Adapter & Docking Station
Pol: LINE

| | Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|----|----------|---------|---------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.18152 | 33.58 | 9.61 | 0.02 | 10.00 | 53.21 | 64.42 | -11.21 | QP |
| 2 | 0.18162 | 12.89 | 9.61 | 0.02 | 10.00 | 32.52 | 54.41 | -21.89 | Average |
| 3 | 0.23784 | 26.73 | 9.63 | 0.03 | 10.00 | 46.39 | 62.17 | -15.78 | QP |
| 4 | 0.23794 | 13.31 | 9.63 | 0.03 | 10.00 | 32.97 | 62.17 | -29.20 | QP |
| 5 | 0.55814 | 13.22 | 9.63 | 0.04 | 10.00 | 32.89 | 56.00 | -23.11 | QP |
| 6 | 0.55824 | 2.79 | 9.63 | 0.04 | 10.00 | 22.46 | 46.00 | -23.54 | Average |
| 7 | 1.01569 | 6.37 | 9.63 | 0.05 | 10.00 | 26.05 | 56.00 | -29.95 | QP |
| 8 | 1.01669 | -5.61 | 9.63 | 0.05 | 10.00 | 14.07 | 46.00 | -31.93 | Average |
| 9 | 3.29300 | 21.25 | 9.65 | 0.06 | 10.00 | 40.96 | 56.00 | -15.04 | QP |
| 10 | 3.29400 | 9.13 | 9.65 | 0.06 | 10.00 | 28.84 | 46.00 | -17.16 | Average |
| 11 | 17.05594 | 18.76 | 9.76 | 0.12 | 10.00 | 38.64 | 60.00 | -21.36 | QP |
| 12 | 17.05694 | 6.00 | 9.76 | 0.12 | 10.00 | 25.88 | 50.00 | -24.12 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.2 Antenna Connected Construction

8.2.1. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

8.2.2. Results: Compliance.

9. LIST OF MEASURING EQUIPMENT

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Cal Date | Due Date |
|--------------------------|----------------|----------------------------------|-------------|-----------------|---------------|---------------|
| EMC Receiver | R&S | ESCS 30 | 100174 | 9kHz – 2.75GHz | June 18,2014 | June 17,2015 |
| Signal analyzer | Agilent | E4448A(External mixers to 40GHz) | US44300469 | 9kHz~40GHz | July 16,2014 | July 15,2015 |
| LISN | MESS Tec | NNB-2/16Z | 99079 | 9KHz-30MHz | June 18,2014 | June 17,2015 |
| LISN (Support Unit) | EMCO | 3819/2NM | 9703-1839 | 9KHz-30MHz | June 18,2014 | June 17,2015 |
| RF Cable-CON | UTIFLEX | 3102-26886-4 | CB049 | 9KHz-30MHz | June 18,2014 | June 17,2015 |
| ISN | SCHAFFNER | ISN ST08 | 21653 | 9KHz-30MHz | June 18,2014 | June 17,2015 |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30M-1GHz 3m | June 18,2014 | June 17,2015 |
| Amplifier | SCHAFFNER | COA9231A | 18667 | 9kHz-2GHz | June 18,2014 | June 17,2015 |
| Amplifier | Agilent | 8449B | 3008A02120 | 1GHz-26.5GHz | July 16,2014 | July 15,2015 |
| Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 26.5GHz-40GHz | July 16,2014 | July 15,2015 |
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | 9k-26.5GHz | July 16,2014 | July 15,2015 |
| MAX Signal Analyzer | Agilent | N9020A | MY50510140 | 20Hz~26.5GHz | Oct. 27, 2014 | Oct. 26, 2015 |
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9k-30MHz | June 18,2014 | June 17,2015 |
| By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 30MHz-1GHz | June 10,2014 | June 09,2015 |
| Horn Antenna | EMCO | 3115 | 6741 | 1GHz-18GHz | June 10,2014 | June 09,2015 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 15GHz-40GHz | June 10,2014 | June 09,2015 |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz-1GHz | June 18,2014 | June 17,2015 |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 1GHz-40GHz | June 18,2014 | June 17,2015 |
| Power Meter | R&S | NRVS | 100444 | DC-40GHz | June 18,2014 | June 17,2015 |
| Power Sensor | R&S | NRV-Z51 | 100458 | DC-30GHz | June 18,2014 | June 17,2015 |
| Power Sensor | R&S | NRV-Z32 | 10057 | 30MHz-6GHz | June 18,2014 | June 17,2015 |
| RF CABLE-1m | JYE Bao | RG142 | CB034-1m | 20MHz-7GHz | June 18,2014 | June 17,2015 |
| RF CABLE-2m | JYE Bao | RG142 | CB035-2m | 20MHz-1GHz | June 18,2014 | June 17,2015 |

Note: All equipment through GRGT EST calibration

-----THE END OF REPORT-----